

MPE TEST REPORT

Product : Notebook Personal Computer

Model(s): W190

(with WLAN a/b/g Module, INTEL, Model:WM3945ABG)

(with Bluetooth Module, BILLIONTON, Model:GUBTCR42M)

Brand: MTC; GETAC

Applicant: MITAC Technology Corporation

Address: 4F, No.1, R&D Road 2,

Hsinchu Science-Based industrial Park,

Hsinchu 300

Taiwan

Test Performed by:

International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; TAF: 0997; NVLAP: 200234-0;

IC: IC4164-1; VCCI: R-1435, C-1440, T-299; NEMKO: ELA 113B

*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-08LR001MPE

Issue Date : 2008/01/18

Contents of Report

1.	General.....	1
1.1.	Certification of Accuracy of Test Data.....	1
1.	Description of Equipment Under Test (EUT)	2
2.	Description of Support Equipment	5
2.1	Description of Support Equipment	5
2.1.1	Software for Controlling Support Unit	5
2.1.2	I/O Cable Condition of EUT and Support Units.....	5
2.2	General Test Conditions	6
3.	RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]	7
3.1	Applied Standards.....	7
3.2	Test Procedure	7
3.3	Test Setup.....	7
3.4	Calculation for Maximum Permissible Exposure (MPE)	7
4.	Appendix : Test Equipment.....	10
4.1	Test Equipment List.....	10

1. General

1.1. Certification of Accuracy of Test Data

Standards:	CFR 47 Part 15 Subpart B Class B CFR 47 Part 15 Subpart C (Section 15.247)
Test Procedure:	ANSI C63.4:2003
Equipment Tested:	Notebook Personal Computer
Model:	W190
Applied by:	MITAC Technology Corporation
Sample received Date:	2007/12/21
Final test Date :	2007/12/31
Test Result	PASS
Test Site:	Chamber 12, Conduction 02
Temperature	Refer to each site test data
Humidity:	Refer to each site test data
Test Engineer:	 Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature



Roy Hsieh / Manager

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 12 pages, including 1 cover page, 1 contents page, and 10 pages for the test description. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

1. Description of Equipment Under Test (EUT)

Description:	Notebook Personal Computer
Condition:	Pre-Production
Model:	W190
Brand:	MTC;GETAC
Wireless LAN Module:	Intel, Model: WM3945ABG
Bluetooth Module:	BILLIONTON(Model:GUBTCR42M)
Frequency Range of 802.11a:	5150 - 5250 MHz 5250 - 5350 MHz 5725 - 5850 MHz
Frequency Range of 802.11b/g:	2400 - 2483.5 MHz
Frequency Range of Bluetooth:	2400 - 2483.5 MHz
Support channel:	13 Channels 11 Channels 79 Channels
Modulation Skill:	OFDM (6 Mbps – 54 Mbps) DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps) OFDM (6M - 54Mbps) GFSK (1Mbps)
Antennas Type:	
WLAN Main antenna:	PIFA (Model: W190 WLAN Antenna) Black made by JOINSOON ELECTRONICS MFG. CO., LTD
WLAN Aux antenna:	PIFA (P/N: W190 WLAN Antenna) Grey made by JOINSOON ELECTRONICS MFG. CO., LTD
Bluetooth antenna:	Chip Antenna(Model: RFANT5220), made by Walsin Technology Corporation.
Antenna Connected:	Connected to RF connector on the PCB of the Bluetooth or WLAN module .The user is not possible to change the antenna without disassembling the notebook computer.
Antenna peak Gain:	
WLAN Main antenna	0.04dBi(11b,11g), -0.1dBi(11a)
WLAN Aux antenna	-0.3 dBi (11b,11g), -0.54 dBi (11a)
Bluetooth antenna	2.66 dBi
Power Type of wireless module:	3.3V DC from Notebook PC
Power Type of Bluetooth module:	3.3V DC from Notebook PC

The channel and the operation frequency of 802.11a listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5180	02	5200
03	5220	04	5240
05	5260	06	5280
07	5300	08	5320
09	5745	10	5765
11	5785	12	5805
13	5825		

The channel and the operation frequency of 802.11b and 802.11g listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The channels and the operation frequency of Bluetooth listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	01	2403
02	2404	03	2405
04	2406	05	2407
.....
75	2477	76	2478
77	2479	78	2480

CPU:

Genuine intel U7600 1.2GHz

Memory:

Hynix (Model:HY5PS12821C FP-Y5) 1GB

Power Supply Type:

DELTA(Model:ADP-90SB BB

INPUT:100~240V ~ 1.5A 50-60HZ

OUTPUT:19V~4.74A

Hard Disk Drive:

Toshiba(Model:4032GSX) 40G or

Toshiba(Model:8032GSX) 80G or

Toshiba(Model:1234GSX) 120G

LCD Panel:

Toshiba(Model:LTD121EC5S)

USB 2.0 Connector:

two

LAN Connector:

one

Modem Port:

one

Serial Port:

one

D-SUB Port:

one

Microphone Port:

one

Earphone Port:

one

PCMCIA Connector:

one

Docking Connector:

one

Battery:

GTK P/N:338911120050

Power cord:

Non-shielded, Detachable 3-pin

All types of device listed above have been tested. We present the worst case test data in the report.
 The test configuration is listed below:

For EMI Configuration:

Configuration	
CPU	Genuine intel U7600 1.2GHz
LCD	Toshiba(Model:LTD121EC5S)
Hard Disk Device	Toshiba(Model:1234GSX) 120G
Memory	Hynix (Model:HY5PS12821C FP-Y5)
Wireless LAN card	Intel(Model:WM3945ABG)
Battery	GTK P/N:338911120050
Bluetooth	BILLIONTON(Model:GUBTCR42M)
Power Supply Type	DELTA(Model:ADP-90SB BB)

EMI Noise Source:

Crystal: 32.768KHz(X1) 25MHz(X2) 10MHz(X501)
 14.318MHz(X502)

Clock Generator: U517

EMI Solution:

1. Add Gasket behind LCD Panel
2. Add Gasket behind Computer
3. Add shielded tape on LCD Signal cable
4. Add aluminum foil behind LCD Panel
5. Add Gasket on LCD Panel Right and Left
6. Add shielded tape behind Computer

2. Description of Support Equipment

2.1 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
24" LCD Monitor	2407WFPb S/N: N/A	DELL	Non-shielded Detachable	FCC DOC
Dell USB Mouse	MO56UC S/N: 511001742	DELL	NA	FCC DOC

2.1.1 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- Read and write to the disk drives.
- The RF software makes the transmitter continuously sending RF signals
- Repeat the above steps.

	Filename	Issued Date
CRTU 3945ABG version 4.0.18.0000	CRTU.exe	2005/10/16

2.1.2 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to EUT SPS	1.8M	Nonshielded, Detachable	Plastic Head
Monitor D-SUB Data Cable	Monitor D-SUB Port to EUT VGA Port	1.8M	Shielded, Detachable(with core)	Metal Head
USB Mouse Cable	USB Mouse to Docking USB Port	1.7M	Shielded, Un-detachable	Metal Head

2.2 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 87% for 802.11b.
2. The EUT was set in continuously transmitting mode with a duty cycle of 87% for 802.11g.
3. The channel 1, 6, 11 of 802.11b/g of EUT were all tested.

3. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


3.1 Applied Standards

FCC PART 1.1307, 1.1310, 2.1091, 2.1093 RF EXPOSURE

3.2 Test Procedure

The Transmitter output of EUT was connected to the Peak Power Analyzer

3.3 Test Setup

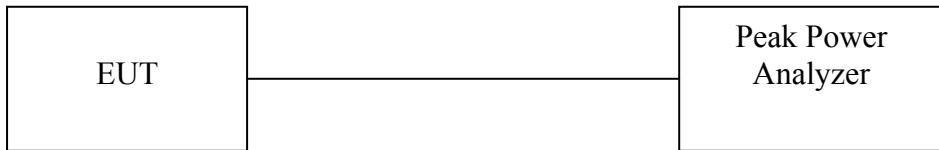

3.4 Calculation for Maximum Permissible Exposure (MPE)

From FCC 1.1310 Table 1B, the maximum permissible RF exposure for an uncontrolled environment is 1 mW/cm². The actual power density for the EUT with the antenna is calculated as shown below.

$$S = (P \times G) / (4 \times \pi \times d^2)$$

where:

S = power density

P = transmitter conducted power in (W)

G = antenna numeric gain

d = distance to radiation center (m)

<<DATA>>

Bluetooth

Antenna	Antenna	Gain	Numeric	Frequency	Power	Power	Separation	Power	Power
Manufacturer	Type	(dBi)	Gain	(MHz)	(dBm)	(mW)	Distance	Density	Density
							(cm)	(W/m2)	(mW/cm2)
Walsin Technology Corporation. Model: RFANT5220	Chip Antenna	2.66	1.8450154	2402	2.9	1.949845	20	0.007157	0.0007157
				2441	3.65	2.317395	20	0.0085061	0.00085061
				2480	3.23	2.103778	20	0.007722	0.0007722

802.11a

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m2)	Power Density (mW/cm2)
JOINSOON ELECTRONICS MFG. CO., LTD Model: W190 WLAN Antenna	PIFA in Metal	-0.1	0.98	5180	9.96	9.91	20	0.0193	0.00193
				5240	9.32	8.55	20	0.0166	0.00166
				5260	12.65	18.41	20	0.0358	0.00358
				5320	12.72	18.71	20	0.0364	0.00364
				5745	15.32	34.04	20	0.0662	0.00662
				5785	14.55	28.51	20	0.0554	0.00554
				5825	14.43	27.73	20	0.0539	0.00539

802.11b

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric	Frequency	Power	Power	Separation	Power	Power
Manufacturer	Type	(dBi)	Gain	(MHz)	(dBm)	(mW)	Distance	Density	Density
JOINSOON ELECTRONICS MFG. CO., LTD Model: W190 WLAN Antenna	PIFA in Metal	0.04	1.01	2412	15.64	36.64	20	0.0736	0.00736
				2437	15.91	38.99	20	0.0783	0.00783
				2462	15.29	33.81	20	0.0679	0.00679

802.11g

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m2)	Power Density (mW/cm2)
JOINSOON ELECTRONICS MFG. CO., LTD Model: W190 WLAN Antenna	PIFA in Metal	0.04	1.01	2412	17.08	51.05	20	0.1025	0.01025
				2437	16.99	50.00	20	0.1004	0.01004
				2462	15.45	35.08	20	0.0704	0.00704

WARNING:

It is the responsibility of the installer to ensure that the EUT is a WLAN module and a specified antenna inside. Only the specified antennas listed above may be used. The use of any other antenna is expressly forbidden in accordance with FCC rules CFR 47 part 15.204.

NOTICE:

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits for an uncontrolled environment when installed as directed. This equipment should be installed and operated with the specified antenna listed in this report.

4. Appendix : Test Equipment

4.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1Ghz	Peak Power Analyzer	HP	8990A	3621A01269	01/02/2007	01/02/2008

Note: Calibration traceable to NIST or national or international standards.