



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

NOTEBOOK COMPUTER

Model: V100

Trade Name: Getac

Issued to

Getac Technology Corp.
No.1,R&D Road 2 , Hsinchu Science Based Industrial Park ,
Hsinchu , Taiwan

Issued by



Compliance Certification Services Inc.
No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338), Taiwan, R.O.C.
<http://www.ccsrf.com>
service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

| | |
|---|------------|
| 1. TEST RESULT CERTIFICATION..... | 3 |
| 2. EUT DESCRIPTION | 4 |
| 3. TEST METHODOLOGY | 6 |
| 3.1 EUT CONFIGURATION..... | 6 |
| 3.2 EUT EXERCISE | 6 |
| 3.3 GENERAL TEST PROCEDURES | 6 |
| 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 7 |
| 3.5 DESCRIPTION OF TEST MODES | 8 |
| 4. INSTRUMENT CALIBRATION..... | 9 |
| 4.1 MEASURING INSTRUMENT CALIBRATION | 9 |
| 4.2 MEASUREMENT EQUIPMENT USED | 9 |
| 4.3 MEASUREMENT UNCERTAINTY | 11 |
| 5. FACILITIES AND ACCREDITATIONS | 12 |
| 5.1 FACILITIES | 12 |
| 5.2 EQUIPMENT | 12 |
| 5.3 TABLE OF ACCREDITATIONS AND LISTINGS | 13 |
| 6. SETUP OF EQUIPMENT UNDER TEST | 14 |
| 6.1 SETUP CONFIGURATION OF EUT | 14 |
| 6.2 SUPPORT EQUIPMENT | 14 |
| 7. FCC PART 15 REQUIREMENTS..... | 15 |
| 7.1 26 DB EMISSION BANDWIDTH | 15 |
| 7.2 MAXIMUM CONDUCTED OUTPUT POWER | 33 |
| 7.3 BAND EDGES MEASUREMENT..... | 39 |
| 7.4 PEAK POWER SPECTRAL DENSITY | 52 |
| 7.5 PEAK EXCURSION | 69 |
| 7.6 RADIATED UNDESIRABLE EMISSION..... | 86 |
| 7.7 CONDUCTED UNDESIRABLE EMISSION | 116 |
| 7.8 POWERLINE CONDUCTED EMISSIONS | 130 |
| 7.9 FREQUENCY STABILITY..... | 133 |
| 7.10 DYNAMIC FREQUENCY SELECTION..... | 152 |
| APPENDIX I RADIO FREQUENCY EXPOSURE | 179 |
| APPENDIX II PHOTOGRAPHS OF TEST SETUP..... | 181 |
| APPENDIX 1 - PHOTOGRAPHS OF EUT | |



1. TEST RESULT CERTIFICATION

Applicant: Getac Technology Corp.
No.1,R&D Road 2 , Hsinchu Science Based Industrial
Park ,Hsinchu , Taiwan

Equipment Under Test: NOTEBOOK COMPUTER

Trade Name: Getac

Model: V100

Date of Test: July 26 ~ September 13, 2010

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart E | No non-compliance noted |

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | | | | |
|---|---|-------------|------------------------------|---------------------------|
| Product | NOTEBOOK COMPUTER | | | |
| Trade Name | Getac | | | |
| Model Number | V100 | | | |
| Model Discrepancy | N/A | | | |
| WLAN Module Trade Name / Model | Intel / Intel Advanced-N 6200 WiFi Card | | | |
| Power Supply | 1. Power Adapter: Getac / ADM-6019M I/P: 100-240V, 1.5A, 50-60Hz O/P: 19V, 3.16A 2. VDC from Battery: Mode: BP-LC2600/33-01SI Rating: DC 11.1V, 7800mAh, 87Wh | | | |
| Operating Frequency Range & Number of Channels | | Mode | Frequency Range (MHz) | Number of Channels |
| UNII Band I | IEEE 802.11a | 5180 ~ 5240 | 4 Channels | |
| | draft 802.11n Standard-20 MHz | 5180 ~ 5240 | 4 Channels | |
| | draft 802.11n Wide-40 MHz | 5190 ~ 5230 | 2 Channels | |
| UNII Band II | IEEE 802.11a | 5260 ~ 5320 | 4 Channels | |
| | draft 802.11n Standard-20 MHz | 5260 ~ 5320 | 4 Channels | |
| | draft 802.11n Wide-40 MHz | 5270 ~ 5310 | 2 Channels | |
| UNII Band III | IEEE 802.11a | 5500 ~ 5700 | 11 Channels | |
| | draft 802.11n Standard-20 MHz | 5500 ~ 5700 | 11 Channels | |
| | draft 802.11n Wide-40 MHz | 5510 ~ 5670 | 5 Channels | |
| Transmit Power | IEEE 802.11a mode / 5180 ~ 5240MHz: 13.96 dBm draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz: 9.51 dBm draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz: 13.19 dBm IEEE 802.11a mode / 5260 ~ 5320MHz: 17.3 dBm draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz: 16.75 dBm draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz: 16.98 dBm IEEE 802.11a mode / 5500 ~ 5700MHz: 17.39 dBm draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz: 17.19 dBm draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz: 17.02 dBm | | | |
| Modulation Technique | OFDM (QPSK, BPSK, 16-QAM, 64-QAM) | | | |
| Transmit Data Rate | IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps) | | | |
| Antenna Specification | UNII Band I IEEE 802.11a: Gain: 2.41dBi UNII Band II: IEEE 802.11a: Gain: 1.86 UNII Band III: IEEE 802.11a: Gain: 3.48 | | | |
| Antenna Designation | PIFA Antenna | | | |

**Operation Frequency:**

| UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) | |
|---|------------|
| CHANNEL | MHz |
| 36 | 5180 |
| 38 | 5190 |
| 40 | 5200 |
| 44 | 5220 |
| 46 | 5230 |
| 48 | 5240 |
| 52 | 5260 |
| 54 | 5270 |
| 56 | 5280 |
| 60 | 5300 |
| 62 | 5310 |
| 64 | 5320 |
| 100 | 5500 |
| 102 | 5510 |
| 104 | 5520 |
| 108 | 5540 |
| 110 | 5550 |
| 112 | 5560 |
| 116 | 5580 |
| 118 | 5590 |
| 120 | 5600 |
| 124 | 5620 |
| 126 | 5630 |
| 128 | 5640 |
| 132 | 5660 |
| 134 | 5670 |
| 136 | 5680 |
| 140 | 5700 |
| 149 | 5745 |

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **MAU043** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.
3. The EUT is only IT1R.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: V100) had been tested under operating condition.

The EUT comes with one battery and one power adapter for sale. After the preliminary test, the EUT with power adapter was found to emit the worst emissions and therefore had been tested under standby condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE 802.11a mode / 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11a mode / 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz:

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz:

Channel Low (5270MHz) and Channel High (5310MHz) with 13.5Mbps data rate were chosen for full testing.

IEEE 802.11a mode / 5500 ~ 5700MHz:

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz:

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz:

Channel Low (5510MHz), Channel Mid (5590MHz) and Channel High (5670MHz) with 13.5Mbps data rate were chosen for full testing.

This amplifier is only connected to used for 2.4 GHz antenna part.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 03/03/2011 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|--------------------|--------------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 10/27/2011 |
| EMI Test Receiver | R&S | ESCI | 100064 | 02/04/2011 |
| Pre-Amplifier | Mini-Circuits | ZFL-1000LN | SF350700823 | 01/13/2011 |
| Pre-Amplifier | MITEQ | AFS44-00102650-42-10P-44 | 1415367 | 11/20/2010 |
| Bilog Antenna | Sunol Sciences | JB3 | A030105 | 09/10/2011 |
| Horn Antenna | EMCO | 3117 | 00055165 | 12/07/2010 |
| Loop Antenna | EMCO | 6502 | 8905/2356 | 06/10/2013 |
| Turn Table | CCS | CC-T-1F | N/A | N.C.R |
| Antenna Tower | CCS | CC-A-1F | N/A | N.C.R |
| Controller | CCS | CC-C-1F | N/A | N.C.R |
| Site NSA | CCS | N/A | N/A | 12/31/2010 |
| Test S/W | EZ-EMC (CCS-3A1RE) | | | |



| Powerline Conducted Emissions Test Site | | | | |
|--|---------------------|--------------|----------------------|------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| L.I.S.N | SCHWARZBECK | NSLK 8127 | 8127-465 | 08/12/2011 |
| L.I.S.N | SCHWARZBECK | NSLK 8127 | 8127-473 | 03/22/2011 |
| EMI Test Receiver | ROHDE & SCHWARZ | ESHS 30 | 838550/003 | 01/28/2011 |
| Pulse Limit | ROHDE & SCHWARZ | ESH3-Z2 | 100117 | 09/16/2011 |
| N Type Coaxial Cable | BELDEN | 8268 M17/164 | 003 | 07/09/2011 |
| I.S.N. | SCHAFFNER | T800 | 24313 | 05/04/2011 |
| Ferrite Clamp | SCHAFFNER | KEMA801 | 15937 | 05/04/2011 |
| Current Probe | SCHAFFNER | SMZ11 | 14802 | N.C.R. |

| Dynamic Frequency Selection | | | | |
|------------------------------------|---------------------|--------------|----------------------|------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Rohde&Schwarz | FSEK 30 | 100264 | 04/08/2011 |
| Signal Generator | Agilent | E8267C | US42340162 | 04/08/2011 |



4.3 MEASUREMENT UNCERTAINTY

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Powerline Conducted Emission | +/- 1.7468 |
| 3M Semi Anechoic Chamber / 30M~200M | +/- 4.0606 |
| 3M Semi Anechoic Chamber / 200M~1000M | +/- 3.9979 |
| 3M Semi Anechoic Chamber / 1G~8G | +/- 2.5790 |
| 3M Semi Anechoic Chamber / 8G~18G | +/- 2.5928 |
| 3M Semi Anechoic Chamber / 18G~26G | +/- 2.7212 |
| 3M Semi Anechoic Chamber / 26G~40G | +/- 2.9520 |

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.989-1, Wenshan Rd., Qionglin Township, Hsinchu County 307, Taiwan (R.O.C.)
Tel: +886-3-5921698

Remark: The powerline conducted emissions items was tested at Compliance Certification Services Inc. (Hsinchu Lab.) The test equipments were listed in page 10 and the test data, please refer page 131-132.

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3 TABLE OF ACCREDITATIONS AND LISTINGS**

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|--|
| USA | A2LA | CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3 |  ACCREDITED No. 0824-01 |
| USA | FCC MRA | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  TW1026 |
| Japan | VCCI | 3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements |  R-2882/2541/2798/725/1868 C-402/747/912 T-321/325 |
| Taiwan | TAF | EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07/ 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803 |  Testing Laboratory 0363 |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 | SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014 |
| Canada | Industry Canada | RSS212, Issue 1 |  IC 2324C-3 IC 2324C-5 |

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Product | Manufacturer | Model No. | Serial No. | FCC ID |
|-----|--|----------------|-------------------|-----------------|----------------|
| 1 | GPS Simulator | HWAJEAT | GPS-101 | EN001 | --- |
| 2 | 8960 Series 10 Wireless Communication test set | Agilent | E5515C | GB44051665 | --- |
| 3 | ADVANCED HYBRID SYSTEM | Panasonic | KX-TA308 | --- | --- |
| 4 | Notebook PC | Lenovo ideaPad | S10e_4068-RZ1 | L3CEV2D | HFS-FL |
| 5 | Notebook PC | HP | nx6130 | CNU543274R | CNTWM3B2200BGA |
| 6 | Bluetooth Headset | Motorola | H17 | SJYN029A | IHDP6KE1 |
| 7 | Modem | ZyXEL | Omni 56K | S1Z4107727 | 1880MNI56K |
| 8 | LED Monitor | ViewSonic | VS12085 | R18082200389 | DoC |
| 9 | Headset/Microphone | ERGOTECH | ET-E203 | 4719405008042 | --- |
| 10 | E-SATA External hard | VANTEC | NexStar CX | --- | --- |
| 11 | Flash disk | Transcend | CompactFlash512MB | 1561433338 | --- |
| 12 | Flash disk | Sayho | PR1014(256M) | 104720 | --- |
| 13 | SD Crad | SanDisk | --- | --- | --- |
| 14 | Smart Card | HOME RUN CARD | --- | --- | --- |
| 15 | PCMCIA Card (CF Adapter) | Billionton | 1211004-0040 | 00082900065 | --- |
| 16 | CF Card | iEi | ICF1000 | ICF-10001-128MB | --- |

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



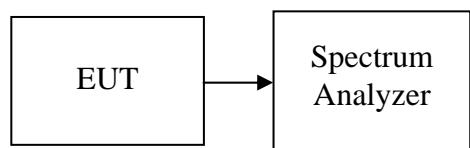
7. FCC PART 15 REQUIREMENTS

7.1 26 DB EMISSION BANDWIDTH

LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5180 | 17.8778 |
| Mid | 5220 | 17.6860 |
| High | 5240 | 18.1167 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5180 | 17.7229 |
| Mid | 5220 | 17.7124 |
| High | 5240 | 17.7051 |

Test mode: draft 802.11n Wide-40 MHz Channel mode/ 5190 ~ 5230MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5190 | 35.1716 |
| High | 5230 | 35.0385 |

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5260 | 26.7455 |
| Mid | 5280 | 25.9677 |
| High | 5320 | 24.8279 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5260 | 22.9213 |
| Mid | 5280 | 21.2566 |
| High | 5320 | 20.7527 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5270 | 35.0599 |
| High | 5310 | 35.0841 |



Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

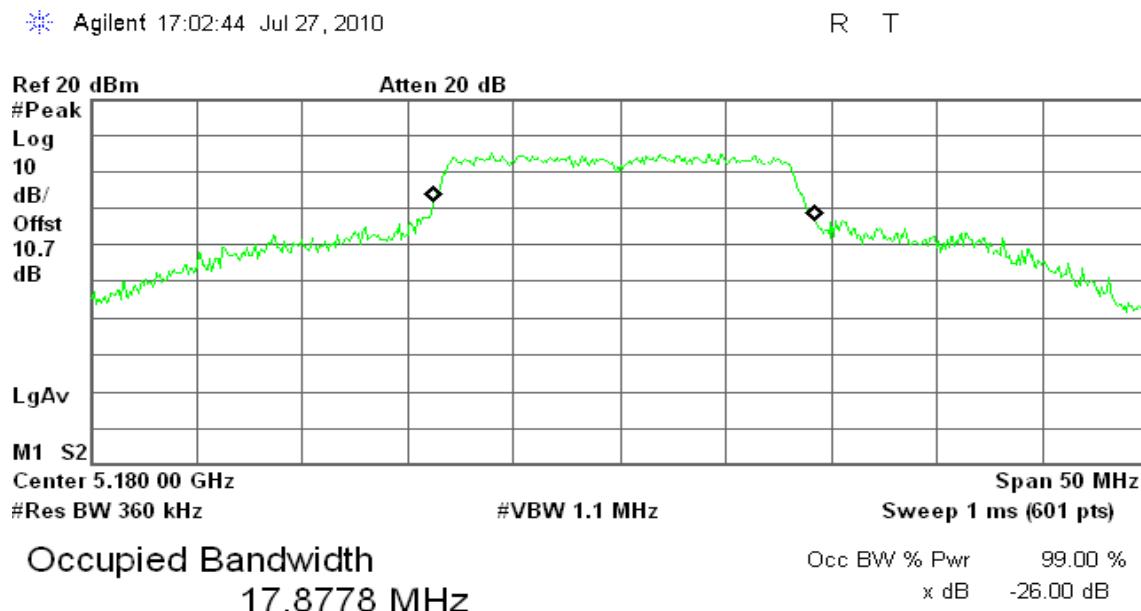
| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5500 | 21.3457 |
| Mid | 5600 | 21.2108 |
| High | 5700 | 23.8520 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz

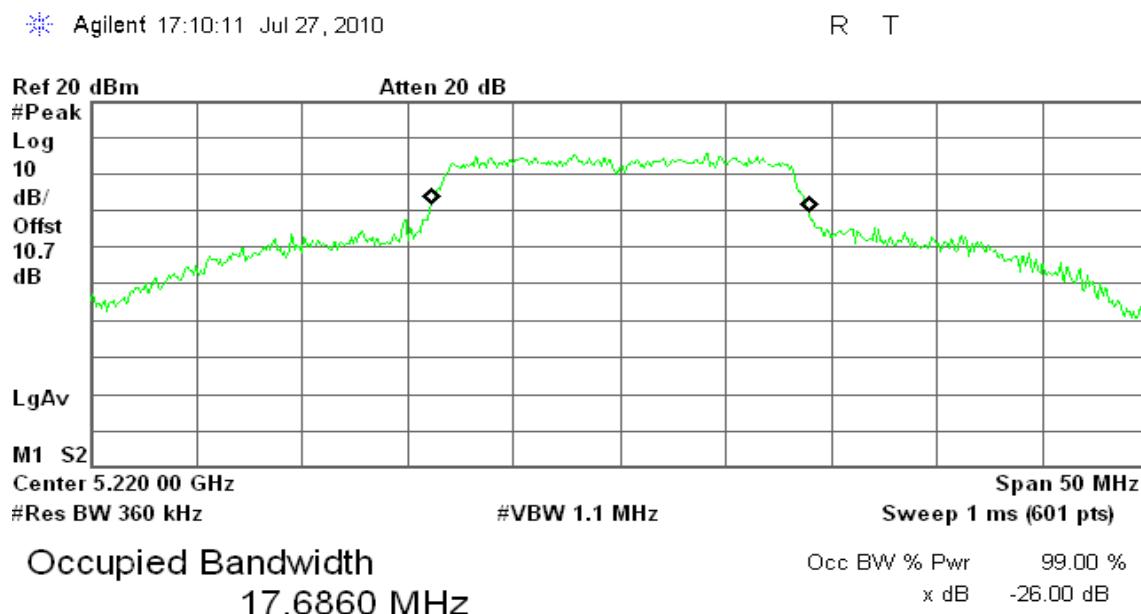
| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5500 | 19.1300 |
| Mid | 5600 | 20.7282 |
| High | 5700 | 21.5958 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 5510 | 35.6595 |
| Mid | 5590 | 35.6675 |
| High | 5670 | 35.7511 |

**Test Plot****IEEE 802.11a mode / 5180 ~ 5240MHz****CH Low**

Transmit Freq Error 198.653 kHz
x dB Bandwidth 35.440 MHz

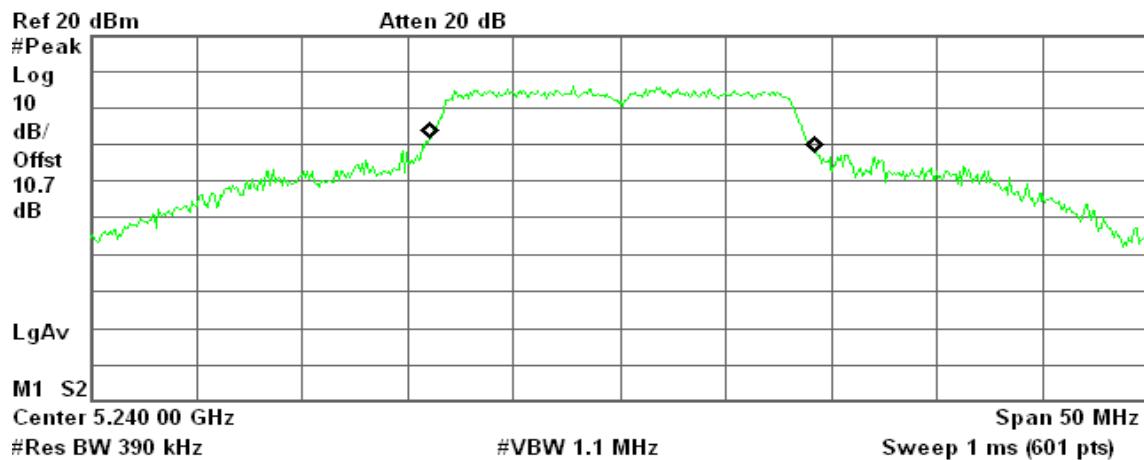
CH Mid

Transmit Freq Error 41.596 kHz
x dB Bandwidth 34.251 MHz

**CH High**

Agilent 17:14:12 Jul 27, 2010

R T

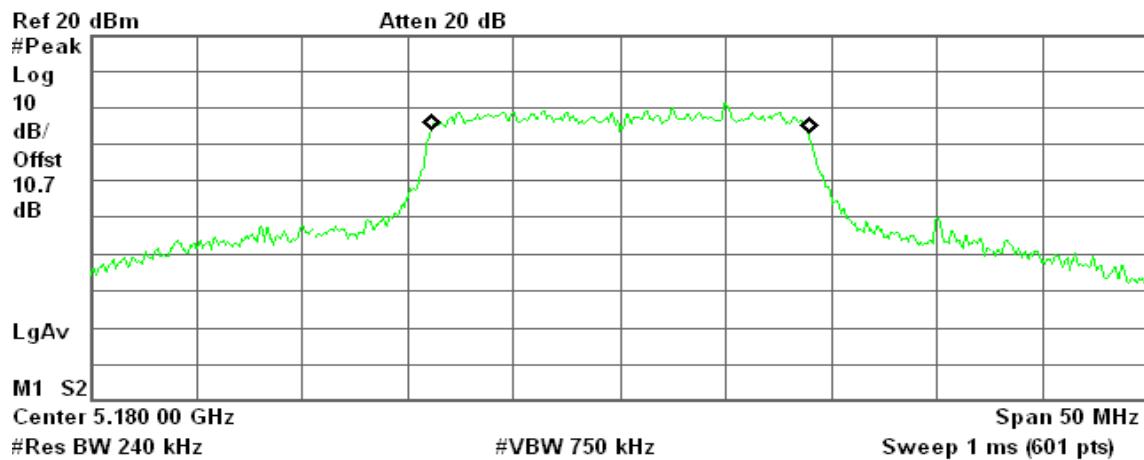


Transmit Freq Error 140.472 kHz
x dB Bandwidth 36.030 MHz

draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz**CH Low**

Agilent 14:50:01 Jul 28, 2010

R T

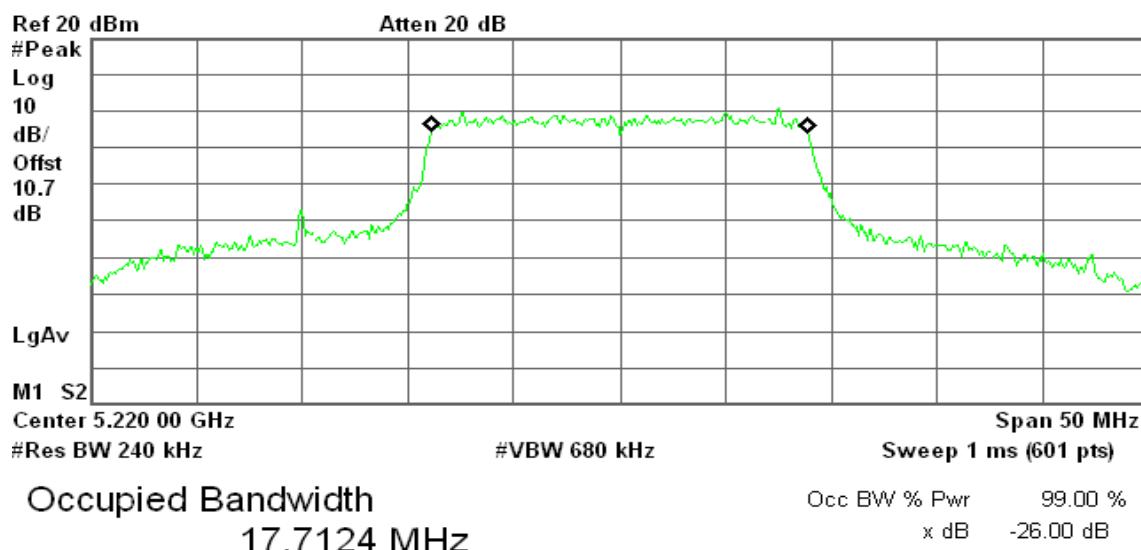


Transmit Freq Error 14.632 kHz
x dB Bandwidth 19.966 MHz

**CH Mid**

Agilent 14:52:20 Jul 28, 2010

R T

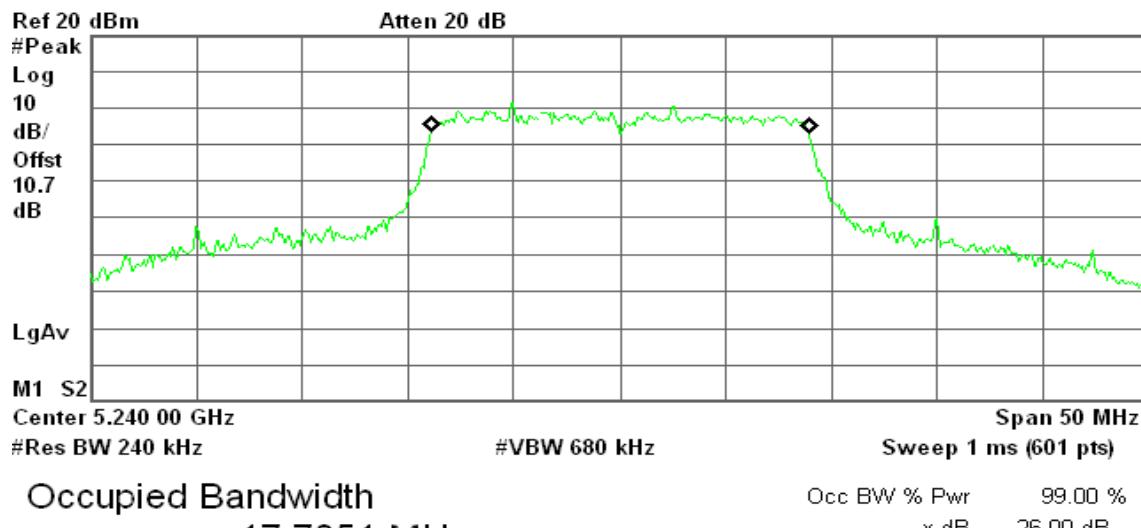


Transmit Freq Error 16.057 kHz
x dB Bandwidth 19.974 MHz

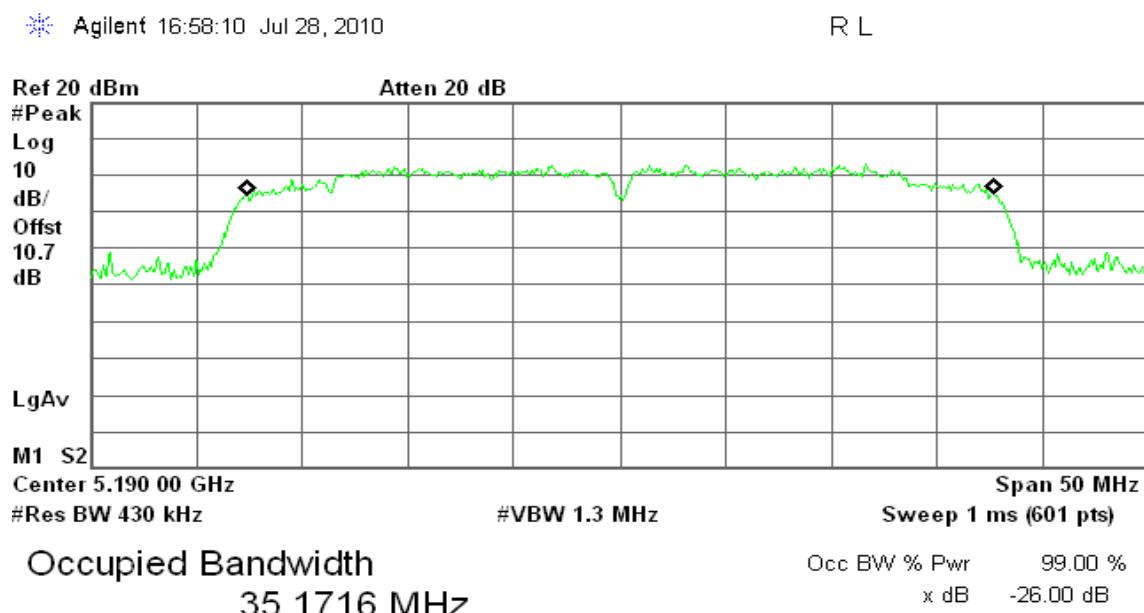
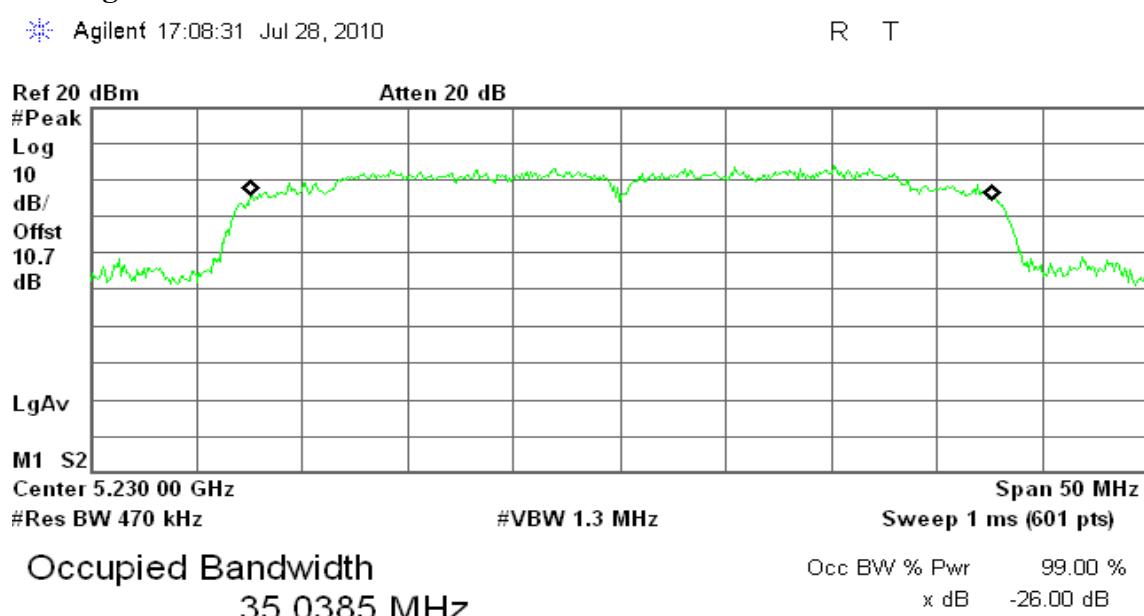
CH High

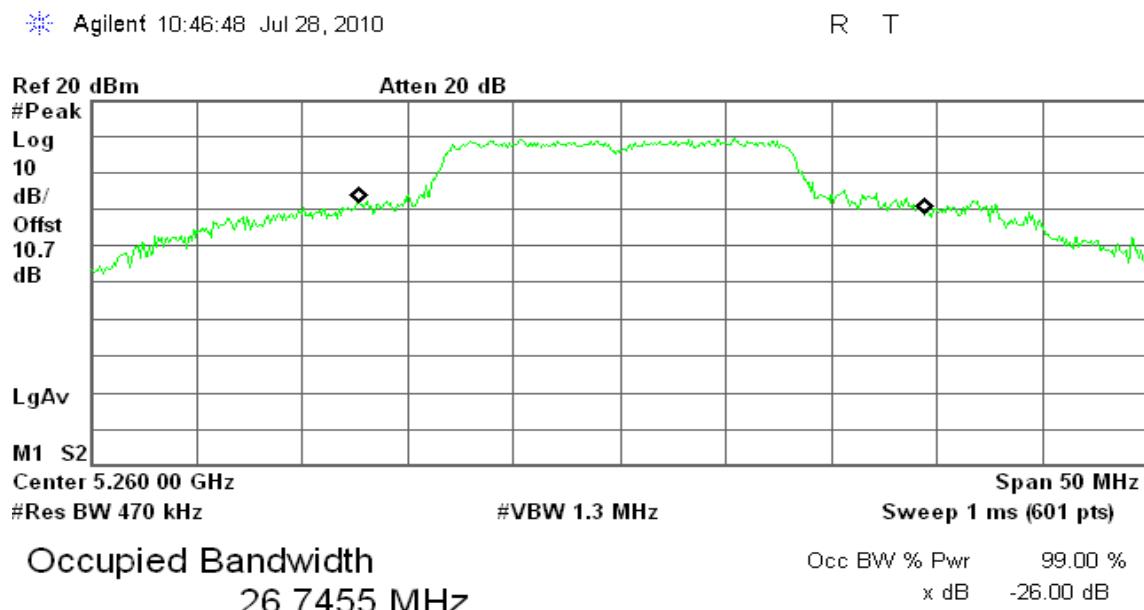
Agilent 14:35:53 Jul 28, 2010

R T

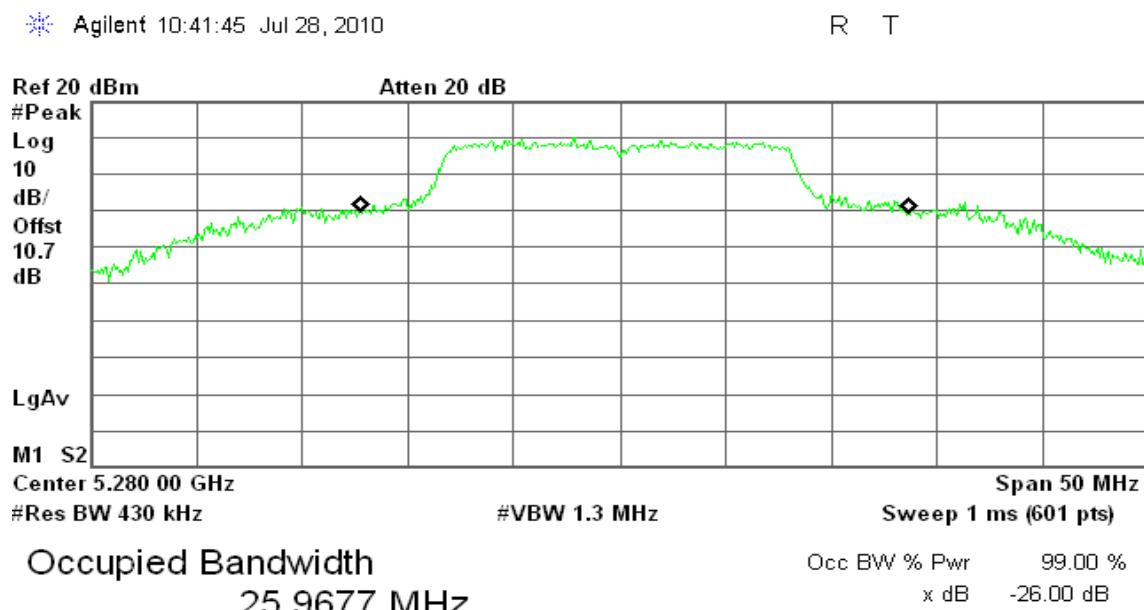


Transmit Freq Error 25.611 kHz
x dB Bandwidth 19.779 MHz

**draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz****CH Low****CH High**

**IEEE 802.11a mode / 5260 ~ 5320MHz****CH Low**

Transmit Freq Error 1.034 MHz
x dB Bandwidth 40.339 MHz

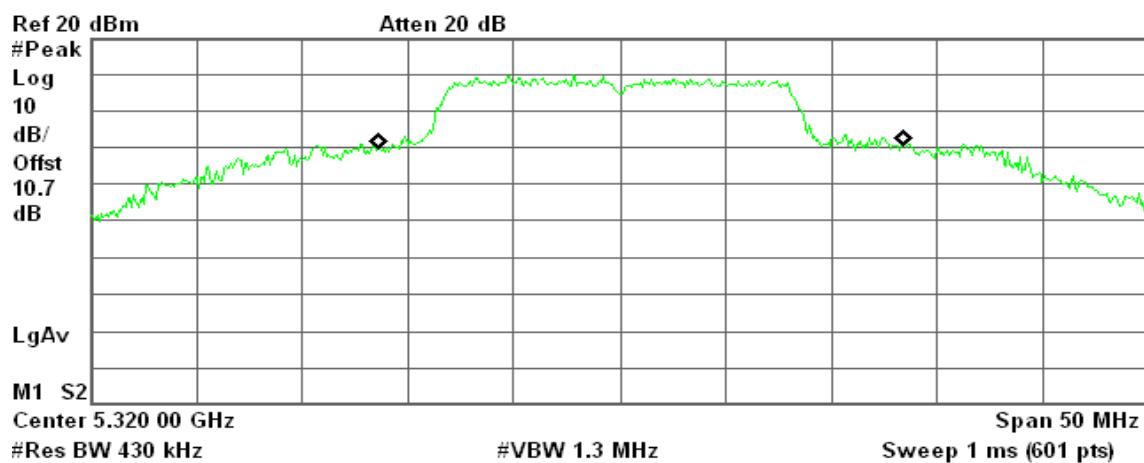
CH Mid

Transmit Freq Error 720.370 kHz
x dB Bandwidth 40.034 MHz

**CH High**

Agilent 10:52:48 Jul 28, 2010

R T



Transmit Freq Error 963.460 kHz
x dB Bandwidth 38.964 MHz

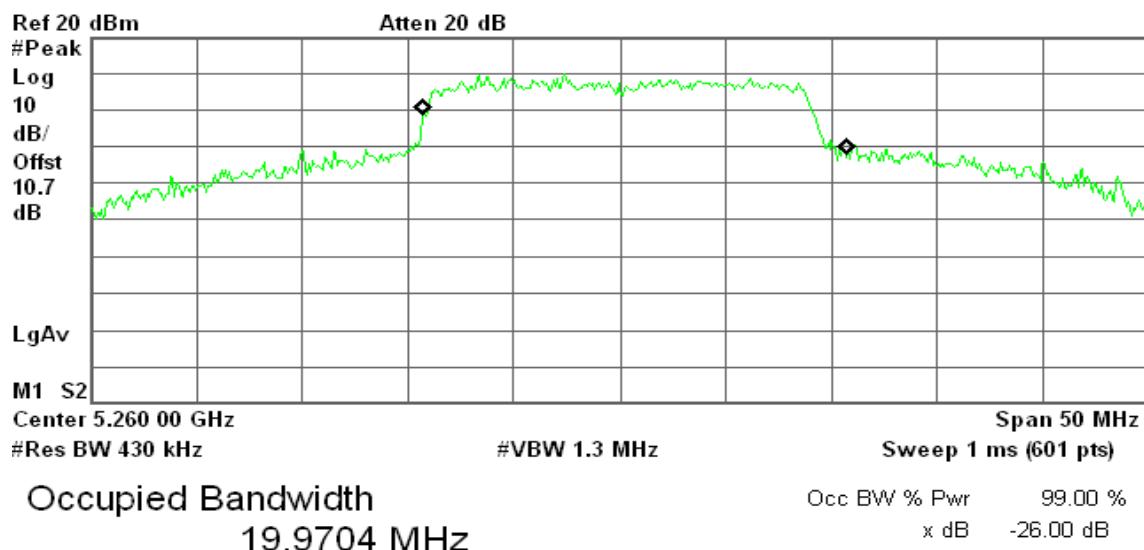


draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

CH Low

Agilent 14:57:42 Jul 28, 2010

R T

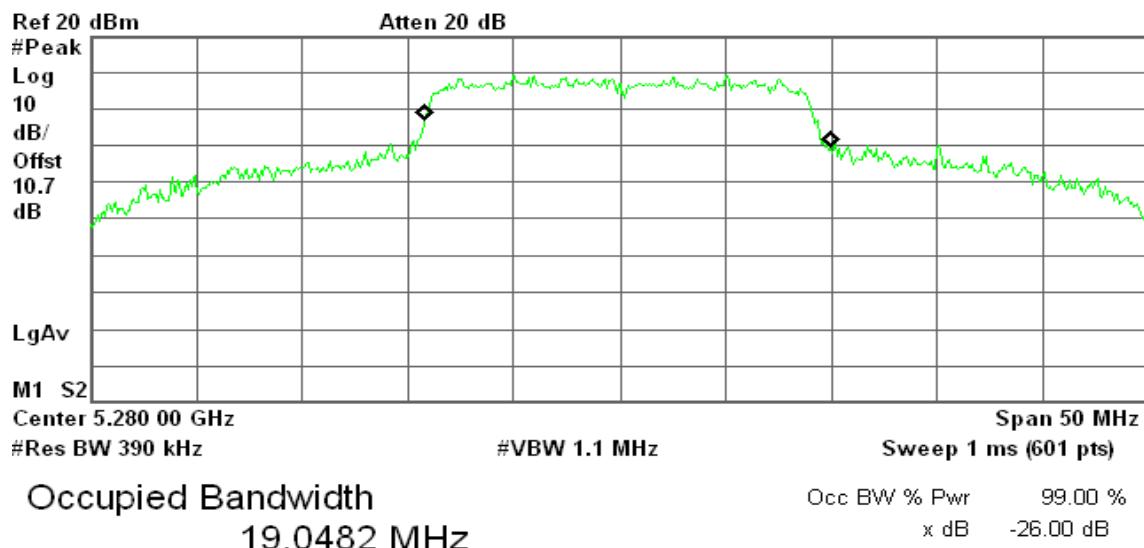


Transmit Freq Error 734.151 kHz
x dB Bandwidth 37.116 MHz

**CH Mid**

Agilent 15:00:54 Jul 28, 2010

R T

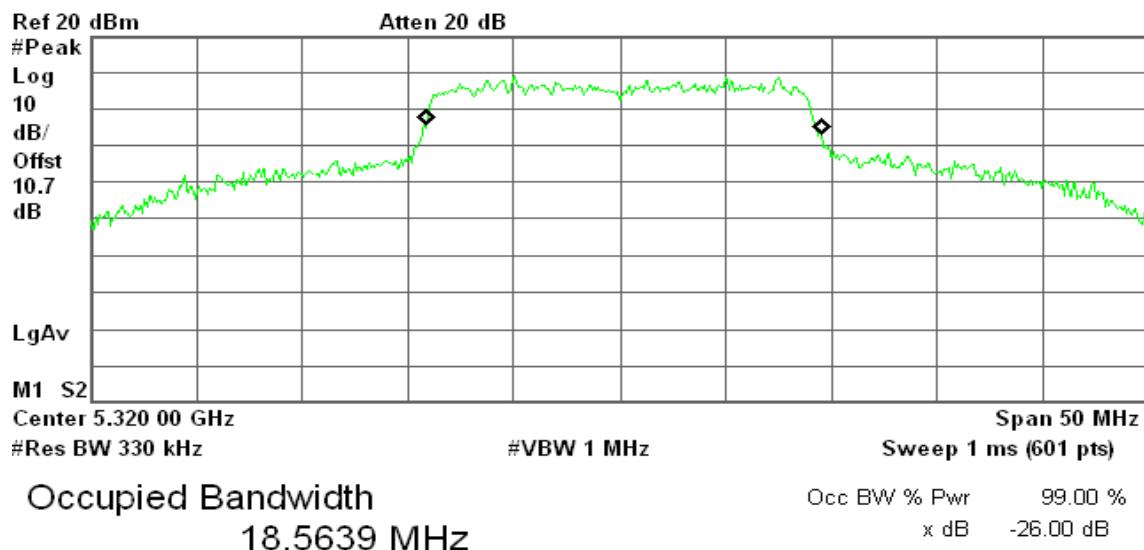


Transmit Freq Error 389.039 kHz
x dB Bandwidth 37.598 MHz

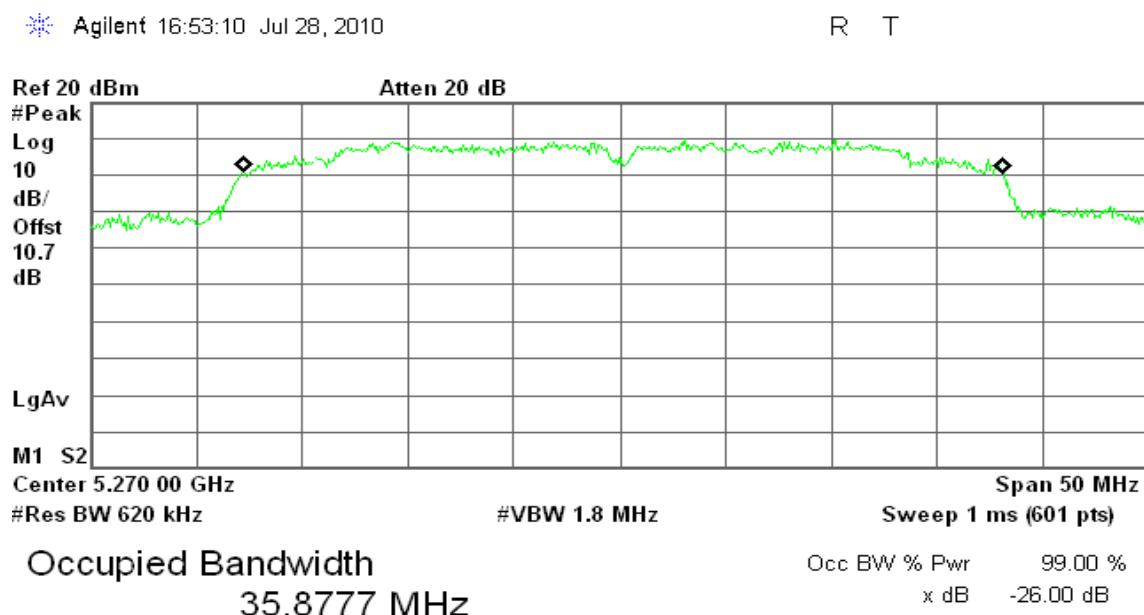
CH High

Agilent 15:03:41 Jul 28, 2010

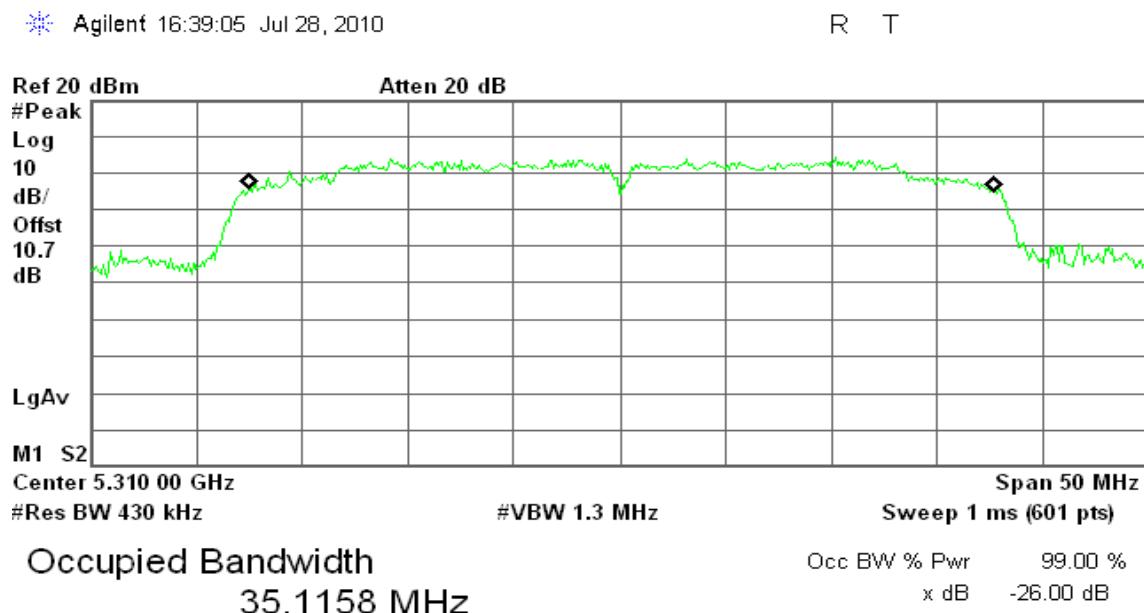
R L



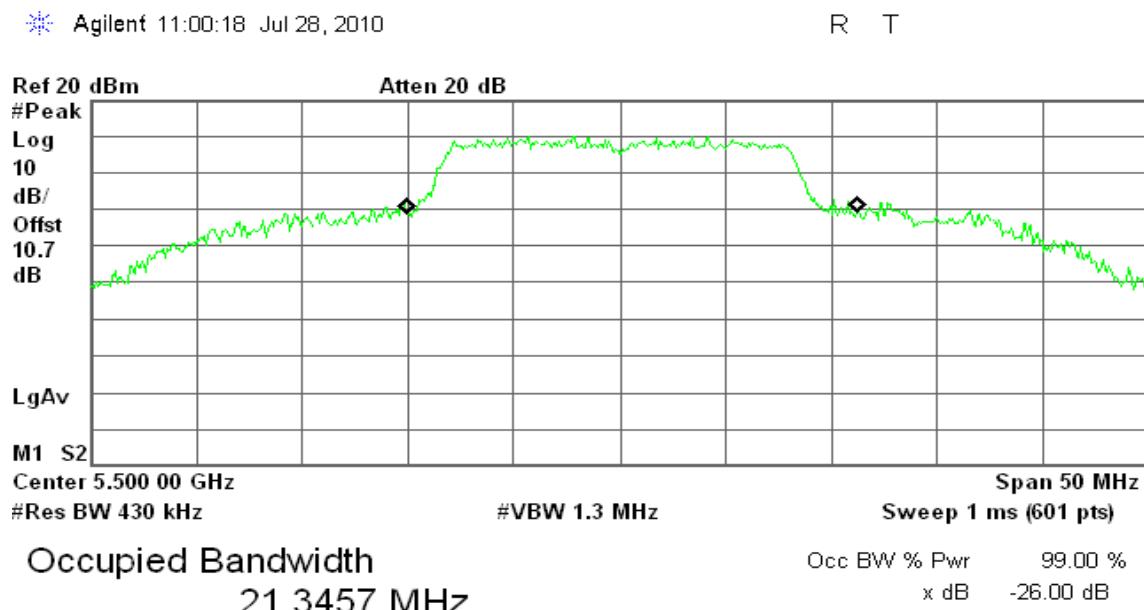
Transmit Freq Error 230.887 kHz
x dB Bandwidth 35.759 MHz

**draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz****CH Low**

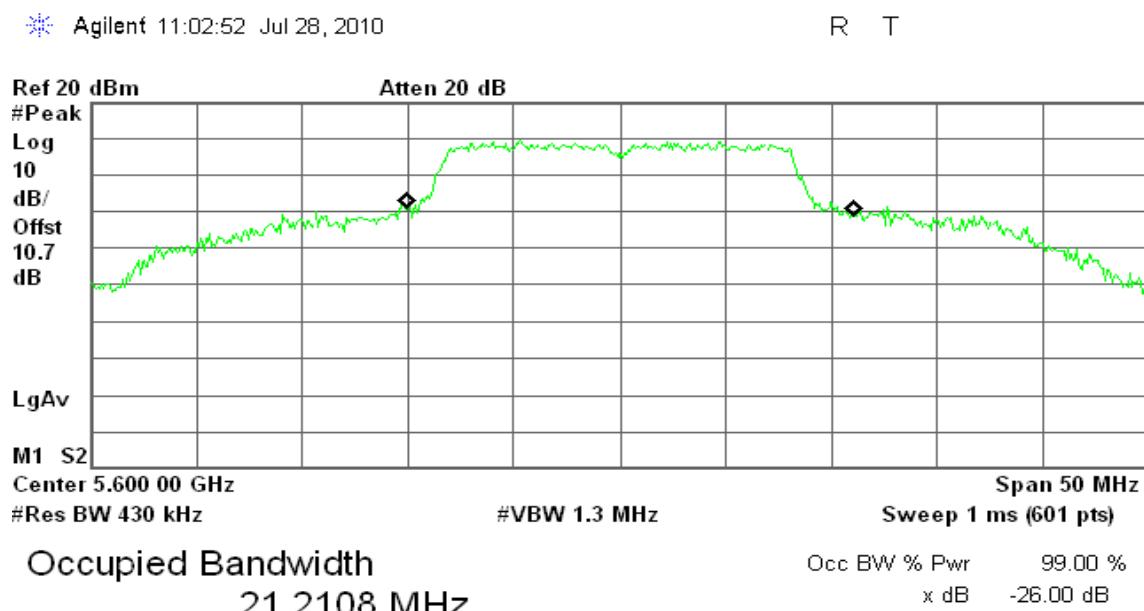
Transmit Freq Error 162.486 kHz
x dB Bandwidth 50.000 MHz

CH High

Transmit Freq Error 79.564 kHz
x dB Bandwidth 47.455 MHz

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz****CH Low**

Transmit Freq Error 595.998 kHz
x dB Bandwidth 38.753 MHz

CH Mid

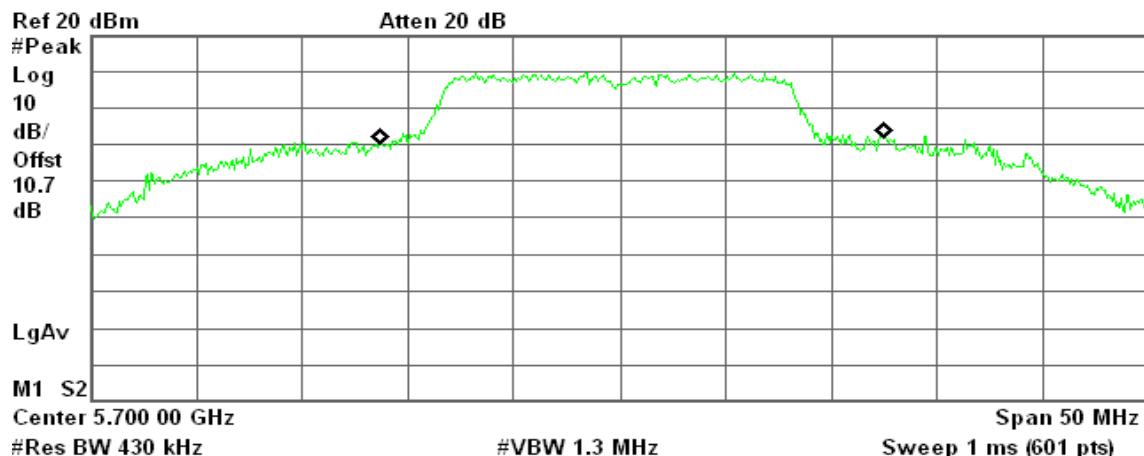
Transmit Freq Error 501.155 kHz
x dB Bandwidth 38.673 MHz



CH High

* Agilent 11:05:31 Jul 28, 2010

R L



Occupied Bandwidth

23.8520 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

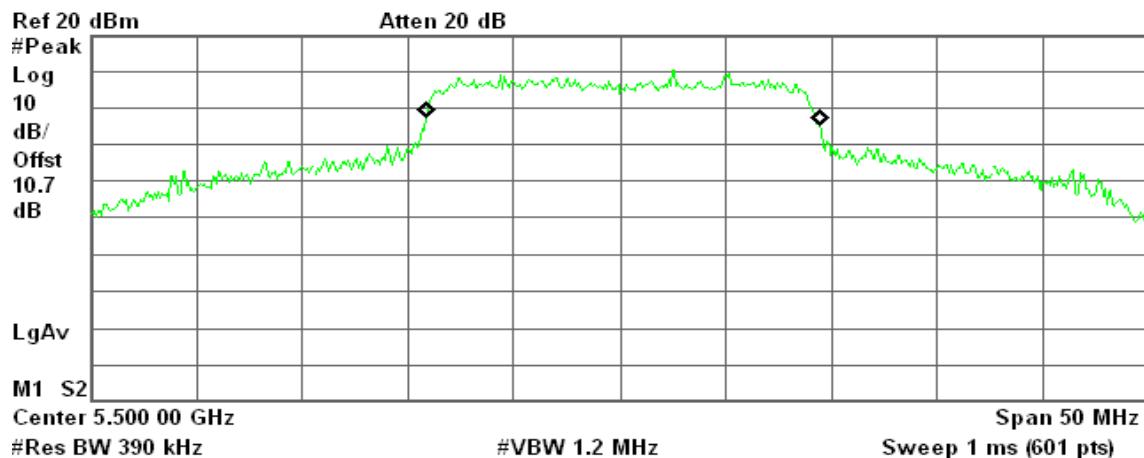
Transmit Freq Error 560.056 kHz
x dB Bandwidth 39.608 MHz

draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz

CH Low

* Agilent 15:08:07 Jul 28, 2010

R T



Occupied Bandwidth
18.5349 MHz

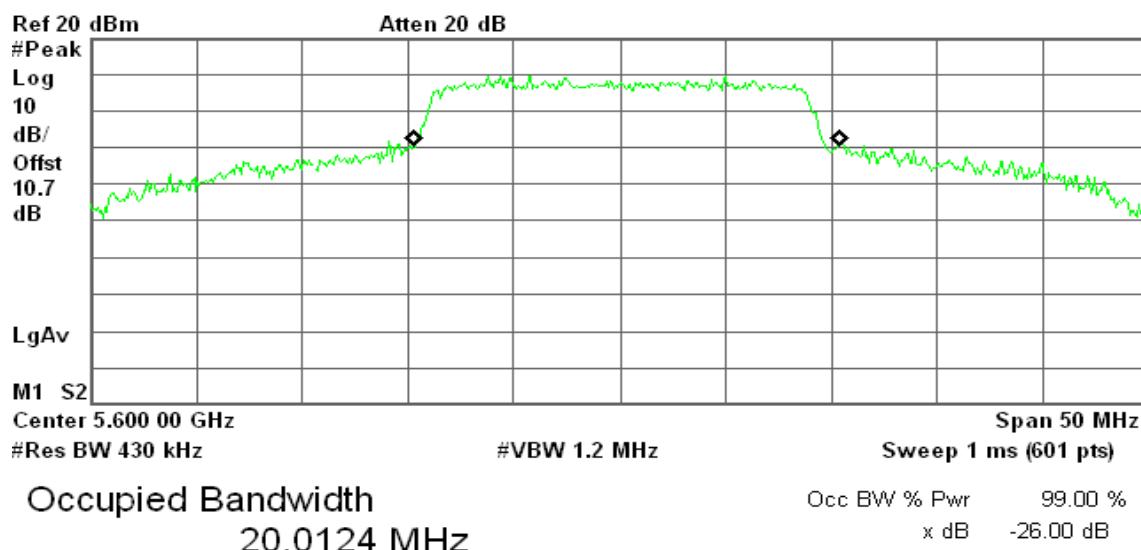
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 175.665 kHz
x dB Bandwidth 33.594 MHz

**CH Mid**

Agilent 15:10:29 Jul 28, 2010

R T

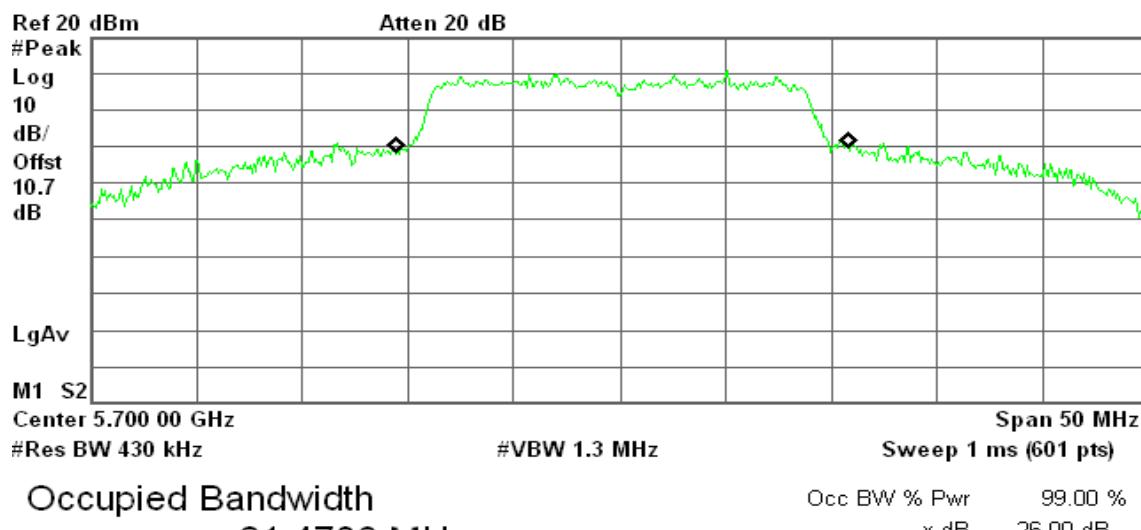


Transmit Freq Error 377.655 kHz
x dB Bandwidth 38.351 MHz

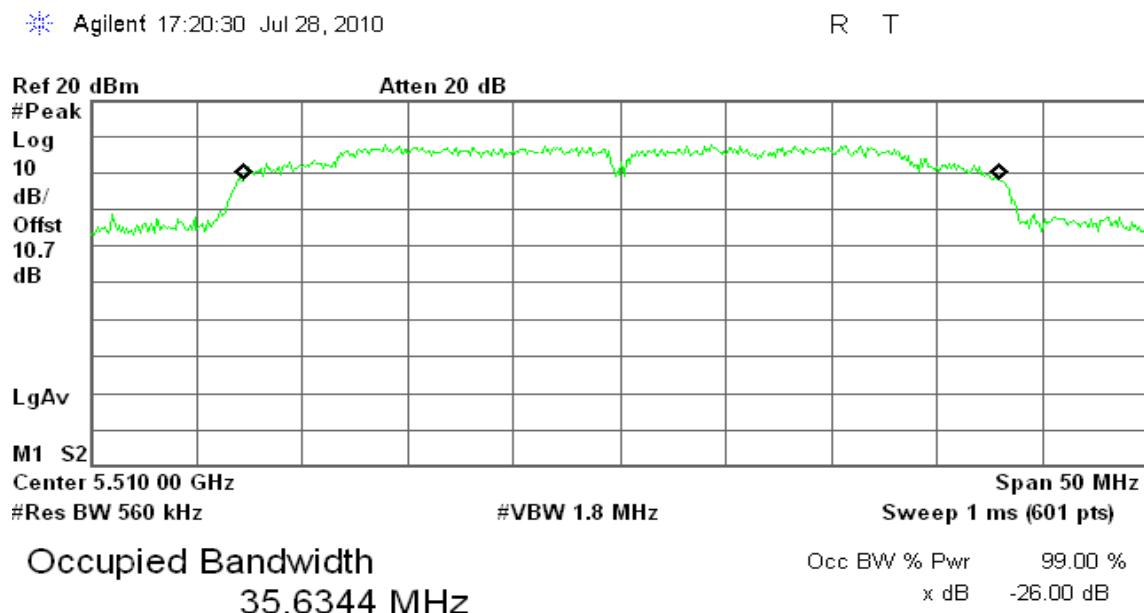
CH High

Agilent 15:14:13 Jul 28, 2010

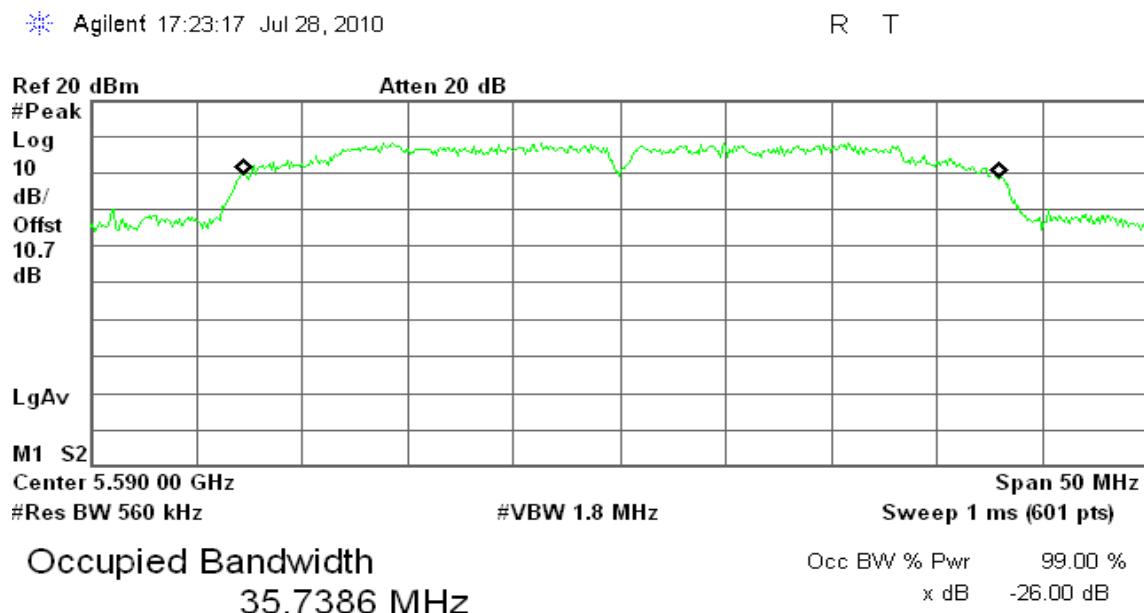
R T



Transmit Freq Error 125.914 kHz
x dB Bandwidth 41.039 MHz

**draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz****CH Low**

Transmit Freq Error 95.471 kHz
x dB Bandwidth 50.000 MHz

CH Mid

Transmit Freq Error 80.828 kHz
x dB Bandwidth 50.000 MHz



CH High

* Agilent 17:25:48 Jul 28, 2010

R T



Transmit Freq Error 119.512 kHz
x dB Bandwidth 50.000 MHz



7.2 MAXIMUM CONDUCTED OUTPUT POWER

LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The peak power shall not exceed the limit as follow:

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 4 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|--------------------|--|
| Low | 5180 | 17.8778 | 12.52314 | 16.5231 | 17.00 |
| Mid | 5220 | 17.686 | 12.47630 | 16.4763 | 17.00 |
| High | 5240 | 18.1167 | 12.58079 | 16.5808 | 17.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 4 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|--------------------|--|
| Low | 5180 | 17.7229 | 12.48535 | 16.4853 | 17.00 |
| Mid | 5220 | 17.7124 | 12.48277 | 16.4828 | 17.00 |
| High | 5240 | 17.7051 | 12.48098 | 16.4810 | 17.00 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 4 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|--------------------|--|
| Low | 5190 | 35.1716 | 15.46192 | 19.4619 | 17.00 |
| High | 5230 | 35.0385 | 15.44546 | 19.4455 | 17.00 |

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5260 | 26.7455 | 14.27251 | 18.2725 | 24.00 |
| Mid | 5280 | 25.9677 | 14.14433 | 18.1443 | 24.00 |
| High | 5320 | 24.8279 | 13.94940 | 17.9494 | 24.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5260 | 19.9704 | 13.00387 | 17.0039 | 24.00 |
| Mid | 5280 | 19.0482 | 12.79854 | 16.7985 | 24.00 |
| High | 5320 | 18.5639 | 12.68669 | 16.6867 | 24.00 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5270 | 35.8777 | 15.54825 | 19.5482 | 24.00 |
| High | 5310 | 35.1158 | 15.45503 | 19.4550 | 24.00 |

Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5500 | 21.3457 | 13.29310 | 17.2931 | 24.00 |
| Mid | 5600 | 21.2108 | 13.26557 | 17.2656 | 24.00 |
| High | 5700 | 23.852 | 13.77525 | 17.7752 | 24.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode/ 5500 ~ 5700MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5500 | 18.5349 | 12.67990 | 16.6799 | 24.00 |
| Mid | 5600 | 20.0124 | 13.01299 | 17.0130 | 24.00 |
| High | 5700 | 21.4706 | 13.31844 | 17.3184 | 24.00 |


Test mode: draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz

| Channel | Frequency (MHz) | 26 dB Bandwidth (B) (MHz) | 10 Log B (dB) | 11 + 10 Log B (dBm) | Maximum Conducted Output Power Limit (dBm) |
|---------|-----------------|---------------------------|---------------|---------------------|--|
| Low | 5510 | 35.6344 | 15.51869 | 19.5187 | 24.00 |
| Mid | 5590 | 35.7386 | 15.53138 | 19.5314 | 24.00 |
| High | 5670 | 36.0224 | 15.56573 | 19.5657 | 24.00 |



Test Configuration

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.



TEST PROCEDURE

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5180 | 13.52 | 17.00 |
| Mid | 5220 | 13.75 | 17.00 |
| High | 5240 | 13.96 | 17.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5180 | 9.51 | 17.00 |
| Mid | 5220 | 9.01 | 17.00 |
| High | 5240 | 9.12 | 17.00 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5190 | 13.19 | 17.00 |
| High | 5230 | 11.3 | 17.00 |

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5260 | 16.42 | 24.00 |
| Mid | 5280 | 17.3 | 24.00 |
| High | 5320 | 17.16 | 24.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5260 | 16.03 | 24.00 |
| Mid | 5280 | 16.29 | 24.00 |
| High | 5320 | 16.75 | 24.00 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5270 | 16.98 | 24.00 |
| High | 5310 | 13.16 | 24.00 |

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5500 | 17.2 | 24.00 |
| Mid | 5600 | 17.05 | 24.00 |
| High | 5700 | 17.39 | 24.00 |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5500 | 16.45 | 24.00 |
| Mid | 5600 | 16.59 | 24.00 |
| High | 5700 | 17.19 | 24.00 |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz

| Channel | Frequency (MHz) | Maximum Conducted Output Power (dBm) | Limit (dBm) |
|---------|-----------------|--------------------------------------|-------------|
| Low | 5510 | 16.02 | 24.00 |
| Mid | 5590 | 17.02 | 24.00 |
| High | 5670 | 16.96 | 24.00 |

7.3 BAND EDGES MEASUREMENT

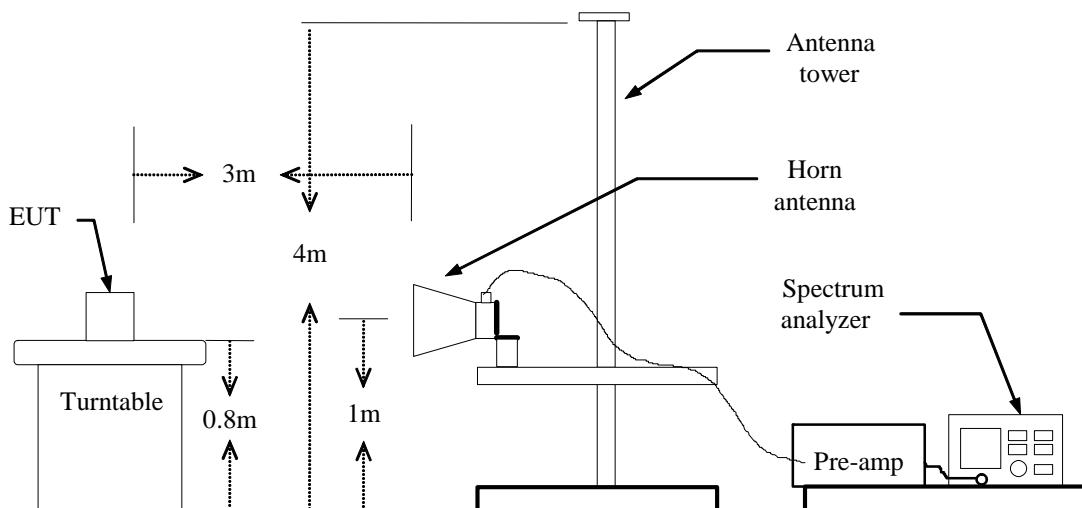
LIMIT

According to §15.407(b),

(1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Test Configuration



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

802.11a Mode

1. Operating Frequency: 5500-5700MHz
2. CH Low: 5500MHz, CH High: 5700MHz
3. 26dB bandwidth: CH Low: 21.3457MHz, CH High: 23.8520MHz

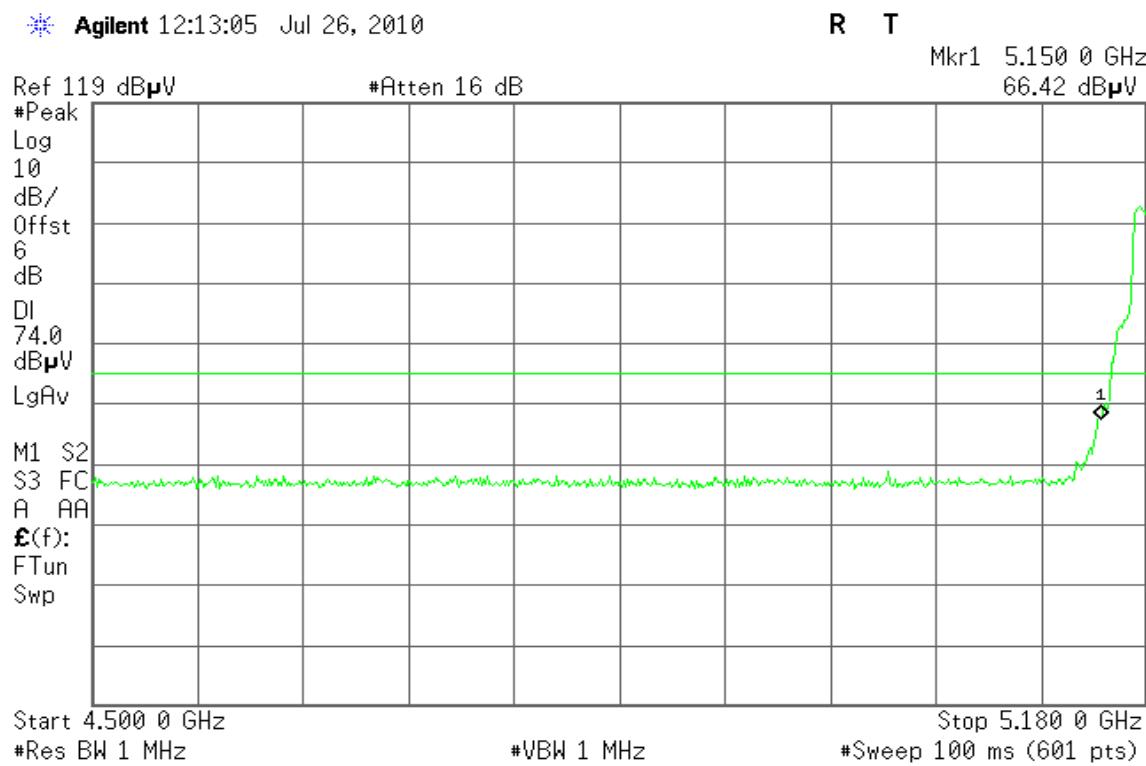
Because the mentioned conditions, the test is not applicable.



Band Edges (IEEE 802.11a mode / 5180 MHz)

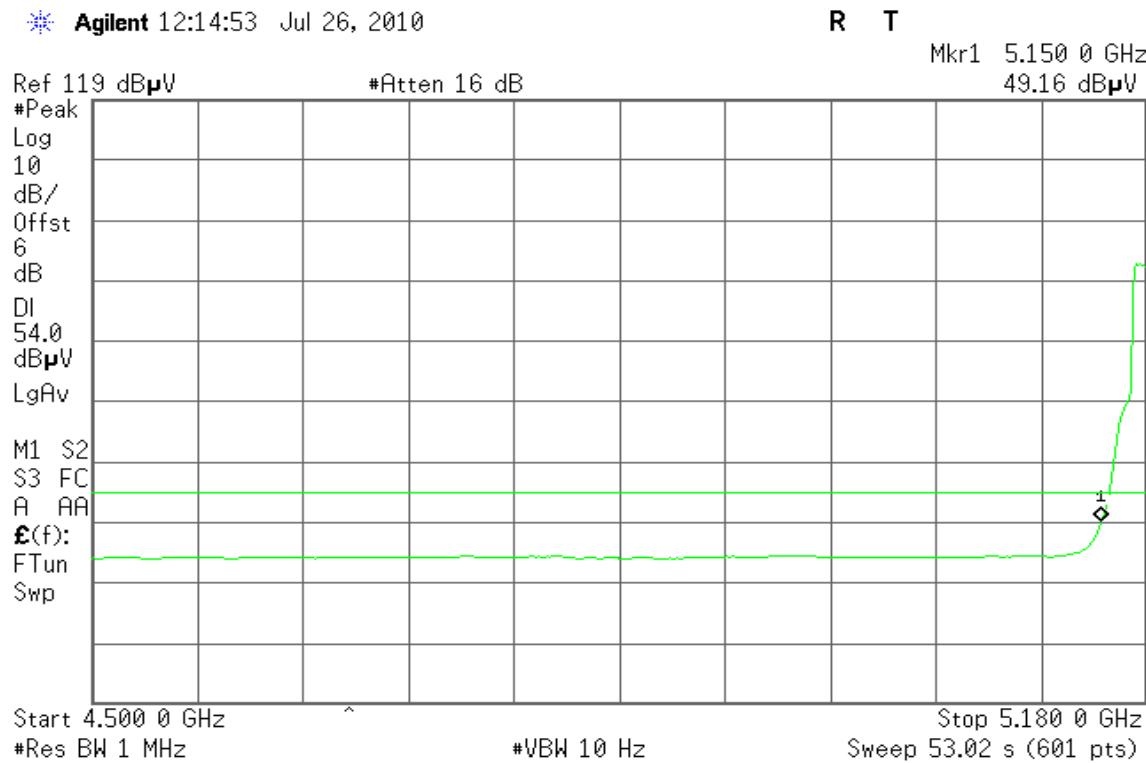
Detector mode: Peak

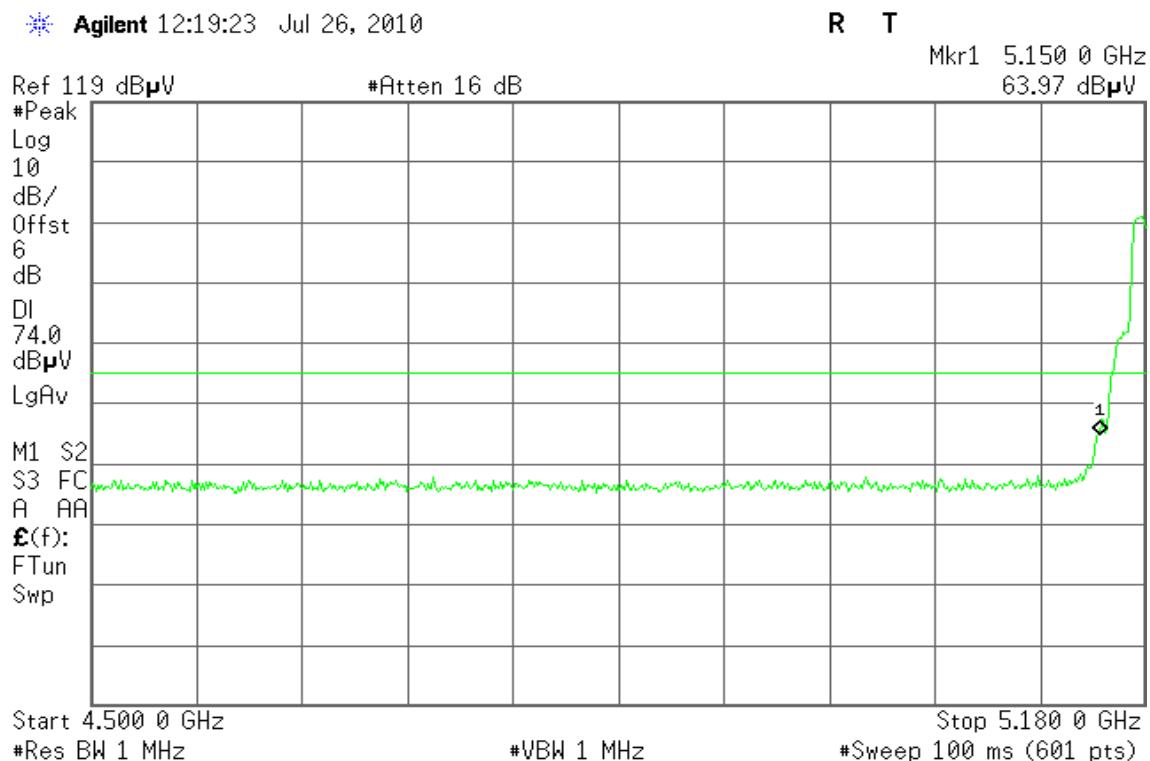
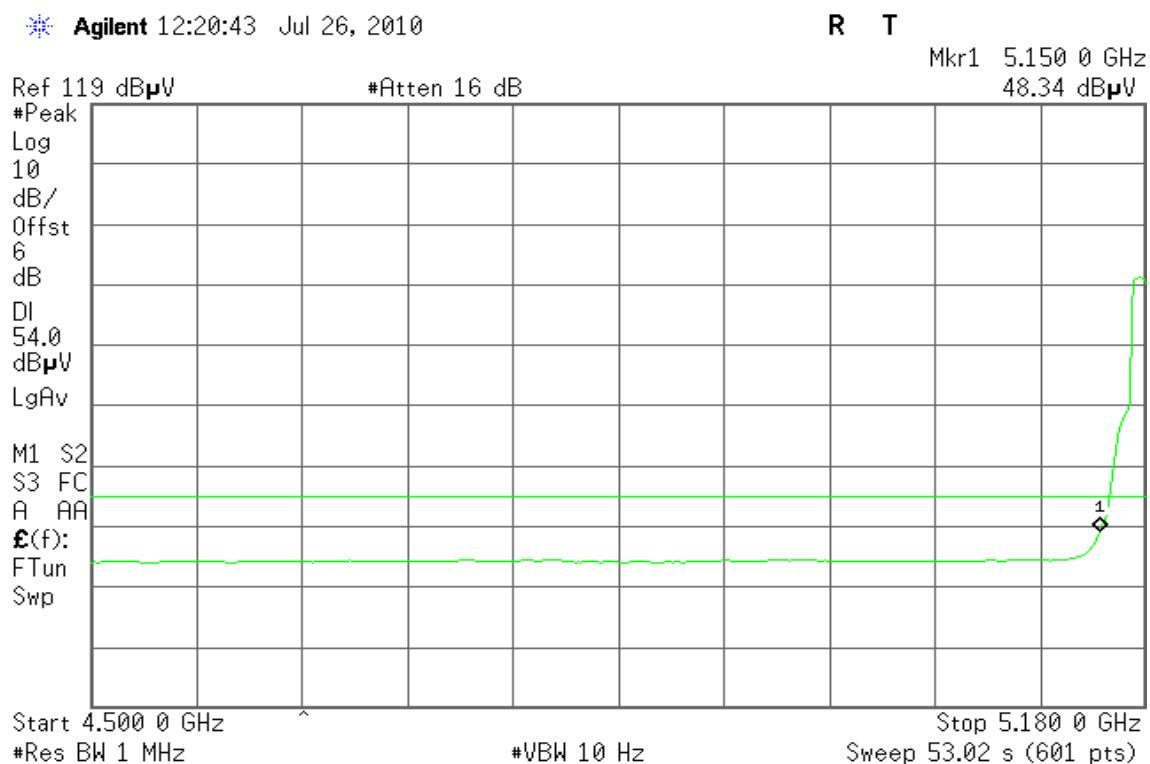
Polarity: Vertical

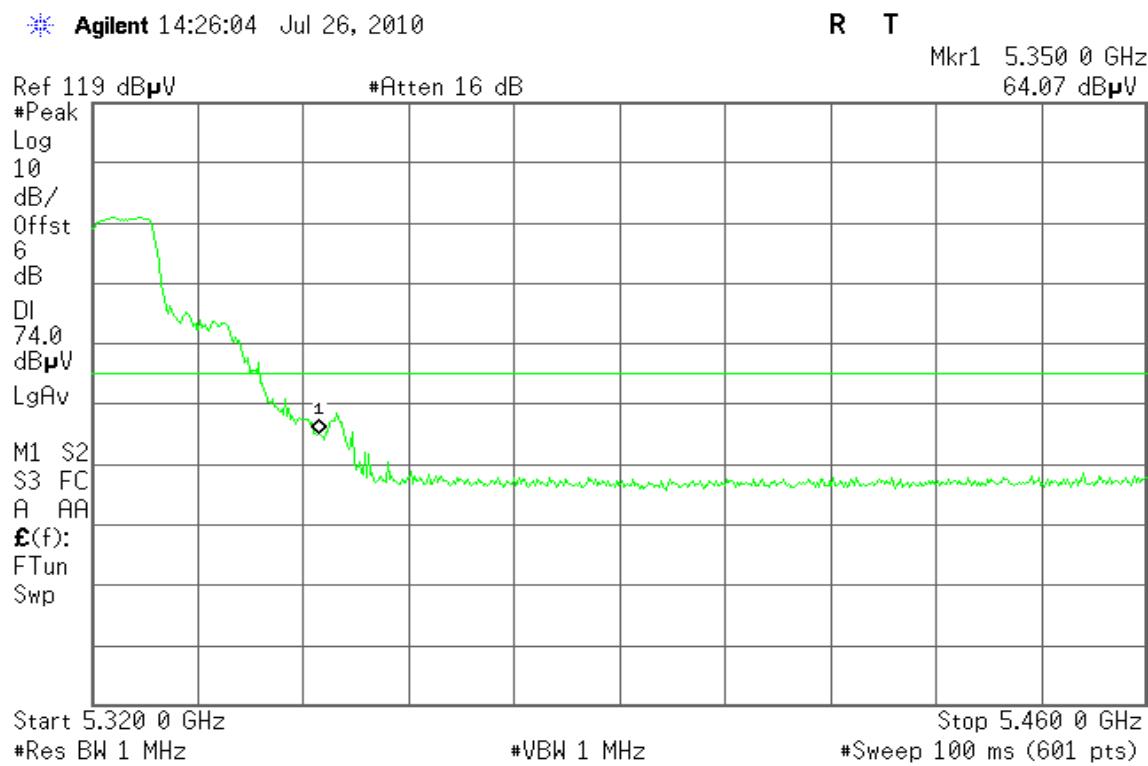
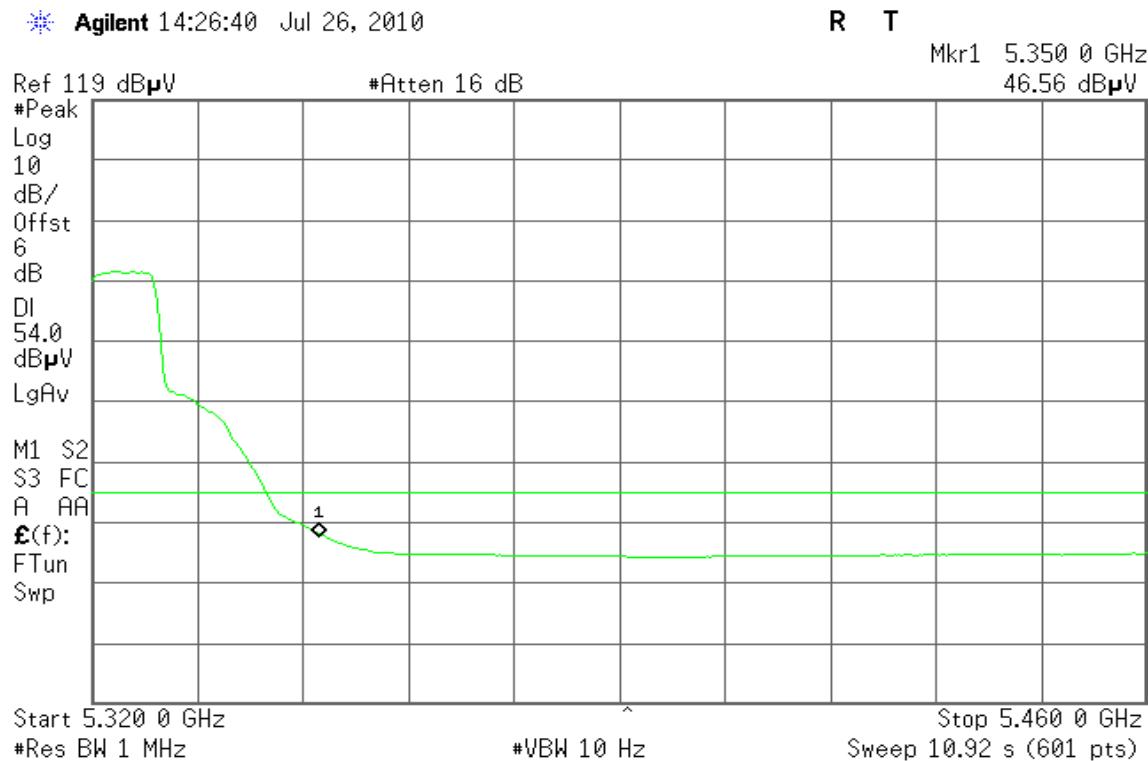


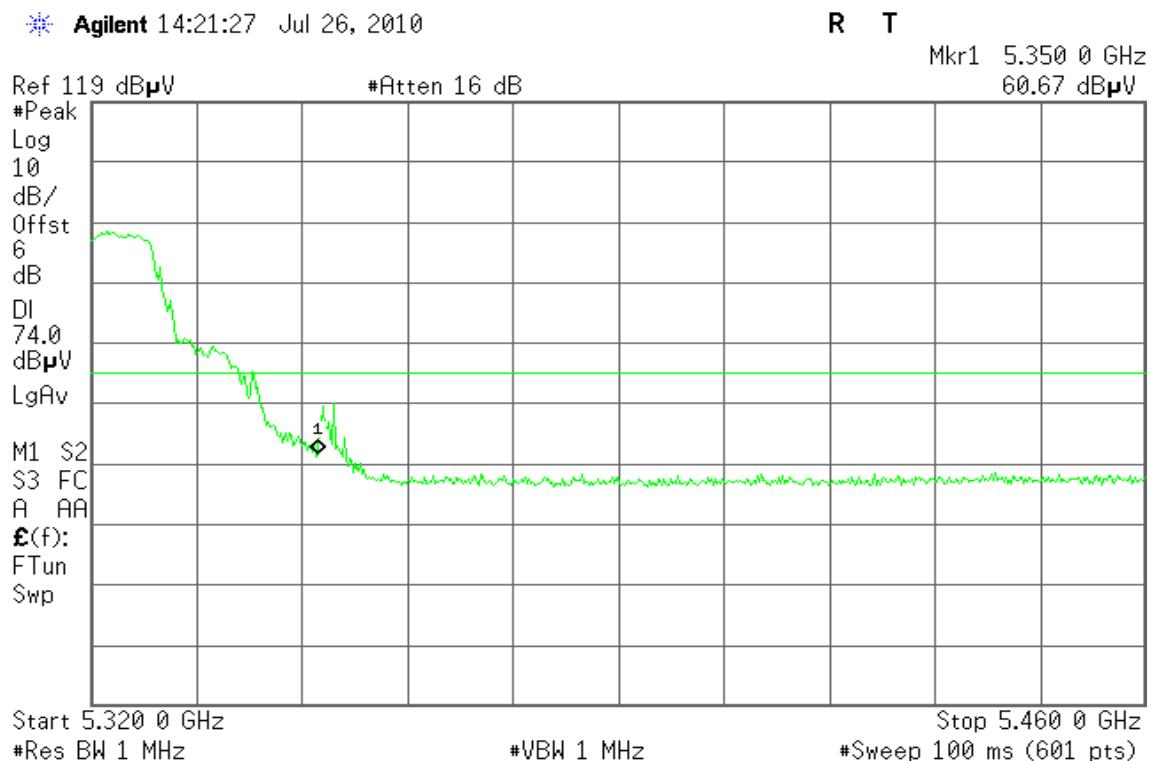
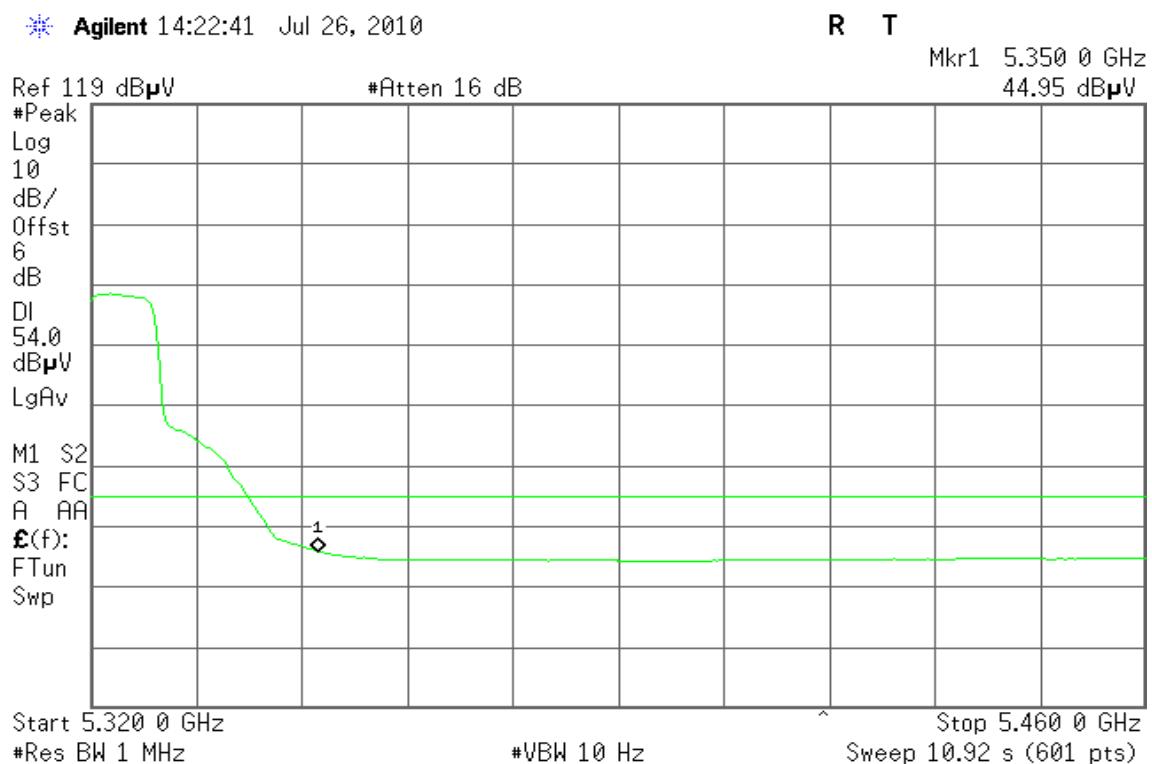
Detector mode: Average

Polarity: Vertical



**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (IEEE 802.11a mode / 5320 MHz)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

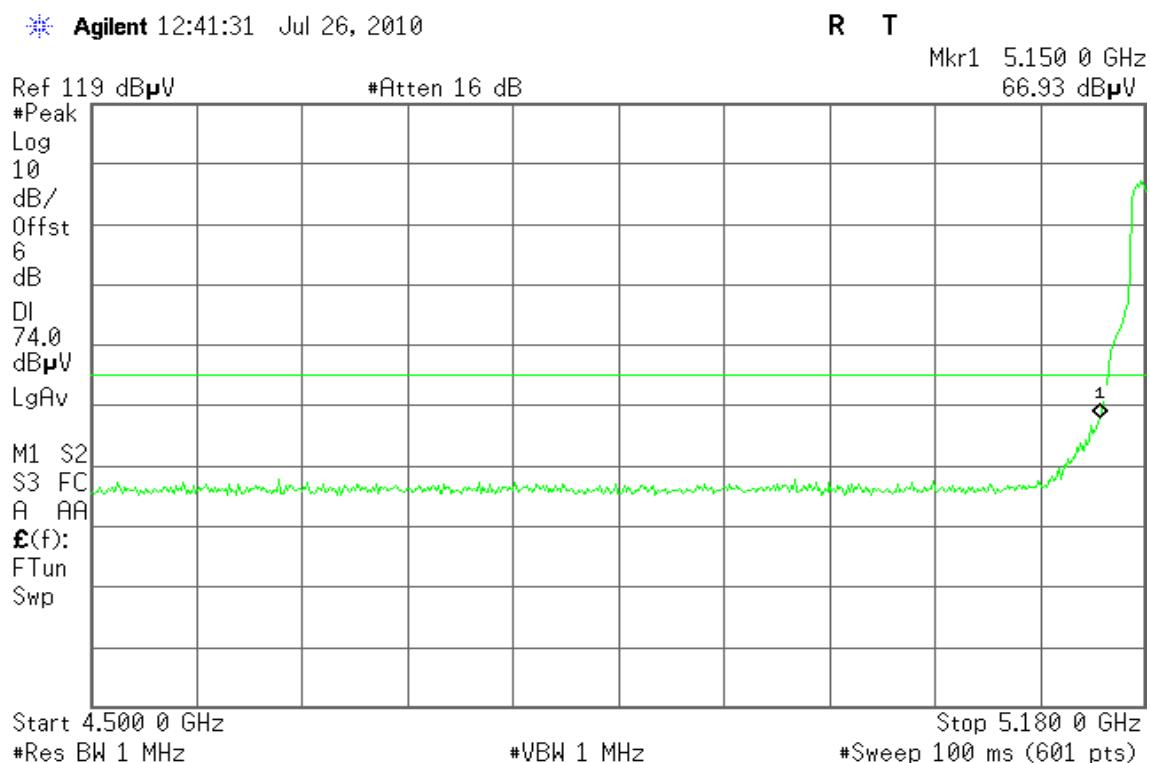
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



Band Edges (draft 802.11n Standard-20 MHz Channel mode / 5180 MHz)

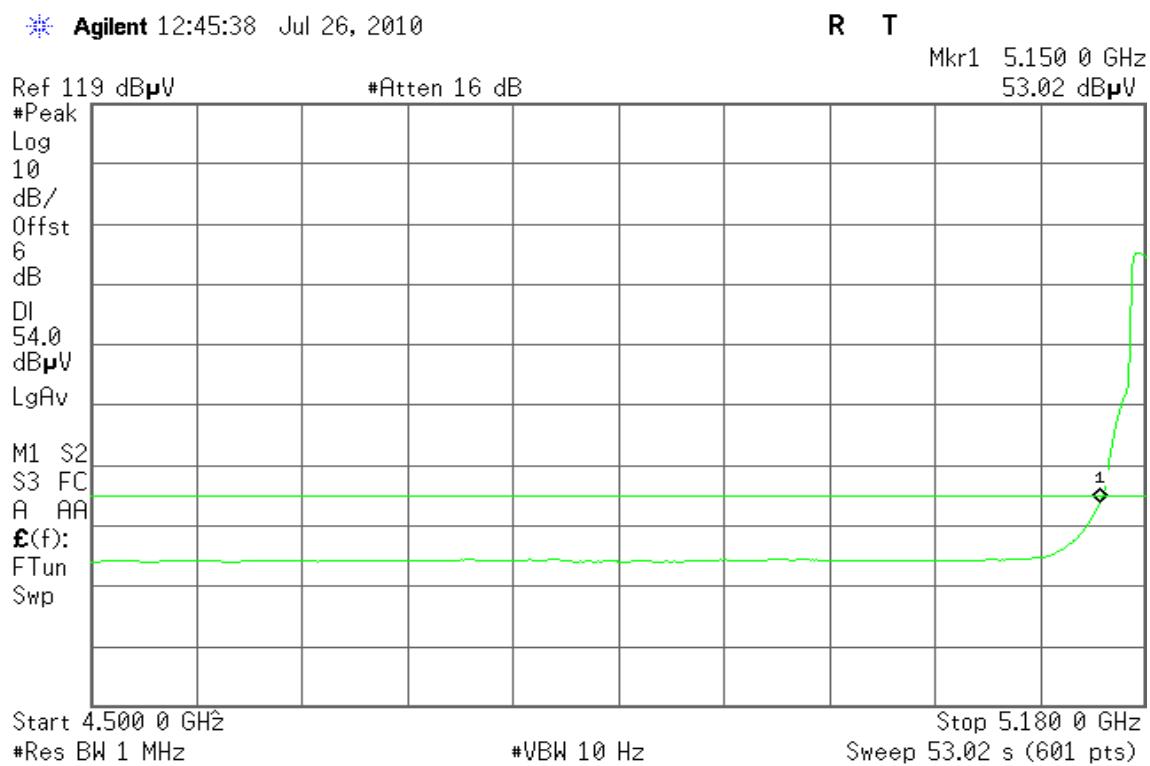
Detector mode: Peak

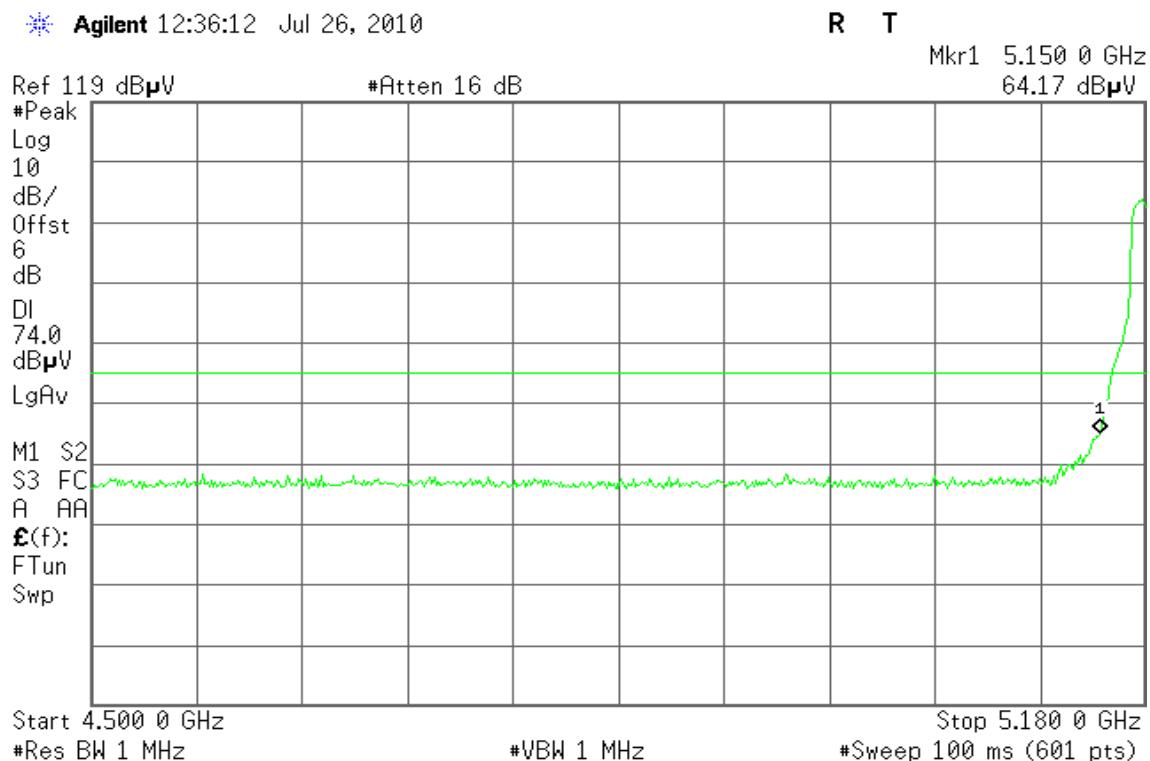
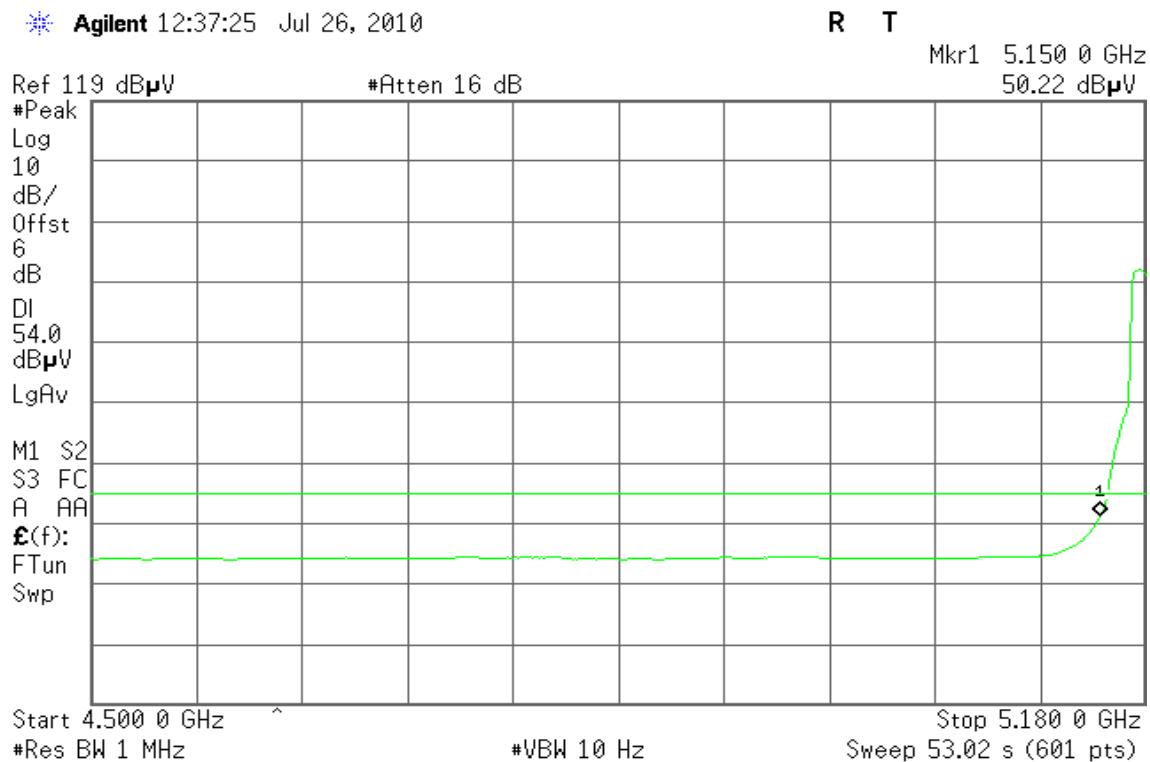
Polarity: Vertical



Detector mode: Average

Polarity: Vertical



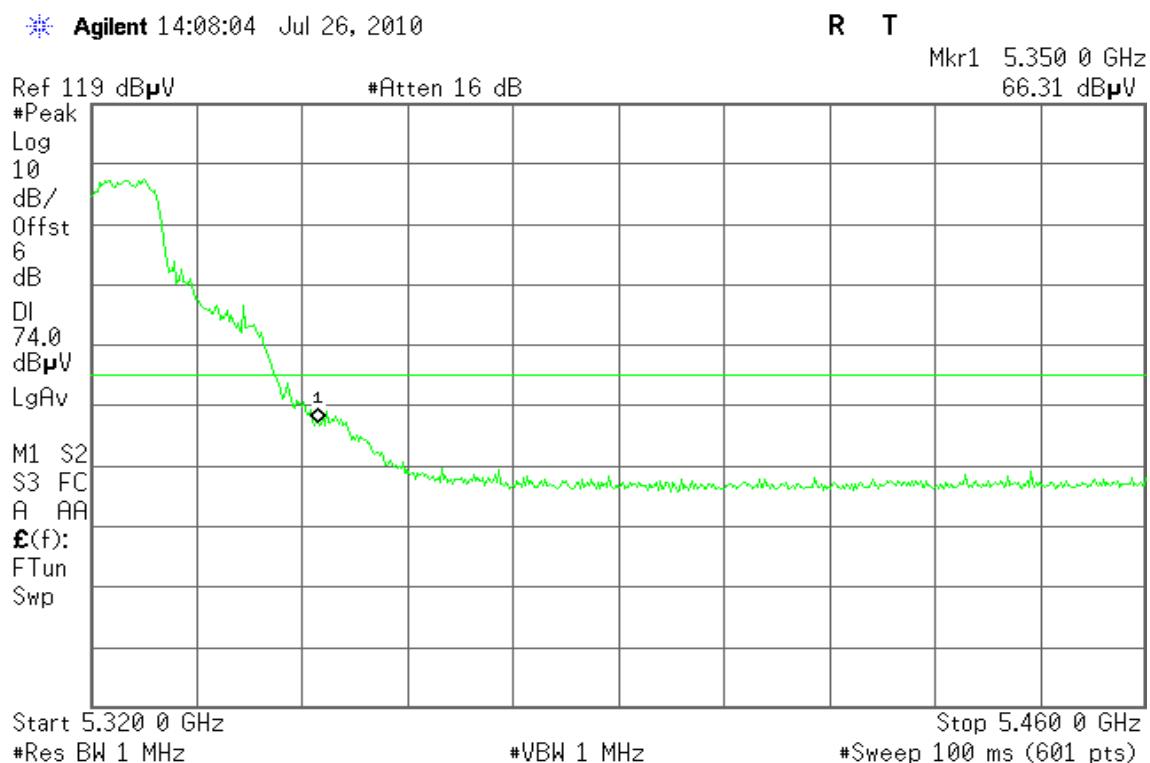
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



Band Edges (draft 802.11n Standard-20 MHz Channel mode / 5320 MHz)

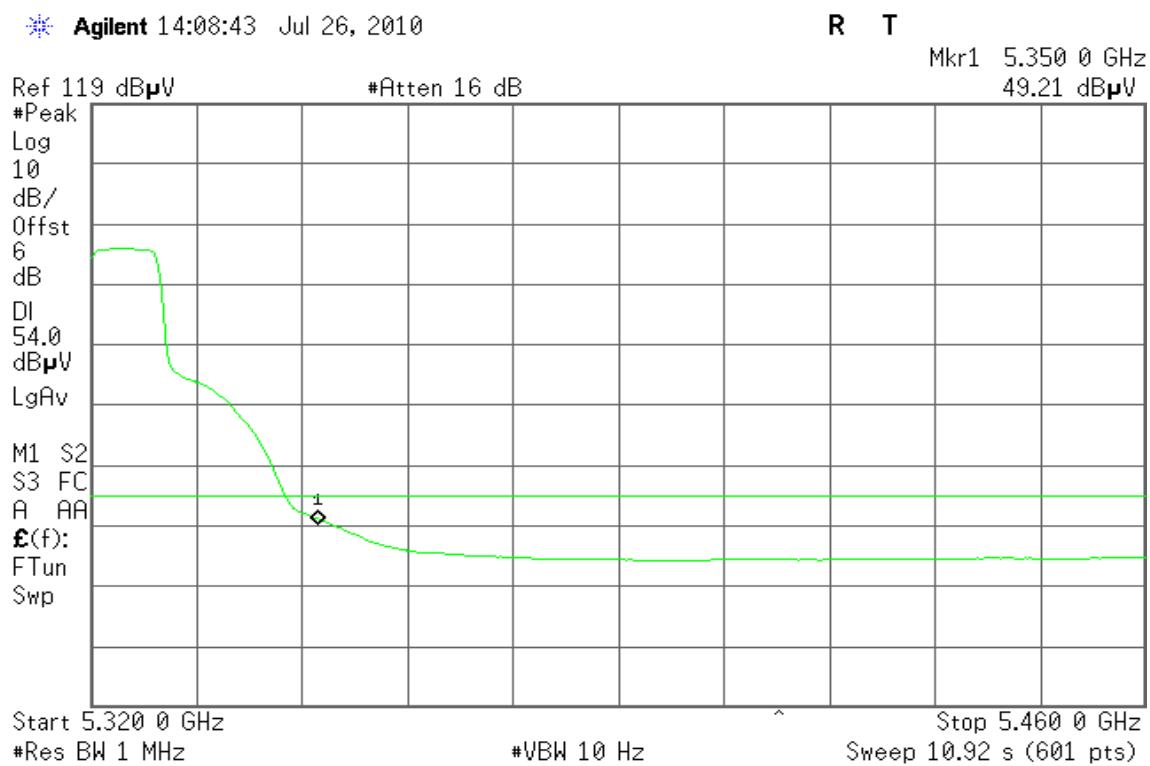
Detector mode: Peak

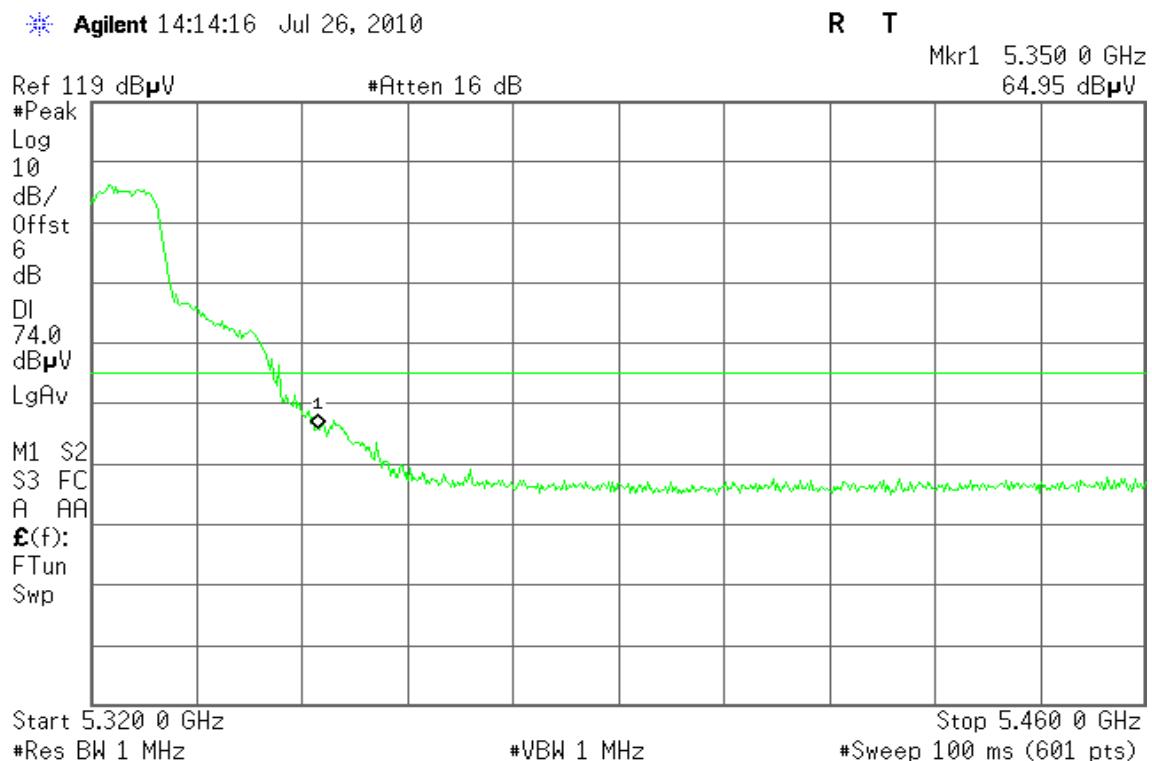
Polarity: Vertical

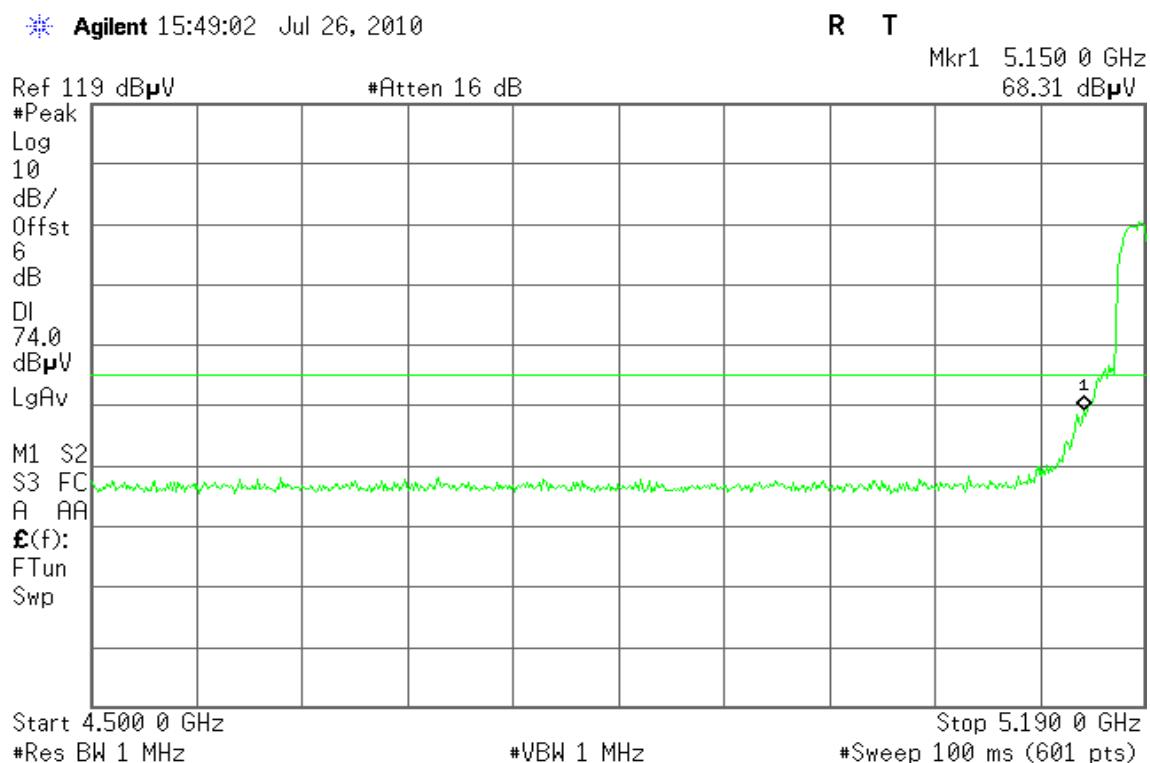
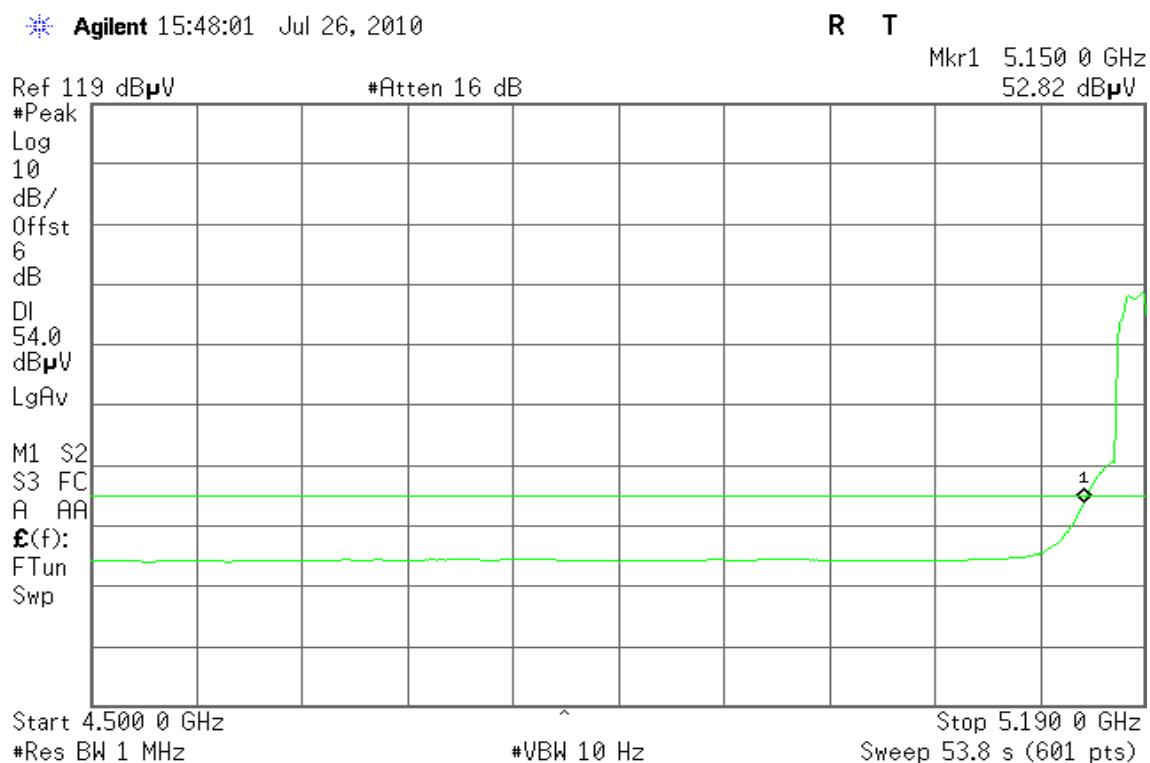


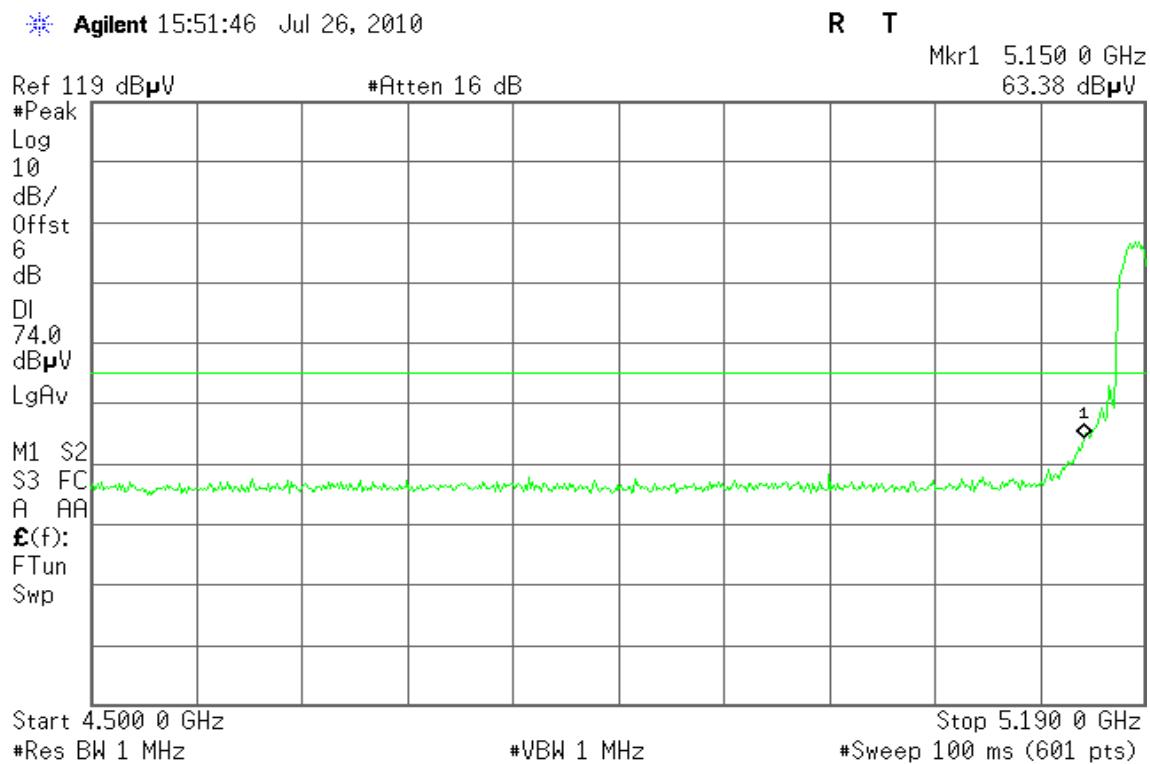
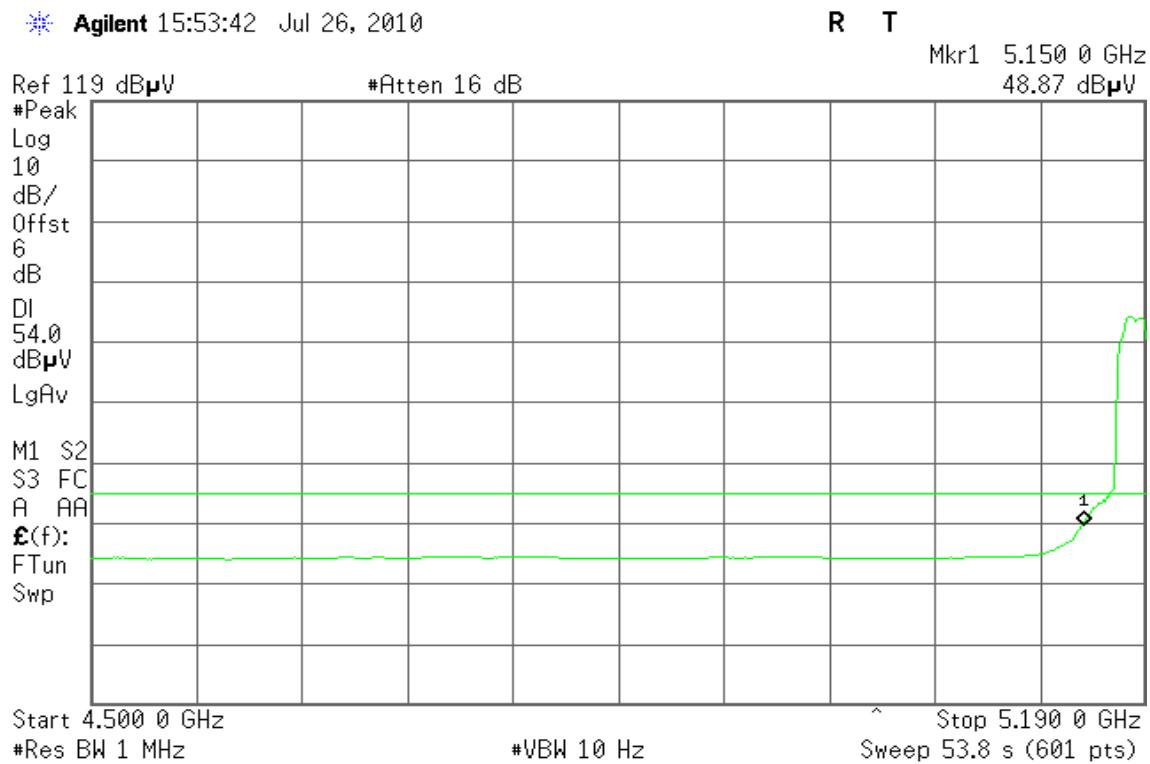
Detector mode: Average

Polarity: Vertical



**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

**Band Edges (draft 802.11n Wide-40 MHz Channel mode / 5190 MHz)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

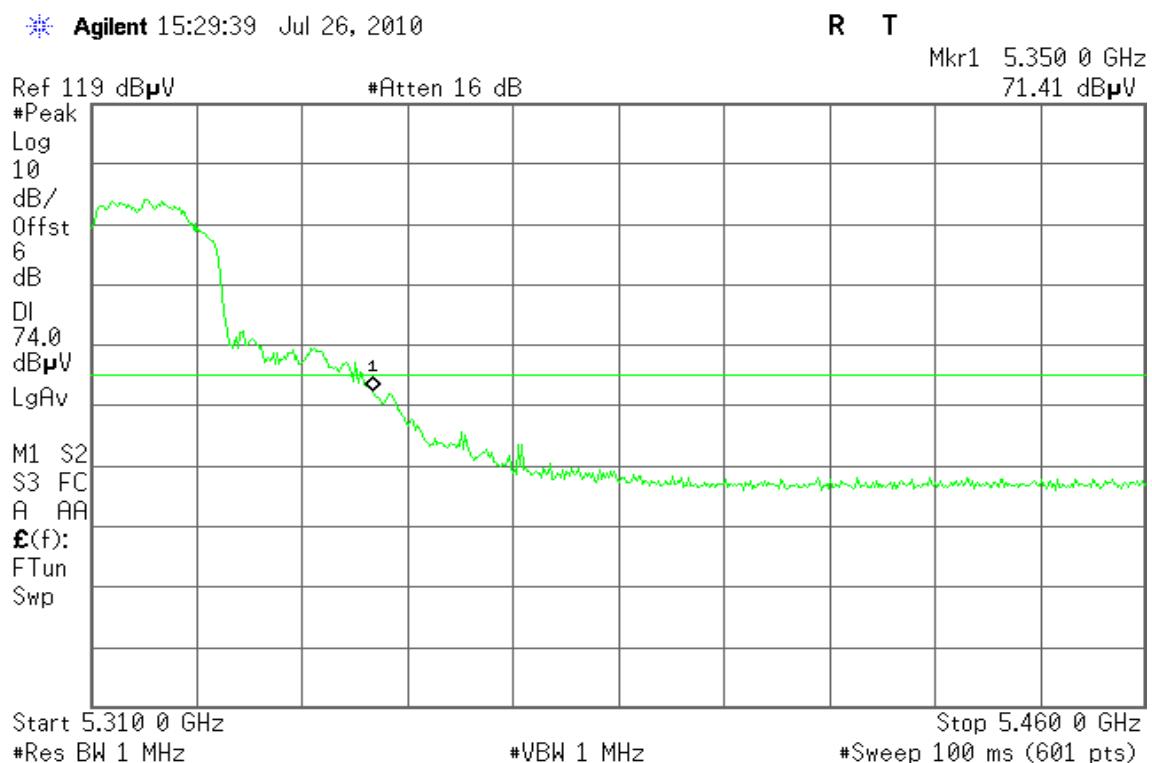
**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH 5310 MHz)

Detector mode: Peak

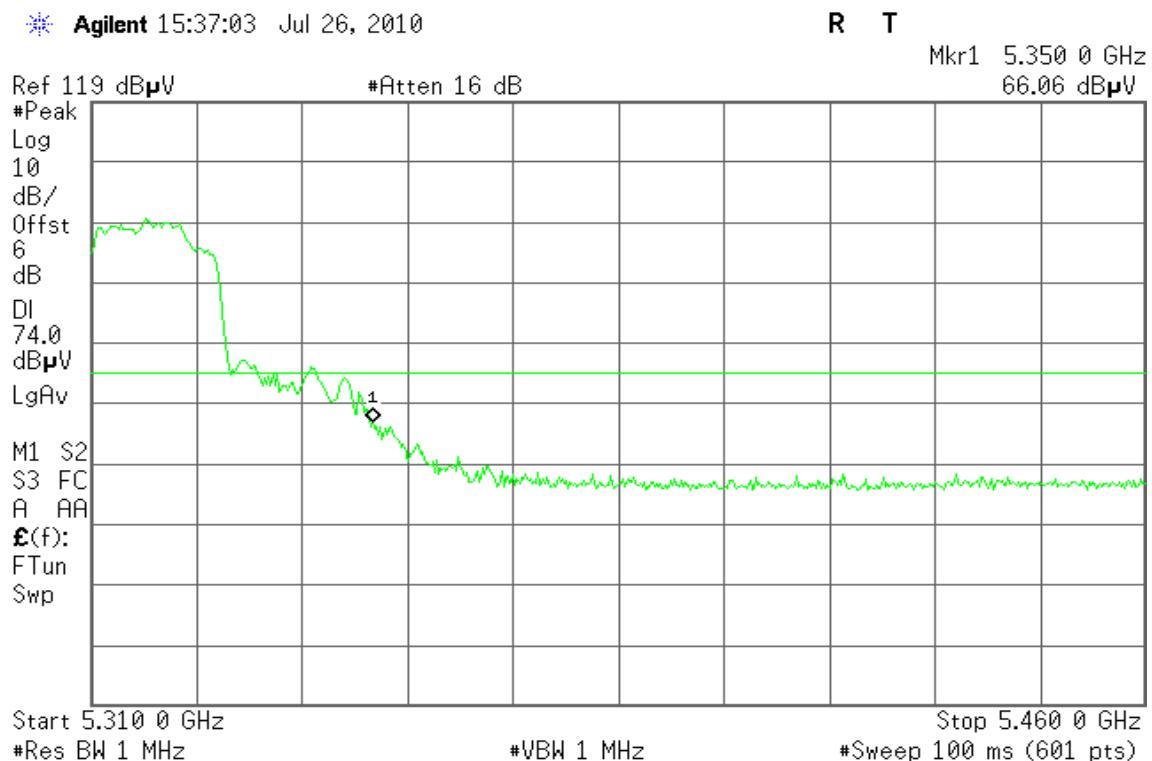
Polarity: Vertical



Detector mode: Average

Polarity: Vertical



**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



7.4 PEAK POWER SPECTRAL DENSITY


LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz and 5.47-5.725 GHz bands, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = Sweep= AUTO
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5180 | 3.411 | 4.00 | -0.589 | PASS |
| Mid | 5220 | 2.701 | 4.00 | -1.299 | PASS |
| High | 5240 | 3.074 | 4.00 | -0.926 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5180 | -0.611 | 4.00 | -4.611 | PASS |
| Mid | 5220 | -0.913 | 4.00 | -4.913 | PASS |
| High | 5240 | -1.204 | 4.00 | -5.204 | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5190 | -0.092 | 4.00 | -4.092 | PASS |
| High | 5230 | -0.702 | 4.00 | -4.702 | PASS |

**Test mode: IEEE 802.11a mode/ 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5260 | 6.552 | 11.00 | -4.45 | PASS |
| Mid | 5280 | 6.897 | 11.00 | -4.10 | PASS |
| High | 5320 | 7.075 | 11.00 | -3.93 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5260 | 6.710 | 11.00 | -4.29 | PASS |
| Mid | 5280 | 7.207 | 11.00 | -3.79 | PASS |
| High | 5320 | 7.170 | 11.00 | -3.83 | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5270 | 4.263 | 11.00 | -6.737 | PASS |
| High | 5310 | 0.720 | 11.00 | -10.28 | PASS |

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

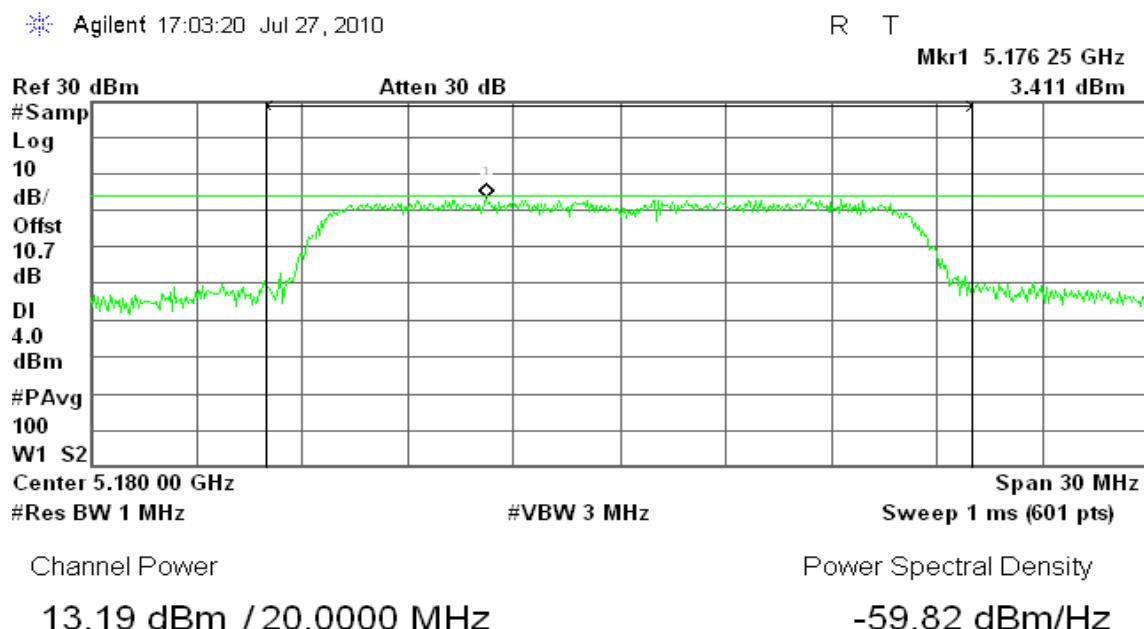
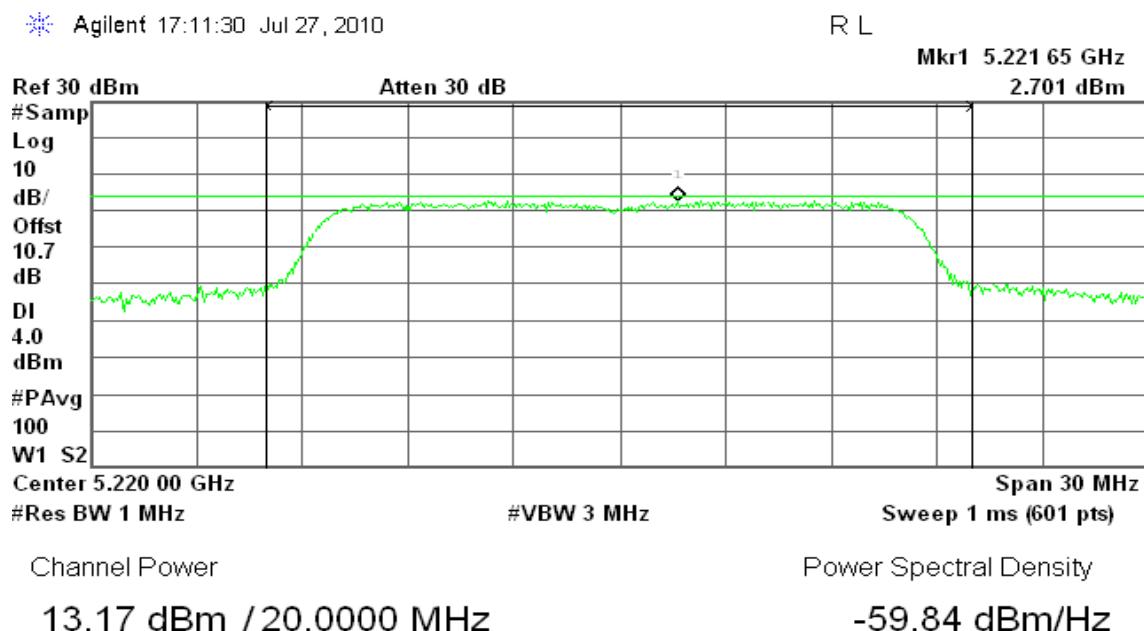
| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5500 | 7.703 | 11.00 | -3.30 | PASS |
| Mid | 5600 | 7.821 | 11.00 | -3.18 | PASS |
| High | 5700 | 7.680 | 11.00 | -3.32 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5500 | 6.419 | 11.00 | -4.586 | PASS |
| Mid | 5600 | 6.509 | 11.00 | -4.491 | PASS |
| High | 5700 | 6.654 | 11.00 | -4.35 | PASS |

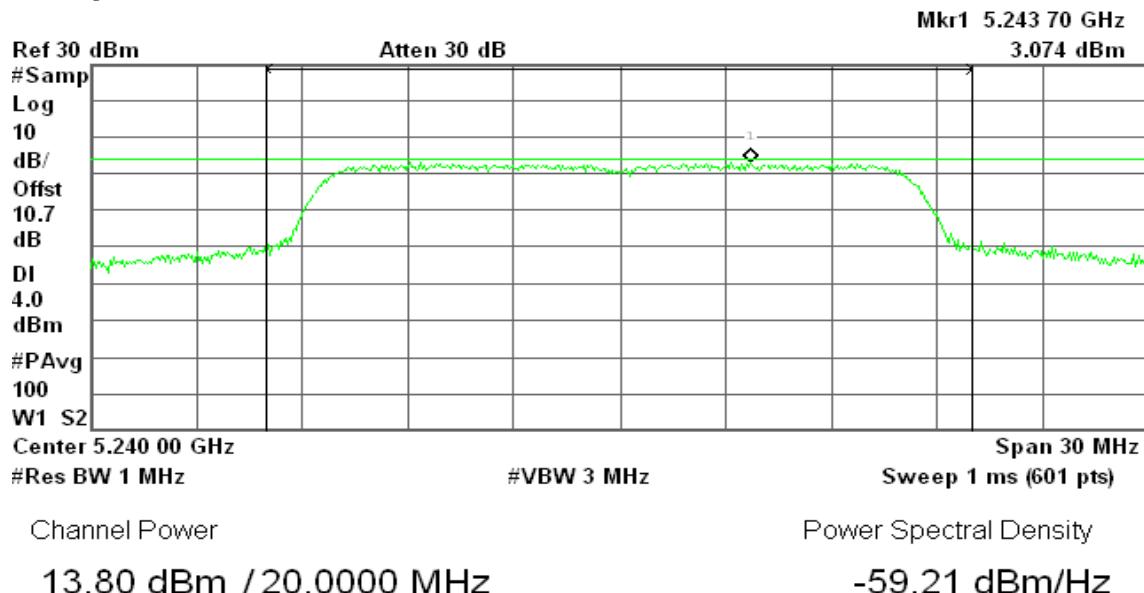
Test mode: draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin | Result |
|---------|-----------------|------------|-------------|--------|--------|
| Low | 5510 | 4.019 | 11.00 | -6.981 | PASS |
| Mid | 5590 | 4.922 | 11.00 | -6.078 | PASS |
| High | 5670 | 4.598 | 11.00 | -6.402 | PASS |

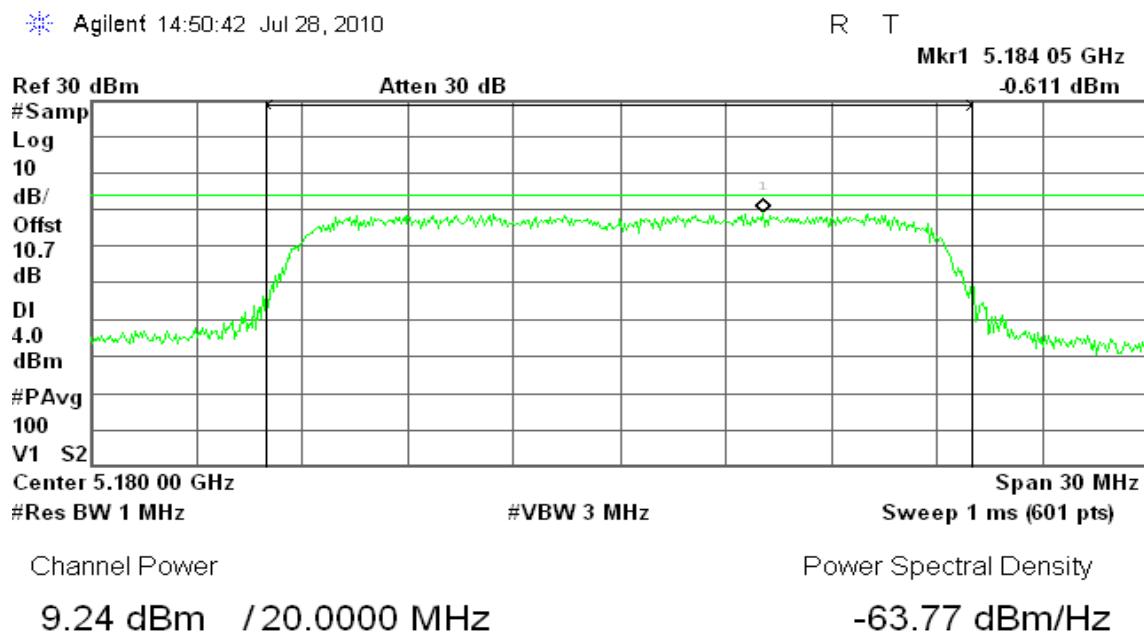
**Test Plot****IEEE 802.11a mode / 5180 ~ 5240MHz****CH Low****CH Mid**

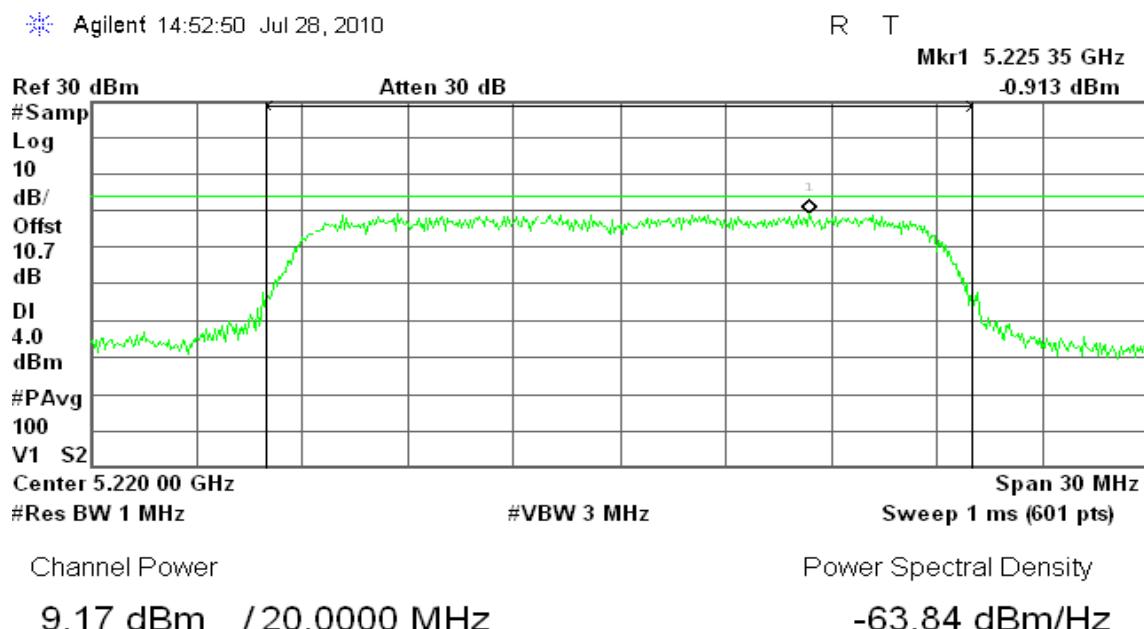
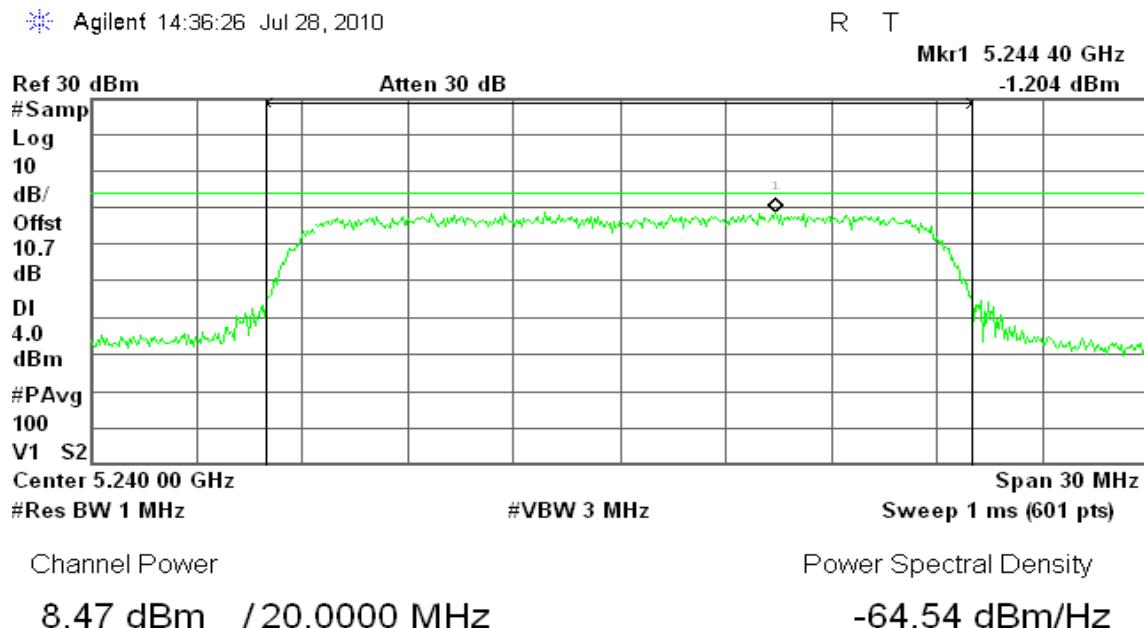
**CH High**

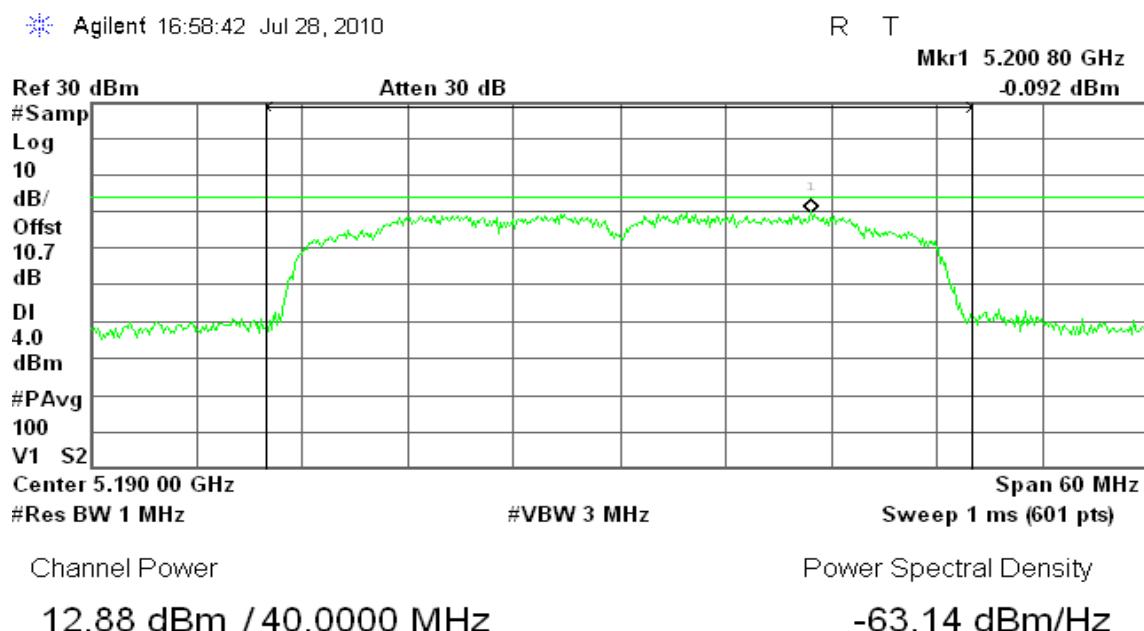
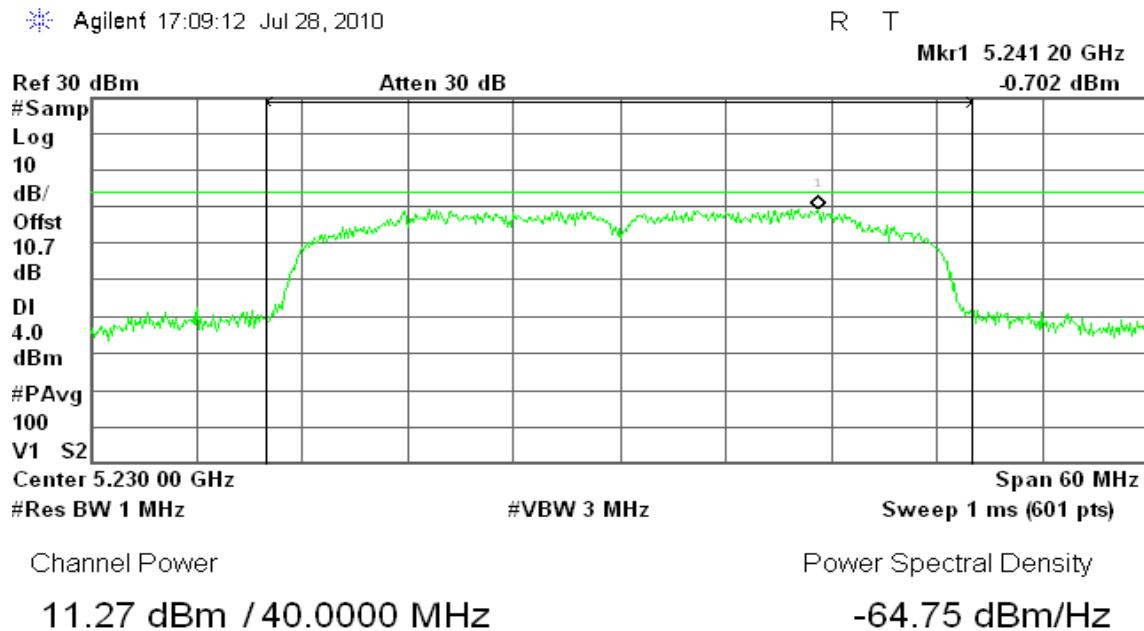
Agilent 17:15:32 Jul 27, 2010

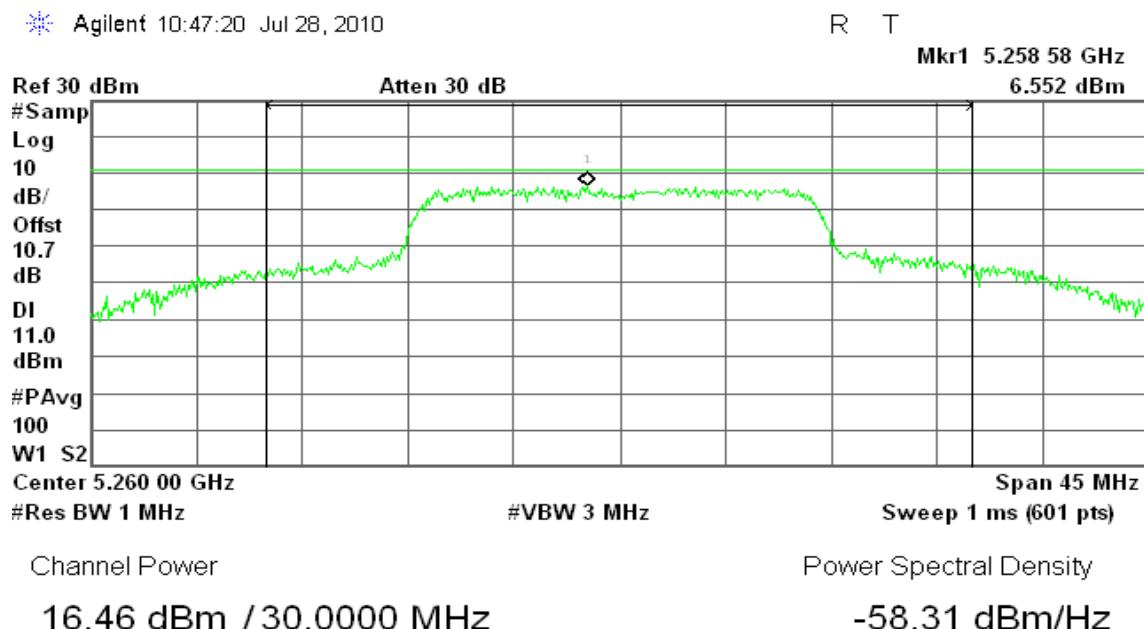
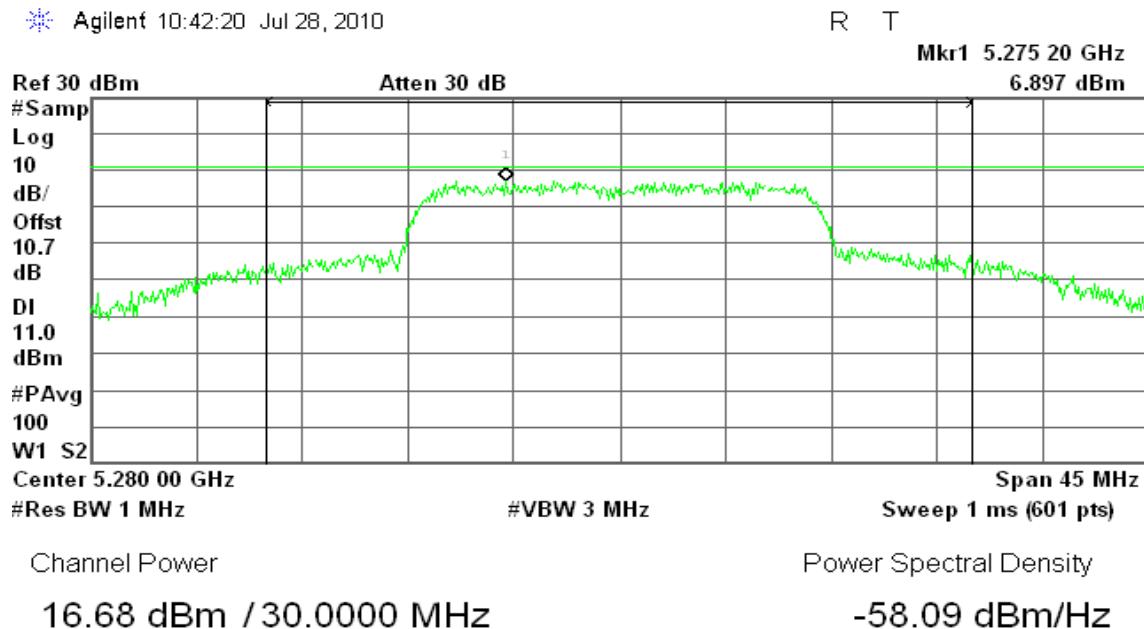
**draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz****CH Low**

Agilent 14:50:42 Jul 28, 2010



**CH Mid****CH High**

**draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz****CH Low****CH High**

**IEEE 802.11a mode / 5260 ~ 5320MHz****CH Low****CH Mid**

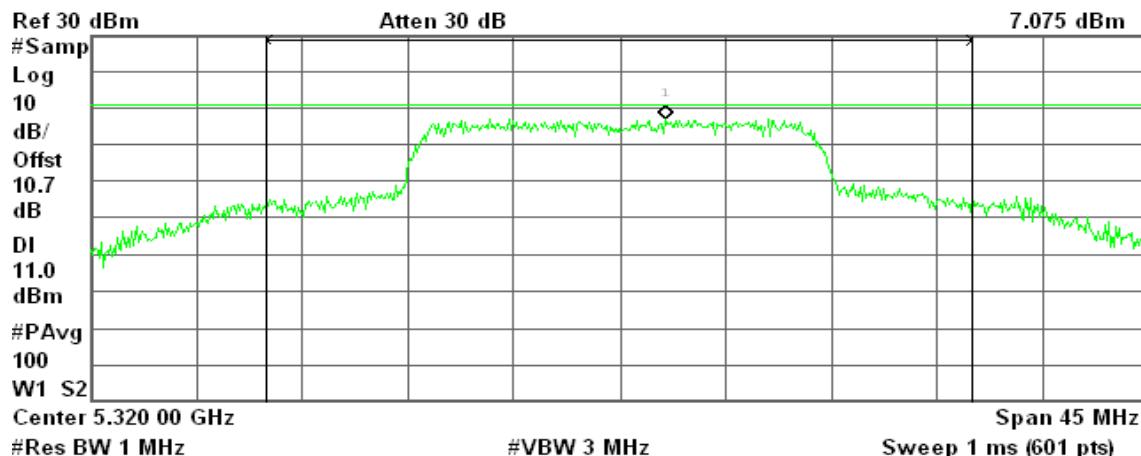
**CH High**

Agilent 10:53:45 Jul 28, 2010

R L

Mkr1 5.321 95 GHz

7.075 dBm

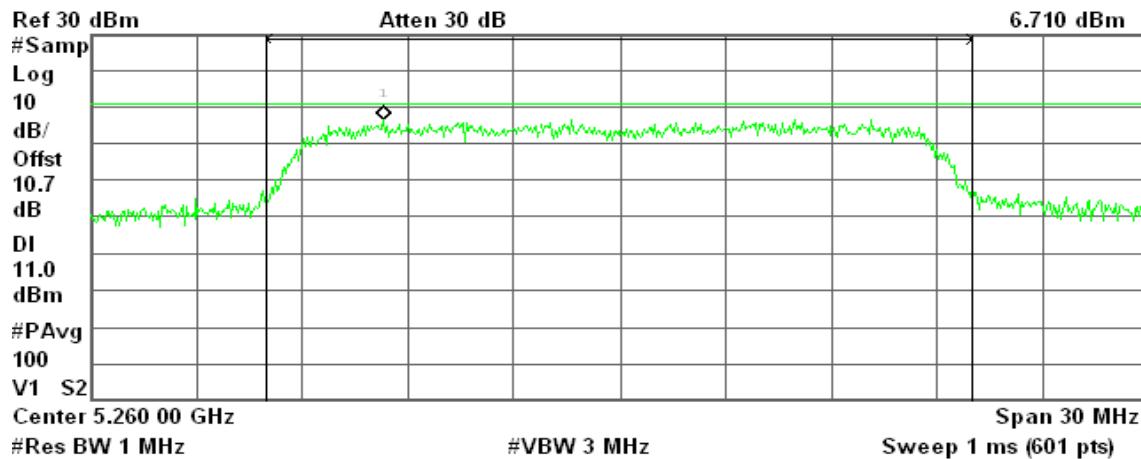
**draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz****CH Low**

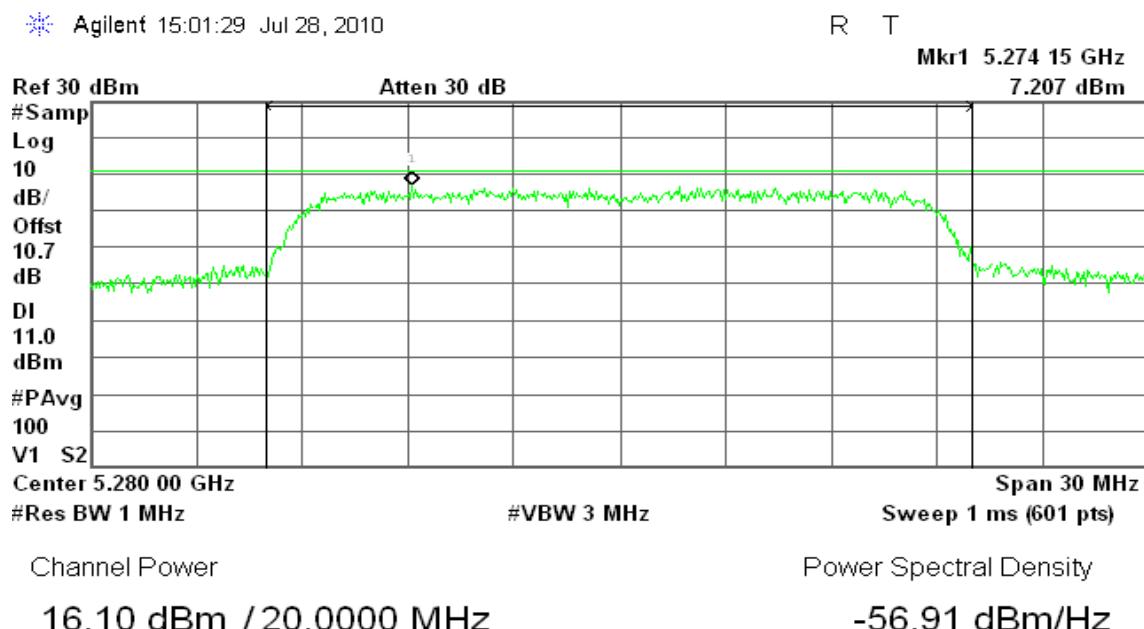
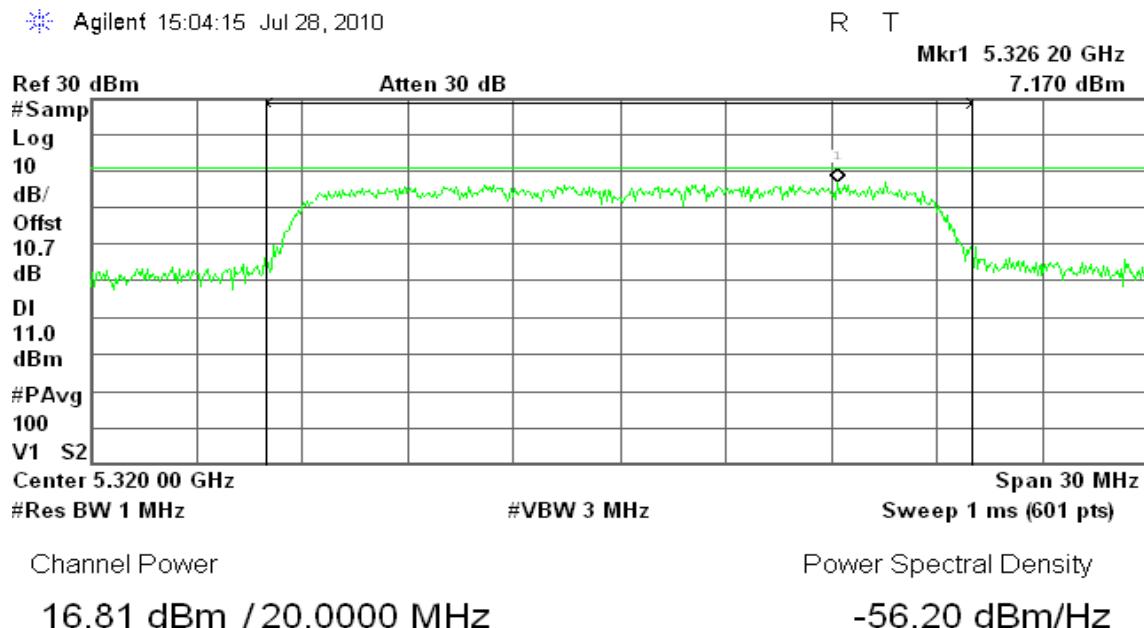
Agilent 14:58:35 Jul 28, 2010

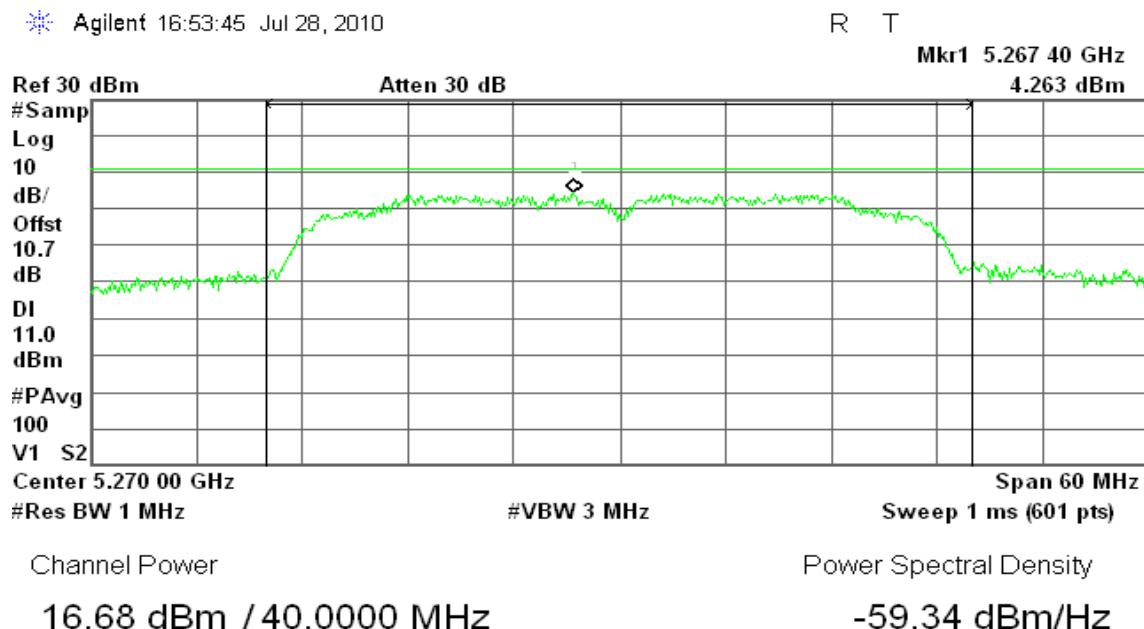
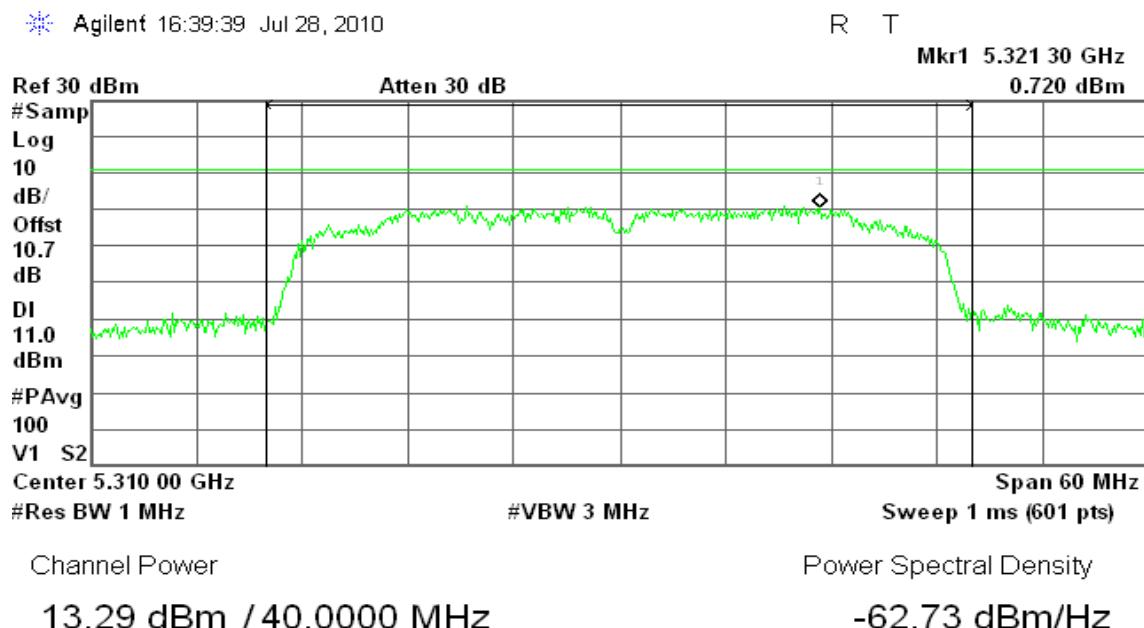
R L

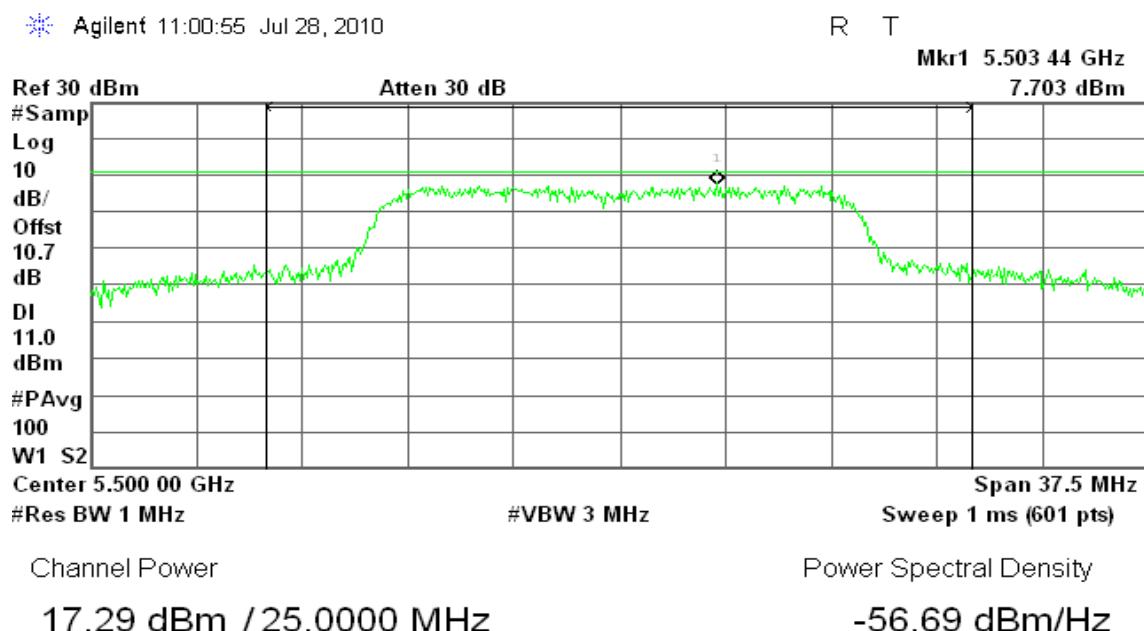
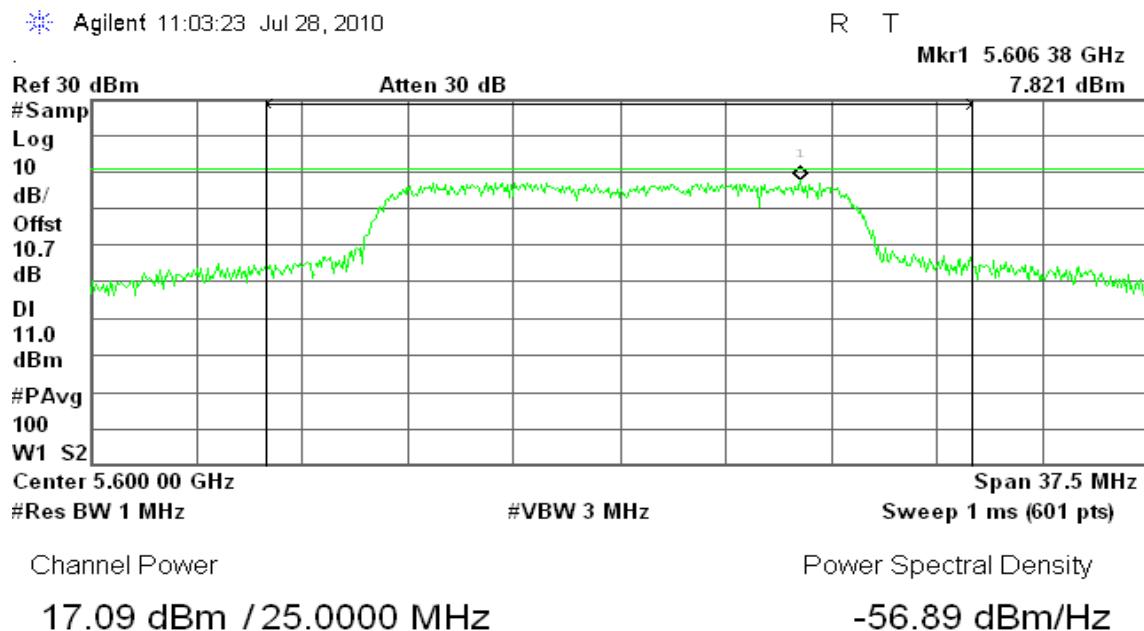
Mkr1 5.253 30 GHz

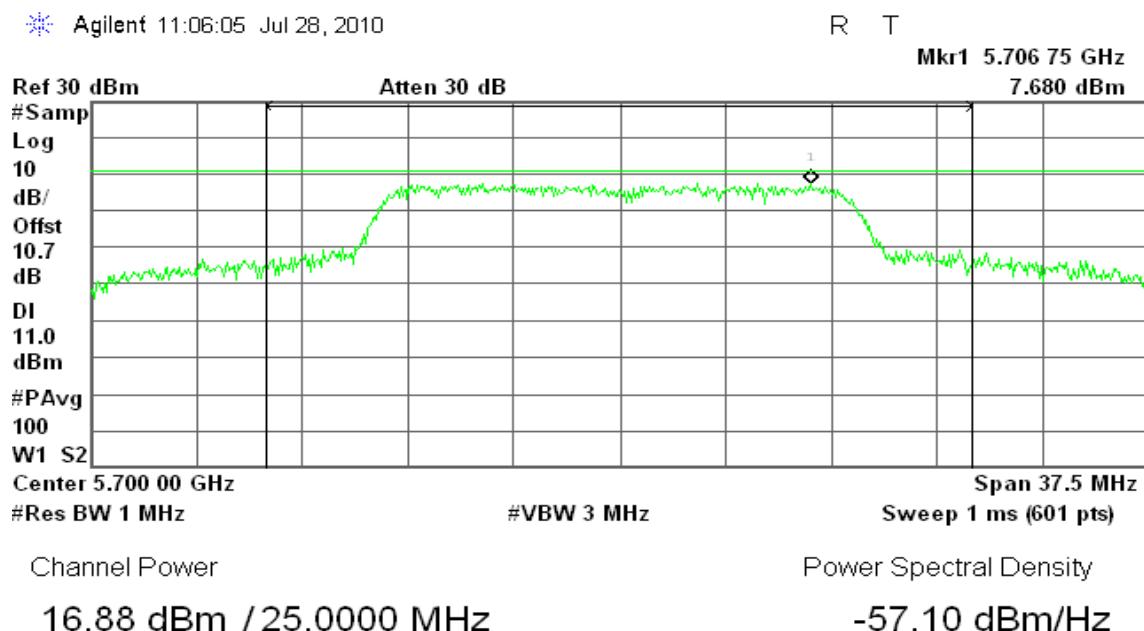
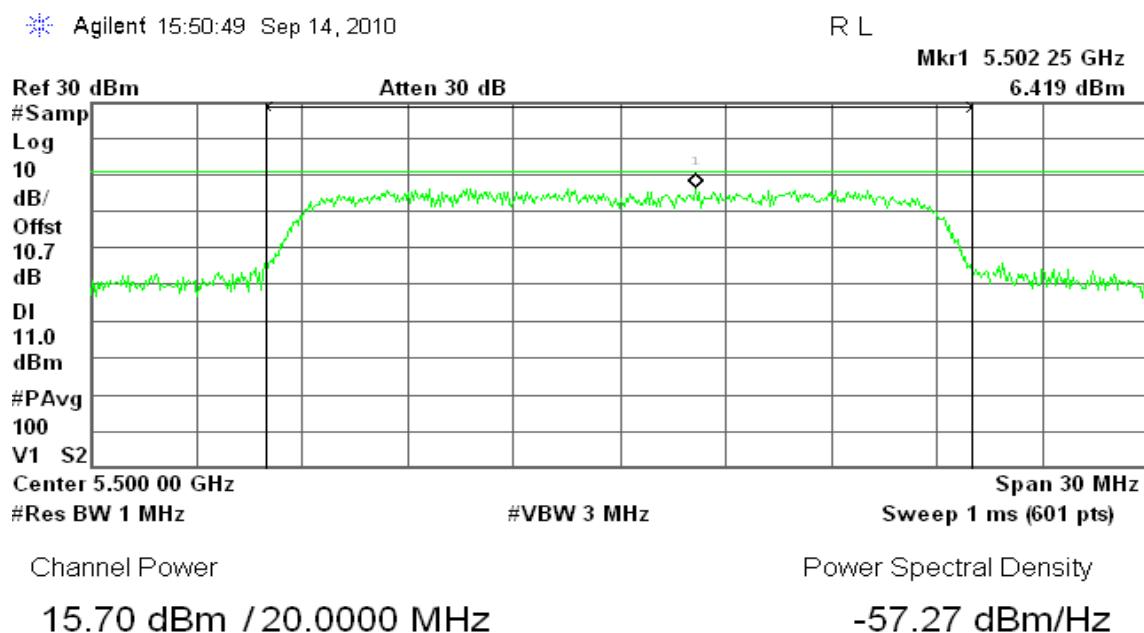
6.710 dBm

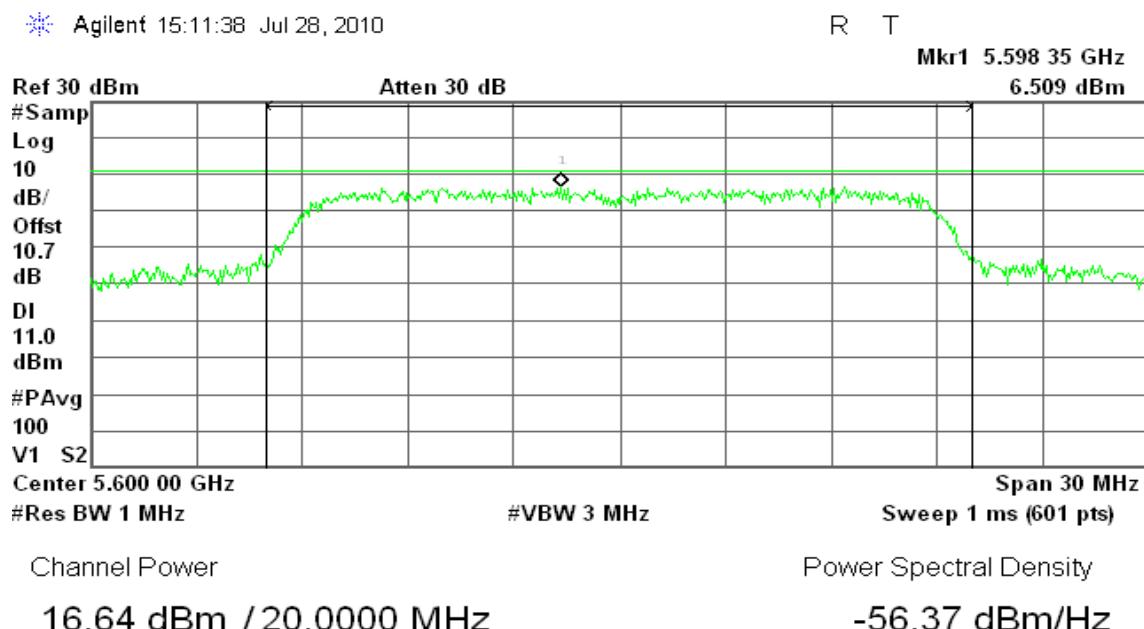
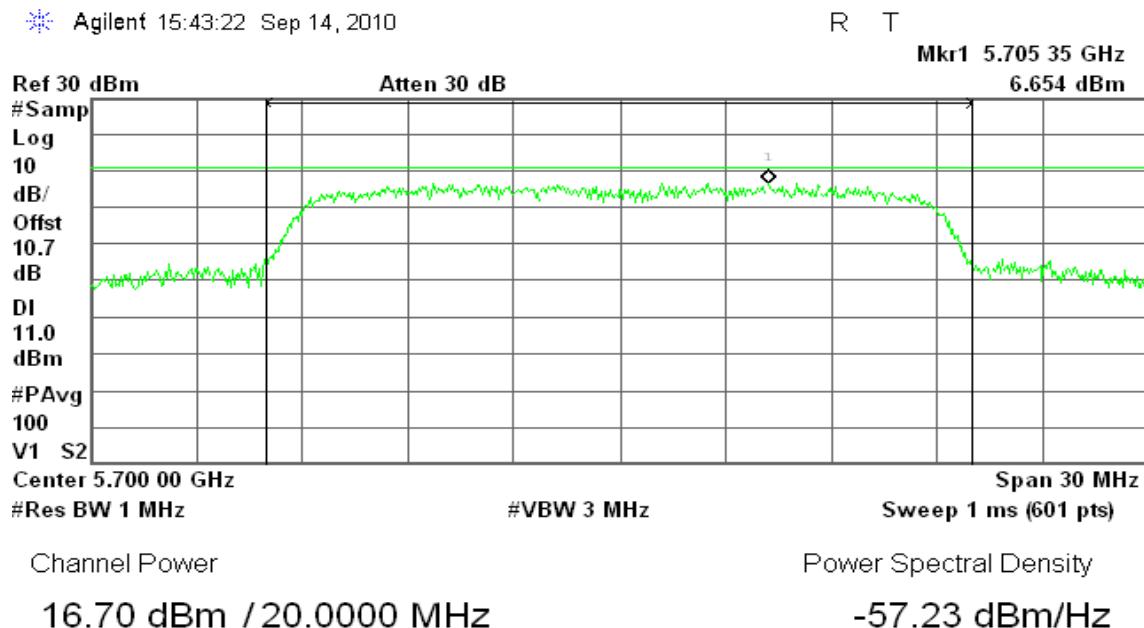


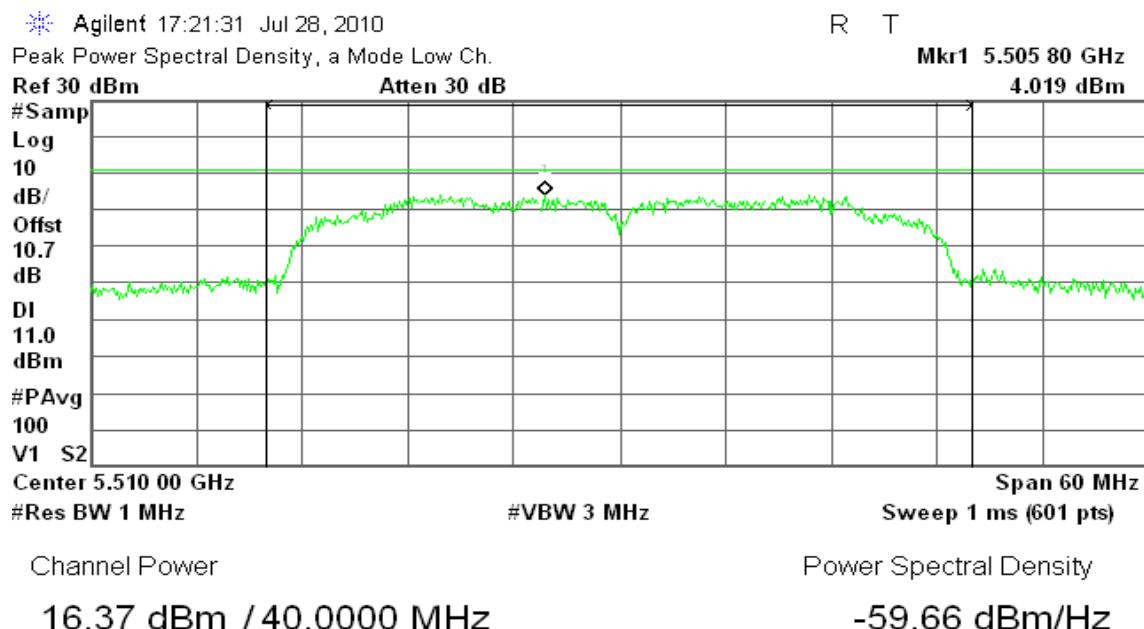
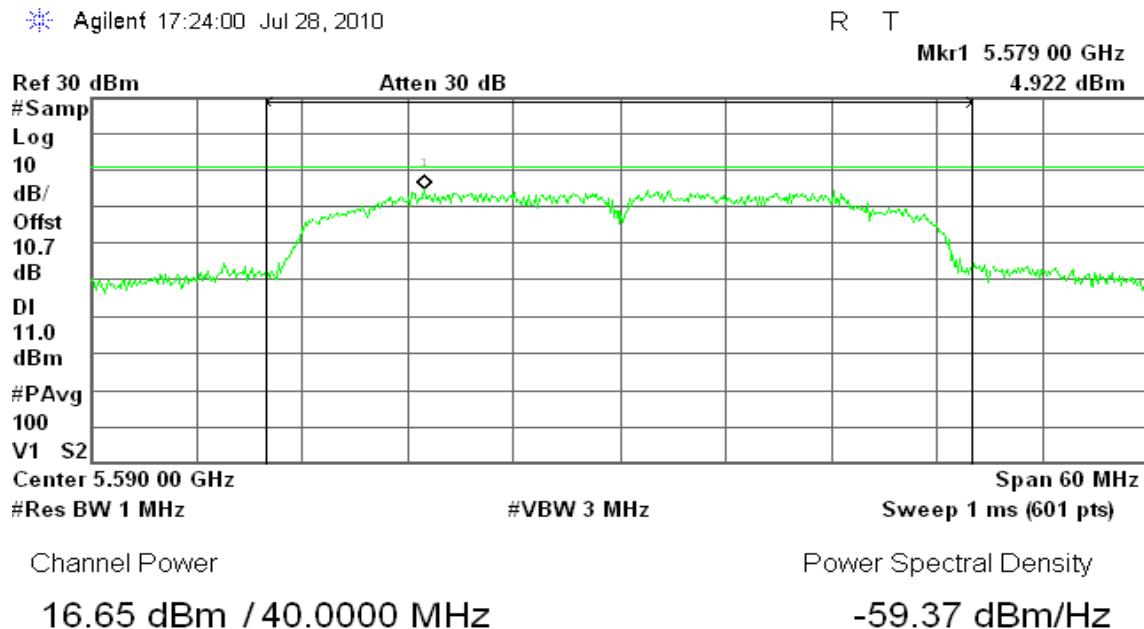
**CH Mid****CH High**

**draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz****CH Low****CH High**

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz****CH Low****CH Mid**

**CH High****draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz****CH Low**

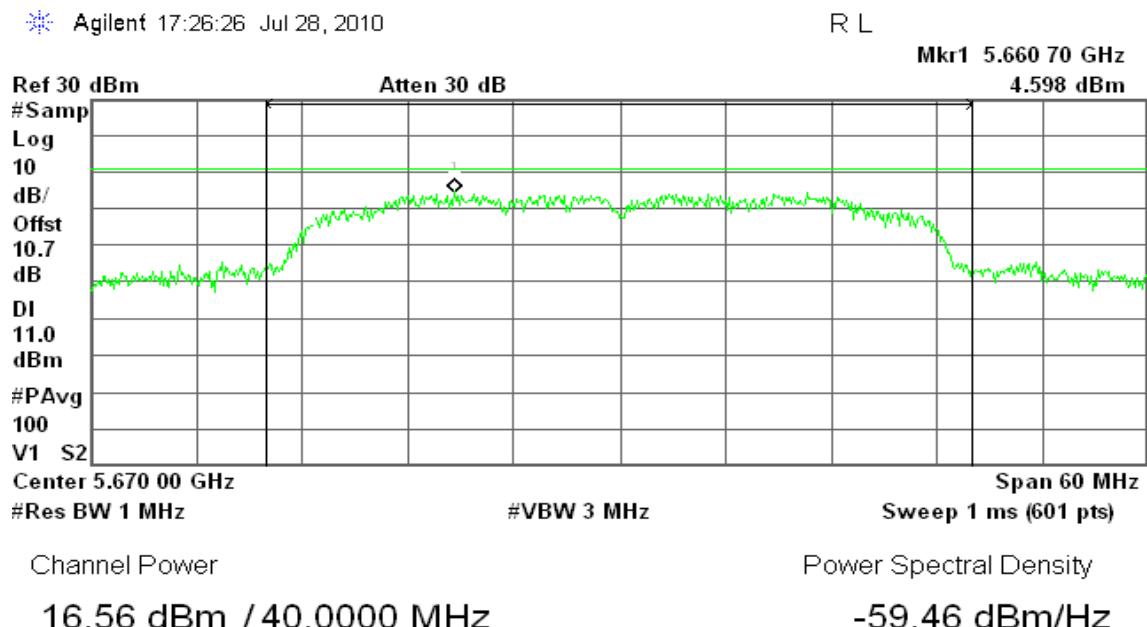
**CH Mid****CH High**

**draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz****CH Low****CH Mid**



CH High

Agilent 17:26:26 Jul 28, 2010






7.5 PEAK EXCURSION

LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Configuration



TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
Trace B, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Setup sample detector and power average mode, to scan 100 times with Average.
4. Delta Mark trace A Maximum frequency and trace B same frequency.
5. Repeat the above procedure until measurements for all frequencies were complete.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5180 | 7.57 | 13.00 | -5.43 | PASS |
| Mid | 5220 | 8.10 | 13.00 | -4.90 | PASS |
| High | 5240 | 8.15 | 13.00 | -4.85 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5180 | 10.72 | 13.00 | -2.28 | PASS |
| Mid | 5220 | 12.13 | 13.00 | -0.87 | PASS |
| High | 5240 | 11.02 | 13.00 | -1.98 | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5190 | 10.17 | 13.00 | -2.83 | PASS |
| High | 5230 | 11.64 | 13.00 | -1.36 | PASS |

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5260 | 9.74 | 13.00 | -3.26 | PASS |
| Mid | 5280 | 9.65 | 13.00 | -3.35 | PASS |
| High | 5320 | 7.38 | 13.00 | -5.62 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5260 | 11.34 | 13.00 | -1.66 | PASS |
| Mid | 5280 | 10.58 | 13.00 | -2.42 | PASS |
| High | 5320 | 11.59 | 13.00 | -1.41 | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5270 | 11.22 | 13.00 | -1.78 | PASS |
| High | 5310 | 11.39 | 13.00 | -1.61 | PASS |

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

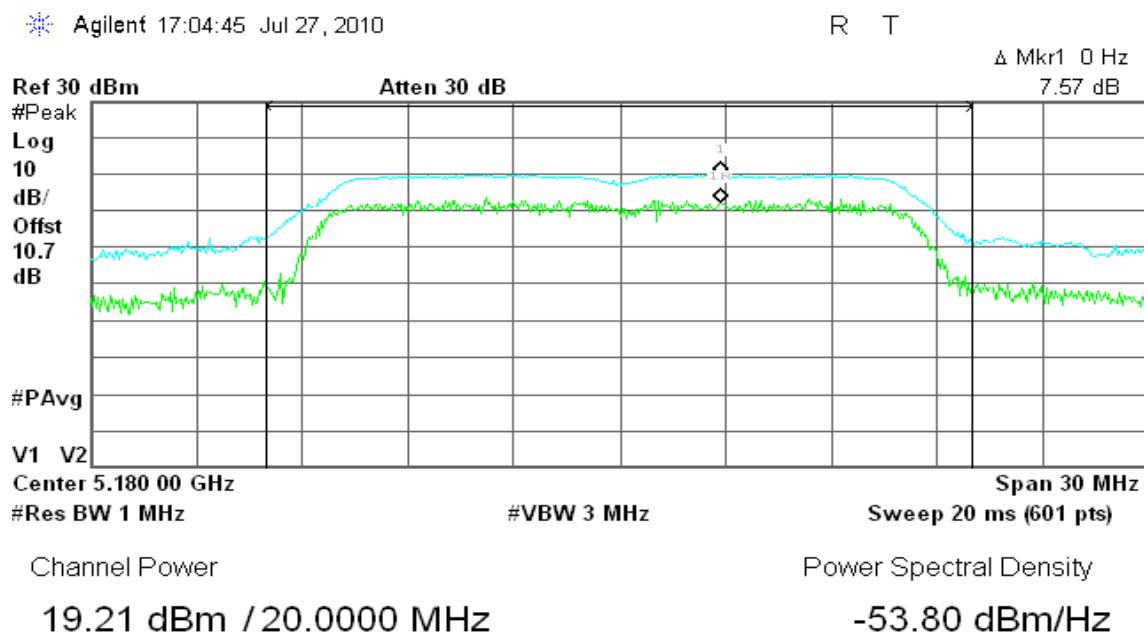
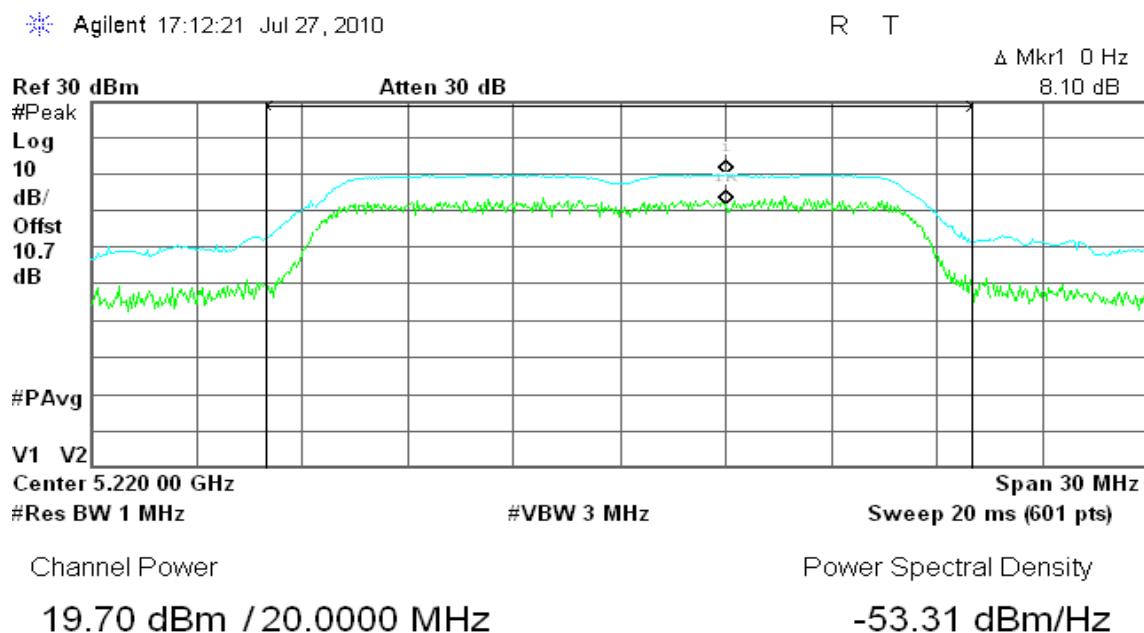
| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5500 | 8.76 | 13.00 | -4.24 | PASS |
| Mid | 5600 | 9.01 | 13.00 | -3.99 | PASS |
| High | 5700 | 9.99 | 13.00 | -3.01 | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz

| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5500 | 9.10 | 13.00 | -3.90 | PASS |
| Mid | 5600 | 9.12 | 13.00 | -3.88 | PASS |
| High | 5700 | 10.02 | 13.00 | -2.98 | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz

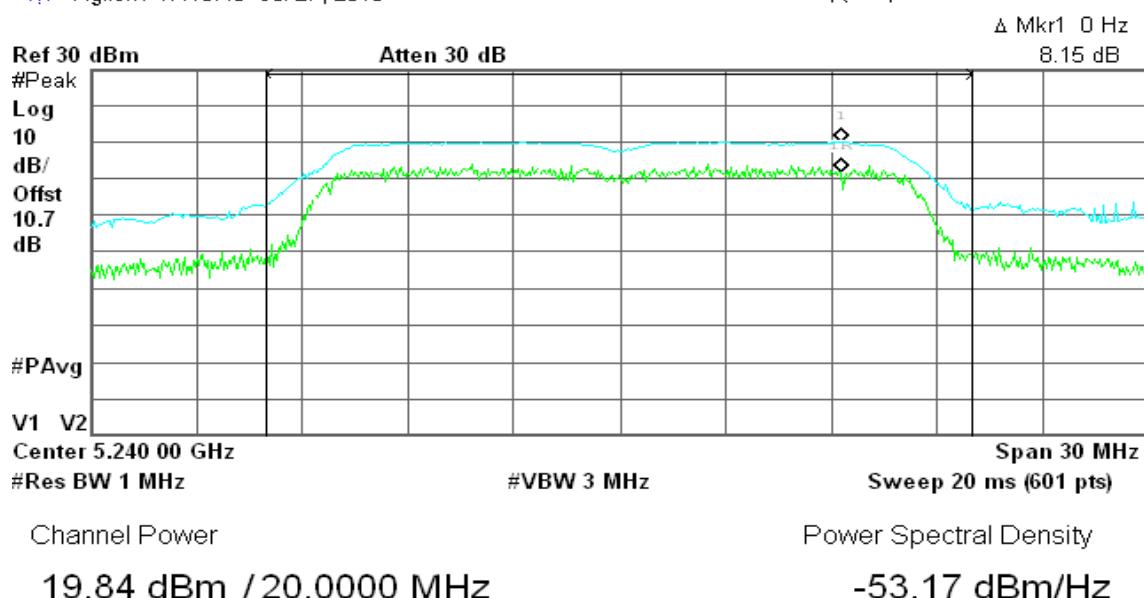
| Channel | Frequency (MHz) | Peak Excursion (dB) | Limit (dB) | Margin (dB) | Result |
|---------|-----------------|---------------------|------------|-------------|--------|
| Low | 5510 | 9.31 | 13.00 | -3.69 | PASS |
| Mid | 5590 | 8.98 | 13.00 | -4.02 | PASS |
| High | 5670 | 7.49 | 13.00 | -5.51 | PASS |

**Test Plot****IEEE 802.11a mode / 5180 ~ 5240MHz****CH Low****CH Mid**

**CH High**

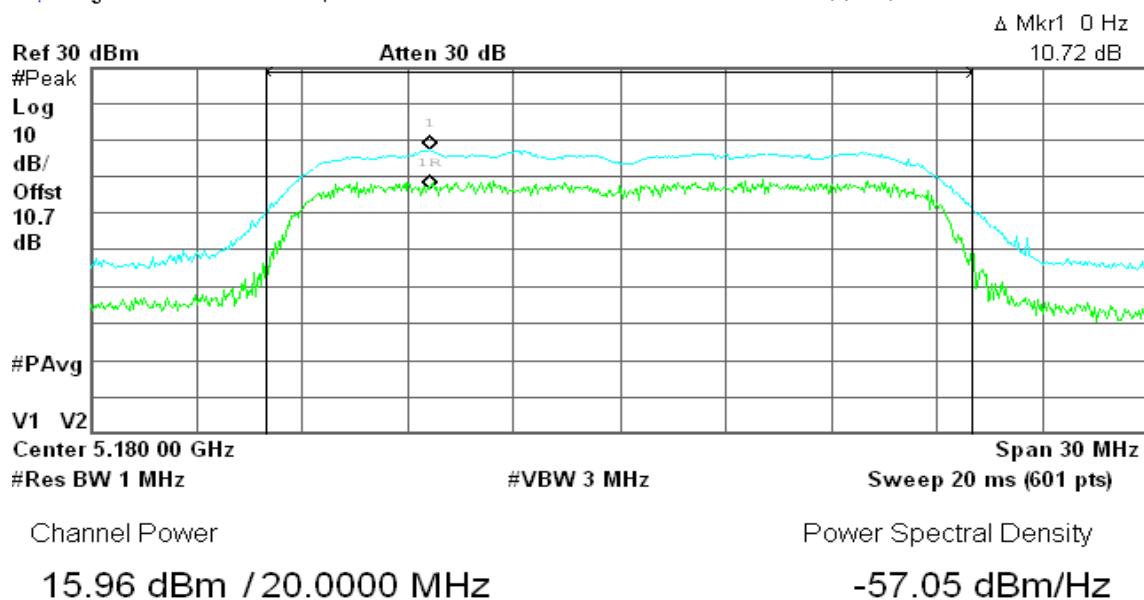
Agilent 17:16:48 Jul 27, 2010

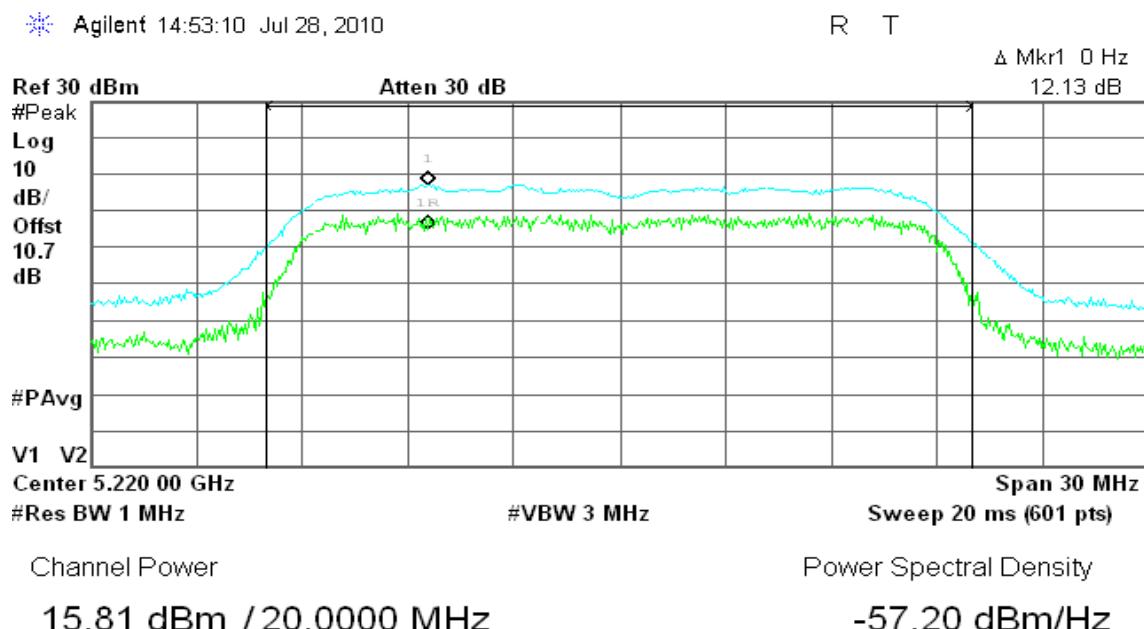
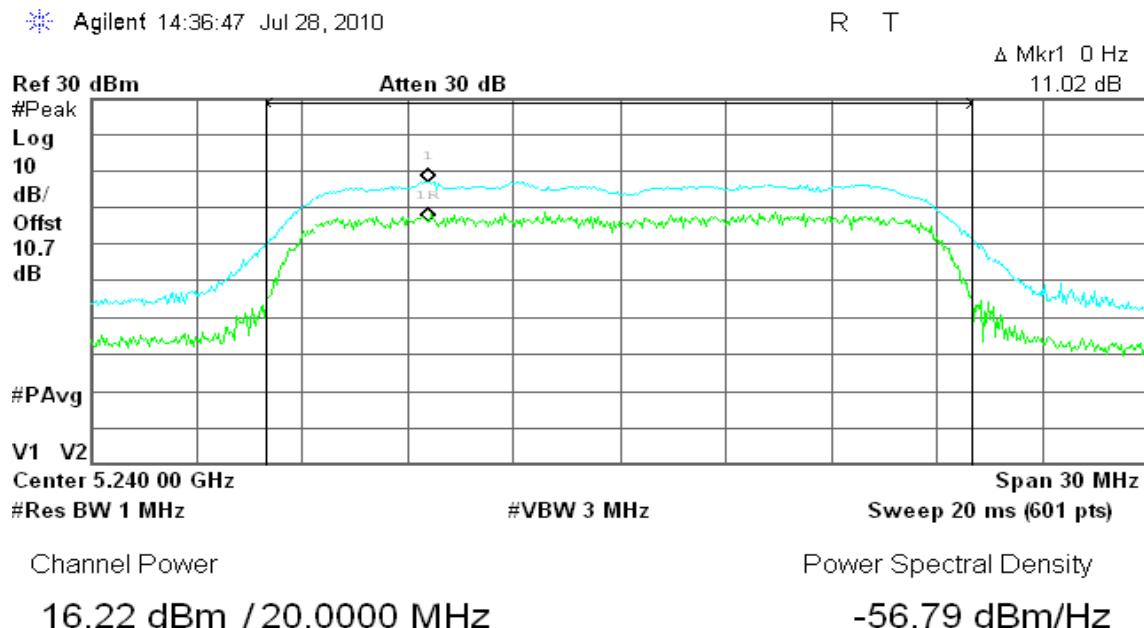
R T

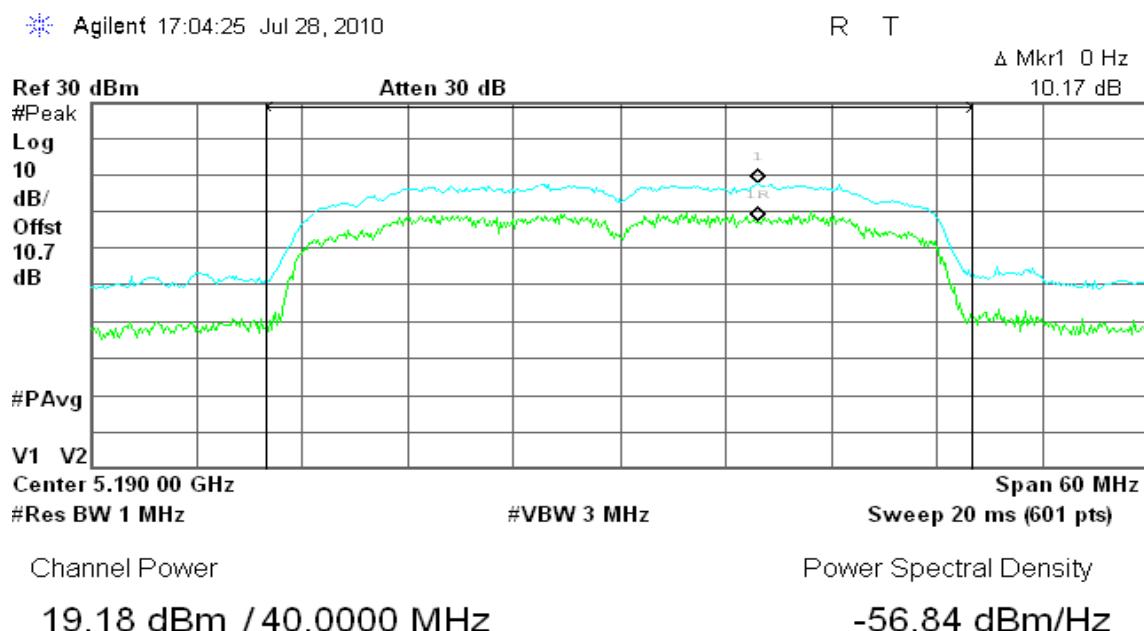
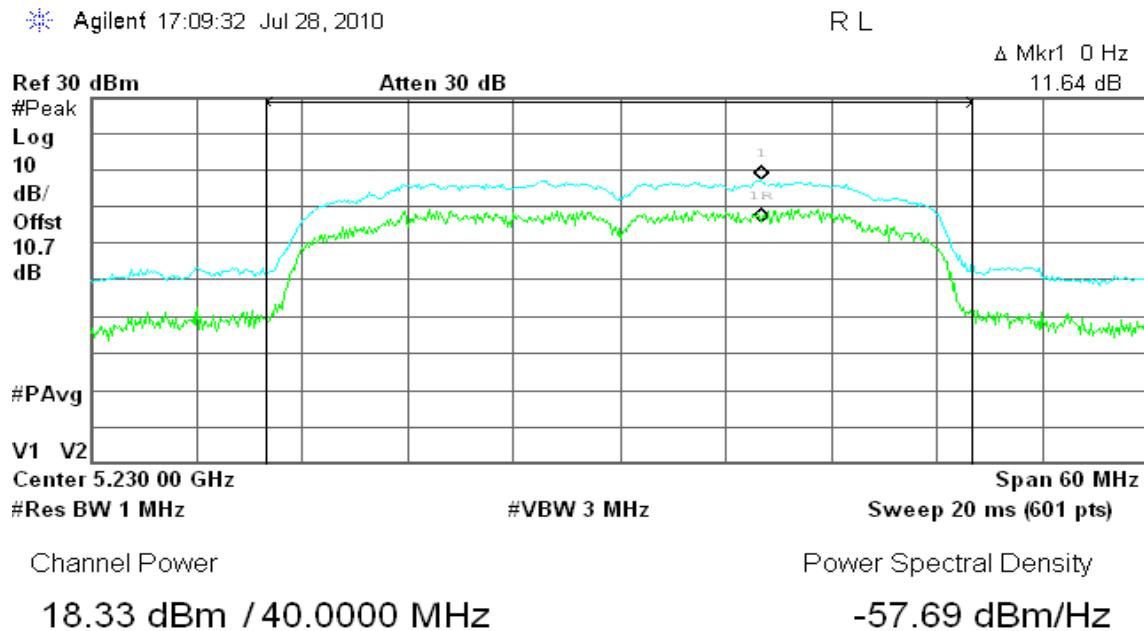
**draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz****CH Low**

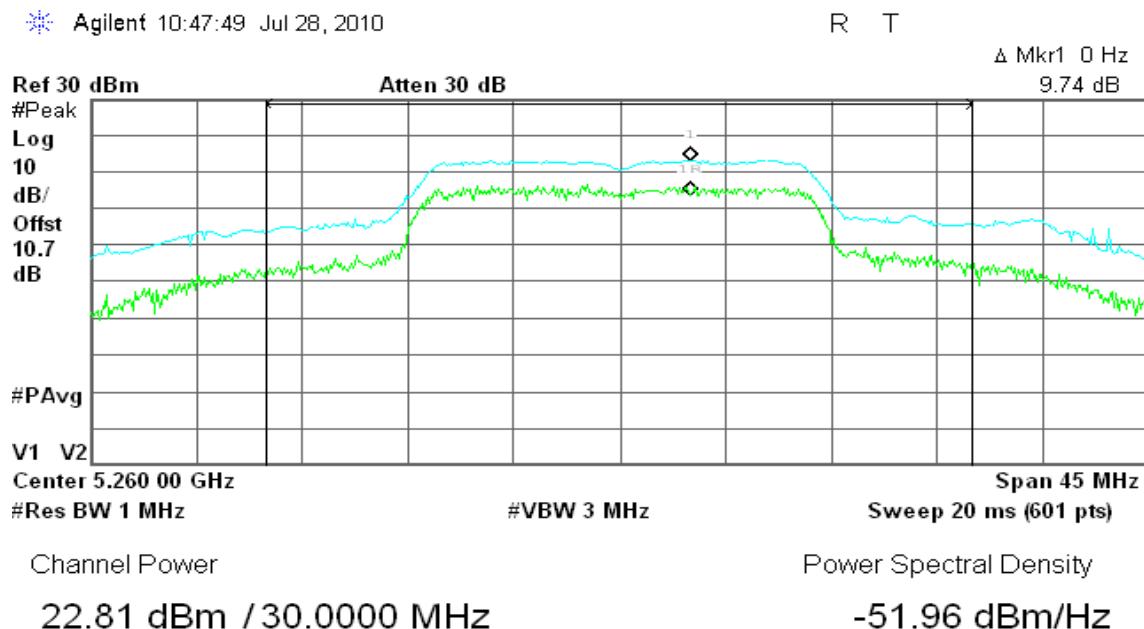
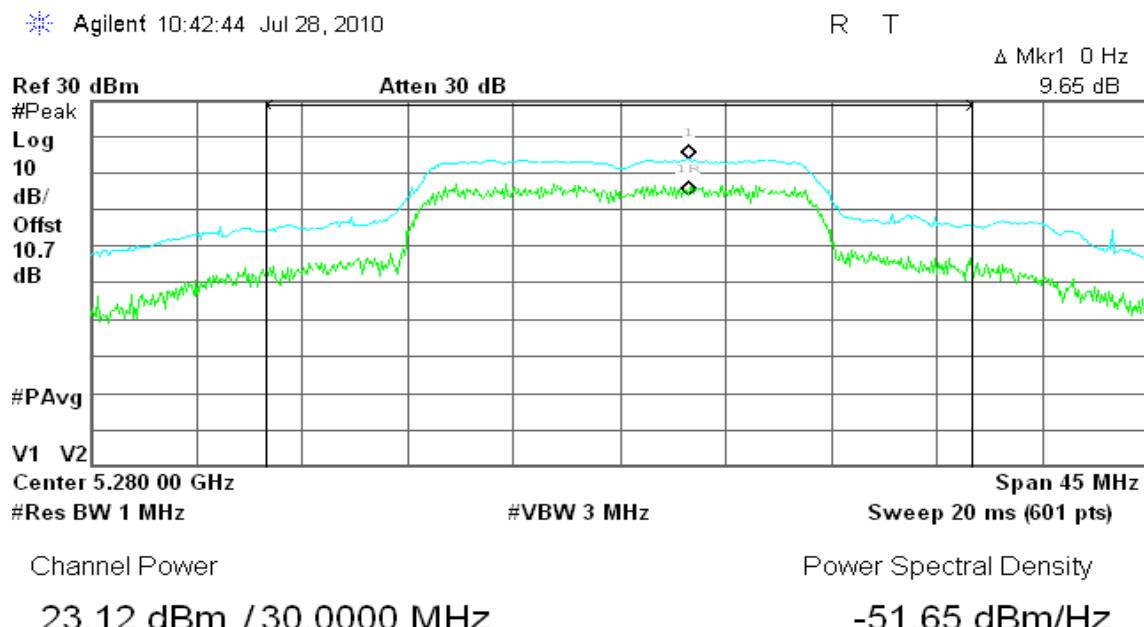
Agilent 14:51:04 Jul 28, 2010

R T



**CH Mid****CH High**

**draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz****CH Low****CH High**

**IEEE 802.11a mode / 5260 ~ 5320MHz****CH Low****CH Mid**

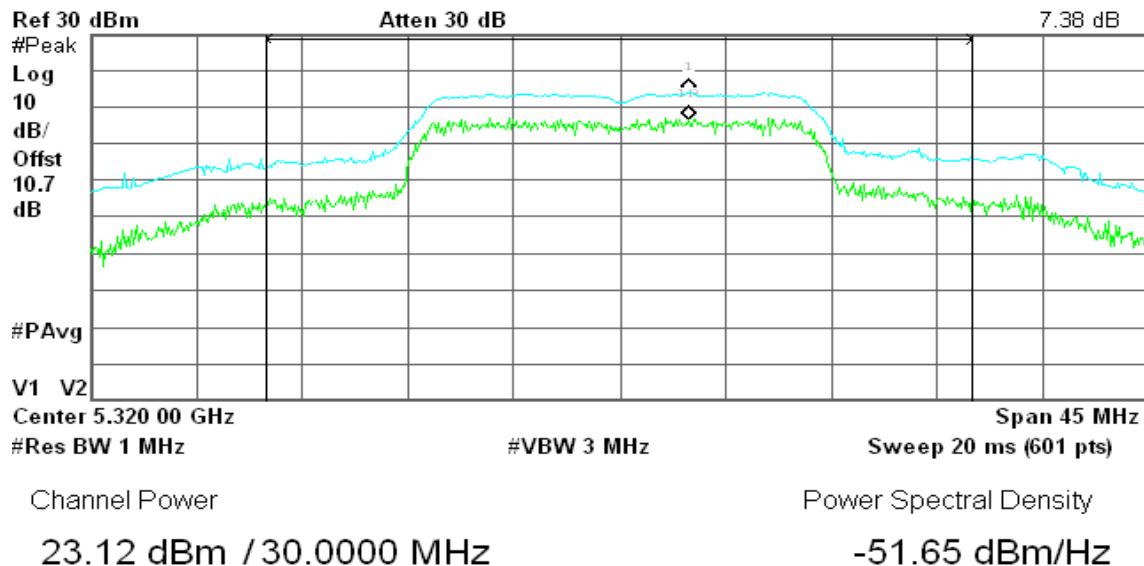
**CH High**

Agilent 10:54:13 Jul 28, 2010

R T

Δ Mkr1 0 Hz

7.38 dB

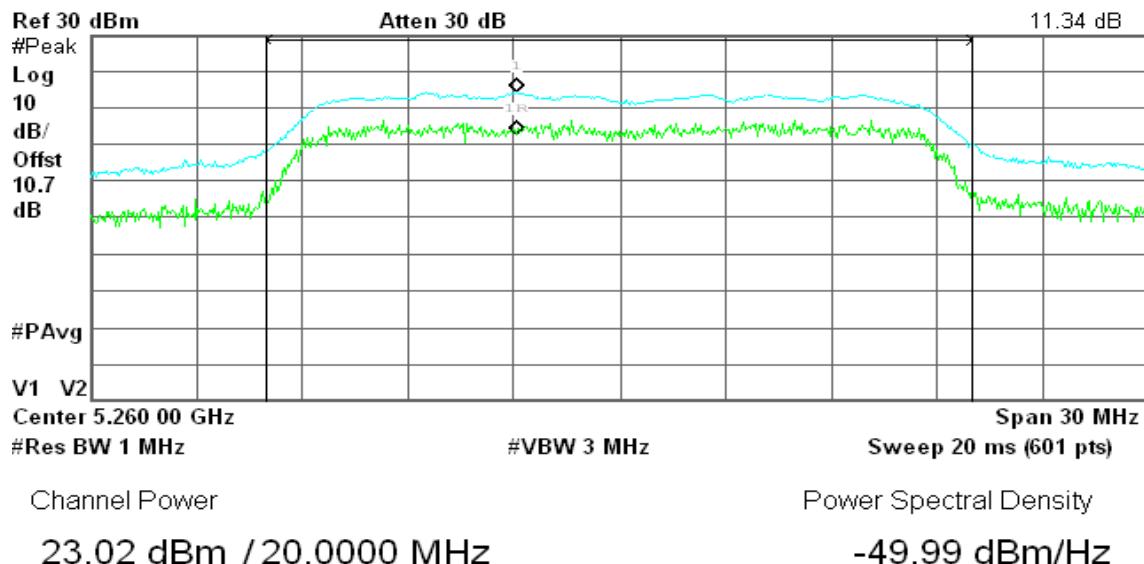
**draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz****CH Low**

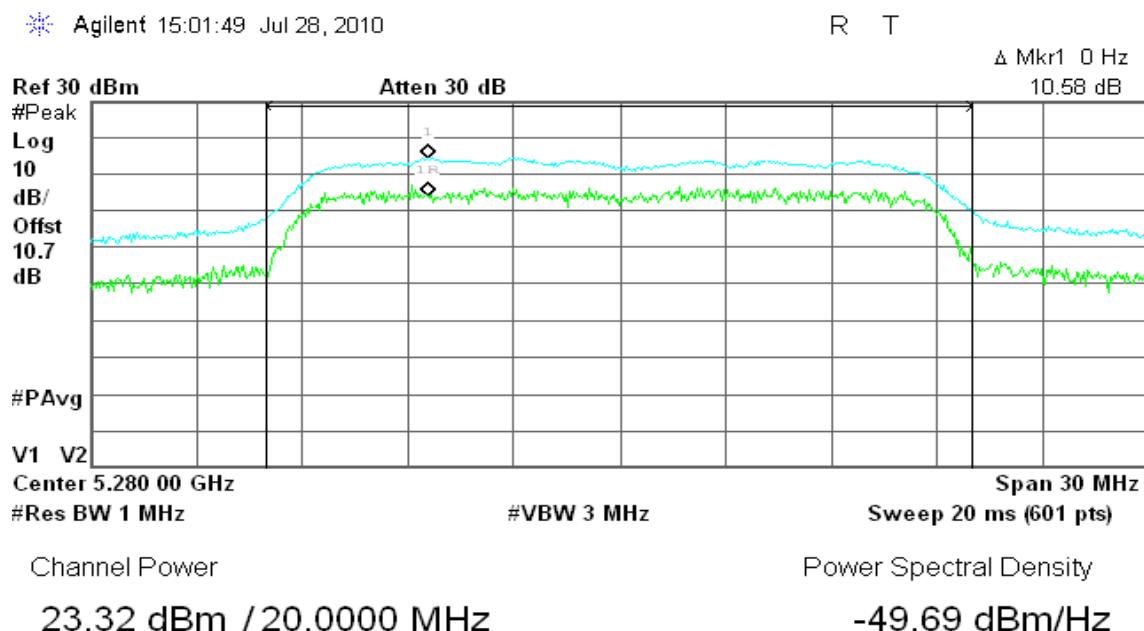
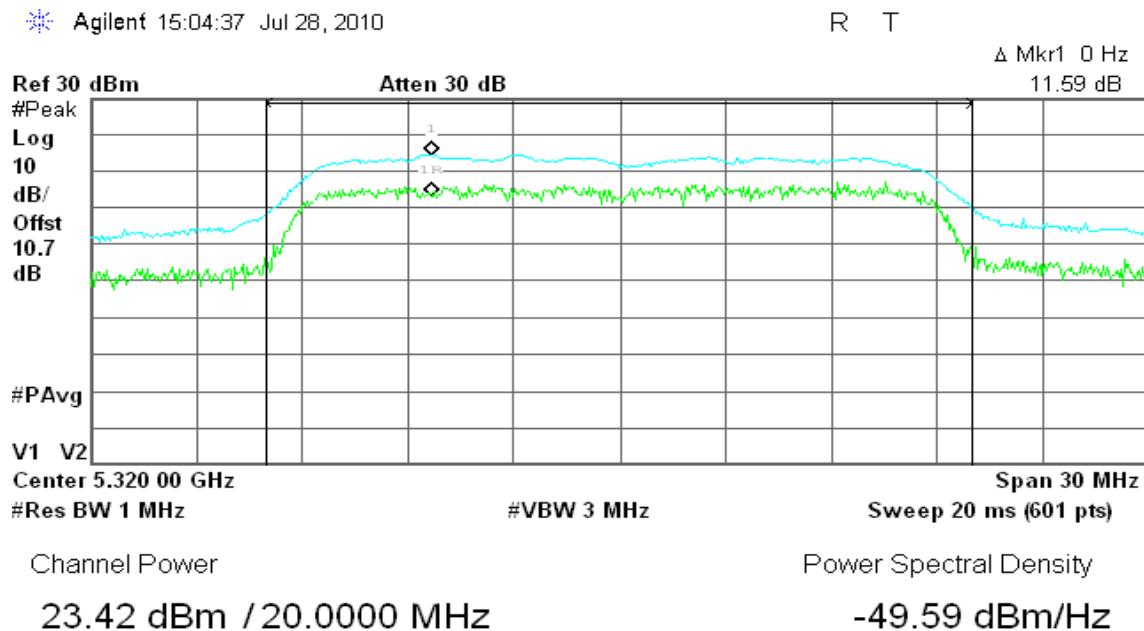
Agilent 14:58:58 Jul 28, 2010

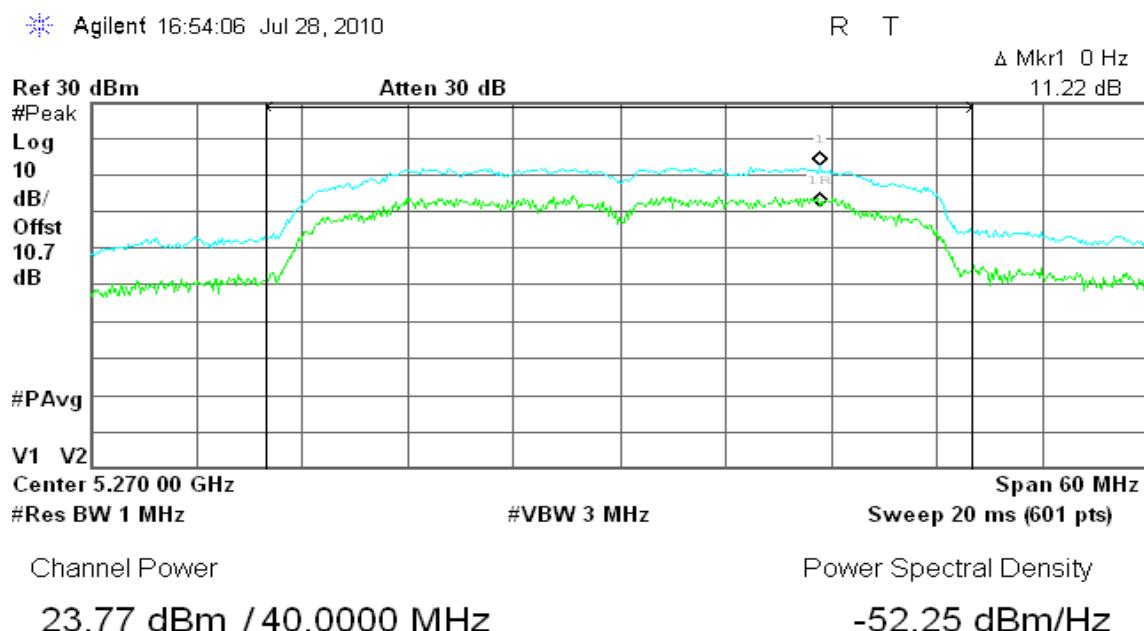
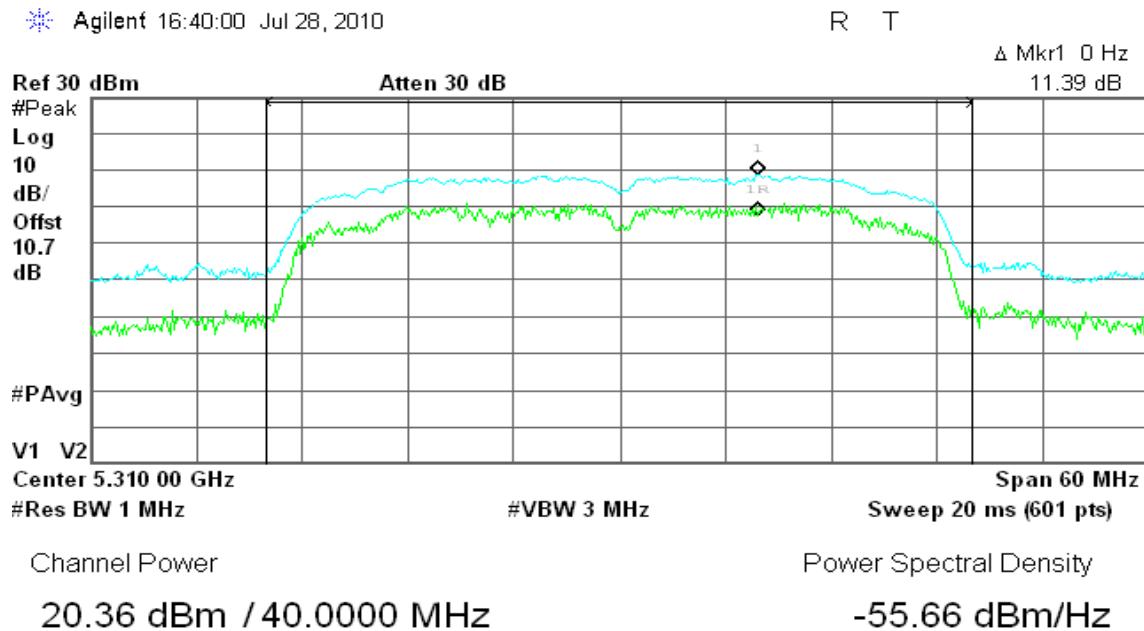
R L

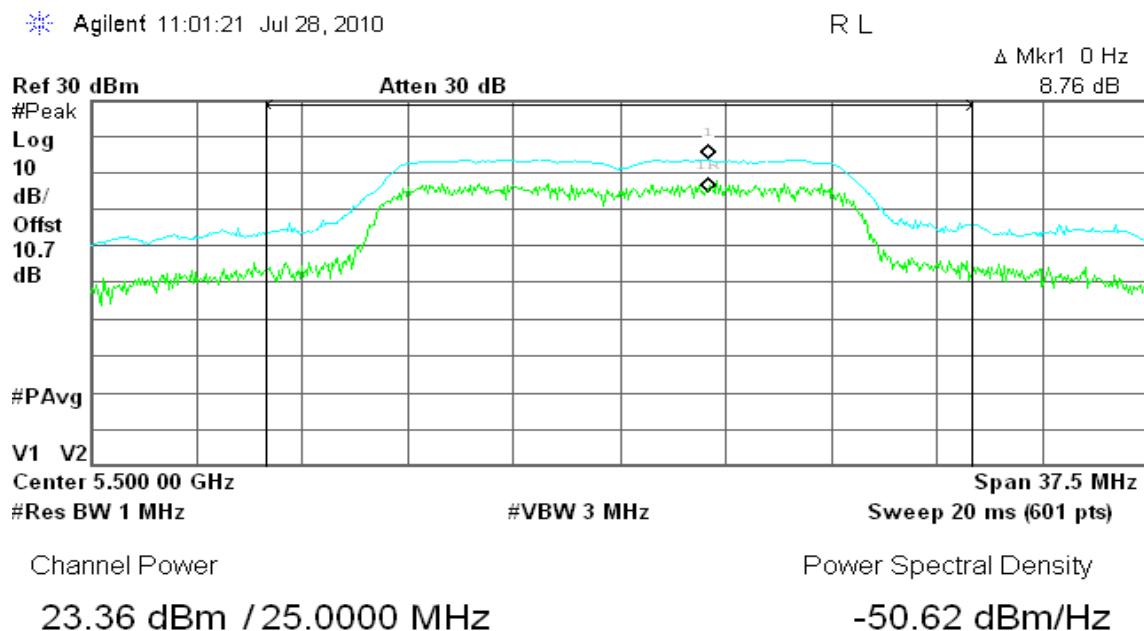
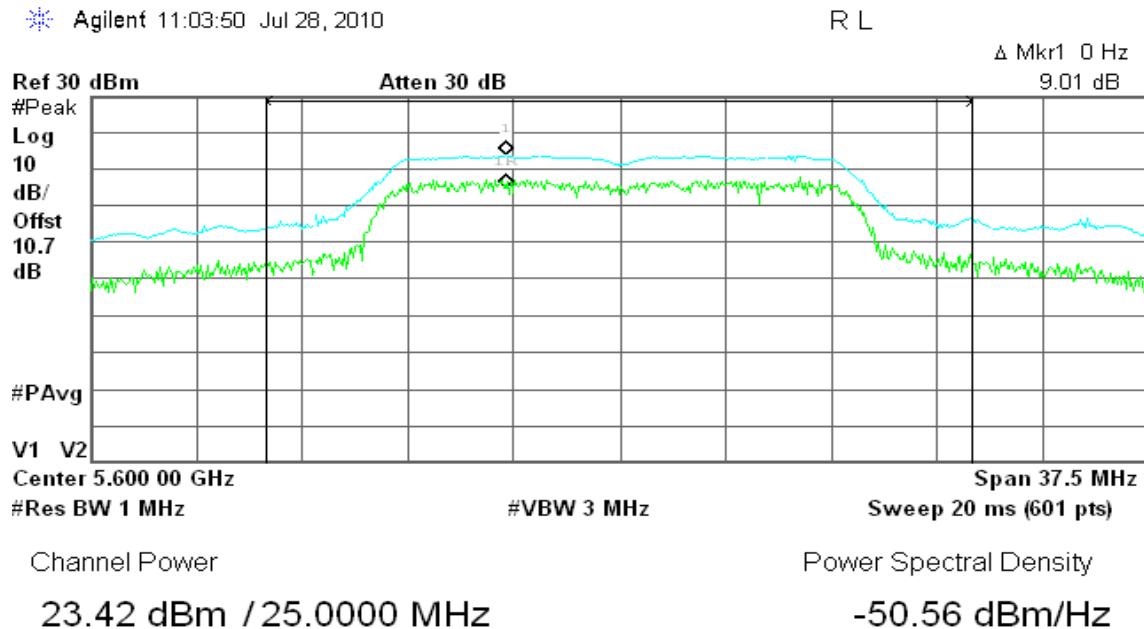
Δ Mkr1 0 Hz

11.34 dB



**CH Mid****CH High**

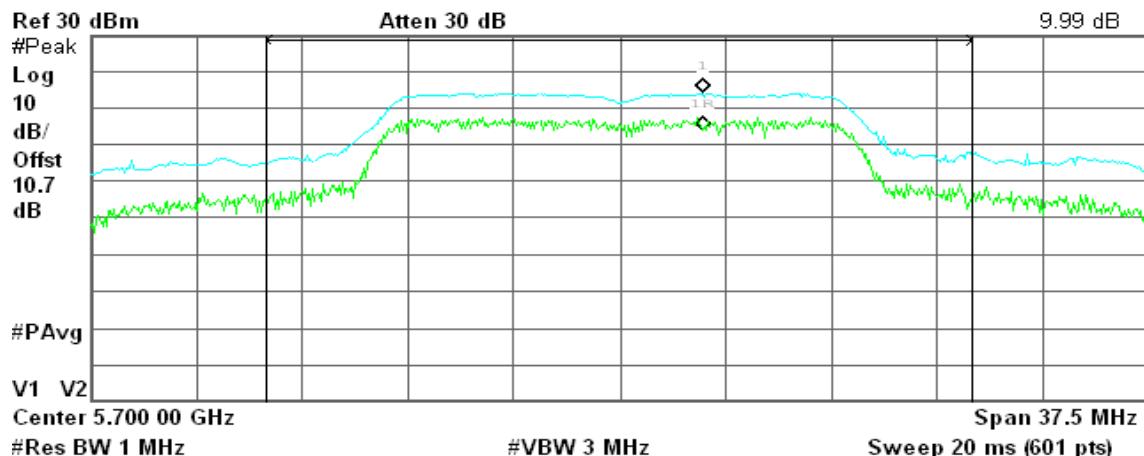
**draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz****CH Low****CH High**

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz****CH Low****CH Mid**

**CH High**

Agilent 11:06:26 Jul 28, 2010

R T

 Δ Mkr1 0 Hz
9.99 dB

Channel Power

23.40 dBm / 25.0000 MHz

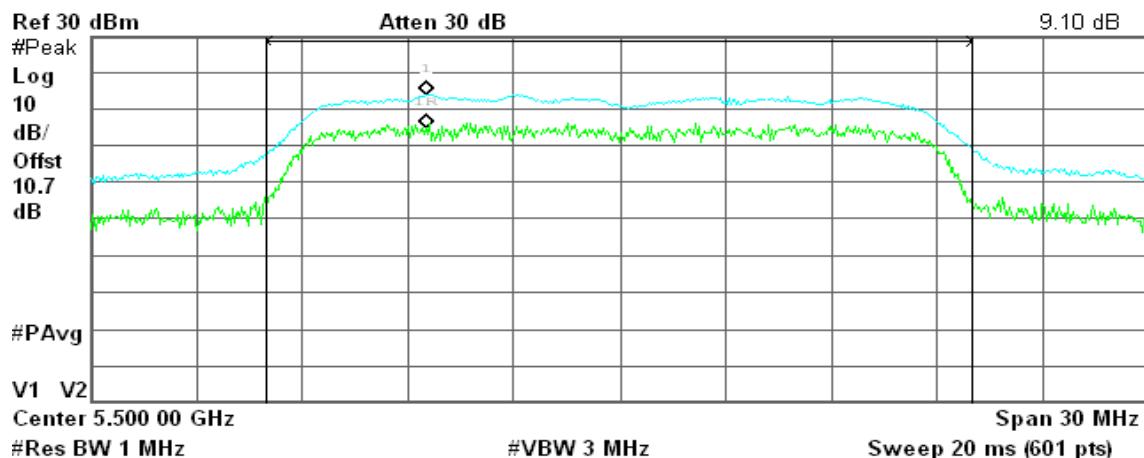
Power Spectral Density

-50.58 dBm/Hz

draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz**CH Low**

Agilent 15:09:19 Jul 28, 2010

R T

 Δ Mkr1 0 Hz
9.10 dB

Channel Power

22.48 dBm / 20.0000 MHz

Power Spectral Density

-50.53 dBm/Hz

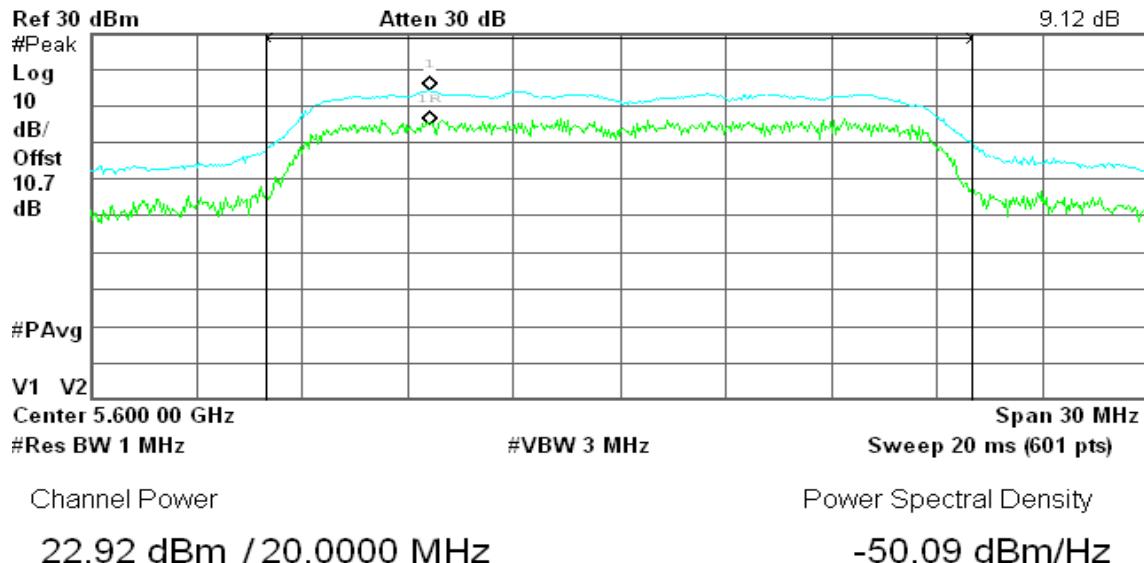
**CH Mid**

Agilent 15:12:03 Jul 28, 2010

R T

Δ Mkr1 0 Hz

9.12 dB

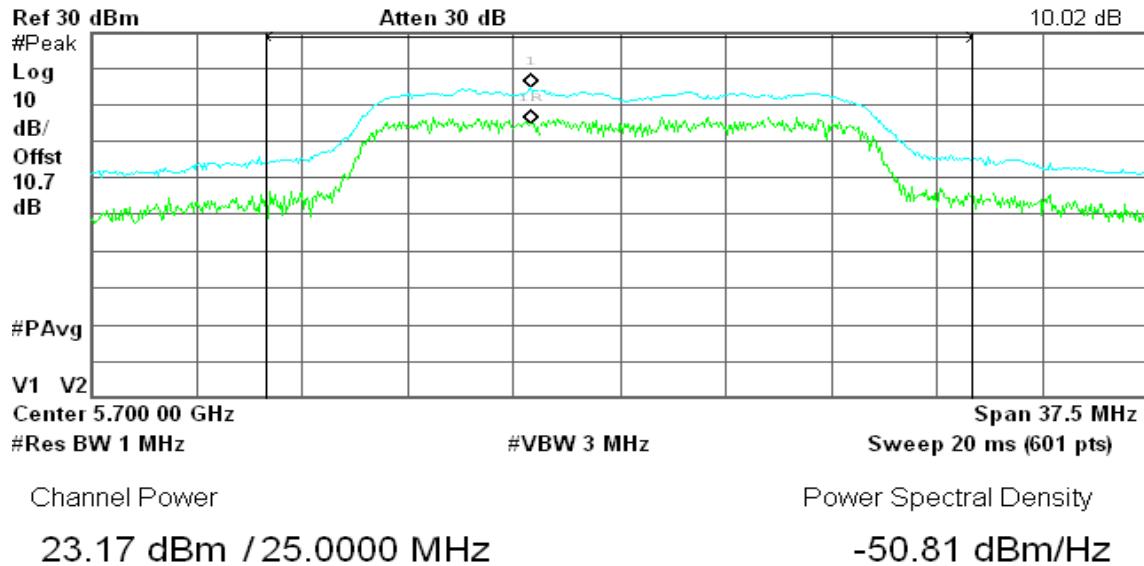
**CH High**

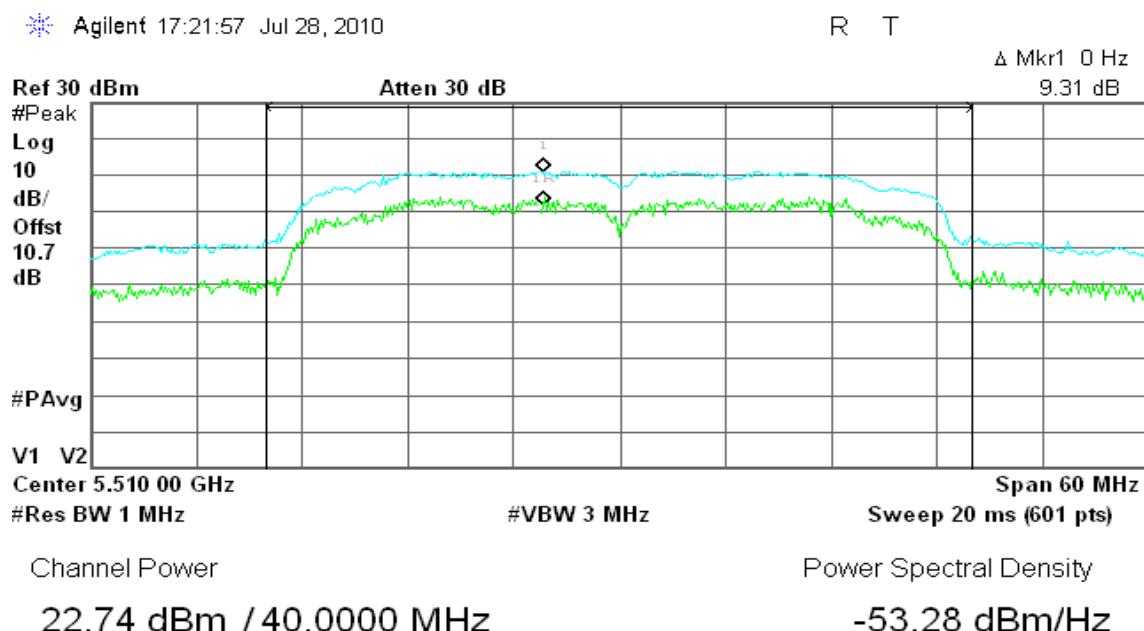
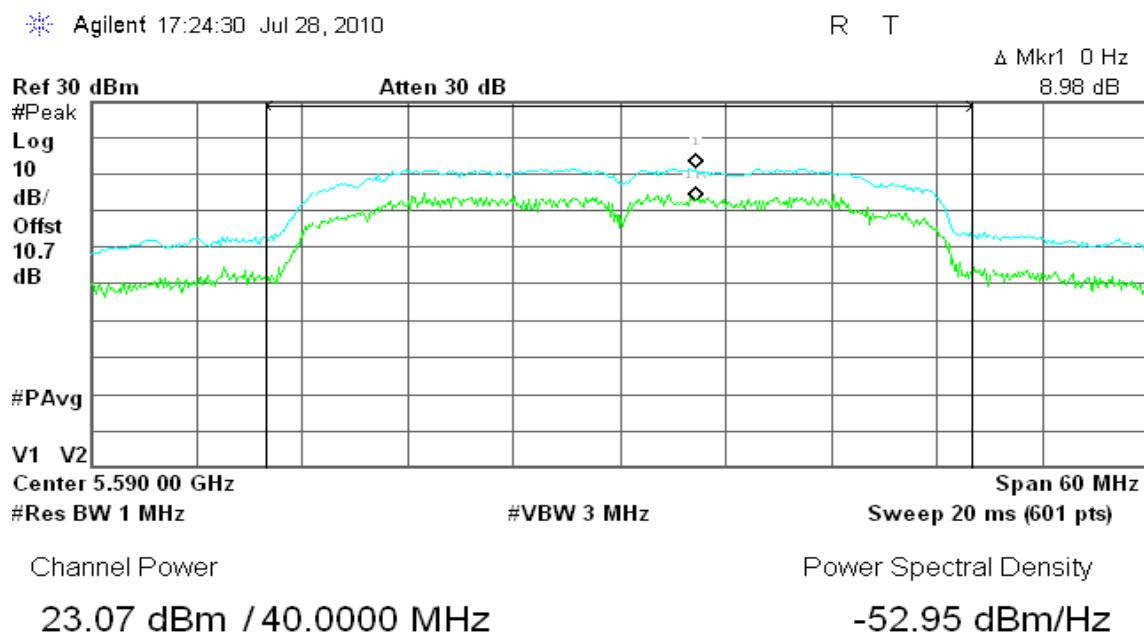
Agilent 15:15:02 Jul 28, 2010

R T

Δ Mkr1 0 Hz

10.02 dB



**draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz****CH Low****CH Mid**



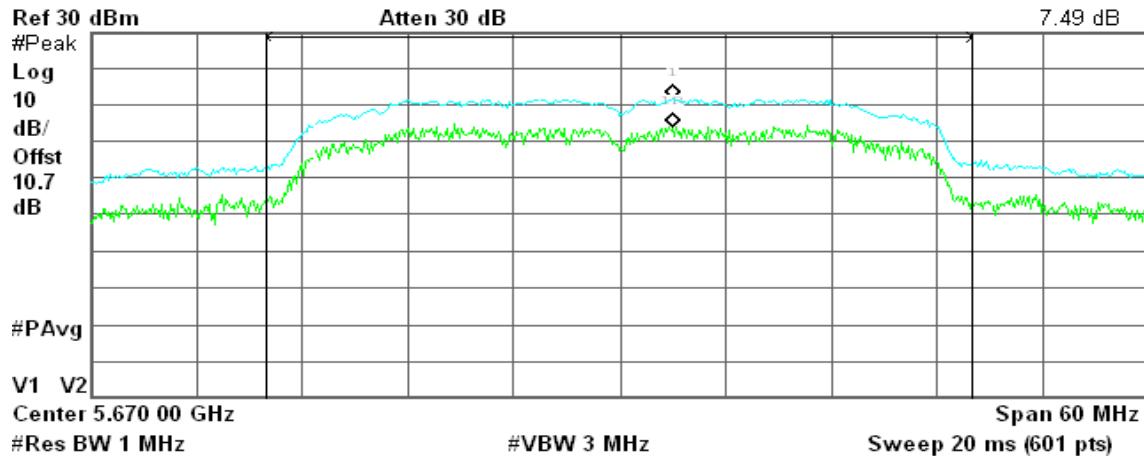
CH High

Agilent 17:26:46 Jul 28, 2010

R T

Δ Mkr1 0 Hz

7.49 dB





7.6 RADIATED UNDESIRABLE EMISSION

- According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (μ V/m) | Measurement Distance (m) |
|--------------------|--------------------------------|-----------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

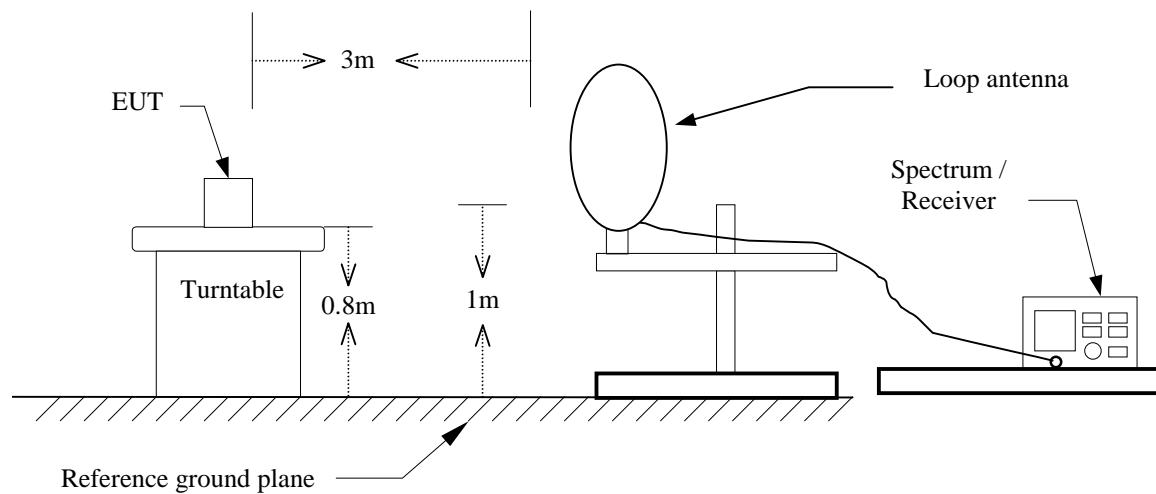
Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.

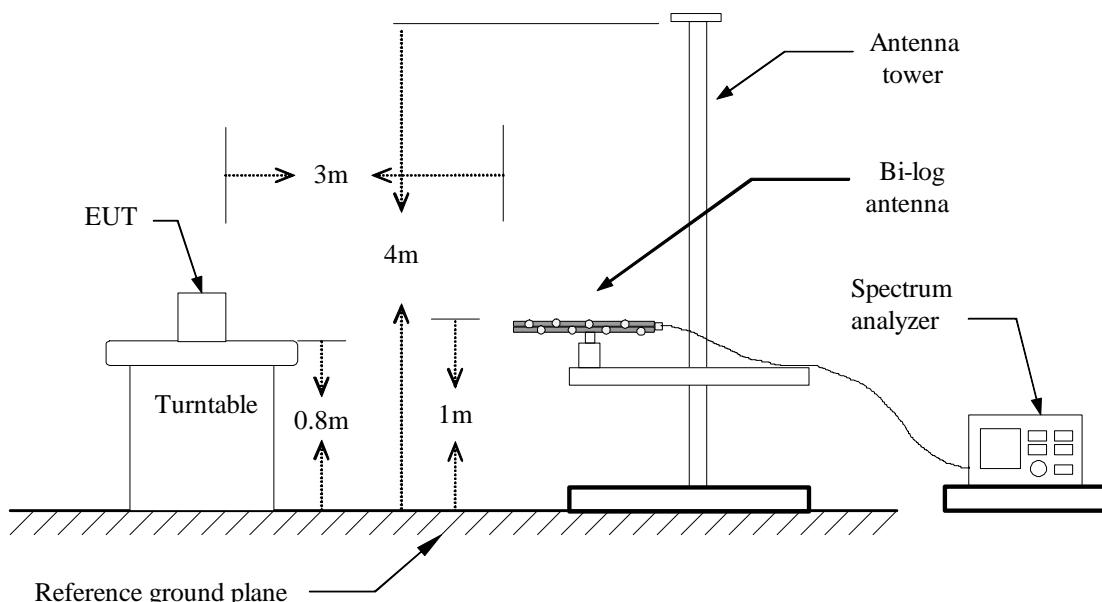
| Frequency (MHz) | Field Strength (μ V/m at 3-meter) | Field Strength (dB μ V/m at 3-meter) |
|--------------------|---|---|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

9kHz ~ 30MHz

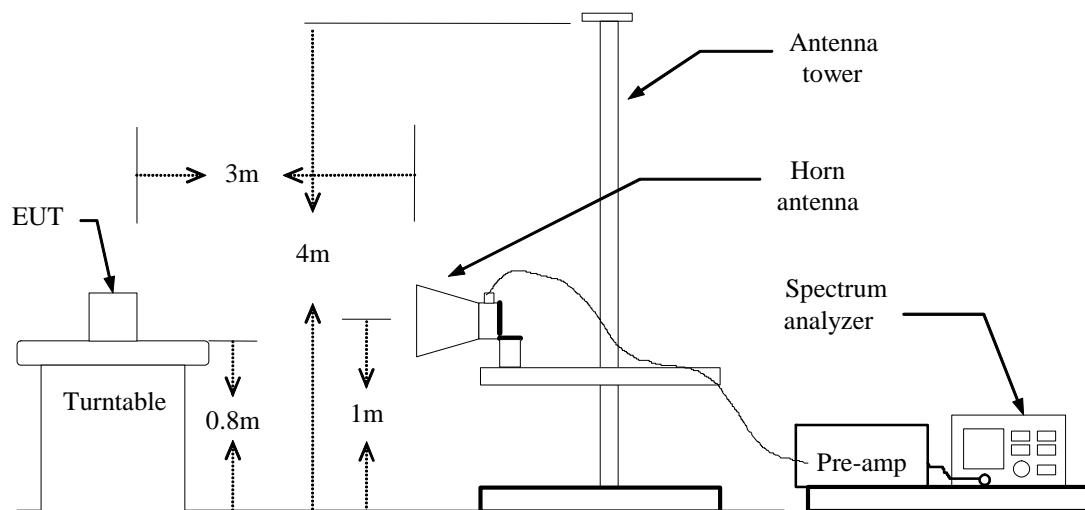


30MHz ~ 1GHz





Above 1 GHz





TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Test Date: September 10, 2010

Temperature: 25°C

Tested by: Mark Yang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 31.62 | V | 30.64 | -3.02 | 27.62 | 40.00 | -12.38 | Peak |
| 299.98 | V | 41.47 | -9.24 | 32.23 | 46.00 | -13.77 | Peak |
| 479.43 | V | 36.06 | -5.44 | 30.62 | 46.00 | -15.38 | Peak |
| 500.45 | V | 36.14 | -5.14 | 31.00 | 46.00 | -15.00 | Peak |
| 584.52 | V | 34.30 | -4.19 | 30.11 | 46.00 | -15.89 | Peak |
| 959.58 | V | 29.58 | 0.44 | 30.03 | 46.00 | -15.97 | Peak |
| 240.17 | H | 41.46 | -11.09 | 30.37 | 46.00 | -15.63 | Peak |
| 299.98 | H | 39.06 | -9.24 | 29.82 | 46.00 | -16.18 | Peak |
| 400.22 | H | 36.62 | -7.08 | 29.54 | 46.00 | -16.46 | Peak |
| 500.45 | H | 35.39 | -5.14 | 30.25 | 46.00 | -15.75 | Peak |
| 699.30 | H | 32.75 | -2.54 | 30.20 | 46.00 | -15.80 | Peak |
| 959.58 | H | 29.84 | 0.44 | 30.28 | 46.00 | -15.72 | Peak |

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz**

Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / **Test Date:** July 27, 2010
CH Low

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1906.67 | V | 53.67 | --- | -5.01 | 48.66 | --- | 74.00 | 54.00 | -5.34 | Peak |
| 2300.00 | V | 52.43 | --- | -3.26 | 49.17 | --- | 74.00 | 54.00 | -4.83 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2300.00 | H | 52.49 | --- | -3.26 | 49.24 | --- | 74.00 | 54.00 | -4.76 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / **Test Date:** July 27, 2010
CH Mid

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1576.67 | V | 52.27 | --- | -8.05 | 44.21 | --- | 74.00 | 54.00 | -9.79 | Peak |
| 2230.00 | V | 52.46 | --- | -3.46 | 49.00 | --- | 74.00 | 54.00 | -5.00 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1926.67 | H | 52.79 | --- | -4.83 | 47.97 | --- | 74.00 | 54.00 | -6.03 | Peak |
| 2453.33 | H | 52.25 | --- | -2.80 | 49.45 | --- | 74.00 | 54.00 | -4.55 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH High **Test Date:** July 27, 2010

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1630.00 | V | 53.16 | --- | -7.56 | 45.60 | --- | 74.00 | 54.00 | -8.40 | Peak |
| 1890.00 | V | 52.88 | --- | -5.16 | 47.71 | --- | 74.00 | 54.00 | -6.29 | Peak |
| 2796.67 | V | 51.36 | --- | -1.79 | 49.56 | --- | 74.00 | 54.00 | -4.44 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2090.00 | H | 52.72 | --- | -3.88 | 48.84 | --- | 74.00 | 54.00 | -5.16 | Peak |
| 2313.33 | H | 51.60 | --- | -3.22 | 48.38 | --- | 74.00 | 54.00 | -5.62 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz / CH Low **Test Date:** July 27, 2010
Temperature: 25°C **Tested by:** Wolf Huang
Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1873.33 | V | 52.61 | --- | -5.32 | 47.29 | --- | 74.00 | 54.00 | -6.71 | Peak |
| 2046.67 | V | 52.44 | --- | -4.01 | 48.43 | --- | 74.00 | 54.00 | -5.57 | Peak |
| 2786.67 | V | 51.11 | --- | -1.82 | 49.29 | --- | 74.00 | 54.00 | -4.71 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1770.00 | H | 53.26 | --- | -6.27 | 46.99 | --- | 74.00 | 54.00 | -7.01 | Peak |
| 2440.00 | H | 51.77 | --- | -2.84 | 48.94 | --- | 74.00 | 54.00 | -5.06 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid **Test Date:** July 27, 2010
Temperature: 25°C **Tested by:** Wolf Huang
Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2036.67 | V | 51.88 | --- | -4.04 | 47.84 | --- | 74.00 | 54.00 | -6.16 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2213.33 | H | 53.14 | --- | -3.51 | 49.63 | --- | 74.00 | 54.00 | -4.37 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz / CH High

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1660.00 | V | 52.29 | --- | -7.28 | 45.01 | --- | 74.00 | 54.00 | -8.99 | Peak |
| 2193.33 | V | 51.79 | --- | -3.57 | 48.22 | --- | 74.00 | 54.00 | -5.78 | Peak |
| 2440.00 | V | 52.39 | --- | -2.84 | 49.55 | --- | 74.00 | 54.00 | -4.45 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1206.67 | H | 53.41 | --- | -9.25 | 44.17 | --- | 74.00 | 54.00 | -9.83 | Peak |
| 1936.67 | H | 51.84 | --- | -4.73 | 47.10 | --- | 74.00 | 54.00 | -6.90 | Peak |
| 2346.67 | H | 51.86 | --- | -3.12 | 48.74 | --- | 74.00 | 54.00 | -5.26 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz / CH Low

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2056.67 | V | 52.22 | --- | -3.98 | 48.24 | --- | 74.00 | 54.00 | -5.76 | Peak |
| 2270.00 | V | 52.13 | --- | -3.35 | 48.79 | --- | 74.00 | 54.00 | -5.21 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1653.33 | H | 52.64 | --- | -7.35 | 45.29 | --- | 74.00 | 54.00 | -8.71 | Peak |
| 1880.00 | H | 52.19 | --- | -5.26 | 46.93 | --- | 74.00 | 54.00 | -7.07 | Peak |
| 2316.67 | H | 51.67 | --- | -3.21 | 48.46 | --- | 74.00 | 54.00 | -5.54 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz / CH High

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2233.33 | V | 52.68 | --- | -3.45 | 49.23 | --- | 74.00 | 54.00 | -4.77 | Peak |
| 2780.00 | V | 52.21 | --- | -1.84 | 50.37 | --- | 74.00 | 54.00 | -3.63 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2313.33 | H | 51.90 | --- | -3.22 | 48.68 | --- | 74.00 | 54.00 | -5.32 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / **Test Date:** July 27, 2010
CH Low

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1400.00 | V | 54.15 | --- | -8.93 | 45.22 | --- | 74.00 | 54.00 | -8.78 | Peak |
| 2183.33 | V | 52.83 | --- | -3.60 | 49.23 | --- | 74.00 | 54.00 | -4.77 | Peak |
| 2540.00 | V | 51.83 | --- | -2.54 | 49.29 | --- | 74.00 | 54.00 | -4.71 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2246.67 | H | 51.76 | --- | -3.41 | 48.35 | --- | 74.00 | 54.00 | -5.65 | Peak |
| 2536.67 | H | 52.03 | --- | -2.55 | 49.48 | --- | 74.00 | 54.00 | -4.52 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / **Test Date:** July 27, 2010
CH Mid

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1210.00 | V | 53.91 | --- | -9.24 | 44.67 | --- | 74.00 | 54.00 | -9.33 | Peak |
| 2006.67 | V | 52.54 | --- | -4.13 | 48.41 | --- | 74.00 | 54.00 | -5.59 | Peak |
| 2263.33 | V | 52.03 | --- | -3.37 | 48.67 | --- | 74.00 | 54.00 | -5.33 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1750.00 | H | 53.44 | --- | -6.46 | 46.99 | --- | 74.00 | 54.00 | -7.01 | Peak |
| 2436.67 | H | 52.78 | --- | -2.85 | 49.93 | --- | 74.00 | 54.00 | -4.07 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH High **Test Date:** July 27, 2010

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1876.67 | V | 53.37 | --- | -5.29 | 48.08 | --- | 74.00 | 54.00 | -5.92 | Peak |
| 2073.33 | V | 52.51 | --- | -3.93 | 48.57 | --- | 74.00 | 54.00 | -5.43 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1923.33 | H | 52.27 | --- | -4.86 | 47.41 | --- | 74.00 | 54.00 | -6.59 | Peak |
| 2176.67 | H | 52.13 | --- | -3.62 | 48.51 | --- | 74.00 | 54.00 | -5.49 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz / CH Low **Test Date:** July 27, 2010
Temperature: 25°C **Tested by:** Wolf Huang
Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1256.67 | V | 54.81 | --- | -9.16 | 45.65 | --- | 74.00 | 54.00 | -8.35 | Peak |
| 1653.33 | V | 53.29 | --- | -7.35 | 45.95 | --- | 74.00 | 54.00 | -8.05 | Peak |
| 2153.33 | V | 52.75 | --- | -3.69 | 49.06 | --- | 74.00 | 54.00 | -4.94 | Peak |
| 2636.67 | V | 51.16 | --- | -2.26 | 48.90 | --- | 74.00 | 54.00 | -5.10 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| 1313.33 | H | 53.19 | --- | -9.07 | 44.12 | --- | 74.00 | 54.00 | -9.88 | Peak |
| 2180.00 | H | 52.11 | --- | -3.61 | 48.50 | --- | 74.00 | 54.00 | -5.50 | Peak |
| 2753.33 | H | 51.08 | --- | -1.92 | 49.16 | --- | 74.00 | 54.00 | -4.84 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz / CH Mid **Test Date:** July 27, 2010

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1413.33 | V | 52.57 | --- | -8.90 | 43.67 | --- | 74.00 | 54.00 | -10.33 | Peak |
| 1980.00 | V | 52.43 | --- | -4.33 | 48.10 | --- | 74.00 | 54.00 | -5.90 | Peak |
| 2606.67 | V | 51.36 | --- | -2.35 | 49.01 | --- | 74.00 | 54.00 | -4.99 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1126.67 | H | 54.43 | --- | -9.38 | 45.05 | --- | 74.00 | 54.00 | -8.95 | Peak |
| 2296.67 | H | 51.90 | --- | -3.27 | 48.64 | --- | 74.00 | 54.00 | -5.36 | Peak |
| 2393.33 | H | 52.32 | --- | -2.98 | 49.34 | --- | 74.00 | 54.00 | -4.66 | Peak |
| 2790.00 | H | 51.39 | --- | -1.81 | 49.58 | --- | 74.00 | 54.00 | -4.42 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz / CH High

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1303.33 | V | 52.98 | --- | -9.09 | 43.89 | --- | 74.00 | 54.00 | -10.11 | Peak |
| 1770.00 | V | 52.94 | --- | -6.27 | 46.67 | --- | 74.00 | 54.00 | -7.33 | Peak |
| 2536.67 | V | 51.91 | --- | -2.55 | 49.36 | --- | 74.00 | 54.00 | -4.64 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1226.67 | H | 53.74 | --- | -9.21 | 44.53 | --- | 74.00 | 54.00 | -9.47 | Peak |
| 1510.00 | H | 54.35 | --- | -8.67 | 45.68 | --- | 74.00 | 54.00 | -8.32 | Peak |
| 2330.00 | H | 51.79 | --- | -3.17 | 48.62 | --- | 74.00 | 54.00 | -5.38 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz / CH Low

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2023.33 | V | 52.41 | --- | -4.08 | 48.33 | --- | 74.00 | 54.00 | -5.67 | Peak |
| 2553.33 | V | 51.54 | --- | -2.50 | 49.04 | --- | 74.00 | 54.00 | -4.96 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1740.00 | H | 52.24 | --- | -6.55 | 45.69 | --- | 74.00 | 54.00 | -8.31 | Peak |
| 2053.33 | H | 52.48 | --- | -3.99 | 48.49 | --- | 74.00 | 54.00 | -5.51 | Peak |
| 2410.00 | H | 51.59 | --- | -2.93 | 48.66 | --- | 74.00 | 54.00 | -5.34 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz / CH High

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2023.33 | V | 51.79 | --- | -4.08 | 47.71 | --- | 74.00 | 54.00 | -6.29 | Peak |
| 2363.33 | V | 51.94 | --- | -3.07 | 48.88 | --- | 74.00 | 54.00 | -5.12 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1836.67 | H | 52.85 | --- | -5.66 | 47.19 | --- | 74.00 | 54.00 | -6.81 | Peak |
| 2010.00 | H | 52.01 | --- | -4.12 | 47.89 | --- | 74.00 | 54.00 | -6.11 | Peak |
| 2636.67 | H | 50.95 | --- | -2.26 | 48.69 | --- | 74.00 | 54.00 | -5.31 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / CH Low **Test Date:** July 27, 2010

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1430.00 | V | 53.41 | --- | -8.88 | 44.53 | --- | 74.00 | 54.00 | -9.47 | Peak |
| 2070.00 | V | 52.43 | --- | -3.94 | 48.49 | --- | 74.00 | 54.00 | -5.51 | Peak |
| 2650.00 | V | 51.71 | --- | -2.22 | 49.49 | --- | 74.00 | 54.00 | -4.51 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1910.00 | H | 53.08 | --- | -4.98 | 48.10 | --- | 74.00 | 54.00 | -5.90 | Peak |
| 2296.67 | H | 52.47 | --- | -3.27 | 49.21 | --- | 74.00 | 54.00 | -4.79 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz **Test Date:** July 27, 2010
/CH Mid

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2036.67 | V | 52.49 | --- | -4.04 | 48.45 | --- | 74.00 | 54.00 | -5.55 | Peak |
| 2743.33 | V | 51.12 | --- | -1.95 | 49.17 | --- | 74.00 | 54.00 | -4.83 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1786.67 | H | 52.70 | --- | -6.12 | 46.58 | --- | 74.00 | 54.00 | -7.42 | Peak |
| 2203.33 | H | 52.27 | --- | -3.54 | 48.72 | --- | 74.00 | 54.00 | -5.28 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / **Test Date:** July 27, 2010
CH High

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1806.67 | V | 52.98 | --- | -5.93 | 47.04 | --- | 74.00 | 54.00 | -6.96 | Peak |
| 2690.00 | V | 51.11 | --- | -2.11 | 49.01 | --- | 74.00 | 54.00 | -4.99 | Peak |
| 11400.00 | V | 45.58 | 32.12 | 16.44 | 62.02 | 48.56 | 74.00 | 54.00 | -5.44 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1826.67 | H | 52.34 | --- | -5.75 | 46.59 | --- | 74.00 | 54.00 | -7.41 | Peak |
| 2350.00 | H | 52.13 | --- | -3.11 | 49.02 | --- | 74.00 | 54.00 | -4.98 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz / CH Low **Test Date:** July 27, 2010
Temperature: 25°C **Tested by:** Wolf Huang
Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1463.33 | V | 53.43 | --- | -8.82 | 44.61 | --- | 74.00 | 54.00 | -9.39 | Peak |
| 1893.33 | V | 52.63 | --- | -5.13 | 47.50 | --- | 74.00 | 54.00 | -6.50 | Peak |
| 2260.00 | V | 51.84 | --- | -3.38 | 48.47 | --- | 74.00 | 54.00 | -5.53 | Peak |
| 11000.00 | V | 42.40 | 30.37 | 15.72 | 58.12 | 46.09 | 74.00 | 54.00 | -7.91 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| 2213.33 | H | 52.29 | --- | -3.51 | 48.78 | --- | 74.00 | 54.00 | -5.22 | Peak |
| 2686.67 | H | 51.31 | --- | -2.11 | 49.20 | --- | 74.00 | 54.00 | -4.80 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz / CH Mid **Test Date:** July 27, 2010

Temperature: 25°C **Tested by:** Wolf Huang

Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1723.33 | V | 53.33 | --- | -6.70 | 46.63 | --- | 74.00 | 54.00 | -7.37 | Peak |
| 2050.00 | V | 52.08 | --- | -4.00 | 48.08 | --- | 74.00 | 54.00 | -5.92 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2303.33 | H | 51.33 | --- | -3.25 | 48.08 | --- | 74.00 | 54.00 | -5.92 | Peak |
| 2540.00 | H | 51.43 | --- | -2.54 | 48.89 | --- | 74.00 | 54.00 | -5.11 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz / CH High **Test Date:** July 27, 2010
Temperature: 25°C **Tested by:** Wolf Huang
Humidity: 50% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1856.67 | V | 52.49 | --- | -5.47 | 47.02 | --- | 74.00 | 54.00 | -6.98 | Peak |
| 2496.67 | V | 51.42 | --- | -2.67 | 48.75 | --- | 74.00 | 54.00 | -5.25 | Peak |
| 11400.00 | V | 42.02 | 30.69 | 16.44 | 58.46 | 47.13 | 74.00 | 54.00 | -6.87 | AVG |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1360.00 | H | 53.53 | --- | -8.99 | 44.54 | --- | 74.00 | 54.00 | -9.46 | Peak |
| 2053.33 | H | 52.27 | --- | -3.99 | 48.28 | --- | 74.00 | 54.00 | -5.72 | Peak |
| 2243.33 | H | 51.96 | --- | -3.42 | 48.54 | --- | 74.00 | 54.00 | -5.46 | Peak |
| 11450.00 | H | 41.43 | 29.16 | 16.53 | 57.96 | 45.69 | 74.00 | 54.00 | -8.31 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz / CH Low

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1873.33 | V | 52.37 | --- | -5.32 | 47.05 | --- | 74.00 | 54.00 | -6.95 | Peak |
| 2606.67 | V | 51.42 | --- | -2.35 | 49.07 | --- | 74.00 | 54.00 | -4.93 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1856.67 | H | 52.79 | --- | -5.47 | 47.32 | --- | 74.00 | 54.00 | -6.68 | Peak |
| 2516.67 | H | 51.90 | --- | -2.61 | 49.29 | --- | 74.00 | 54.00 | -4.71 | Peak |
| 2656.67 | H | 51.66 | --- | -2.20 | 49.45 | --- | 74.00 | 54.00 | -4.55 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz / CH Mid

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 2023.33 | V | 51.67 | --- | -4.08 | 47.59 | --- | 74.00 | 54.00 | -6.41 | Peak |
| 2523.33 | V | 51.24 | --- | -2.59 | 48.65 | --- | 74.00 | 54.00 | -5.35 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 1860.00 | H | 52.20 | --- | -5.44 | 46.76 | --- | 74.00 | 54.00 | -7.24 | Peak |
| 2620.00 | H | 51.46 | --- | -2.31 | 49.15 | --- | 74.00 | 54.00 | -4.85 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz / CH High

Test Date: July 27, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 52.84 | --- | -4.21 | 48.63 | --- | 74.00 | 54.00 | -5.37 | Peak |
| 2250.00 | V | 51.94 | --- | -3.41 | 48.54 | --- | 74.00 | 54.00 | -5.46 | Peak |
| 11333.33 | V | 44.95 | 31.43 | 16.32 | 61.27 | 47.75 | 74.00 | 54.00 | -6.25 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 2040.00 | H | 51.95 | --- | -4.03 | 47.91 | --- | 74.00 | 54.00 | -6.09 | Peak |
| 2386.67 | H | 51.92 | --- | -3.00 | 48.92 | --- | 74.00 | 54.00 | -5.08 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 CONDUCTED UNDESIRABLE EMISSION


LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

The provisions of §15.205 apply to intentional radiators operating under this section.

Test Configuration



TEST PROCEDURE

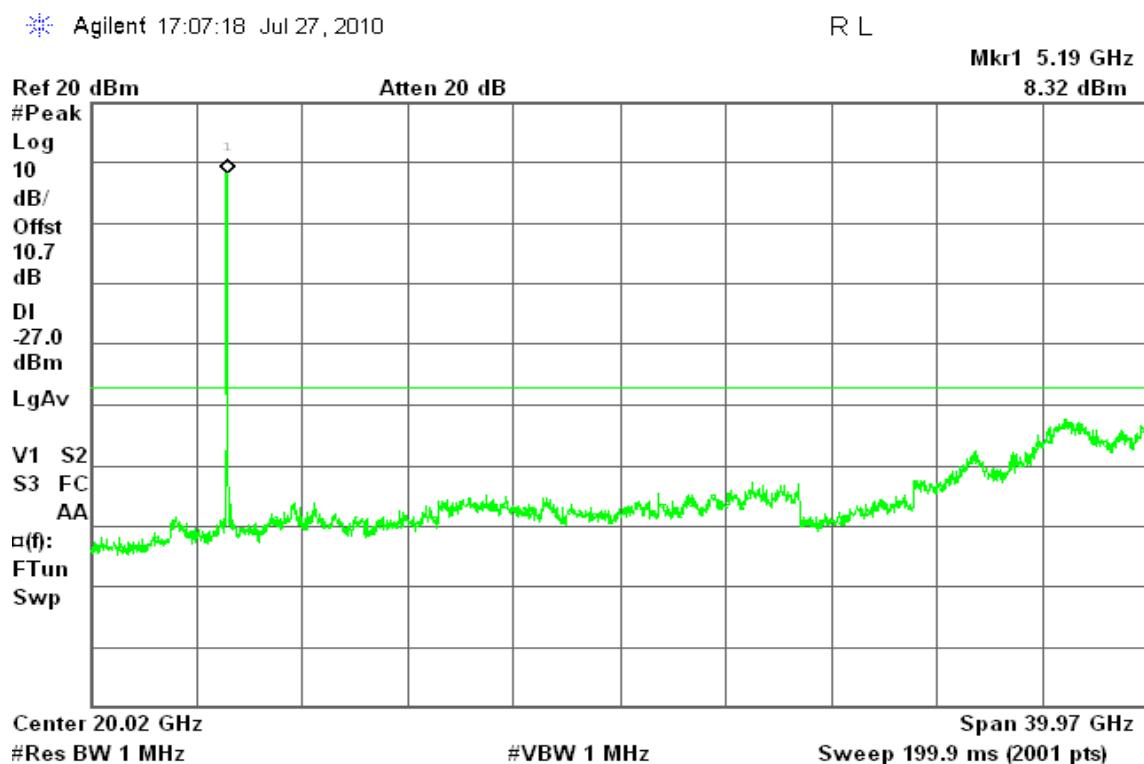
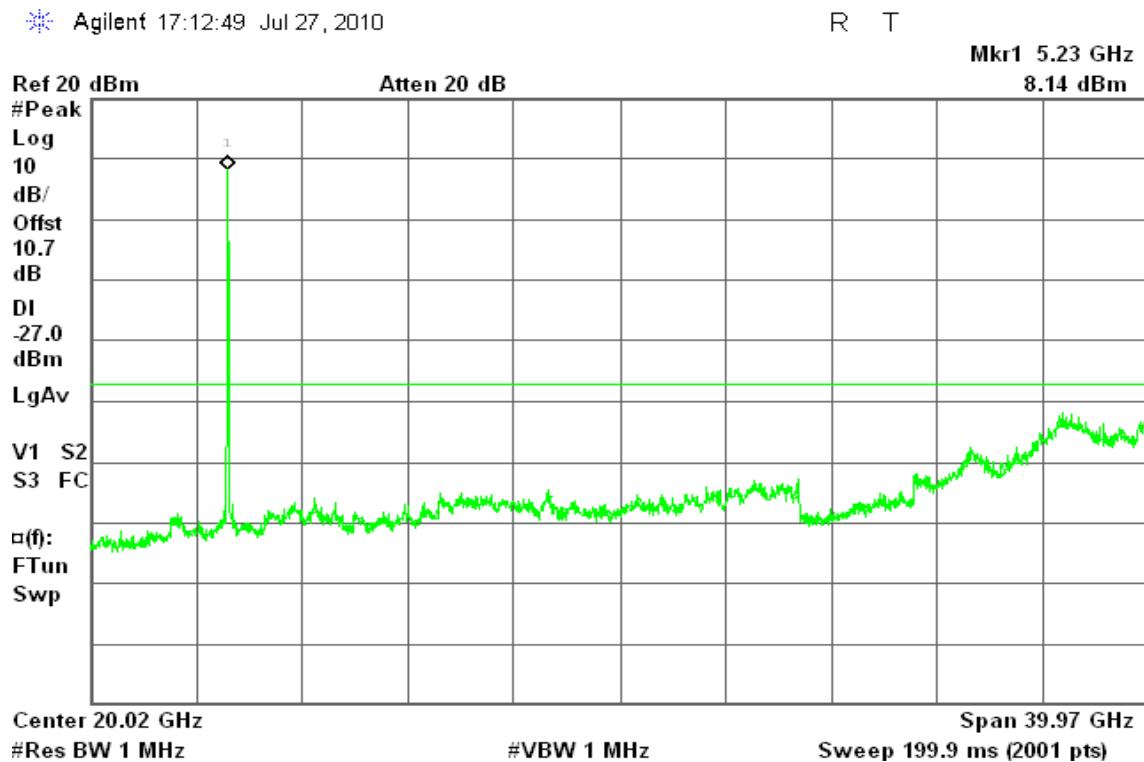
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

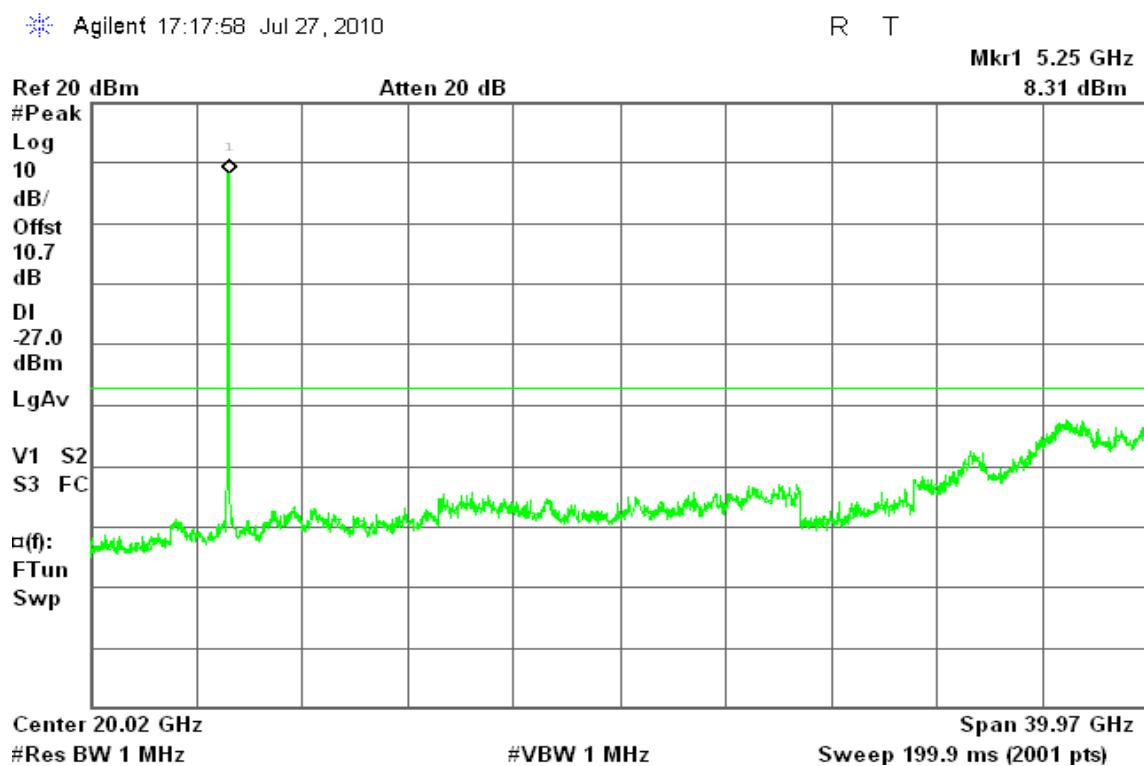
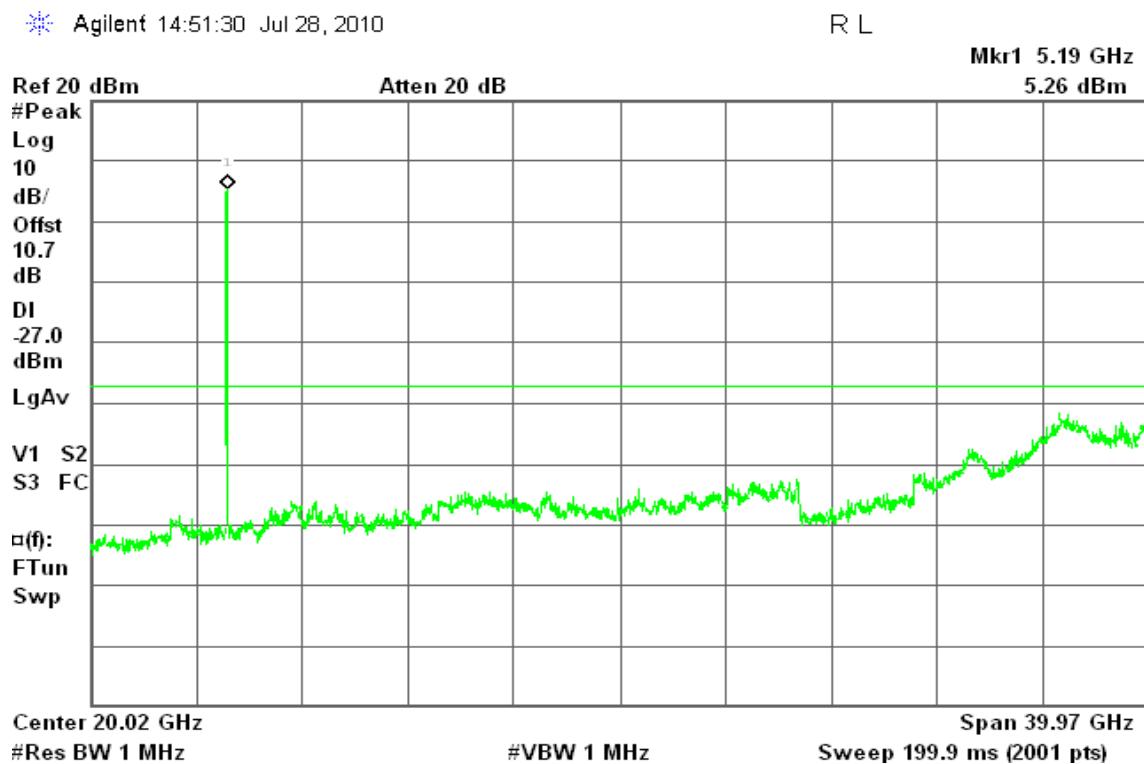
The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

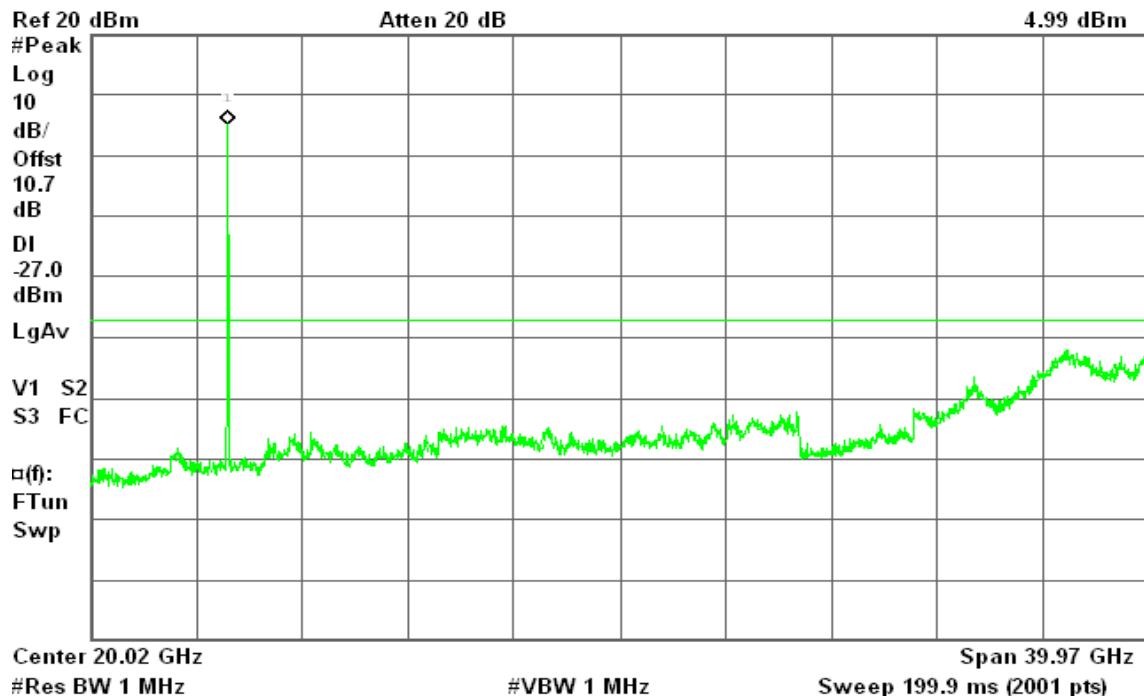
**Test Plot****IEEE 802.11a mode / 5180 ~ 5240MHz****CH Low****30MHz ~ 40GHz****CH Mid****30MHz ~ 40GHz**

**CH High****30MHz ~ 40GHz****draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz****CH Low****30MHz ~ 40GHz**

**CH Mid****30MHz ~ 40GHz**

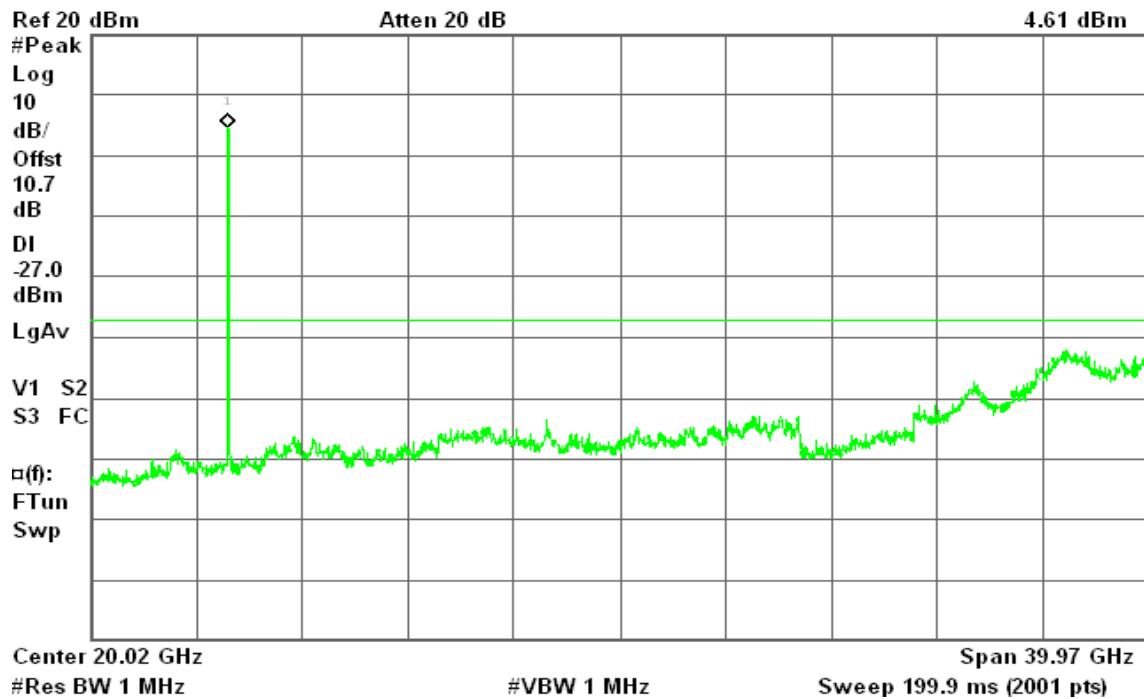
Agilent 14:53:33 Jul 28, 2010

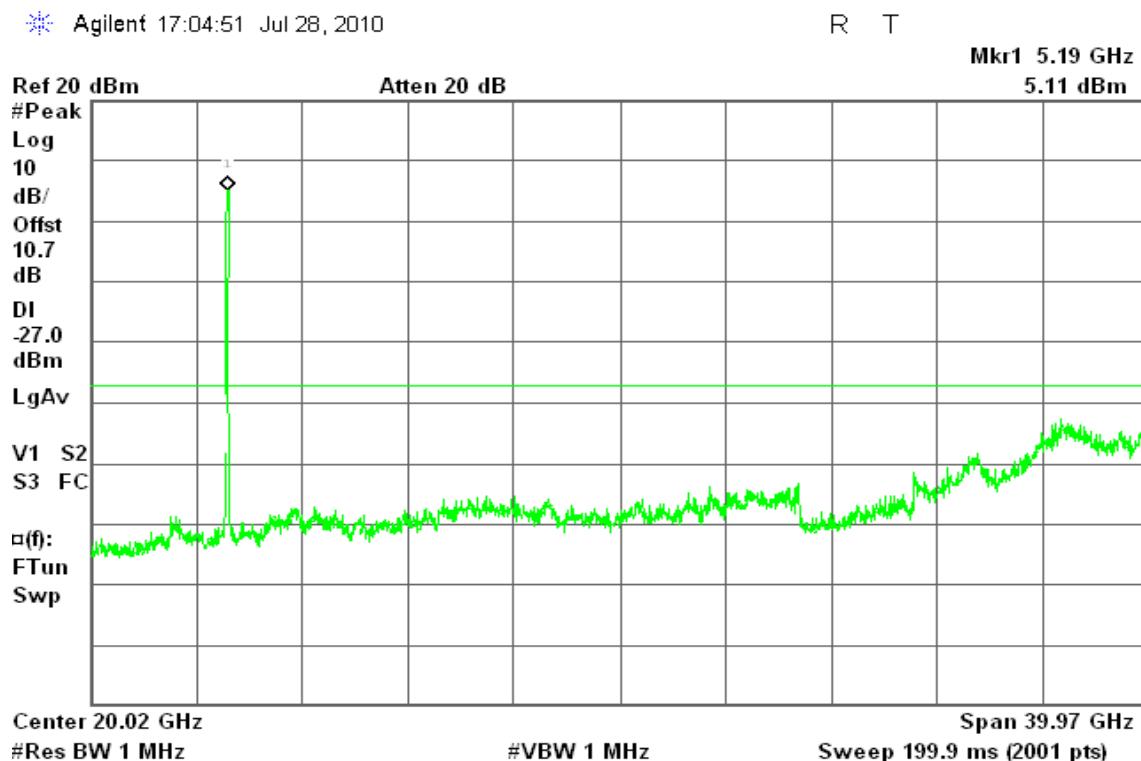
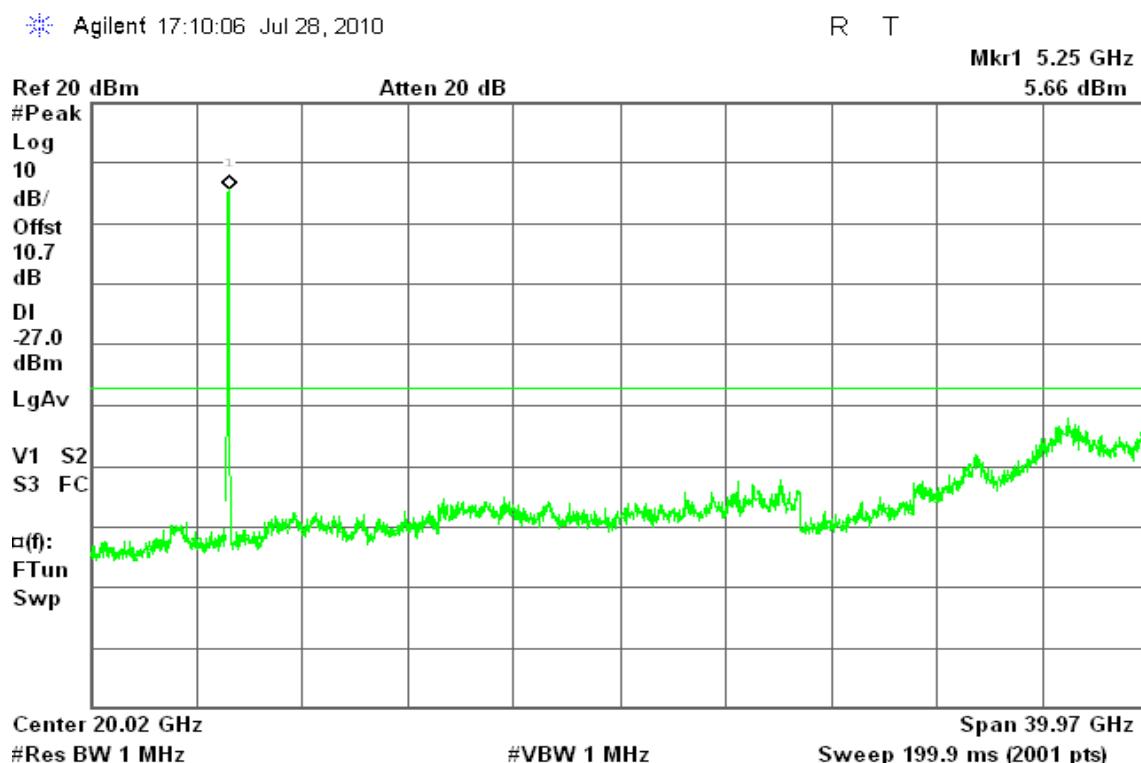
R T

Mkr1 5.23 GHz
4.99 dBm**CH High****30MHz ~ 40GHz**

Agilent 14:37:40 Jul 28, 2010

R T

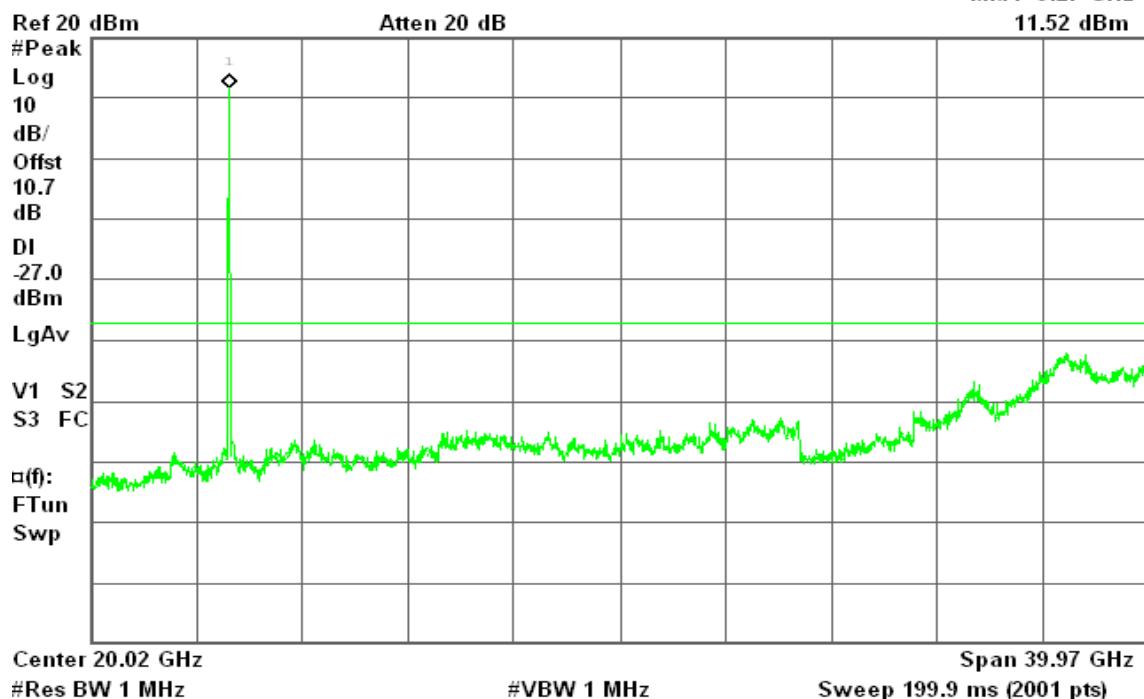
Mkr1 5.23 GHz
4.61 dBm

**draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz****CH Low****30MHz ~ 40GHz****CH High****30MHz ~ 40GHz**

**IEEE 802.11a mode / 5260 ~ 5320MHz****CH Low****30MHz ~ 40GHz**

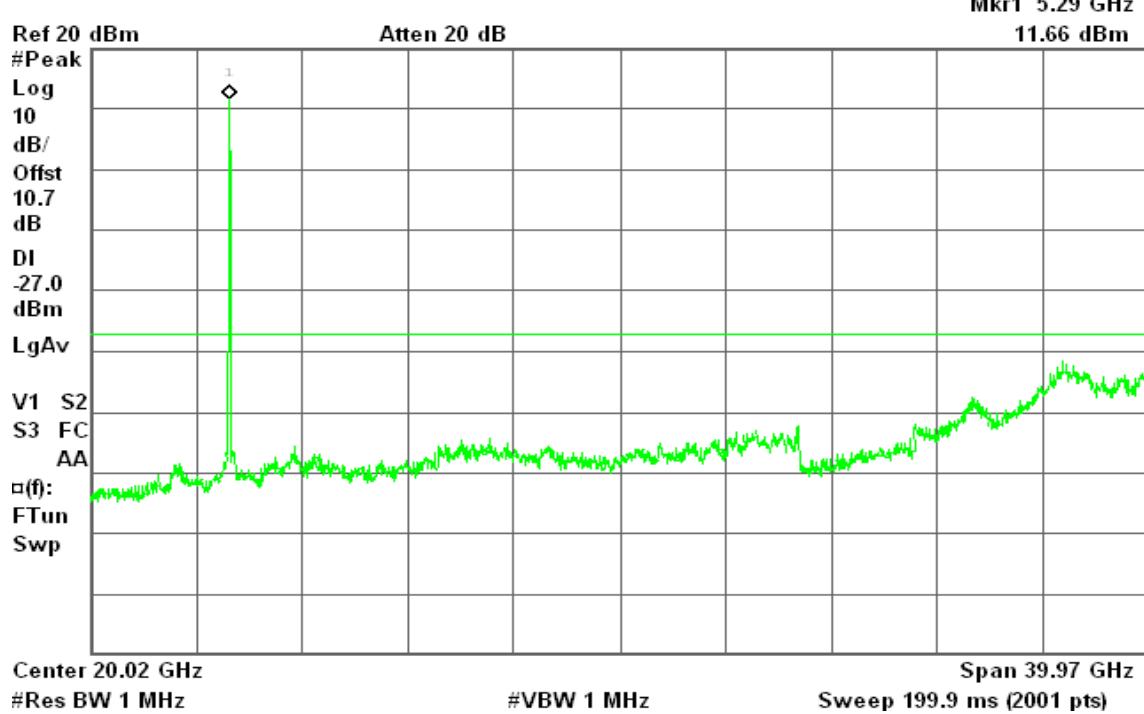
Agilent 10:48:17 Jul 28, 2010

R T

Mkr1 5.27 GHz
11.52 dBm**CH Mid****30MHz ~ 40GHz**

Agilent 10:43:10 Jul 28, 2010

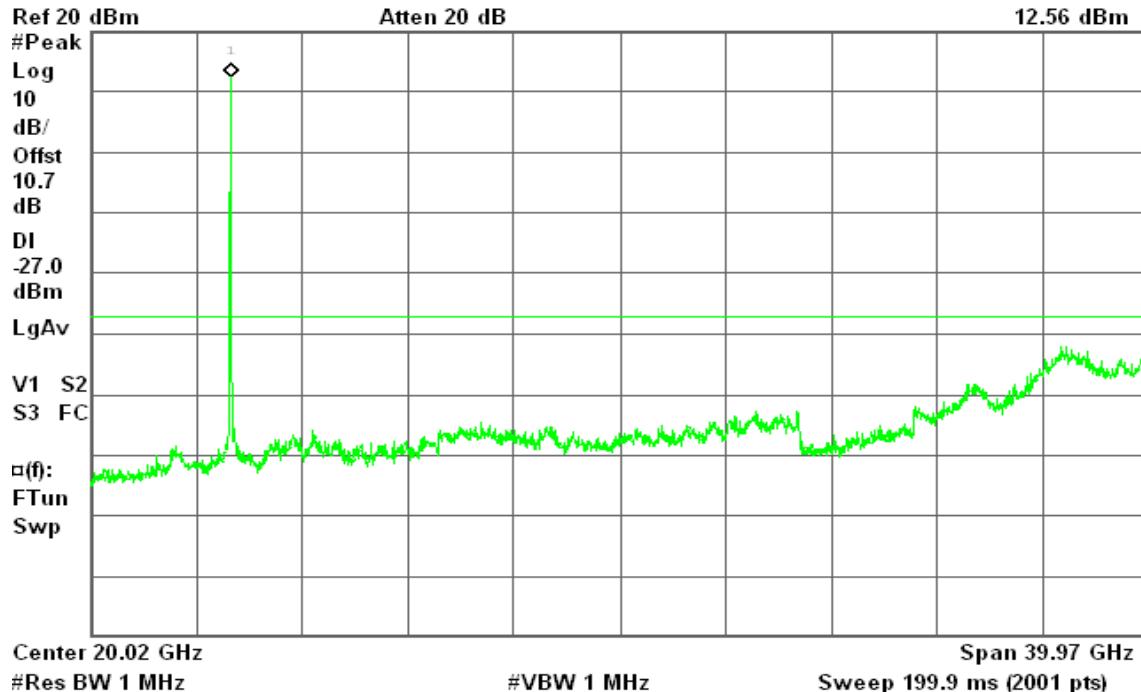
R T

Mkr1 5.29 GHz
11.66 dBm

**CH High****30MHz ~ 40GHz**

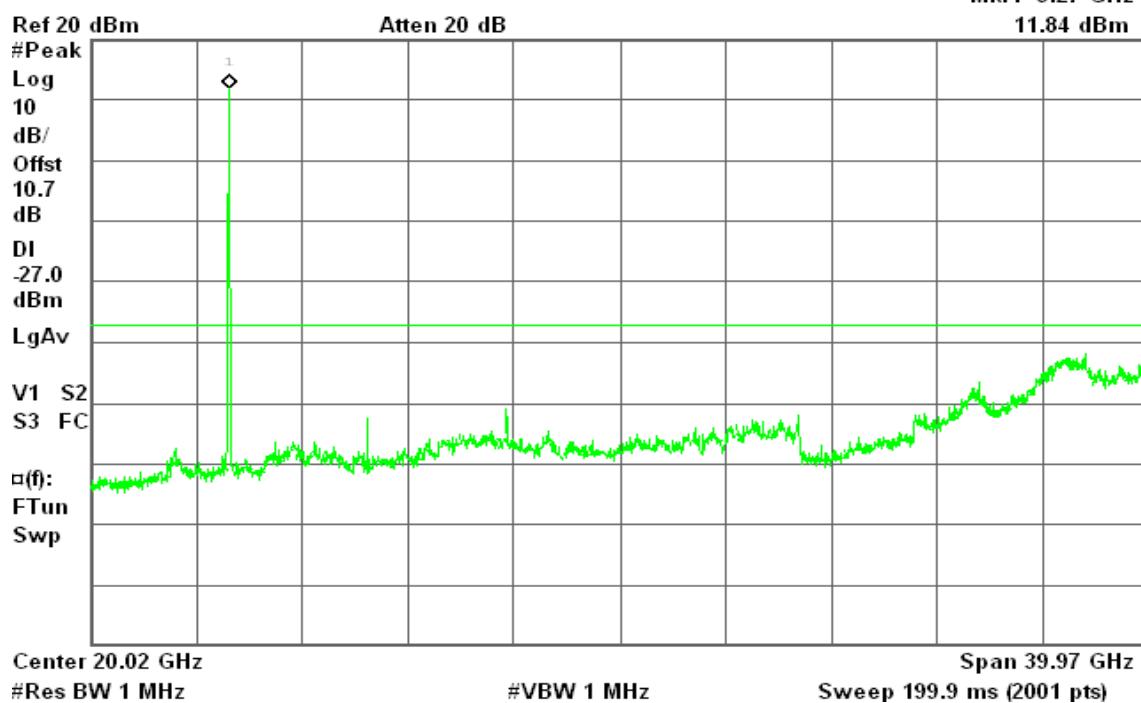
Agilent 10:54:42 Jul 28, 2010

R T

Mkr1 5.33 GHz
12.56 dBm**draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz****CH Low****30MHz ~ 40GHz**

Agilent 14:59:24 Jul 28, 2010

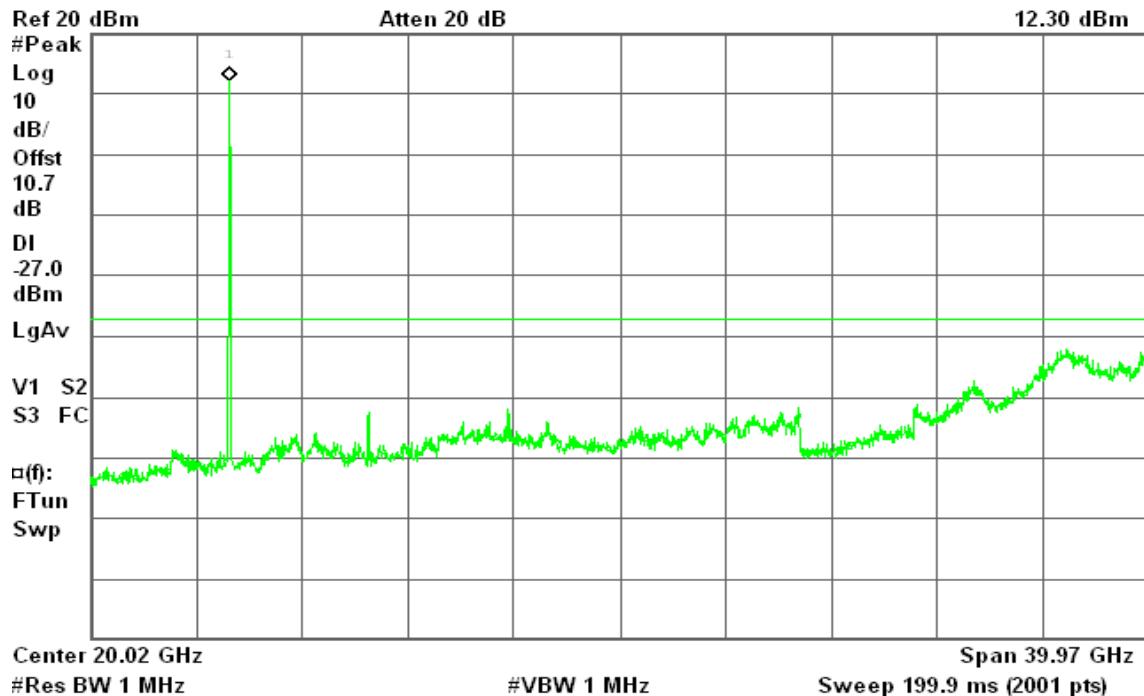
R T

Mkr1 5.27 GHz
11.84 dBm

**CH Mid****30MHz ~ 40GHz**

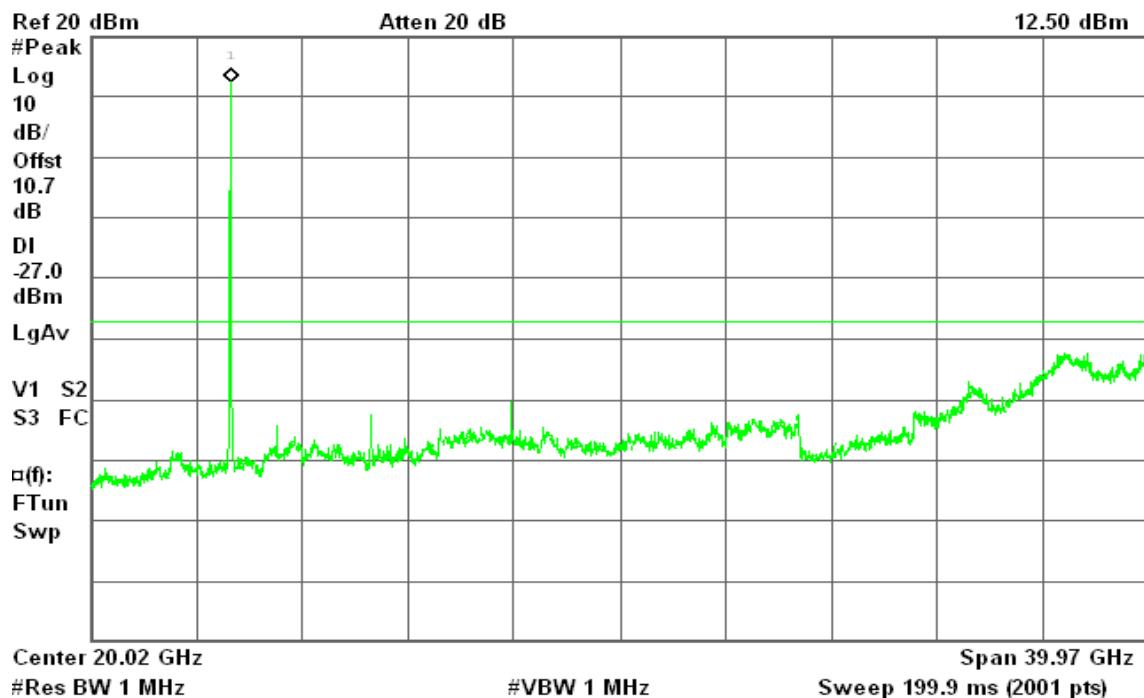
Agilent 15:02:56 Jul 28, 2010

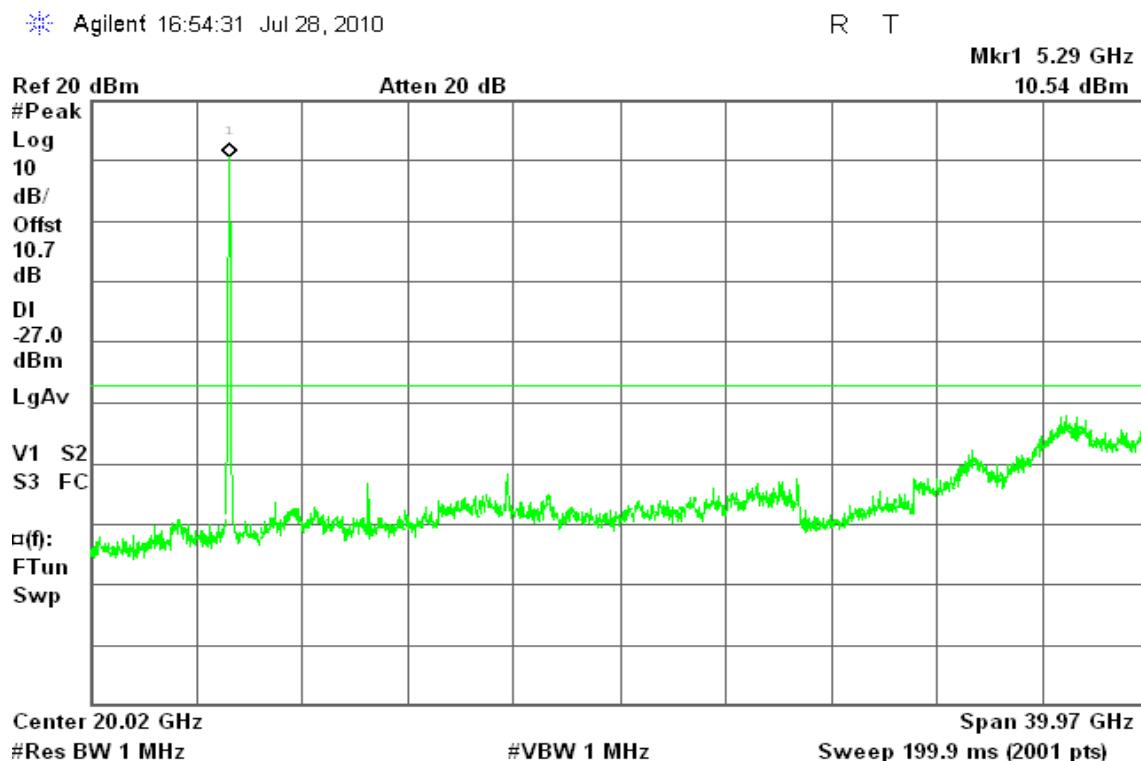
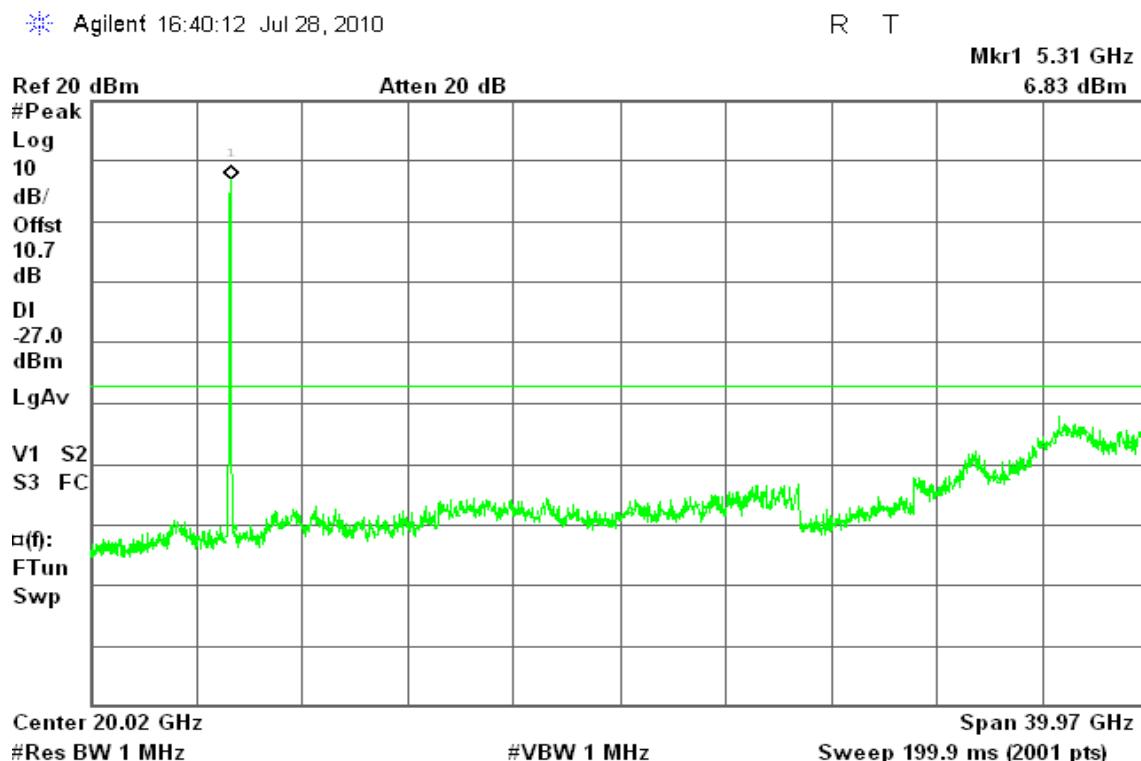
R T

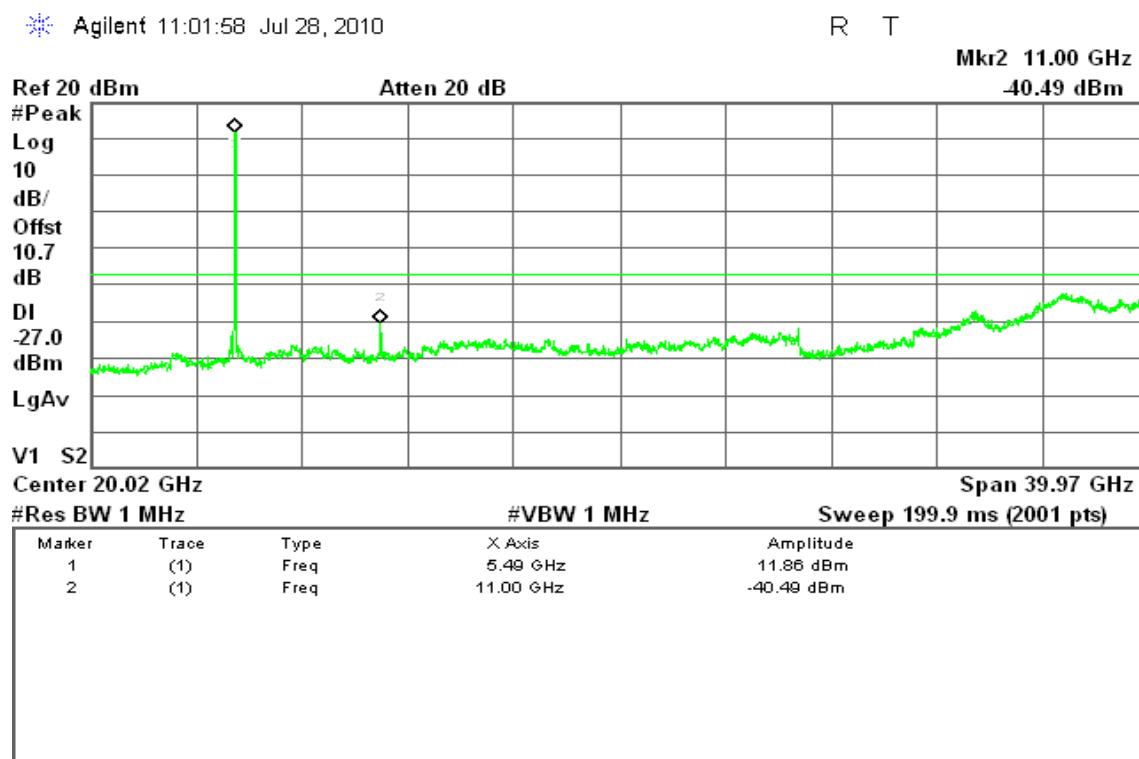
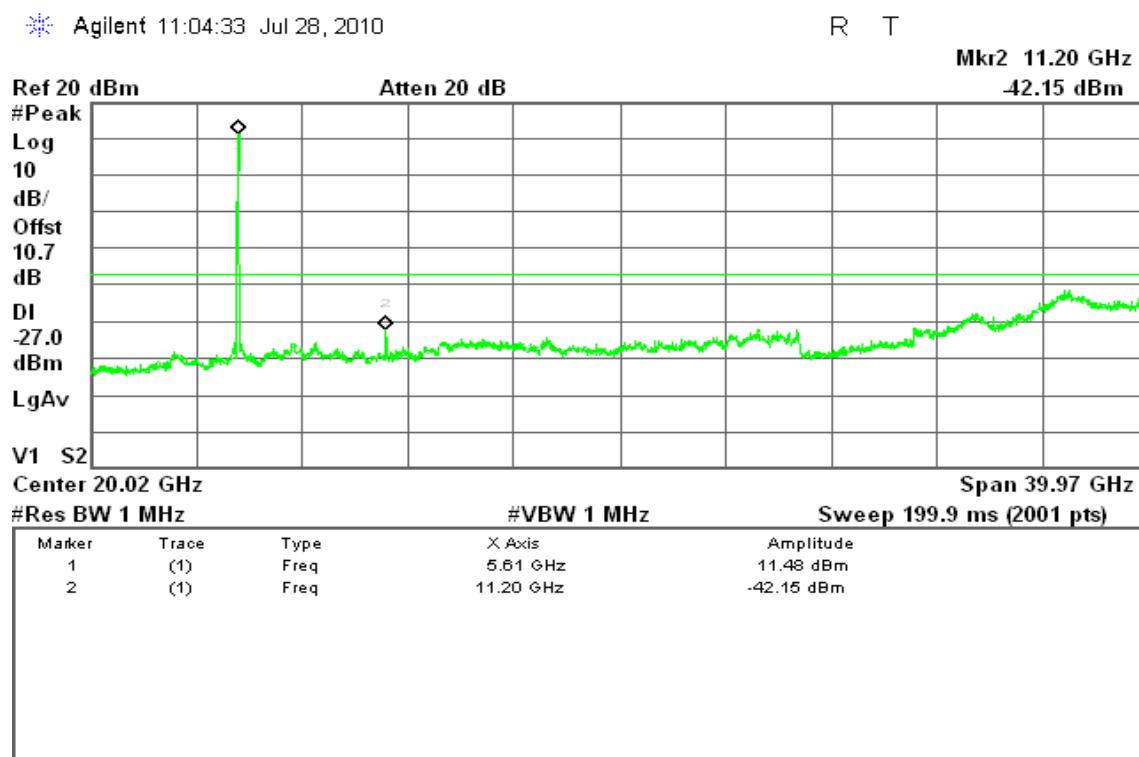
Mkr1 5.29 GHz
12.30 dBm**CH High****30MHz ~ 40GHz**

Agilent 15:05:01 Jul 28, 2010

R T

Mkr1 5.31 GHz
12.50 dBm

**draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz****CH Low****30MHz ~ 40GHz****CH High****30MHz ~ 40GHz**

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz****CH Low****30MHz ~ 40GHz****CH Mid****30MHz ~ 40GHz**

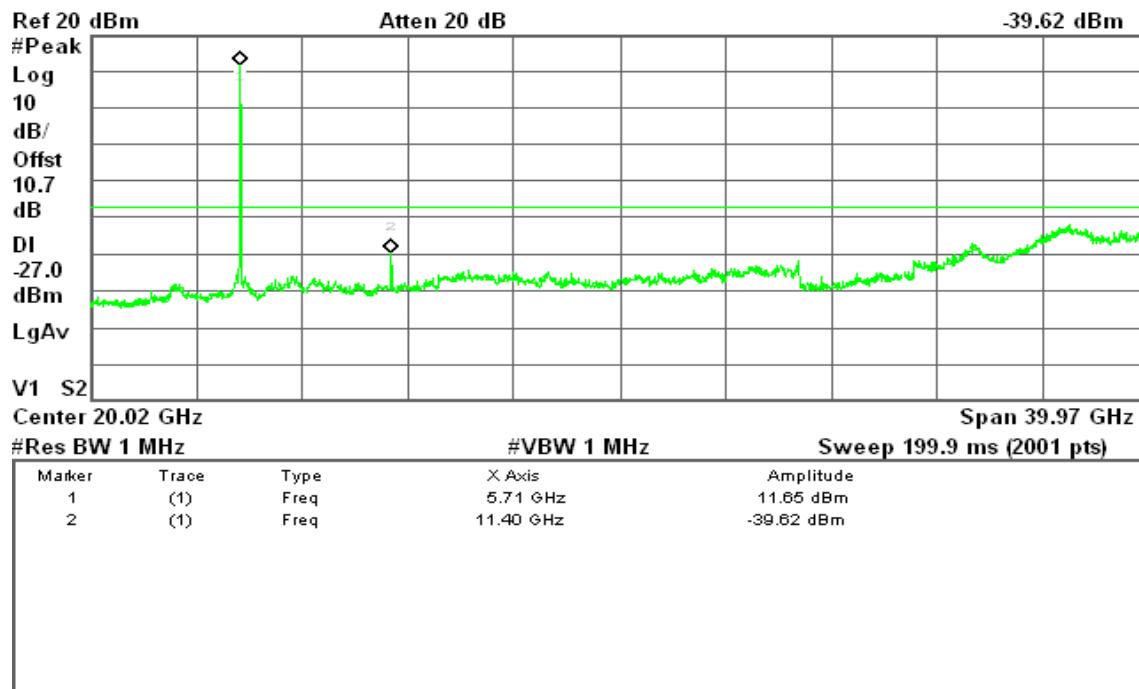
**CH High****30MHz ~ 40GHz**

Agilent 11:07:23 Jul 28, 2010

R L

Mkr2 11.40 GHz

-39.62 dBm

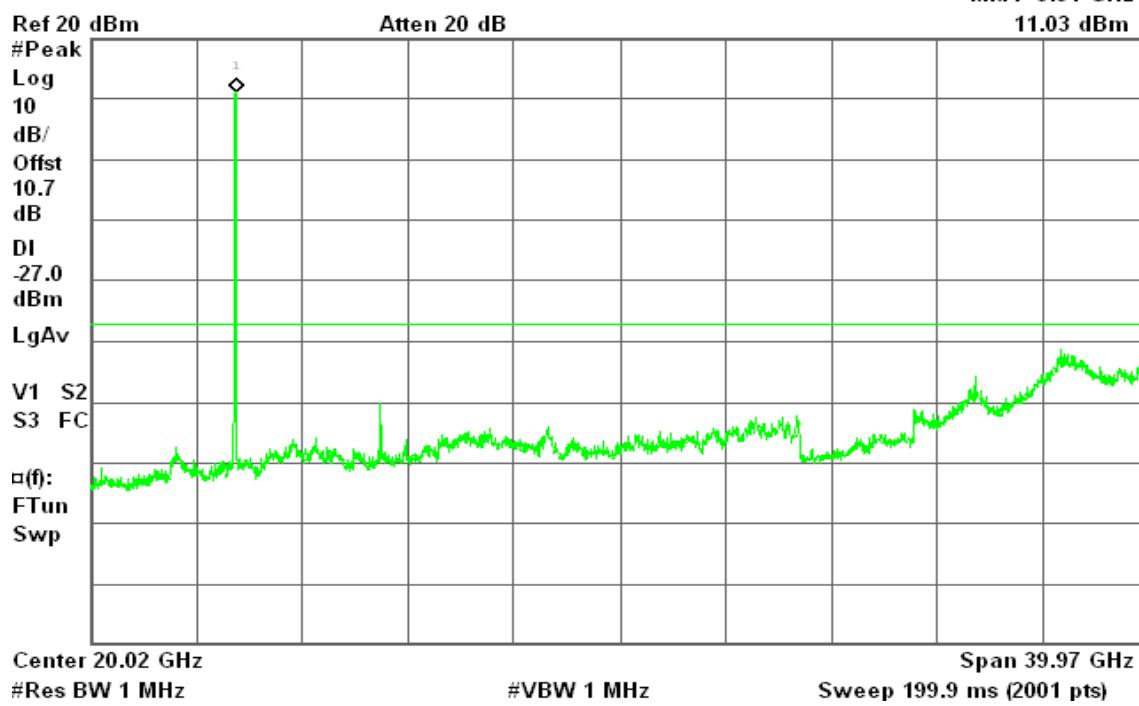
**draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz****CH Low****30MHz ~ 40GHz**

Agilent 15:09:44 Jul 28, 2010

R T

Mkr1 5.51 GHz

11.03 dBm



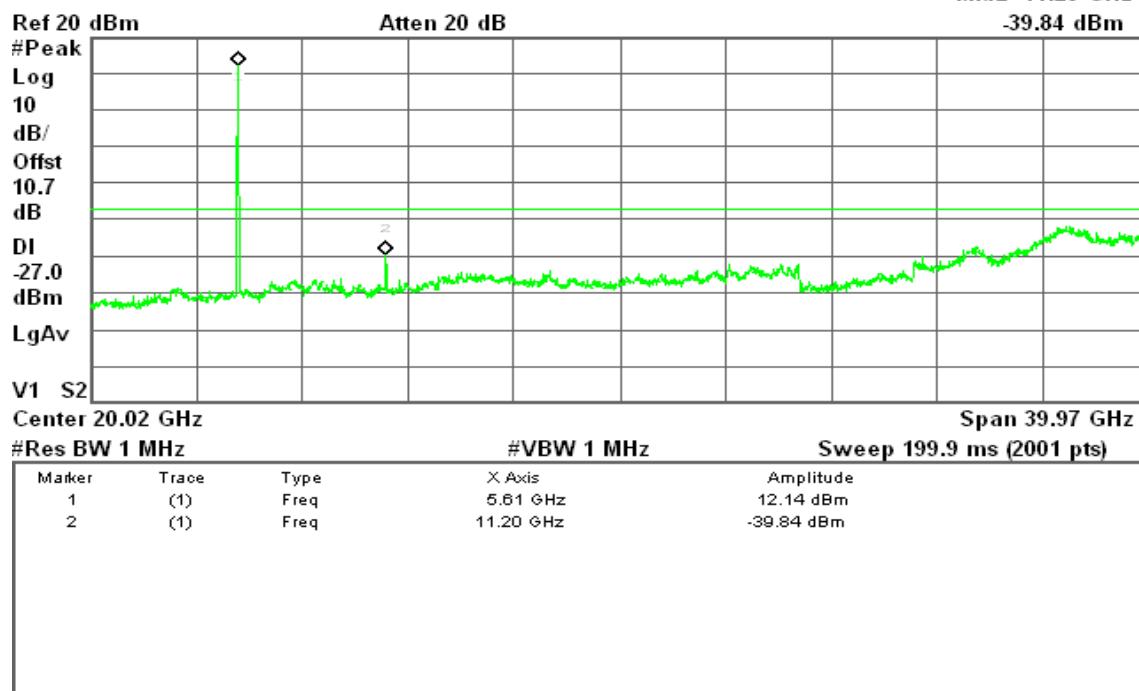
**CH Mid****30MHz ~ 40GHz**

Agilent 15:12:44 Jul 28, 2010

R T

Mkr2 11.20 GHz

-39.84 dBm

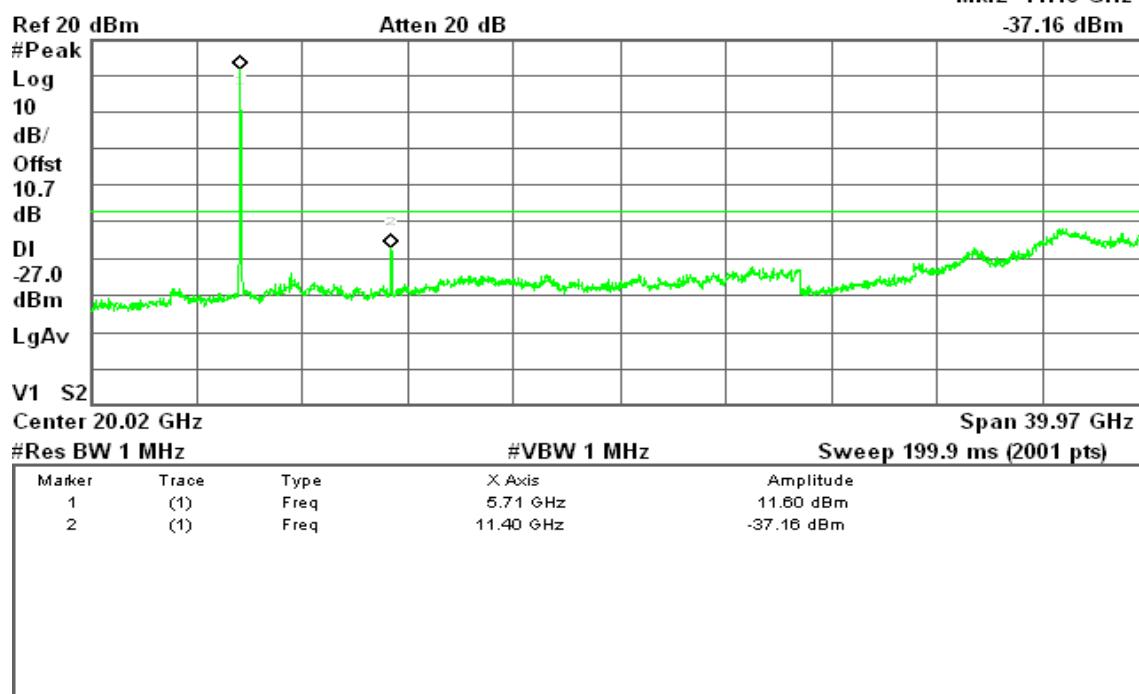
**CH High****30MHz ~ 40GHz**

Agilent 15:15:29 Jul 28, 2010

R T

Mkr2 11.40 GHz

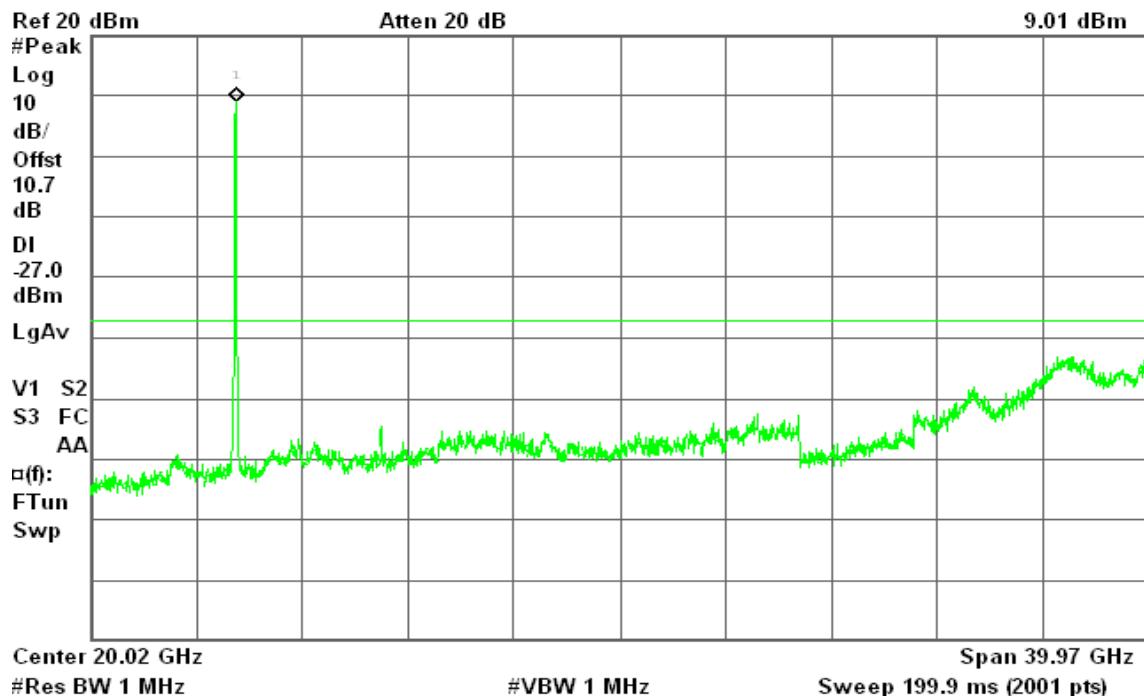
-37.16 dBm



**draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz****CH Low****30MHz ~ 40GHz**

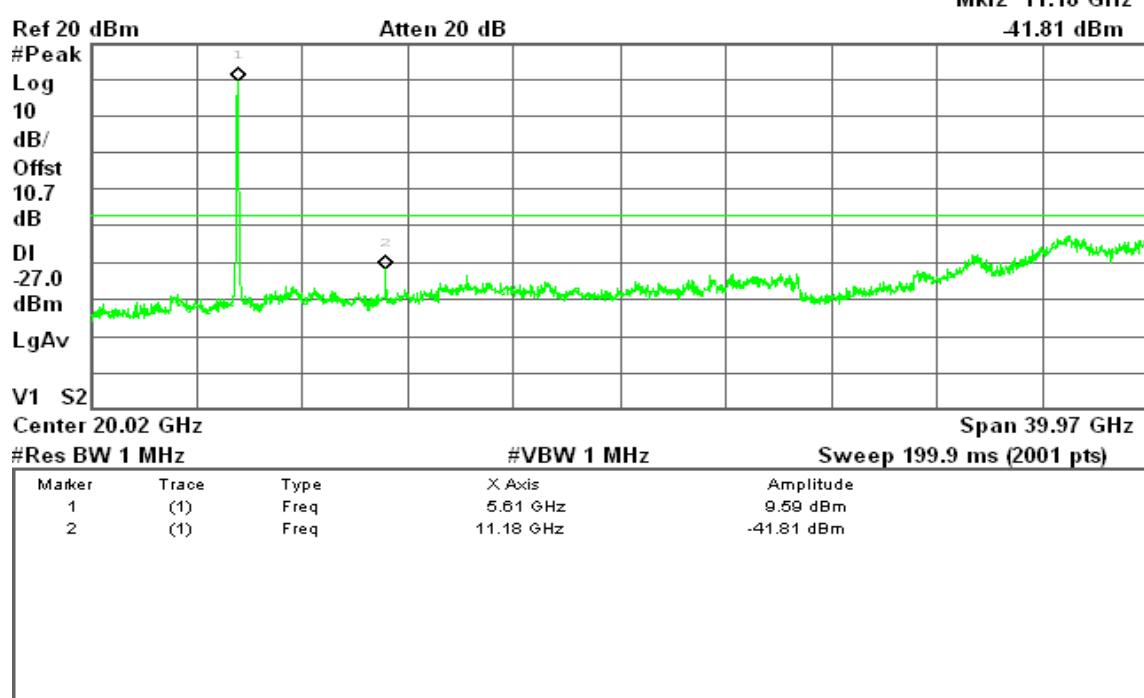
Agilent 17:22:20 Jul 28, 2010

R T

Mkr1 5.51 GHz
9.01 dBm**CH Mid****30MHz ~ 40GHz**

Agilent 17:25:01 Jul 28, 2010

R T

Mkr2 11.18 GHz
-41.81 dBm



CH High

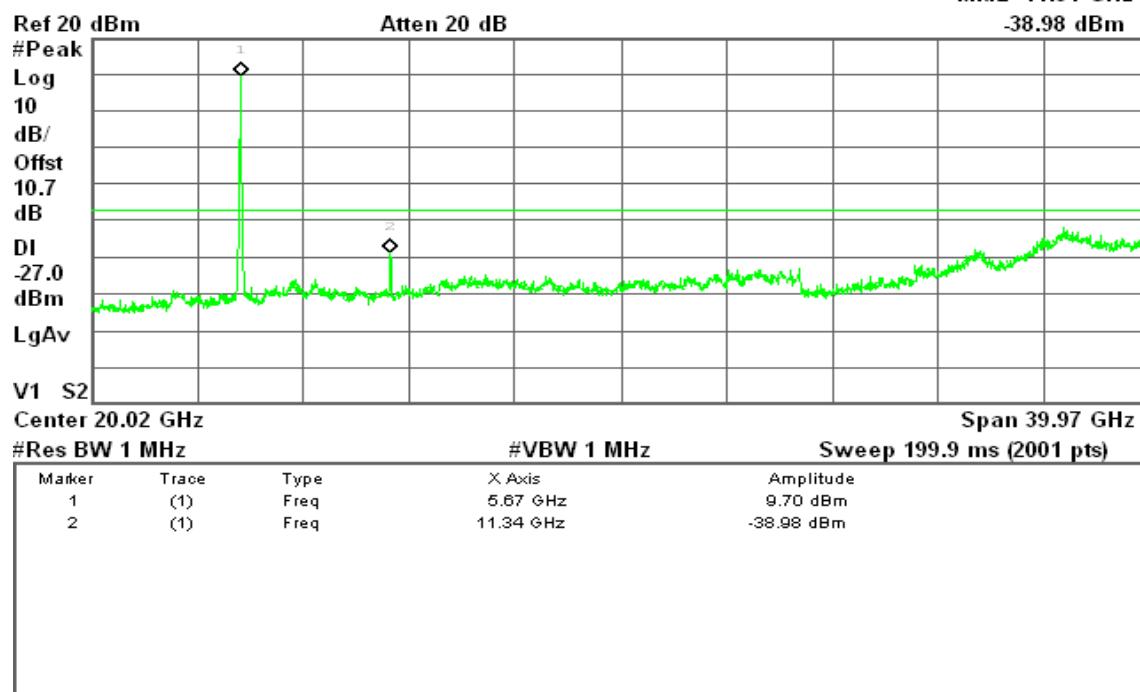
30MHz ~ 40GHz

Agilent 17:27:05 Jul 28, 2010

R T

Mkr2 11.34 GHz

-38.98 dBm





7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB μ V) | |
|--------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

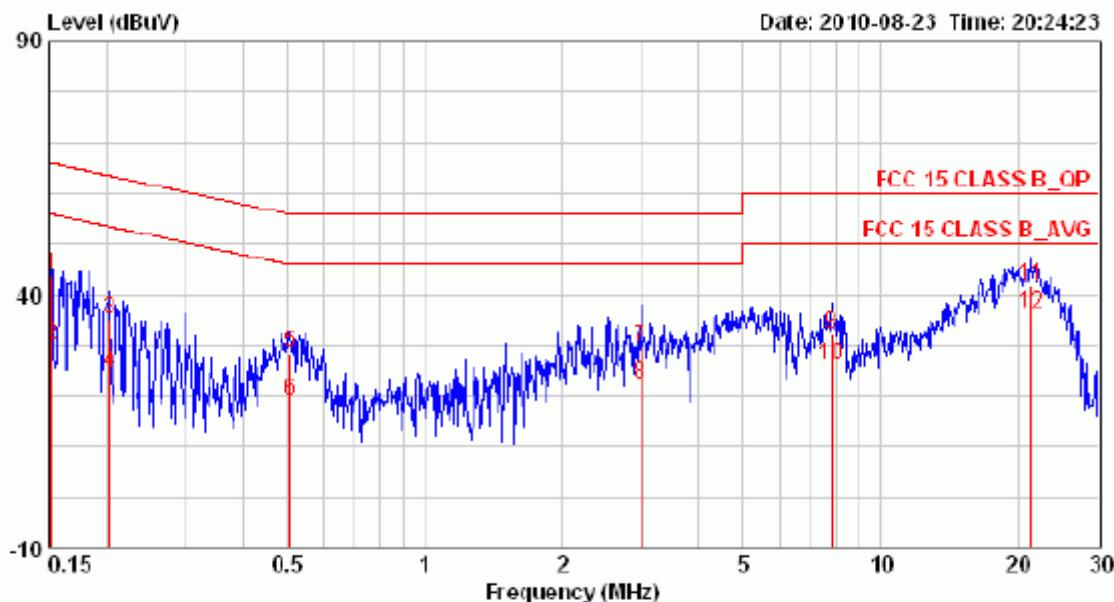
See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data****Operation Mode:** Normal Link**Test Date:** August 23, 2010**Temperature:** 19°C**Tested by:** Vic Lin**Humidity:** 66% RH**Line:** L1

| Freq. MHz | Corr. Factor dB | Reading Value dBuV | | Emission Level dBuV | | Limit dBuV | | Margin dB | |
|--------------|-----------------------|-----------------------|-------|------------------------|-------|---------------|-------|--------------|--------|
| | | Q.P. | Ave. | Q.P. | Ave. | Q.P. | Ave. | Q.P. | Ave. |
| 0.152 | 0.05 | 43.04 | 29.90 | 43.09 | 29.95 | 65.91 | 55.91 | -22.02 | -25.96 |
| 0.203 | 0.06 | 34.96 | 24.26 | 35.02 | 24.32 | 63.49 | 53.49 | -26.47 | -29.17 |
| 0.507 | 0.06 | 28.34 | 18.70 | 28.40 | 18.76 | 56.00 | 46.00 | -27.60 | -27.24 |
| 2.978 | 0.16 | 29.54 | 22.02 | 29.70 | 22.18 | 56.00 | 46.00 | -26.30 | -23.82 |
| 7.810 | 0.29 | 31.83 | 25.77 | 32.12 | 26.06 | 60.00 | 50.00 | -27.88 | -23.94 |
| 21.373 | 0.53 | 41.18 | 35.60 | 41.71 | 36.13 | 60.00 | 50.00 | -18.29 | -13.87 |

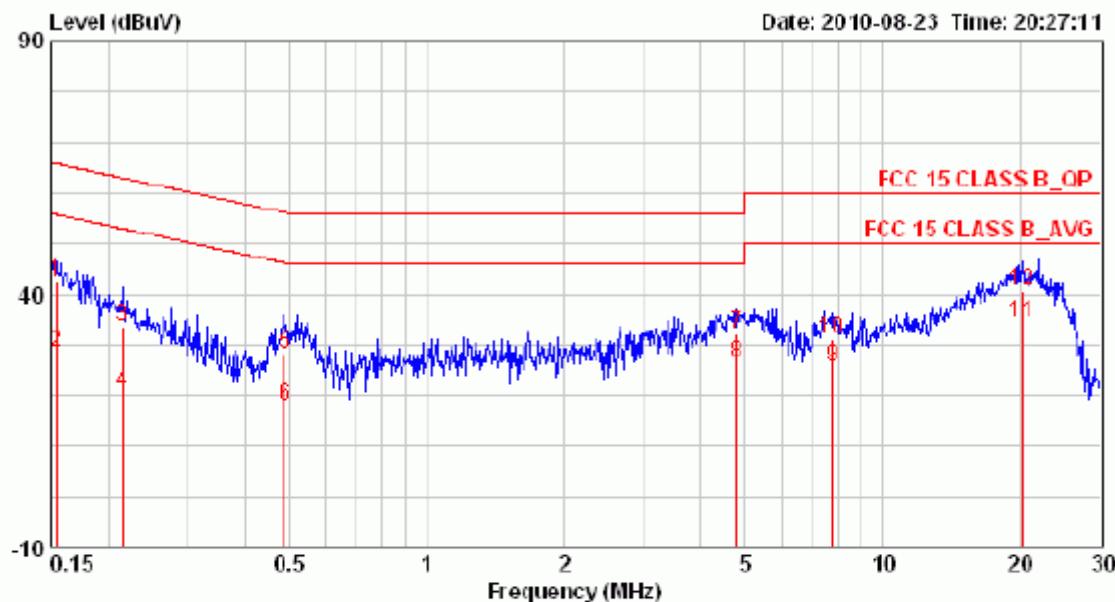
Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Operation Mode: Normal Link
Temperature: 19°C
Humidity: 66% RH

Test Date: August 23, 2010
Tested by: Vic Lin
Line: L2



| Freq. MHz | Corr. Factor dB | Reading Value dBuV | | Emission Level dBuV | | Limit dBuV | | Margin dB | |
|--------------|-----------------------|-----------------------|-------|------------------------|-------|---------------|-------|--------------|--------|
| | | Q. P. | Ave. | Q. P. | Ave. | Q. P. | Ave. | Q. P. | Ave. |
| 0.154 | 0.06 | 42.16 | 20.24 | 42.22 | 20.30 | 65.70 | 55.70 | -23.56 | -27.40 |
| 0.215 | 0.06 | 33.36 | 20.34 | 33.42 | 20.40 | 63.01 | 53.01 | -29.59 | -32.61 |
| 0.489 | 0.06 | 27.90 | 17.71 | 27.36 | 17.77 | 56.19 | 46.19 | -28.23 | -28.42 |
| 4.772 | 0.19 | 31.81 | 26.23 | 32.00 | 26.42 | 56.00 | 46.00 | -24.00 | -19.58 |
| 7.769 | 0.27 | 30.78 | 25.30 | 31.05 | 25.57 | 60.00 | 50.00 | -28.95 | -24.43 |
| 20.270 | 0.48 | 39.96 | 33.79 | 40.44 | 34.27 | 60.00 | 50.00 | -19.56 | -15.73 |

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

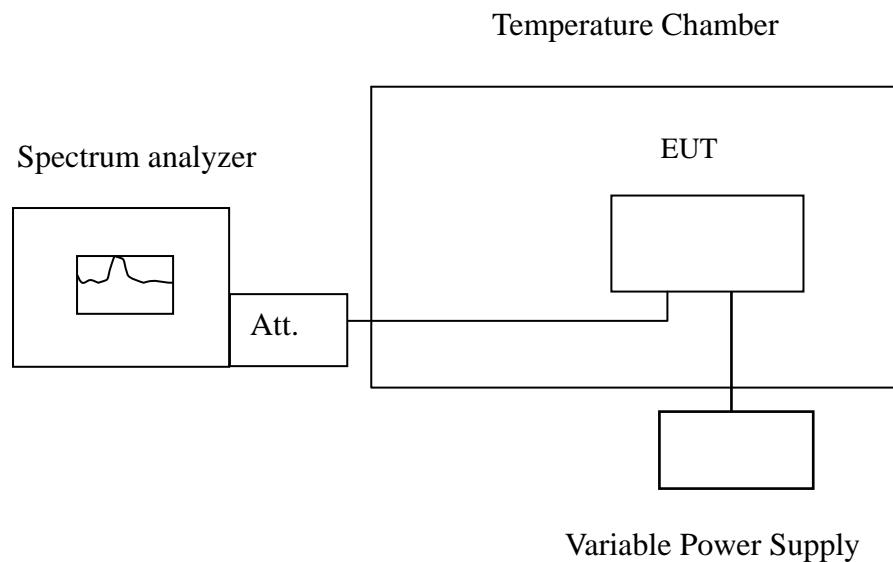


7.9 FREQUENCY STABILITY

LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Test Configuration



Remark: Measurement setup for testing on Antenna connector



TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

No non-compliance noted.

IEEE 802.11a mode / 5180 ~ 5240 MHz:

CH Low

| Operating Frequency: 5180 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5179.994280 | 5150~5250 | Pass |
| 40 | 110 | 5180.001009 | 5150~5250 | Pass |
| 30 | 110 | 5179.998525 | 5150~5250 | Pass |
| 20 | 110 | 5179.982668 | 5150~5250 | Pass |
| 10 | 110 | 5180.008516 | 5150~5250 | Pass |
| 0 | 110 | 5179.979187 | 5150~5250 | Pass |
| -10 | 110 | 5179.988953 | 5150~5250 | Pass |
| -20 | 110 | 5179.971851 | 5150~5250 | Pass |

| Operating Frequency: 5180 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5179.983826 | 5150~5250 | Pass |
| | 110 | 5180.004066 | 5150~5250 | Pass |
| | 121 | 5180.002293 | 5150~5250 | Pass |

**CH High**

| Operating Frequency: 5240 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5240.011483 | 5150~5250 | Pass |
| 40 | 110 | 5239.989052 | 5150~5250 | Pass |
| 30 | 110 | 5239.97171 | 5150~5250 | Pass |
| 20 | 110 | 5239.999063 | 5150~5250 | Pass |
| 10 | 110 | 5240.012907 | 5150~5250 | Pass |
| 0 | 110 | 5240.007675 | 5150~5250 | Pass |
| -10 | 110 | 5239.981583 | 5150~5250 | Pass |
| -20 | 110 | 5240.006497 | 5150~5250 | Pass |

| Operating Frequency: 5240 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5239.974893 | 5150~5250 | Pass |
| | 110 | 5239.996009 | 5150~5250 | Pass |
| | 121 | 5240.007005 | 5150~5250 | Pass |

**draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240 MHz:****CH Low**

| Operating Frequency: 5180 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5180.012254 | 5150~5250 | Pass |
| 40 | 110 | 5179.980279 | 5150~5250 | Pass |
| 30 | 110 | 5180.003689 | 5150~5250 | Pass |
| 20 | 110 | 5179.997802 | 5150~5250 | Pass |
| 10 | 110 | 5179.971316 | 5150~5250 | Pass |
| 0 | 110 | 5180.006715 | 5150~5250 | Pass |
| -10 | 110 | 5179.983170 | 5150~5250 | Pass |
| -20 | 110 | 5179.992990 | 5150~5250 | Pass |

| Operating Frequency: 5180 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5180.014738 | 5150~5250 | Pass |
| | 110 | 5179.986089 | 5150~5250 | Pass |
| | 121 | 5179.993759 | 5150~5250 | Pass |

**CH High**

| Operating Frequency: 5240 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5239.998866 | 5150~5250 | Pass |
| 40 | 110 | 5240.008763 | 5150~5250 | Pass |
| 30 | 110 | 5240.00759 | 5150~5250 | Pass |
| 20 | 110 | 5240.014107 | 5150~5250 | Pass |
| 10 | 110 | 5240.008261 | 5150~5250 | Pass |
| 0 | 110 | 5239.973581 | 5150~5250 | Pass |
| -10 | 110 | 5240.013917 | 5150~5250 | Pass |
| -20 | 110 | 5239.979161 | 5150~5250 | Pass |

| Operating Frequency: 5240 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5239.991183 | 5150~5250 | Pass |
| | 110 | 5239.986526 | 5150~5250 | Pass |
| | 121 | 5239.998332 | 5150~5250 | Pass |

**draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230 MHz:****CH Low**

| Operating Frequency: 5190 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5190.012814 | 5150~5250 | Pass |
| 40 | 110 | 5190.019838 | 5150~5250 | Pass |
| 30 | 110 | 5189.985185 | 5150~5250 | Pass |
| 20 | 110 | 5189.986597 | 5150~5250 | Pass |
| 10 | 110 | 5189.984501 | 5150~5250 | Pass |
| 0 | 110 | 5190.005642 | 5150~5250 | Pass |
| -10 | 110 | 5190.006639 | 5150~5250 | Pass |
| -20 | 110 | 5190.001927 | 5150~5250 | Pass |

| Operating Frequency: 5190 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5189.991643 | 5150~5250 | Pass |
| | 110 | 5190.020659 | 5150~5250 | Pass |
| | 121 | 5189.994408 | 5150~5250 | Pass |

**CH High**

| Operating Frequency: 5230 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5230.014948 | 5150~5250 | Pass |
| 40 | 110 | 5229.976434 | 5150~5250 | Pass |
| 30 | 110 | 5229.979094 | 5150~5250 | Pass |
| 20 | 110 | 5229.993816 | 5150~5250 | Pass |
| 10 | 110 | 5229.995199 | 5150~5250 | Pass |
| 0 | 110 | 5230.009753 | 5150~5250 | Pass |
| -10 | 110 | 5229.989794 | 5150~5250 | Pass |
| -20 | 110 | 5230.016223 | 5150~5250 | Pass |

| Operating Frequency: 5230 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5229.998084 | 5150~5250 | Pass |
| | 110 | 5229.984963 | 5150~5250 | Pass |
| | 121 | 5230.007881 | 5150~5250 | Pass |

**IEEE 802.11a mode / 5260 ~ 5320 MHz:****CH Low**

| Operating Frequency: 5260 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5260.007146 | 5250~5350 | Pass |
| 40 | 110 | 5259.97489 | 5250~5350 | Pass |
| 30 | 110 | 5259.971883 | 5250~5350 | Pass |
| 20 | 110 | 5260.01535 | 5250~5350 | Pass |
| 10 | 110 | 5259.977986 | 5250~5350 | Pass |
| 0 | 110 | 5259.976992 | 5250~5350 | Pass |
| -10 | 110 | 5260.009784 | 5250~5350 | Pass |
| -20 | 110 | 5259.985933 | 5250~5350 | Pass |

| Operating Frequency: 5260 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5260.002865 | 5250~5350 | Pass |
| | 110 | 5259.971089 | 5250~5350 | Pass |
| | 121 | 5259.970435 | 5250~5350 | Pass |

**CH High**

| Operating Frequency: 5320 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5319.993267 | 5250~5350 | Pass |
| 40 | 110 | 5319.980488 | 5250~5350 | Pass |
| 30 | 110 | 5320.020199 | 5250~5350 | Pass |
| 20 | 110 | 5320.011366 | 5250~5350 | Pass |
| 10 | 110 | 5320.014059 | 5250~5350 | Pass |
| 0 | 110 | 5320.000178 | 5250~5350 | Pass |
| -10 | 110 | 5319.998094 | 5250~5350 | Pass |
| -20 | 110 | 5319.982933 | 5250~5350 | Pass |

| Operating Frequency: 5320 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5320.012065 | 5250~5350 | Pass |
| | 110 | 5319.993859 | 5250~5350 | Pass |
| | 121 | 5320.009046 | 5250~5350 | Pass |

**draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320 MHz:****CH Low**

| Operating Frequency: 5260 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5259.982565 | 5250~5350 | Pass |
| 40 | 110 | 5260.019851 | 5250~5350 | Pass |
| 30 | 110 | 5260.01517 | 5250~5350 | Pass |
| 20 | 110 | 5259.996719 | 5250~5350 | Pass |
| 10 | 110 | 5259.991243 | 5250~5350 | Pass |
| 0 | 110 | 5260.017786 | 5250~5350 | Pass |
| -10 | 110 | 5259.980214 | 5250~5350 | Pass |
| -20 | 110 | 5259.977541 | 5250~5350 | Pass |

| Operating Frequency: 5260 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5260.008211 | 5250~5350 | Pass |
| | 110 | 5259.986892 | 5250~5350 | Pass |
| | 121 | 5259.980574 | 5250~5350 | Pass |

**CH High**

| Operating Frequency: 5320 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5320.004534 | 5250~5350 | Pass |
| 40 | 110 | 5319.974437 | 5250~5350 | Pass |
| 30 | 110 | 5320.001835 | 5250~5350 | Pass |
| 20 | 110 | 5320.00271 | 5250~5350 | Pass |
| 10 | 110 | 5319.979586 | 5250~5350 | Pass |
| 0 | 110 | 5319.980016 | 5250~5350 | Pass |
| -10 | 110 | 5319.974455 | 5250~5350 | Pass |
| -20 | 110 | 5319.975138 | 5250~5350 | Pass |

| Operating Frequency: 5320 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5319.985069 | 5250~5350 | Pass |
| | 110 | 5319.972448 | 5250~5350 | Pass |
| | 121 | 5320.003644 | 5250~5350 | Pass |

**draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310 MHz:****CH Low**

| Operating Frequency: 5270 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5269.992833 | 5250~5350 | Pass |
| 40 | 110 | 5269.980124 | 5250~5350 | Pass |
| 30 | 110 | 5270.011228 | 5250~5350 | Pass |
| 20 | 110 | 5269.993481 | 5250~5350 | Pass |
| 10 | 110 | 5270.018087 | 5250~5350 | Pass |
| 0 | 110 | 5269.976021 | 5250~5350 | Pass |
| -10 | 110 | 5270.011394 | 5250~5350 | Pass |
| -20 | 110 | 5269.98935 | 5250~5350 | Pass |

| Operating Frequency: 5270 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5270.017791 | 5250~5350 | Pass |
| | 110 | 5269.978255 | 5250~5350 | Pass |
| | 121 | 5270.020274 | 5250~5350 | Pass |

**CH High**

| Operating Frequency: 5310 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5310.002241 | 5250~5350 | Pass |
| 40 | 110 | 5310.006137 | 5250~5350 | Pass |
| 30 | 110 | 5309.974259 | 5250~5350 | Pass |
| 20 | 110 | 5309.996793 | 5250~5350 | Pass |
| 10 | 110 | 5310.006624 | 5250~5350 | Pass |
| 0 | 110 | 5310.009284 | 5250~5350 | Pass |
| -10 | 110 | 5309.973079 | 5250~5350 | Pass |
| -20 | 110 | 5309.980627 | 5250~5350 | Pass |

| Operating Frequency: 5310 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5309.996251 | 5250~5350 | Pass |
| | 110 | 5309.9873 | 5250~5350 | Pass |
| | 121 | 5310.006258 | 5250~5350 | Pass |

**IEEE 802.11a mode / 5500 ~ 5700 MHz:****CH Low**

| Operating Frequency: 5500 MHz | | | | |
|-------------------------------|-------------|--------------------------|-------------|-------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5499.995987 | 5470~5725 | Pass |
| 40 | 110 | 5499.996122 | 5470~5725 | Pass |
| 30 | 110 | 5499.995374 | 5470~5725 | Pass |
| 20 | 110 | 5499.991104 | 5470~5725 | Pass |
| 10 | 110 | 5499.983538 | 5470~5725 | Pass |
| 0 | 110 | 5499.987191 | 5470~5725 | Pass |
| -10 | 110 | 5500.009796 | 5470~5725 | Pass |
| -20 | 110 | 5500.005004 | 5470~5725 | Pass |

| Operating Frequency: 5500 MHz | | | | |
|-------------------------------|-------------|--------------------------|-------------|-------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5499.989054 | 5470~5725 | Pass |
| | 110 | 5499.995972 | 5470~5725 | Pass |
| | 121 | 5500.002928 | 5470~5725 | Pass |

**CH High**

| Operating Frequency: 5700 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5700.01101 | 5470~5725 | Pass |
| 40 | 110 | 5699.976483 | 5470~5725 | Pass |
| 30 | 110 | 5700.003691 | 5470~5725 | Pass |
| 20 | 110 | 5699.974725 | 5470~5725 | Pass |
| 10 | 110 | 5699.977013 | 5470~5725 | Pass |
| 0 | 110 | 5700.006582 | 5470~5725 | Pass |
| -10 | 110 | 5700.005498 | 5470~5725 | Pass |
| -20 | 110 | 5700.019957 | 5470~5725 | Pass |

| Operating Frequency: 5700 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5700.011523 | 5470~5725 | Pass |
| | 110 | 5699.975469 | 5470~5725 | Pass |
| | 121 | 5699.991407 | 5470~5725 | Pass |

**draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700 MHz:****CH Low**

| Operating Frequency: 5500 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5500.018589 | 5470~5725 | Pass |
| 40 | 110 | 5499.970457 | 5470~5725 | Pass |
| 30 | 110 | 5499.989247 | 5470~5725 | Pass |
| 20 | 110 | 5500.00284 | 5470~5725 | Pass |
| 10 | 110 | 5499.977444 | 5470~5725 | Pass |
| 0 | 110 | 5500.010155 | 5470~5725 | Pass |
| -10 | 110 | 5500.012187 | 5470~5725 | Pass |
| -20 | 110 | 5499.970114 | 5470~5725 | Pass |

| Operating Frequency: 5500 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5500.006526 | 5470~5725 | Pass |
| | 110 | 5499.970953 | 5470~5725 | Pass |
| | 121 | 5500.010779 | 5470~5725 | Pass |

**CH High**

| Operating Frequency: 5700 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5699.978874 | 5470~5725 | Pass |
| 40 | 110 | 5700.000105 | 5470~5725 | Pass |
| 30 | 110 | 5699.994718 | 5470~5725 | Pass |
| 20 | 110 | 5699.974967 | 5470~5725 | Pass |
| 10 | 110 | 5700.008961 | 5470~5725 | Pass |
| 0 | 110 | 5700.013961 | 5470~5725 | Pass |
| -10 | 110 | 5699.99955 | 5470~5725 | Pass |
| -20 | 110 | 5699.998181 | 5470~5725 | Pass |

| Operating Frequency: 5700 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5700.019473 | 5470~5725 | Pass |
| | 110 | 5699.975437 | 5470~5725 | Pass |
| | 121 | 5699.980422 | 5470~5725 | Pass |

**draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670 MHz:****CH Low**

| Operating Frequency: 5510 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5509.982328 | 5470~5725 | Pass |
| 40 | 110 | 5510.002453 | 5470~5725 | Pass |
| 30 | 110 | 5510.005246 | 5470~5725 | Pass |
| 20 | 110 | 5509.995099 | 5470~5725 | Pass |
| 10 | 110 | 5509.997864 | 5470~5725 | Pass |
| 0 | 110 | 5510.013354 | 5470~5725 | Pass |
| -10 | 110 | 5510.010339 | 5470~5725 | Pass |
| -20 | 110 | 5509.980554 | 5470~5725 | Pass |

| Operating Frequency: 5510 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5509.99053 | 5470~5725 | Pass |
| | 110 | 5510.005879 | 5470~5725 | Pass |
| | 121 | 5509.986714 | 5470~5725 | Pass |

**CH High**

| Operating Frequency: 5670 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 50 | 110 | 5670.004381 | 5470~5725 | Pass |
| 40 | 110 | 5669.981857 | 5470~5725 | Pass |
| 30 | 110 | 5670.002096 | 5470~5725 | Pass |
| 20 | 110 | 5670.018484 | 5470~5725 | Pass |
| 10 | 110 | 5669.997257 | 5470~5725 | Pass |
| 0 | 110 | 5669.976783 | 5470~5725 | Pass |
| -10 | 110 | 5669.991171 | 5470~5725 | Pass |
| -20 | 110 | 5669.974813 | 5470~5725 | Pass |

| Operating Frequency: 5670 MHz | | | | |
|--------------------------------------|--------------------|---------------------------------|--------------------|--------------------|
| Environment Temperature (°C) | Voltage (V) | Measured Frequency (MHz) | Limit Range | Test Result |
| 20 | 99 | 5670.015453 | 5470~5725 | Pass |
| | 110 | 5670.017966 | 5470~5725 | Pass |
| | 121 | 5670.01909 | 5470~5725 | Pass |



7.10 DYNAMIC FREQUENCY SELECTION

LIMIT

According to §15.407 (h) and FCC 06-96 appendix “compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection”.

Table 1: Applicability of DFS requirements prior to use of a channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|----------------------------------|-------------------------------|
| | Master | Client (without radar detection) | Client (with radar detection) |
| Non-Occupancy Period | Yes | Yes | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| Uniform Spreading | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

Table 2: Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | | |
|-----------------------------------|------------------|----------------------------------|-------------------------------|
| | Master | Client (without radar detection) | Client (with radar detection) |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Closing Transmission Time | Yes | Yes | Yes |
| Channel Move Time | Yes | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

Table 3: Interference Threshold values, Master or Client incorporating In-Service

| Maximum Transmit Power | Value (see note) |
|------------------------|------------------|
| >=200 Milliwatt | -64 dBm |
| < 200 Milliwatt | -62 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Table 4: DFS Response requirement values**

| Parameter | Value |
|-----------------------------------|--|
| Non-occupancy period | 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds |
| Channel Closing Transmission Time | 200 milliseconds + approx. 60 milliseconds over remaining 10 second period |
| U-NII Detection Bandwidth | Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3. |

The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Table 5 – Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (Microseconds) | PRI (Microseconds) | Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|-----------------------------|----------------------------|--------------------|--------|--|----------------|
| 1 | 1 | 1428 | 18 | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

Table 6 – Long Pulse Radar Test Signal

| Radar Waveform | Bursts | Pulses per Burst | Pulse Width (μsec) | Chirp Width (μsec) | PRI (μsec) | Minimum Percentage of Successful Detection | Minimum Trials |
|----------------|--------|------------------|--------------------|--------------------|------------|--|----------------|
| 5 | 8-20 | 1-3 | 50-100 | 5-20 | 1000-2000 | 80% | 30 |

Table 7 – Frequency Hopping Radar Test Signal

| Radar Waveform | Pulse Width (μsec) | PRI (μsec) | Burst Length (ms) | Pulses Per Hop | Hopping Rate (kHz) | Minimum Percentage of Successful Detection | Minimum Trials |
|----------------|--------------------|------------|-------------------|----------------|--------------------|--|----------------|
| 6 | 1 | 333 | 300 | 9 | 0.33 | 70% | 30 |



DESCRIPTION OF EUT

Overview Of EUT With Respect To §15.407 (H) Requirements

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The antenna assembly utilized with the EUT has a gain of 3.48 dBi.

The highest power level is 20.02 dBm EIRP in the 5500 ~ 5700MHz band.

The EUT uses one transmitter connected to two 50-ohm coaxial antenna ports via a diversity switch. Two antenna port is connected to the test system since the EUT has two antenna.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The Master Device is a Cisco Aironet 802.11a/b/g Access Point, FCC ID: LDK102056.

The rated output power of the Master unit is < 23dBm (EIRP). Therefore the required interference threshold level is -62 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is $-62 + 5 = -57$ dBm.

The calibrated conducted DFS Detection Threshold level is set to -62 dBm. The tested level is lower than the required level hence it provides margin to the limit.

Manufacturer's Statement Regarding Uniform Channel Spreading

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.

TEST AND MEASUREMENT SYSTEM

System Overview

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

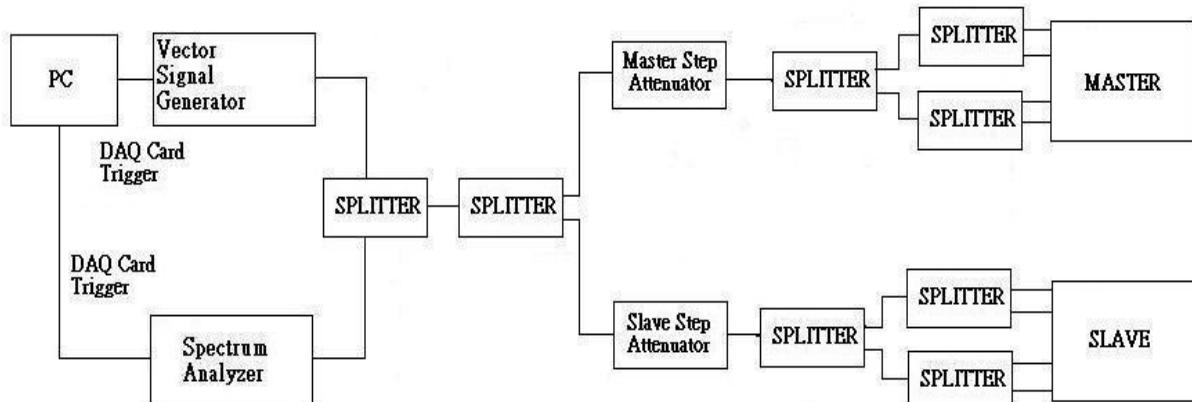
The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

Conducted Method System Block Diagram





System Calibration

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of –62 dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from –62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at –62 dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at –62 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

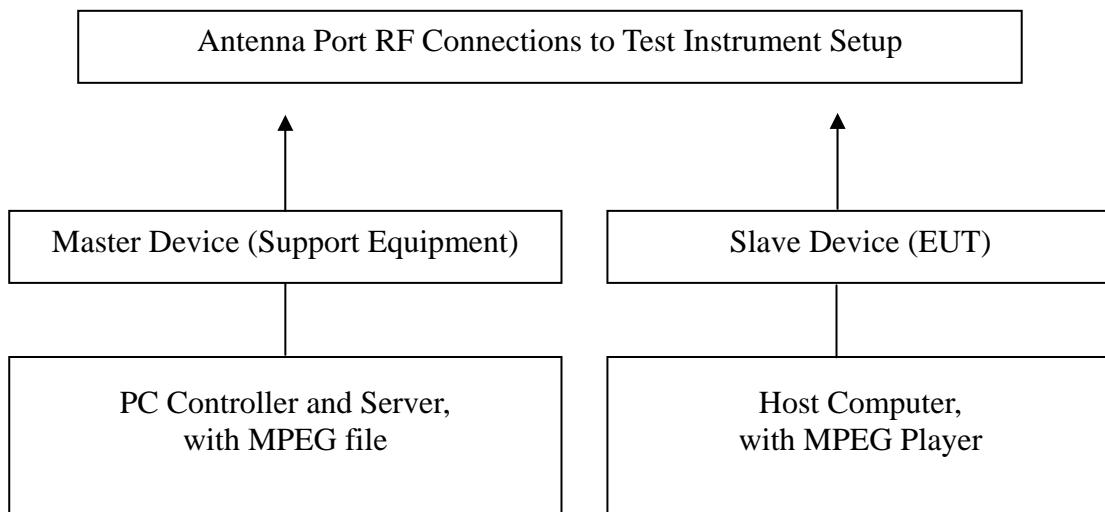
Adjustment Of Displayed Traffic Level

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.

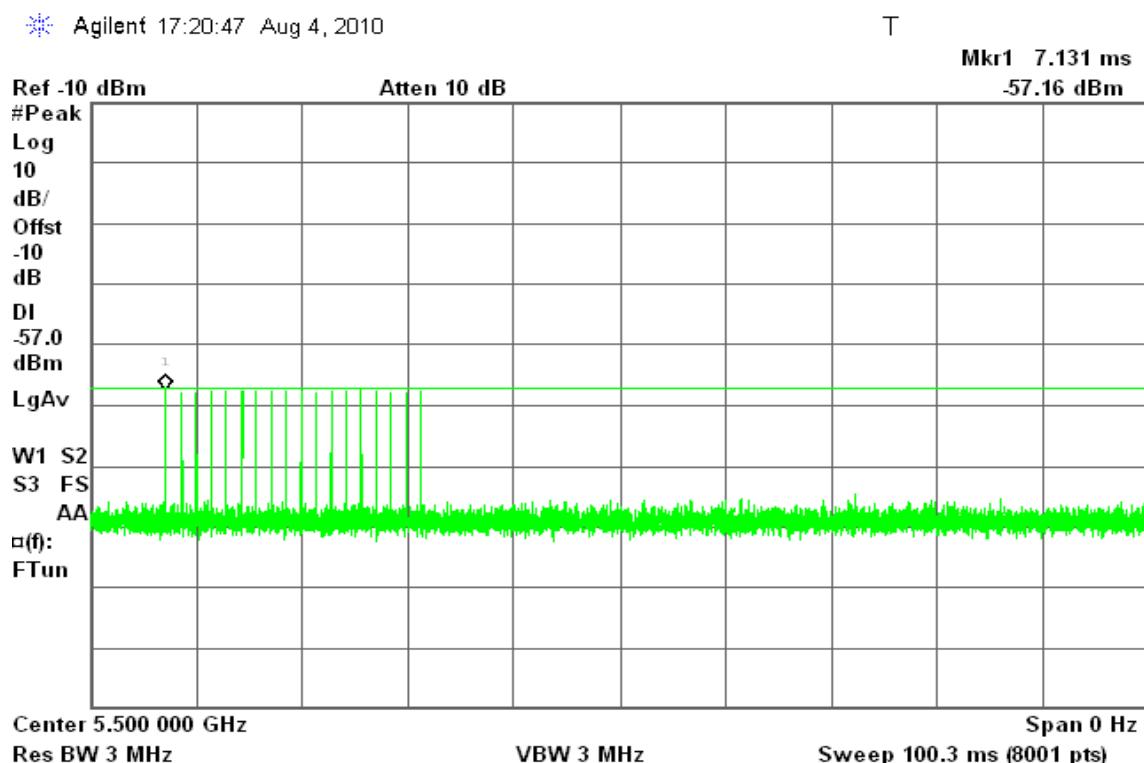
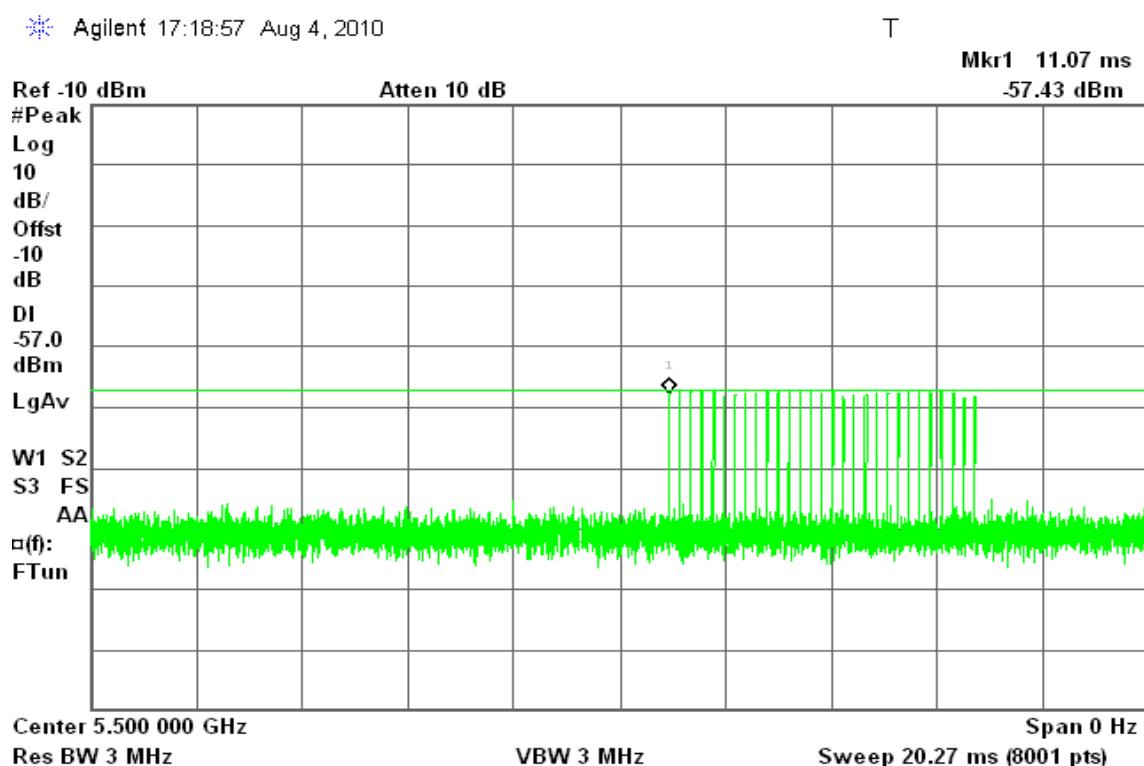


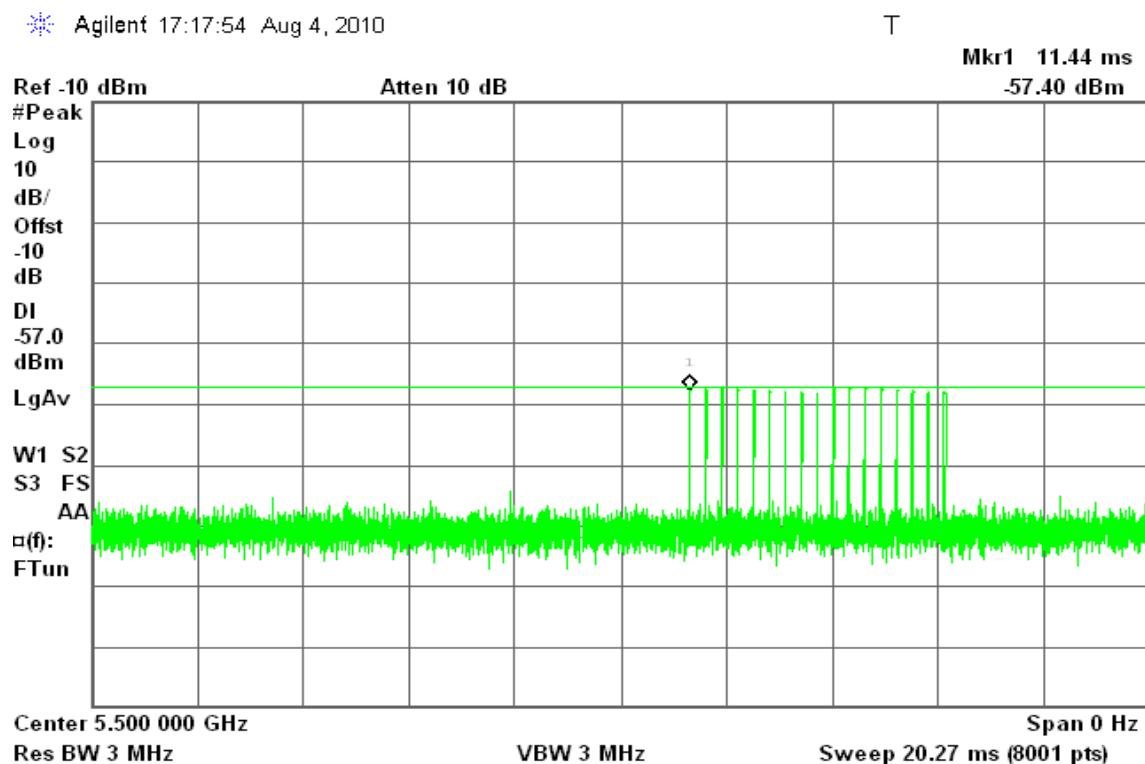
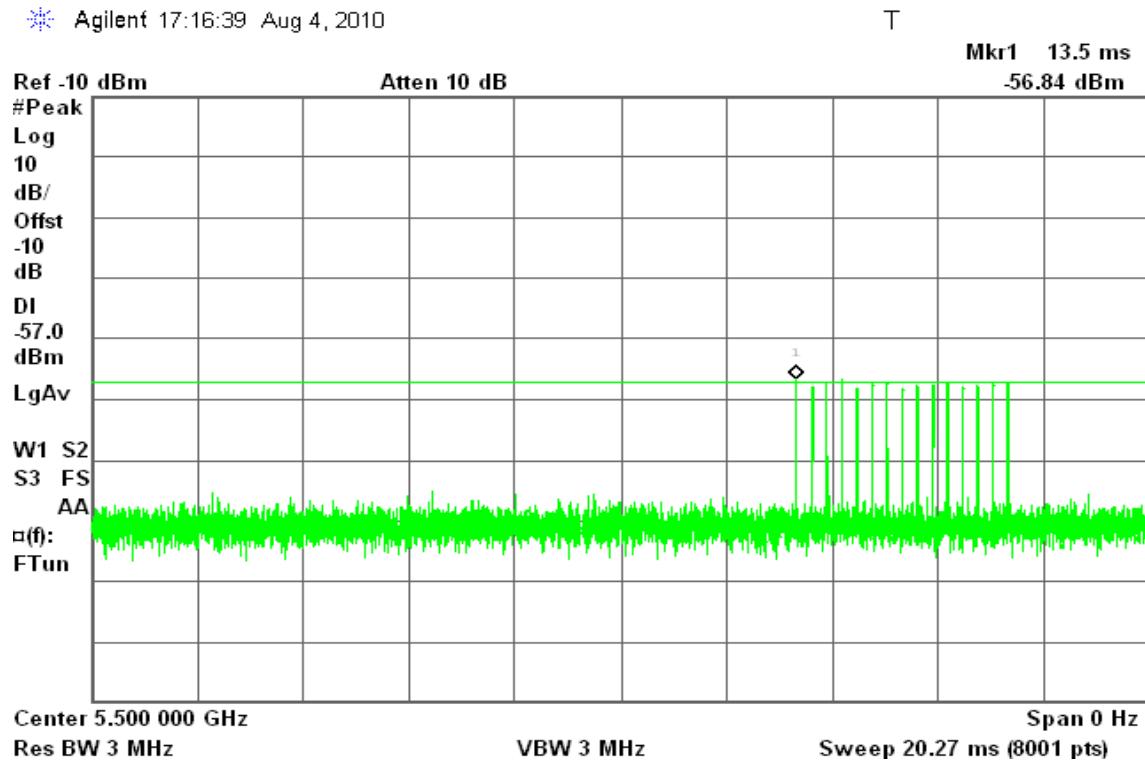
Test Setup

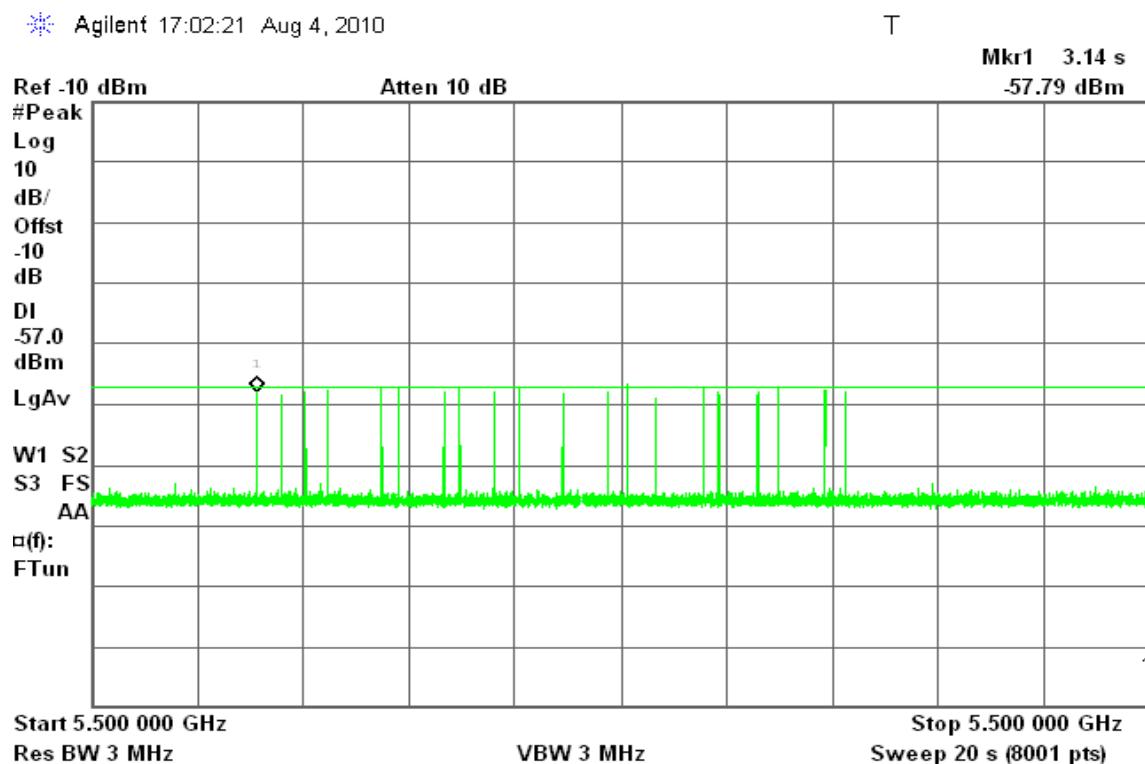
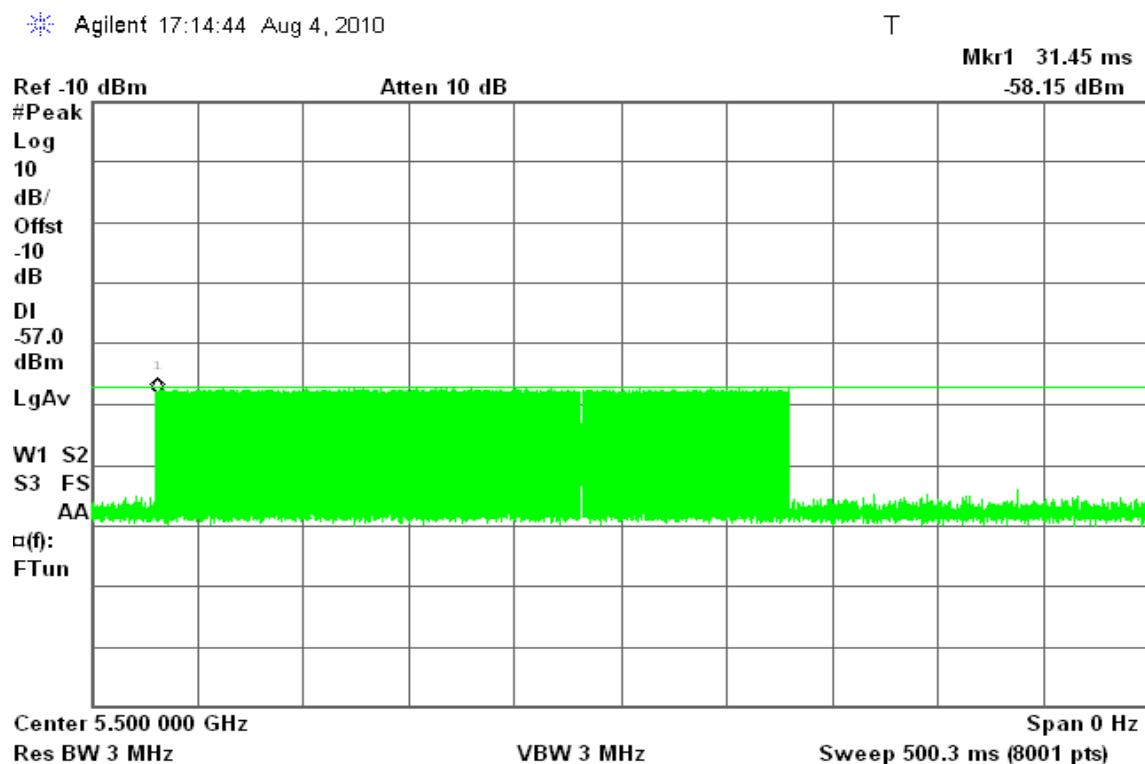


TEST RESULTS

No non-compliance noted

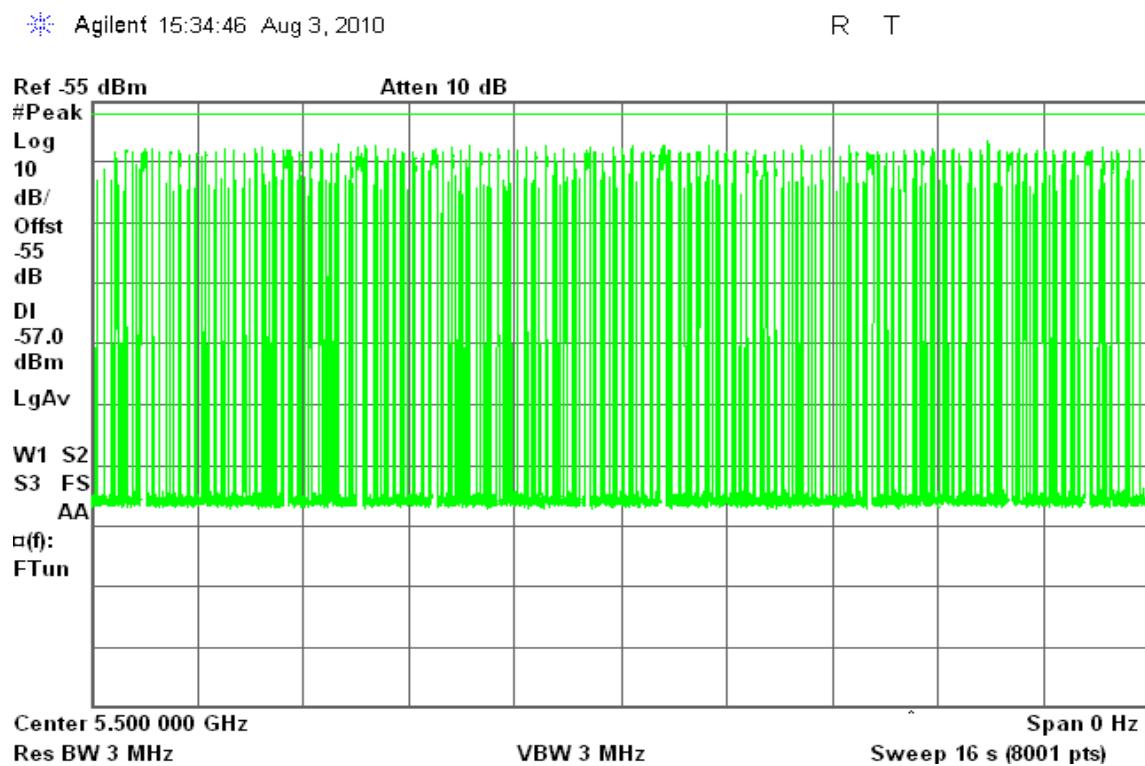
**Test Plot****PLOTS OF RADAR WAVEFORMS****draft 802.11n Standard-20 MHz mode****Sample of Short Pulse Radar Type 1****Sample of Short Pulse Radar Type 2**

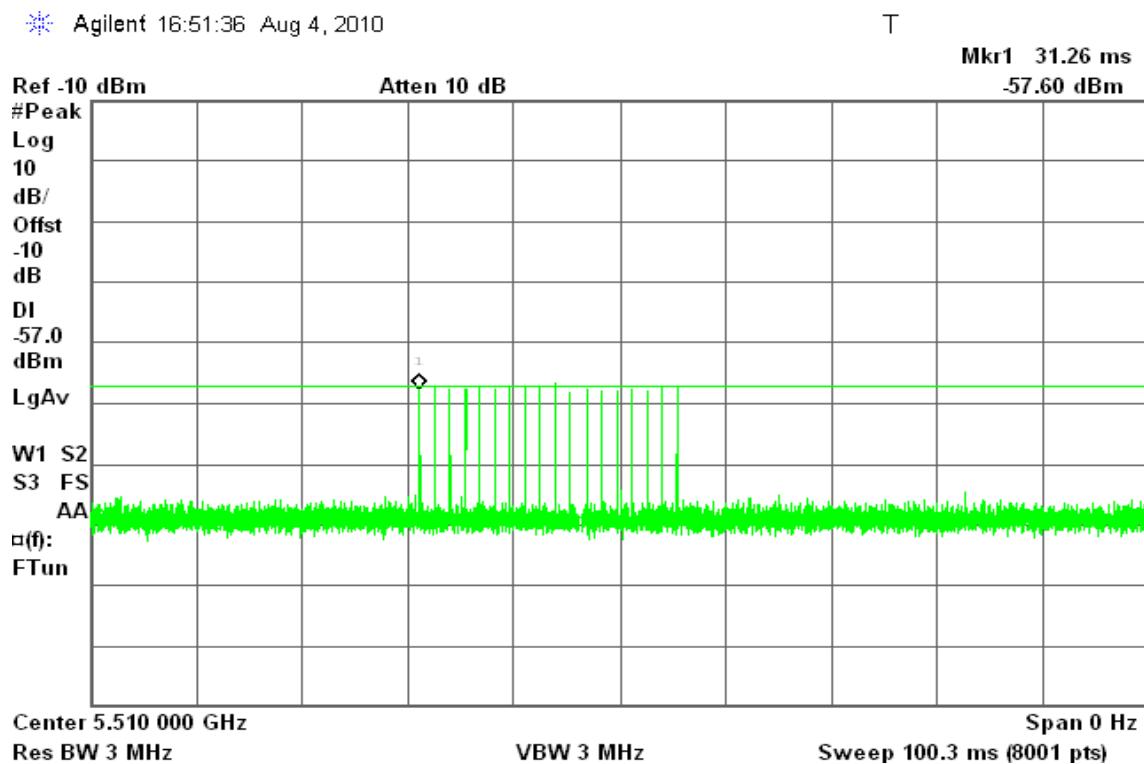
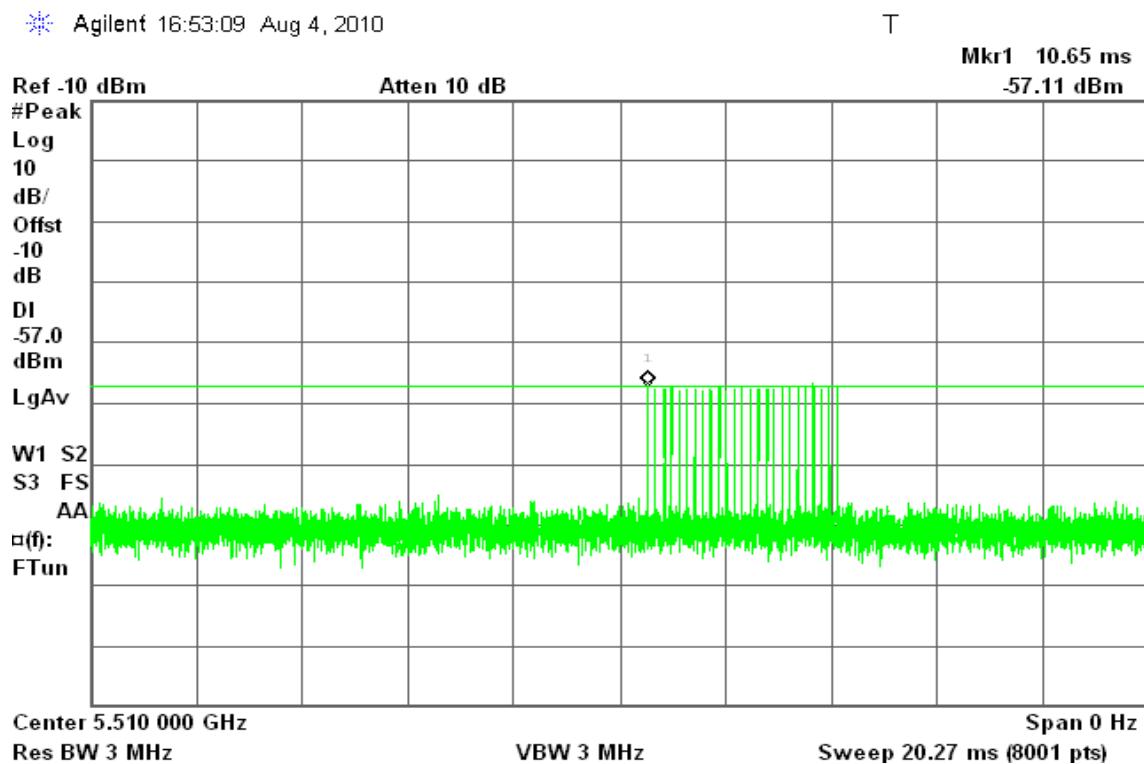
**Sample of Short Pulse Radar Type 3****Sample of Short Pulse Radar Type 4**

**Sample of Long Pulse Radar Type 5****Sample of Frequency Hopping Radar Type 6**



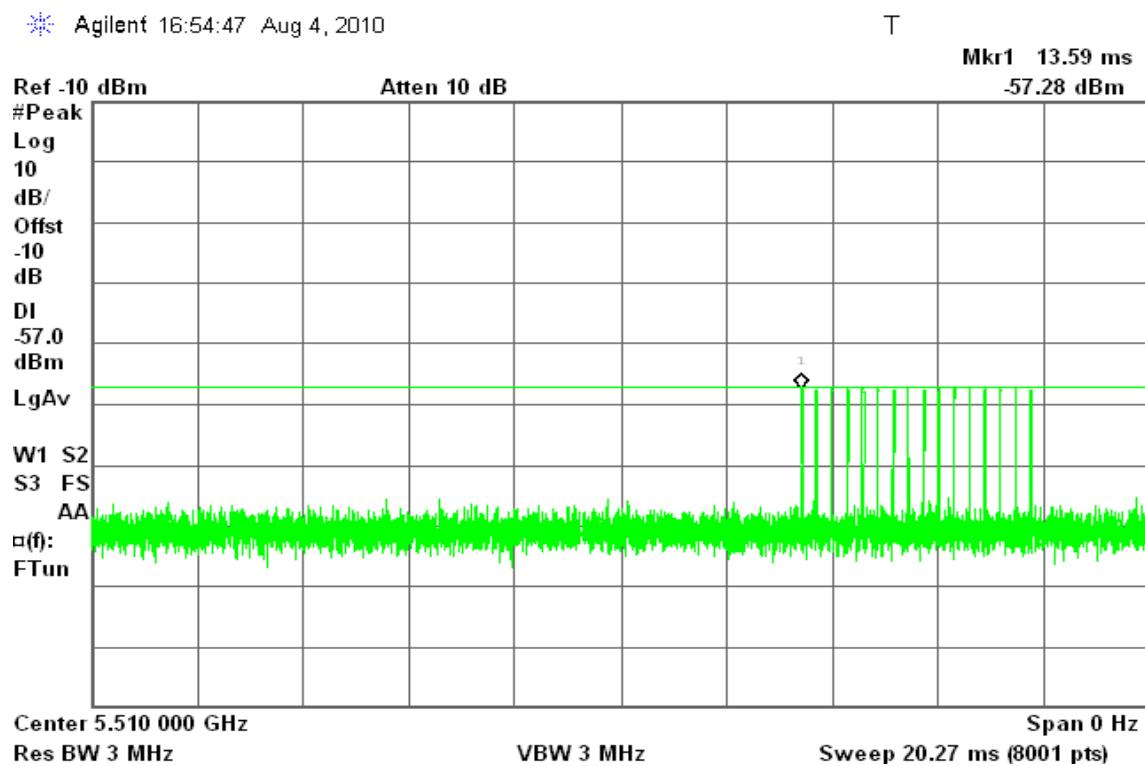
Plot of WLAN Traffic from Slave



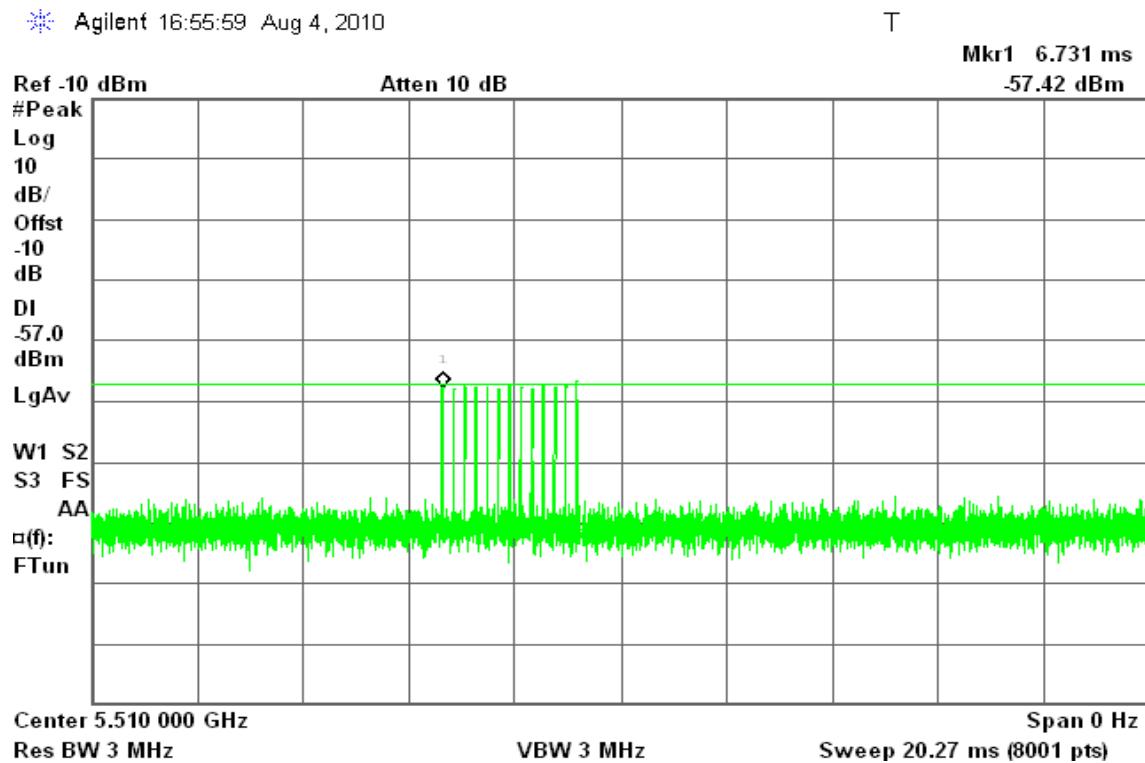
**draft 802.11n Wide-40 MHz mode****Sample of Short Pulse Radar Type 1****Sample of Short Pulse Radar Type 2**

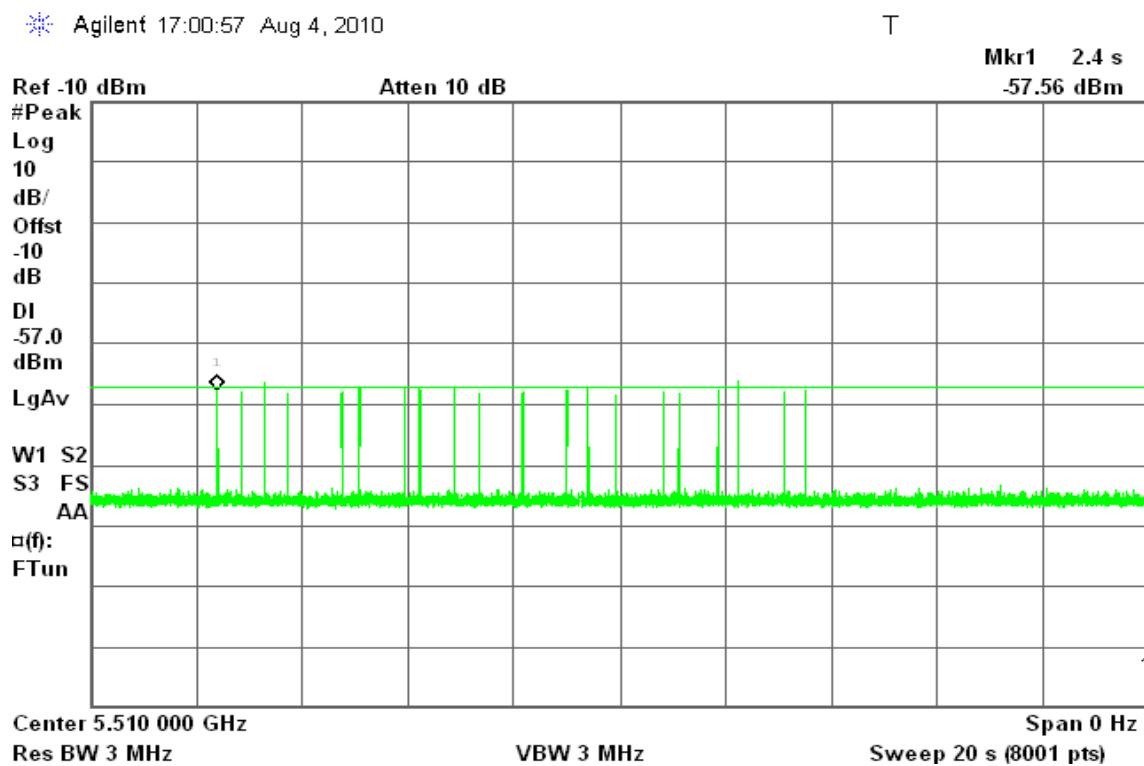
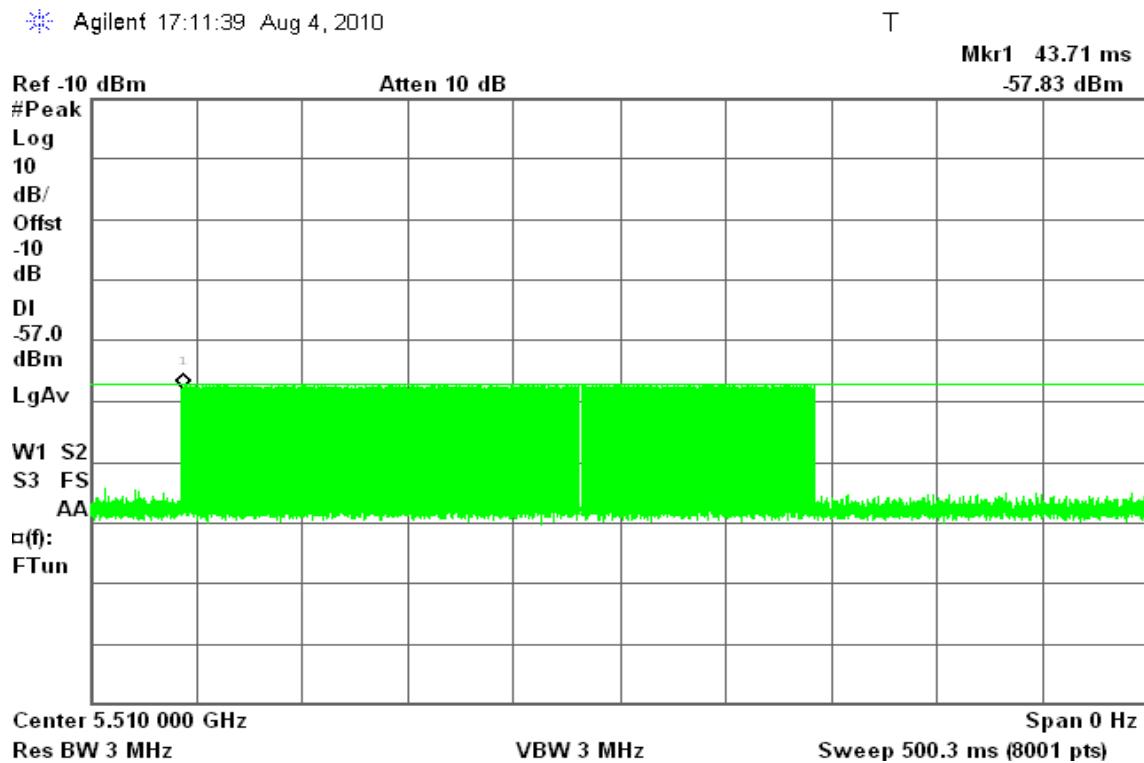


Sample of Short Pulse Radar Type 3



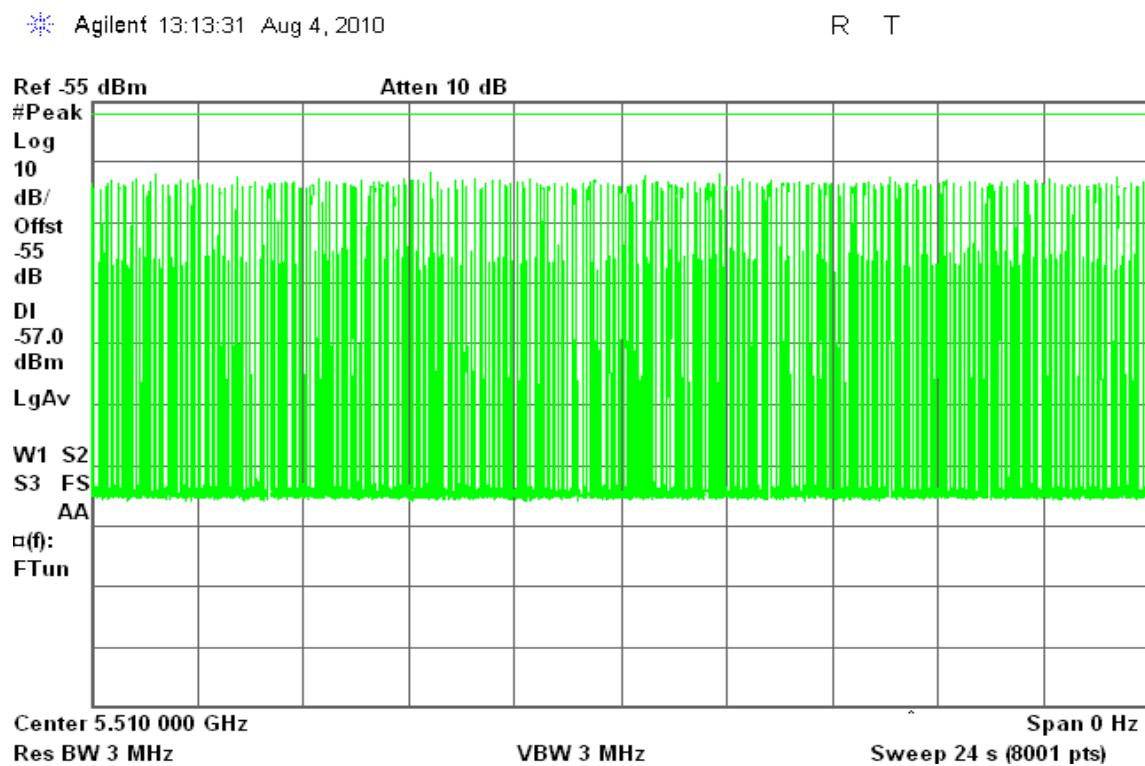
Sample of Short Pulse Radar Type 4



**Sample of Long Pulse Radar Type 5****Sample of Frequency Hopping Radar Type 6**



Plot of WLAN Traffic from Slave





TEST CHANNEL AND METHOD

All tests were performed at a channel center frequency of 5500 MHz utilizing a conducted test method.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

GENERAL REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) * (dwell time per bin)

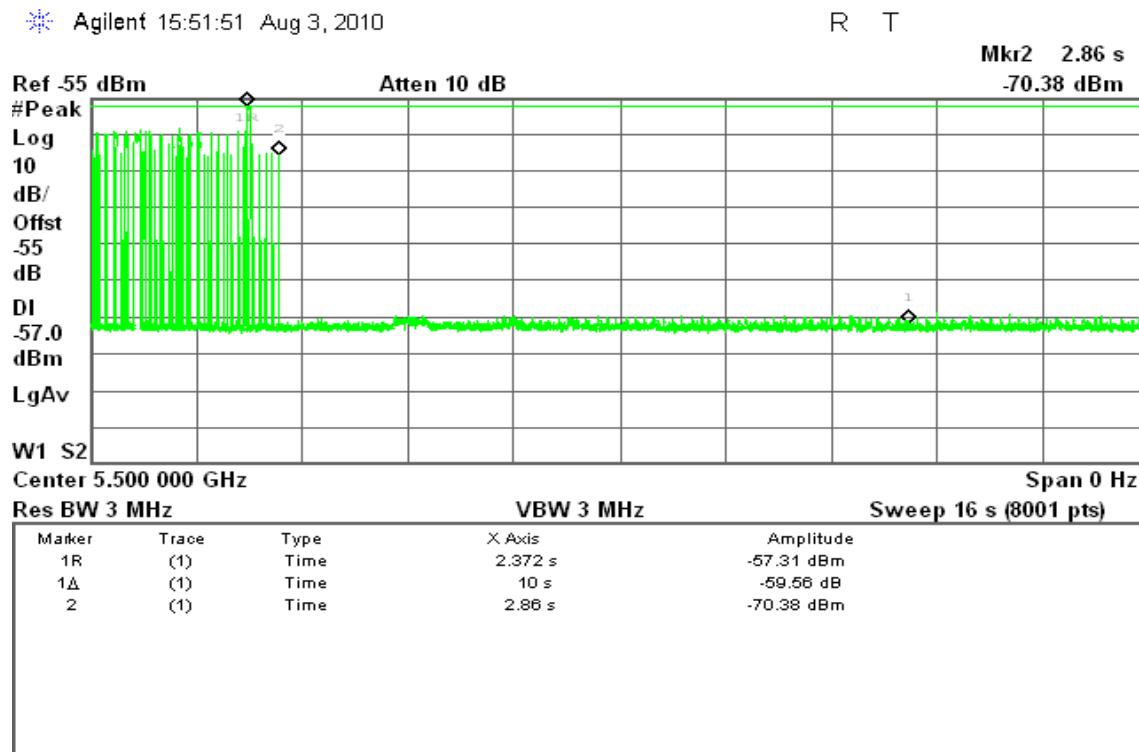
The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).

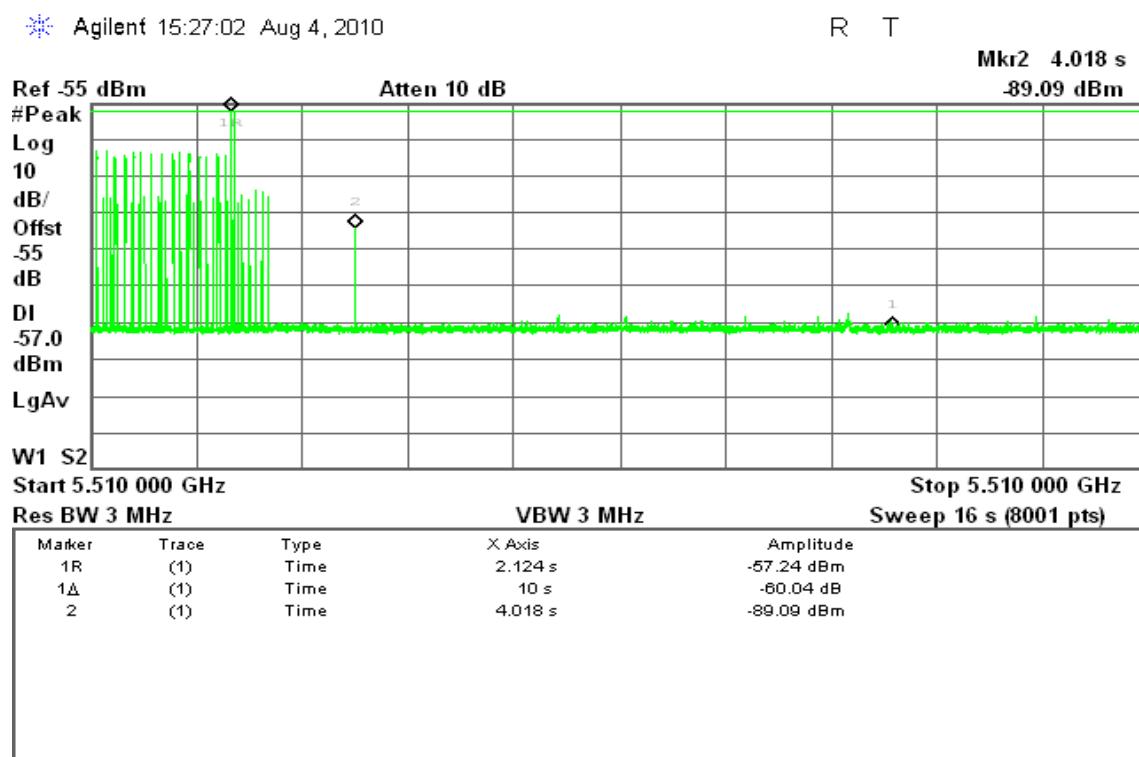
**draft 802.11n Standard-20 MHz Channel mode****Type 1 Channel Move Time Results***No non-compliance noted.*

| Channel Move Time (s) | Limit (s) |
|--------------------------|--------------|
| 2.86 | 10 |



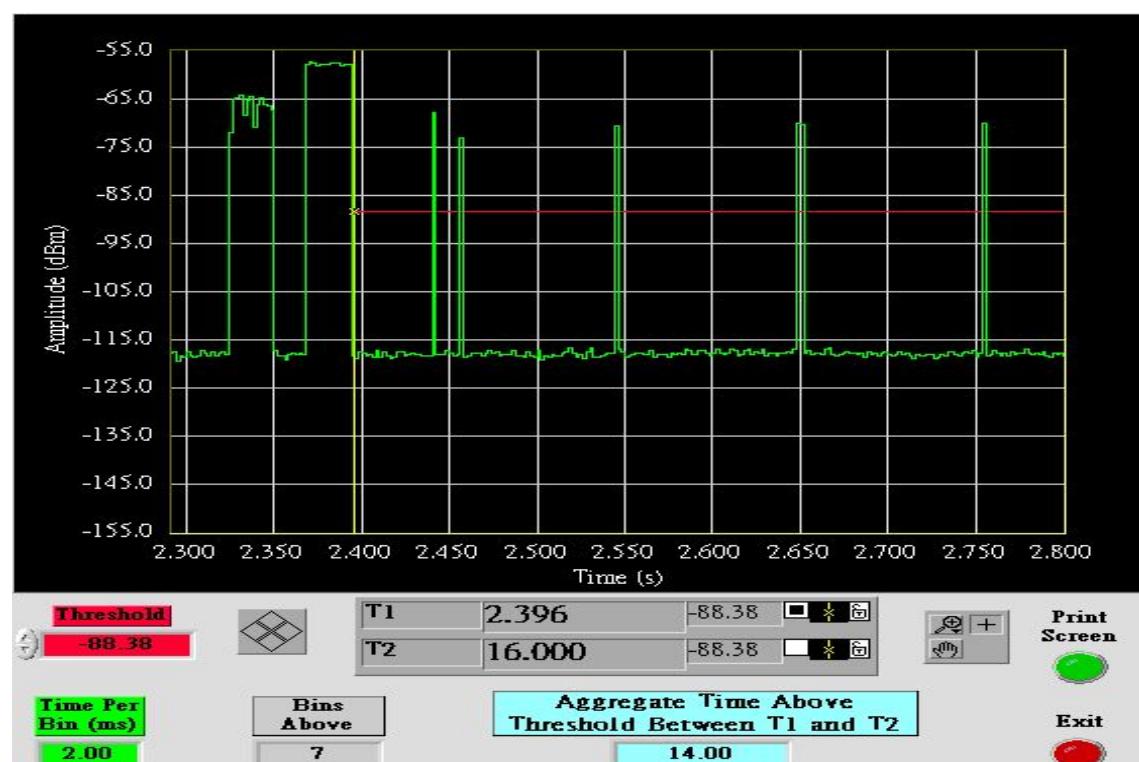
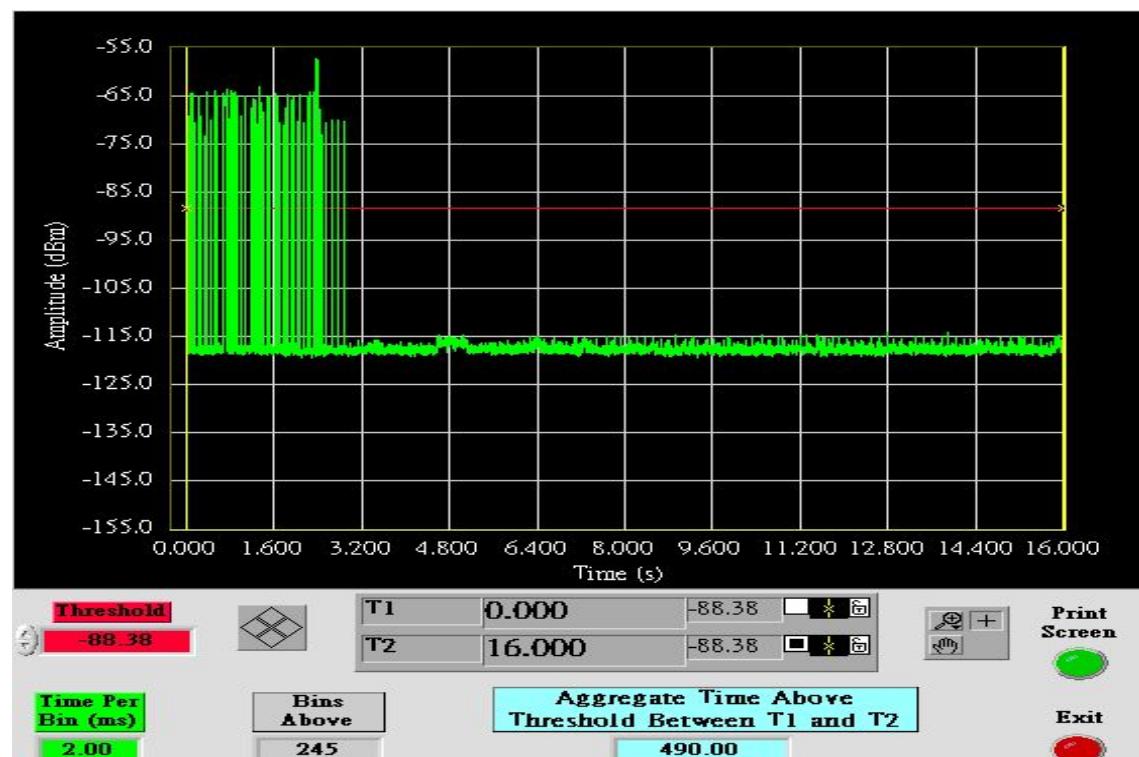
**draft 802.11n Wide-40 MHz Channel mode****Type 1 Channel Move Time Results***No non-compliance noted.*

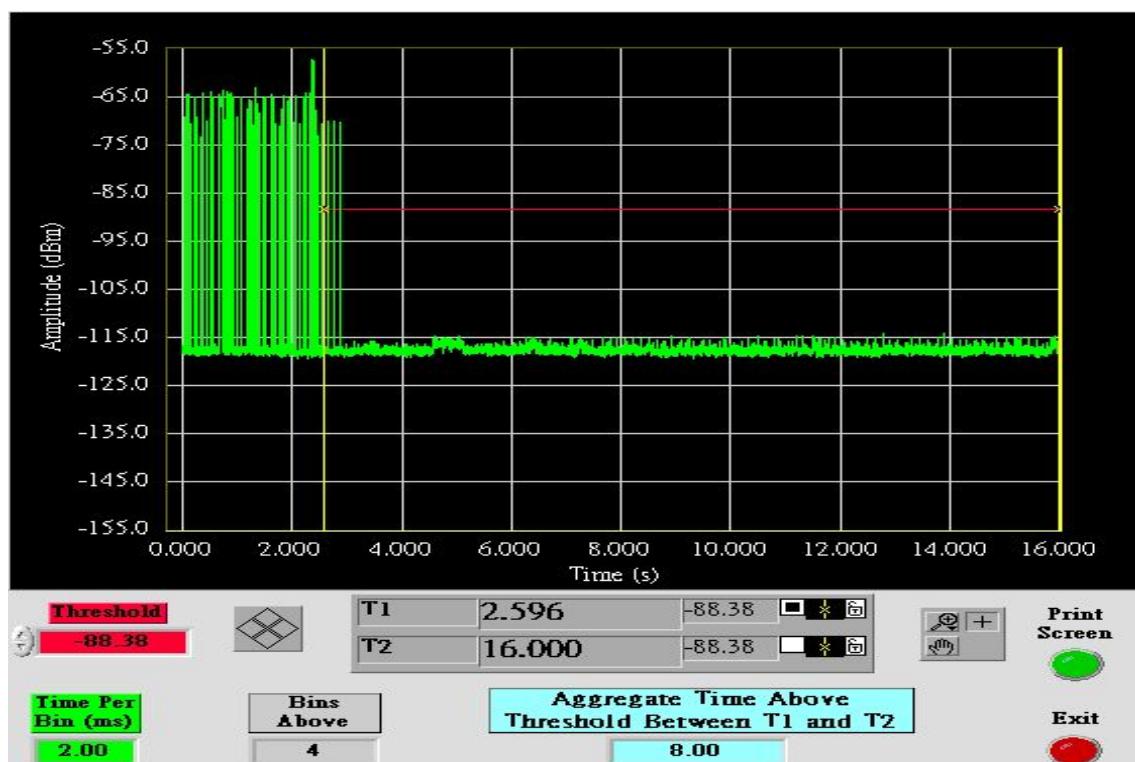
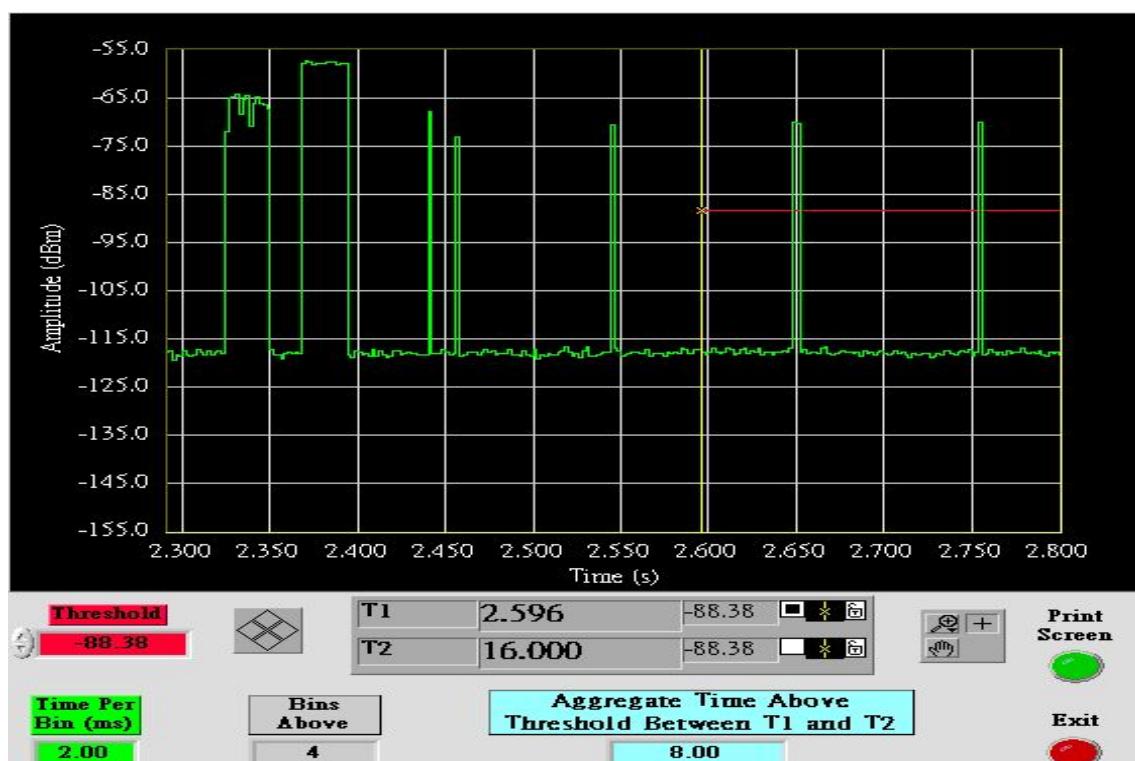
| Channel Move Time (s) | Limit (s) |
|--------------------------|--------------|
| 4.018 | 10 |



**draft 802.11n Standard-20 MHz Channel mode****Type 1 Channel Closing Transmission Time Results***No non-compliance noted.*

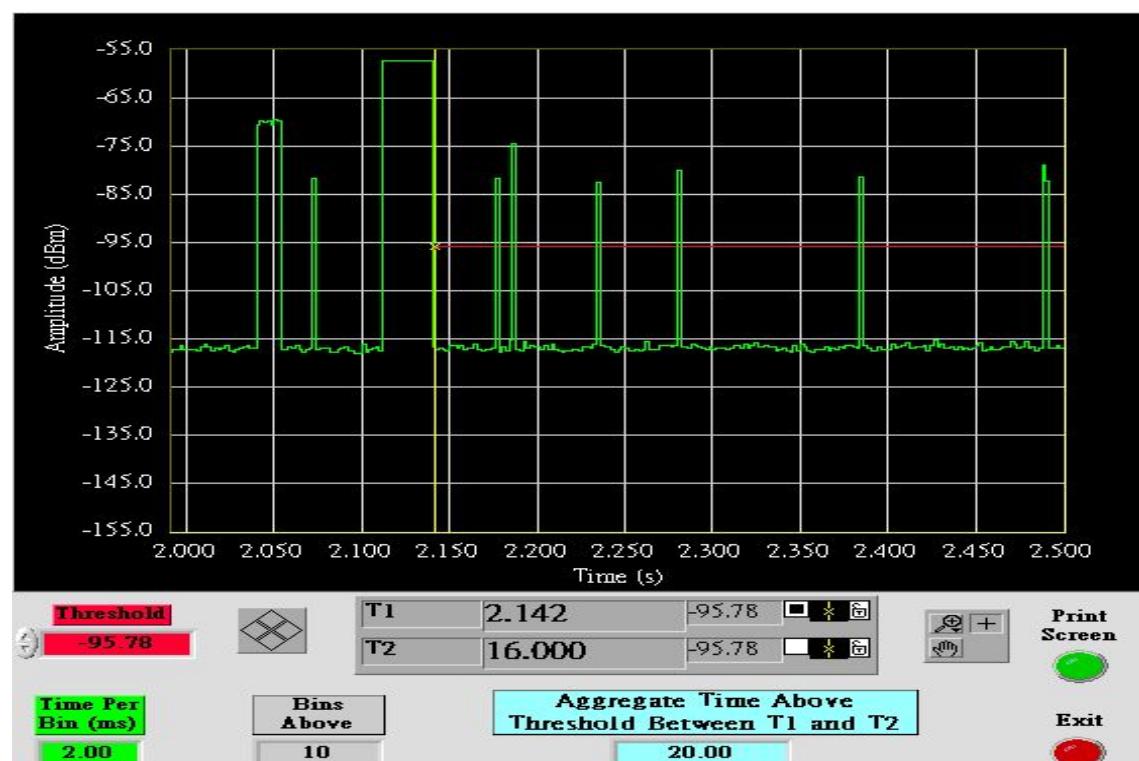
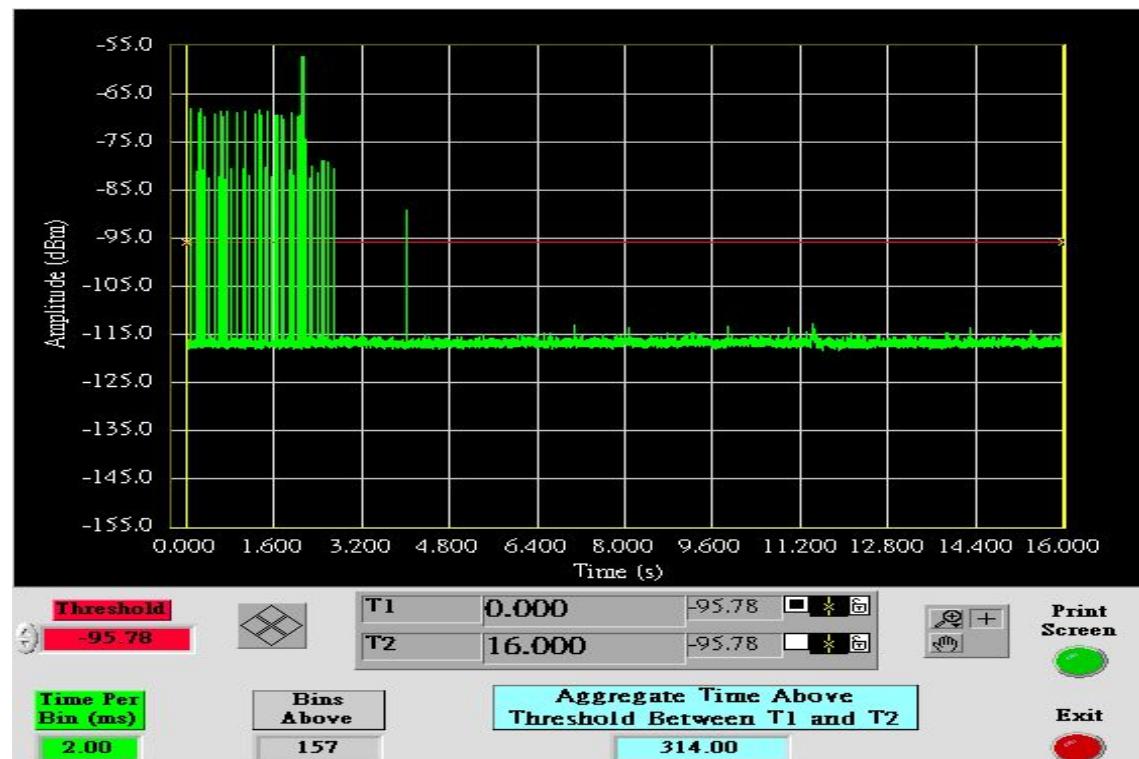
| Aggregate Transmission Time (ms) | Limit (ms) | Margin (ms) |
|-------------------------------------|---------------|----------------|
| 8 | 60 | -52 |

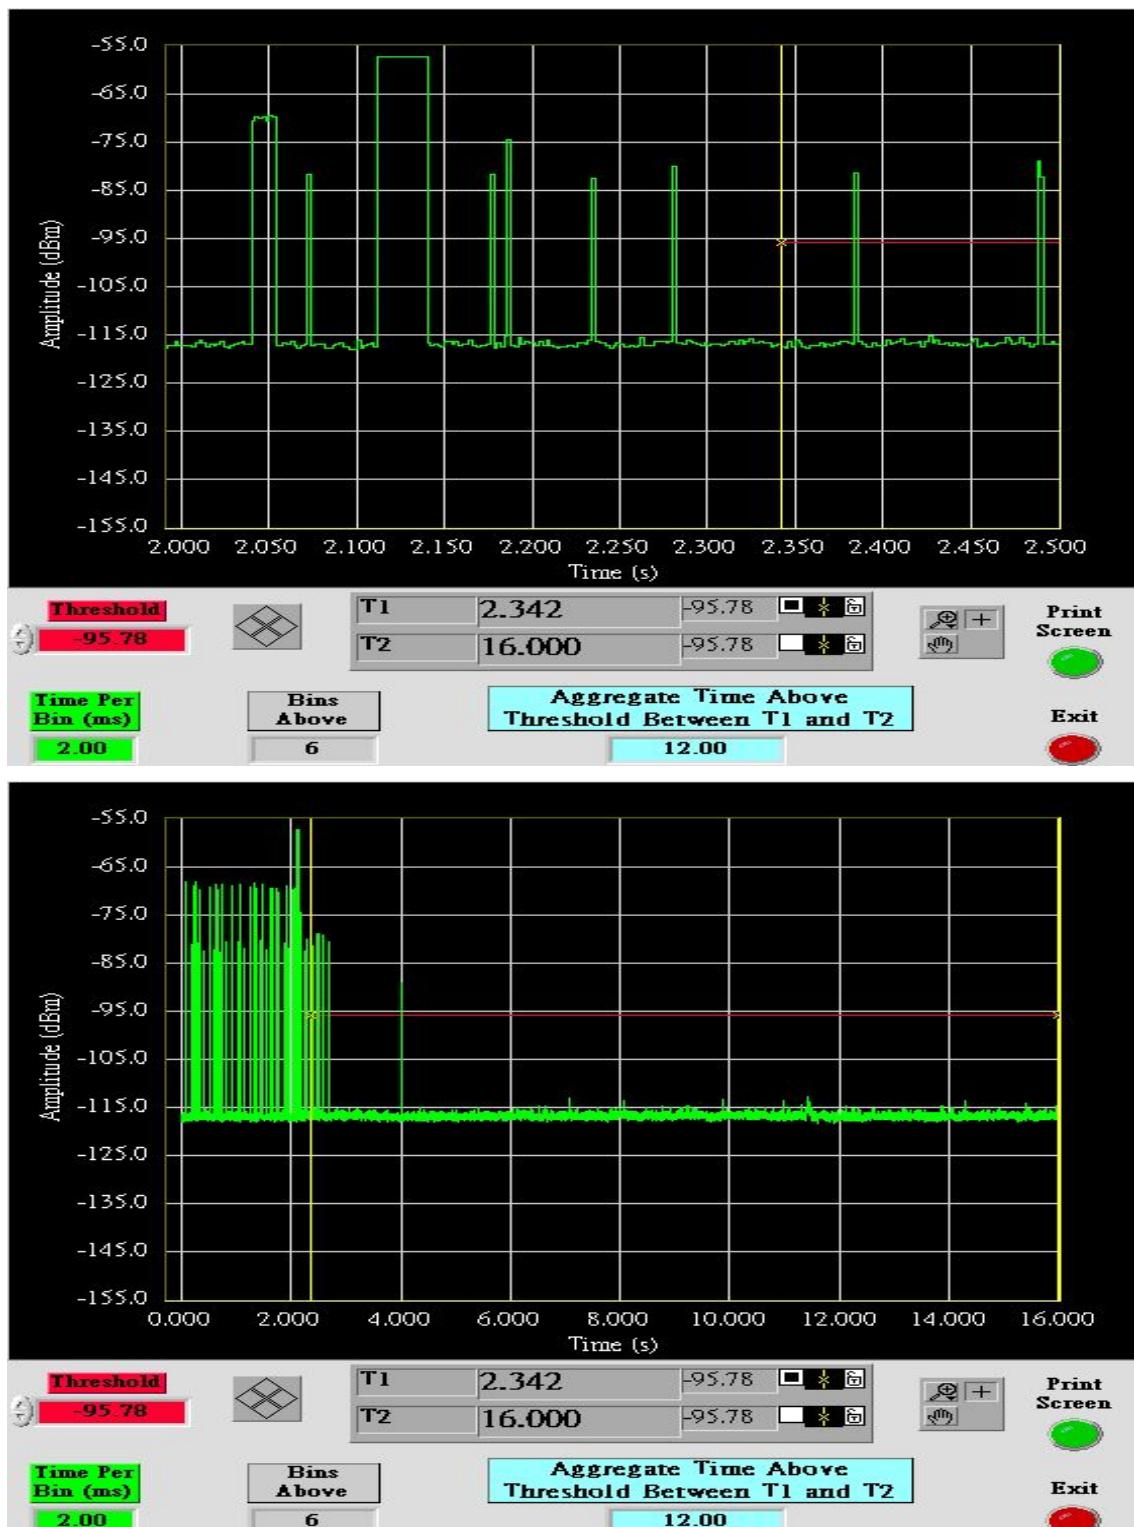




**draft 802.11n Wide-40 MHz Channel mode****Type 1 Channel Closing Transmission Time Results***No non-compliance noted.*

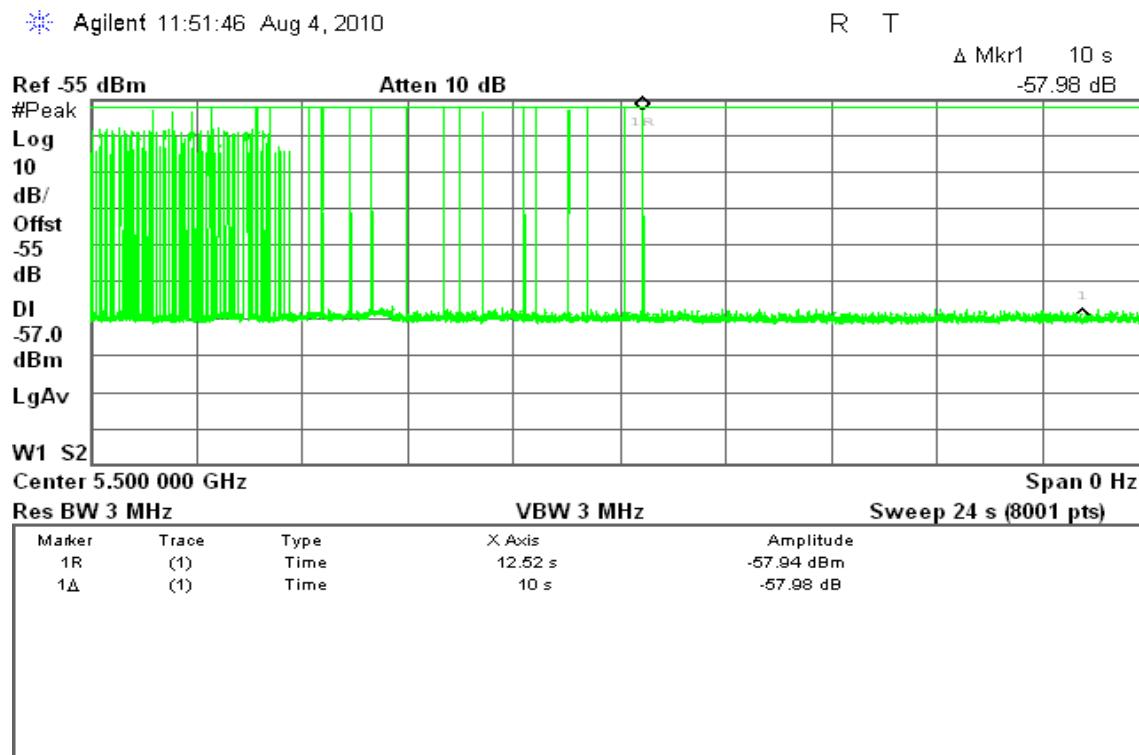
| Aggregate Transmission Time (ms) | Limit (ms) | Margin (ms) |
|-------------------------------------|---------------|----------------|
| 12 | 60 | -48 |





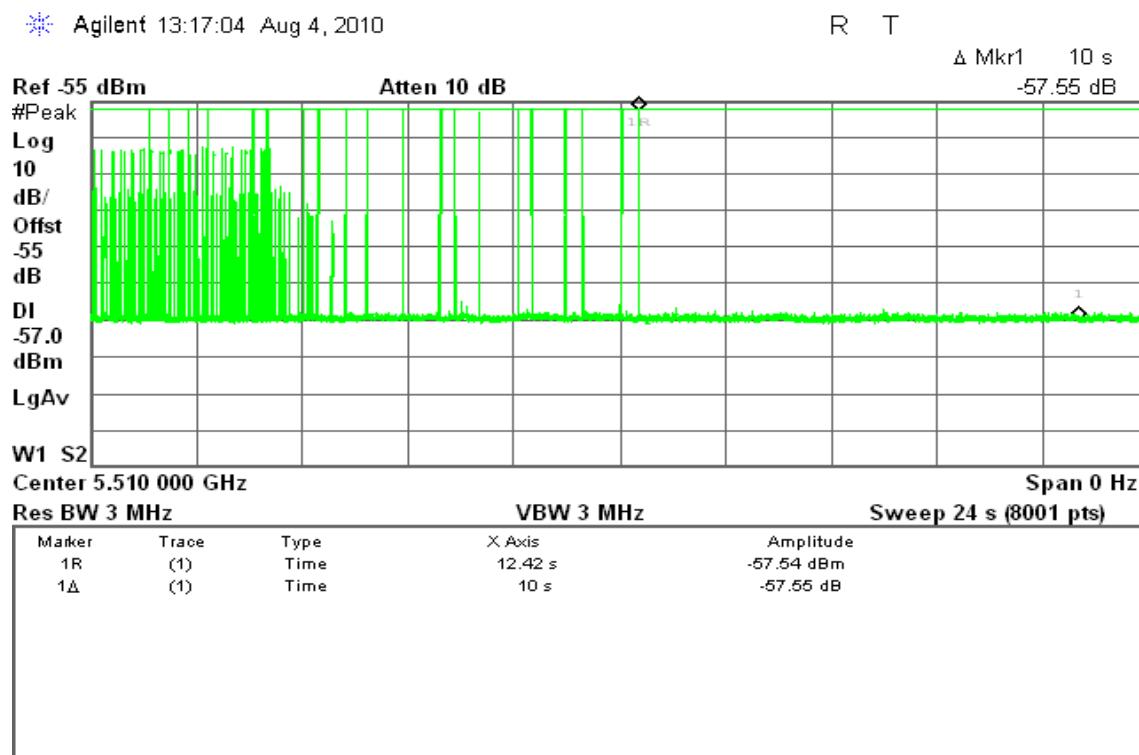
**draft 802.11n Standard-20 MHz Channel mode****Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.



**draft 802.11n Wide-40 MHz Channel mode****Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.





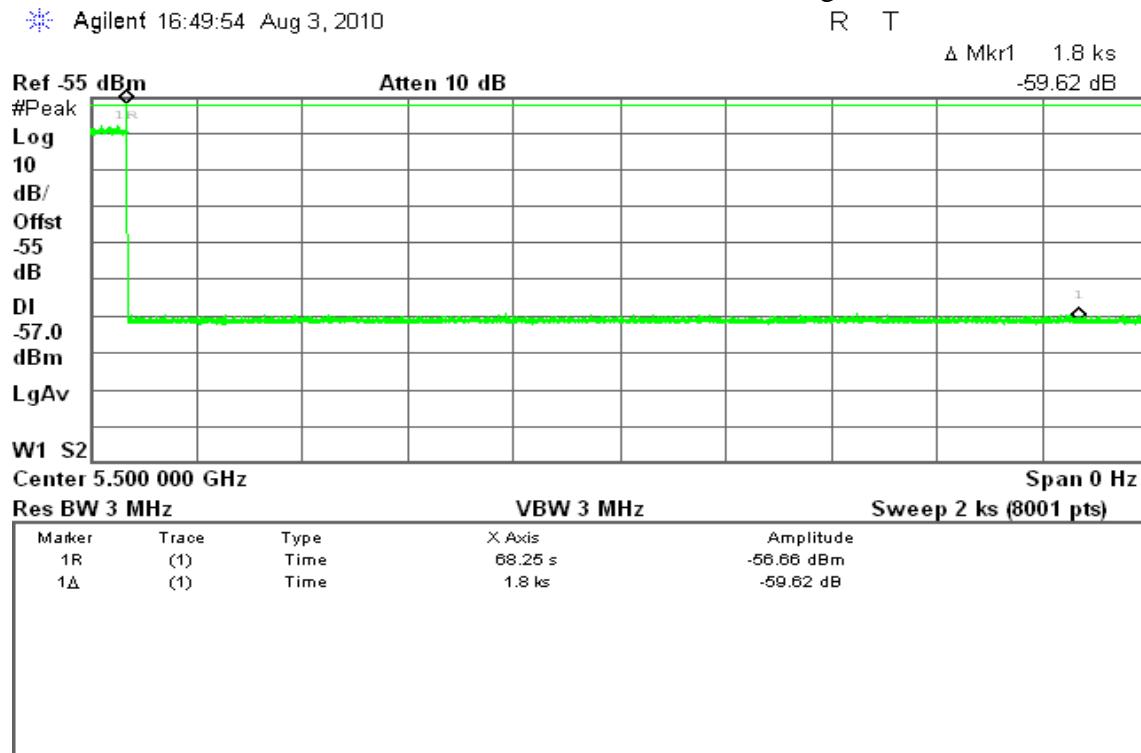
NON-OCCUPANCY PERIOD

draft 802.11n Wide-20 MHz mode

Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

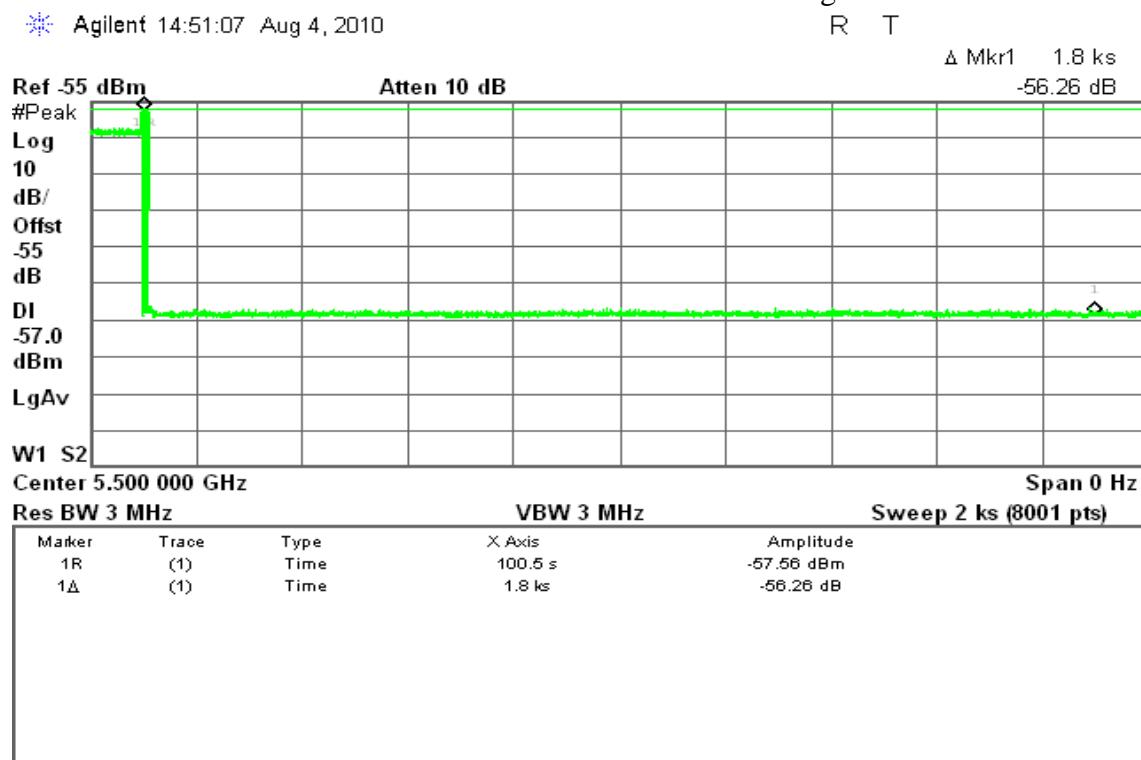




Type 5 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.



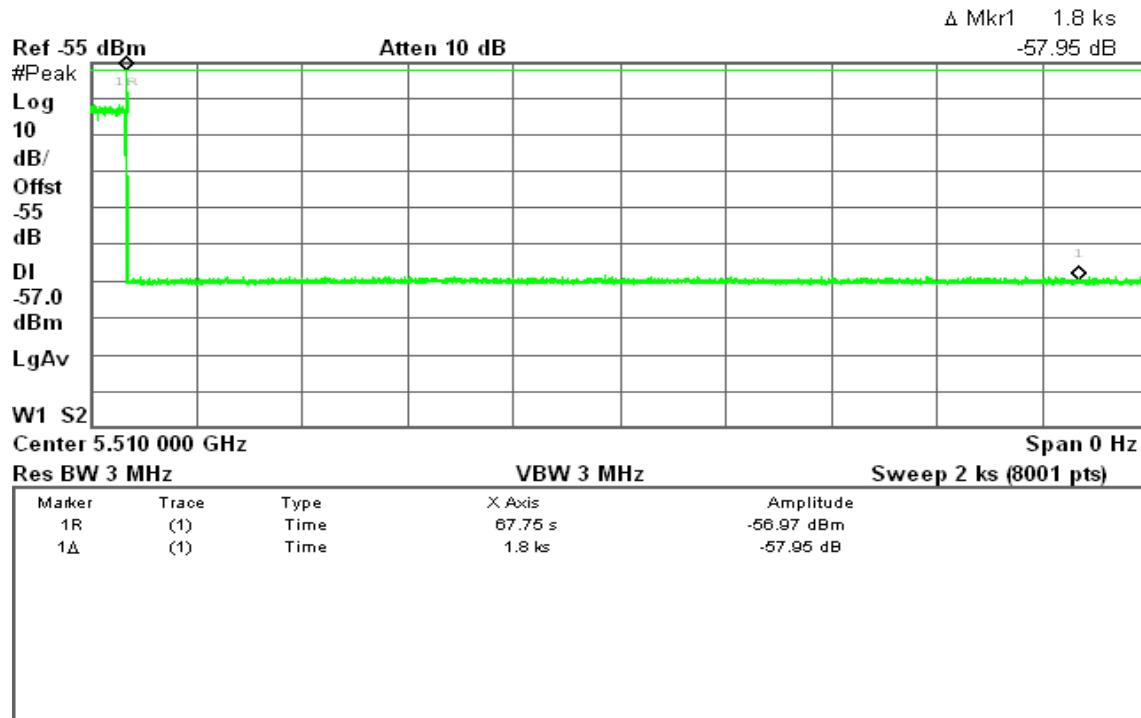
**draft 802.11n Wide-40 MHz mode****Type 1 Non-Occupancy Period Test Results**

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 16:27:55 Aug 4, 2010

R T





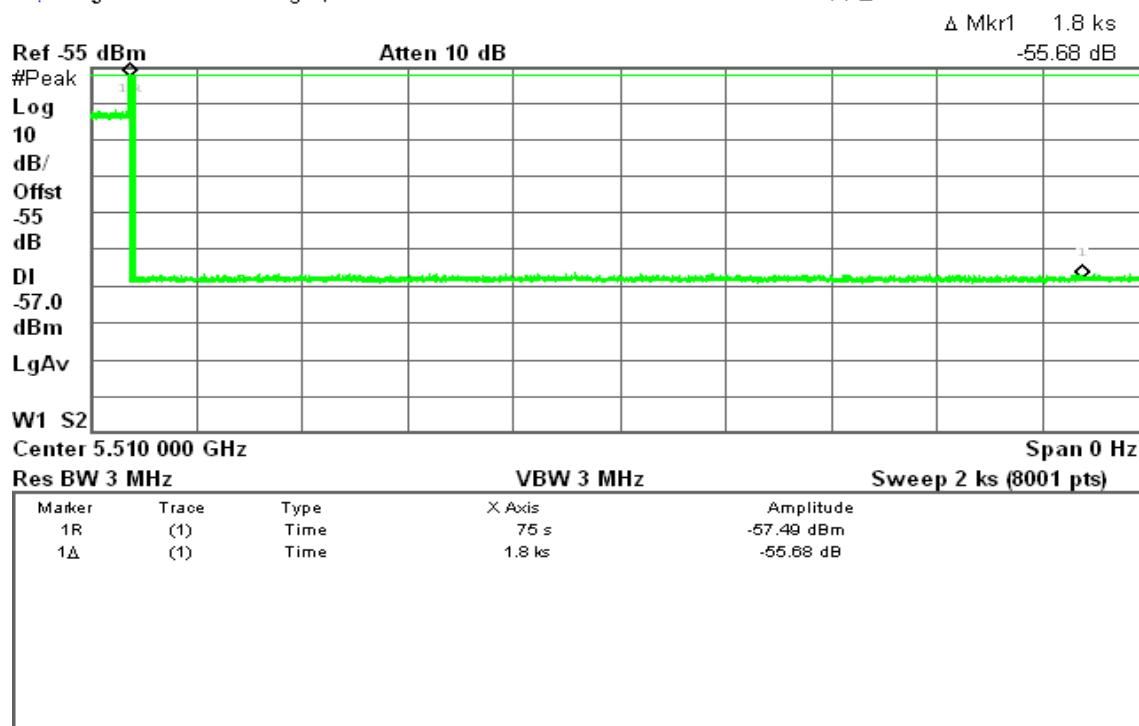
Type 5 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 14:09:22 Aug 4, 2010

R L





APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.407(f), U-NII devices are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

EUT Specification

| | |
|-----------------------------------|--|
| EUT | NOTEBOOK COMPUTER |
| Frequency band (Operating) | <input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input checked="" type="checkbox"/> WLAN: 5.15GHz ~ 5.35GHz <input checked="" type="checkbox"/> WLAN: 5.5GHz ~ 5.7GHz <input type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> Bluetooth: 2.402 GHz ~ 2.482 GHz <input type="checkbox"/> Others: _____ |
| Device category | <input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others: _____ |
| Exposure classification | General Population/Uncontrolled exposure ($S=1mW/cm^2$) |
| Antenna diversity | <input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity |
| Max. output power | IEEE 802.11a mode / 5180 ~ 5240MHz: 13.96 dBm (24.88mW) draft 802.11n Standard-20 MHz Channel mode / 5180 ~ 5240MHz: 9.51 dBm (8.93mW) draft 802.11n Wide-40 MHz Channel mode / 5190 ~ 5230MHz: 13.19 dBm (20.84mW) IEEE 802.11a mode / 5260 ~ 5320MHz: 17.3 dBm (53.70mW) draft 802.11n Standard-20 MHz Channel mode / 5260 ~ 5320MHz: 16.75 dBm (47.31mW) draft 802.11n Wide-40 MHz Channel mode / 5270 ~ 5310MHz: 16.98 dBm (49.88mW) IEEE 802.11a mode / 5500 ~ 5700MHz: 17.39 dBm (54.82mW) draft 802.11n Standard-20 MHz Channel mode / 5500 ~ 5700MHz: 17.19 dBm (52.36mW) draft 802.11n Wide-40 MHz Channel mode / 5510 ~ 5670MHz: 17.02 dBm (50.35mW) |



| | |
|---------------------------|---|
| Antenna gain (Max) | UNII Band I IEEE 802.11a: Gain: 2.41dBi UNII Band II: IEEE 802.11a: Gain: 1.86 UNII Band III: IEEE 802.11a: Gain: 3.48 |
| Evaluation applied | <input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A |

Remark:

1. The maximum output power is 17.39 dBm (54.82mW) at 5700MHz (with 3.48 numeric antenna gain.)
2. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.