



ELECTROMAGNETIC COMPATIBILITY TEST REPORT

Company : MITAC TECHNOLOGY CORP.
Address : No. 19-1, Innovation Rd. I, Hsinchu Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Sample Name : Tablet PC
Model : CA25
Date Received : JUN. 13, 2001
Date Tested : JUL. 26, 2001

MEASUREMENT REQUIREMENT USED :

FCC RULES AND REGULATION PART 15 SUBPART B
CLASS B OCTOBER 1998 AND ANSI C63.4 MAY 1992
CISPR 22, CLASS B, 1997

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	C.F.Wu/NVLAP	<i>C. F. Wu</i>	<i>Aug. 17, 2001</i>
Approving Manager	J. S. Song/NVLAP	<i>J. S. Song</i>	<i>Aug. 17, 2001</i>

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the date issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	3
1.1 GENERAL STATEMENT	3
1.2 DESCRIPTION OF EUT & POWER	3
1.3 DESCRIPTION OF PERIPHERALS	4
1.4 EUT & PERIPHERALS SETUP DIAGRAM	5
1.5 EUT OPERATING CONDITION	6
1.6 DESCRIPTION OF TEST SITE	6
2. CONDUCTED EMISSION TEST	7
2.1 TEST EQUIPMENTS	7
2.2 TEST SETUP	7
2.3 CONDUCTED POWER LINE EMISSION LIMIT	8
2.4 TEST PROCEDURE	8
2.5 UNCERTAINTY OF CONDUCTED EMISSION	8
2.6 CONDUCTED RF VOLTAGE MEASUREMENT	9
2.7 PHOTOS OF CONDUCTION TEST	10
3. RADIATED EMISSION TEST	11
3.1 TEST EQUIPMENTS	11
3.2 TEST SETUP	11
3.3 RADIATION LIMIT	12
3.4 TEST PROCEDURE	12
3.5 UNCERTAINTY OF RADIATED EMISSION	12
3.6 RADIATED RF NOISE MEASUREMENT	13
3.7 PHOTOS OF OPEN SITE	14-15



1. GENERAL INFORMATION

1.1 GENERAL STATEMENT

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to national or international std.

1.2 DESCRIPTION OF EUT & POWER

MANUFACTURER : MITAC TECHNOLOGY CORP.

SAMPLE NAME : Tablet PC

SAMPLE NAME including :

(1) IR Keyboard

Manufacturer : FORWARD CORP.

Model number : FDC-3402

Serial number : FDKB02600658

Power source : 3VDC/30mA(From battery)

(2) CD ROM

Manufacturer : Quanrta Storage

Model number: SCR-242

Serial number : PC012Q210500254

Power source : 5VDC/1.5A(From P.C.)

(3) Floppy

Manufacturer : MITSUMI CORP.

Model number: D353G

Power source : 5VDC(From P.C.)



Industrial Technology Research Institute

Electronics Research & Service Organization
Bldg. 17, 195-4 Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, 310
Taiwan, Republic Of China
TEL : 886-3-5917069 FAX : 886-3-5825720

FCC ID : MAU101
Report No. : 520-9006-018F
Page 4 of 15.

MODEL NUMBER : CA25

SERIAL NUMBER : Not applicable

POWER SOURCE : 19VDC (From Power Adapter)

I/O Port : USB Port x 1 ; Mic In Port x 1 ; Speaker Out Port x 1 ;
COM Port x 1 ; Replicator Port x 1 ; RJ11 Port x 1

Engineering Sample , Product Sample , Mass Product Sample

1.3 DESCRIPTION OF PERIPHERALS

(1) Modem

Manufacturer : Hayes Microcomputer Products, Inc.

Model number : 4007AM

Serial number : A10740073303

FCC ID : BFJ4000AM

(2) Mouse

Manufacturer : Logitech CORP.

Model number : M-BE55

Serial number : LZE12352615

FCC ID : 3892A218

(3) Ear phone


Manufacturer : JS CORP.

Model number : SR-MK02

Serial number : -----



1.4 EUT & PERIPHERALS SETUP DIAGRAM

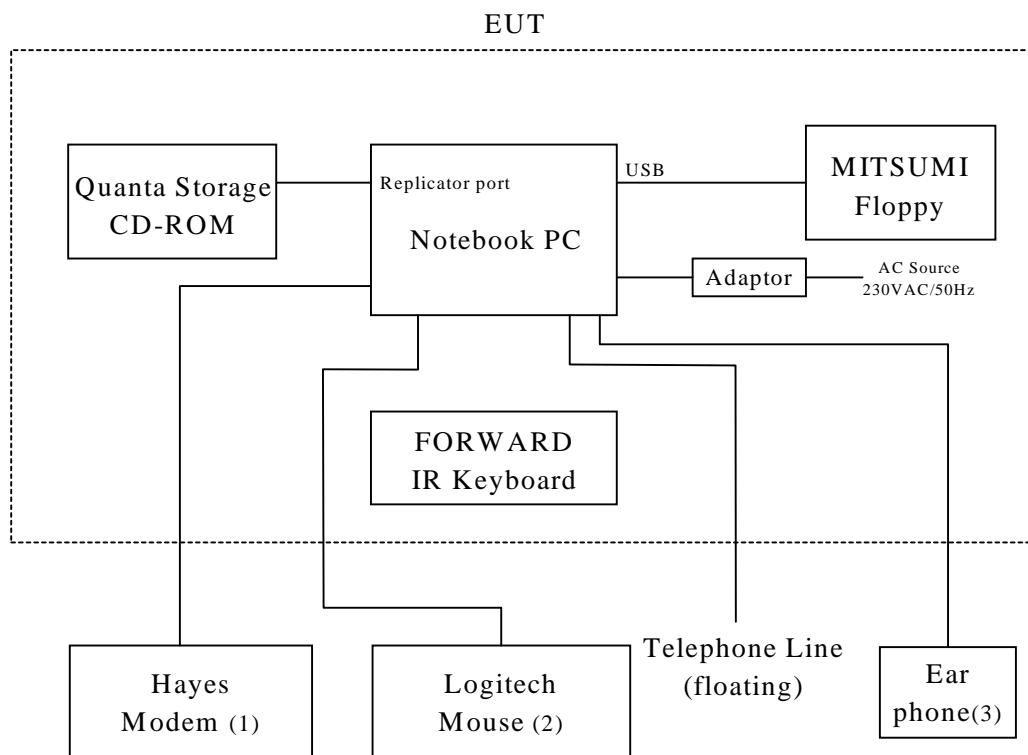

The indicated numbers (1)(2)---,please refer to item 1.3



1.5 EUT OPERATING CONDITION

1. Setup whole system for test as shown on setup diagram.
2. Powered on all equipments.
3. P.C. run “EMITEST.EXE” test program.
4. Starting test.

1.6 DESCRIPTION OF TEST SITE

SITE DESCRIPTION : FCC certificate NO. :31040/PRV
TUV certificate NO. :I9664582-9911
Lloyd's certificate NO. :LA003
BSMI certificate NO. :SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA certificate NO. :CNLA-ZL97018
VCCI certificate NO. : R-1229, C-1250

NAME OF SITE : Electronics Research & Service Organization
Industrial Technology Research Institute

SITE LOCATION : R1500, 195-4 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




2. CONDUCTED EMISSION TEST

2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	MAR. 29, 2001	1 Year	PRETEST
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	MAR. 29, 2001	1 Year	PRETEST
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A	N/A	FINAL
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	JAN. 08. 2001 For Characteristic impedance	1 Year	FINAL
			MAY. 18, 2001 For Insertion loss		
TEST RECEIVER	R/S ESHS30	838550/003	JAN. 03, 2001	1 Year	FINAL
SHIELDED ROOM	KEENE 5983	NO.1	N/A	N/A	FINAL
PULSE LIMIT	R/S EHS3Z2	357.8810.52	JUL. 10, 2001	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 10, 2001	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 10, 2001	1 Year	FINAL

2.2 TEST SETUP

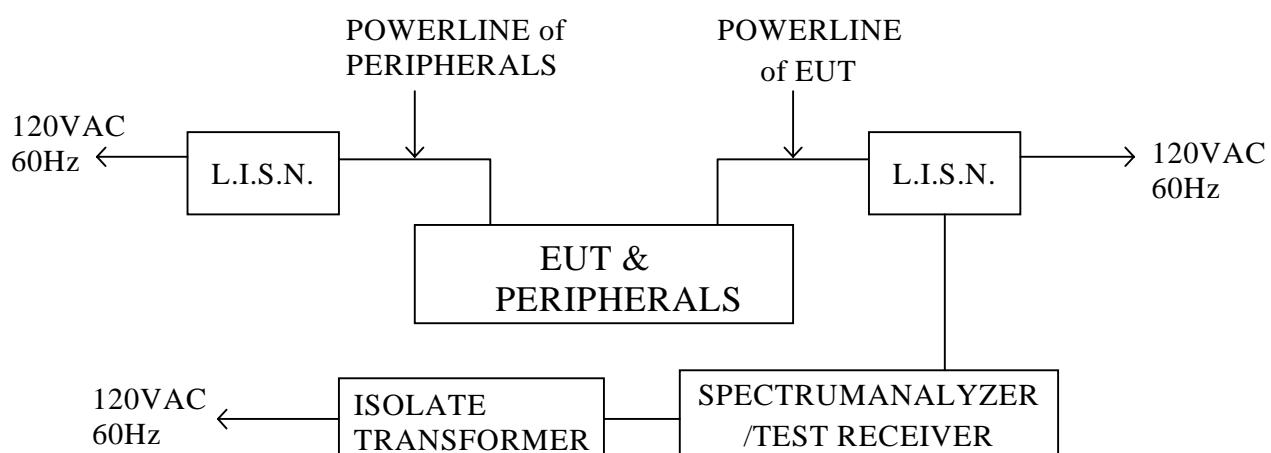



2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY (MHz)	MAXIMUM RF LINE VOLTAGE (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

2.4 TEST PROCEDURE

The test procedure is performed in a 12ftx 12ftx 8ft(Lx Wx H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)x 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is \pm 1.36dB.



2.6 CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 23°CHumidity : 60 % RH

FREQUENCY (MHz)	READING(dB μ V)				LIMITS (dB μ V)	
	ONE END & GRD'D		THE OTHER END & GRD'D			
	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	*	*	*	*	66.00	56.00
0.178	44.60	*	42.20	*	64.59	54.59
0.238	44.70	*	42.40	*	62.17	52.17
0.296	38.20	*	38.00	*	60.37	50.37
0.356	39.70	*	40.40	*	58.83	48.83
0.710	31.90	*	*	*	56.00	46.00
0.768	*	*	35.00	*	56.00	46.00
1.597	*	*	29.70	*	56.00	46.00
1.657	33.00	*	*	*	56.00	46.00
2.189	30.80	*	*	*	56.00	46.00
4.077	*	*	29.90	*	56.00	46.00
4.136	*	*	30.50	*	56.00	46.00
4.552	36.60	*	*	*	56.00	46.00
9.008	*	*	22.90	*	60.00	50.00
9.761	22.90	*	*	*	60.00	50.00
20.224	25.00	*	*	*	60.00	50.00
26.085	*	*	18.20	*	60.00	50.00
30.000	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.




Industrial Technology Research Institute

Electronics Research & Service Organization
Bldg. 17, 195-4 Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, 310
Taiwan, Republic Of China
TEL : 886-3-5917069 FAX : 886-3-5825720

FCC ID : MAU101
Report No. : 520-9006-018F
Page 10 of 15

2.7 PHOTOS OF CONDUCTION TEST

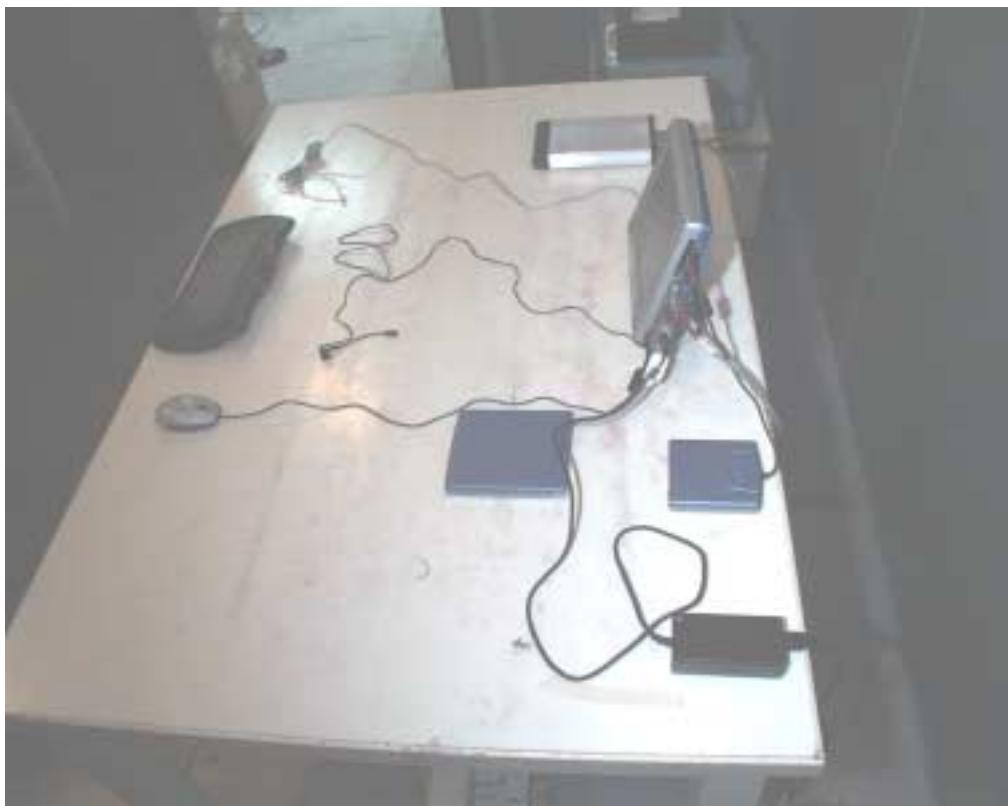



3. RADIATED EMISSION TEST


3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
CHASE BI-LOG ANTENNA	CBL6112B	2421	MAY 09, 2001	1 Year	FINAL
R/S TEST RECEIVER	ESCS 30	826547/004	MAY 28, 2001	1 Year	FINAL
OPEN SITE	-----	No.2	SEP. 08, 2000	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9513	004	JUL. 10, 2001	1 Year	FINAL

3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

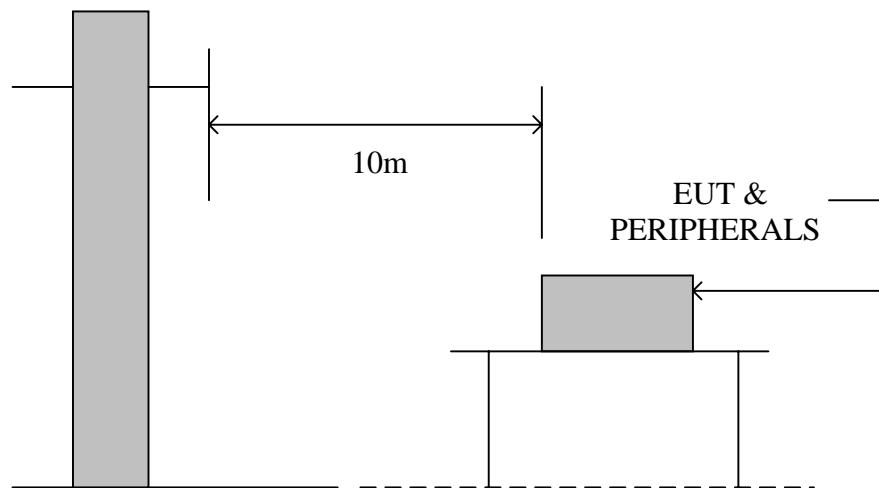

Antenna Elevation Variable



3.3 RADIATION LIMIT

All emanation from a class B computing device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below :

FREQUENCY (MHz)	DISTANCE (METERS)	FIELD STRENGTHS(dB μ V/m)	
		CLASS A	CLASS B
30—230	10	40	30
230—1000	10	47	37

Note : (1)The tighter limit shall apply at the edge between two frequency bands.
(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

3.4 TEST PROCEDURE

The devices under test were placed on a ratable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength. Both horizontal polarization and vertical polarization of the antenna are set to make the measurement. The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz. The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is \pm 2.72dB.



3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 26°C

Humidity : 68 % RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	METER READING AT10m(dB μ V)		LIMITS (dB μ V/m)	EMISSION LEVEL AT10m(dB μ V/m)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	18.06	0.90	*	*	30.00	*	*
166.68	10.38	2.54	11.51	14.05	30.00	24.43	26.97
200.00	10.05	2.60	14.35	14.48	30.00	27.00	27.13
228.90	11.62	2.89	9.22	5.26	30.00	23.73	19.77
233.43	11.87	2.93	12.60	15.31	37.00	27.40	30.11
240.00	12.23	3.00	16.61	11.81	37.00	31.84	27.04
248.88	12.71	3.09	14.25	13.99	37.00	30.05	29.79
300.00	13.46	3.30	15.59	13.03	37.00	32.35	29.79
336.04	14.40	3.52	10.16	9.07	37.00	28.08	26.99
343.36	14.59	3.56	12.88	7.16	37.00	31.03	25.31
373.34	15.37	3.74	10.59	9.63	37.00	29.70	28.74
399.33	16.04	3.90	9.17	3.58	37.00	29.11	23.52
500.00	17.78	4.30	8.71	6.27	37.00	30.79	28.35
622.24	19.64	4.70	8.84	2.00	37.00	33.18	26.34
746.70	20.24	5.45	4.60	3.43	37.00	30.29	29.12
1000.00	21.24	6.40	*	*	37.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/m) = Antenna Factor (dB/m) + Cable loss (dB)
 + Meter Reading (dB μ V).



Industrial Technology Research Institute

Electronics Research & Service Organization

Bldg. 17, 195-4 Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, 310
Taiwan, Republic Of China
TEL : 886-3-5917069 FAX : 886-3-5825720

FCC ID : MAU101
Report No. : 520-9006-018F
Page 14 of 15

3.7 PHOTOS OF OPEN SITE





Industrial Technology Research Institute

Electronics Research & Service Organization

Bldg. 17, 195-4 Sec. 4, Chung Hsing Rd., Chutung, Hsinchu, 310
Taiwan, Republic Of China
TEL : 886-3-5917069 FAX : 886-3-5825720

FCC ID : MAU101
Report No. : 520-9006-018F
Page 15 of 15

3.7 PHOTOS OF OPEN SITE

