

CFR 47 FCC Part 15.247

TEST REPORT

E.U.T. : **NoteBook PC**

Trade Name : MTC ; GTEAC

Model Number : 8212X

FCC ID : MAU8212X

Prepared for

MiTAC Technology Corp.

9th Fl., No. 75, Ming Sheng East Road, Sec. 3, Taipei, Taiwan, R.O.C.

TEL. : +886 2 2506 8898

FAX. : +886 2 2509 5887

Prepared by

Interocean EMC Technology Corp.

244 No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark :

1. The test report consists of **54** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document. The test results in the report only to the tested sample.
2. The report prohibit used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Statement of Compliance

Applicant: MiTAC Technology Corp.
Manufacturer: Getac Technology (Kunshan) Co., Ltd.
EUT Description: NoteBook PC
Model No.: 8212X
Serial No.: N/A
Tested Power Supply: 120Vac; 60Hz
Date of Final Test: Nov. 28, 2007

Configuration of Measurements and Standards Used :

FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2007/12/10

Test Engineer: _____
Anya Lee

Checked: _____
Danny Tang

Approved: _____
Jerry Liu

Table of Contents

1	General Information	5
1.1	Description of Equipment Under Test	5
1.2	Technical Specifications	6
1.3	Table for Carrier Frequencies	7
1.4	Test Facility	8
1.5	Test Equipment	9
1.6	Summary of Measurement	10
1.7	Justification	11
2	20dB Bandwidth test	12
2.1	Limit	12
2.2	Configuration of Measurement	12
2.3	Test Procedure	12
2.4	Test Result	12
3	Carrier Frequency Separation test	15
3.1	Limit	15
3.2	Configuration of Measurement	15
3.3	Test Procedure	15
3.4	Test Result	15
4	Number of hopping frequencies test	17
4.1	Configuration of Measurement	17
4.2	Test Procedure	17
4.3	Test Result	17
5	Time of Occupancy (dwell time) test	19
5.1	Limit	19
5.2	Configuration of Measurement	19
5.3	Test Procedure	19
5.4	Test Result	19
6	Maximum Output Power test	24
6.1	Limit	24
6.2	Configuration of Measurement	24
6.3	Test Procedure	24
6.4	Test Result	24
7	RF Conducted spurious emission	26
7.1	Limit	26
7.2	Configuration of Measurement	26
7.3	Test Procedure	26
7.4	Test Result	26

8 RF Radiated spurious emission test	30
8.1 Limit	30
8.2 Configuration of Measurement	30
8.3 Test Procedure	31
8.4 Test Result	31
9 Emission on the Band Edge test	34
9.1 Limit	34
9.2 Configuration of Measurement	34
9.3 Test Procedure	34
9.4 Test Result	34
10 AC Power Line Conducted Emission test	42
10.1 Limit	42
10.2 Configuration of Measurement	42
10.3 Test Procedure	42
10.4 Test Result	42
11 Photographs of Test	47
11.1 Power Line Conducted Emission Measurement	47
11.2 Radiated Emission Measurement	48
12 Photographs of EUT	50

1 General Information

1.1 Description of Equipment Under Test

Equipment Under Test : NoteBook PC

Model Number : 8212X

Serial Number : N/A

Type of Sample Tested : ☒Proto-type ☐Pre-Production ☐Mass Production

Applicant : **MiTAC Technology Corp.**

9th Fl., No. 75, Ming Sheng East Road, Sec. 3, Taipei, Taiwan, R.O.C.

Manufacturer : **Getac Technology (Kunshan) Co., Ltd.**

Kunshan Export Processing Zone, 215300 Jiangsu, P.R.China

Power Adapter : Manufacturer: Delta, M/N: ADP-45AD A, S/N: 86W0731000118

Input: 100~240Vac, 50~60Hz, 1.2A

Power cord: ☒Non-shielded ☒Detachable, 1.8 m ☒w/o core

Output: 15Vdc, 3A

Power cable: ☒Non-shielded ☒Un-detachable, 1.8m ☒ w/o core

Operating Frequency : 2402MHz ~ 2480MHz

Channel Number : 79 channels

Type of Modulation : GFSK ; $\pi/4$ DQPSK ; 8 DPSK

Antenna description : This device uses PCB Printed antenna.

Antenna Gain	:	1.31dBi
Connector type	:	U.FL

Sample Receive date : Nov. 12, 2007

Date of Test : Nov. 26~28, 2007

1.2 Technical Specifications

Key parts	SKU A	SKU B
Memory	Hynix 1Gbit DDR	Samsung 1Gbit DDR
CPU	Intel McCaslin - Stealey, 800MHz	
LCD Monitor	Toshiba, PI-LTD121EW6S	
Bluetooth	BTM-203B EDRV2.0 ver1.2	
HDD	Toshiba, (40GB, 1.8", PATA), Model: MK4009GAL	
ODD	TEAK, (DVDSuper-multi) DVW28ECPUBA	
Modem	Billinton, Model :RD002-D330	
Wireless LAN	AzureWave, (802.11abgn, Mini PCI-E) Model : AW-NEW770 (1024)	Askey, (802.11abg, Mini PCI-E) Model : WLL4080-D12
3G	Novatel, EU870D	None
AC/DC Adapter	Delta, ADP-45ADA	
Battery (LITHIUM)	SANYO, 6Cell, 11.1V/5.2AH	SANYO, 3CELLS, 11.1V/2.6AH

Bluetooth Module Information

Complete 2.4GHz radio transceiver and baseband
Bluetooth™ version 2.0+ EDR compliant embedded
Bluetooth™ qualified
Small footprint (26.0mm x 14.0mm x 4.17mm)
Bluetooth™ Class 2 operation (up to 10 meter range)
Board to wire connector on Board
CSR BlueCore4-ROM, single chip Bluetooth™ system
SPI interface can upgrade firmware
Park, Sniff, Hold and Sleep low power modes
Added ESD protection circuit into module supply voltage pins to prevent electrostatic damage
Shielding mask GND layout design to reduce EMI issue
Built in a +1.8V regulator.
Programmable collaborative coexistence scheme

1.3 Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	31	2432 MHz	61	2462 MHz
2	2403 MHz	32	2433 MHz	62	2463 MHz
3	2404 MHz	33	2434 MHz	63	2464 MHz
4	2405 MHz	34	2435 MHz	64	2465 MHz
5	2406 MHz	35	2436 MHz	65	2466 MHz
6	2407 MHz	36	2437 MHz	66	2467 MHz
7	2408 MHz	37	2438 MHz	67	2468 MHz
8	2409 MHz	38	2439 MHz	68	2469 MHz
9	2410 MHz	39	2440 MHz	69	2470 MHz
10	2411 MHz	40	2441 MHz	70	2471 MHz
11	2412 MHz	41	2442 MHz	71	2472 MHz
12	2413 MHz	42	2443 MHz	72	2473 MHz
13	2414 MHz	43	2444 MHz	73	2474 MHz
14	2415 MHz	44	2445 MHz	74	2475 MHz
15	2416 MHz	45	2446 MHz	75	2476 MHz
16	2417 MHz	46	2447 MHz	76	2477 MHz
17	2418 MHz	47	2448 MHz	77	2478 MHz
18	2419 MHz	48	2449 MHz	78	2479 MHz
19	2420 MHz	49	2450 MHz	79	2480 MHz
20	2421 MHz	50	2451 MHz		
21	2422 MHz	51	2452 MHz		
22	2423 MHz	52	2453 MHz		
23	2424 MHz	53	2454 MHz		
24	2425 MHz	54	2455 MHz		
25	2426 MHz	55	2456 MHz		
26	2427 MHz	56	2457 MHz		
27	2428 MHz	57	2458 MHz		
28	2429 MHz	58	2459 MHz		
29	2430 MHz	59	2460 MHz		
30	2431 MHz	60	2461 MHz		

1.4 Test Facility

Site Description	:	☒ OATS 2 ☒ Conduction 1
Name of Firm	:	Interocean EMC Technology Corp.
Company web	:	http://www.ietc.com.tw
Site 1, 2 Location	:	No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
Site 3, 4 Location	:	No. 12, Ruei-Shu Valley, Ruei-Ping Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
Site Filing	:	● Federal Communication Commissions – USA Registration No.: 96399 (OATS 1 & 2) Registration No.: 518958 (OATS 3 & 4) ● Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan Registration No. (Conducted Room): C-1094 Registration No. (Conducted Room): T-271 Registration No. (OATS 1): R-1040 Registration No. (OATS 2): R-1041 ● Industry Canada (IC) Submission: 113543 ● Japan Electrical Safety & Environment Technology Laboratories (JET) Registration No.: 04S03-01
Site Accreditation	:	● Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C. Accreditation No.: SL2-IN-E-0026 for CNS13438 / CISPR22 SL2-R1-E-0026 for CNS13439 / CISPR13 SL2-R2-E-0026 for CNS13439 / CISPR13 SL2-A1-E-0026 for CNS13783-1 / CISPR14-1 ● National Voluntary Laboratory Accreditation Program (NVLAP) - USA NVLAP LAB CODE 200458 ● Nemko AS Authorization No.: ELA 181A Authorization No.: ELA 181B ● Taiwan Accreditation Foundation (TAF) Accrditation No.: 1113



1.5 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Last Calibration
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100135	2007/08/03
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2007/07/17
L.I.S.N.	Rohde & Schwarz	ESH3-Z5	100176	2007/02/14
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	843602/02	2007/09/10
RF Cable	HARBOUR	RG400	CBL04	2007/08/09
Spectrum Analyzer	Agilent	8564EC	4046A00331	2007/03/29
Spectrum Analyzer	R&S	FSQ	200406	2007/03/29
Biconical Antenna	Schwarzbeck	VHA 9103	2484	2007/09/06
Log Antenna	Schwarzbeck	UHALP 9108	A 0765	2007/09/06
Pre-Amplifier	HP	8447D	2944A10321	2007/07/17
Preamplifier	Agilent	8449B	3008A01434	2007/04/03
RF Cable	Ultra Link	CBL02	CBL02	2007/05/04
Cable	IETC	CBL07	CBL07	2007/05/08

Note: All instrument upon which need to be calibrated are within calibration period of 1 year.

Instrument	Manufacturer	Model	Serial No.	Last Calibration
Horn Antenna	COM-POWER	AH-118	10081	2006/05/16
Horn Antenna	SCHWARZBECK	BBHA9120	9120D-583	2006/12/18

Note: All instrument upon which need to be calibrated are within calibration period of 2 year.

1.6 Summary of Measurement

Report Clause	Test Parameter	Reference Document CFR47 Part15	Results
2	20dB Bandwidth test	§15.247(a)(1)	Pass
3	Carrier Frequency Separation test	§15.247(a)(1)	Pass
4	Number of hopping frequencies test	§15.247(a)(1)	Pass
5	Time of Occupancy (dwell time) test	§15.247(a)(1)	Pass
6	Maximum Peak output power test	§15.247(b)	Pass
7	RF Conducted spurious emission	§15.247(c)	Pass
8	RF Radiated spurious emission test	§15.205, 15.209	Pass
9	Emission on the Band Edge test	§15.247(d)	Pass
10	AC Power Line Conducted Emission test	§15.247(b)	Pass

1.7 Justification


The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of the frequency band were all arrive limit requirement, thus we evaluate the EUT pass the specified test.

2 20dB Bandwidth test

2.1 Limit

No regulation limit, for reference purpose.

2.2 Configuration of Measurement



2.3 Test Procedure

The 20dB bandwidth per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100 kHz, the video bandwidth $\geq$ RBW, and the SPAN may equal to approximately 2 to 3 time the 20dB bandwidth.


2.4 Test Result

PASS.

The final test data is shown on as following pages.


Test Mode : GFSK ; $\pi/4$ DQPSK ; 8 DQPSK			
Test CH		20dB Bandwidth (MHz)	Limit (kHz)
Modulation	Frq. (MHz)		
GFSK	2441	1.1378	>500
$\pi/4$ DQPSK	2441	1.3862	>500
8 DQPSK	2441	1.3942	>500

2441 GFSK 20dB

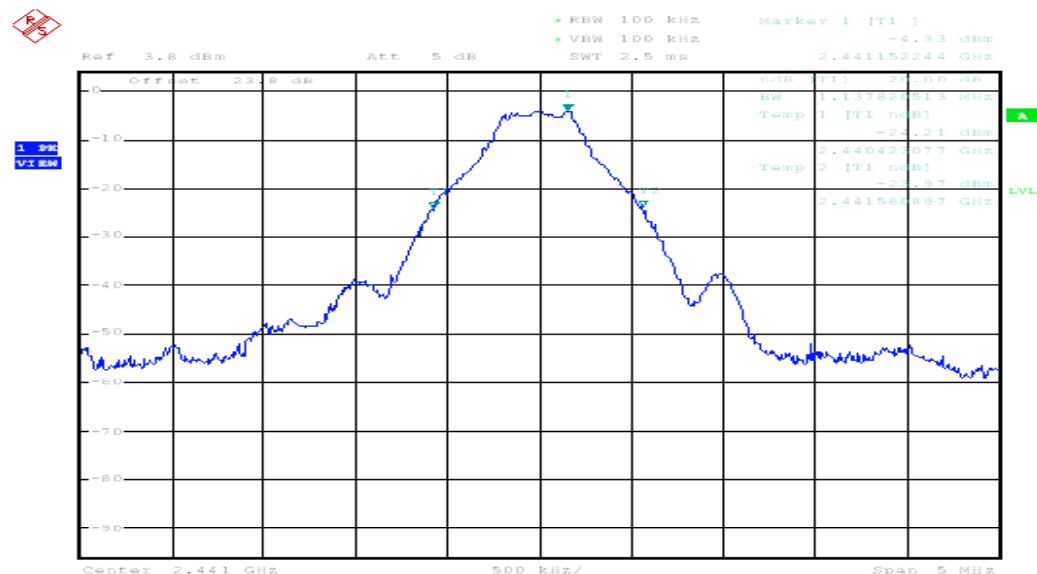


Date: 20.NOV.2007 20:12:01

2441 $\pi/4$ DQPSK 20dB

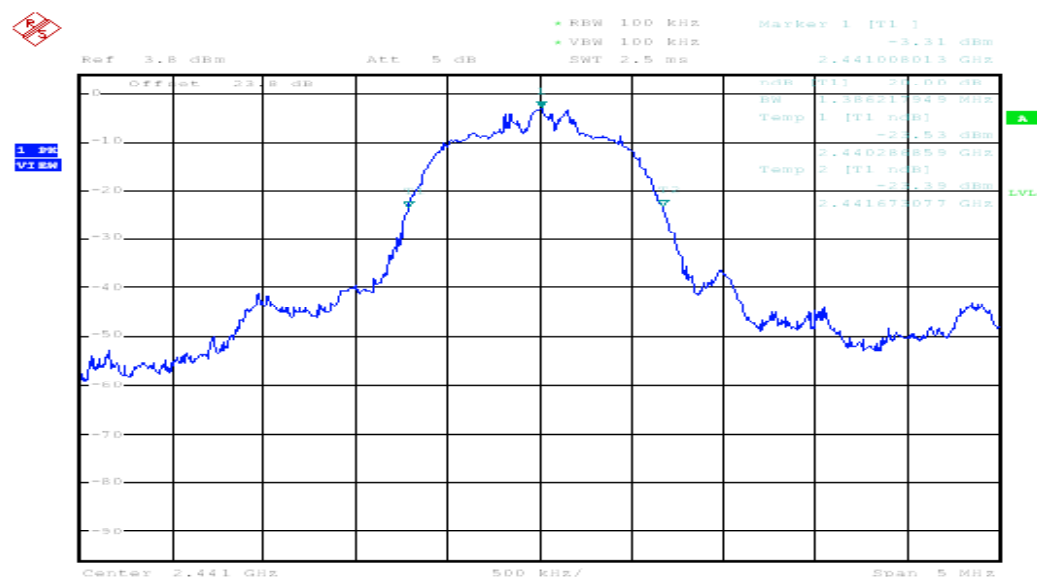

Date: 20.NOV.2007 20:13:36

2441 8DPSK 20dB

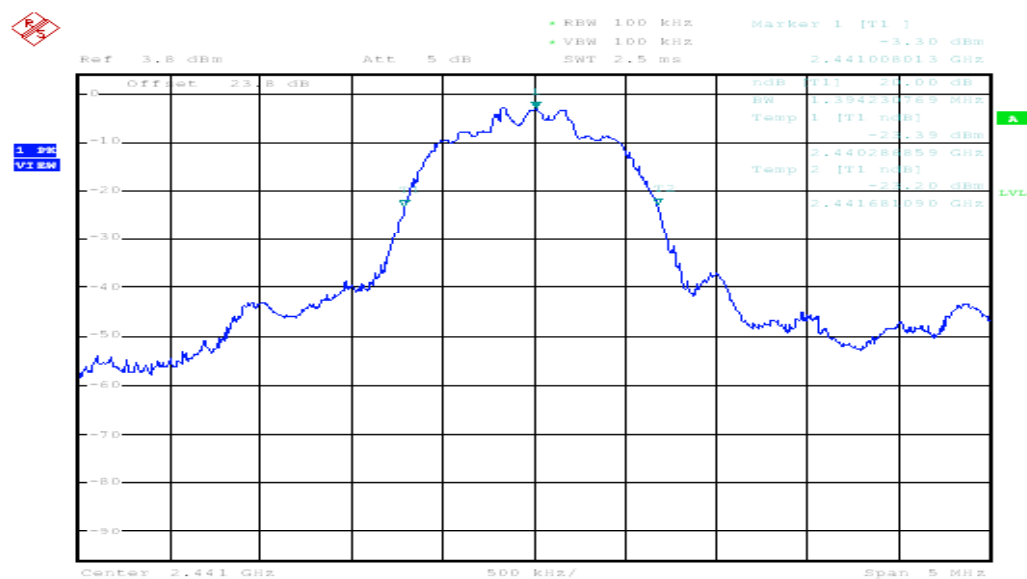


Date: 20.NOV.2007 20:15:38

3 Carrier Frequency Separation test

3.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Configuration of Measurement



3.3 Test Procedure

The carrier frequency separation per FCC Part15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth $\geq$ RBW, and the SPAN was wide enough to capture the peaks of two adjacent channels.


3.4 Test Result

PASS.

The final test data is shown on as following pages.


Modulation	Carrier Frequency Separation (kHz)
GFSK	995.192
$\pi/4$ DQPSK	995.192
8 DQPSK	995.192

GFSK Separation

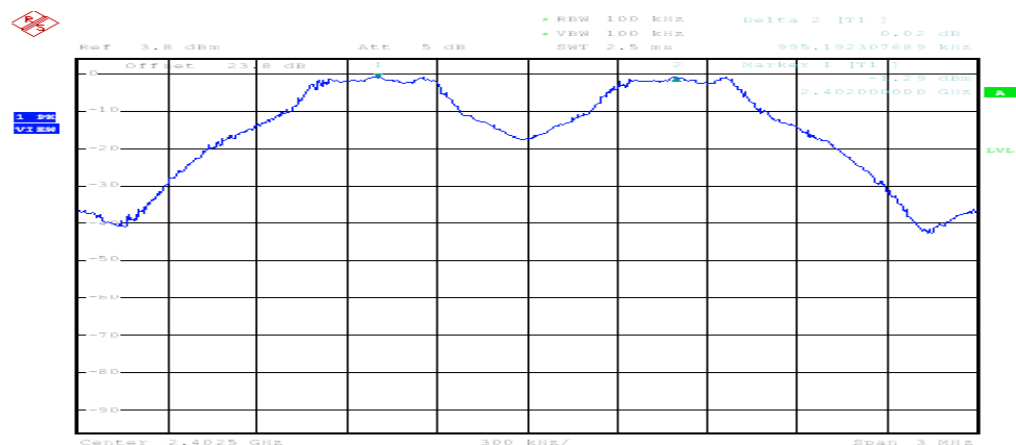


Date: 20.NOV.2007 20:28:26

$\pi/4$ DQPSK Separation

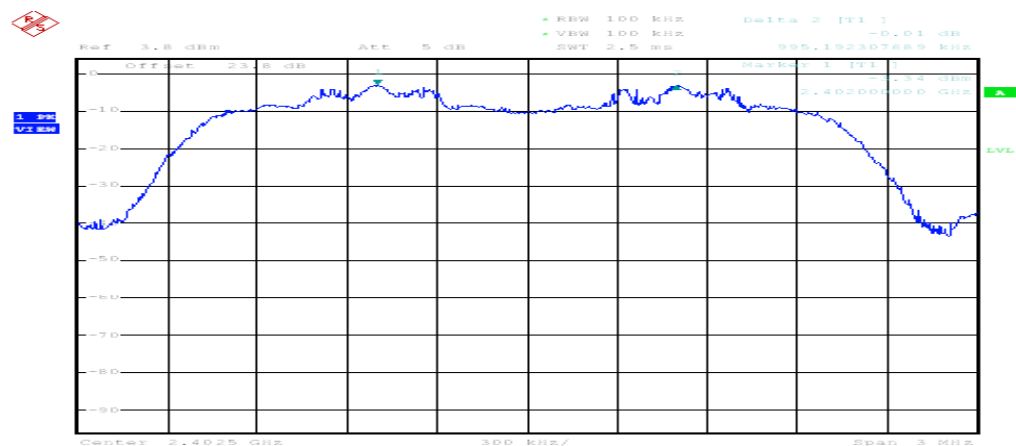

Date: 20.NOV.2007 20:25:38


8 DPSK Separation

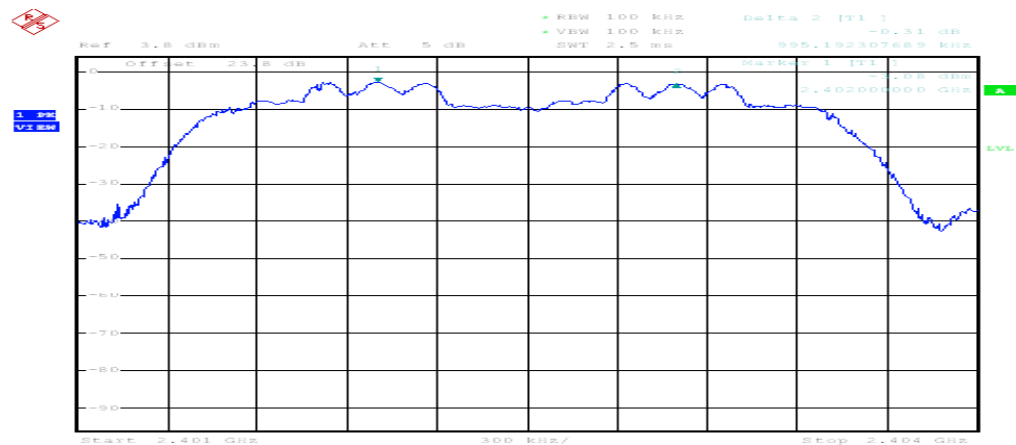

Date: 20.NOV.2007 20:22:29

4 Number of hopping frequencies test

4.1 Configuration of Measurement



4.2 Test Procedure

The number of hopping frequencies per FCC Part15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth $\geq$ RBW, and the SPAN was the frequency band of operation.


4.3 Test Result

PASS.

The final test data is shown on as following pages.


Modulation	No. of Hopping CH.
GFSK	79
$\pi/4$ DQPSK	79
8 DQPSK	79

GFSK channel number

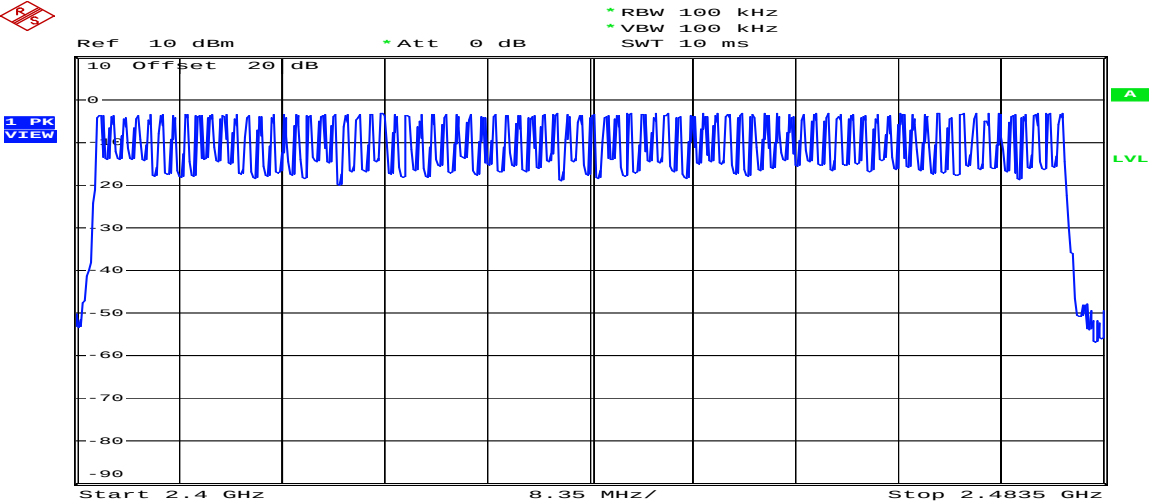


Date: 30.NOV.2007 10:48:34

$\pi/4$ DQPSK channel number

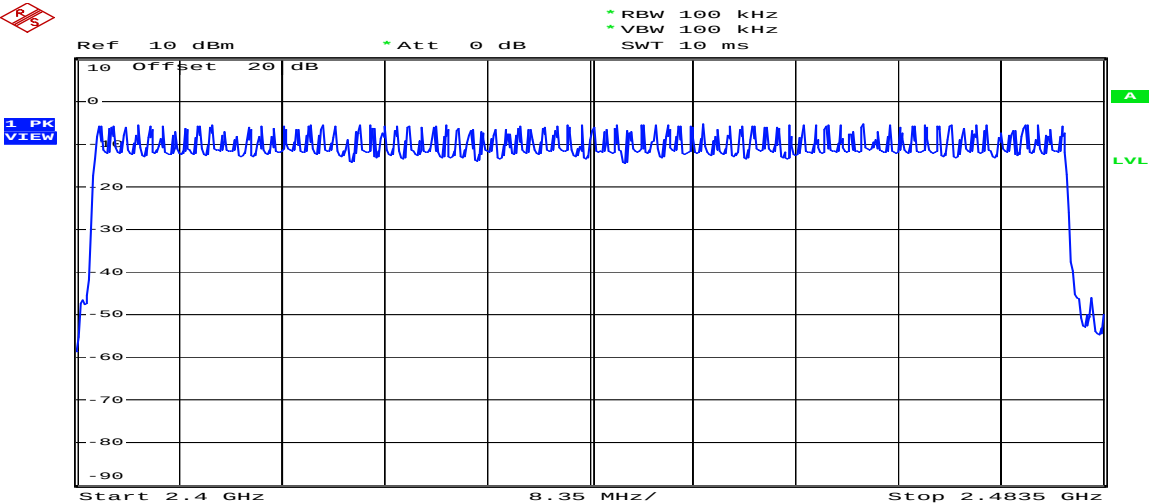

Date: 30.NOV.2007 10:52:21

8 DQPK channel number

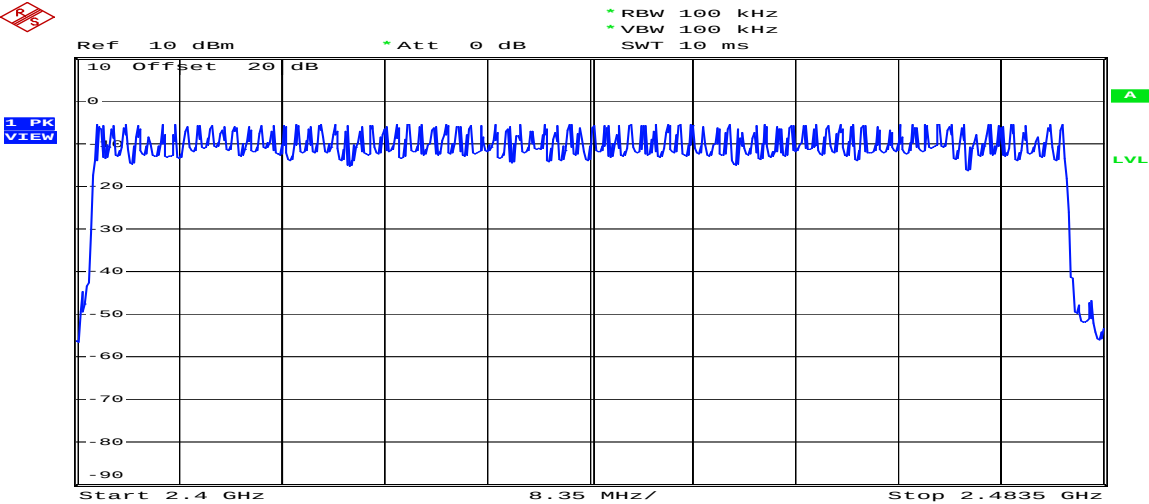


Date: 30.NOV.2007 10:56:20

5 Time of Occupancy (dwell time) test

5.1 Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 second within a period of 0.4 second multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.2 Configuration of Measurement



5.3 Test Procedure

According to FCC Part15.247(a)(1) the time of occupancy (dwell time) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth $\geq$ RBW and the zero span function of spectrum analyzer was enable. The EUT has its hopping function enable.

Formula for Dwell time calculation:

Dwell time = time slot * hop rate * 1/s / 79 *31.6s


5.4 Test Result

PASS.

The final test data is shown on as following pages.


Dwell Time Test						
Modulation Type	Packet Type	Time Slot Length (ms)	Hop Rate (Hz)	Dwell Time (s)	Limit (s)	Test Result
GFSK	DH1	0.426	800	0.133	<0.4	PASS
	DH3	1.688	400	0.264	<0.4	PASS
	DH5	2.944	266	0.306	<0.4	PASS
$\pi/4$ DQPSK	DH1	0.439	800	0.137	<0.4	PASS
	DH3	1.701	400	0.266	<0.4	PASS
	DH5	2.961	266	0.308	<0.4	PASS
8 DPSK	DH1	0.432	800	0.135	<0.4	PASS
	DH3	1.701	400	0.266	<0.4	PASS
	DH5	2.96	266	0.308	<0.4	PASS

GFSK DH1 Dwell time

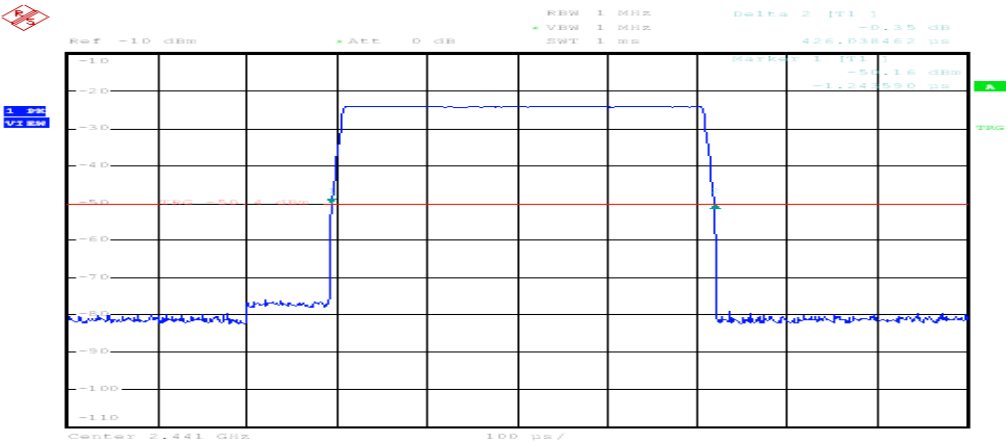


Date: 21.NOV.2007 09:40:18

$\pi/4$ DQPSK DH1 Dwell time

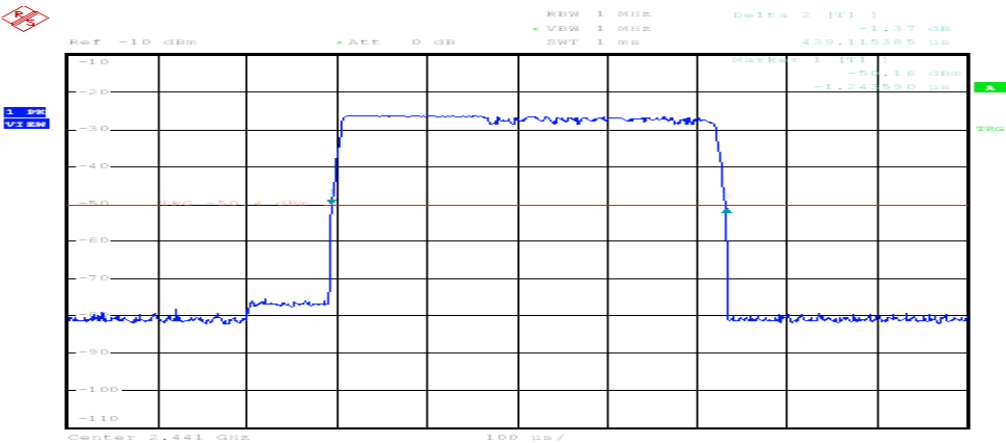


Date: 21.NOV.2007 09:42:01

8 DQPSK DH1 Dwell time

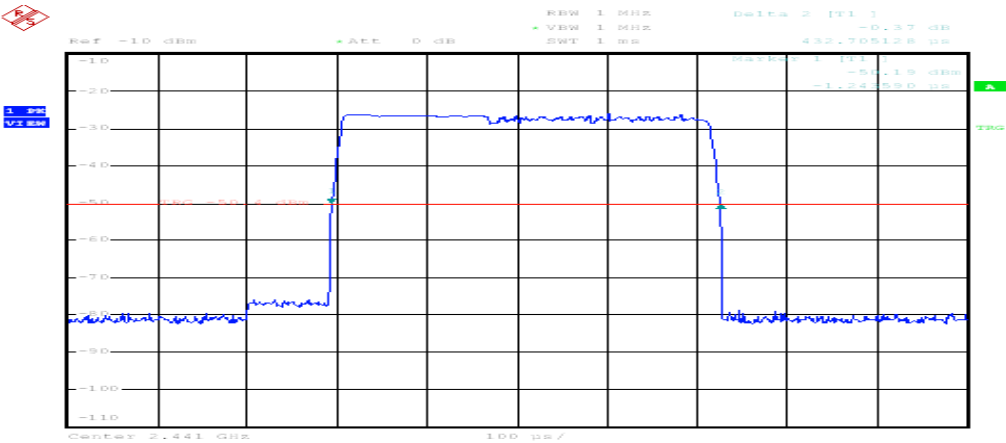


Date: 21.NOV.2007 09:43:26

GFSK DH3 Dwell time

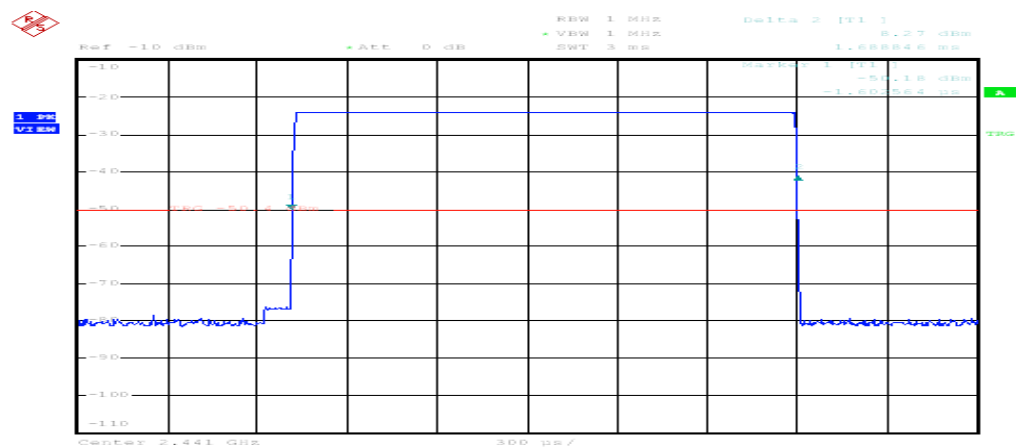


Date: 21.NOV.2007 09:35:24

$\pi/4$ DQPSK DH3 Dwell time

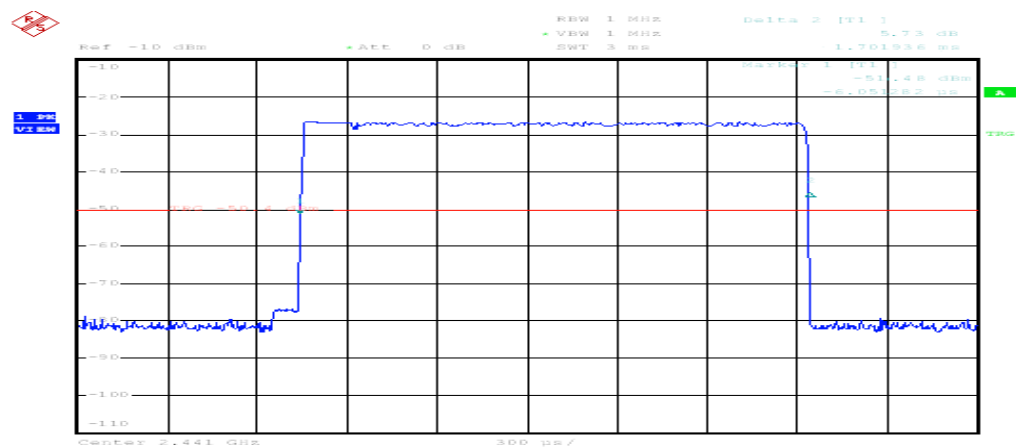


Date: 21.NOV.2007 09:44:51

8 DQPSK DH3 Dwell time

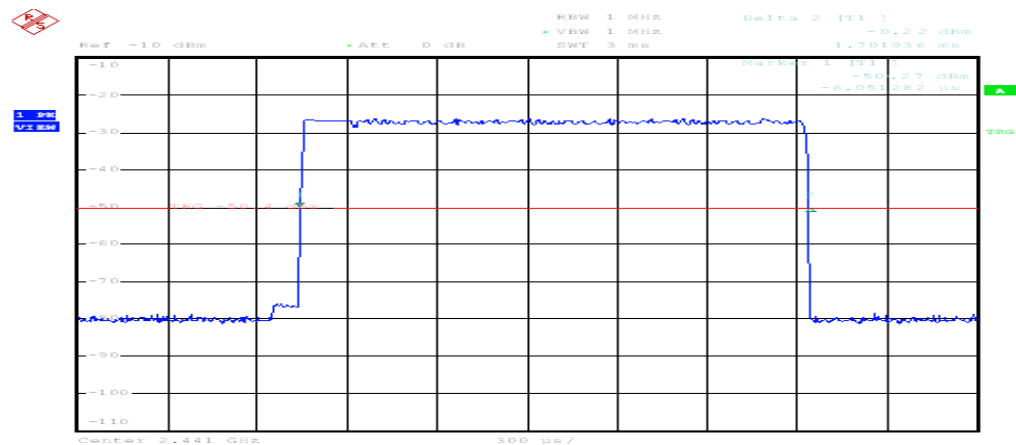


Date: 21.NOV.2007 09:45:57

GFSK DH5 Dwell time

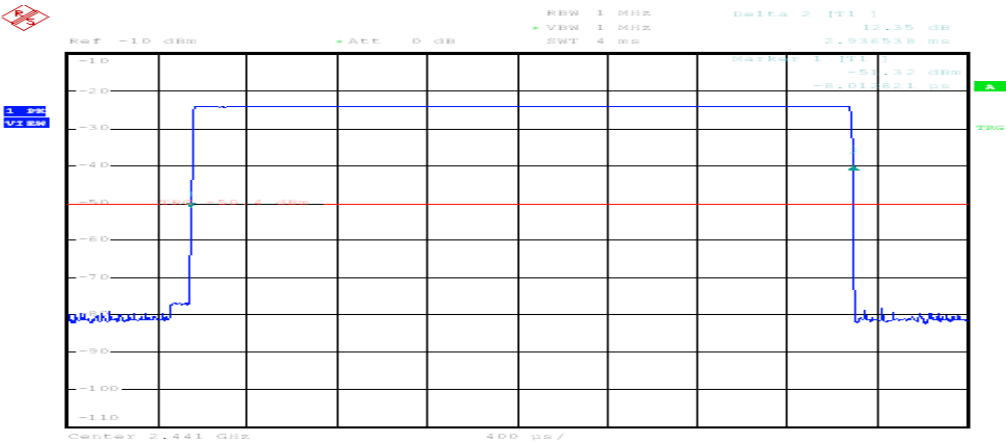


Date: 21.NOV.2007 09:37:57

$\pi/4$ DQPSK DH5 Dwell time

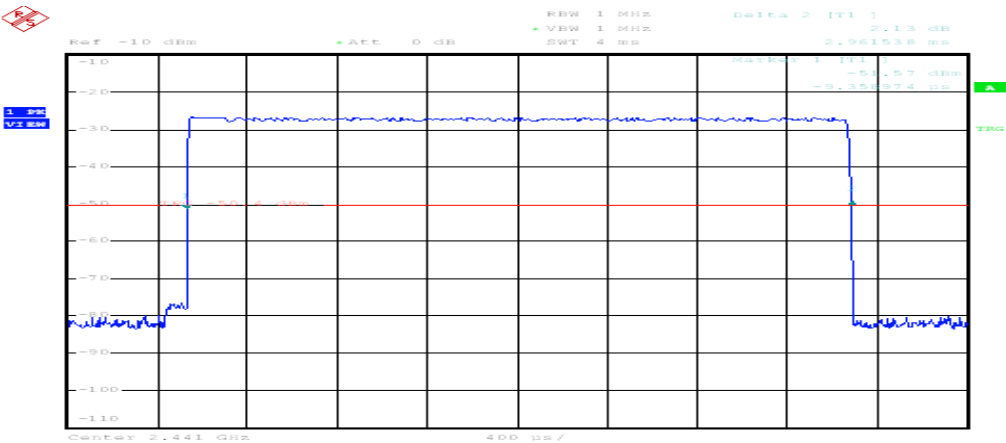

Date: 21.NOV.2007 09:47:42

8 DQPSK DH5 Dwell time

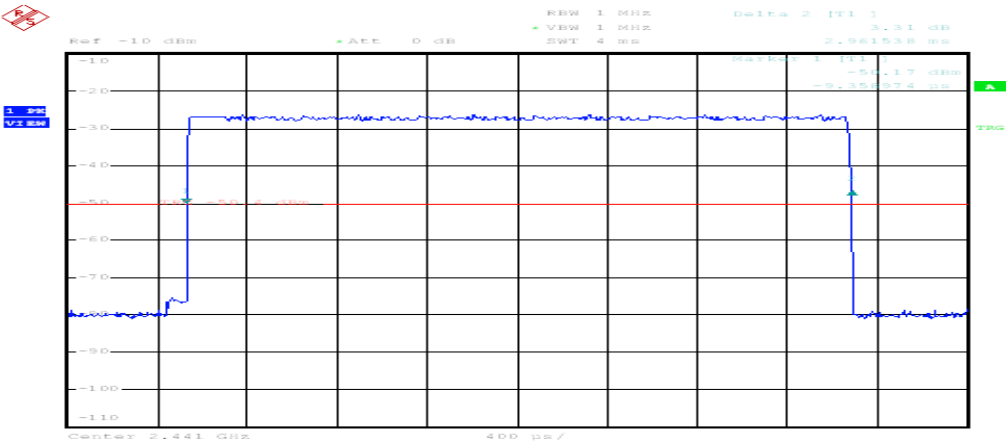

Date: 21.NOV.2007 09:48:41


6 Maximum Output Power test

6.1 Limit

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 watts.

6.2 Configuration of Measurement



6.3 Test Procedure

For FCC Part 15.247(b) the power output per was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Peak output power was read directly from power meter. The test was performed at 3 channels (lowest, middle and highest).

6.4 Test Result

PASS.

The final test data is shown on as following pages.

Mode : GFSK					
CH	Frq. MHz	Maximum transmit power (dBm)		Limit (dBm)	Margin (dB)
		AV	PK		
1	2402	1.16	2.76	30	-27.24
40	2441	1.36	2.97	30	-27.03
79	2480	1.48	3.00	30	-27.00

Mode : $\pi/4$ DQPSK					
CH	Frq. MHz	Maximum transmit power (dBm)		Limit (dBm)	Margin (dB)
		AV	PK		
1	2402	0.25	2.13	30	-27.87
6	2441	0.32	2.20	30	-27.80
11	2480	0.13	2.05	30	-27.95

Mode : 8 DQPSK					
CH	Frq. MHz	Maximum transmit power (dBm)		Limit (dBm)	Margin (dB)
		AV	PK		
1	2402	-1.18	2.13	30	-27.87
6	2441	-2.82	2.20	30	-27.80
11	2480	-3.02	2.05	30	-27.95


7 RF Conducted spurious emission

7.1 Limit

According to FCC Part 15.247(d) requirement :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.2 Configuration of Measurement



7.3 Test Procedure

RF antenna conducted spurious emissions was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz.


The measurements were performed from 30MHz to 25GHz.

7.4 Test Result


PASS.

The final test data is shown on as following pages.


GFSK 2402 Conducted spurious

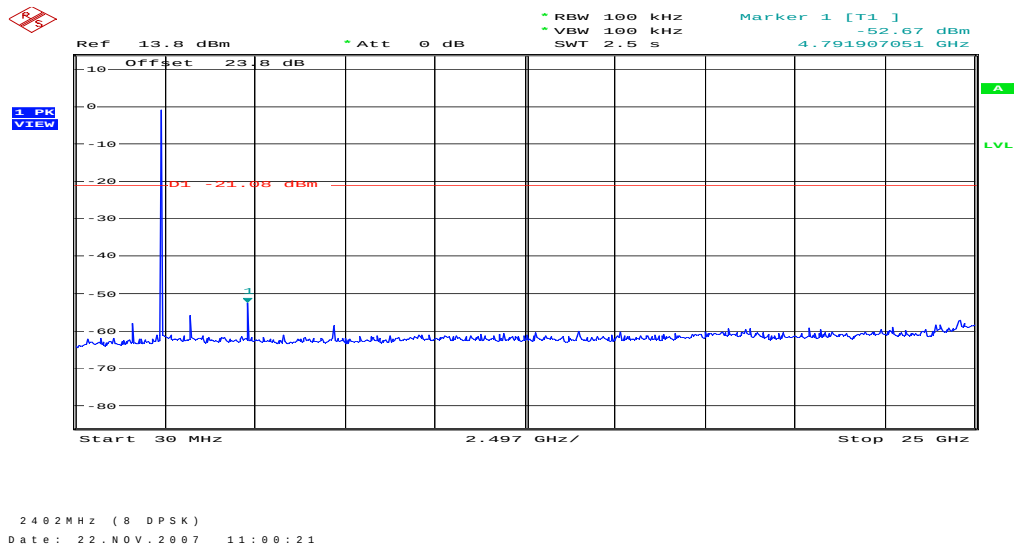


GFSK 2441 Conducted spurious

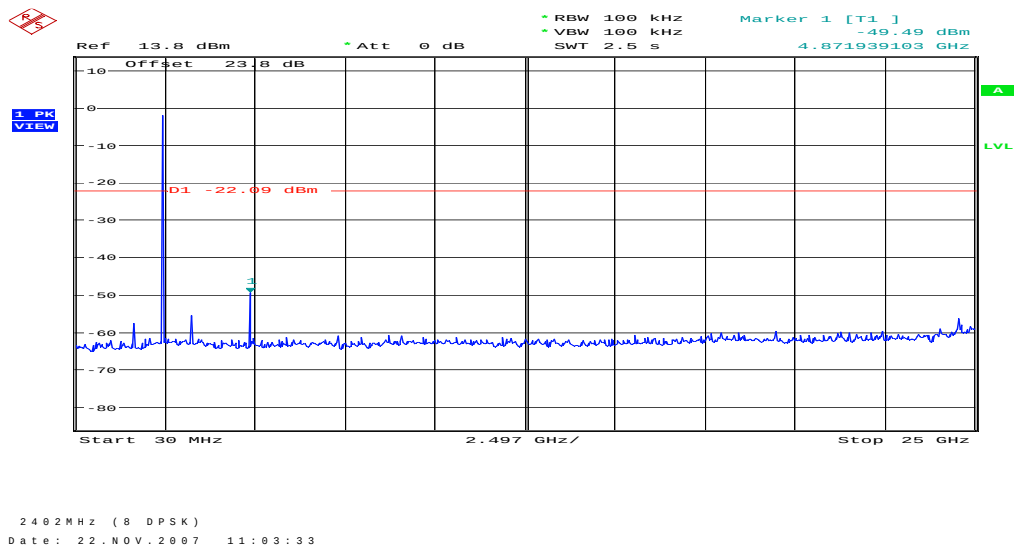


GFSK 2480 Conducted spurious

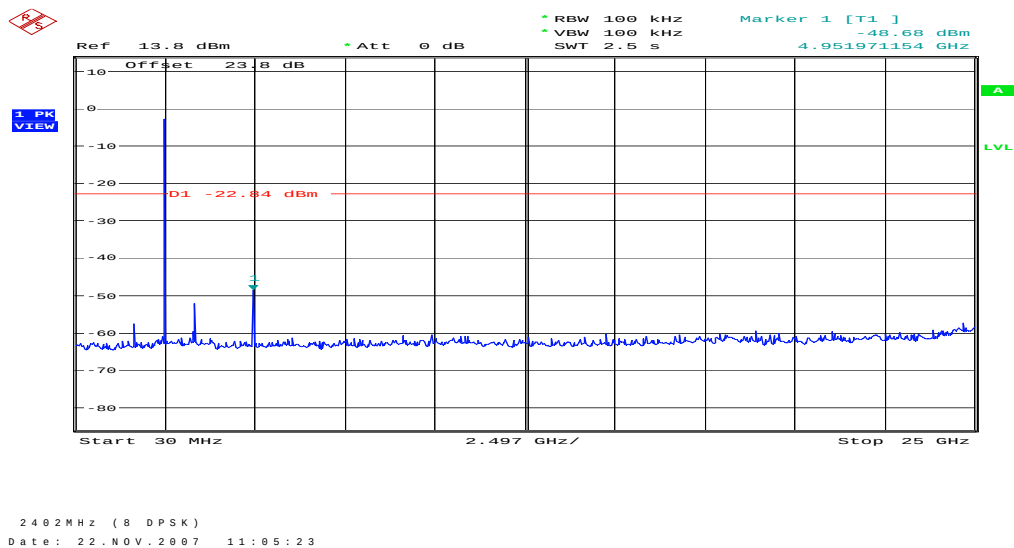


$\pi/4$ DQPSK 2402 Conducted spurious

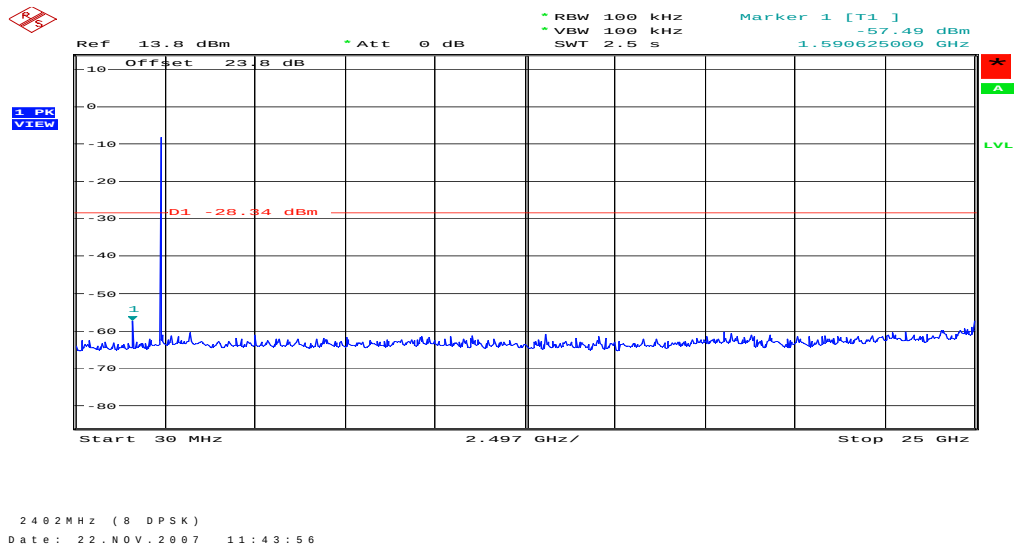


$\pi/4$ DQPSK 2441 Conducted spurious

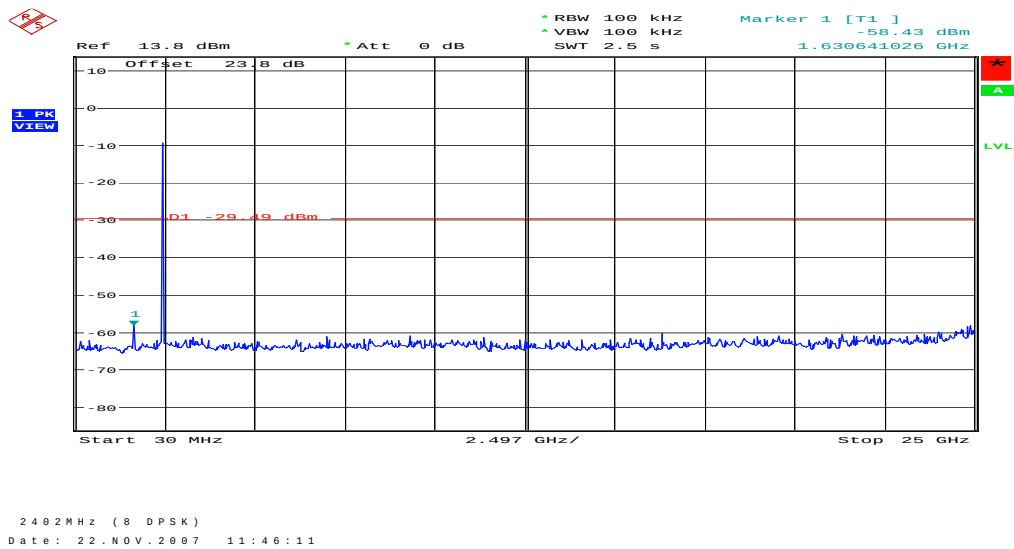


$\pi/4$ DQPSK 2480 Conducted spurious

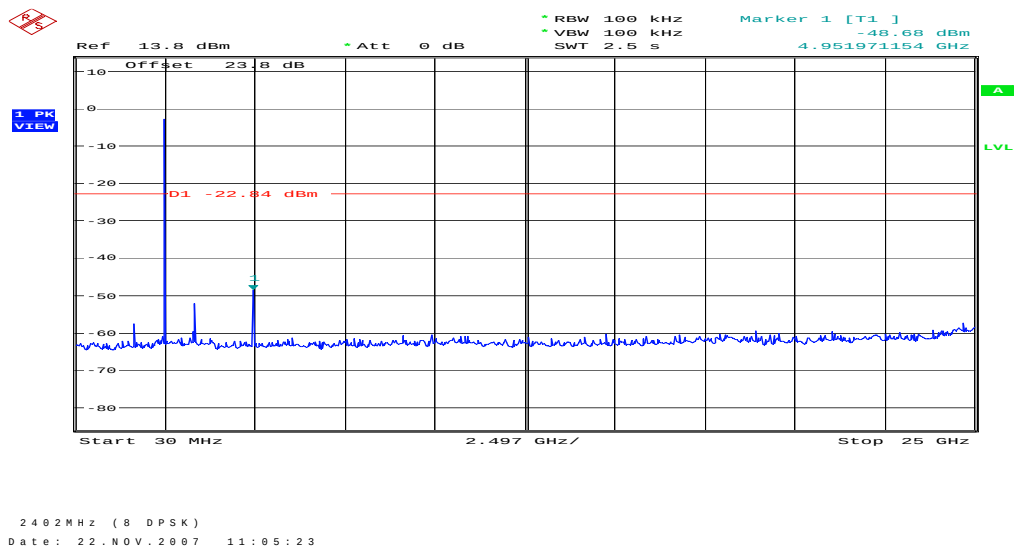


8 DQPSK 2402 Conducted spurious

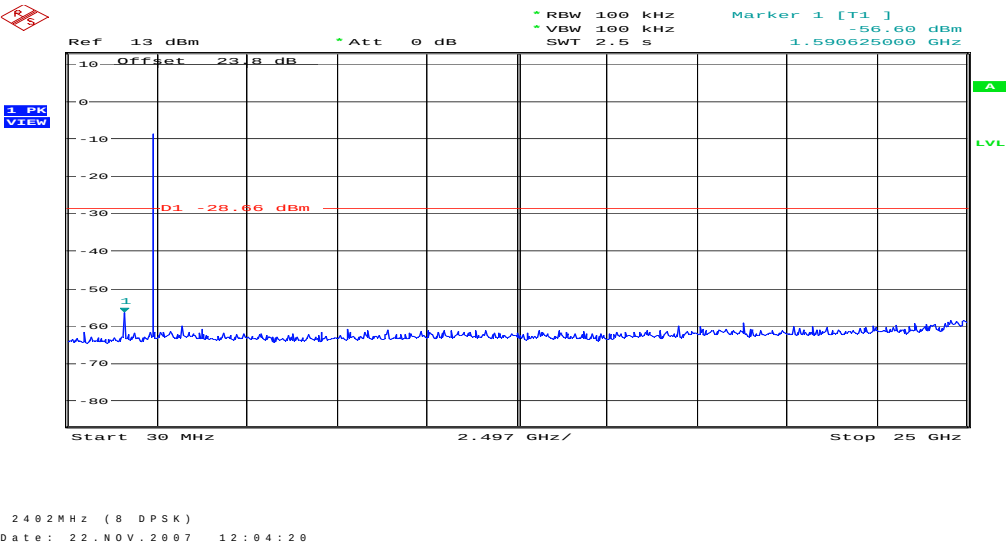

8 DQPSK 2441 Conducted spurious

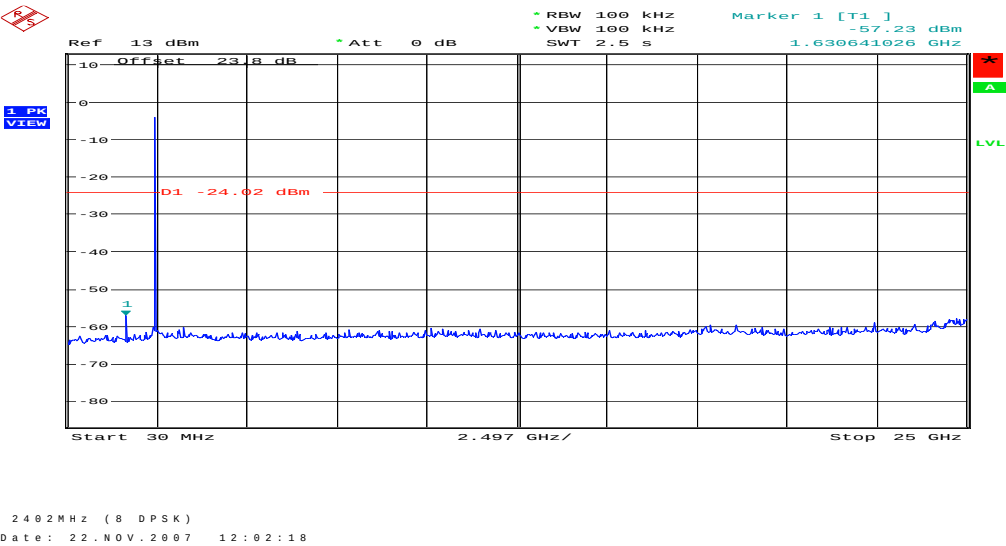

8 DQPSK 2480 Conducted spurious

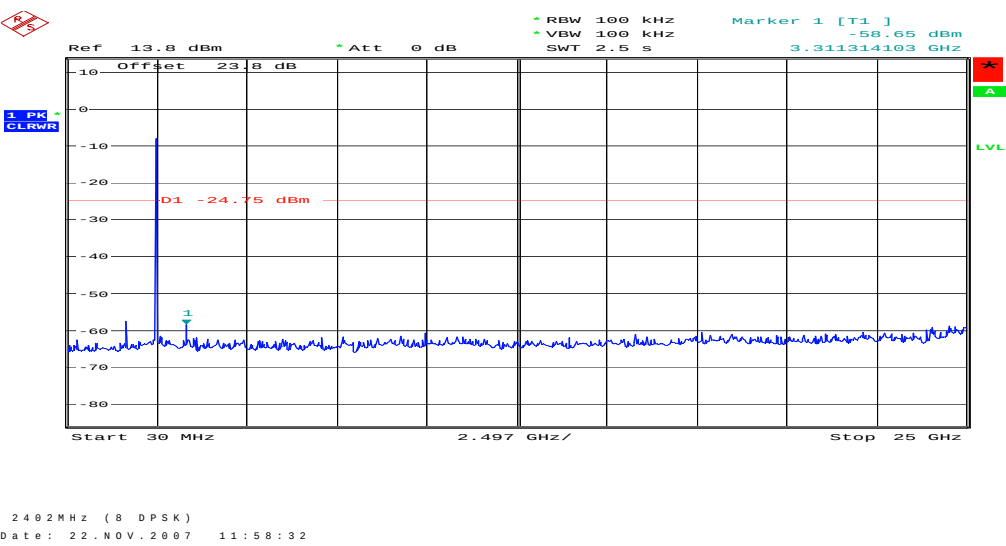

8 RF Radiated spurious emission test

8.1 Limit


For intentional radiator, the radiated emission shall comply with FCC Part 15.209(a).

For intentional radiators, according to FCC Part 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with FCC Part 15.247 (c)


Frequency (MHz)	Field strength dB(μ V/m)	Measurement distance (meters)
1.705~30.0	29.5	30
30 ~ 88	40	3
88~216	43.5	3
216~960	46	3
Above 960	54	3

8.2 Configuration of Measurement

Measurement Frequency under 1GHz

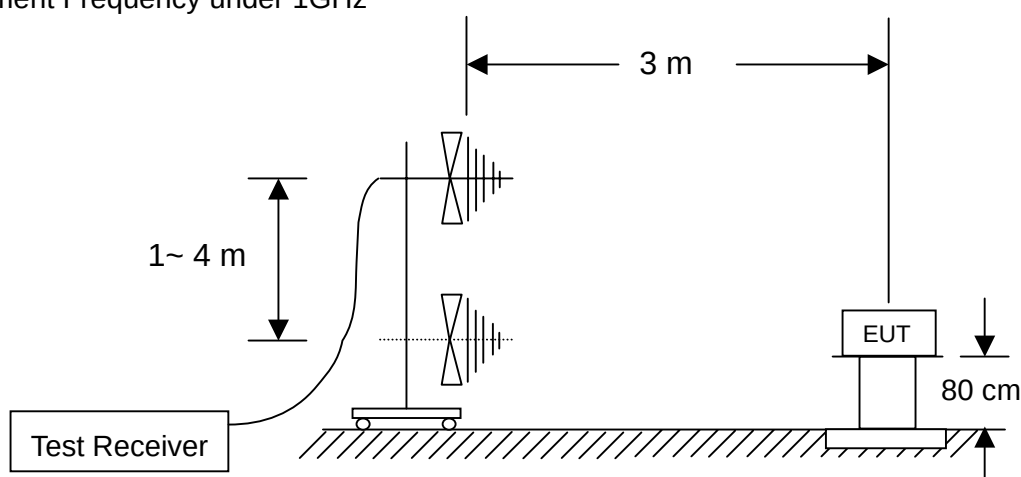

Measurement Frequency above 1GHz

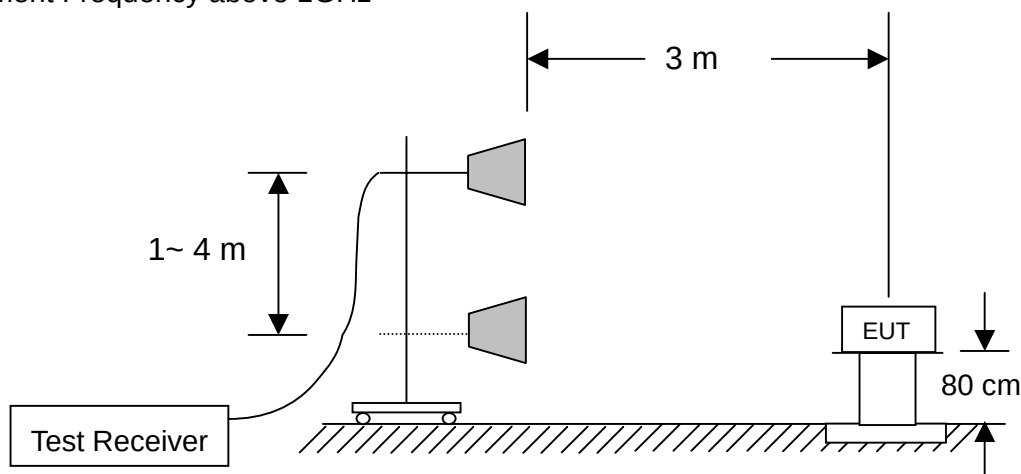

8.3 Test Procedure

Radiated emission measurements were performed from 30MHz to 25GHz. Spectrum Analyzer Resolution Bandwidth is 100kHz or greater for frequencies 30MHz to 1GHz, set 1MHz for frequencies above 1GHz.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and whole system. During the test, all cables were arranged to present worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

8.4 Test Result

PASS.

The final test data is shown on as following pages.

Remark : After verifying GFSK, $\pi/4$ DQPSK and 8 DPSK modulation mode, the worst case was caused at GFSK mode. The worst case was record in this report.

Radiated Emission below 1GHz

Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
109.629	H	47.26	29.57	12.41	30.10	43.50	-13.40	QP
216.050	H	50.11	29.56	11.13	31.68	46.00	-14.32	QP
240.001	H	49.80	29.55	13.35	33.60	46.00	-12.40	QP
458.966	H	43.40	29.66	21.35	35.09	46.00	-10.91	QP
913.113	H	39.42	29.10	29.50	39.82	46.00	-6.18	QP
60.211	V	54.83	29.64	7.11	32.30	46.00	-7.70	QP
192.020	V	53.30	29.54	10.54	34.30	43.50	-9.20	QP
458.993	V	48.12	29.66	21.66	40.12	46.00	-5.88	QP
674.990	V	38.30	29.21	25.52	34.61	46.00	-11.39	QP
913.780	V	38.40	29.10	29.52	38.82	46.00	-7.18	QP

Remark : Corrected Level = Reading + Correction Factor – Preamp
Correction Factor = Antenna Factor + Cable Loss

Radiated Emission above 1GHz

GFSK 2402MHz								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4804.00	H	47.70	26.01	39.96	55.65	74	-18.35	PK
4804.00	H	28.09	26.01	39.96	42.04	54	-11.96	AV
4804.00	V	44.41	26.01	39.96	58.36	74	-15.64	PK
4804.00	V	25.43	26.01	39.96	39.38	54	-14.62	AV

GFSK 2441MHz								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4882.00	H	42.38	25.99	40.01	56.40	74	-17.60	PK
4882.00	H	27.95	25.99	40.01	41.97	54	-12.03	AV
4882.00	V	45.32	25.99	40.01	59.34	74	-14.66	PK
4882.00	V	29.09	25.99	40.01	43.11	54	-10.89	AV

GFSK 2480MHz								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4960.00	H	43.95	25.98	40.04	58.01	74	-15.99	PK
4960.00	H	33.89	25.98	40.04	47.95	54	-6.05	AV
4960.00	V	43.33	25.98	40.04	57.39	74	-16.61	PK
4960.00	V	34.09	25.98	40.04	48.15	54	-5.85	AV

Remark : Corrected Level = Reading + Correction Factor – Preamplifier
Correction Factor = Antenna Factor + Cable Loss


9 Emission on the Band Edge test

9.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

9.2 Configuration of Measurement

Measurement Frequency above 1GHz

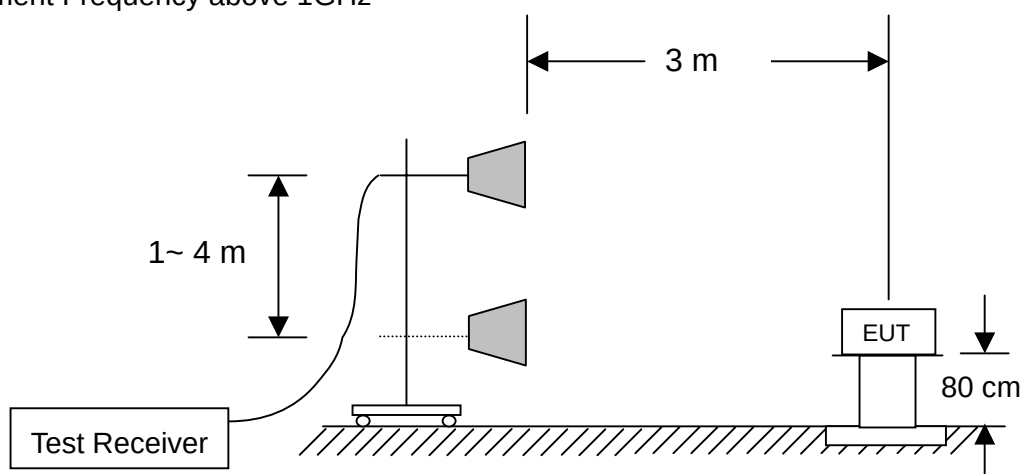

9.3 Test Procedure

Radiated emission measurements were performed from 30MHz to 25GHz. Spectrum Analyzer Resolution Bandwidth is 100kHz or greater for frequencies 30MHz to 1GHz, set 1MHz for frequencies above 1GHz.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and whole system. During the test, all cables were arranged to present worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

9.4 Test Result

PASS.


The final test data is shown on as following pages.

Mode : GFSK					
CH	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB μ V/m)	Limit (dBm)	Margin (dB)
1	2310~2390	PK	53.95	74	-20.05
		AV	40.60	54	-13.40
79	2483.5~2500	PK	59.33	74	-14.67
		AV	50.79	54	-3.21

Mode : $\pi/4$ DQPSK					
CH	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB μ V/m)	Limit (dBm)	Margin (dB)
1	2310~2390	PK	53.95	74	-20.37
		AV	40.62	54	-13.38
79	2483.5~2500	PK	56.68	74	-17.32
		AV	46.13	54	-7.87


Mode : 8 DQPSK					
CH	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB μ V/m)	Limit (dBm)	Margin (dB)
1	2310~2390	PK	54.26	74	-19.74
		AV	40.61	54	-13.39
79	2483.5~2500	PK	60.34	74	-13.66
		AV	47.92	54	-6.08

GFSK CH01 PK

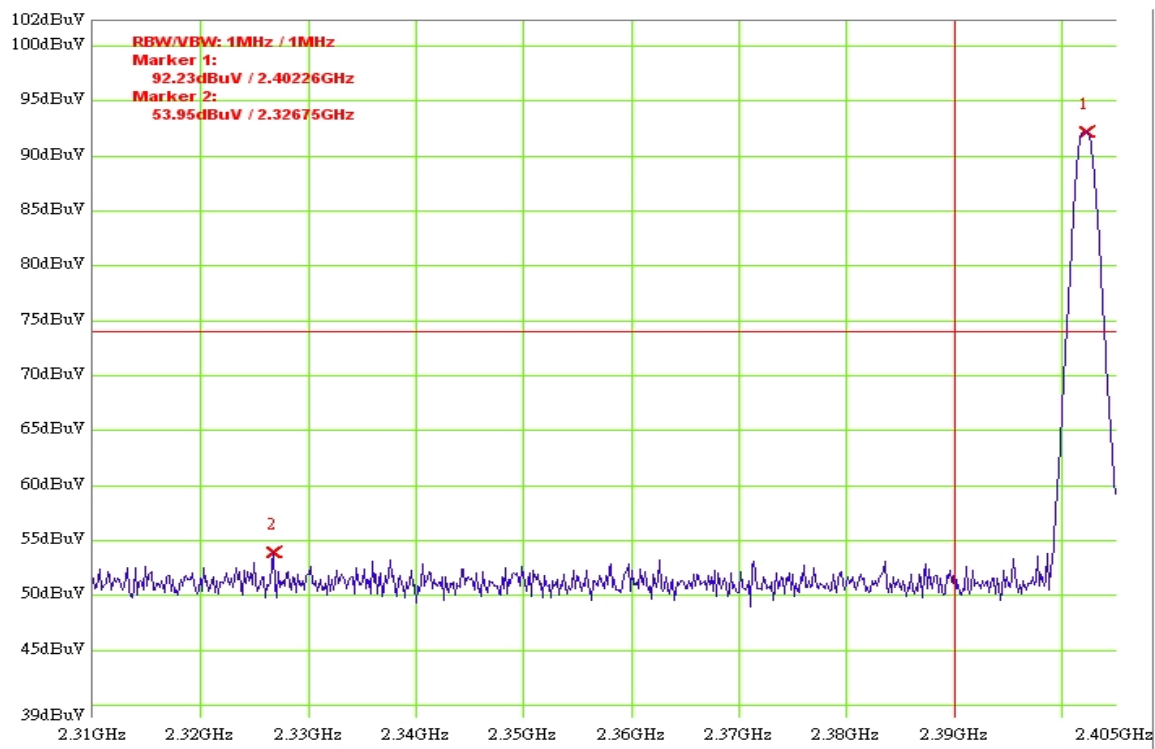


GFSK CH01 PK

GFSK CH01 AV

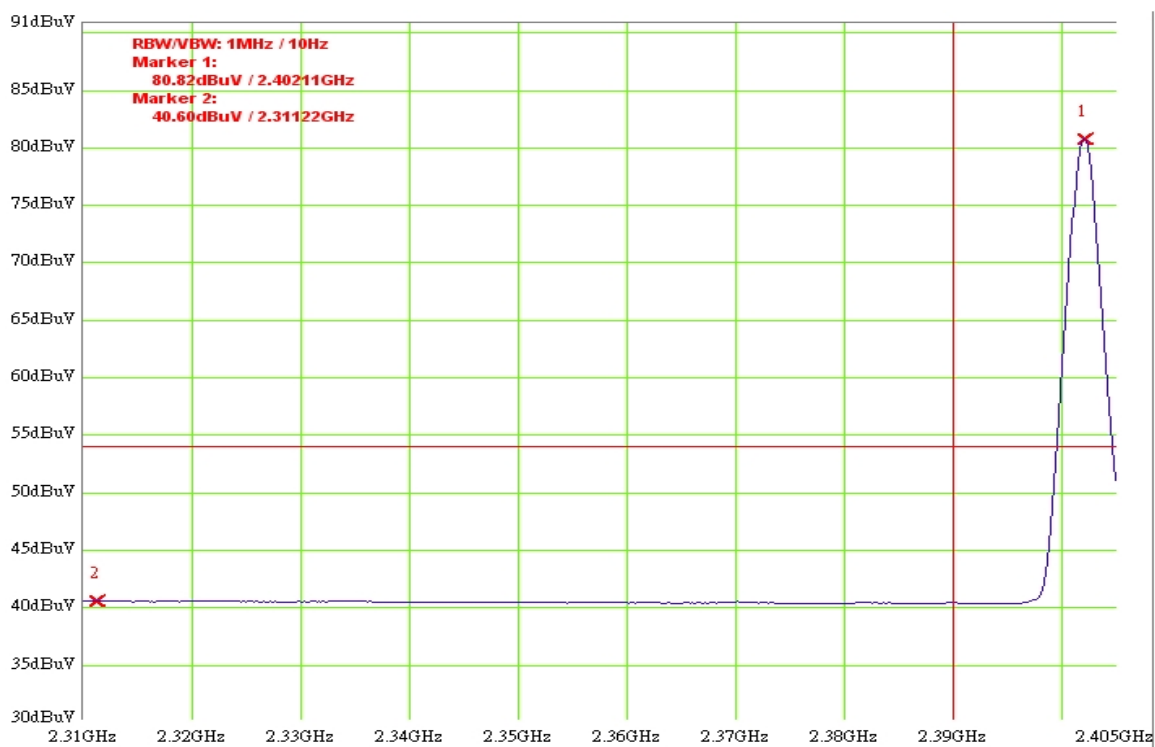


GFSK CH01 AV

GFSK CH79 PK

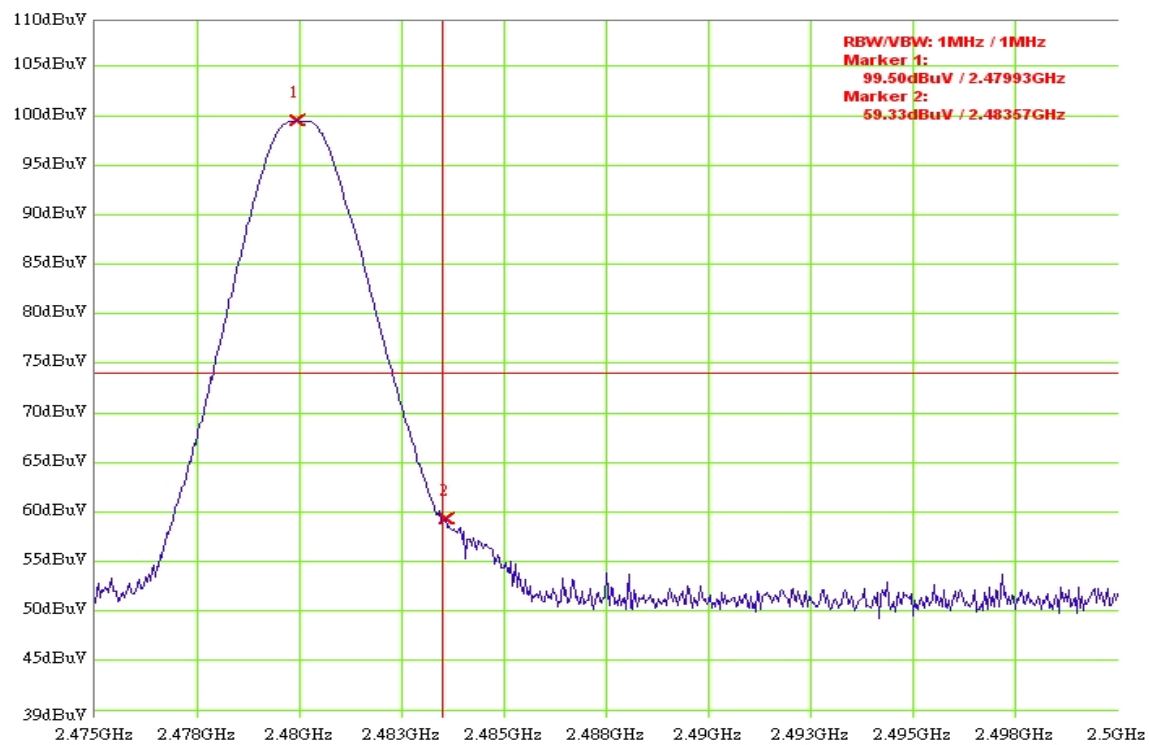


GFSK CH79 PK

GFSK CH79 AV

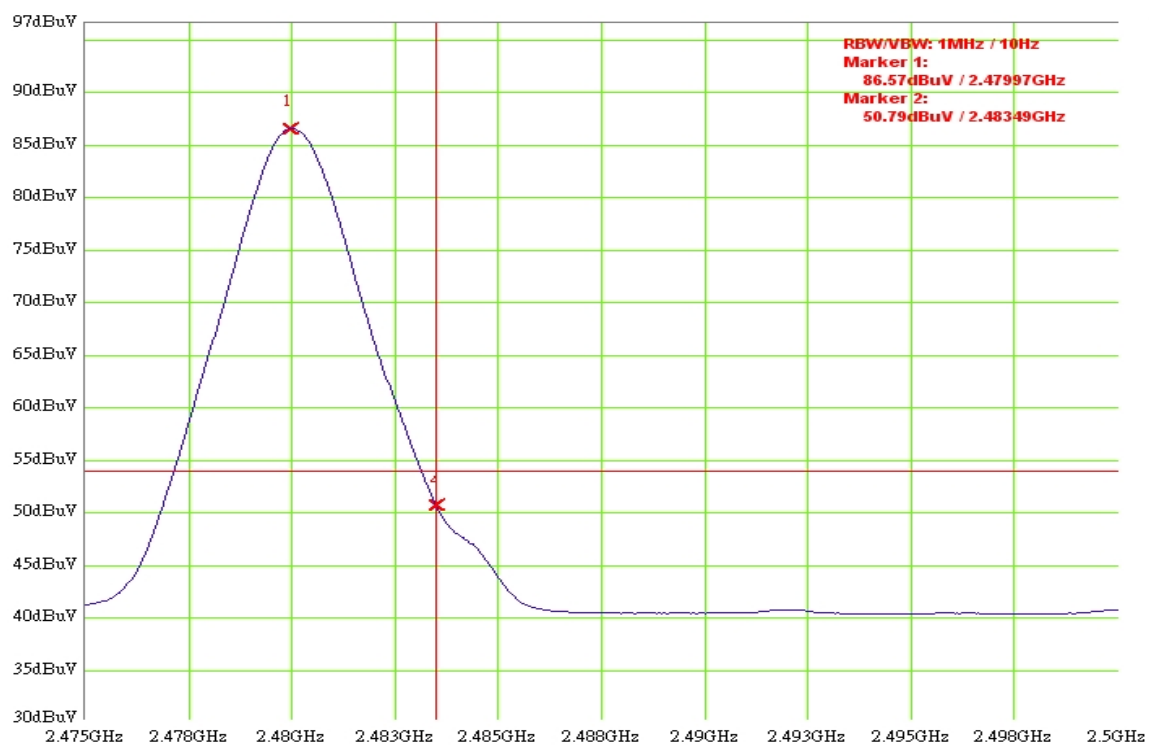


GFSK CH79 AV

$\pi/4$ DQPSK CH01 PK

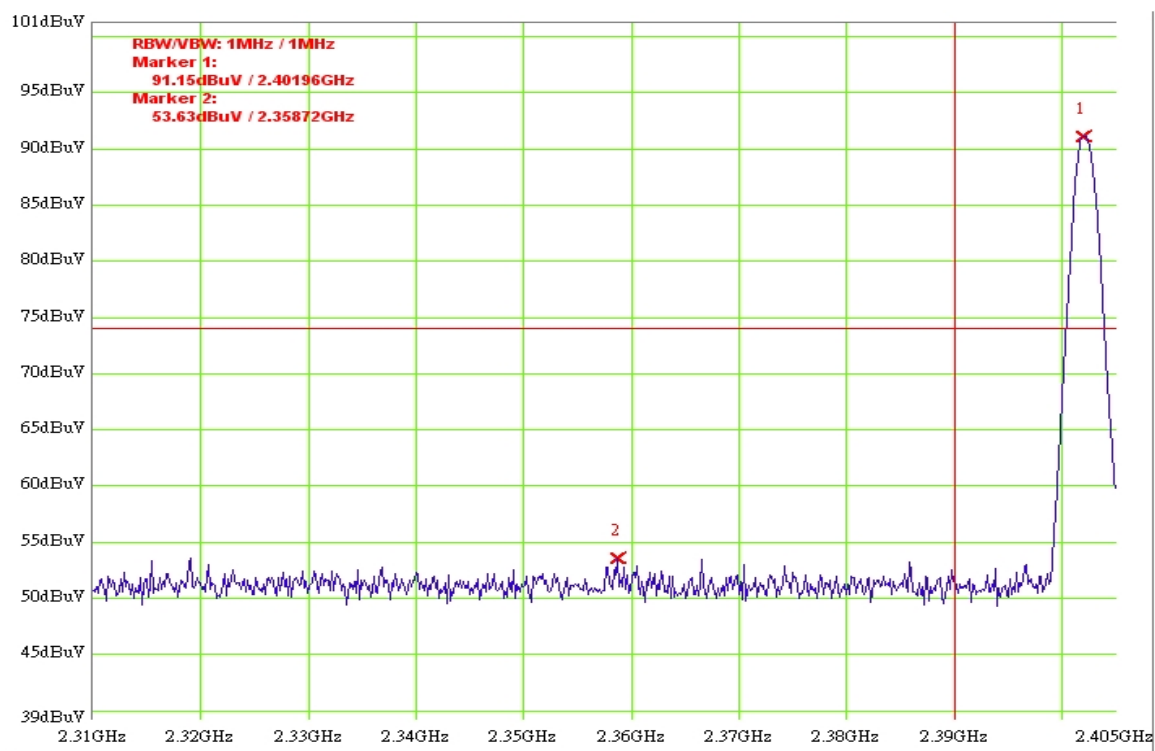


Pi/4 DQPSK CH01 PK

$\pi/4$ DQPSK CH01 AV

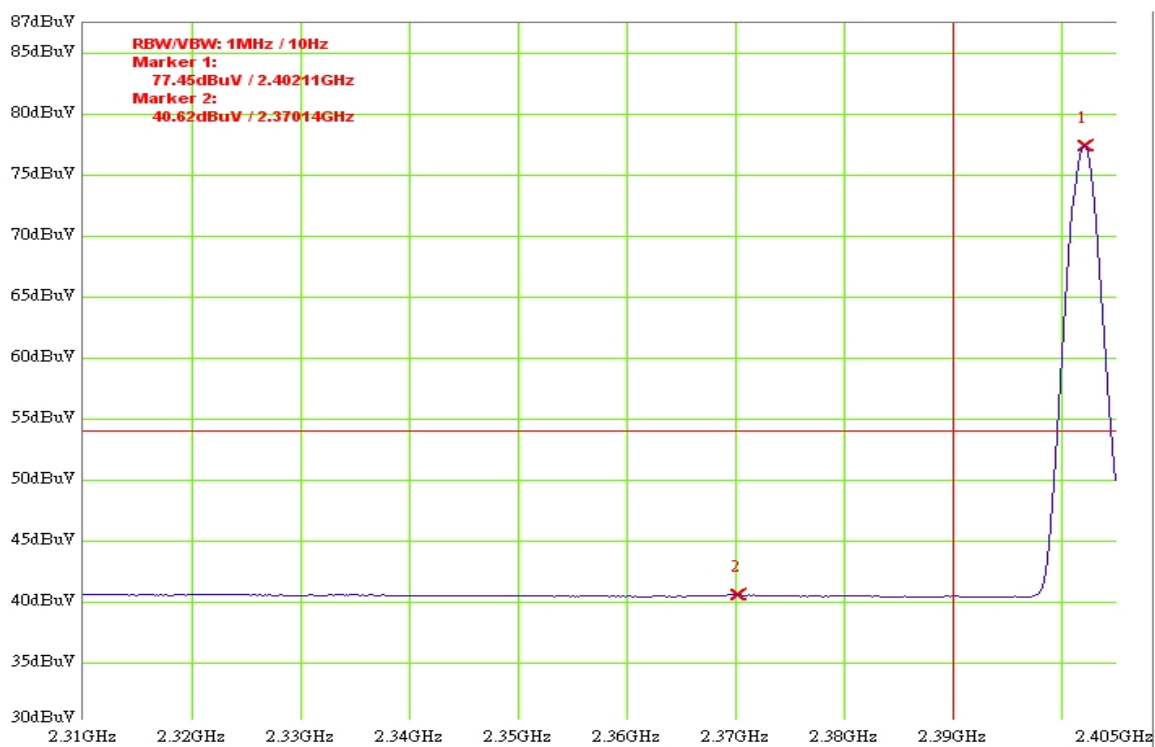


Pi/4 DQPSK CH01 AV

$\pi/4$ DQPSK CH79 PK

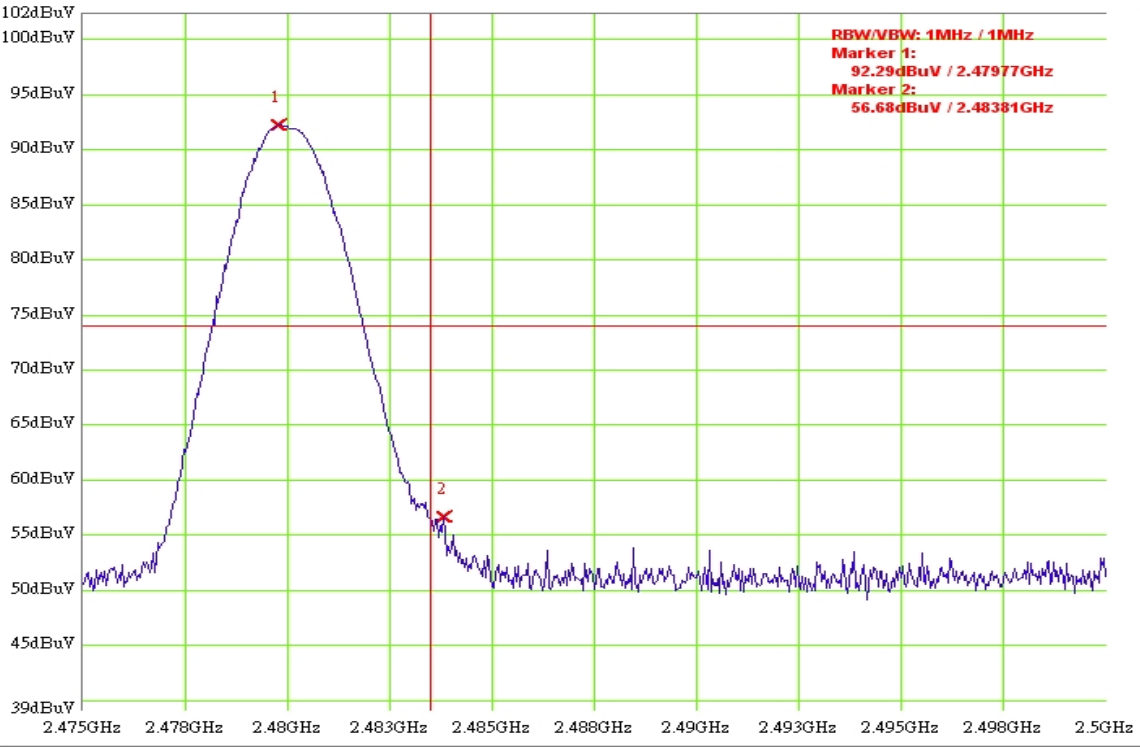


Pi/4 DQPSK CH79 PK

$\pi/4$ DQPSK CH79 PK

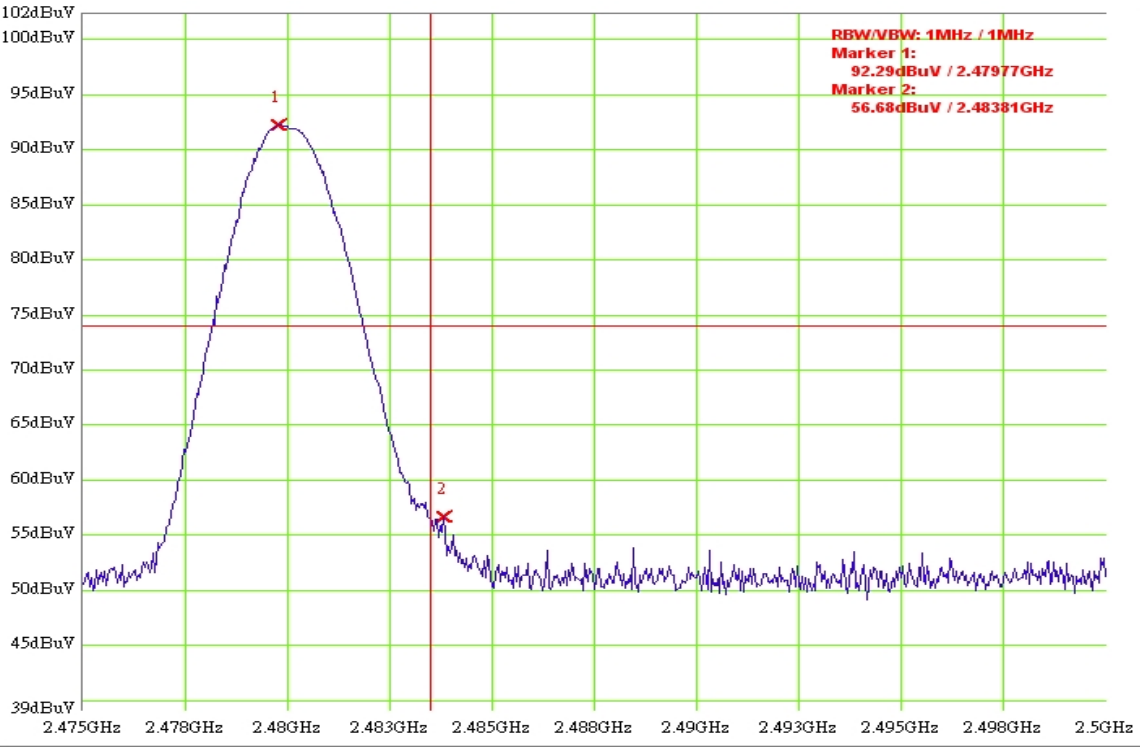


Pi/4 DQPSK CH79 PK


8DPSK CH01 PK

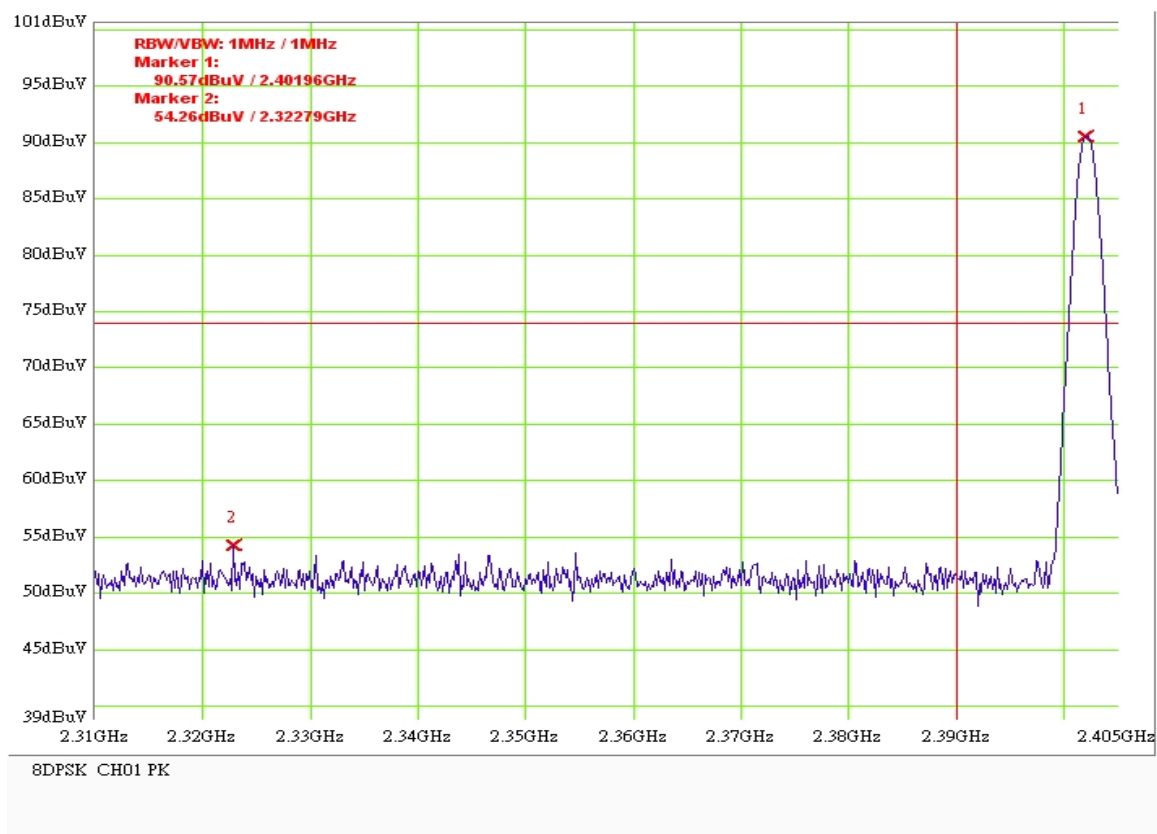

8DPSK CH01 AV

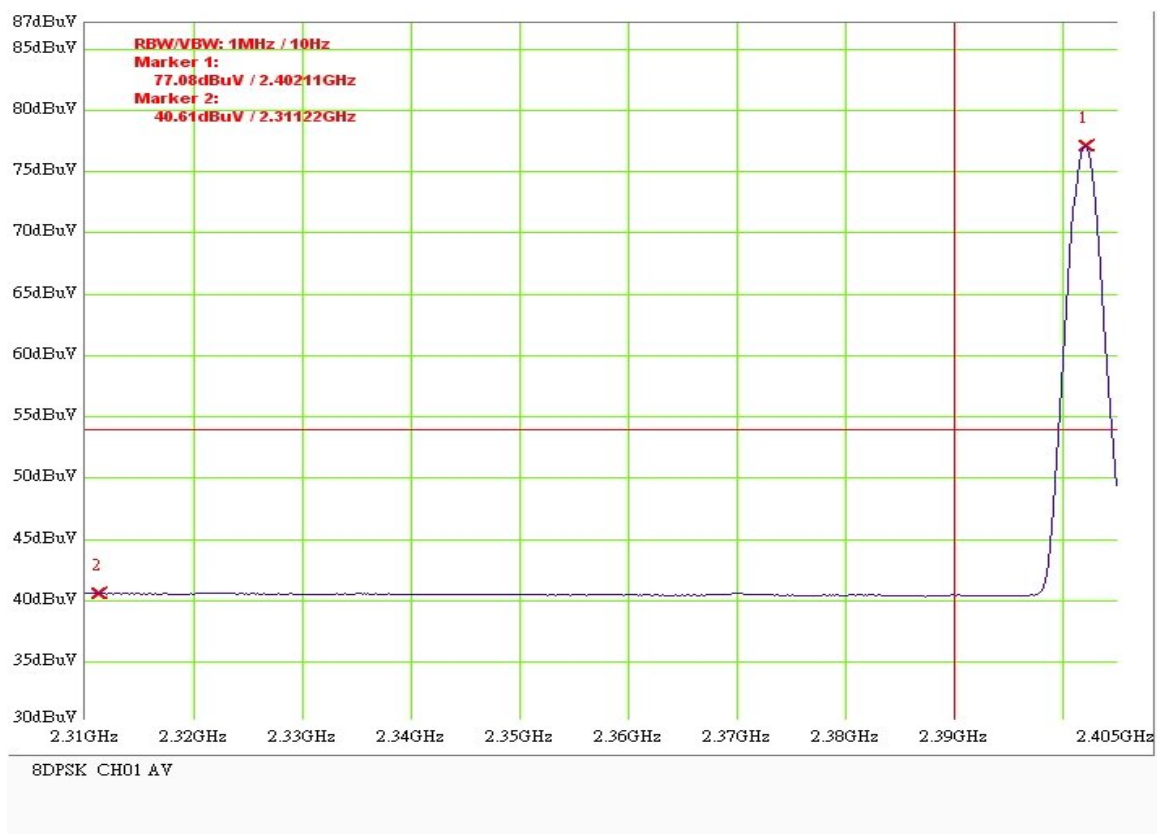


8DPSK CH79 PK

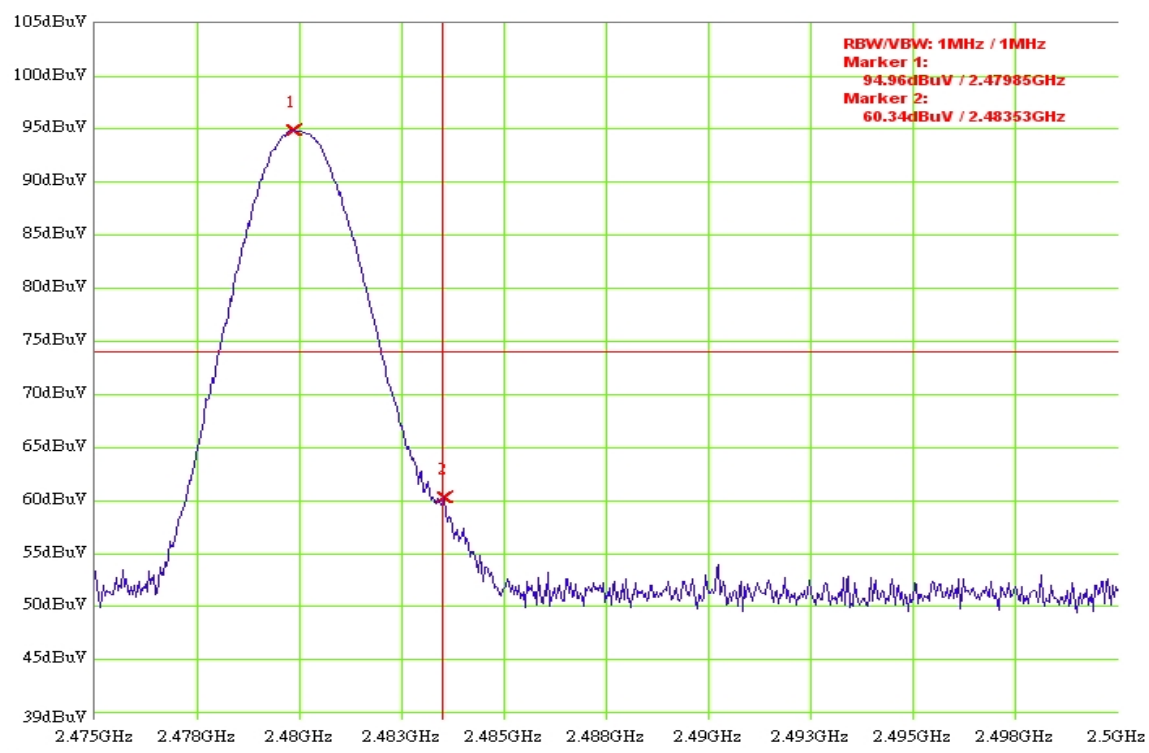

8DPSK CH79 PK

8DPSK CH79 AV

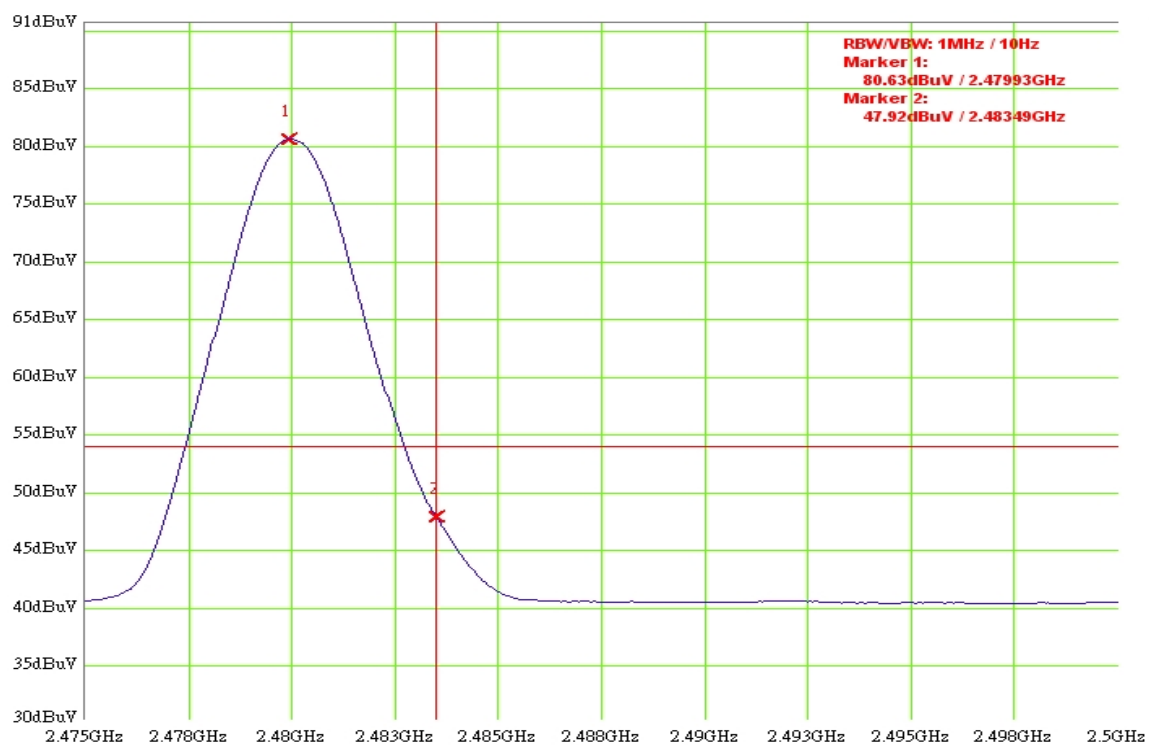

8DPSK CH79 AV