


TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.507 mW/g, SAR (10g): 0.342 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Left / touch / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

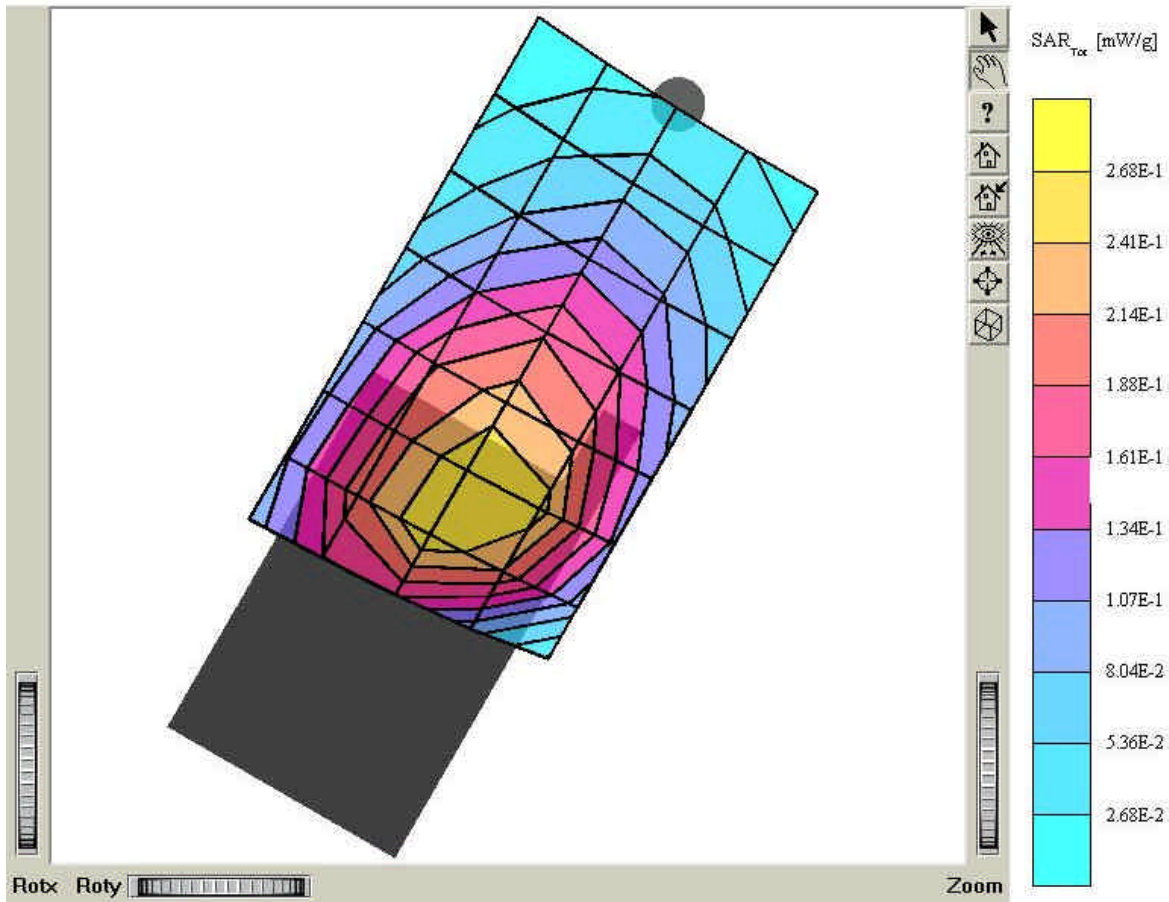


TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6,50,6,50,6,50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89$ mho/m $\epsilon_r = 43.2$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.545 mW/g, SAR (10g): 0.366 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Left / touch / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

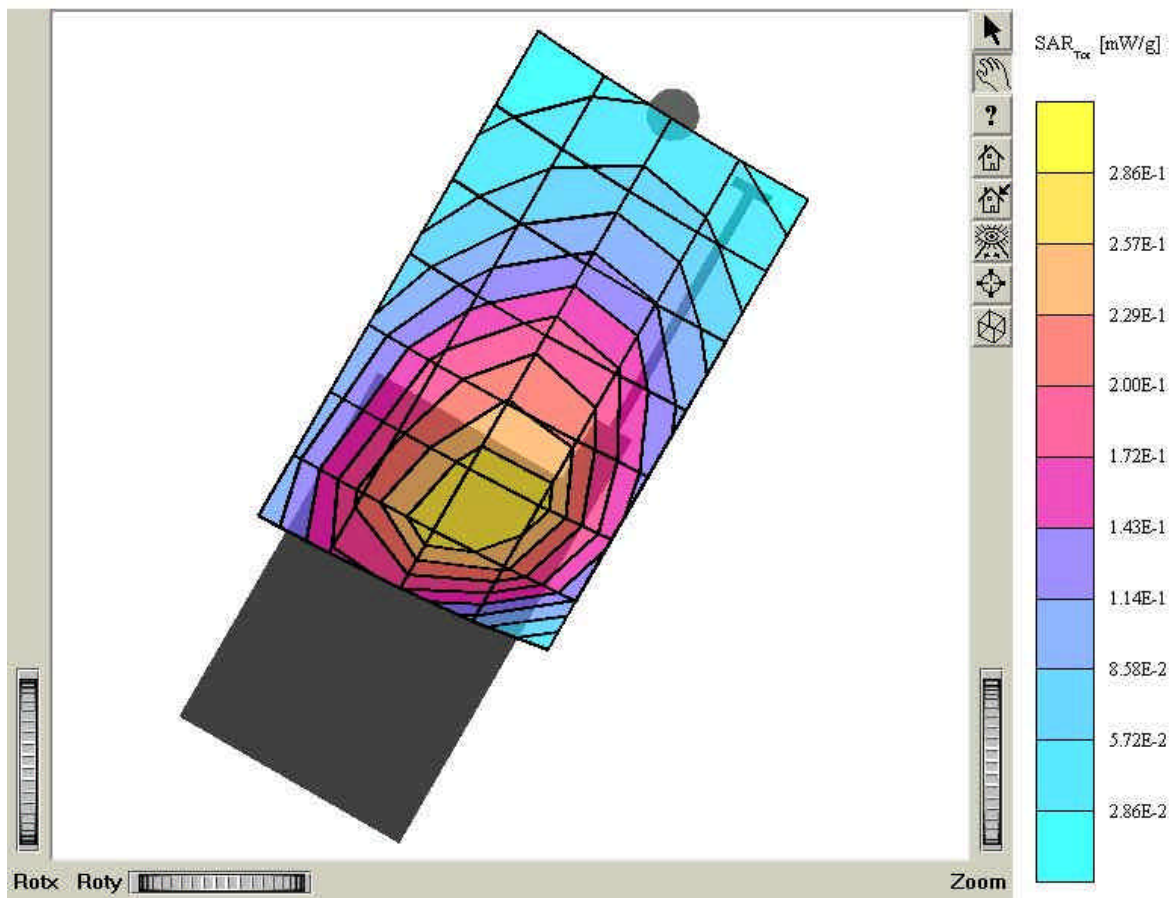


TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.485 mW/g, SAR (10g): 0.328 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Left / touch / Antenna: in
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

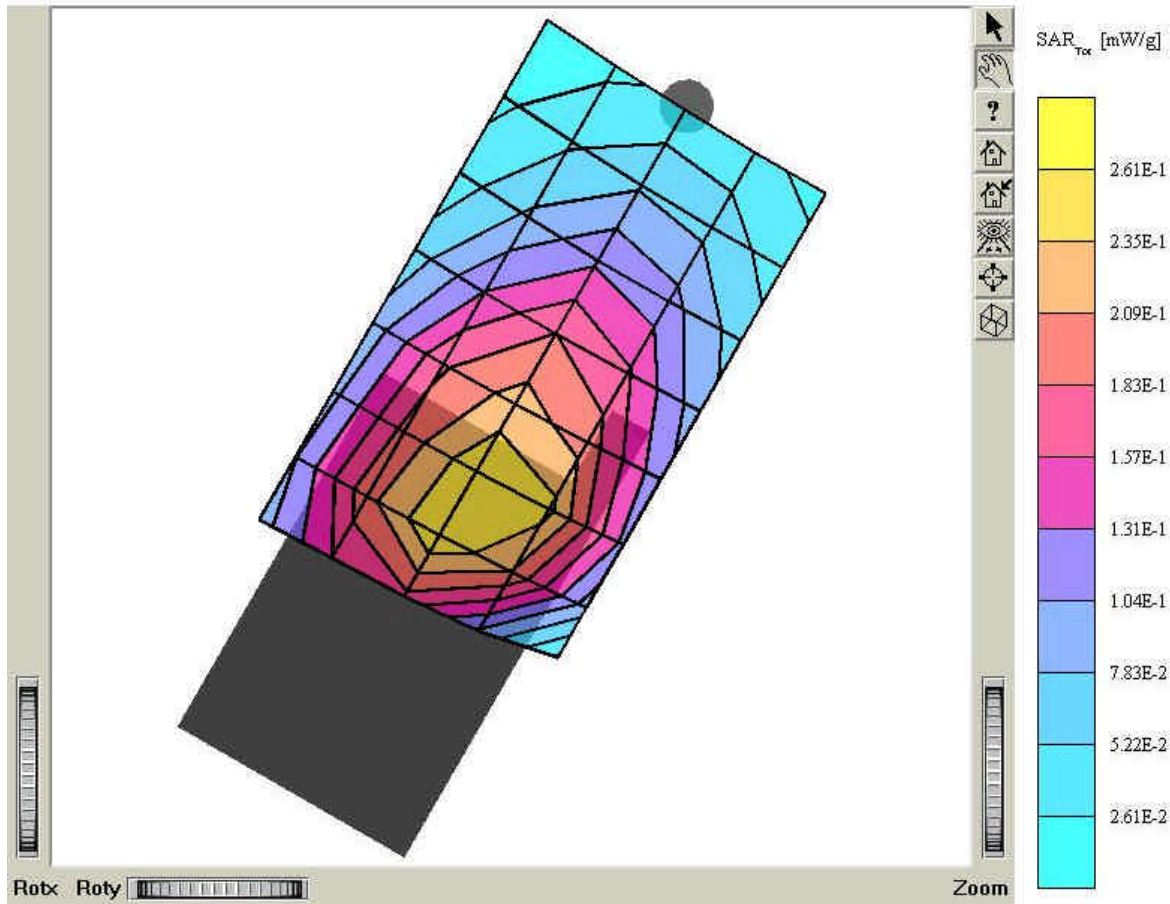


TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section: Position: (90°, 180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $e_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.512 mW/g; SAR (10g): 0.343 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Left / touch / Antenna: out
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

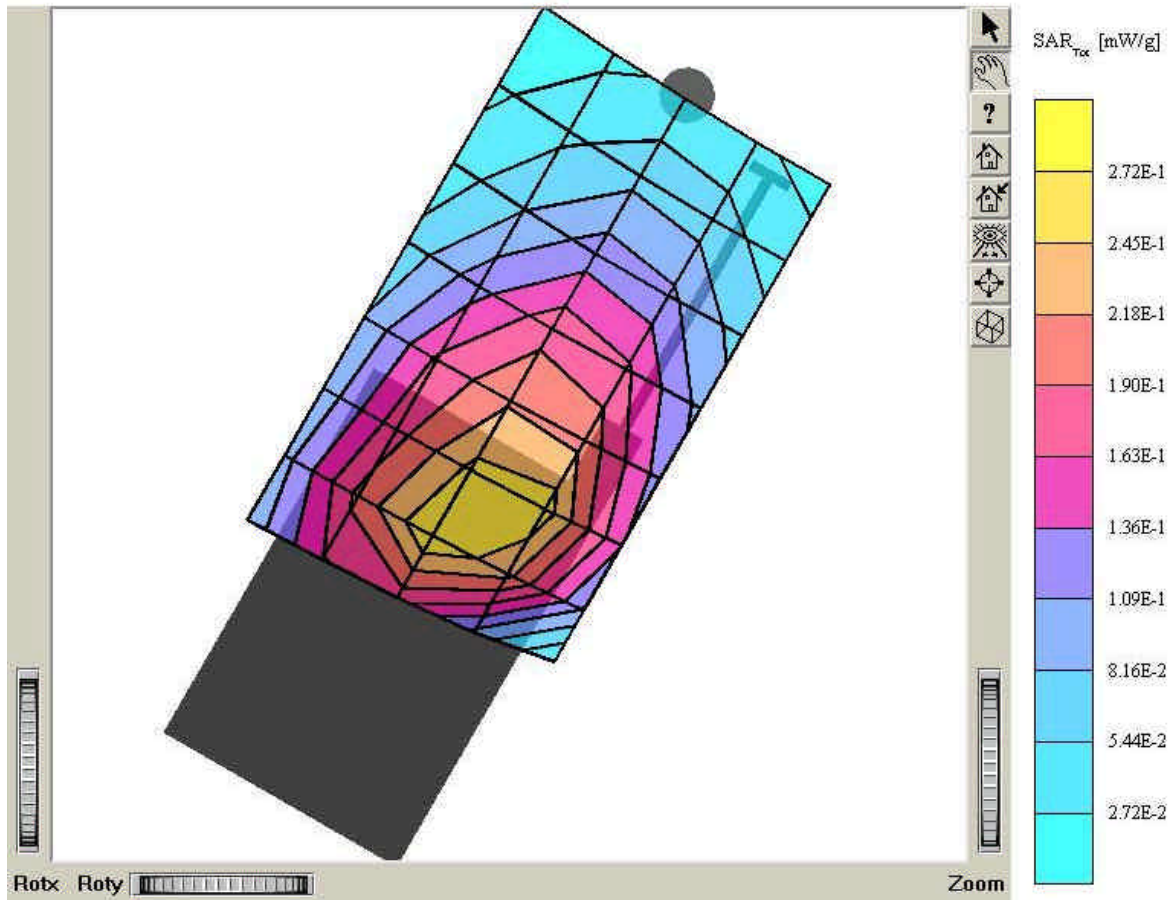


TDC-6610

SAM : Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
 Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
 Cube 5x5x7; SAR (1g): 0.755 mW/g, SAR (10g): 0.510 mW/g
 Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
 Company: TELSON ELECTRONICS CO., LTD.
 Test Position: Left / touch / Antenna: in
 Mode: CDMA / Channel: 777 (848.31MHz)
 Conducted Power: 26 dBm
 Liquid Temperature: 21.5 °C
 Date Tested: June 25, 2003

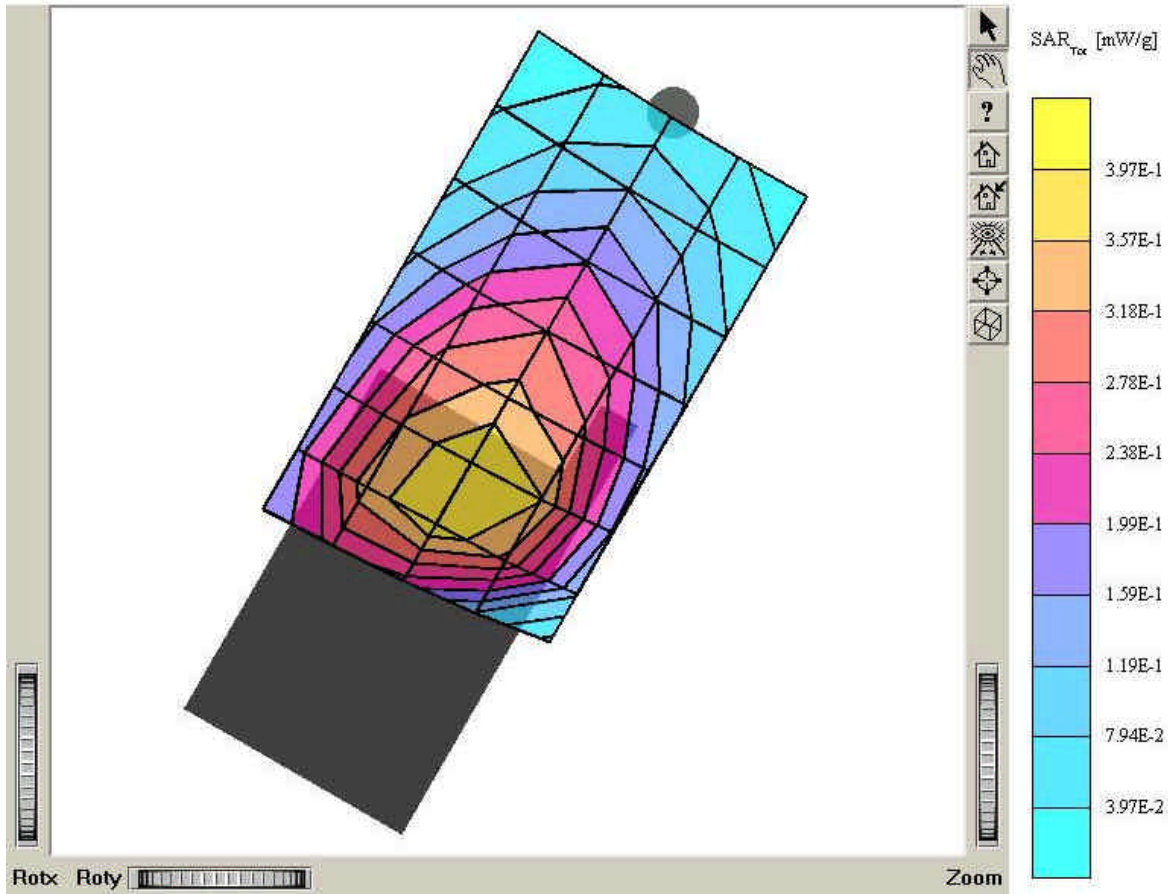


TDC-6610

SAM I Phantom: Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6,50,6,50,6,50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.706 mW/g, SAR (10g): 0.473 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Left Touch / Antenna: out
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

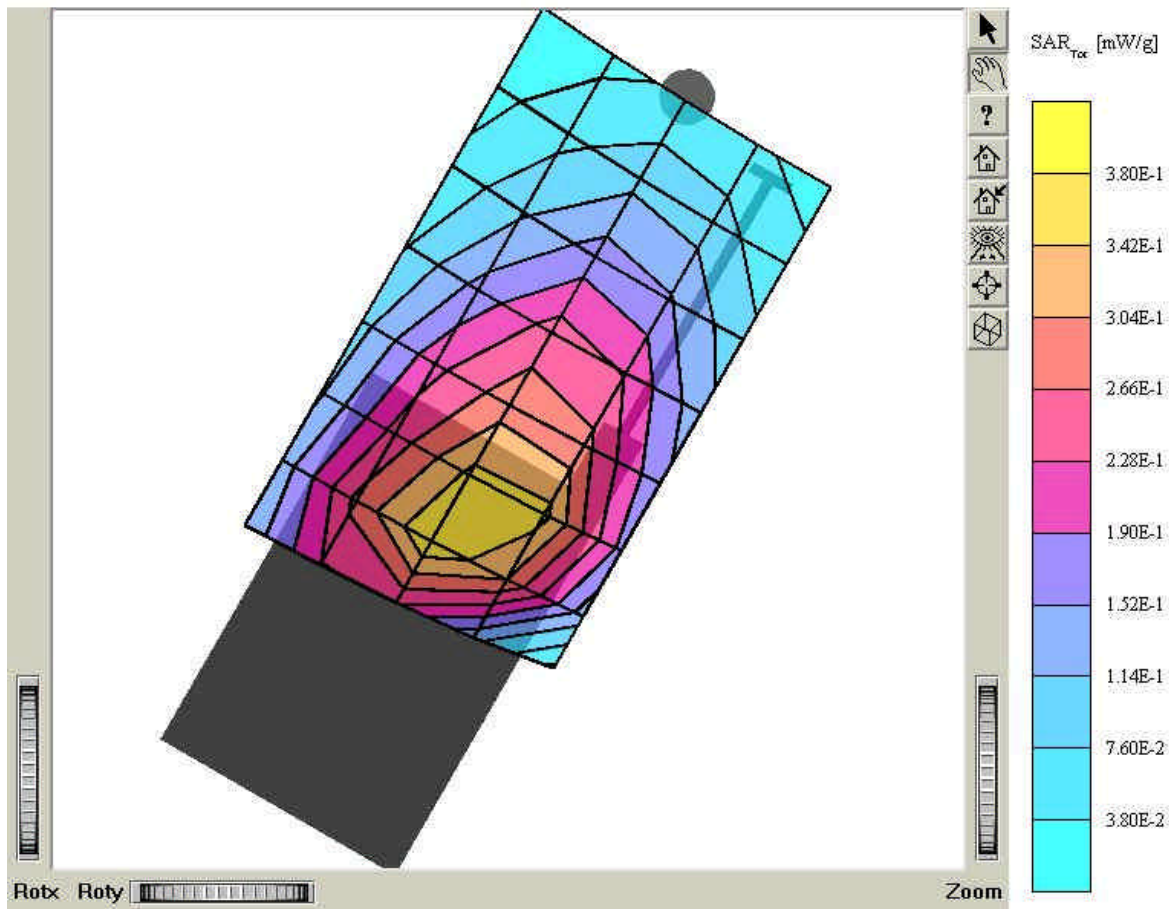


TDC-6610

SAM 1 Phantom: Right Hand (CRP) Section: Position: (90°,180°): Frequency: 835 MHz
Probe: ET3DV6 - SN1608: ConvF(6.50,6.50,6.50): Crest factor: 1.0: Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $e_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.639 mW/g, SAR (10g): 0.413 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Right / touch / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

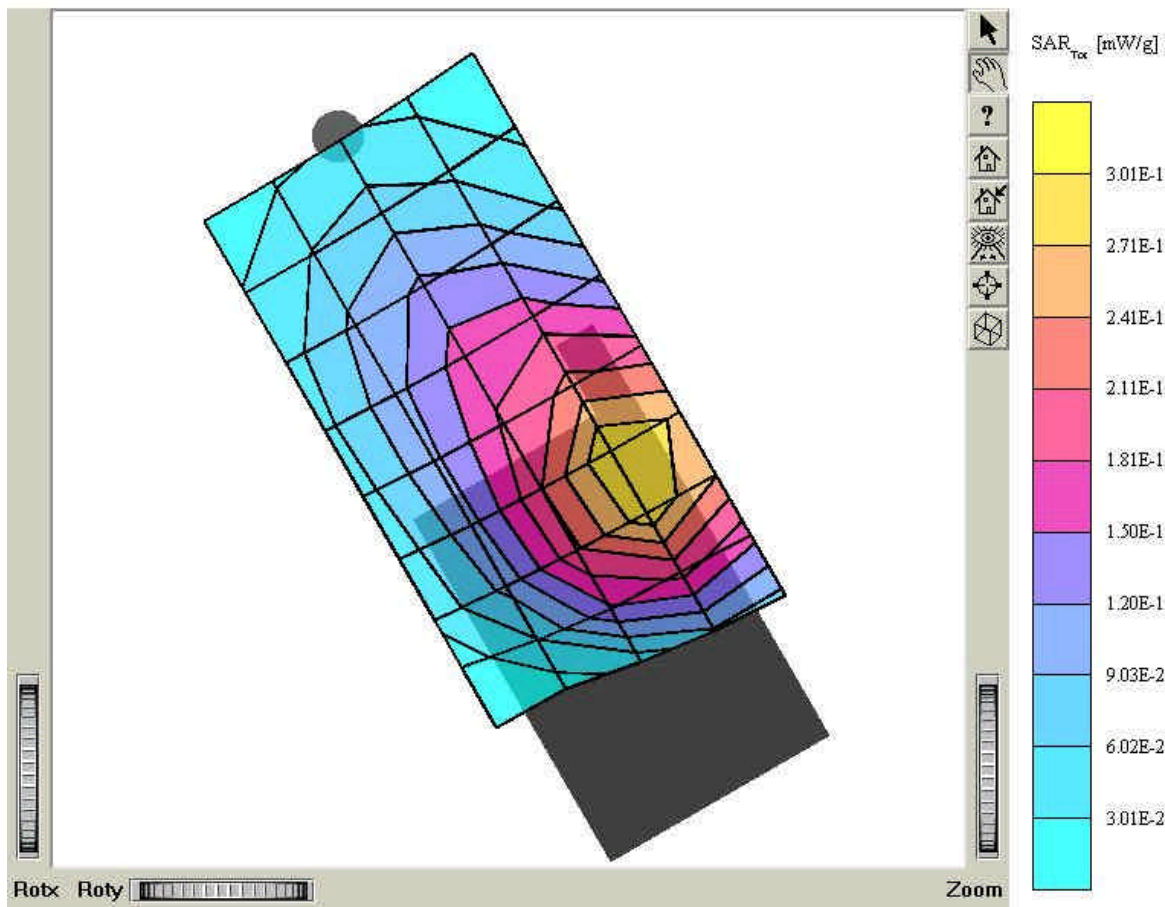


TDC-6610

SAM : Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.652 mW/g; SAR (10g): 0.420 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Right / touch / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

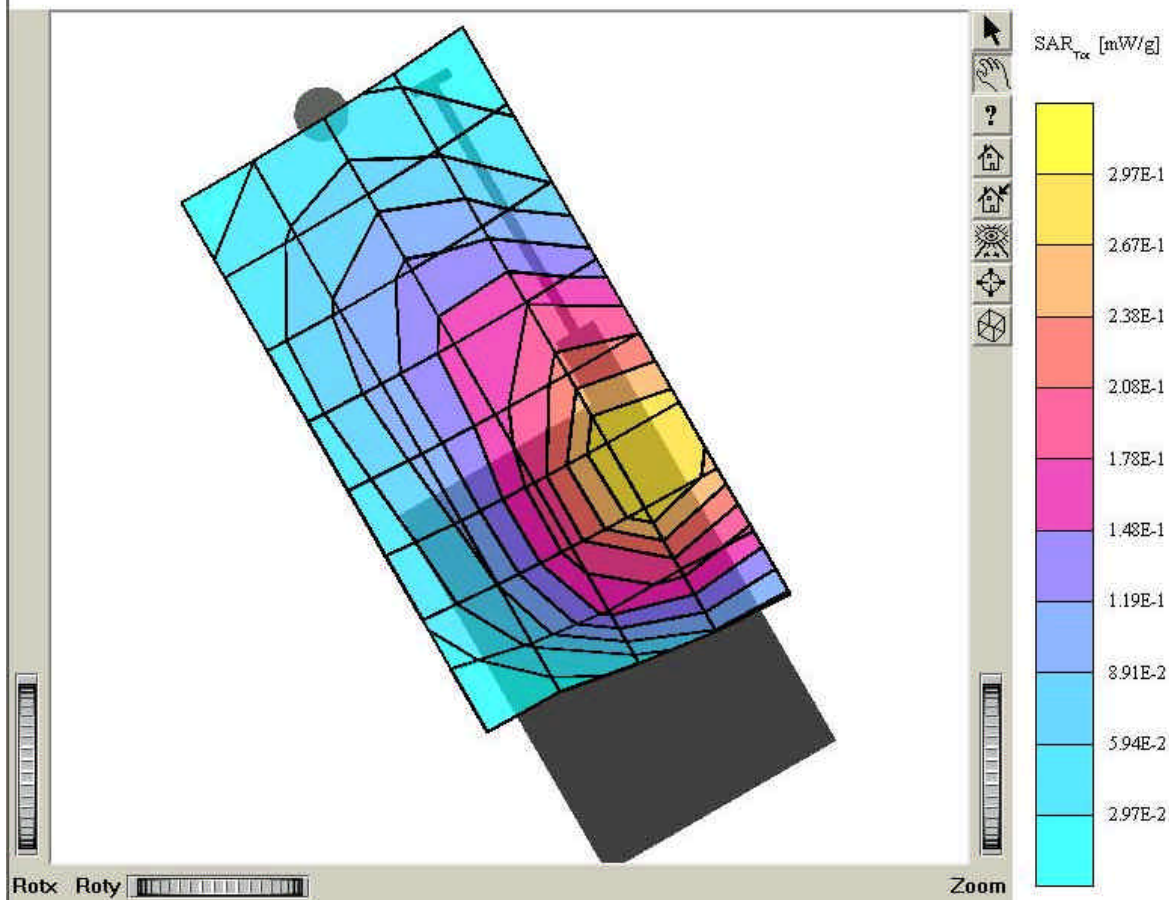


TDC-6610

SAM 1 Phantom: Right Hand (CRP) Section: Position: (90°,180°): Frequency: 835 MHz
Probe: ET3DV6 - SN1608: ConvF(6.50,6.50,6.50): Crest factor: 1.0: Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.667 mW/g, SAR (10g): 0.430 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Right / touch / Antenna: in
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

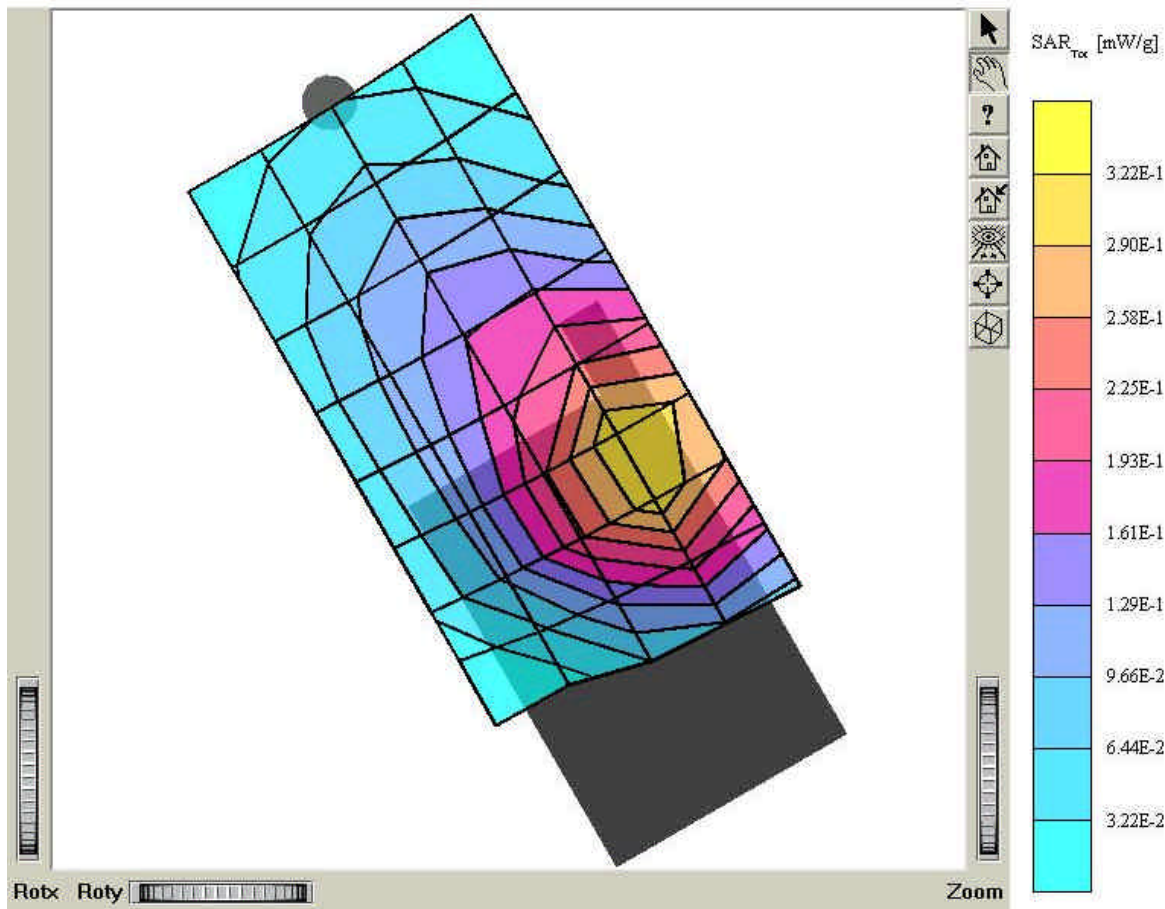


TDC-6610

SAM 1 Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
 Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $e_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
 Cube 5x5x7; SAR (1g): 0.705 mW/g; SAR (10g): 0.458 mW/g
 Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
 Company: TELSON ELECTRONICS CO., LTD.
 Test Position: Left / touch / Antenna: out
 Mode: CDMA / Channel: 363 (835.89MHz)
 Conducted Power: 26 dBm
 Liquid Temperature: 21.5 °C
 Date Tested: June 25, 2003

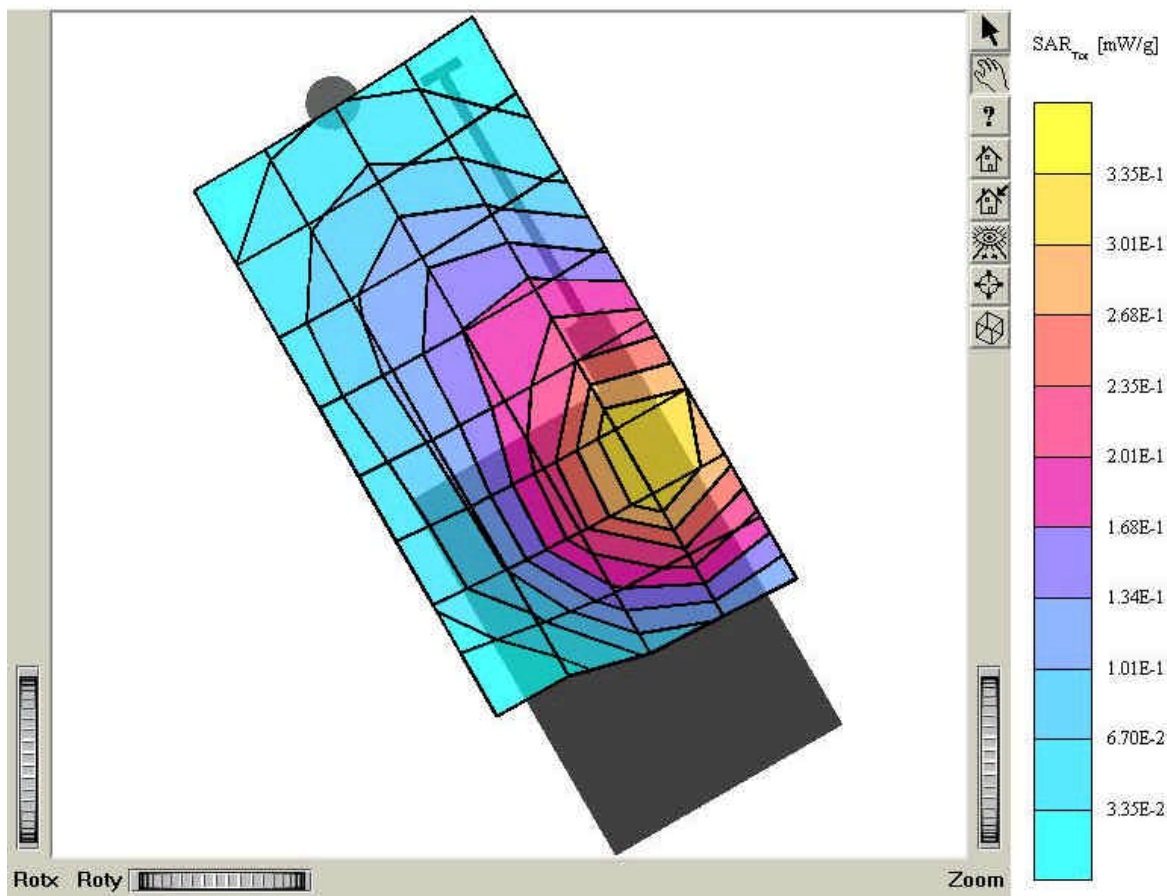


TDC-6610

SAM : I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 1.04 mW/g, SAR (10g): 0.670 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Right / touch / Antenna: in
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

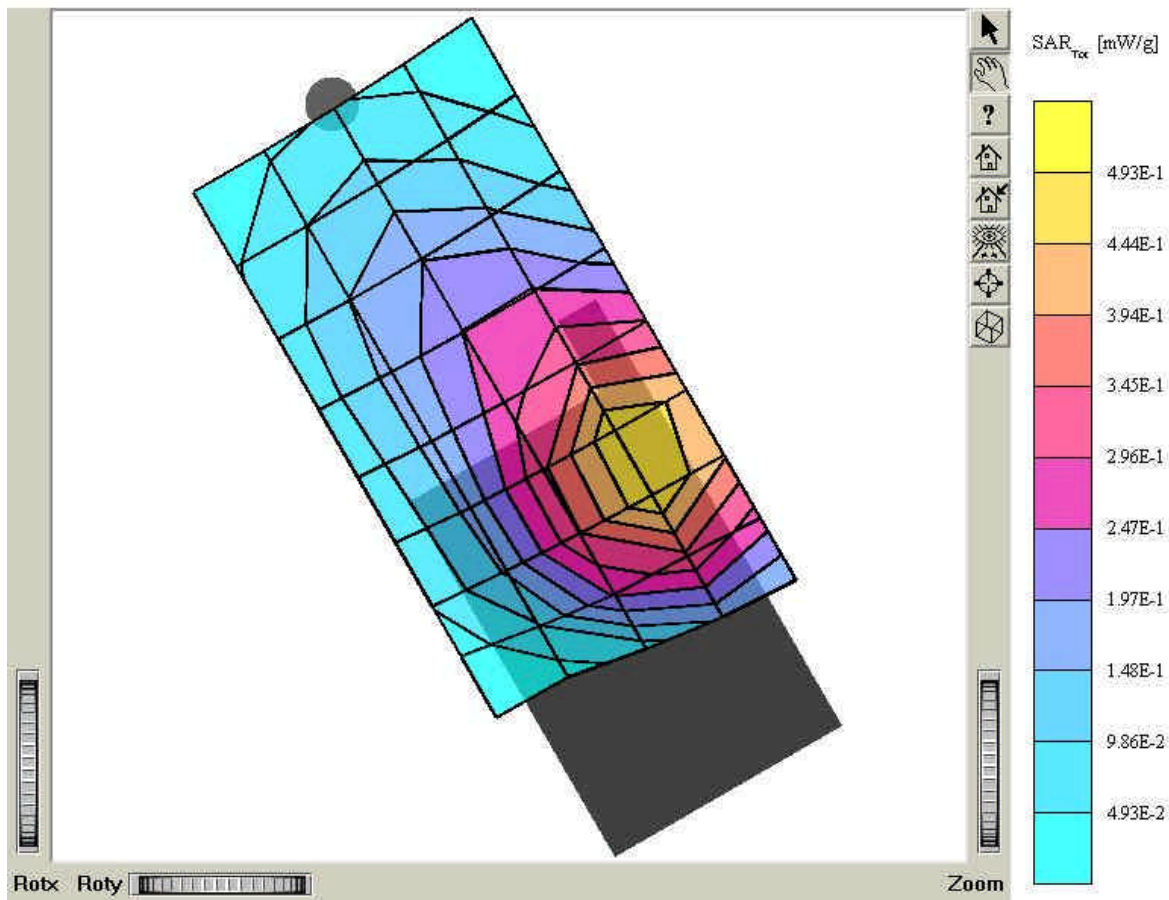


TDC-6610

SAM : I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.897 mW/g, SAR (10g): 0.561 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Right / touch / Antenna: out
Mode: CDMA / Channel: 777 (848.31MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

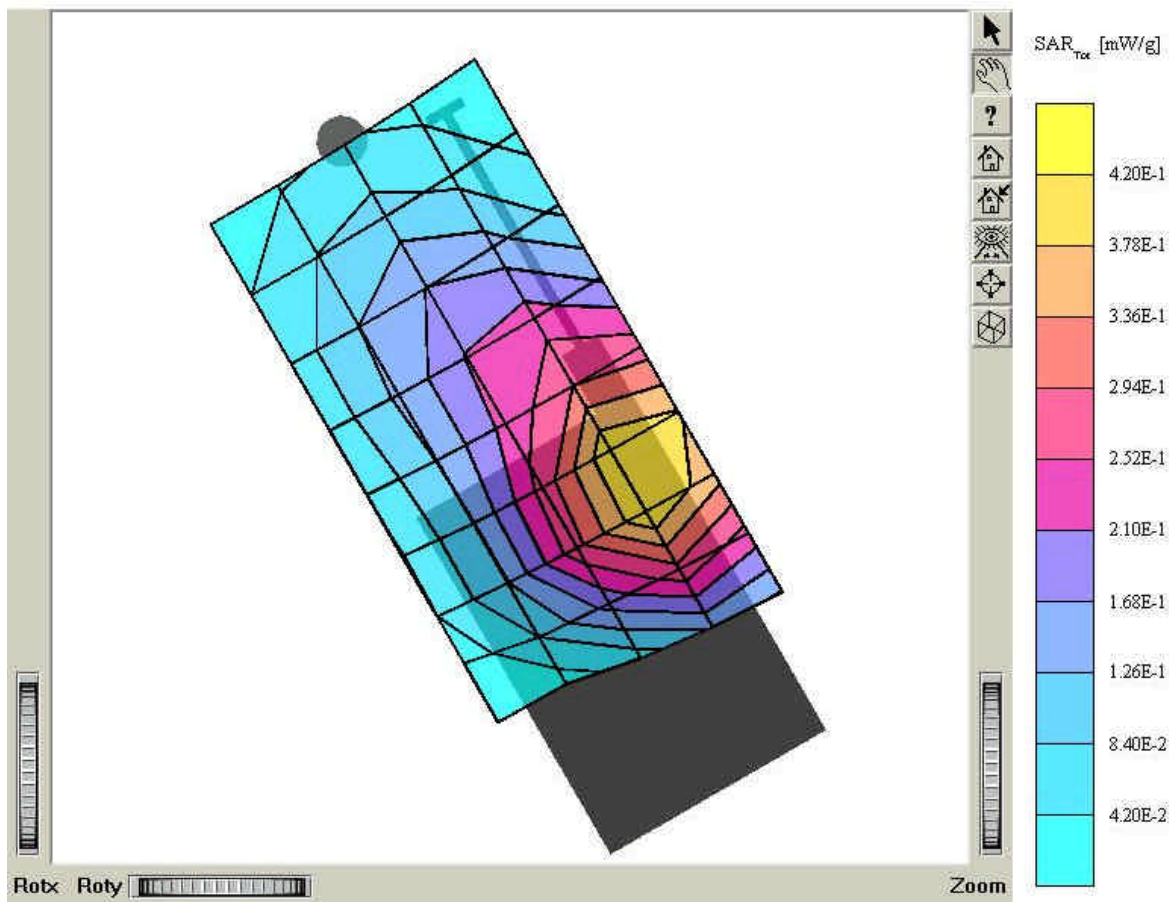


TDC-6610

SAM 1 Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.146 mW/g, SAR (10g): 0.111 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Tilt 15° / left / Antenna: in
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

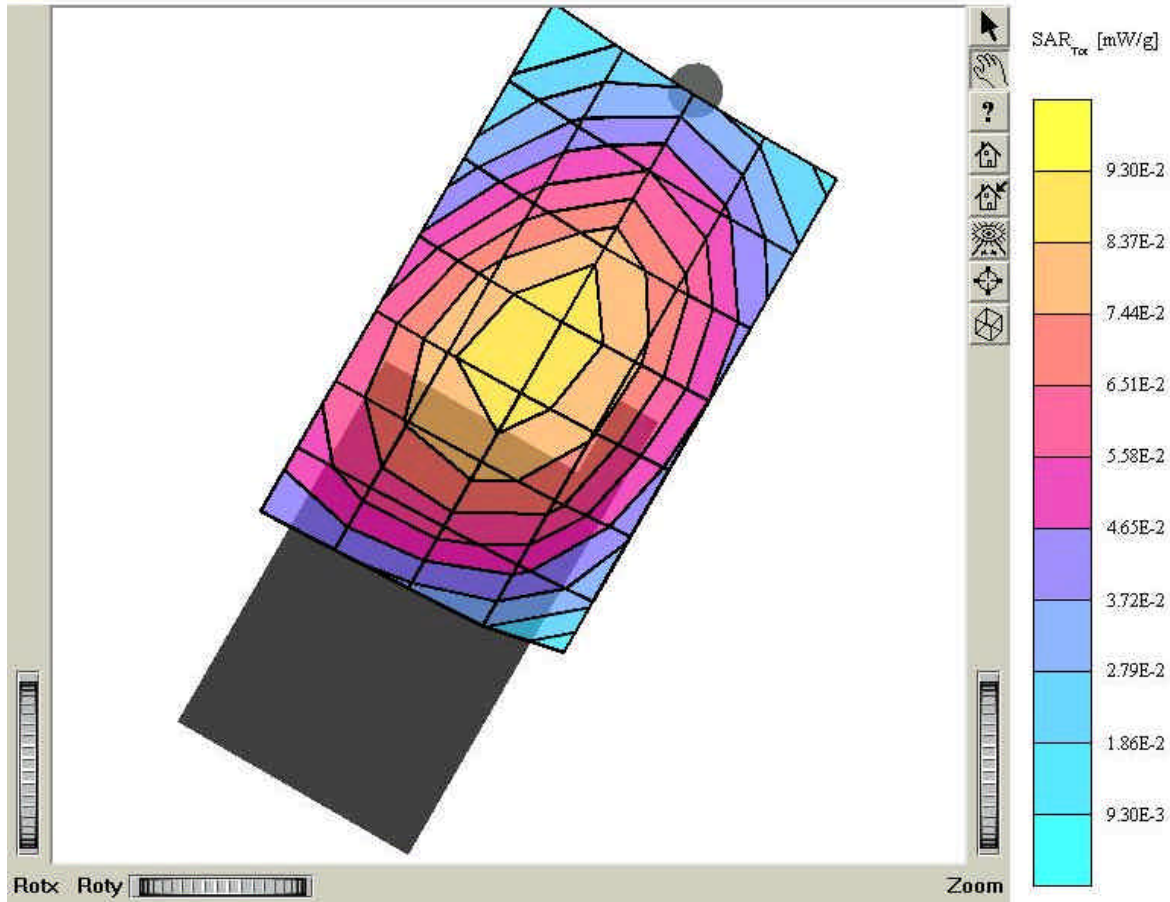


TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section: Position: (90°,180°): Frequency: 835 MHz
Probe: ET3DV6 - SN1608: ConvF(6.50,6.50,6.50): Crest factor: 1.0: Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $e_r = 43.2$, $r = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.138 mW/g, SAR (10g): 0.104 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Tilt 15° /left / Antenna: out
Mode: CDMA / Channel: 1013 (824.70MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

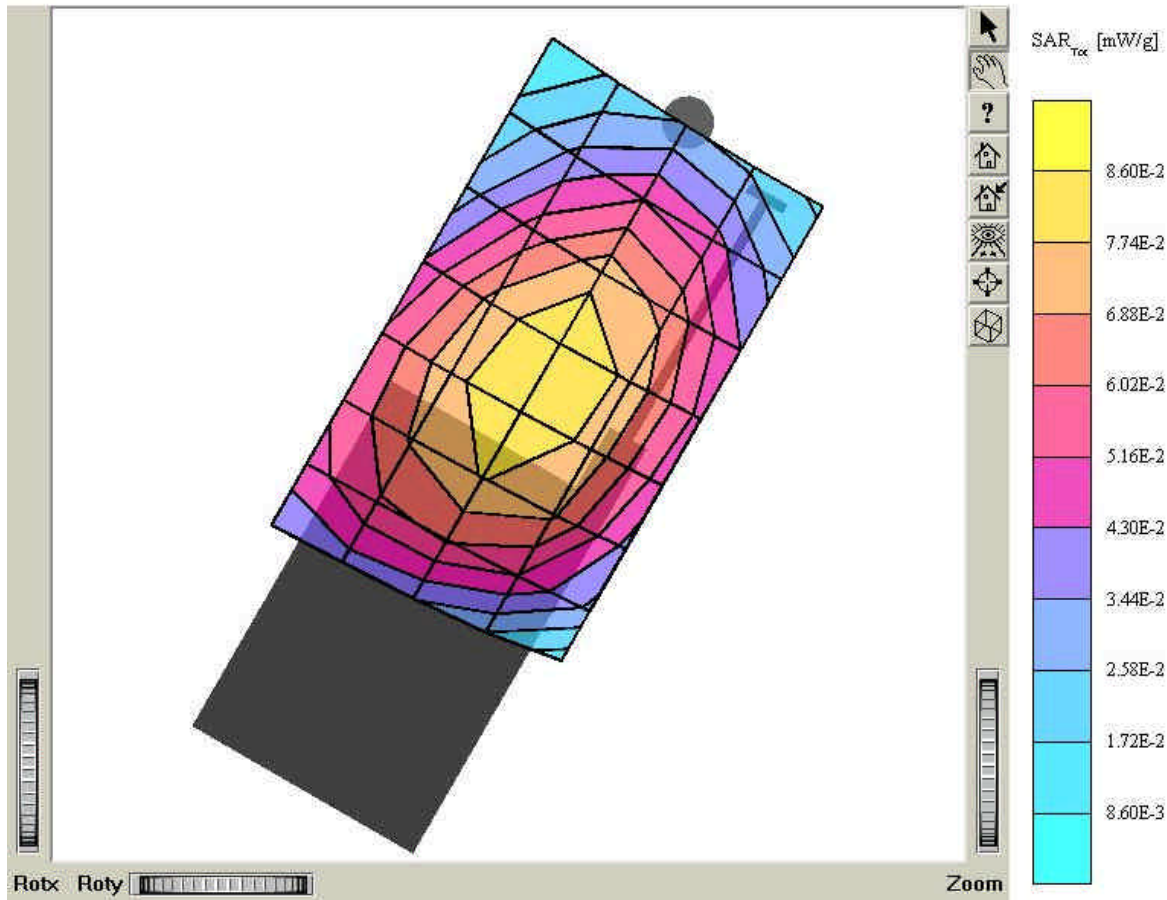


TDC-6610

SAM : Phantom: Left Hand (CRP) Section: Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.148 mW/g, SAR (10g): 0.110 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Tilt 15° /left / Antenna: in
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

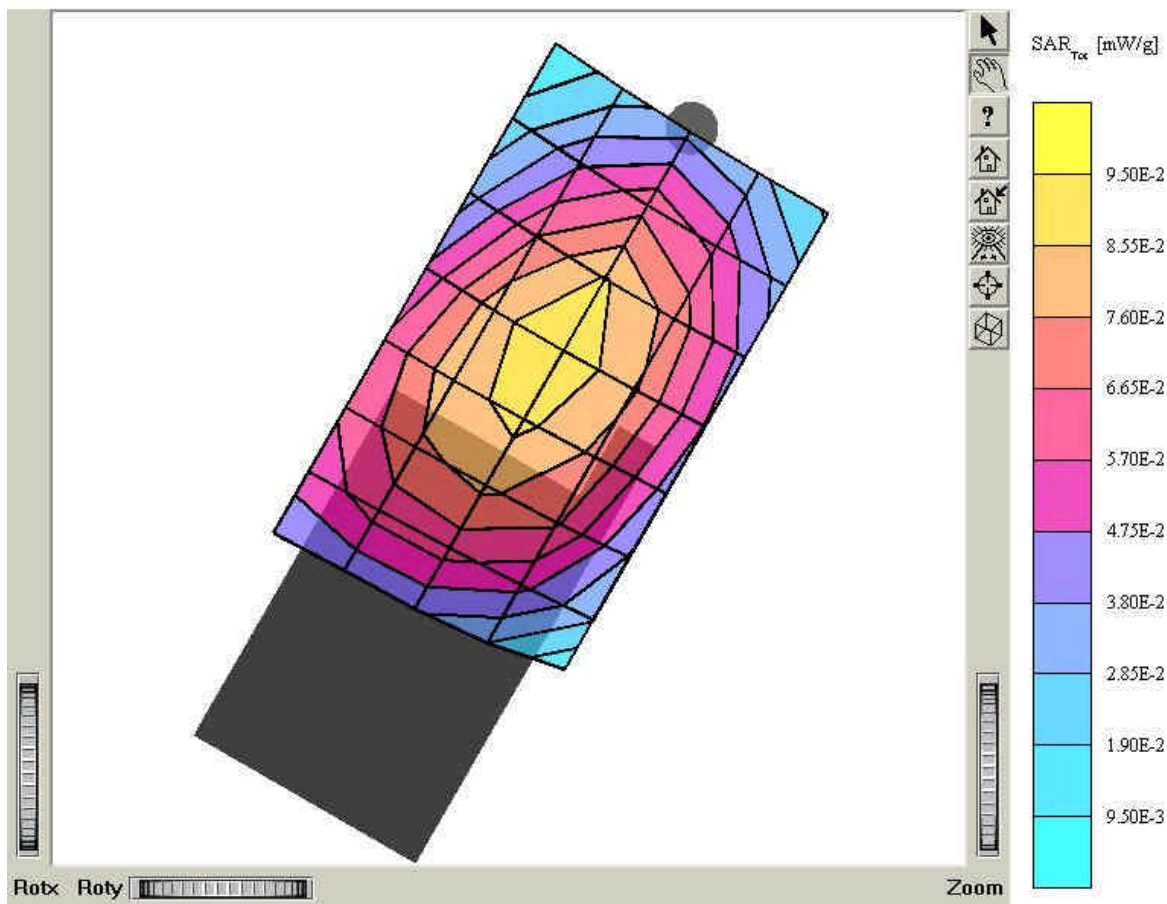

TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz: $s = 0.89 \text{ mho/m}$, $\epsilon_r = 43.2$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7; SAR (1g): 0.131 mW/g, SAR (10g): 0.0987 mW/g
Coarse: $D_x = 15.0$, $D_y = 15.0$, $D_z = 10.0$

Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610
Company: TELSON ELECTRONICS CO., LTD.
Test Position: Tilt 15° / left / Antenna: out
Mode: CDMA / Channel: 363 (835.89MHz)
Conducted Power: 26 dBm
Liquid Temperature: 21.5 °C
Date Tested: June 25, 2003

