


## TDC-6610

SAM 1 Phantom: Left Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $r = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.211 mW/g, SAR (10g): 0.157 mW/g  
Coarse:  $D_x = 15.0$ ,  $D_y = 15.0$ ,  $D_z = 10.0$

## Comment:


FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Tilt 15° / left / Antenna: in  
Mode: CDMA / Channel: 777 (848.89MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

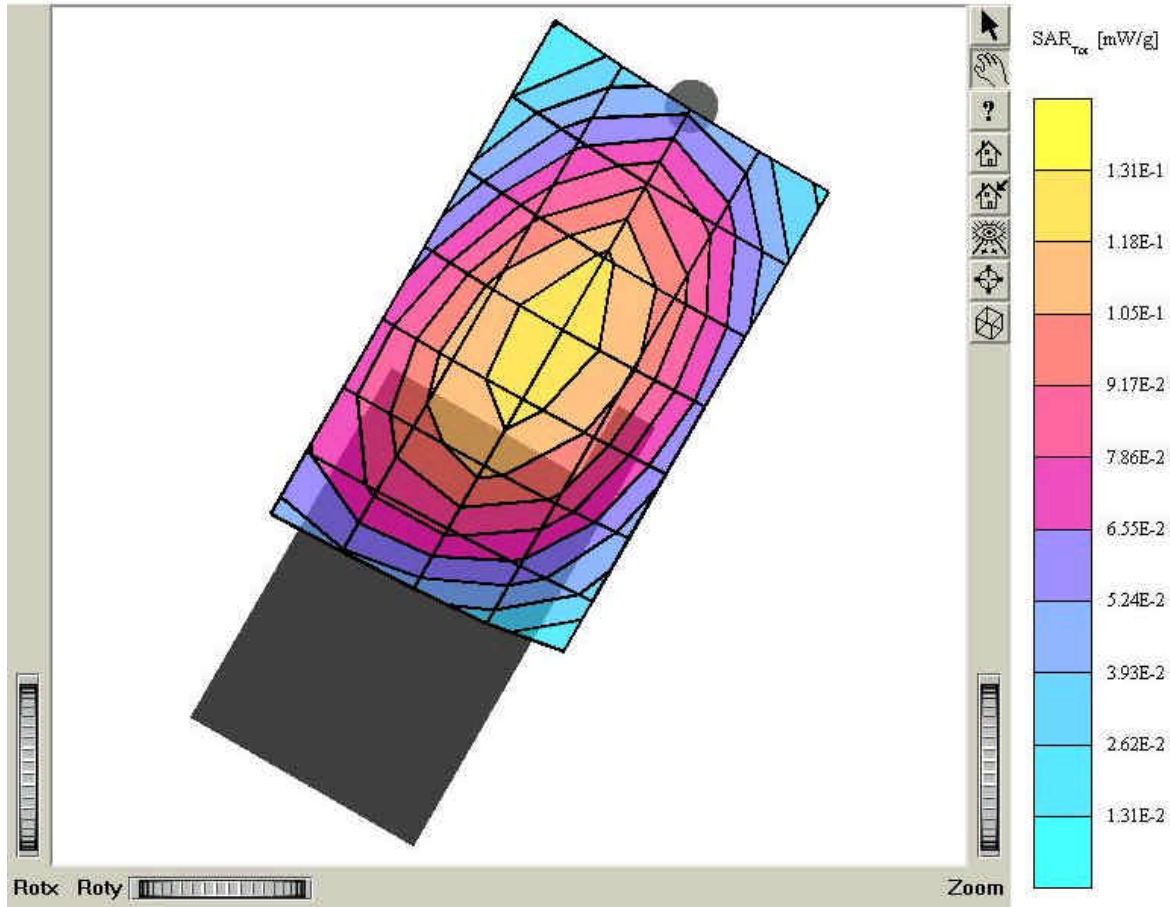

### TDC-6610

SAM : Phantom: Left Hand (CRP) Section: Position: (90°,180°); Frequency: 835 MHz  
 Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $\rho = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7; SAR (1g): 0.171 mW/g, SAR (10g): 0.128 mW/g  
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Comment:  
 FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
 Company: TELSON ELECTRONICS CO., LTD.  
 Test Position: Tilt 15° / left / Antenna: out  
 Mode: CDMA / Channel: 777 (848.89MHz)  
 Conducted Power: 26 dBm  
 Liquid Temperature: 21.5 °C  
 Date Tested: June 25, 2003

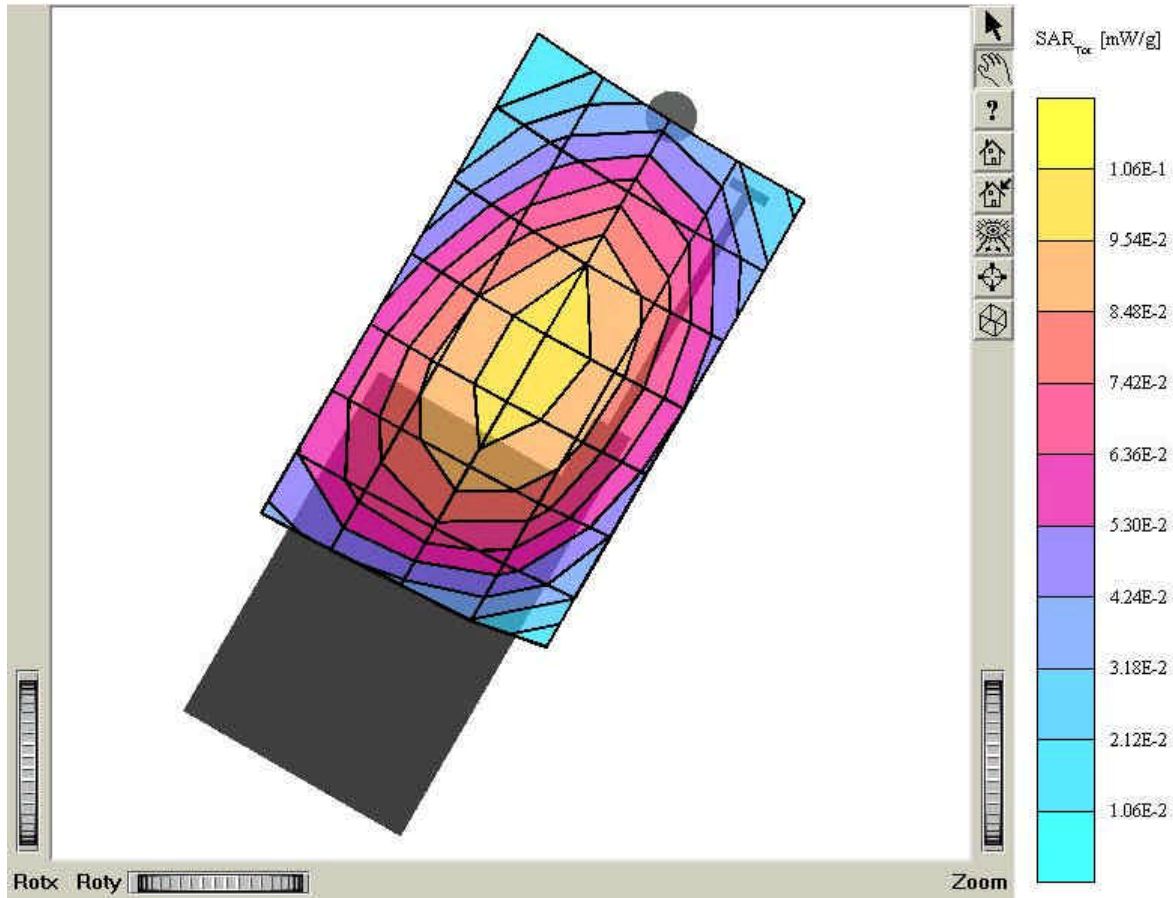


## TDC-6610

SAM 1 Phantom: Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $e_r = 43.2$ ,  $r = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.200 mW/g; SAR (10g): 0.145 mW/g  
Coarse:  $D_x = 15.0$ ,  $D_y = 15.0$ ,  $D_z = 10.0$

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Tilt 15° / Right / Antenna: In  
Mode: CDMA / Channel: 1013 (824.70MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

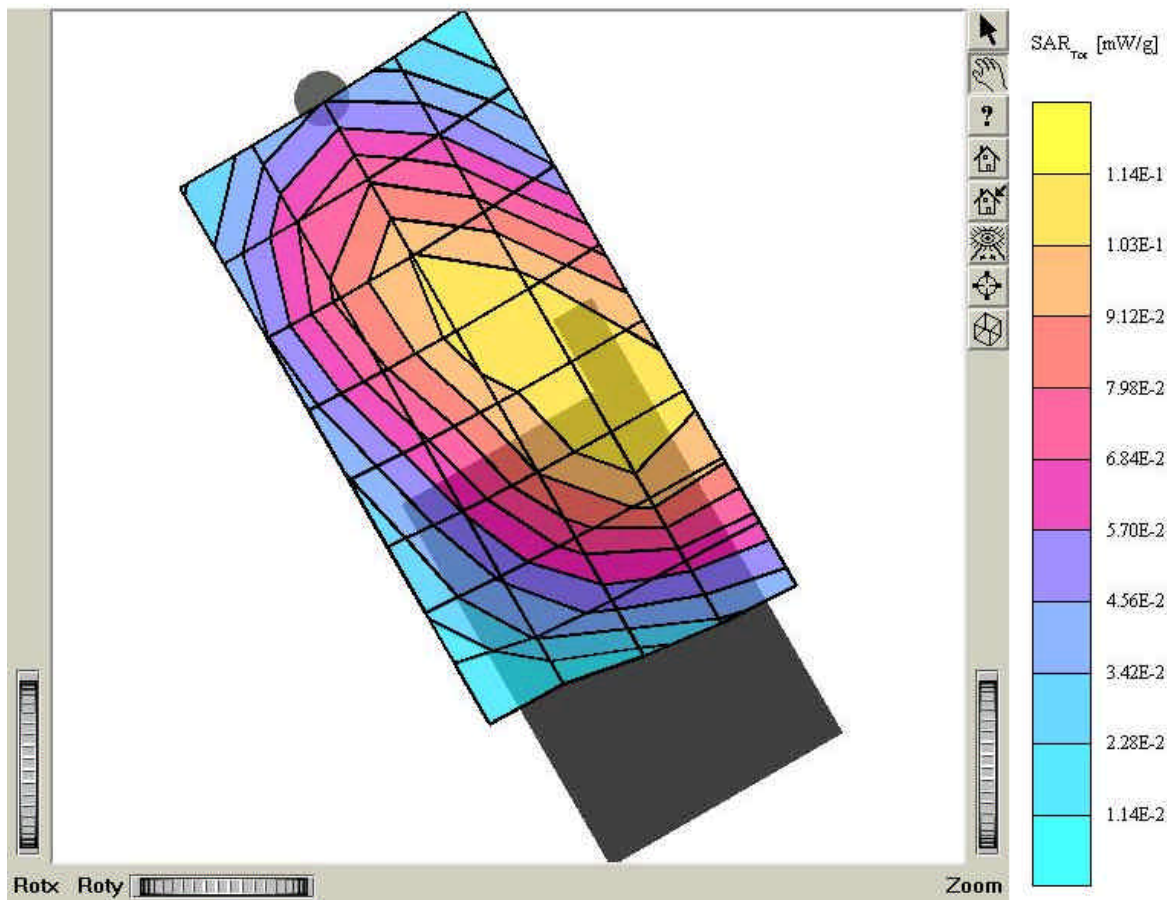


### TDC-6610

SAM : I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
 Probe: ET3DV6 - SN1608; ConvF(6,50,6,50,6,50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $\rho = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7: SAR (1g): 0.203 mW/g, SAR (10g): 0.147 mW/g  
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

#### Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
 Company: TELSON ELECTRONICS CO., LTD.  
 Test Position: Tilt 15° / Right / Antenna: out  
 Mode: CDMA / Channel: 1013 (824.70MHz)  
 Conducted Power: 26 dBm  
 Liquid Temperature: 21.5 °C  
 Date Tested: June 25, 2003

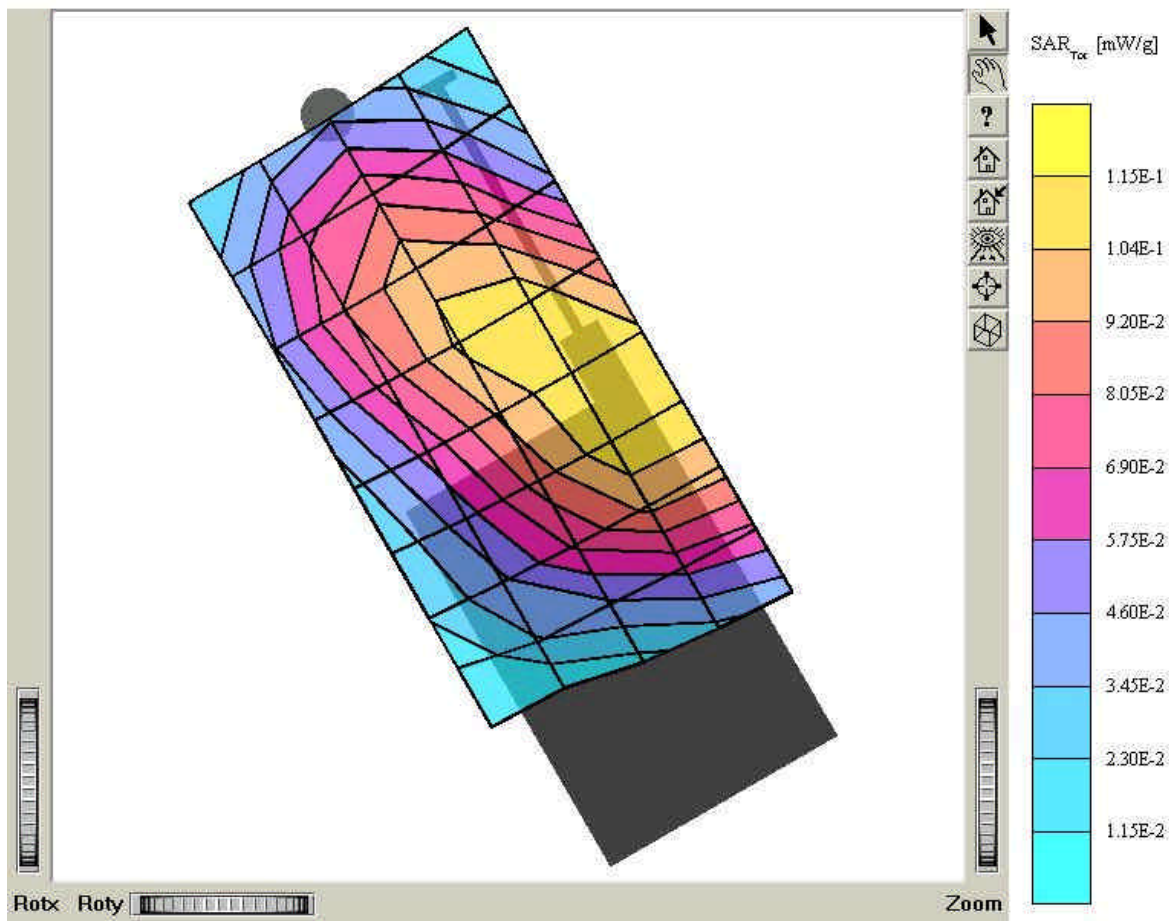


### TDC-6610

SAM : 1 Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
 Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $\rho = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7; SAR (1g): 0.206 mW/g; SAR (10g): 0.149 mW/g  
 Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

#### Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
 Company: TELSON ELECTRONICS CO., LTD.  
 Test Position: Tilt 15° / Right / Antenna: in  
 Mode: CDMA / Channel: 363 (835.89MHz)  
 Conducted Power: 26 dBm  
 Liquid Temperature: 21.5 °C  
 Date Tested: June 25, 2003

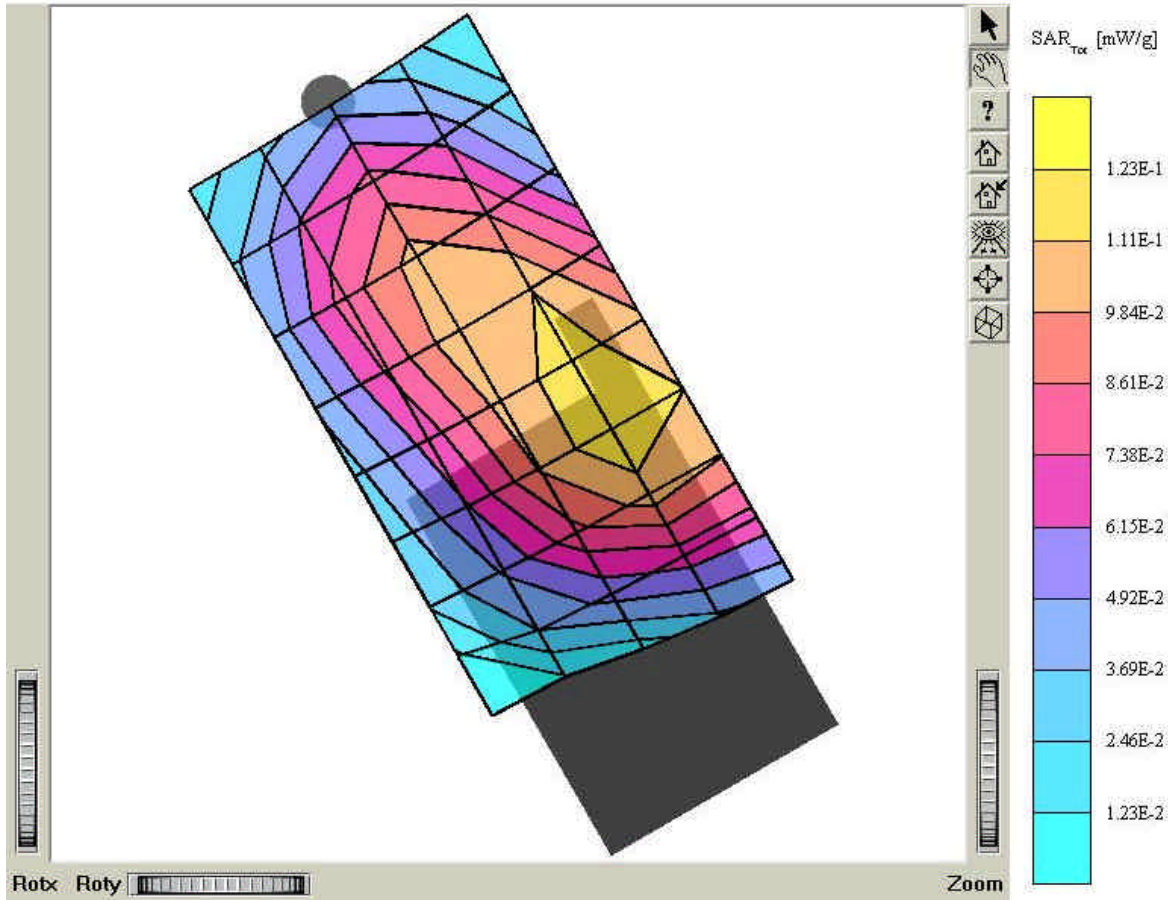


## TDC-6610

SAM I Phantom: Right Hand (CRP) Section: Position: (90°,180°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $r = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.195 mW/g, SAR (10g): 0.141 mW/g  
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Tilt 15° / Right / Antenna: out  
Mode: CDMA / Channel: 363 (835.89MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

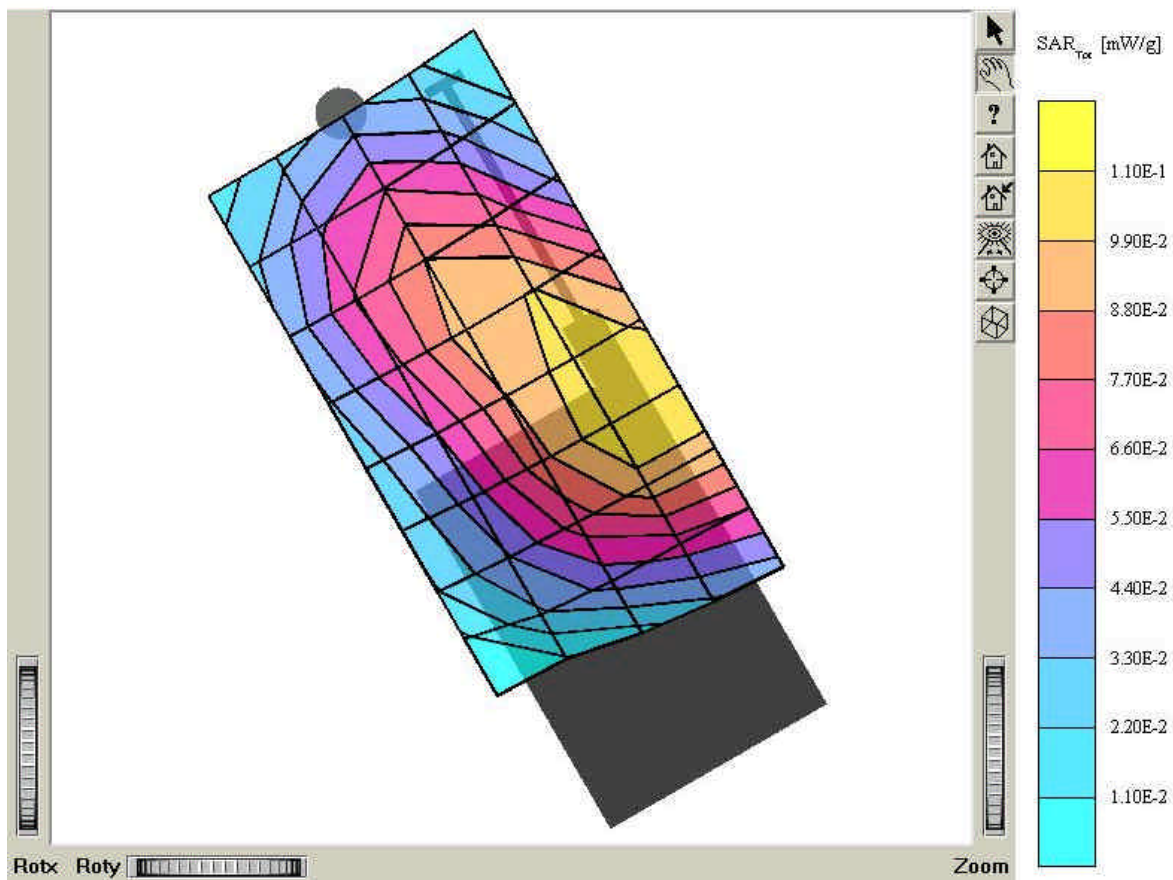


## TDC-6610

SAM: I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.259 mW/g, SAR (10g): 0.164 mW/g  
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Right Tilt 15° / Antenna: in  
Mode: CDMA / Channel: 777 (848.31MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

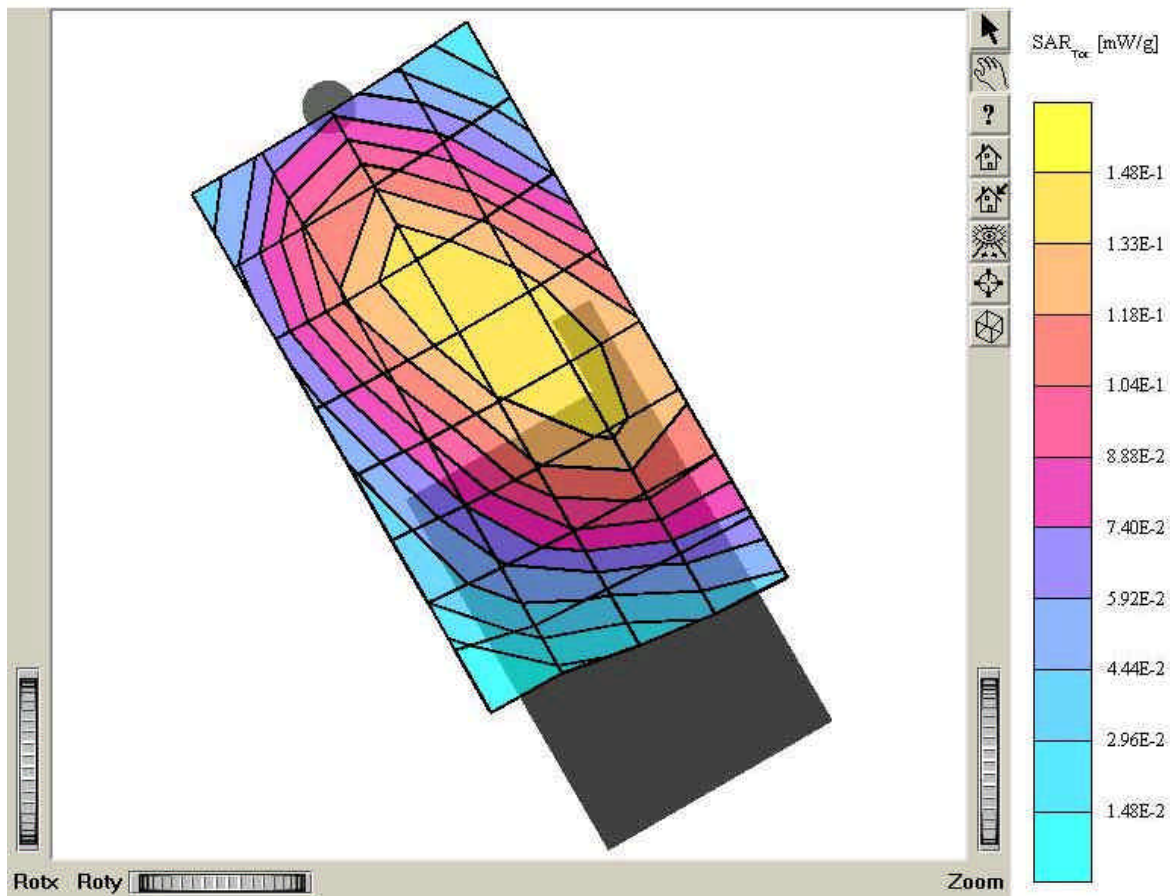


## TDC-6610

SAM 1 Phantom: Right Hand (CRP) Section: Position: (90°,180°): Frequency: 835 MHz  
Probe: ET3DV6 - SN1608: ConvF(6.50,6.50,6.50): Crest factor: 1.0: Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $\epsilon_r = 43.2$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.256 mW/g, SAR (10g): 0.188 mW/g  
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Tilt 15° / Right / Antenna: out  
Mode: CDMA / Channel: 777 (848.31MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

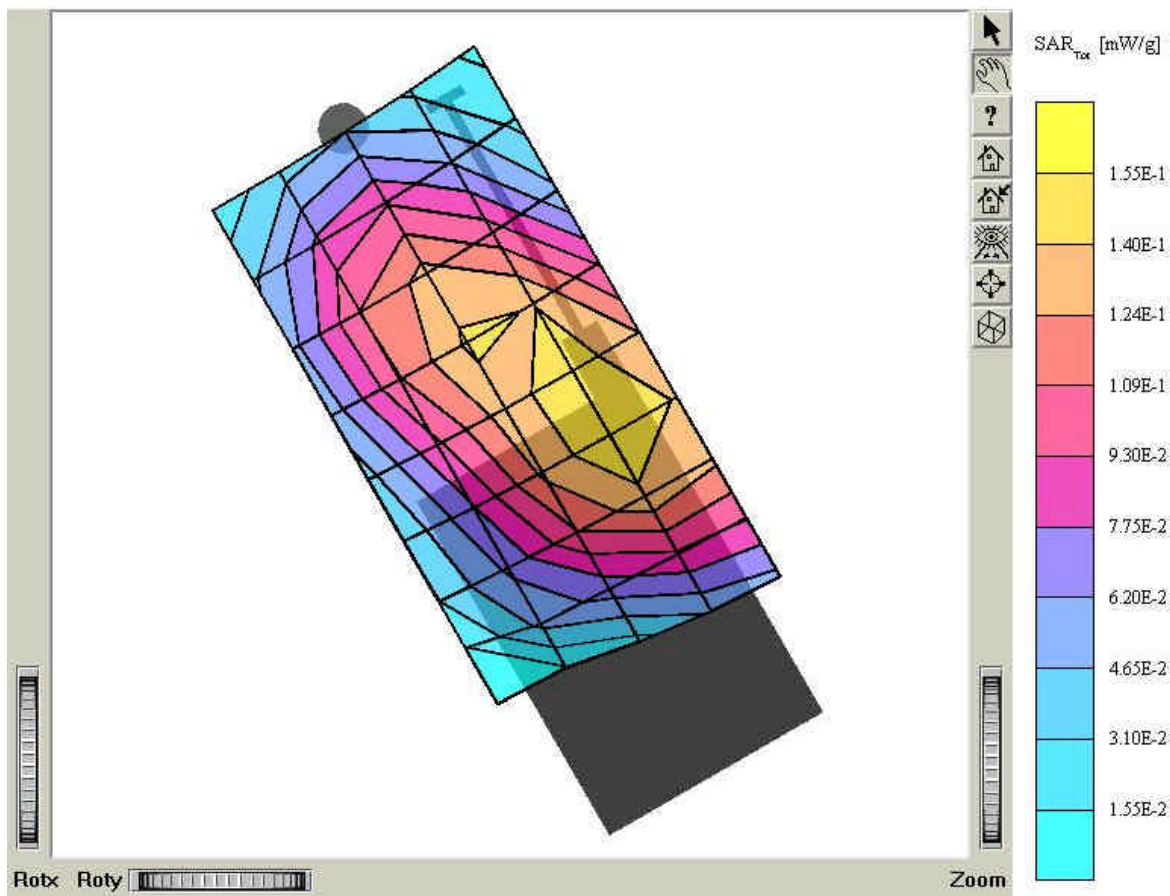


## TDC-6610

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.50,6.50,6.50); Crest factor: 1.0; Brain 835 MHz:  $s = 0.89 \text{ mho/m}$ ,  $e_r = 43.2$ ,  $r = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 1.04 mW/g, SAR (10g): 0.670 mW/g  
Cube 5x5x7:  $D_x = 8.0$ ,  $D_y = 8.0$ ,  $D_z = 5.0$

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Right / touch / Antenna: In  
Mode: CDMA / Channel: 777 (848.31MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

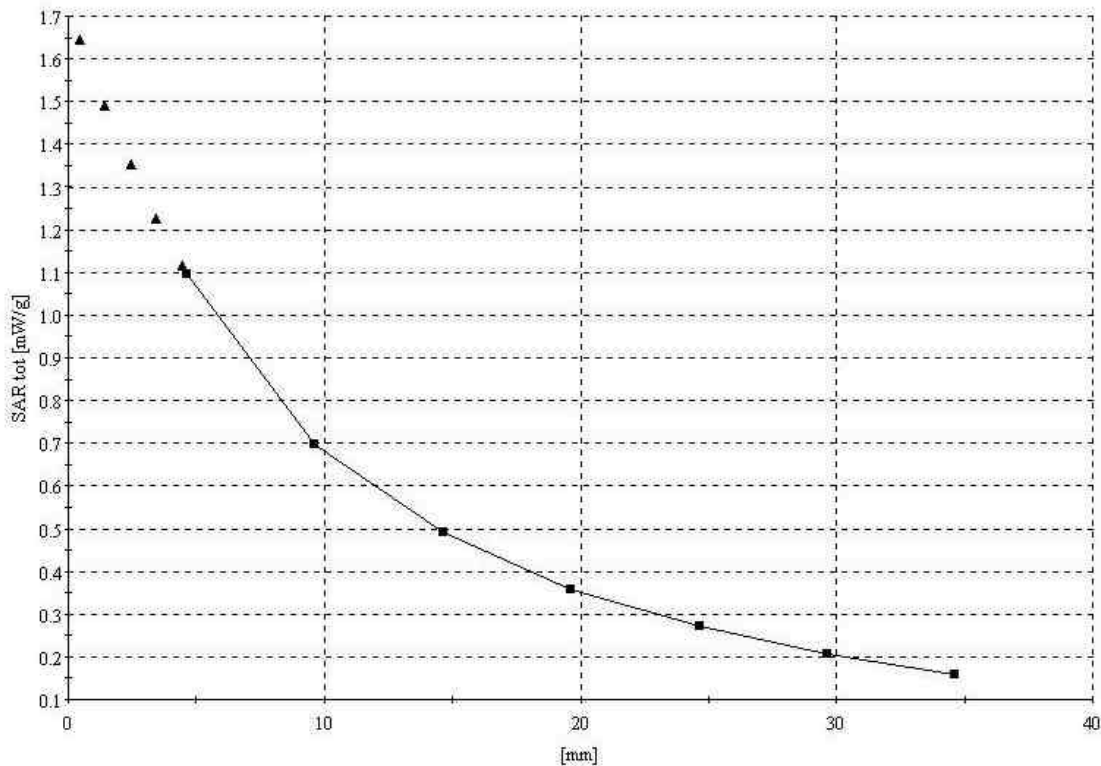


## TDC-6610(Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $\epsilon_r = 54.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.662 mW/g, SAR (10g): 0.446 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Body / Antenna: in  
Mode: CDMA / Channel: 1013 (824.70 MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

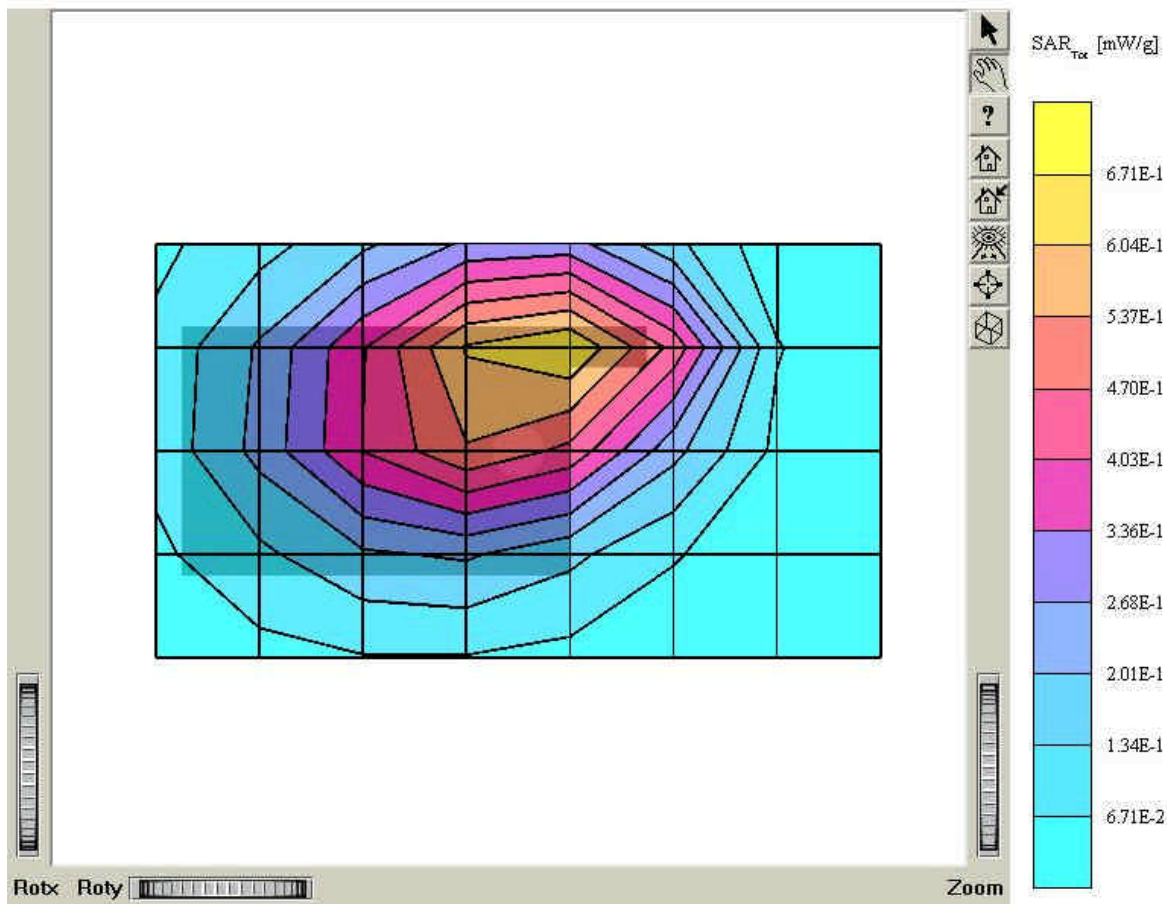


## TDC-6610(Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $\epsilon_r = 54.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.766 mW/g, SAR (10g): 0.514 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Body / Antenna: out  
Mode: CDMA / Channel: 1013 (824.70 MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

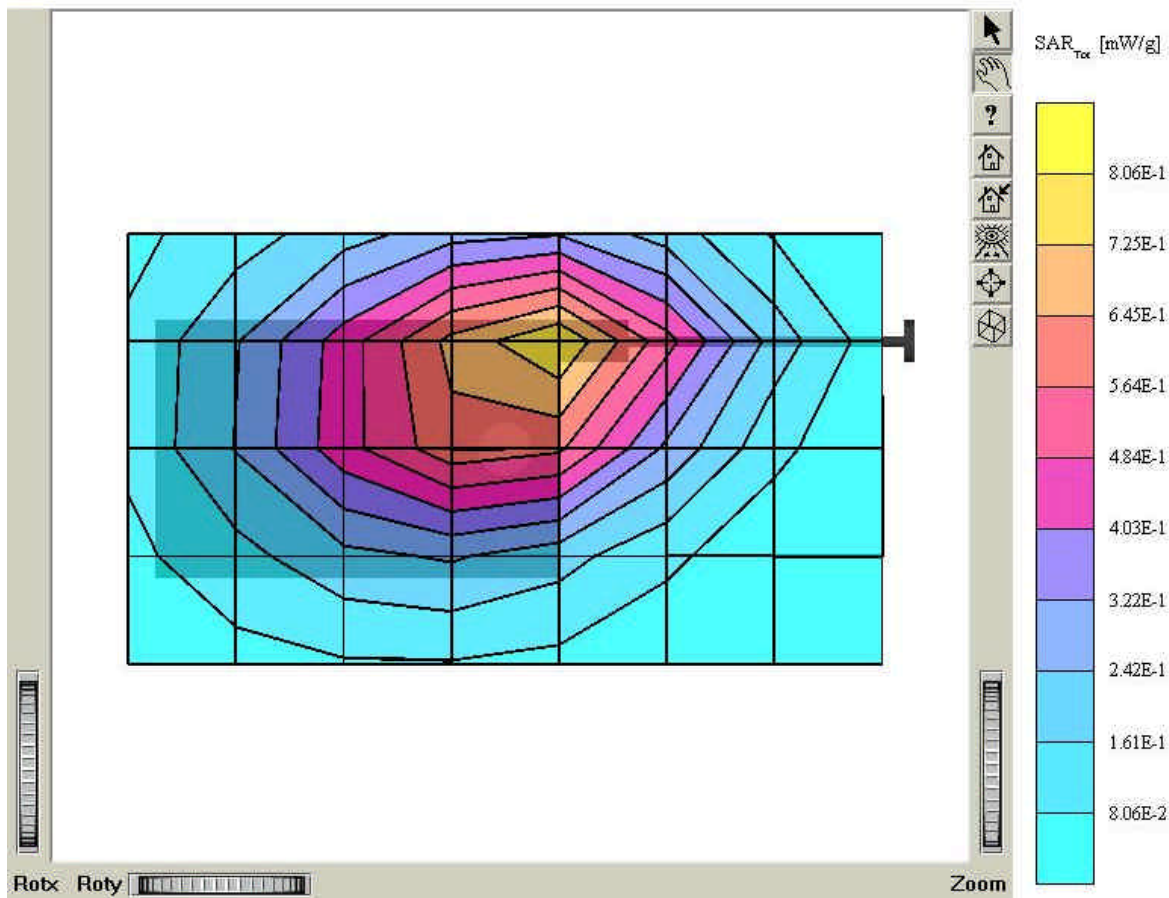


### TDC-6610(Body)

SAM II Phantom: Flat Section: Position: (90°,90°): Frequency: 835 MHz  
 Probe: ET3DV6 - SN1608: ConvF(6.30,6.30,6.30): Crest factor: 1.0: Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $\epsilon_r = 54.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7: SAR (1g): 0.544 mW/g, SAR (10g): 0.371 mW/g  
 Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$

#### Comment:


FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
 Company: TELSON ELECTRONICS CO., LTD.  
 Test Position: Body / Antenna: out  
 Mode: CDMA / Channel: 363 (835.89 MHz)  
 Conducted Power: 26 dBm  
 Liquid Temperature: 21.5 °C  
 Date Tested: June 25, 2003

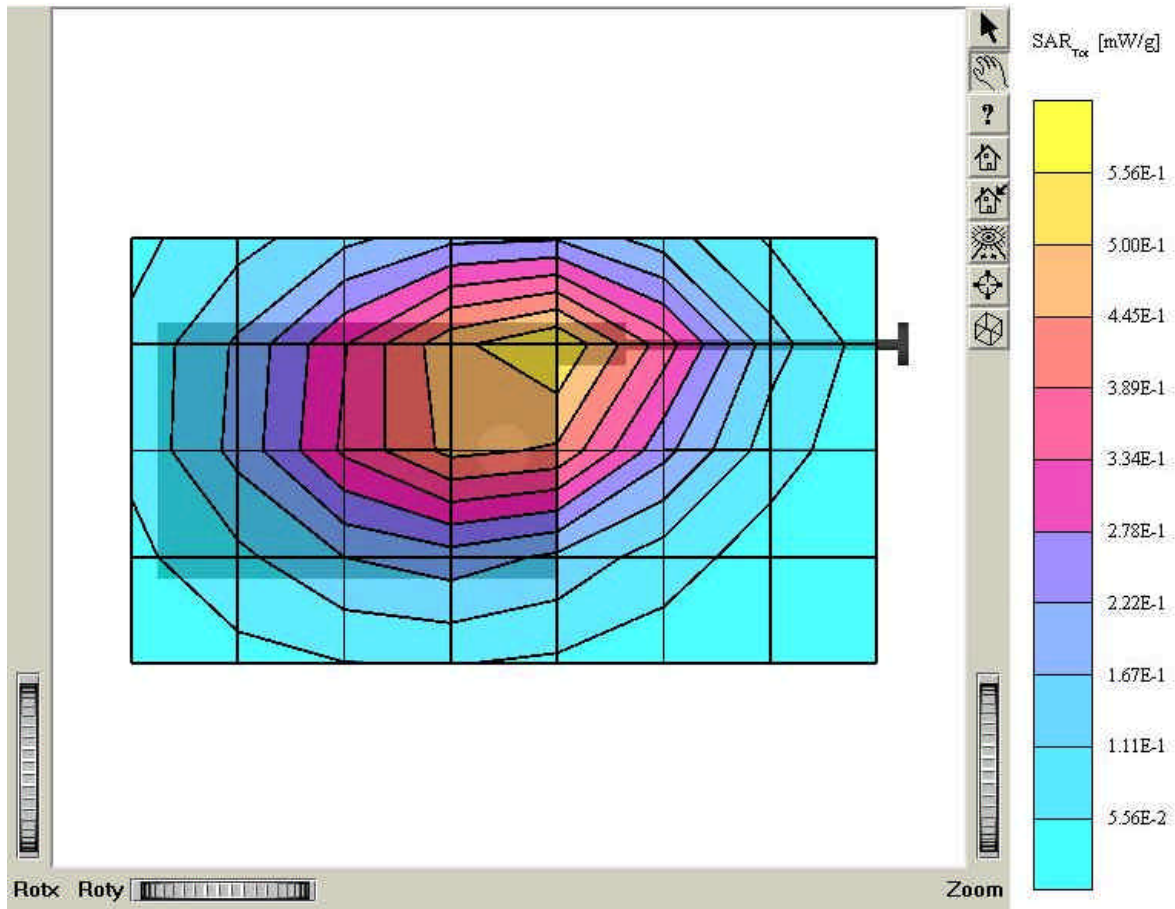

## TDC-6610(Body)

SAM II Phantom; Flat Section; Position: (90°, 90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $e_r = 54.0$ ,  $r = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.544 mW/g, SAR (10g): 0.371 mW/g  
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Comment:  
FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Body / Antenna: out  
Mode: CDMA / Channel: 363 (835.89 MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

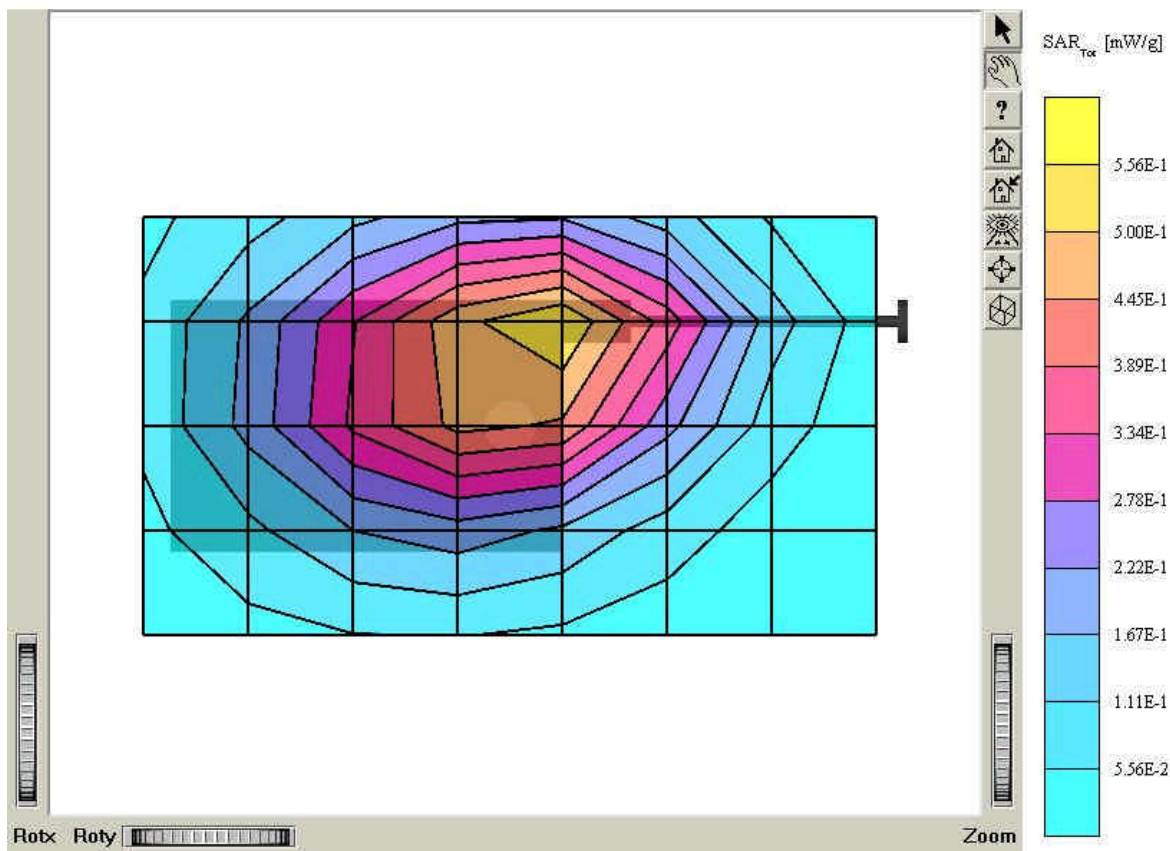


### TDC-6610(Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 835 MHz  
 Probe: ET3DV6 - SN1608; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $e_r = 54.0$ ,  $r = 1.00 \text{ g/cm}^3$   
 Cube 5x5x7; SAR (1g): 0.716 mW/g, SAR (10g): 0.487 mW/g  
 Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$

#### Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
 Company: TELSON ELECTRONICS CO., LTD.  
 Test Position: Body / Antenna: in  
 Mode: CDMA / Channel: 777 (848.31 MHz)  
 Conducted Power: 26 dBm  
 Liquid Temperature: 21.5 °C  
 Date Tested: June 25, 2003

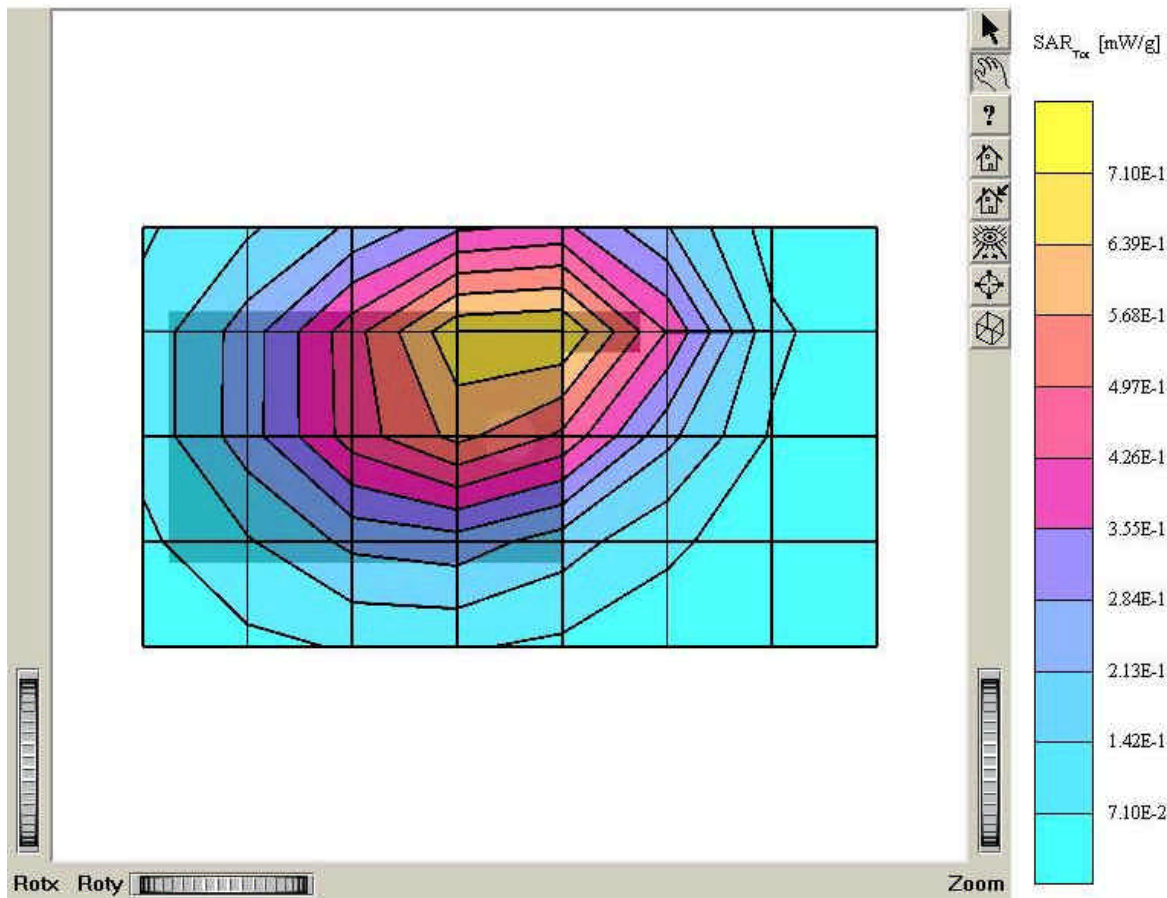


## TDC-6610(Body)

SAM II Phantom: Flat Section; Position: (90°, 90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.30,6.30,6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $\epsilon_r = 54.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7; SAR (1g): 0.708 mW/g, SAR (10g): 0.483 mW/g  
Coarse:  $D_x = 20.0$ ,  $D_y = 20.0$ ,  $D_z = 10.0$

## Comment:

FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Body / Antenna: out  
Mode: CDMA / Channel: 777 (848.31 MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

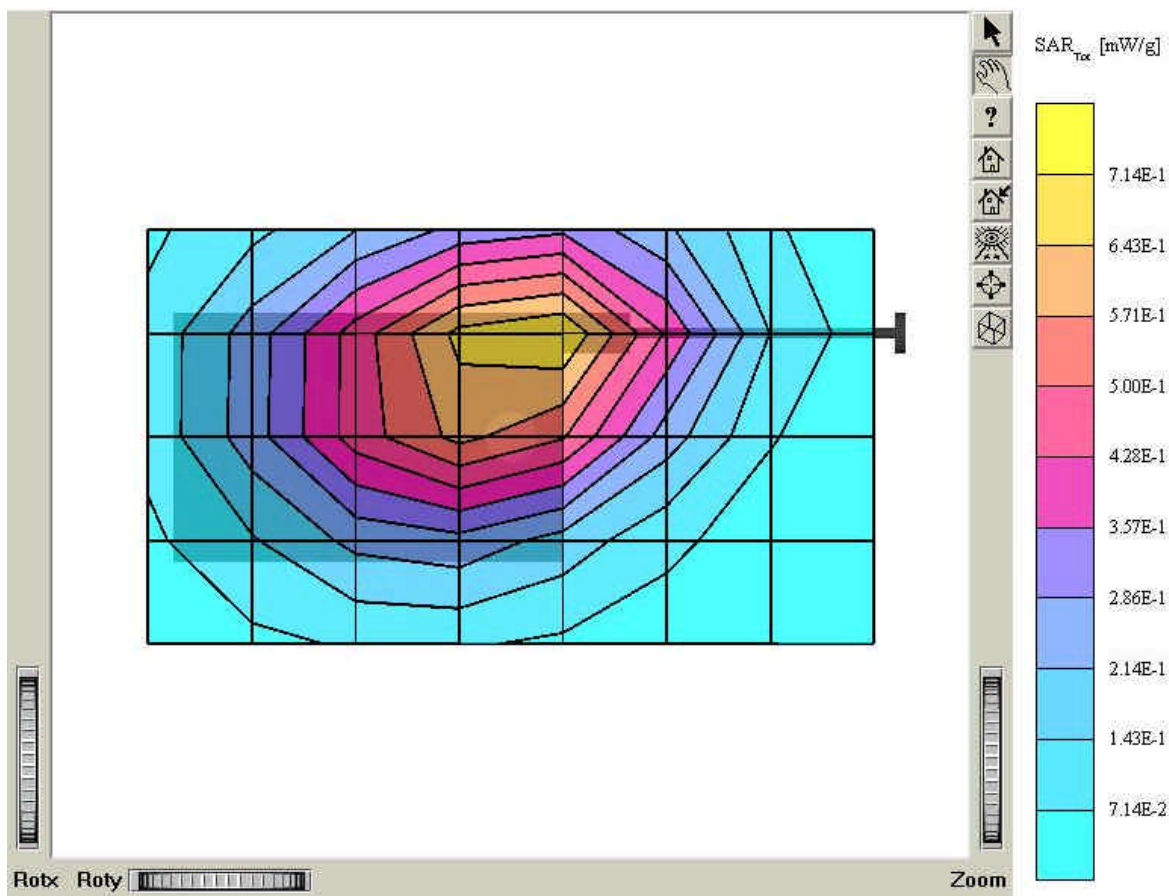

## TDC-6610(Body)

SAM II Phantom: Flat Section; Position: (90°, 90°); Frequency: 835 MHz  
Probe: ET3DV6 - SN1608; ConvF(6.30, 6.30, 6.30); Crest factor: 1.0; Body 835 MHz:  $s = 0.96 \text{ mho/m}$ ,  $\epsilon_r = 54.0$ ,  $\rho = 1.00 \text{ g/cm}^3$   
Cube 5x5x7: SAR (1g): 0.766 mW/g, SAR (10g): 0.514 mW/g  
Cube 5x5x7:  $D_x = 8.0$ ,  $D_y = 8.0$ ,  $D_z = 5.0$

Comment:  
FCC ID: MC6TDC-6610 / MODEL: TDC-6610  
Company: TELSON ELECTRONICS CO., LTD.  
Test Position: Body / Antenna: out  
Mode: CDMA / Channel: 1013 (824.70 MHz)  
Conducted Power: 26 dBm  
Liquid Temperature: 21.5 °C  
Date Tested: June 25, 2003

