

Project Number: 99ME45100
File Number: NC3932
Model: FFPA-8689-60
FCC ID: MCD FFPA8689-60

Issue Date: December 16, 1999

Two Signal Intermodulation Distortion Measurement

Test Procedure

Two signals were applied to provide two-tones that would produce 3rd order intermodulation (IMD's) that would fall out of the 869-894 MHz transmit cellular band and other 3rd order IMD's that would be in the 869-894 MHz transmit band. The signals were modulated with AMPS, TDMA, and CDMA. The input was adjusted to produce maximum output power (60W) from the amplifier.


The frequency range from 30MHz to 10GHz was investigated for conducted spurious emissions. This measurement was performed to ensure that any out-of-band emissions produced by the intermodulation of the two injected frequencies were at least 60dB down from the fundamental.

Results:

No out of band emissions were found to be within 60dB of the injected frequencies.

Project Number: 99ME45100
File Number: NC3932
Model: FFPA-8689-60
FCC ID: MCD FFPA8689-60

Issue Date: December 16, 1999

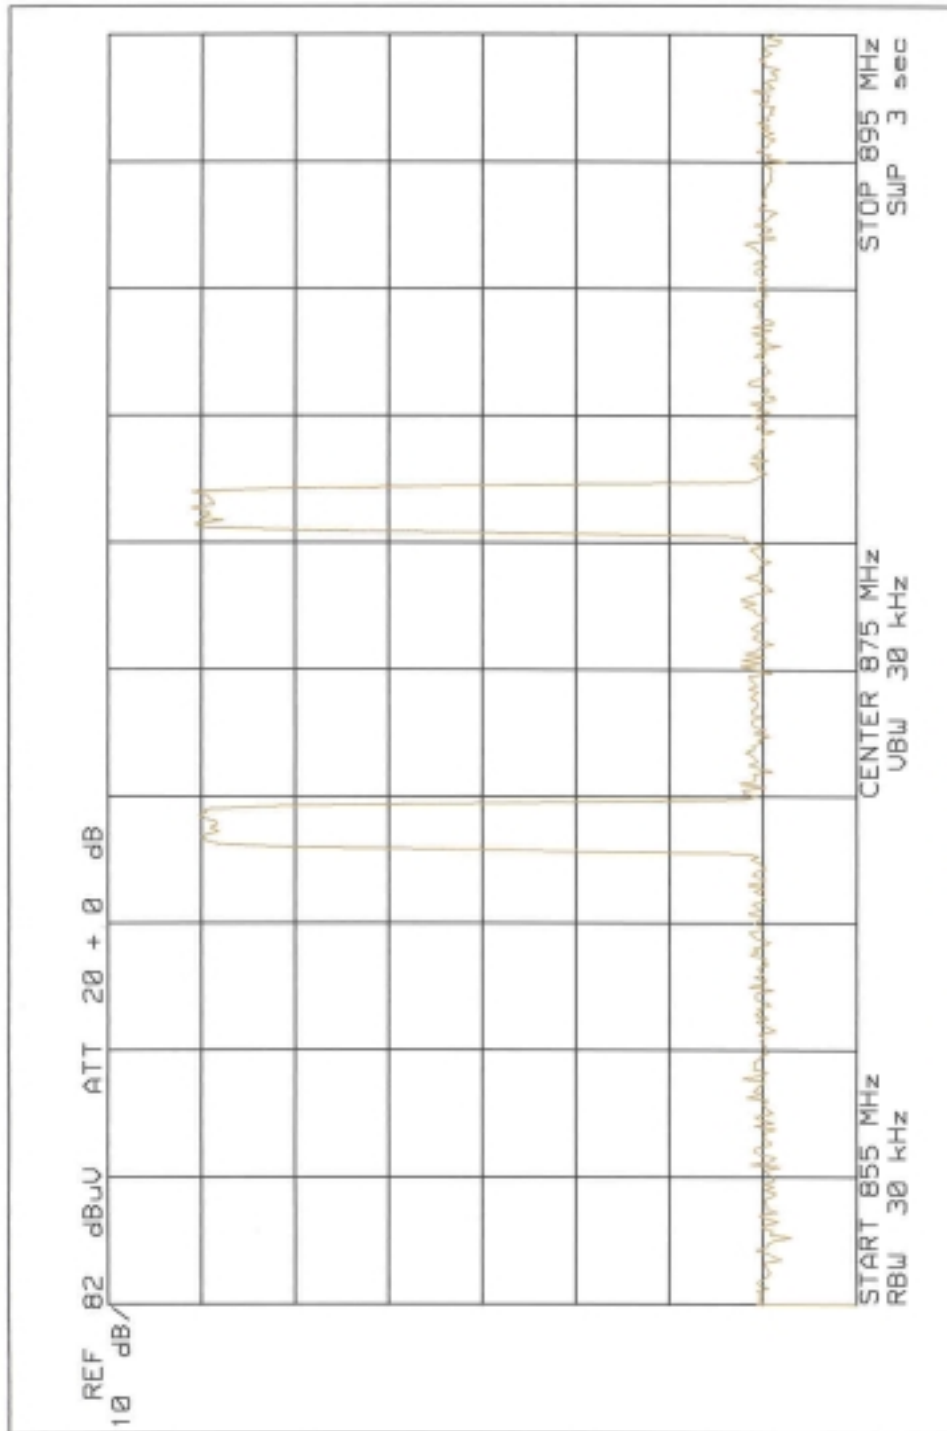


Observations/Comments: 2 Tone COMA IN AUT

Tested By: WDW 10/28/99

Project Number: 99ME45100
File Number: NC3932
Model: FFPA-8689-60
FCC ID: MCD FFPA8689-60

Issue Date: December 16, 1999

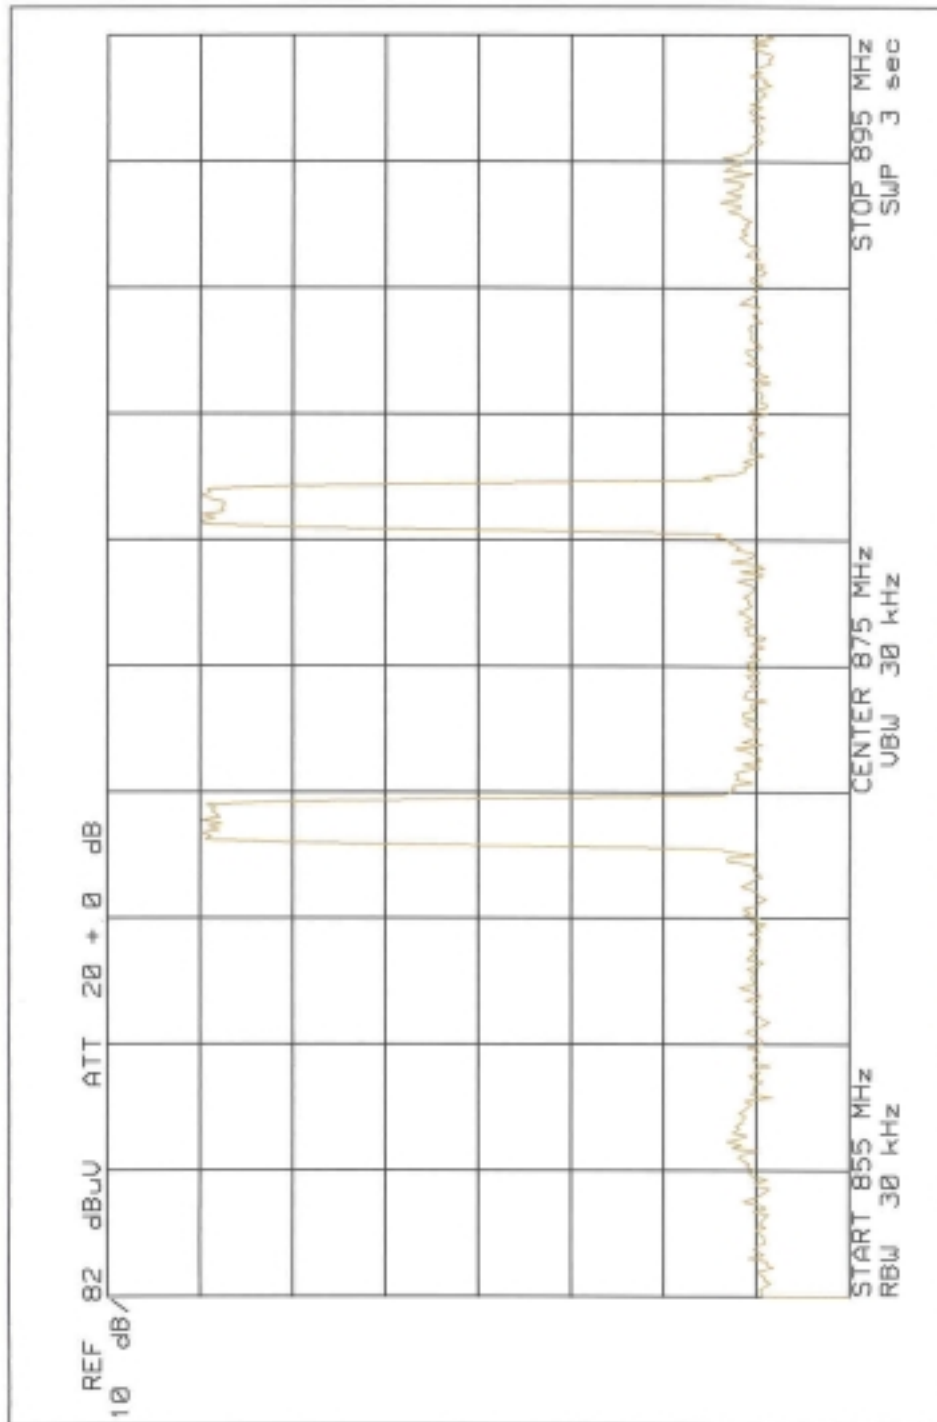


Observations/Comments: 2 Tone COMA OUTPUT FFPA 8689-60

Tested By: W. W. W. 10/28/99

Project Number: 99ME45100
File Number: NC3932
Model: FFPA-8689-60
FCC ID: MCD FFPA8689-60

Issue Date: December 16, 1999

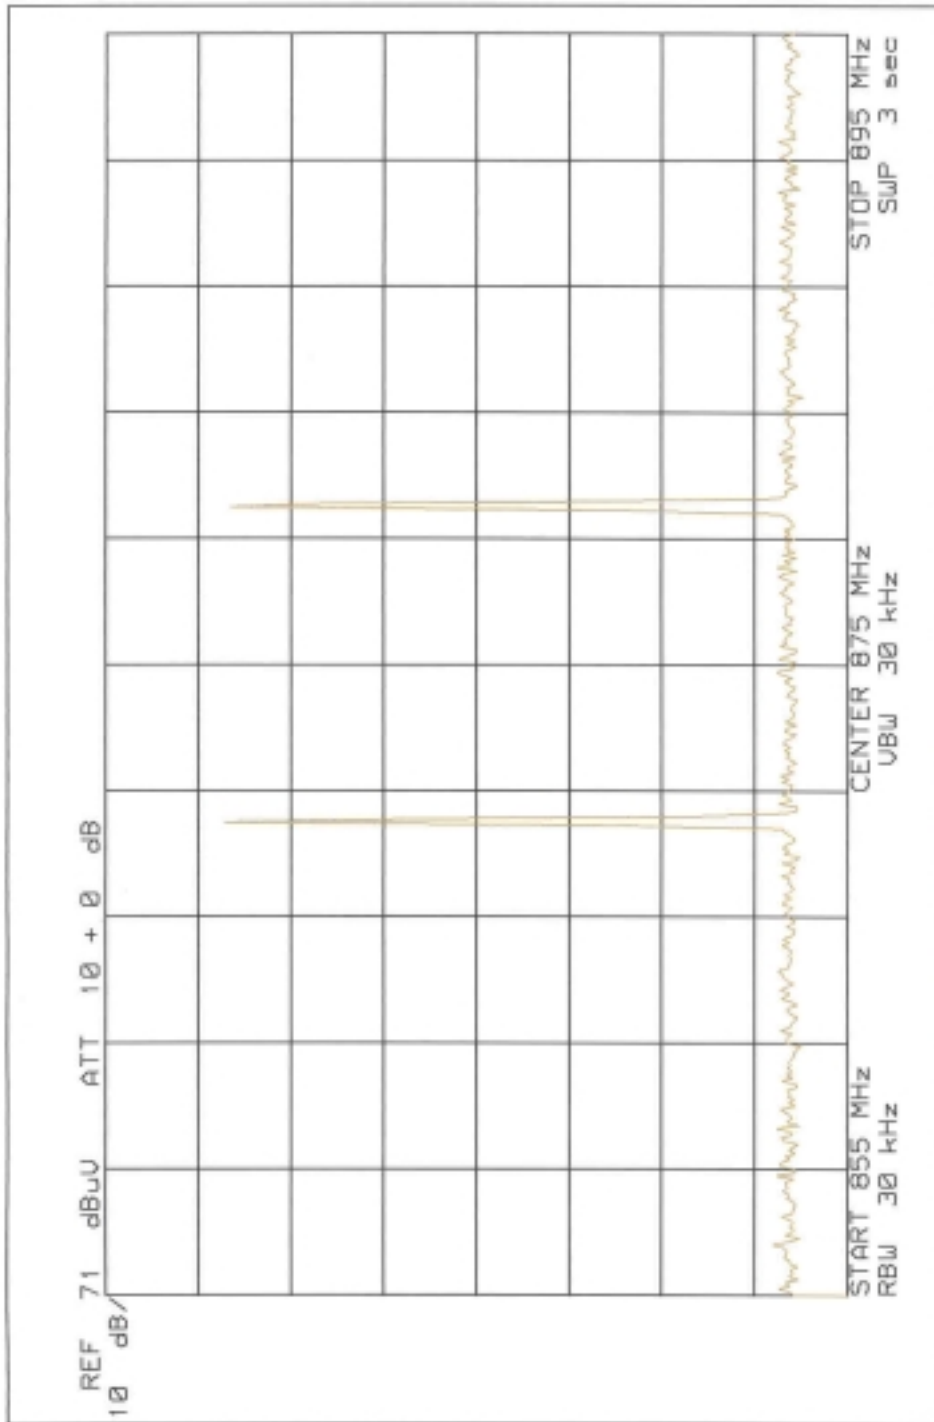


Observations/Comments: 2 Tones T0M A Input

Tested By: W.D. Nien 10/28/99

Project Number: 99ME45100
File Number: NC3932
Model: FFPA-8689-60
FCC ID: MCD FFPA8689-60

Issue Date: December 16, 1999

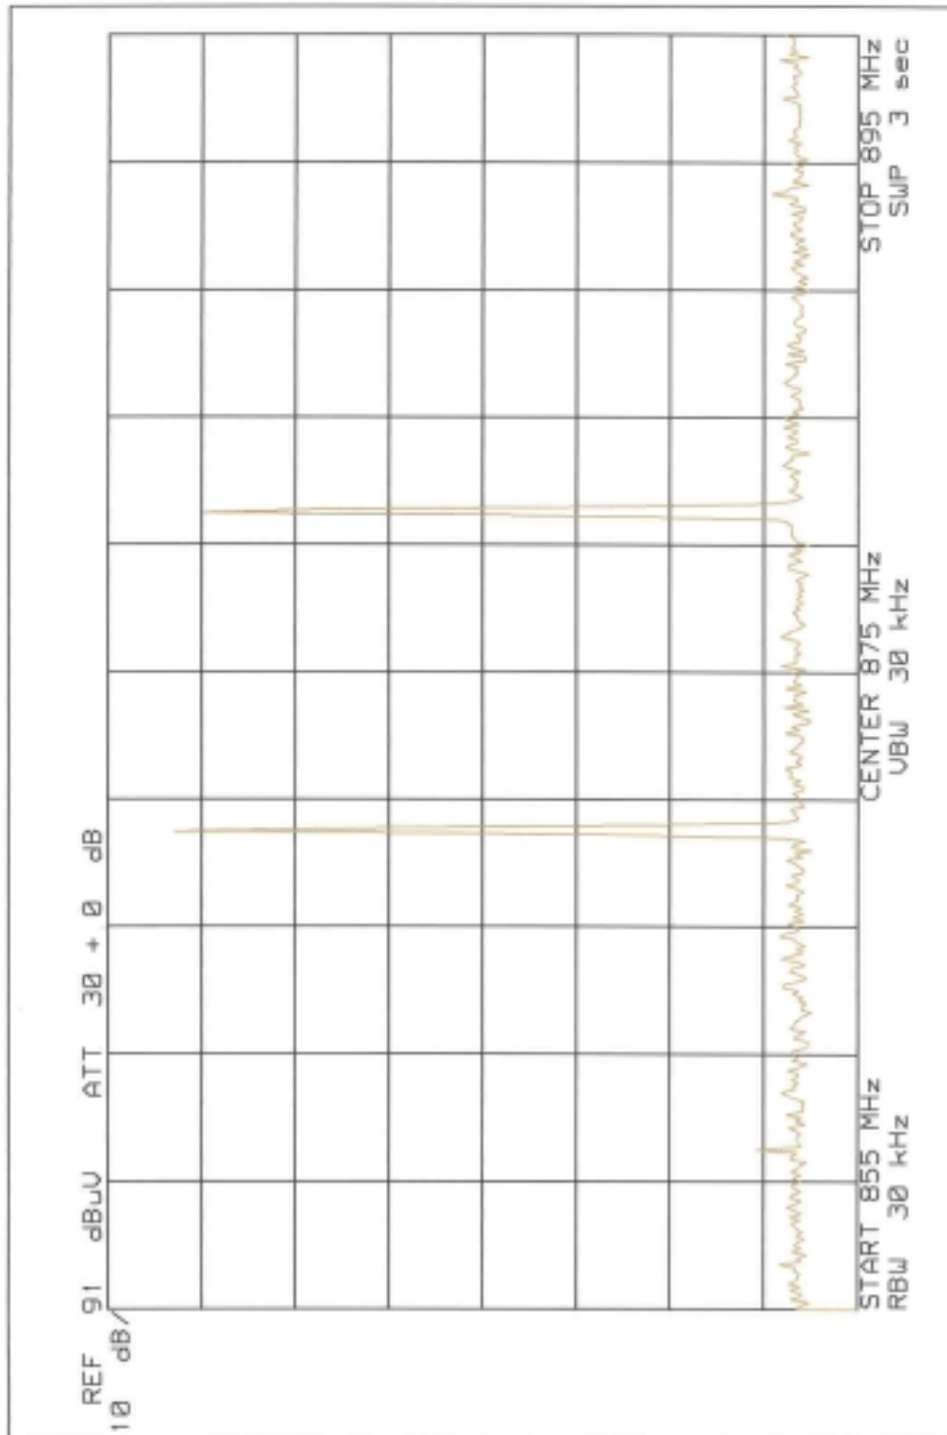

Observations/Comments: 2 Tests TO MA OUT PUT FFPA 8689-60

Tested By: _____