



FCC Radio Test Report

FCC ID: MCLJ20H049

This report concerns (check one) : ☒ Original Grant ☐ Class I Change

Issued Date : Dec. 27, 2010

Project No. : R1011008

Equipment : RF Module

Model Name : J20H049

Applicant : HON HAI Precision IND. CO., LTD.

Address : 5F-1, 5 Hsin-An Road, Hsinchu
Science-Based Industri, Hsin Chu,
Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Nov. 22, 2010

Date of Test: Nov. 22, 2010 ~ Dec. 20, 2010

Testing Engineer

: Gary Chou
(Gary Chou)

Technical Manager

: Jeff Yang
(Jeff Yang)

Authorized Signatory

: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.

NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 . EMC EMISSION TEST	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 POWER LINE CONDUCTED EMISSION	16
4.1.2 MEASUREMENT INSTRUMENTS LIST	16
4.1.3 TEST PROCEDURE	17
4.1.4 DEVIATION FROM TEST STANDARD	17
4.1.5 TEST SETUP	17
4.1.6 EUT OPERATING CONDITIONS	17
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 RADIATED EMISSION LIMITS	20
4.2.2 MEASUREMENT INSTRUMENTS LIST	21
4.2.3 TEST PROCEDURE	21
4.2.4 DEVIATION FROM TEST STANDARD	21
4.2.5 TEST SETUP	22
4.2.6 EUT OPERATING CONDITIONS	22
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	23
4.2.8 TEST RESULTS - ABOVE 1000MHZ	27
4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS	99
5 . BANDWITH TEST	123
5.1 APPLIED PROCEDURES / LIMIT	123
5.1.1 MEASUREMENT INSTRUMENTS LIST	123
5.1.2 TEST PROCEDURE	123
5.1.3 DEVIATION FROM STANDARD	123
5.1.4 TEST SETUP	123
5.1.5 EUT OPERATION CONDITIONS	123



Table of Contents	Page
5.1.6 TEST RESULTS	124
6 . PEAK OUTPUT POWER TEST	130
6.1 APPLIED PROCEDURES / LIMIT	130
6.1.1 MEASUREMENT INSTRUMENTS LIST	130
6.1.2 TEST PROCEDURE	130
6.1.3 DEVIATION FROM STANDARD	130
6.1.4 TEST SETUP	130
6.1.5 EUT OPERATION CONDITIONS	130
6.1.6 TEST RESULTS	131
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	134
7.1 APPLIED PROCEDURES / LIMIT	134
7.1.1 MEASUREMENT INSTRUMENTS LIST	134
7.1.2 TEST PROCEDURE	134
7.1.3 DEVIATION FROM STANDARD	134
7.1.4 TEST SETUP	134
7.1.5 EUT OPERATION CONDITIONS	134
7.1.6 TEST RESULTS	135
8 . POWER SPECTRAL DENSITY TEST	147
8.1 APPLIED PROCEDURES / LIMIT	147
8.1.1 MEASUREMENT INSTRUMENTS LIST	147
8.1.2 TEST PROCEDURE	147
8.1.3 DEVIATION FROM STANDARD	147
8.1.4 TEST SETUP	147
8.1.5 EUT OPERATION CONDITIONS	147
8.1.6 TEST RESULTS	148
9 . RF EXPOSURE TEST	154
9.1 APPLIED PROCEDURES / LIMIT	154
9.1.1 MEASUREMENT INSTRUMENTS LIST	154
9.1.2 MPE CALCULATION METHOD	154
9.1.3 DEVIATION FROM STANDARD	155
9.1.4 TEST SETUP	155
9.1.5 EUT OPERATION CONDITIONS	155
9.1.6 TEST RESULTS	156
10 . EUT TEST PHOTO	158
11 . HISTORY	161



1. CERTIFICATION

Equipment : RF Module
Brand Name : FOXCONN
Model Name : J20H049
Applicant : HON HAI Precision IND. CO., LTD.
Date of Test : Nov. 22, 2010 ~ Dec. 20, 2010
Standards : FCC Part15, Subpart C / ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1011008) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

- C02:** (VCCI RN: C-3477)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)
- CB08:** (VCCI RN: G-91; FCC RN: 614388; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C02	ANSI	150 kHz ~ 30 MHz	2.59	

B. Radiated Measurement :

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated Emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
		Horizontal Polarization	200 - 1000MHz	3.11 dB
		Horizontal Polarization	1 - 18GHz	3.97 dB
		Horizontal Polarization	18 - 40GHz	4.01 dB
	Vertical Polarization	Vertical Polarization	30 - 200MHz	3.22 dB
		Vertical Polarization	200 - 1000MHz	3.24 dB
		Vertical Polarization	1 - 18GHz	4.05 dB
		Vertical Polarization	18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	RF Module	
Brand Name	FOXCONN	
Model Name	J20H049	
OEM Brand/Model Name	N/A	
Model Difference	N/A	
Product Description	The EUT is a RF Module.	
	Operation Frequency:	2412~2462 MHz
	Modulation Type:	802.11b:CCK, DQPSK, DBPSK 802.11g:64QAM, 16QAM, QPSK, BPSK 802.11n:64QAM, 16QAM, QPSK, BPSK
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n(HT20) MCS0~7:6.5/13/19.5/26 39/52/58.5/65 Mbps
	Number Of Channel:	Please see Note 2.
	Antenna Designation:	Please see Note 3.
	Antenna Gain(Peak):	Please see Note 3.
	Peak Output Power(Max):	802.11b: 19.90 dBm Max. 802.11g: 25.32 dBm Max. 802.11n(20MHz): 25.08 dBm Max.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage supplied from System	
Power Rating	DC 5V +/- 10%	
Products Covered	Please refer to the User's Manual	
Connecting I/O Port(s)	N/A	
EUT Modification(s)	N/A	

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. CH 01 – CH 11 for 802.11b, 802.11g, 802.11n(20MHz)

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	06	2437	11	2462
02	2417	07	2442		
03	2422	08	2447		
04	2427	09	2452		
05	2432	10	2457		



3. Table for Filed Antenna

Ant.	Brand	Ant. Part Name	Antenna Type	Connector Type	Cable Length	Gain (dBi) With cable loss
1	ACON	APM6P-700096	PIFA (metal version)	UFL	315 mm	2.99
2	FOXCONN	WDAN-1PA92101-1F	PIFA (PCB version)	UFL	95 mm	2.52
	FOXCONN	WDAN-1PA92102-1F	PIFA (PCB version)	UFL	160 mm	1.80
3	FOXCONN	WDAN-1PA92201-1F	PIFA (metal version)	UFL	75 mm	1.04
	FOXCONN	WDAN-1PA92202-1F	PIFA (metal version)	UFL	315 mm	2.25
4	FOXCONN	WDAN-1PCVT001-1F	PIFA (metal version)	UFL	403 mm	-0.47
	FOXCONN	WDAN-1PCVT002-1F	PIFA (metal version)	UFL	203 mm	1.59
5	FOXCONN	WDAN-1PCVT003-1F	PIFA (metal version)	UFL	218 mm	2.48
	FOXCONN	WDAN-1PCVT004-1F	PIFA (metal version)	UFL	373 mm	0.08
6	FOXCONN	WDAN-1PCVT003-1F	PIFA (metal version)	UFL	218 mm	1.30
	FOXCONN	WDAN-1PCVT004-1F	PIFA (metal version)	UFL	373 mm	1.31
7	FOXCONN	WDAN-1PCVT005-1F	PIFA (metal version)	UFL	263 mm	2.60
	FOXCONN	WDAN-1PCVT006-1F	PIFA (metal version)	UFL	463 mm	1.92
8	FOXCONN	WDAN-1PCVT005-1F	PIFA (metal version)	UFL	263 mm	1.32
	FOXCONN	WDAN-1PCVT006-1F	PIFA (metal version)	UFL	463 mm	-0.04
9	FOXCONN	WDAN-1PCVT010-1F	PIFA (metal version)	UFL	243 mm	2.08
	FOXCONN	WDAN-1PCVT007-1F	PIFA (metal version)	UFL	538 mm	2.50
10	FOXCONN	WDAN-1PCVT010-1F	PIFA (metal version)	UFL	263 mm	2.39
	FOXCONN	WDAN-1PCVT007-1F	PIFA (metal version)	UFL	563 mm	2.11
11	FOXCONN	:WDAN-1PCVT008-1F	PIFA (metal version)	UFL	283 mm	1.96
	FOXCONN	:WDAN-1PCVT009-1F	PIFA (metal version)	UFL	583 mm	2.46



12	ACON	APP6P-700473	PIFA (PCB version)	UFL	95 mm	-1.48
	ACON	APP6P-700474	PIFA (PCB version)	UFL	160 mm	0.81
13	ACON	APM6P-700064	PIFA (metal version)	UFL	75 mm	0.02
	ACON	APM6P-700065	PIFA (metal version)	UFL	315 mm	-1.57
14	ACON	APM6P-700071	PIFA (metal version)	UFL	390 mm	2.70
	ACON	APM6P-700072	PIFA (metal version)	UFL	160 mm	2.49
15	ACON	APM6P-700073	PIFA (metal version)	UFL	205 mm	2.72
	ACON	APM6P-700074	PIFA (metal version)	UFL	360 mm	2.68
16	ACON	APM6P-700073	PIFA (metal version)	UFL	205 mm	1.03
	ACON	APM6P-700074	PIFA (metal version)	UFL	360 mm	-0.04
17	ACON	APM6P-700075	PIFA (metal version)	UFL	250 mm	-0.28
	ACON	APM6P-700076	PIFA (metal version)	UFL	450 mm	-0.08
18	ACON	APM6P-700075	PIFA (metal version)	UFL	250 mm	0.05
	ACON	APM6P-700076	PIFA (metal version)	UFL	450 mm	1.03
19	ACON	APM6P-700077	PIFA (metal version)	UFL	230 mm	0.82
	ACON	APM6P-700078	PIFA (metal version)	UFL	525 mm	-1.91
20	ACON	APM6P-700077	PIFA (metal version)	UFL	230 mm	0.01
	ACON	APM6P-700078	PIFA (metal version)	UFL	525 mm	-1.22
21	ACON	APM6P-700079	PIFA (metal version)	UFL	270 mm	-2.63
	ACON	APM6P-700080	PIFA (metal version)	UFL	570 mm	-3.98

All optional antennas were tested, and the EUT with **APM6P-700096** and **WDAN-1PA92101-1F** were found to be the worst case during the pr-scanning test. These combinations of the worst case were used for final testing and collecting test data included in this report.



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11 (APM6P-700096)
Mode 2	802.11g/CH01, CH06, CH11 (APM6P-700096)
Mode 3	802.11n/20M/CH01, CH06, CH11 (APM6P-700096)
Mode 4	802.11b/CH01, CH06, CH11 (WDAN-1PA92101-1F)
Mode 5	802.11g/CH01, CH06, CH11 (WDAN-1PA92101-1F)
Mode 6	802.11n/20M/CH01, CH06, CH11 (WDAN-1PA92101-1F)

For Conducted Test	
Final Test Mode	Description
Mode 1	802.11b/CH06 (APM6P-700096)

For Radiated Test	
Final Test Mode	Description
Mode 1	802.11b/CH01, CH06, CH11 (APM6P-700096)
Mode 2	802.11g/CH01, CH06, CH11 (APM6P-700096)
Mode 3	802.11n/20M/CH01, CH06, CH11 (APM6P-700096)
Mode 4	802.11b/CH01, CH06, CH11 (WDAN-1PA92101-1F)
Mode 5	802.11g/CH01, CH06, CH11 (WDAN-1PA92101-1F)
Mode 6	802.11n/20M/CH01, CH06, CH11 (WDAN-1PA92101-1F)



**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Test software Version	art_v08_b129.8		
Frequency (MHz)	2412 MHz	2442 MHz	2462 MHz
IEEE 802.11b DSSS	18	18	18
IEEE 802.11g OFDM	16.5	17	17

Test software Version	art_v08_b129.8		
Frequency (MHz)	2412 MHz	2442 MHz	2462 MHz
IEEE 802.11n (20MHz)	16	17	16

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF RADIATED EMISSION TESTED

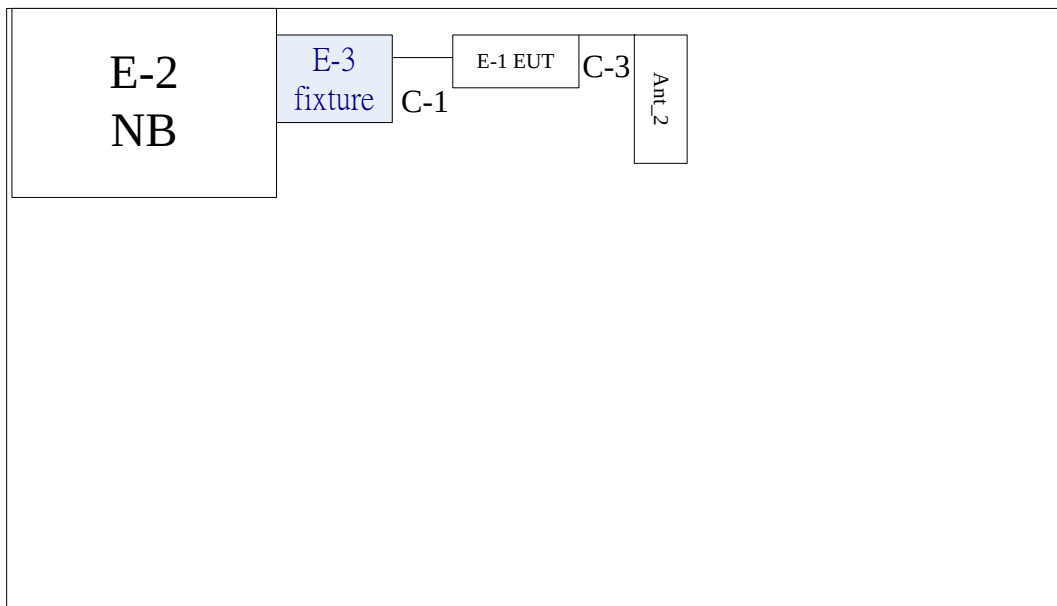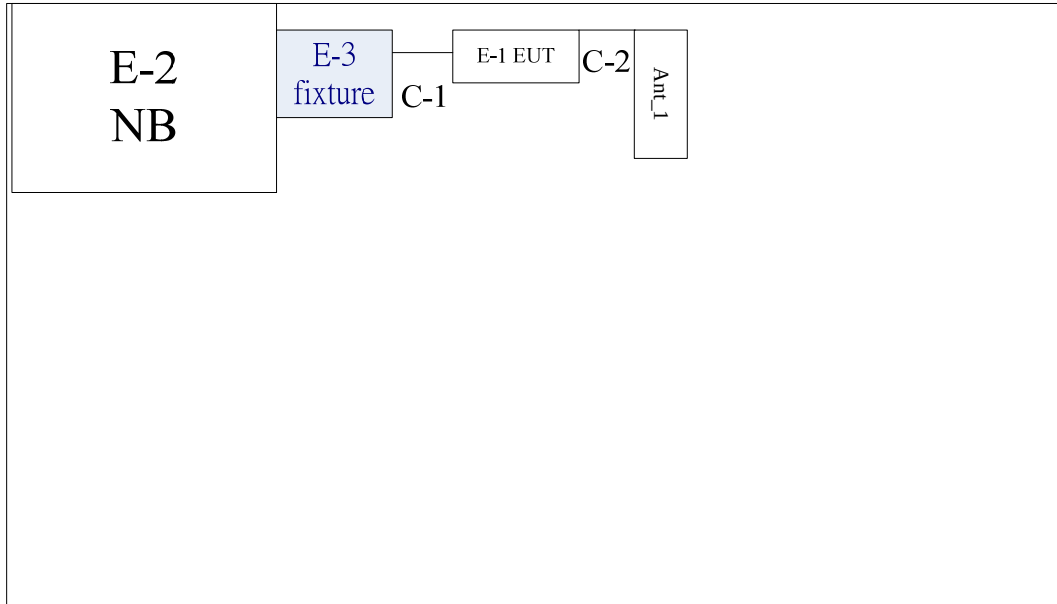

**3.5 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	RF Module	FOXCONN	J20H049	MCLJ20H049	N/A	EUT
E-2	Notebook PC	DELL	D600	DOC	7T390 A03	
E-3	Fixture	Foxconn	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10CM	
C-2	NO	NO	31CM	
C-3	NO	NO	9CM	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) " ※ " denotes the support equipment by applicant.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jun. 07, 2011
2	Test Cable	TIMES	CFD300-NL	130	Jun. 17, 2011
3	EMI Test Receiver	R&S	ESCI	100080	Mar. 10, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

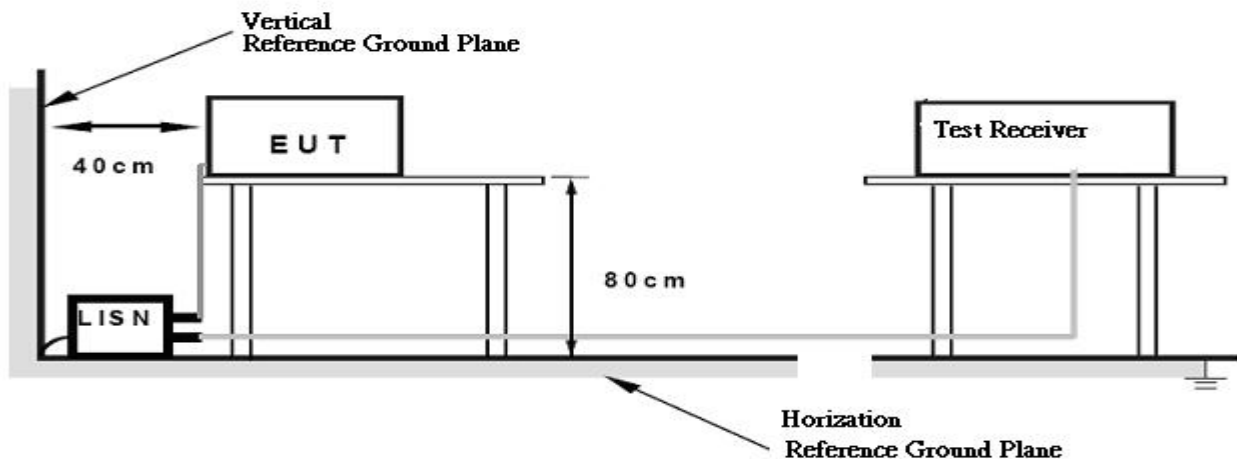

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




4.1.7 TEST RESULTS

EUT :	RF Module	Model Name :	J20H049
Temperature :	24° C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (APM6P-700096)		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.1507	Line	52.07	32.55	9.69	61.76	42.24	65.96	55.96	-4.20	(QP)
0.3390	Line	35.23	*	9.69	44.92	*	59.23	49.23	-14.31	(QP)
0.4958	Line	30.94	*	9.69	40.63	*	56.07	46.07	-15.44	(QP)
1.5350	Line	31.24	*	9.74	40.98	*	56.00	46.00	-15.02	(QP)
3.8390	Line	36.97	23.52	9.72	46.69	33.24	56.00	46.00	-9.31	(QP)
9.5500	Line	28.11	*	9.76	37.87	*	60.00	50.00	-22.13	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.2 sec./ MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.2 sec./ MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) In the "Note" column, QP means the margin value of QP is higher than Average and the "Margin" column shows the margin value of QP; AV means the margin value of Average is higher than QP and the "Margin" column shows the margin value of Average.

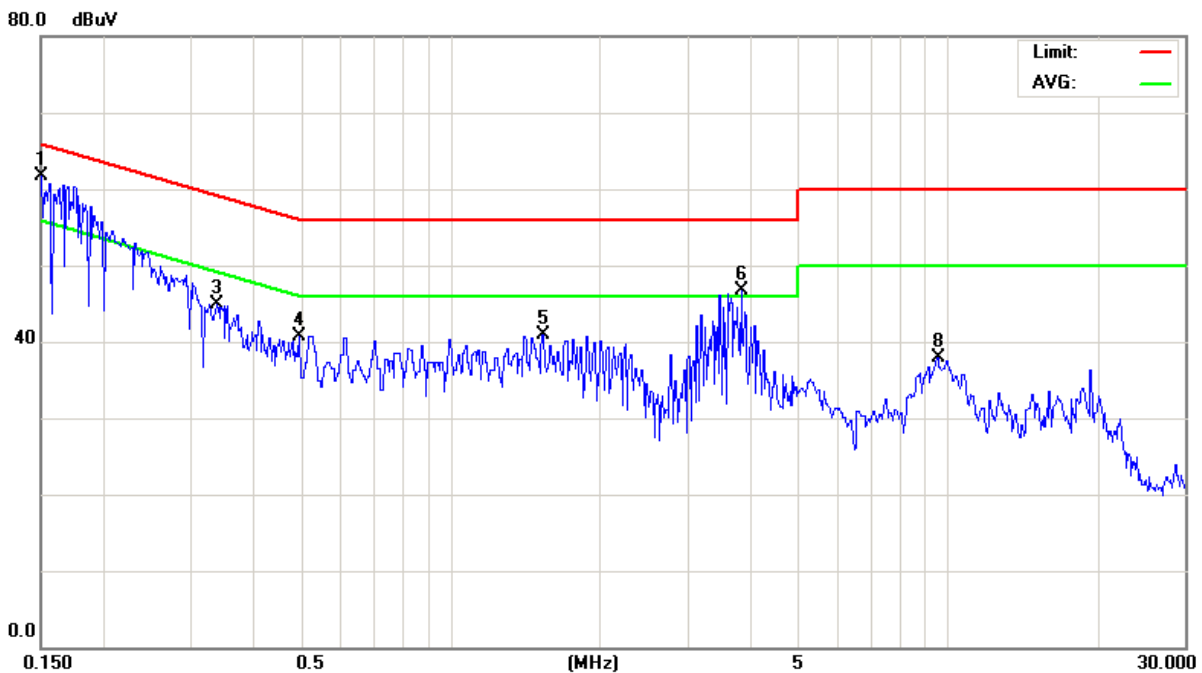




EUT :	RF Module	Model Name :	J20H049
Temperature :	24 °C	Relative Humidity :	43%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (APM6P-700096)		

Freq. (MHz)	Terminal L/N	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV)		Limit(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.1507	Neutral	51.95	34.45	9.68	61.63	44.13	65.96	55.96	-4.33	(QP)
0.1808	Neutral	49.54	33.40	9.68	59.22	43.08	64.45	54.45	-5.23	(QP)
0.6440	Neutral	33.33	*	9.68	43.01	*	56.00	46.00	-12.99	(QP)
1.0850	Neutral	31.15	*	9.71	40.86	*	56.00	46.00	-15.14	(QP)
1.4540	Neutral	34.25	*	9.77	44.02	*	56.00	46.00	-11.98	(QP)
3.4700	Neutral	35.48	25.15	9.71	45.19	34.86	56.00	46.00	-10.81	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.2 sec./ MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.2 sec./ MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) In the "Note" column, QP means the margin value of QP is higher than Average and the "Margin" column shows the margin value of QP; AV means the margin value of Average is higher than QP and the "Margin" column shows the margin value of Average.

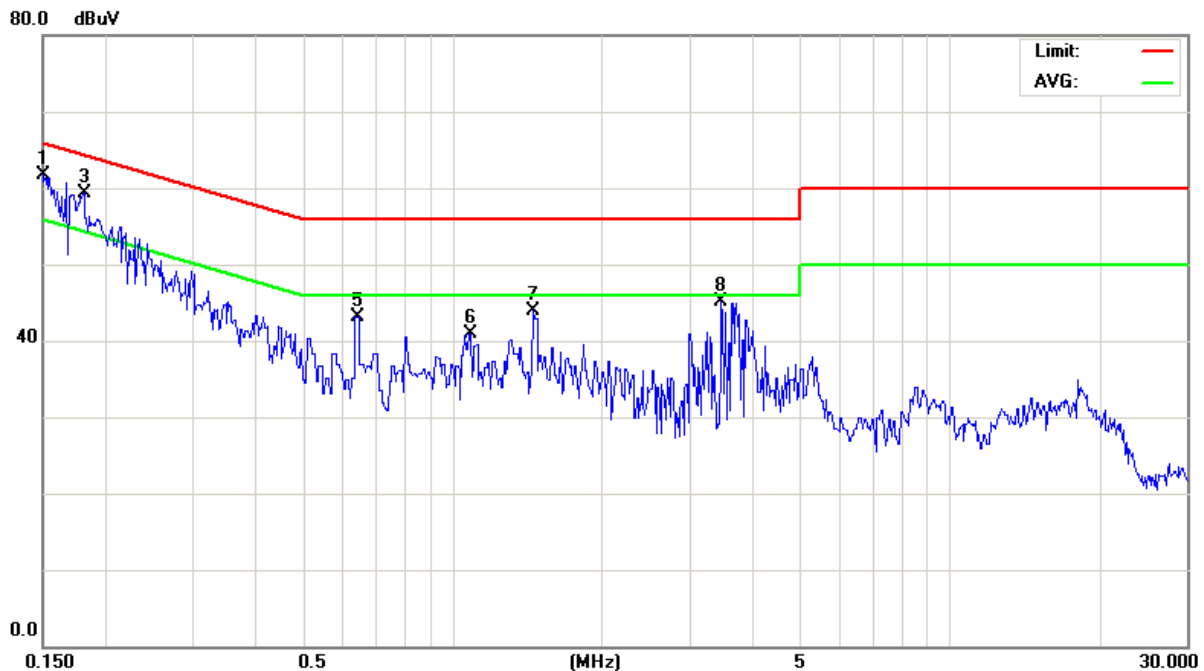



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011
2	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 20, 2011
3	Microflex Cable	N/A	N/A	1m	May. 19, 2011
4	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 22, 2011
5	Microflex Cable	N/A	N/A	3m	Aug. 22, 2011
6	Test Cable	N/A	LMR-400	966_12m	Jun. 17, 2011
7	Test Cable	N/A	LMR-400	966_3m	Jun. 17, 2011
8	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2011
9	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2011
10	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 14, 2011
11	Horn Antenna	Schwarzbeck	BBHA 9120	D-546	Jun. 16, 2011

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

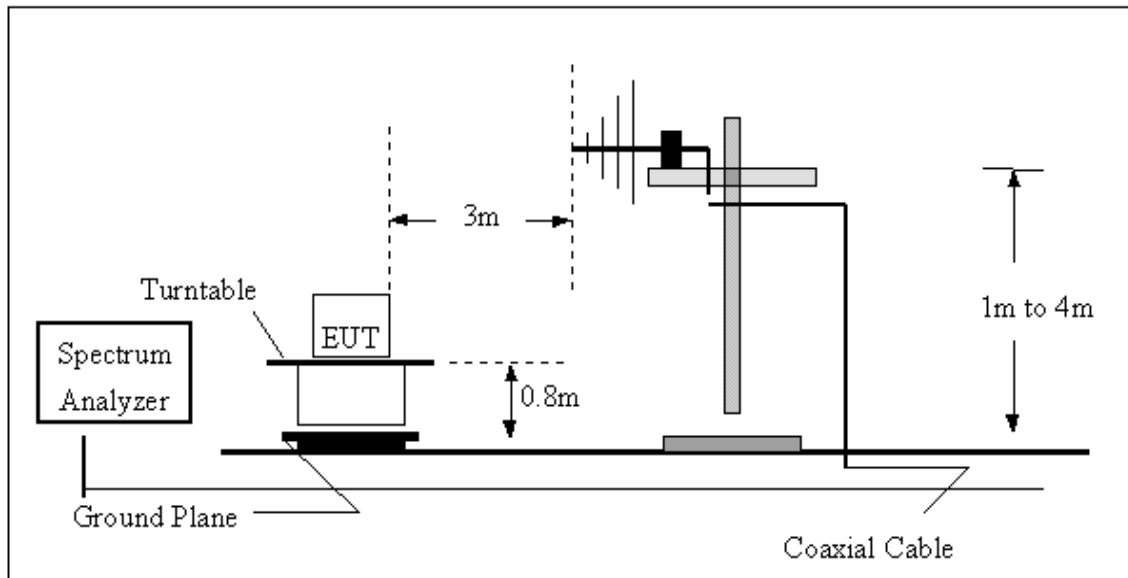

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

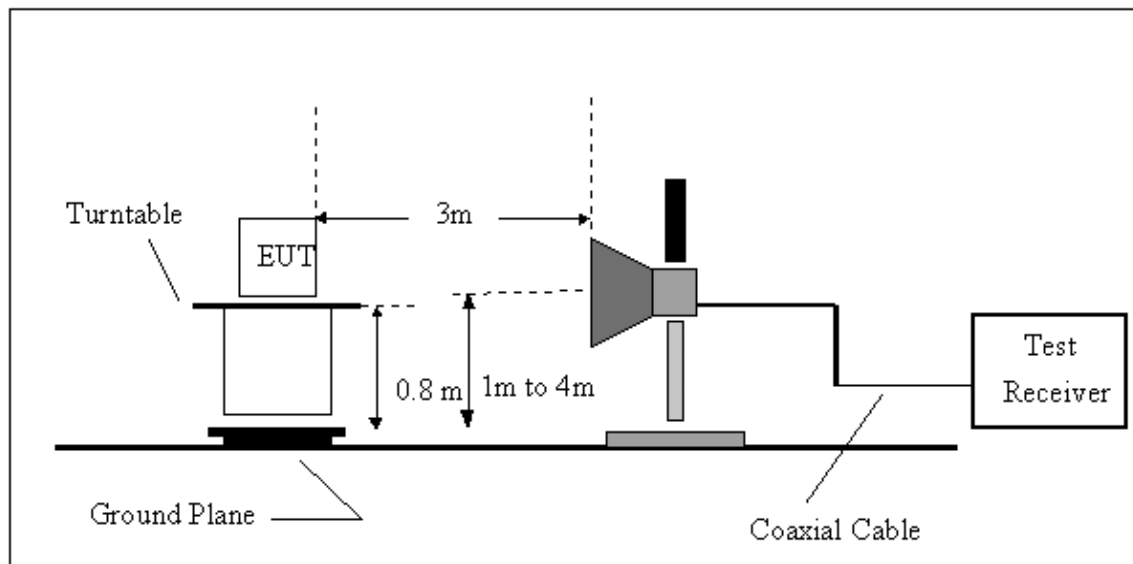

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

EUT :	RF Module	Model Name :	J20H049
Temperature :	25° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (APM6P-700096)		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
365.6200	V	50.08	-12.59	37.49	46.00	- 8.51	
433.5200	V	48.39	-10.83	37.56	46.00	- 8.44	
499.4800	V	47.51	-9.66	37.85	46.00	- 8.15	
528.5800	V	46.06	-9.05	37.01	46.00	- 8.99	
961.2000	V	42.63	-2.04	40.59	54.00	- 13.41	
1000.0000	V	44.23	-1.67	42.56	54.00	- 11.44	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

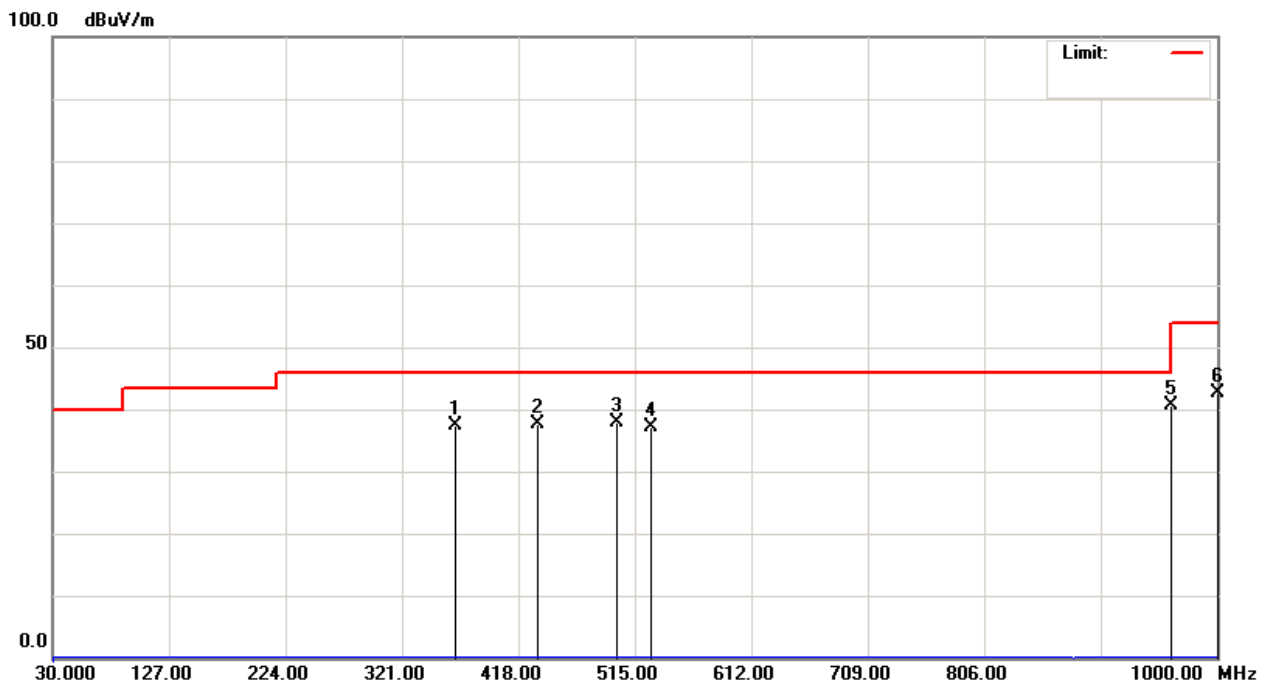




EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (APM6P-700096)		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
220.1200	H	55.55	-17.66	37.89	46.00	- 8.11	
433.5200	H	48.42	-10.83	37.59	46.00	- 8.41	
528.5800	H	44.12	-9.05	35.07	46.00	- 10.93	
567.3800	H	43.82	-8.11	35.71	46.00	- 10.29	
961.2000	H	38.72	-2.04	36.68	54.00	- 17.32	
998.0600	H	42.54	-1.69	40.85	54.00	- 13.15	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

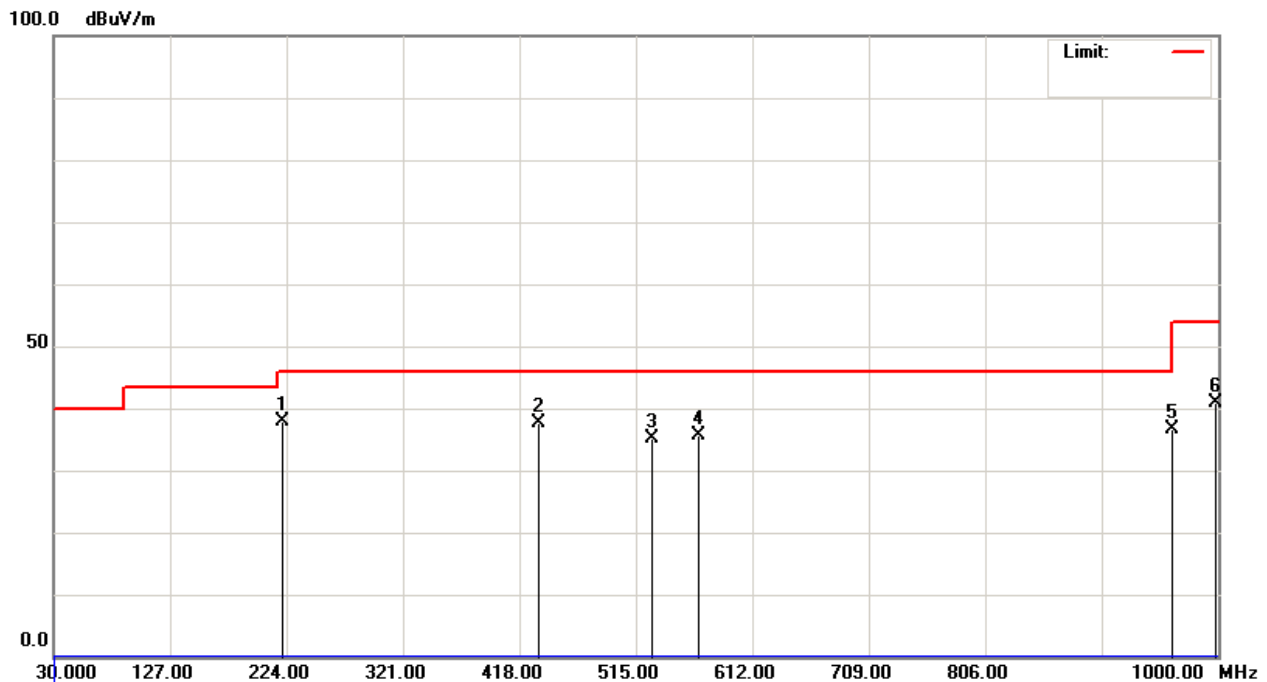




EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (WDAN-1PA92101-1F)		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
55.2200	V	47.28	-15.39	31.89	40.00	- 8.11	
433.5199	V	46.77	-10.83	35.94	46.00	- 10.06	
499.4800	V	46.89	-9.66	37.23	46.00	- 8.77	
528.5800	V	45.62	-9.05	36.57	46.00	- 9.43	
961.2000	V	42.22	-2.04	40.18	54.00	- 13.82	
1000.0000	V	45.76	-1.67	44.09	54.00	- 9.91	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

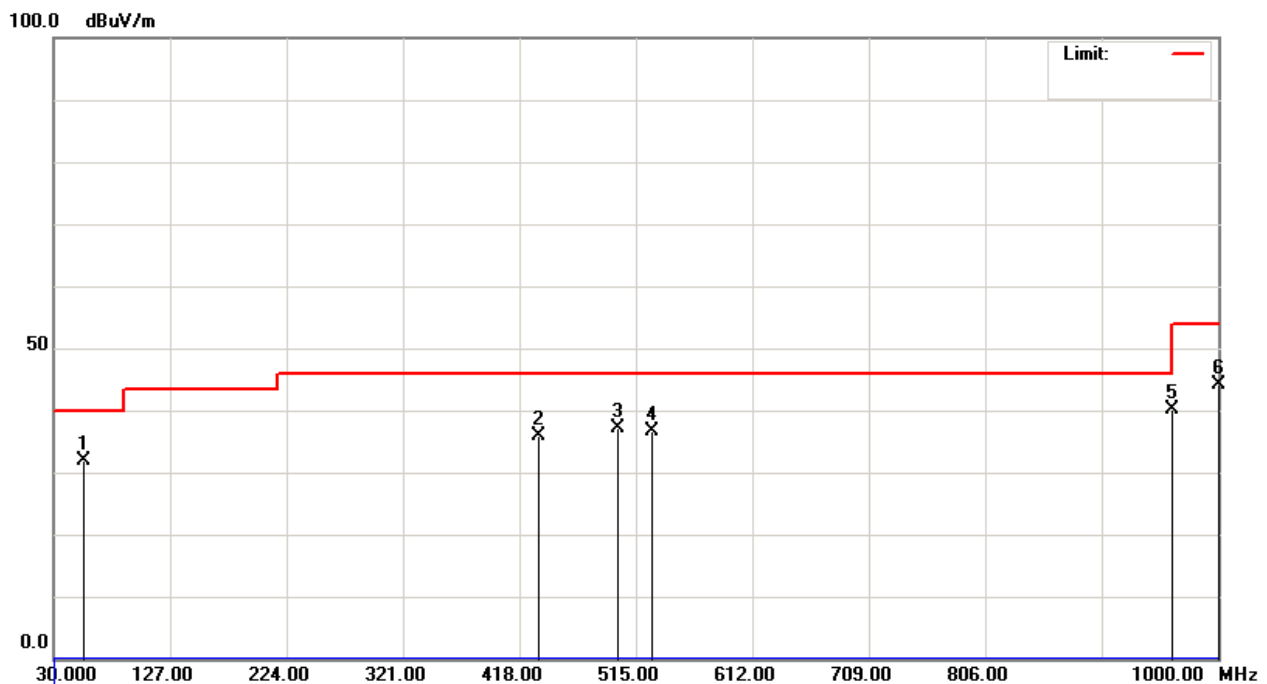




EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH06 (WDAN-1PA92101-1F)		

Freq. (MHz)	Polarization H/V	Reading Level (dBuV)	Correct Factor(dB)	Measurement (dBuV/m)	Limit(Quasi-Peak) (dBuV/m)	Margin (dB)	Note
336.5200	H	53.17	-13.37	39.80	46.00	- 6.20	
431.5800	H	48.33	-10.88	37.45	46.00	- 8.55	
528.5800	H	42.98	-9.05	33.93	46.00	- 12.07	
567.3800	H	42.33	-8.11	34.22	46.00	- 11.78	
662.4400	H	42.88	-6.52	36.36	46.00	- 9.64	
961.2000	H	39.42	-2.04	37.38	54.00	- 16.62	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

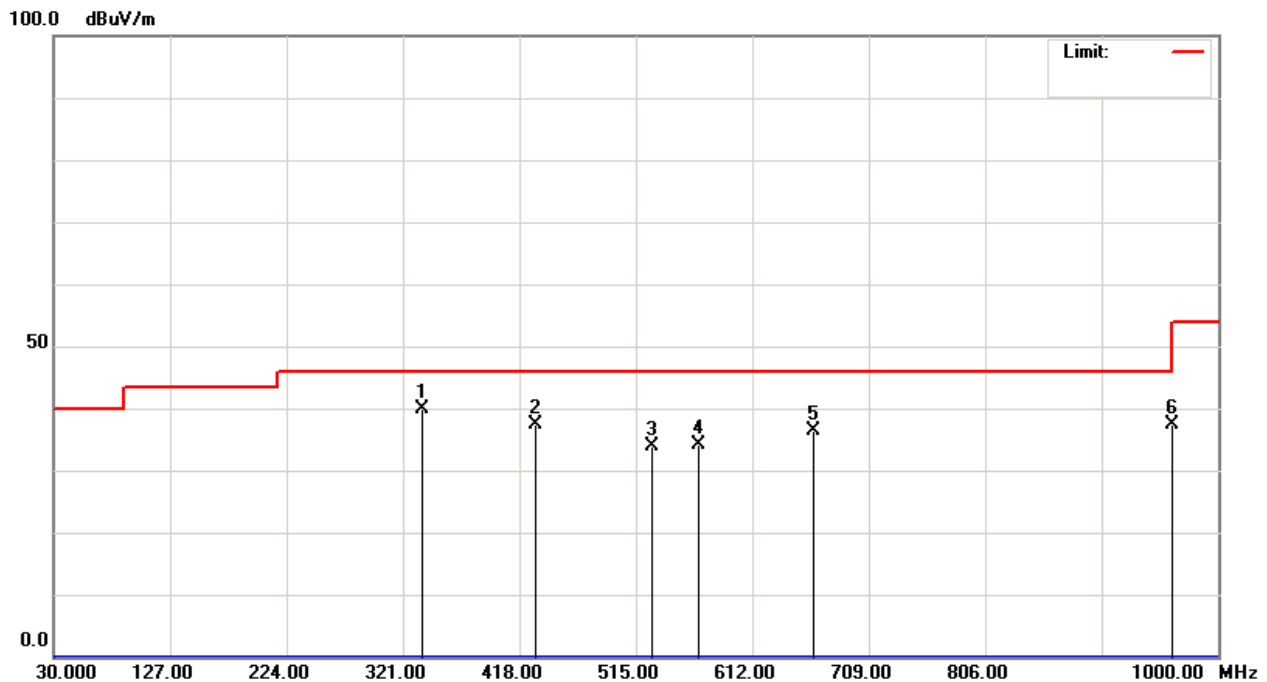



4.2.8 TEST RESULTS - ABOVE 1000MHZ

EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2389.600	V	25.85	16.33	31.15	57.00	47.48	74.00	54.00	- 6.52	AV
F	2411.000	V	68.91	65.13	31.23	100.14	96.36				
H	4823.930	V	45.73	35.31	3.18	48.91	38.49	74.00	54.00	- 15.51	AV
H	7236.070	V	41.44	30.77	8.14	49.58	38.91	74.00	54.00	- 15.09	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH01 (Above 1000 MHz, Vertical)

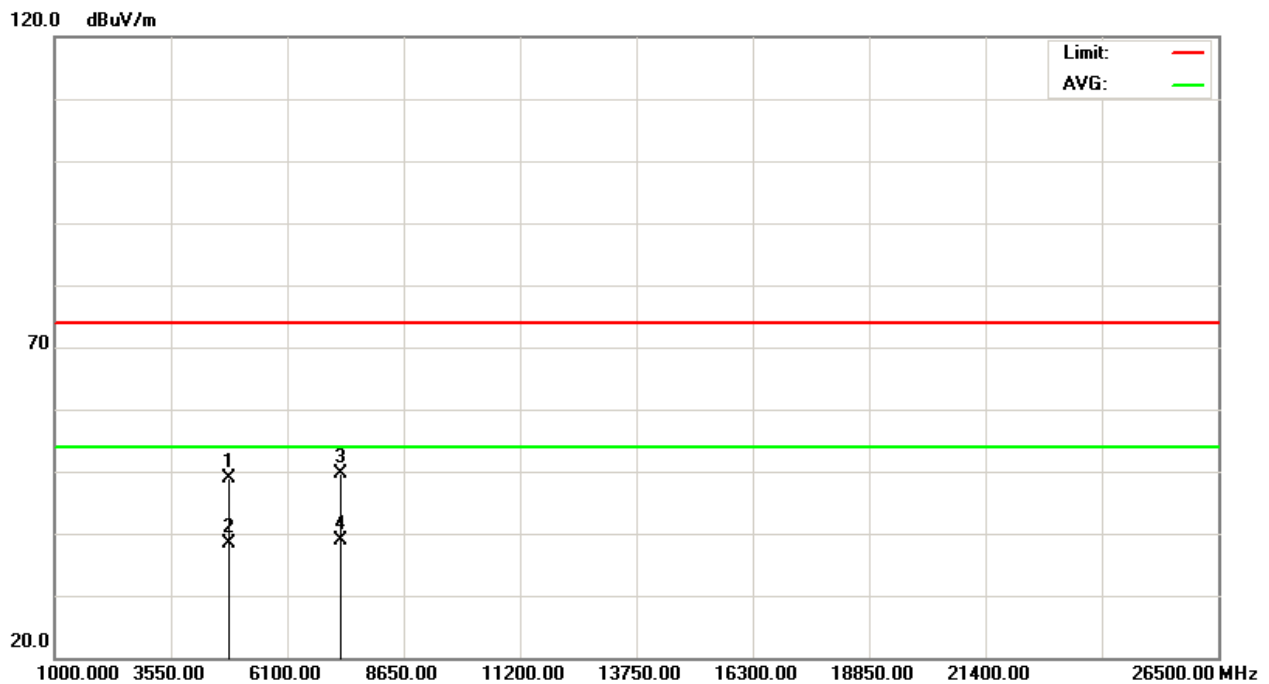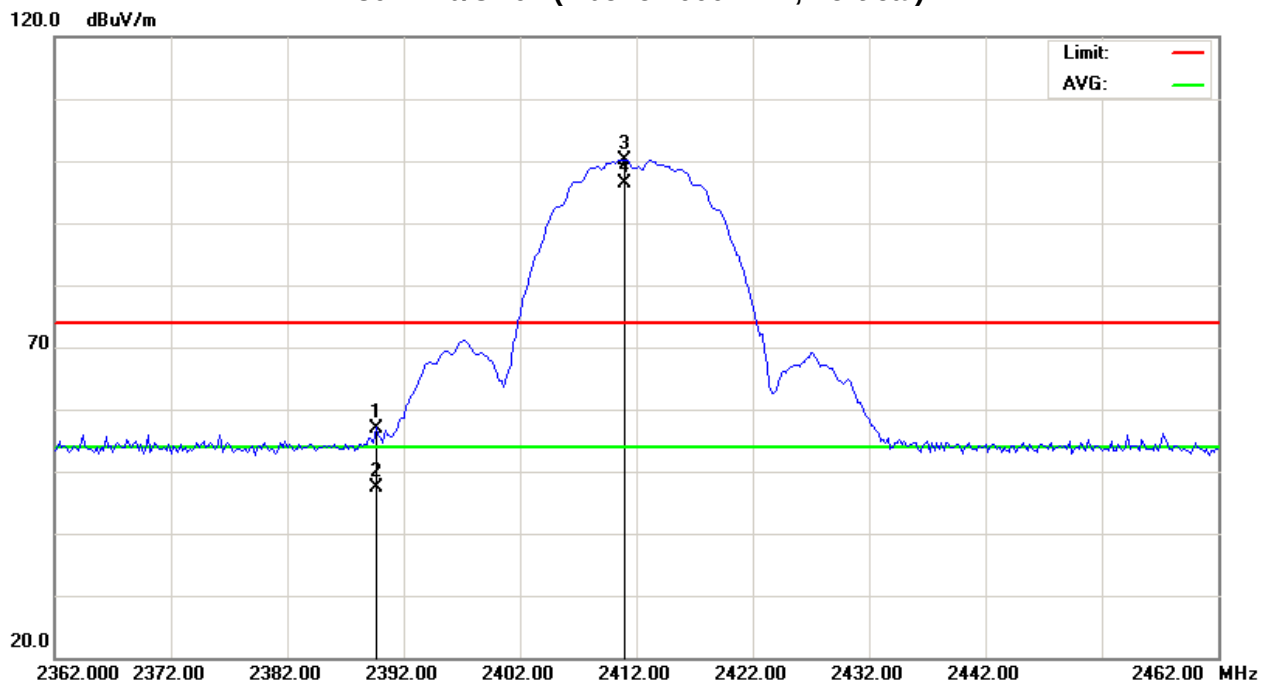



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	H	25.13	16.57	31.15	56.28	47.72	74.00	54.00	- 6.28	AV
F	2411.000	H	70.62	66.85	31.23	101.85	98.08				
H	4823.928	H	43.86	35.62	3.18	47.04	38.80	74.00	54.00	- 15.20	AV
H	7235.980	H	41.12	30.66	8.14	49.26	38.80	74.00	54.00	- 15.20	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH01(Above 1000 MHz, Horizontal)

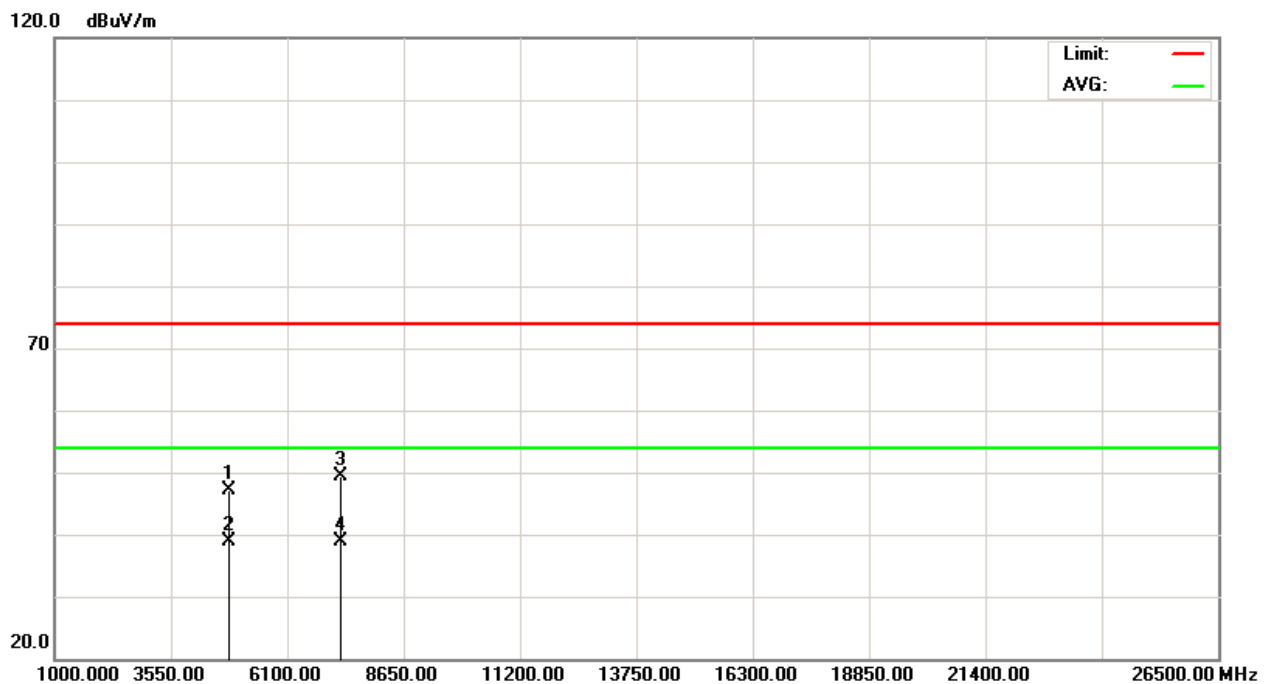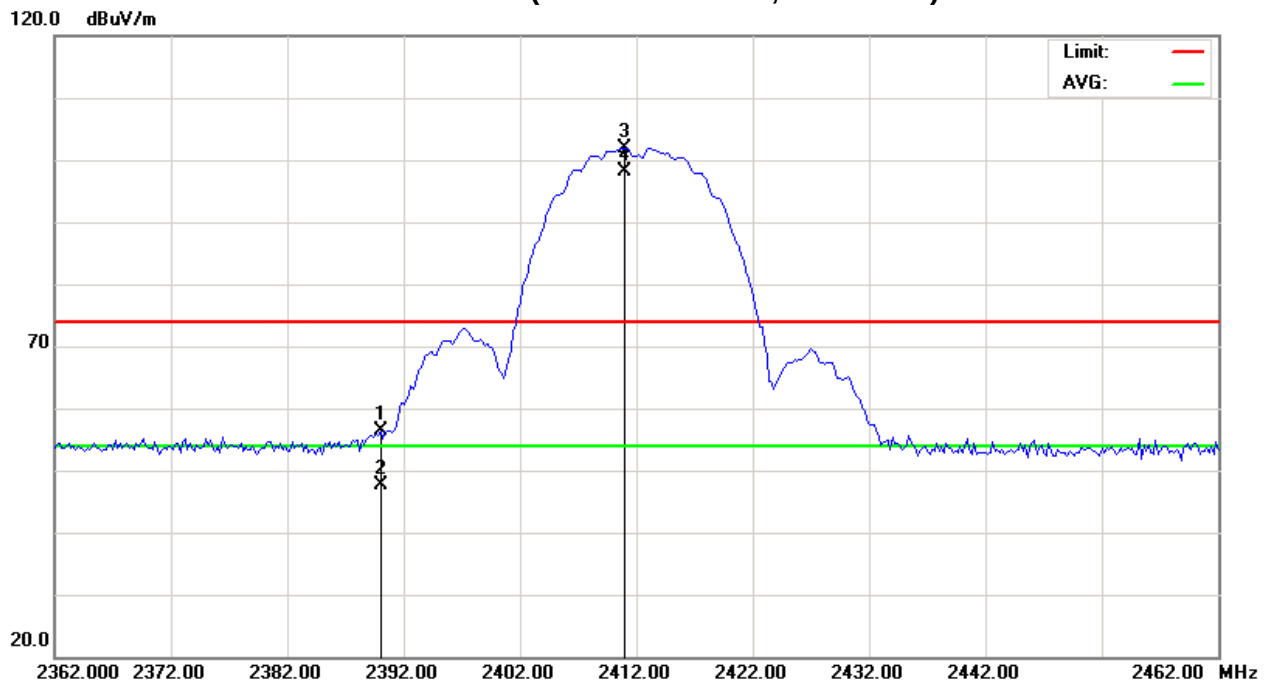



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2438.200	V	68.62	64.67	31.33	99.95	96.00				
H	4874.028	V	45.55	38.84	3.34	48.89	42.18	74.00	54.00	- 11.82	AV
H	7311.360	V	41.75	30.01	8.26	50.01	38.27	74.00	54.00	- 15.73	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Vertical)

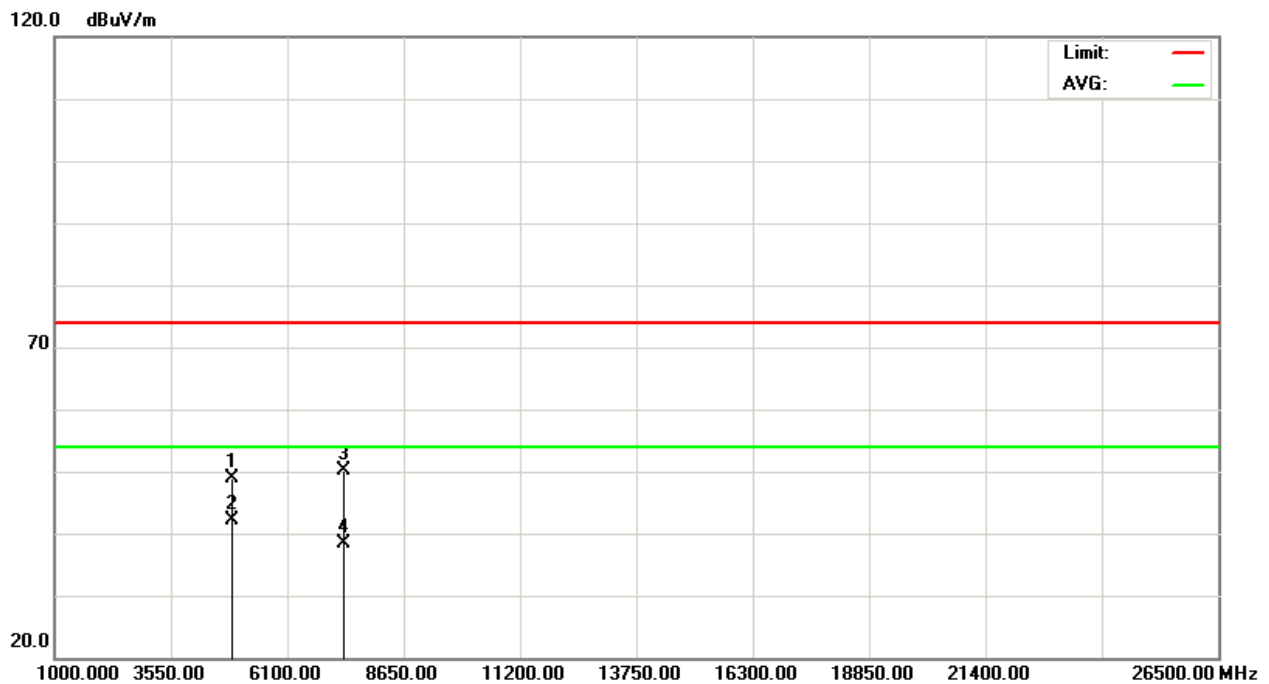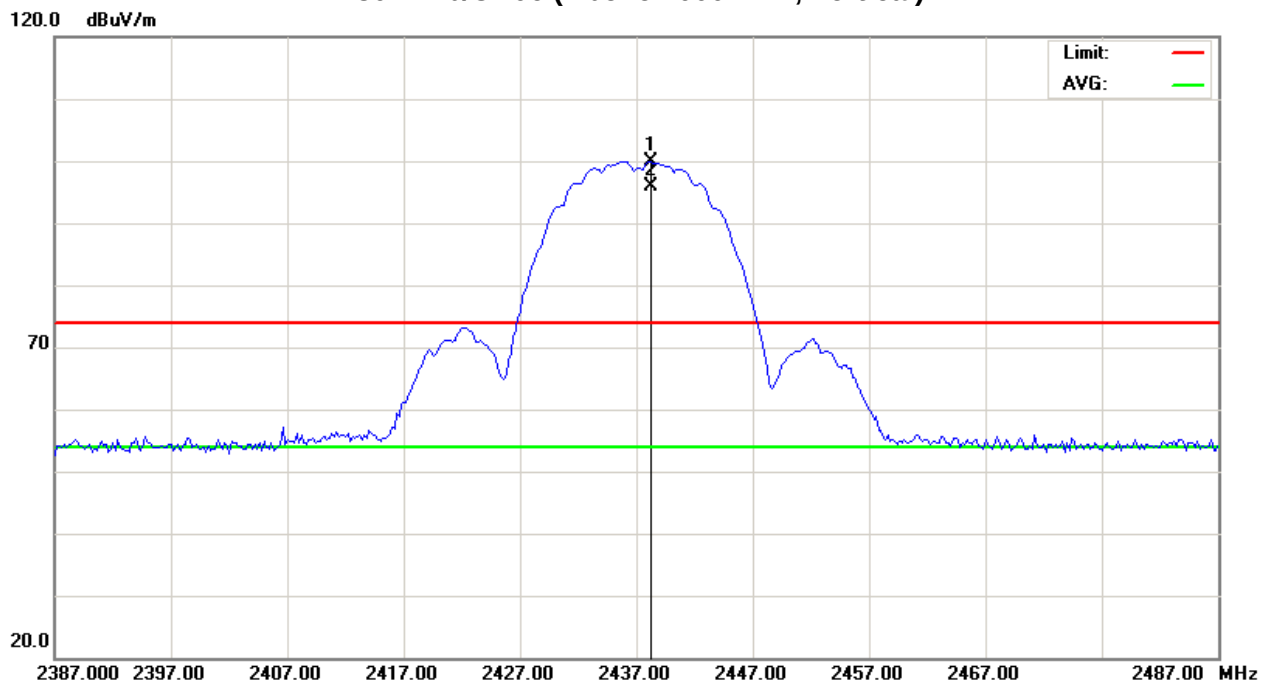



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2436.200	H	70.32	66.69	31.32	101.64	98.01				
H	4874.012	H	45.50	38.03	3.34	48.84	41.37	74.00	54.00	- 12.63	AV
H	7311.160	H	41.72	29.98	8.26	49.98	38.24	74.00	54.00	- 15.76	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Horizontal)

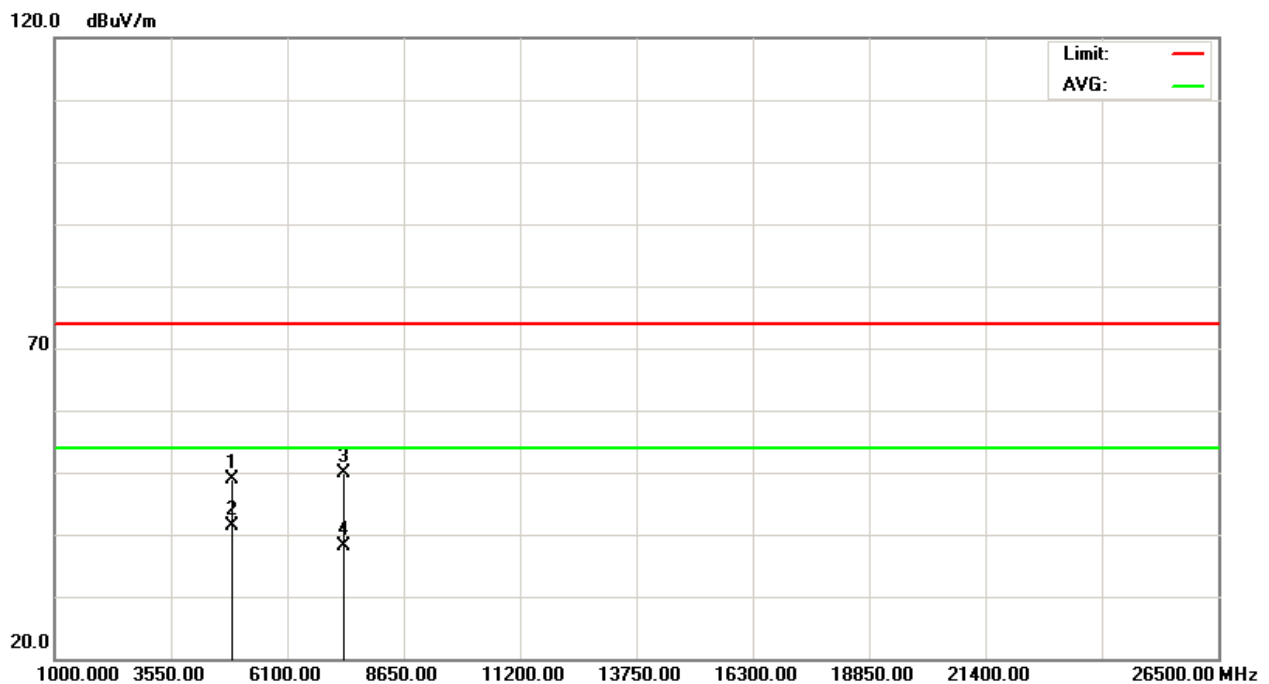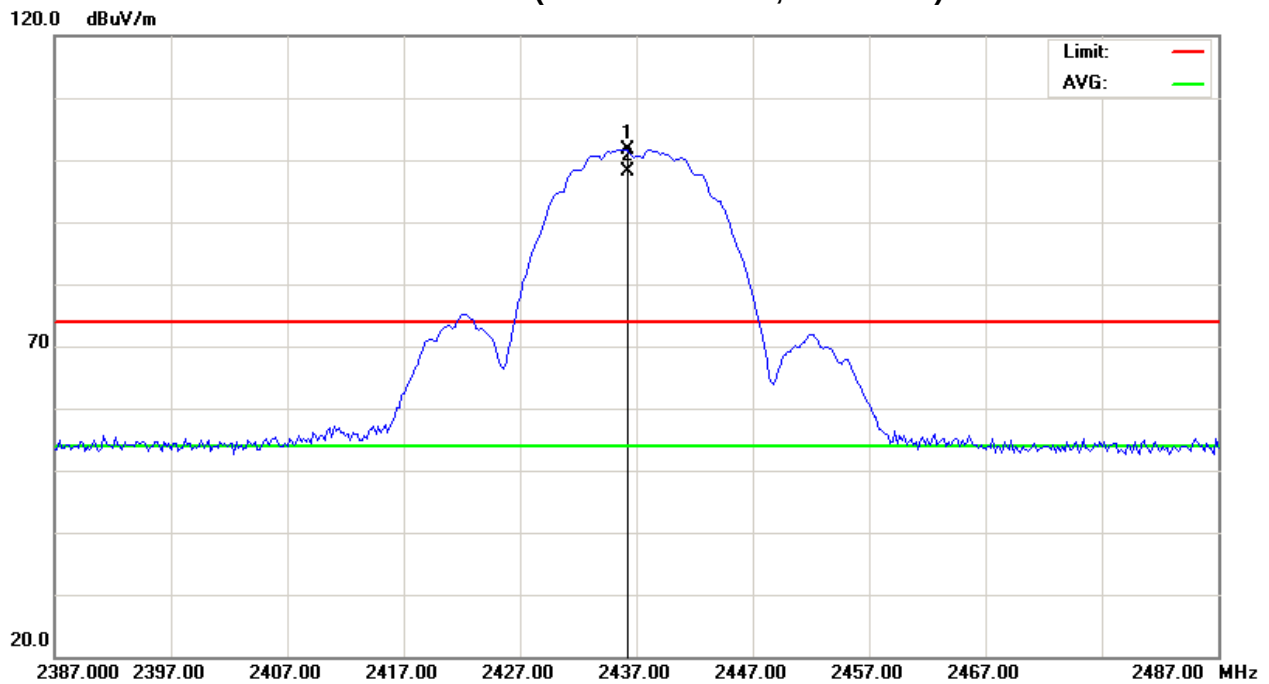



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2461.000	V	70.33	66.53	31.41	101.74	97.94				
H	2483.500	V	23.64	11.26	31.49	55.13	42.75	74.00	54.00	- 11.25	AV
H	4924.032	V	50.04	46.38	3.49	53.53	49.87	74.00	54.00	- 4.13	AV
H	7387.880	V	43.10	32.68	8.37	51.47	41.05	74.00	54.00	- 12.95	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11(Above 1000 MHz, Vertical)

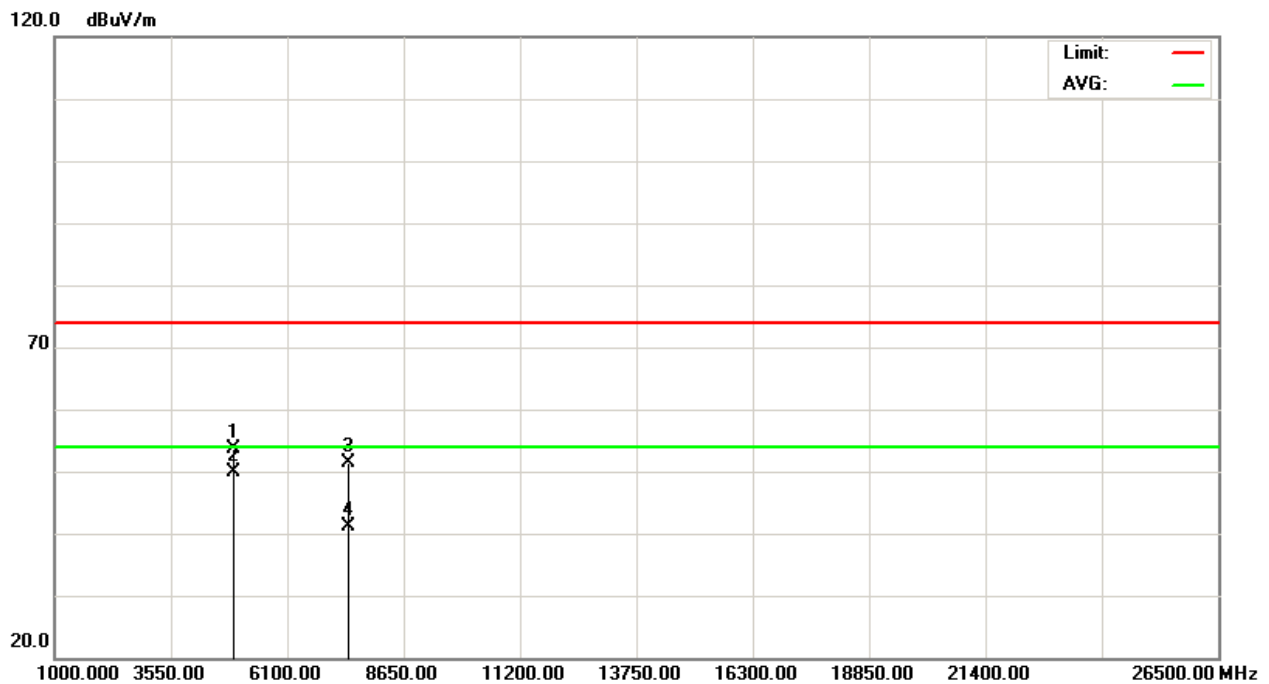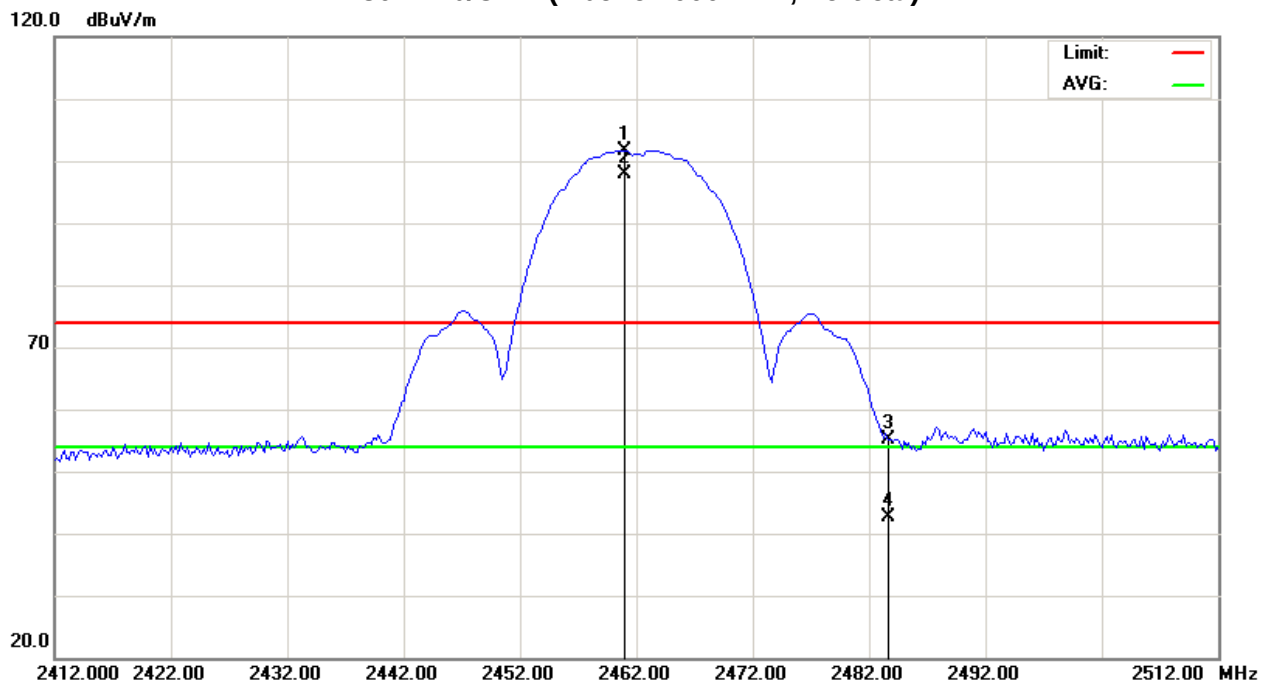



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2461.000	H	71.15	67.94	31.41	102.56	99.35				
H	2483.500	H	23.45	12.67	31.49	54.94	44.16	74.00	54.00	- 9.84	AV
H	4924.030	H	49.74	46.52	3.49	53.23	50.01	74.00	54.00	- 3.99	AV
H	7385.400	H	40.93	31.25	8.37	49.30	39.62	74.00	54.00	- 14.38	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11(Above 1000 MHz, Horizontal)

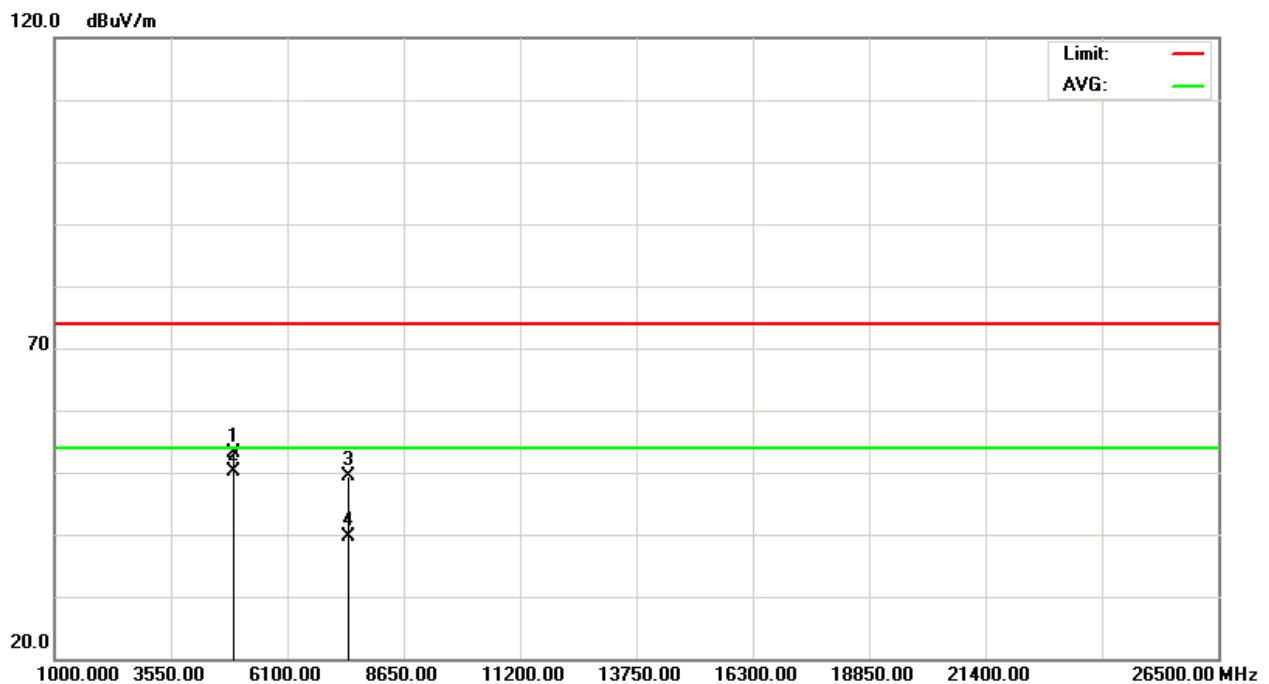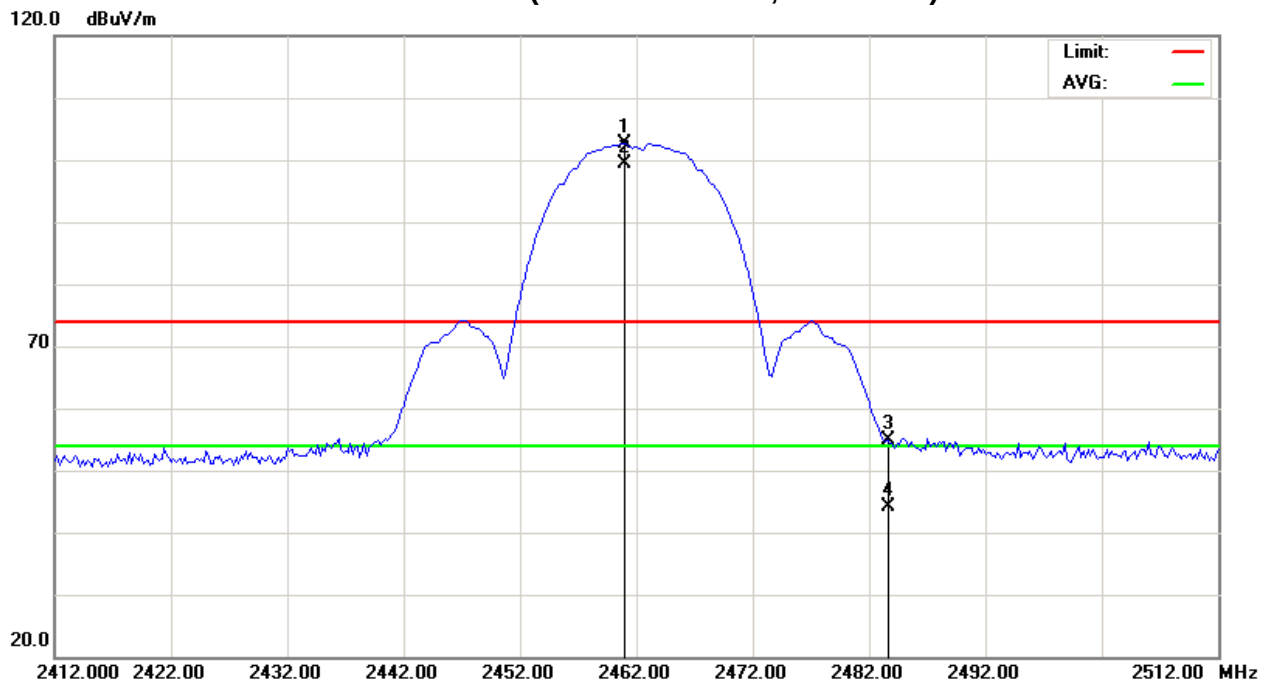



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2389.200	V	33.07	18.34	31.15	64.22	49.49	74.00	54.00	- 4.51	AV
F	2405.800	V	68.76	58.73	31.21	99.97	89.94				
H	4823.400	V	40.99	30.42	3.18	44.17	33.60	74.00	54.00	- 20.40	AV
H	7236.180	V	42.29	31.12	8.14	50.43	39.26	74.00	54.00	- 14.74	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01(Above 1000 MHz, Vertical)

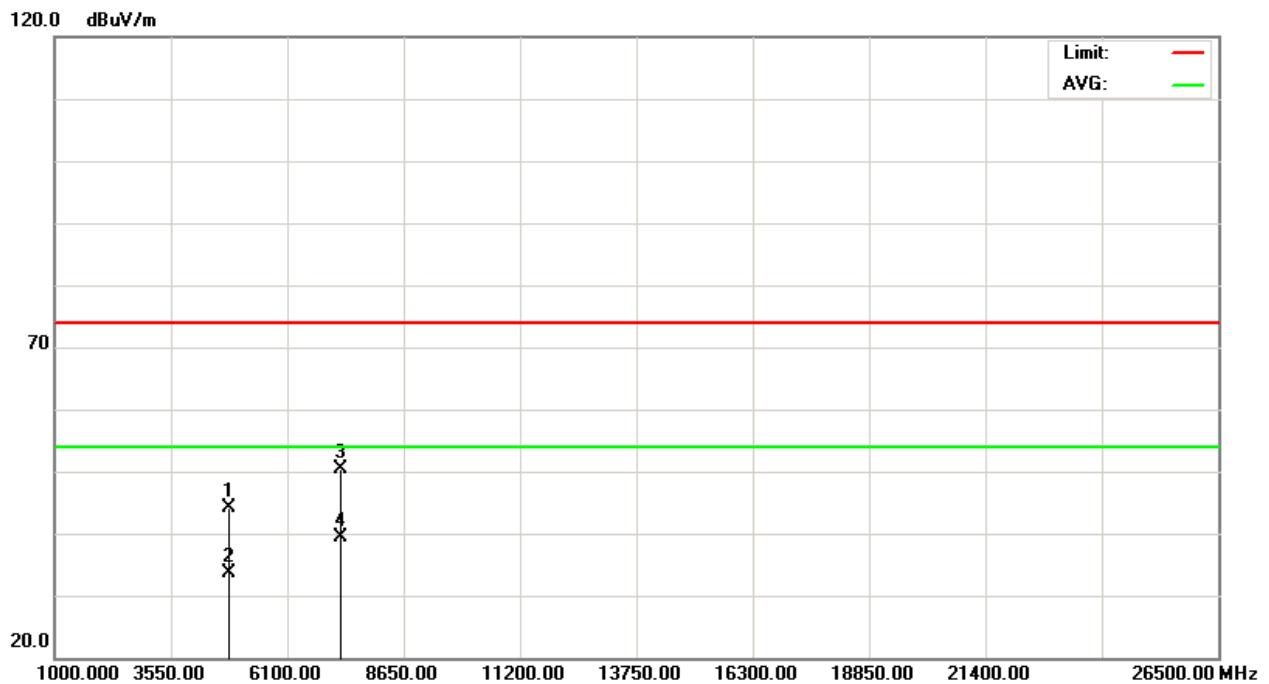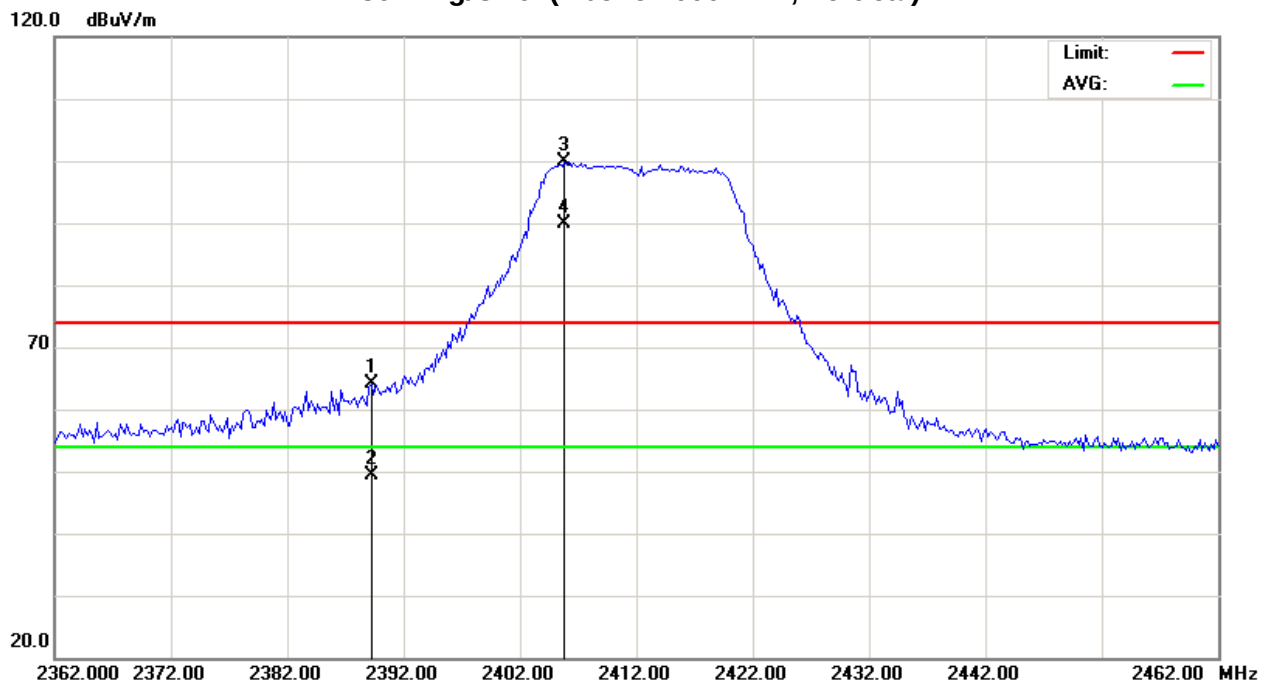



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2389.200	H	36.53	20.73	31.15	67.68	51.88	74.00	54.00	- 2.12	AV
F	2407.200	H	73.31	62.90	31.21	104.52	94.11				
H	4823.900	H	42.09	31.11	3.18	45.27	34.29	74.00	54.00	- 19.71	AV
H	7236.100	H	41.82	30.98	8.14	49.96	39.12	74.00	54.00	- 14.88	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01(Above 1000 MHz, Horizontal)

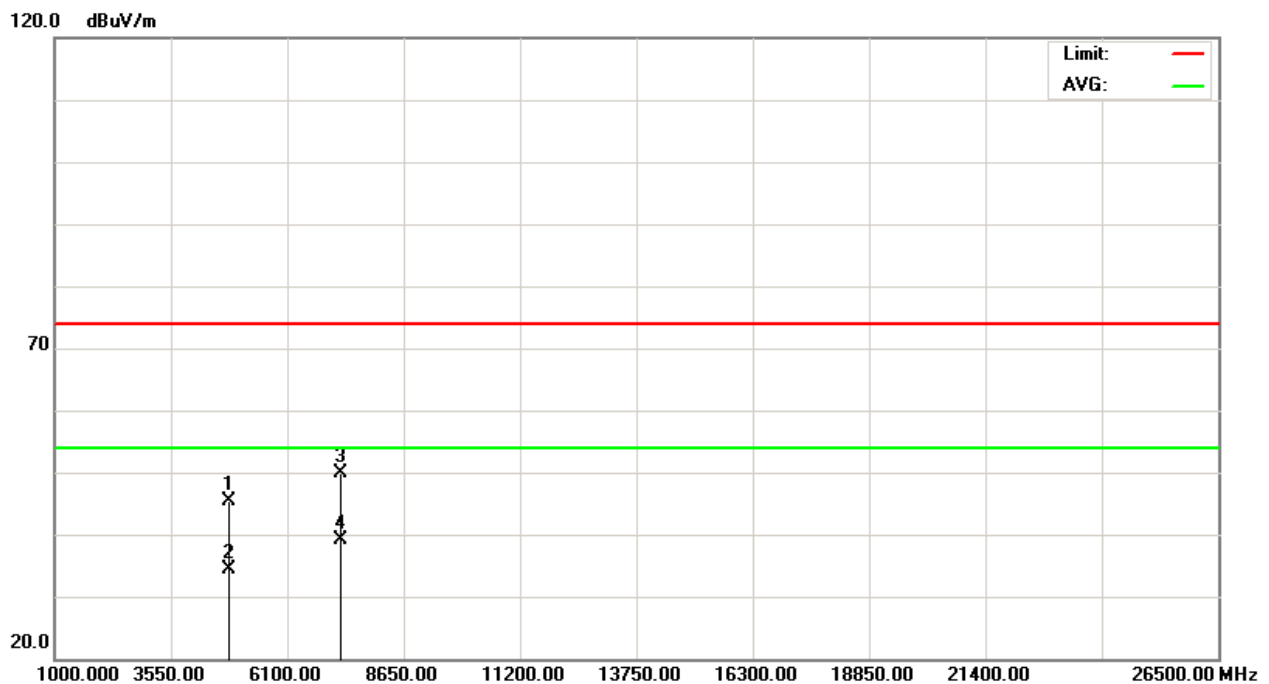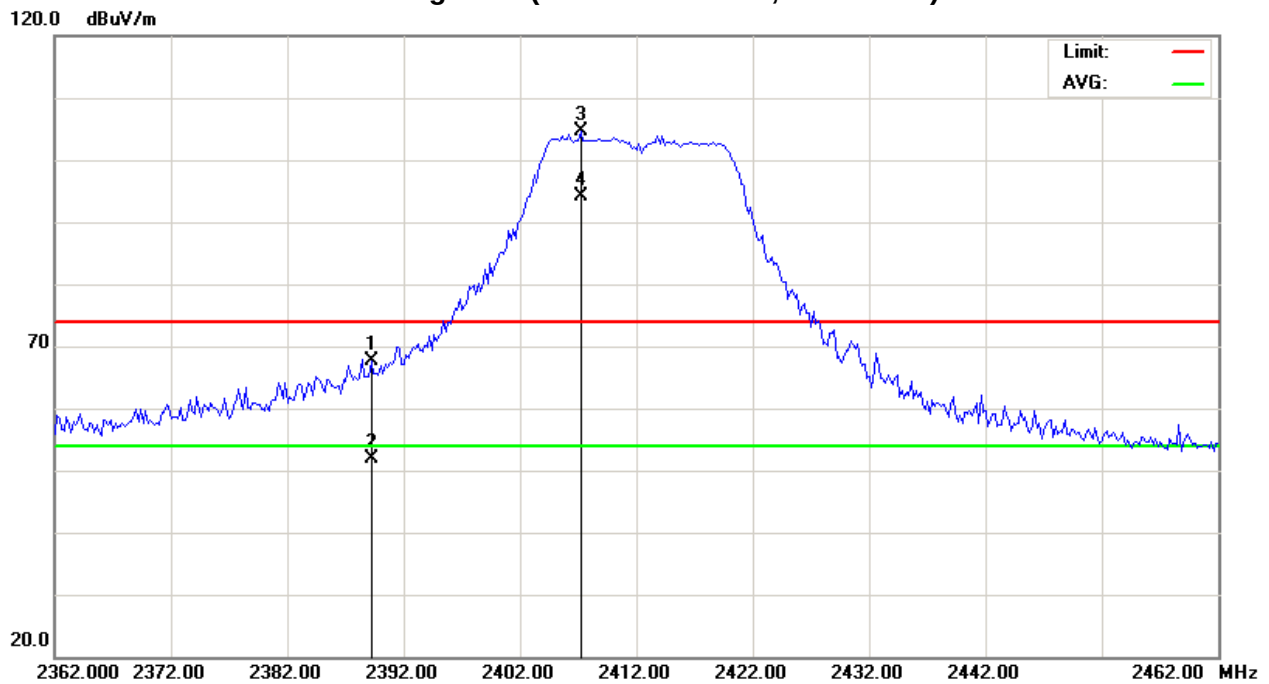



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2438.800	V	68.52	58.49	31.33	99.85	89.82				
H	4874.012	V	40.78	30.30	3.34	44.12	33.64	74.00	54.00	- 20.36	AV
H	7310.860	V	42.11	31.34	8.26	50.37	39.60	74.00	54.00	- 14.40	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06(Above 1000 MHz, Vertical)

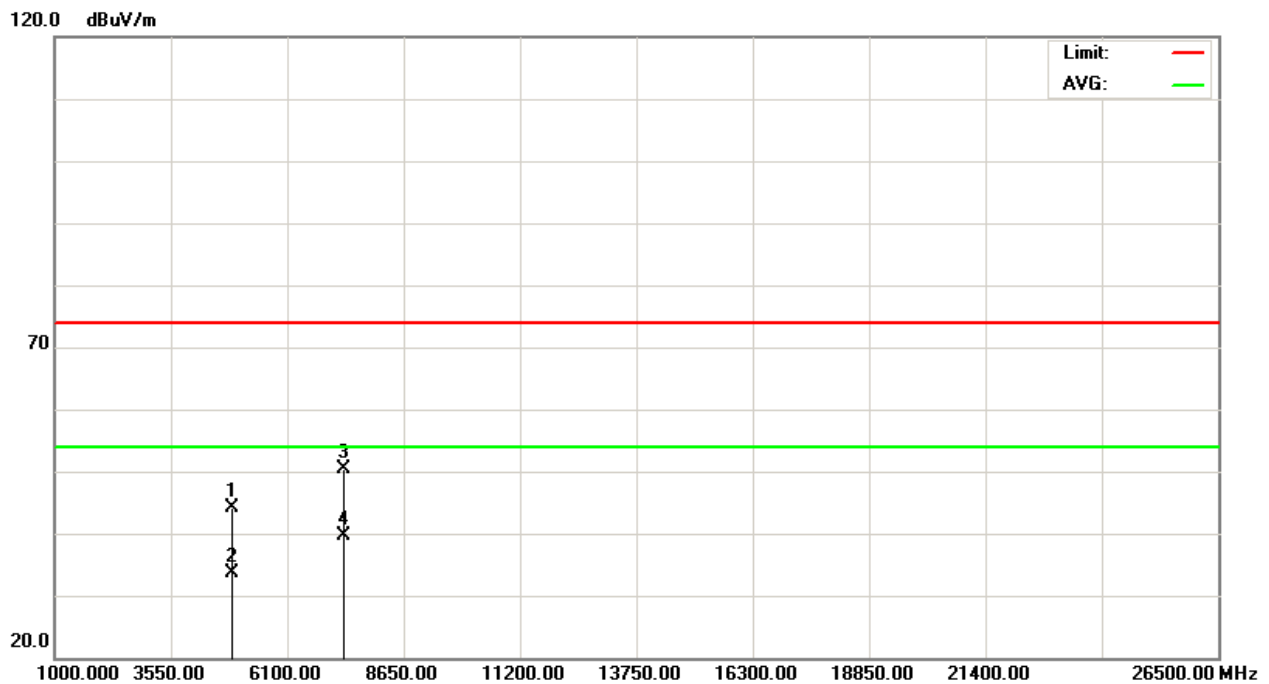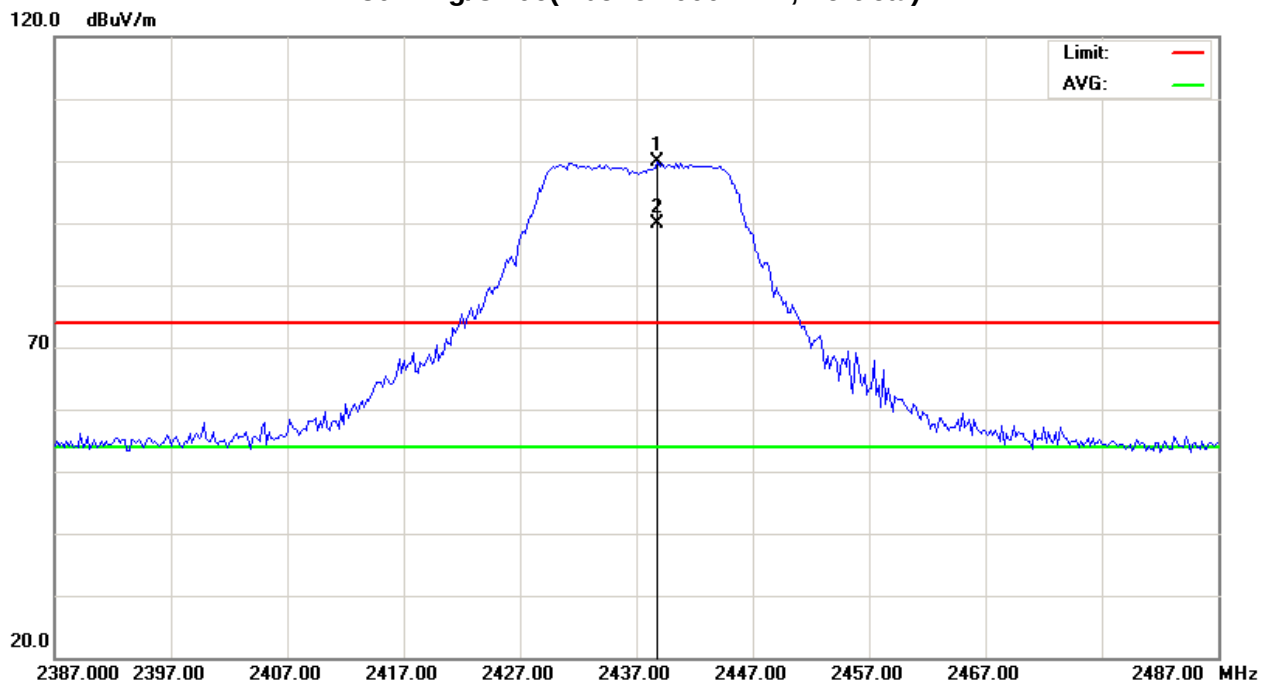



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2440.200	H	70.03	60.21	31.33	101.36	91.54				
H	4873.900	H	41.38	30.04	3.34	44.72	33.38	74.00	54.00	- 20.62	AV
H	7311.160	H	41.09	30.49	8.26	49.35	38.75	74.00	54.00	- 15.25	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06(Above 1000 MHz, Horizontal)

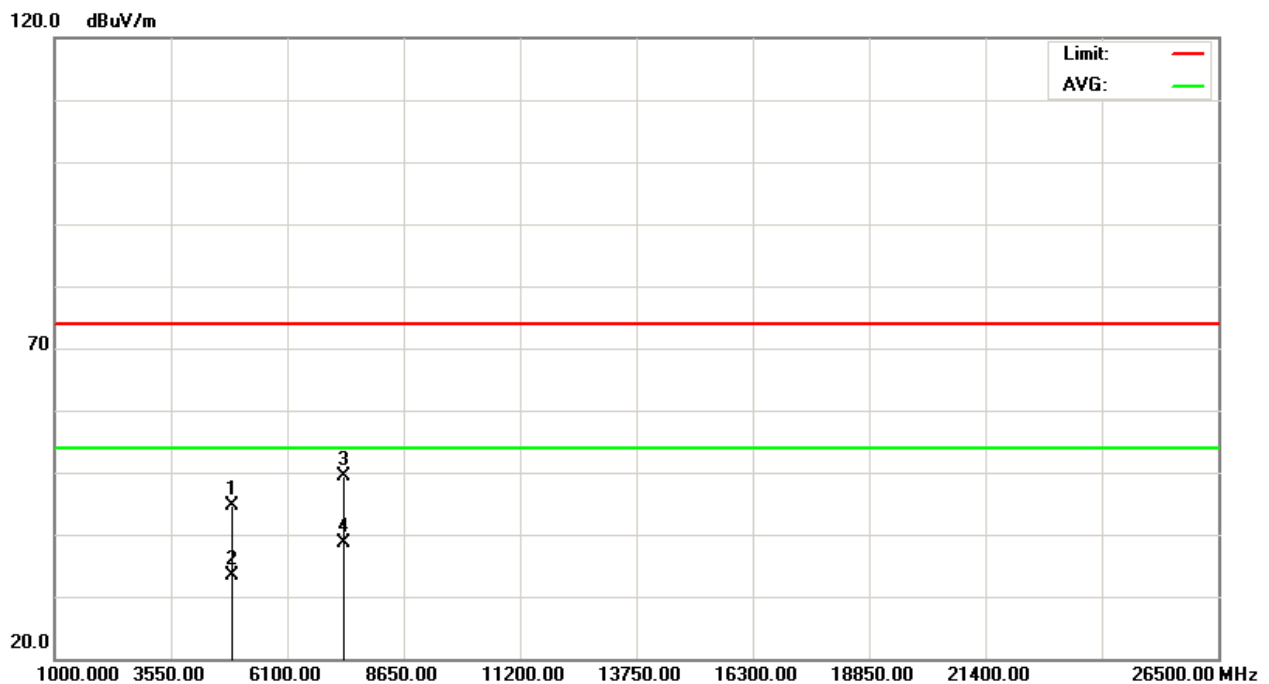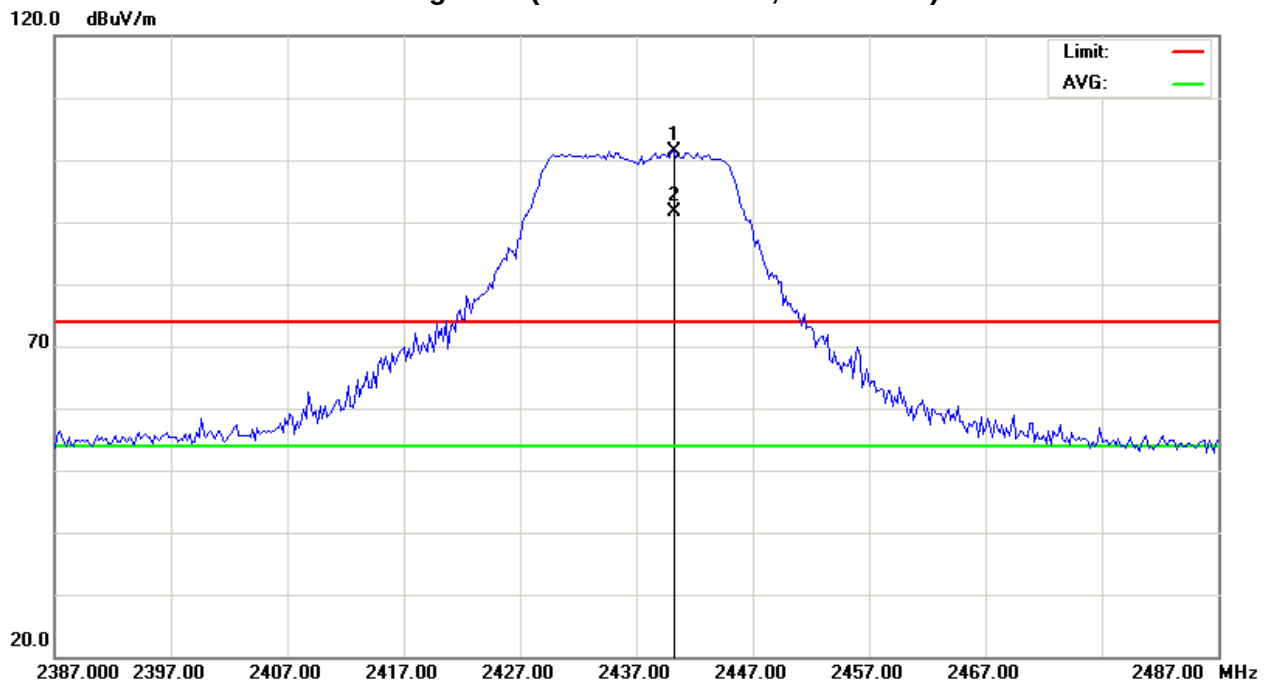



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2459.800	V	69.33	59.47	31.40	100.73	90.87				
H	2483.500	V	36.02	17.47	31.49	67.51	48.96	74.00	54.00	- 5.04	AV
H	4924.320	V	45.56	32.83	3.50	49.06	36.33	74.00	54.00	- 17.67	AV
H	7386.440	V	40.84	30.46	8.37	49.21	38.83	74.00	54.00	- 15.17	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11(Above 1000 MHz, Vertical)

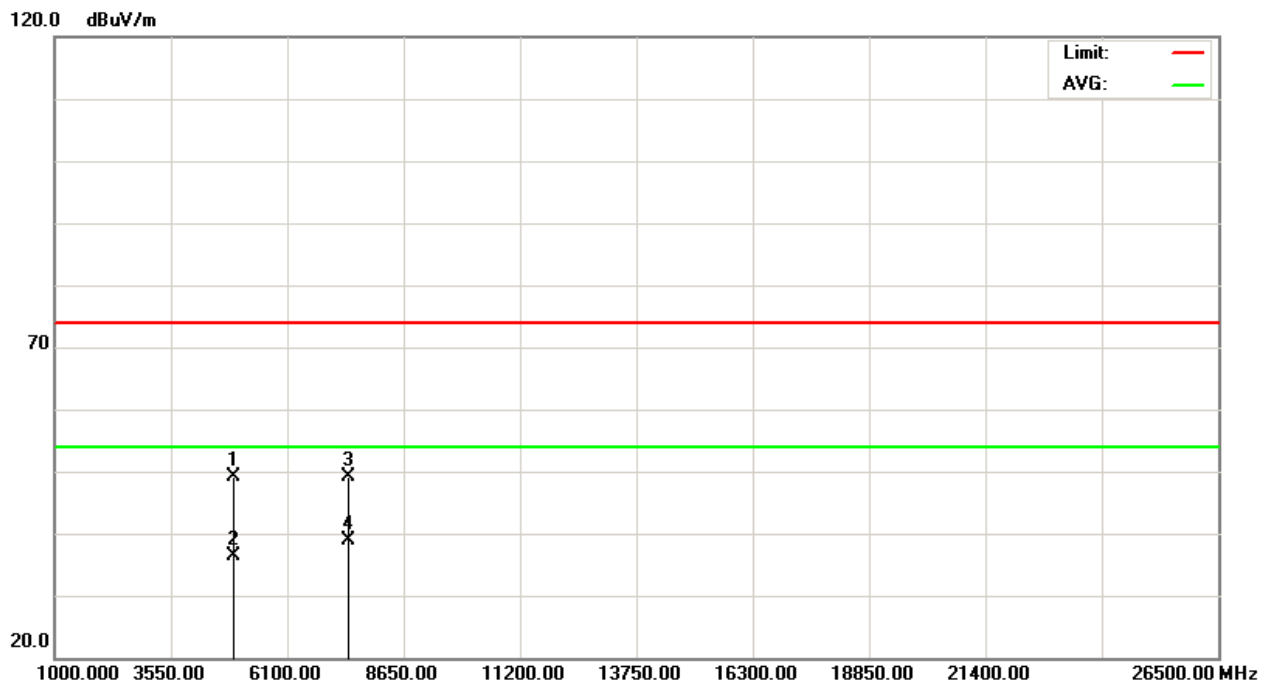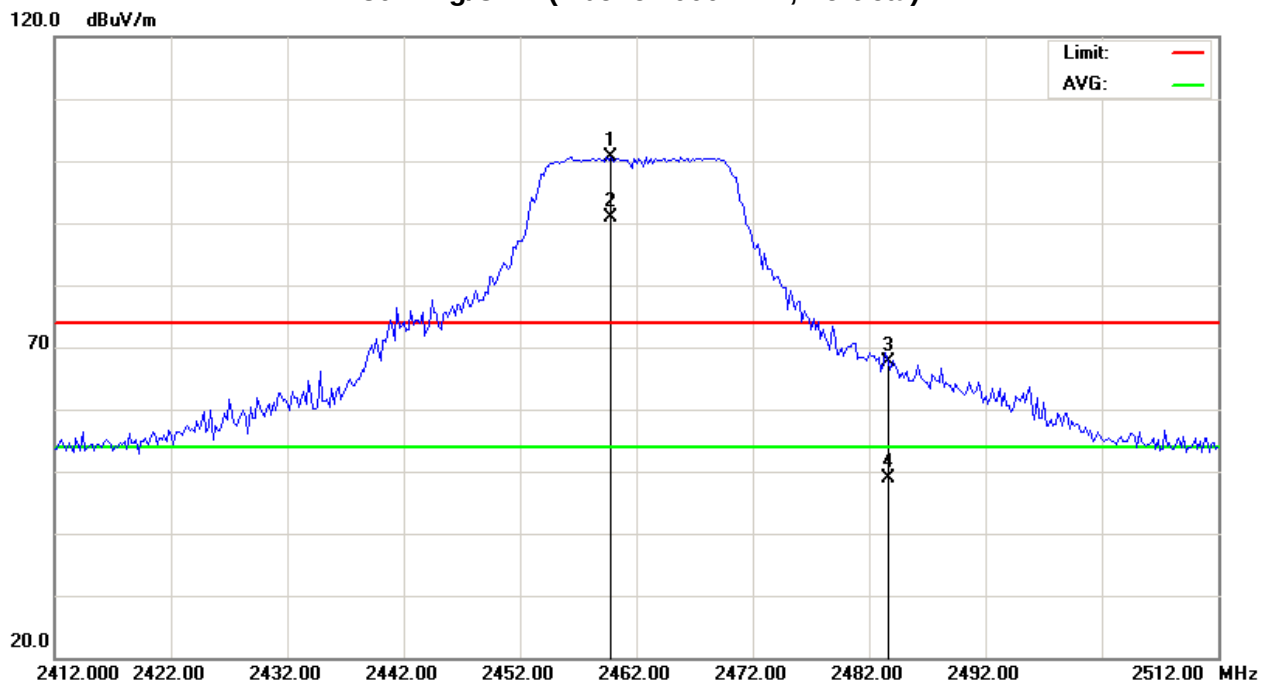



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2455.800	H	75.00	63.61	31.39	106.39	95.00				
H	2484.700	H	41.13	21.51	31.49	72.62	53.00	74.00	54.00	- 1.00	AV
H	4924.320	H	44.33	32.59	3.50	47.83	36.09	74.00	54.00	- 17.91	AV
H	7385.920	H	42.99	30.44	8.37	51.36	38.81	74.00	54.00	- 15.19	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11(Above 1000 MHz, Horizontal)

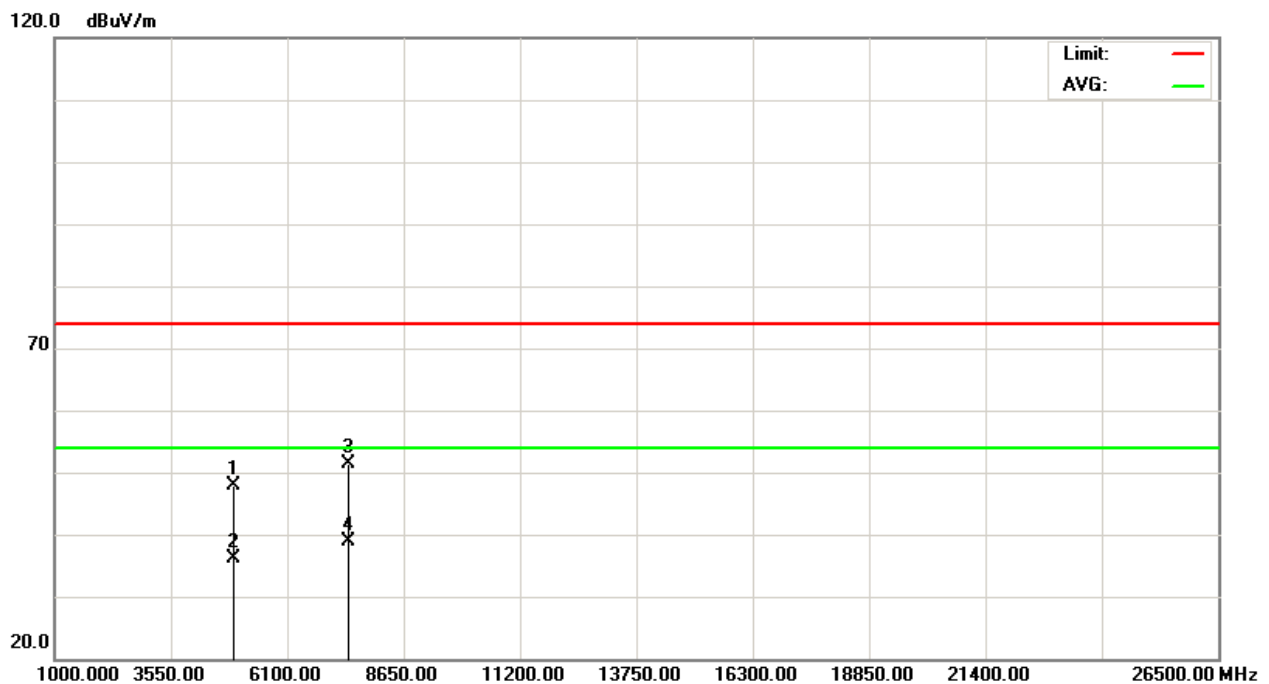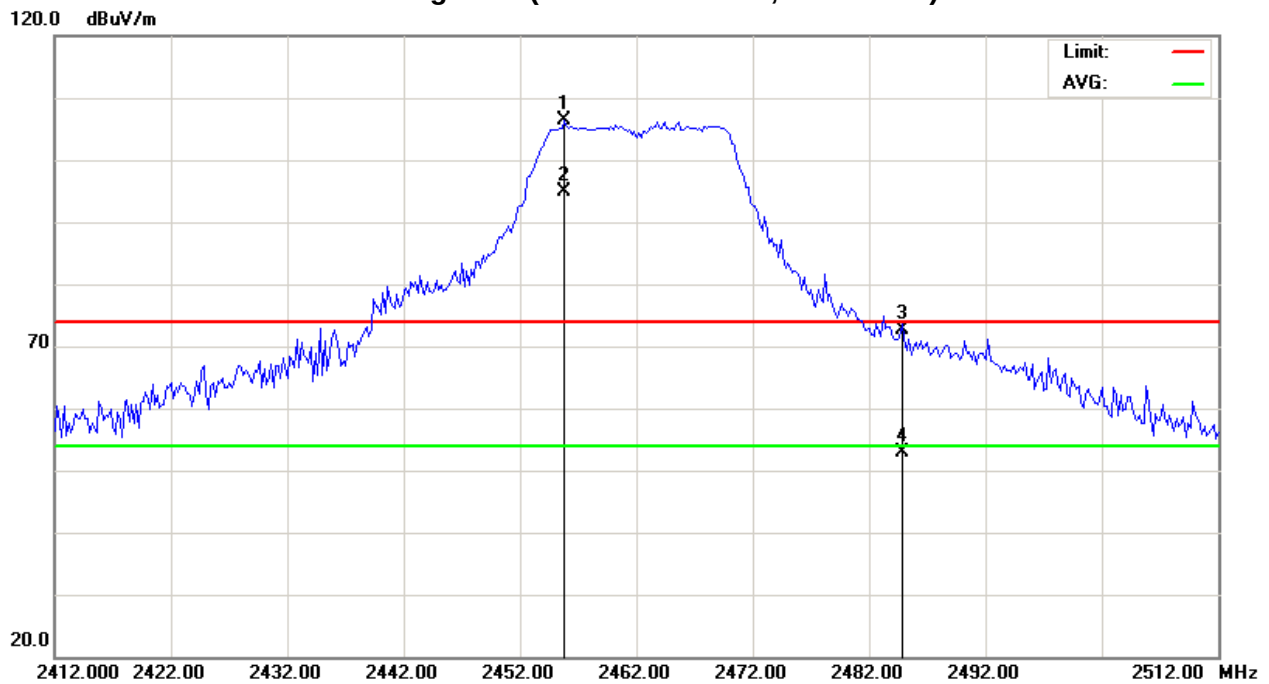



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	V	33.66	16.86	31.15	64.81	48.01	74.00	54.00	- 5.99	AV
F	2406.000	V	66.44	56.34	31.21	97.65	87.55				
H	4824.120	V	40.87	29.70	3.18	44.05	32.88	74.00	54.00	- 21.12	AV
H	7235.760	V	42.43	30.04	8.14	50.57	38.18	74.00	54.00	- 15.82	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH01(Above 1000 MHz, Vertical)

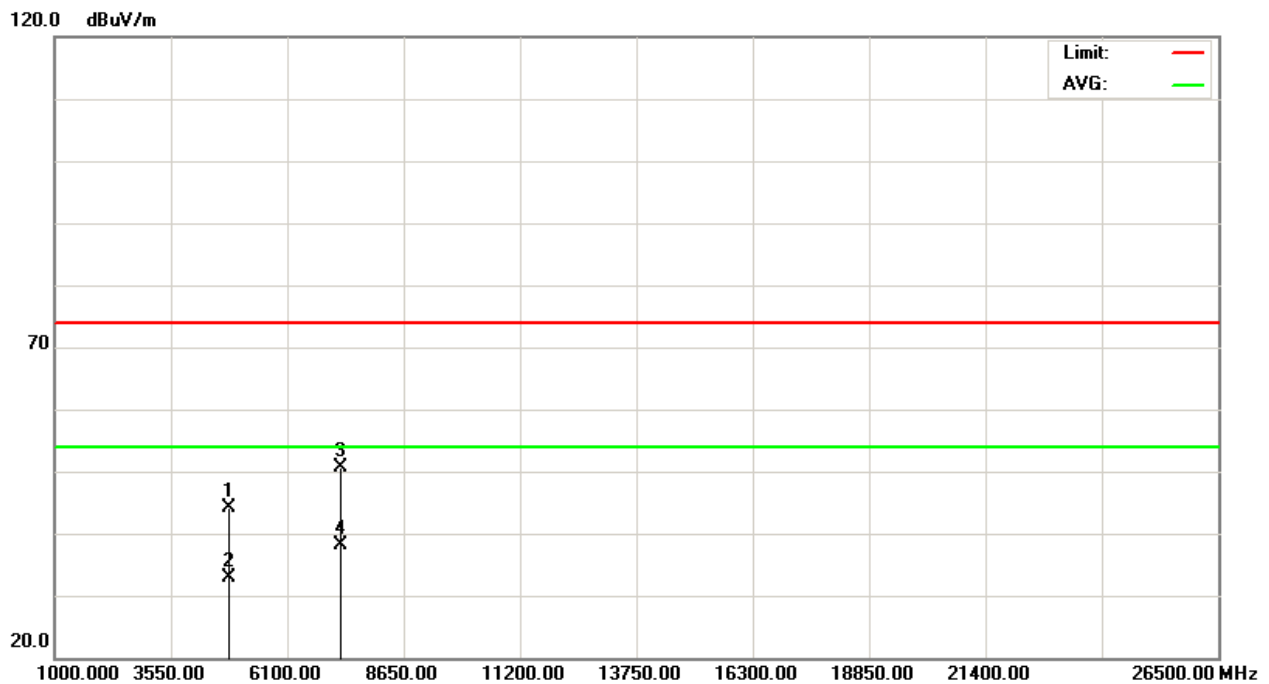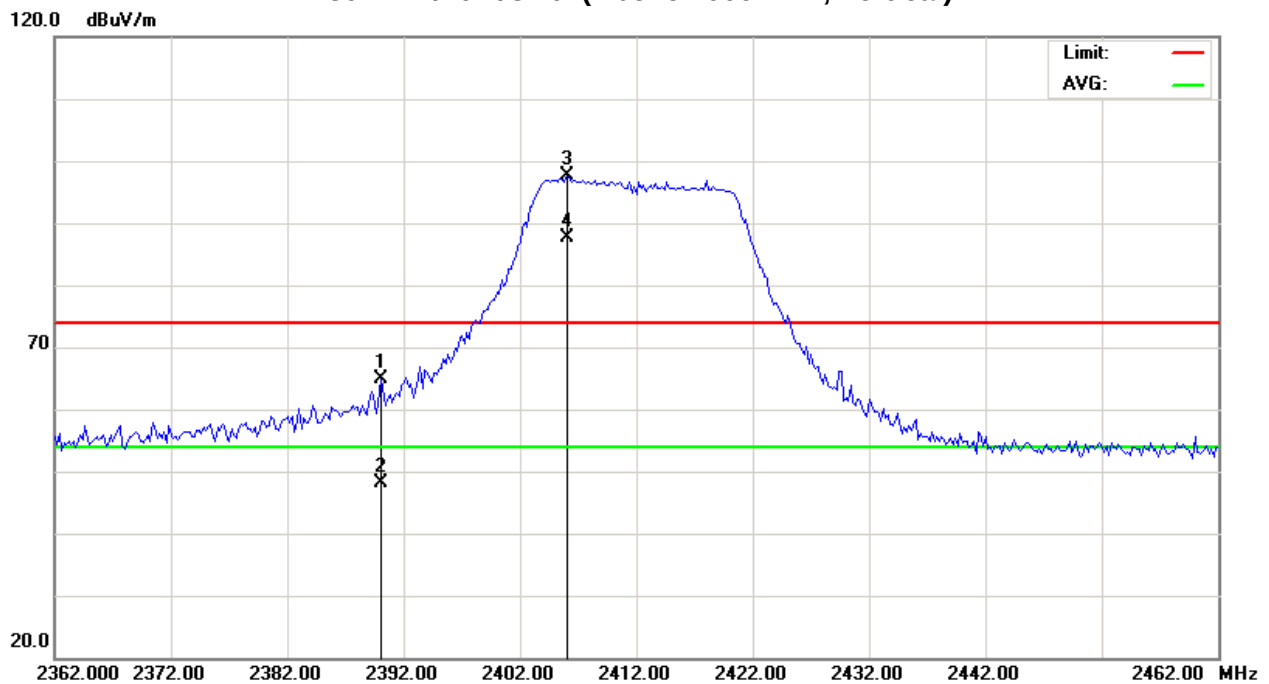



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH01 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	H	36.53	21.01	31.15	67.68	52.16	74.00	54.00	- 1.84	AV
F	2408.600	H	71.76	61.71	31.22	102.98	92.93				
H	4824.400	H	40.78	29.54	3.19	43.97	32.73	74.00	54.00	- 21.27	AV
H	7235.720	H	40.59	30.20	8.14	48.73	38.34	74.00	54.00	- 15.66	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH01(Above 1000 MHz, Horizontal)

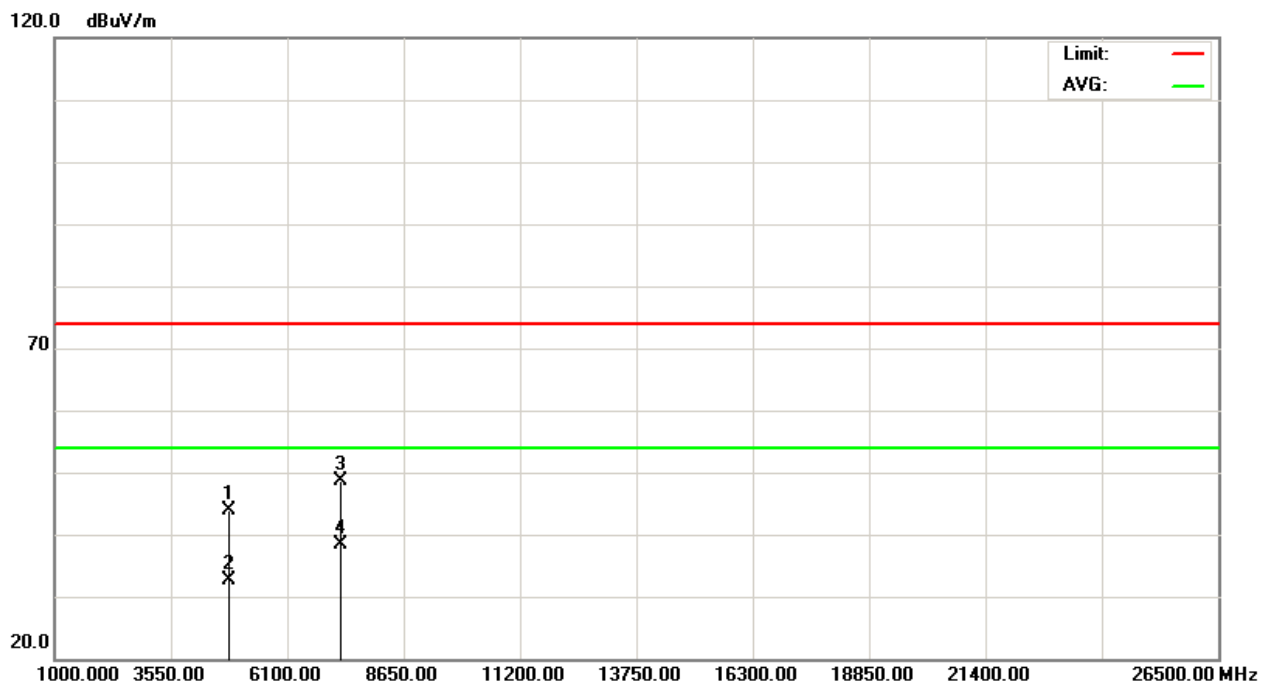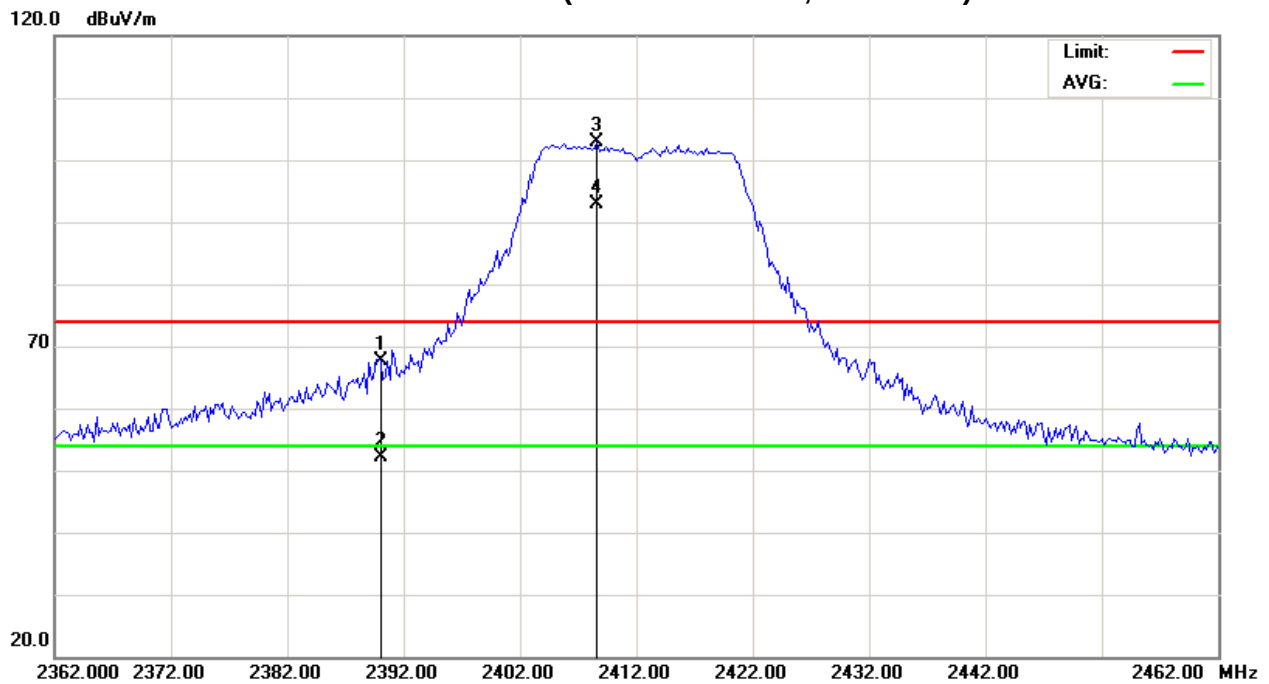



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2433.800	V	68.25	58.70	31.31	99.56	90.01				
H	4874.120	V	40.27	29.61	3.34	43.61	32.95	74.00	54.00	- 21.05	AV
H	7310.560	V	41.07	29.72	8.26	49.33	37.98	74.00	54.00	- 16.02	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH06(Above 1000 MHz, Vertical)

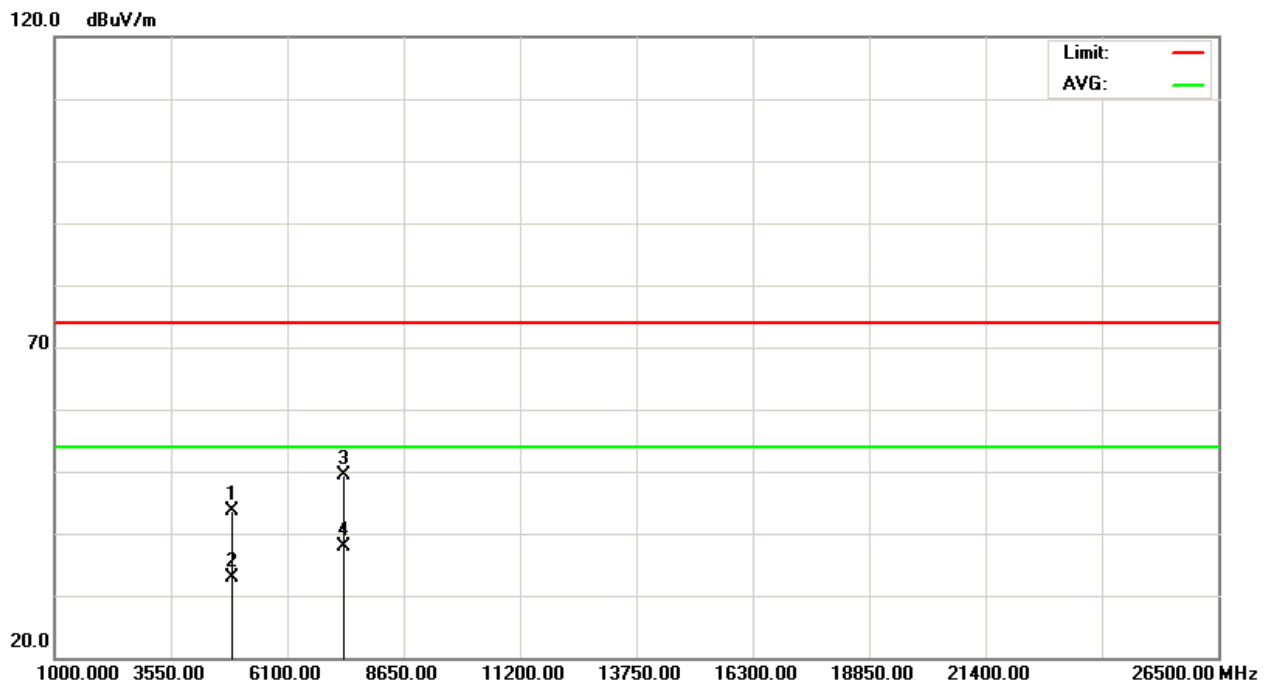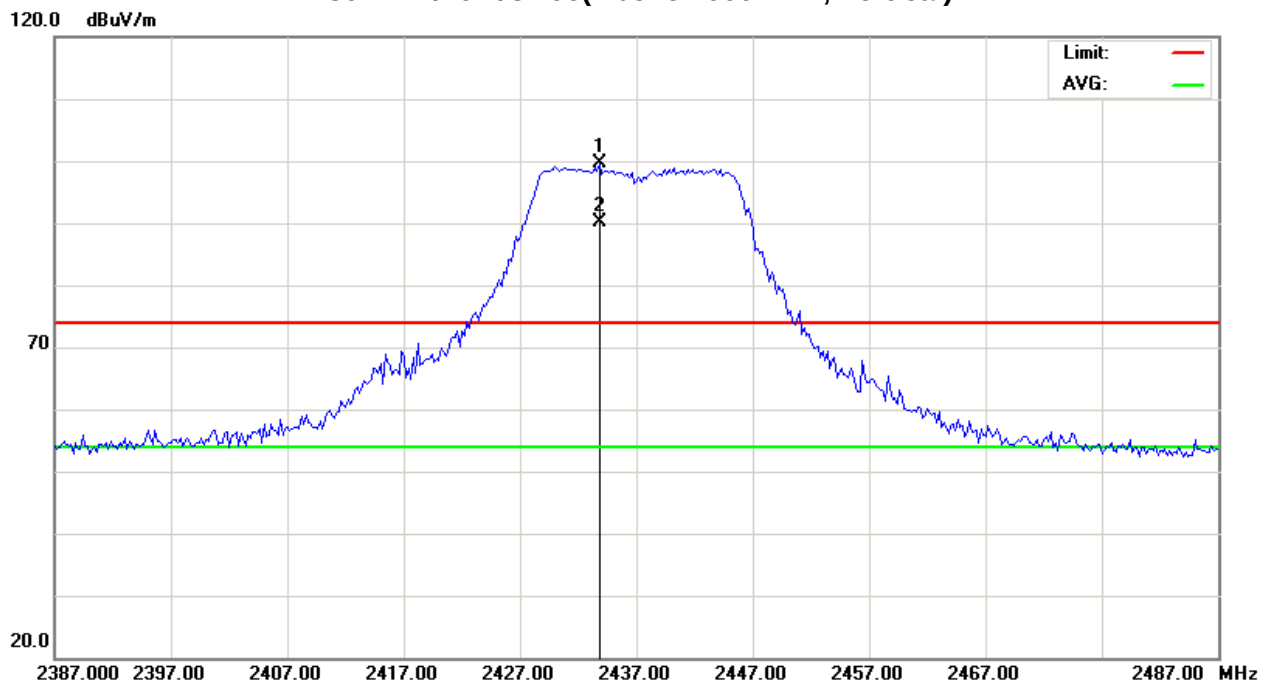



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH06 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2430.200	H	70.27	60.21	31.30	101.57	91.51				
H	4874.480	H	40.46	30.63	3.34	43.80	33.97	74.00	54.00	- 20.03	AV
H	7311.000	H	41.42	29.55	8.26	49.68	37.81	74.00	54.00	- 16.19	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH06(Above 1000 MHz, Horizontal)

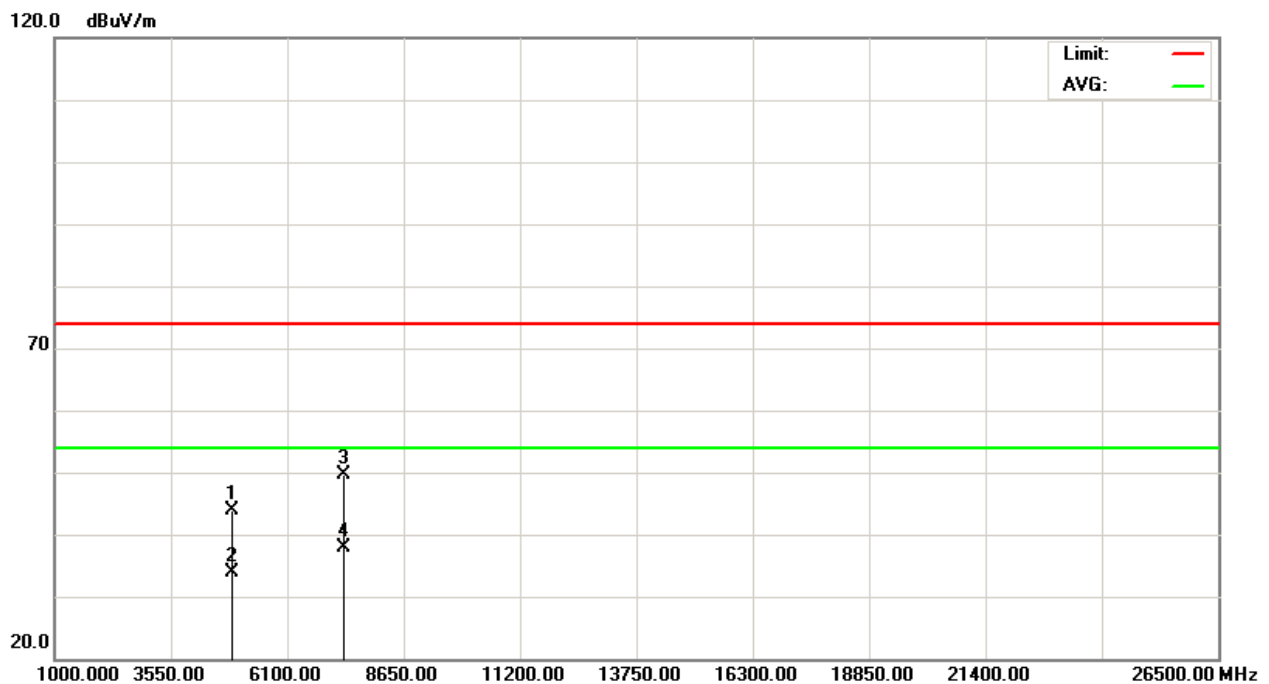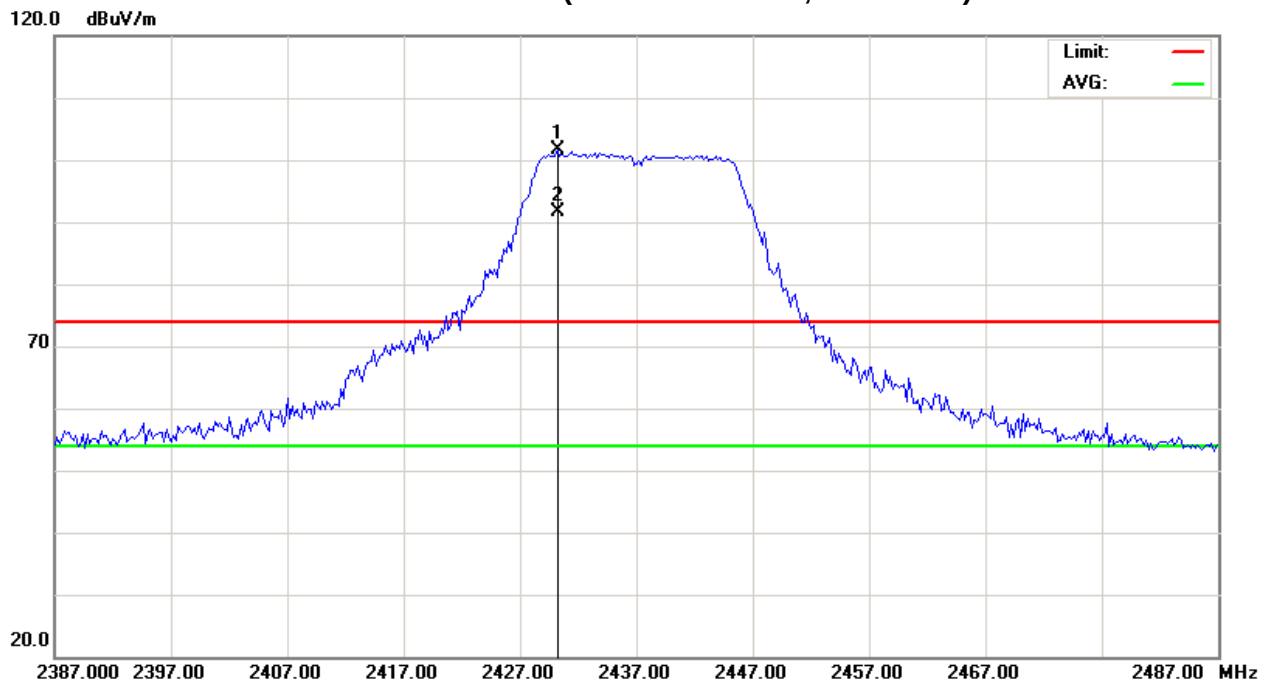



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2457.200	V	69.28	58.97	31.39	100.67	90.36				
H	2484.700	V	38.30	17.81	31.49	69.79	49.30	74.00	54.00	- 4.21	Peak
H	4924.280	V	43.35	31.36	3.50	46.85	34.86	74.00	54.00	- 19.14	AV
H	7386.360	V	42.68	30.51	8.37	51.05	38.88	74.00	54.00	- 15.12	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH11(Above 1000 MHz, Vertical)

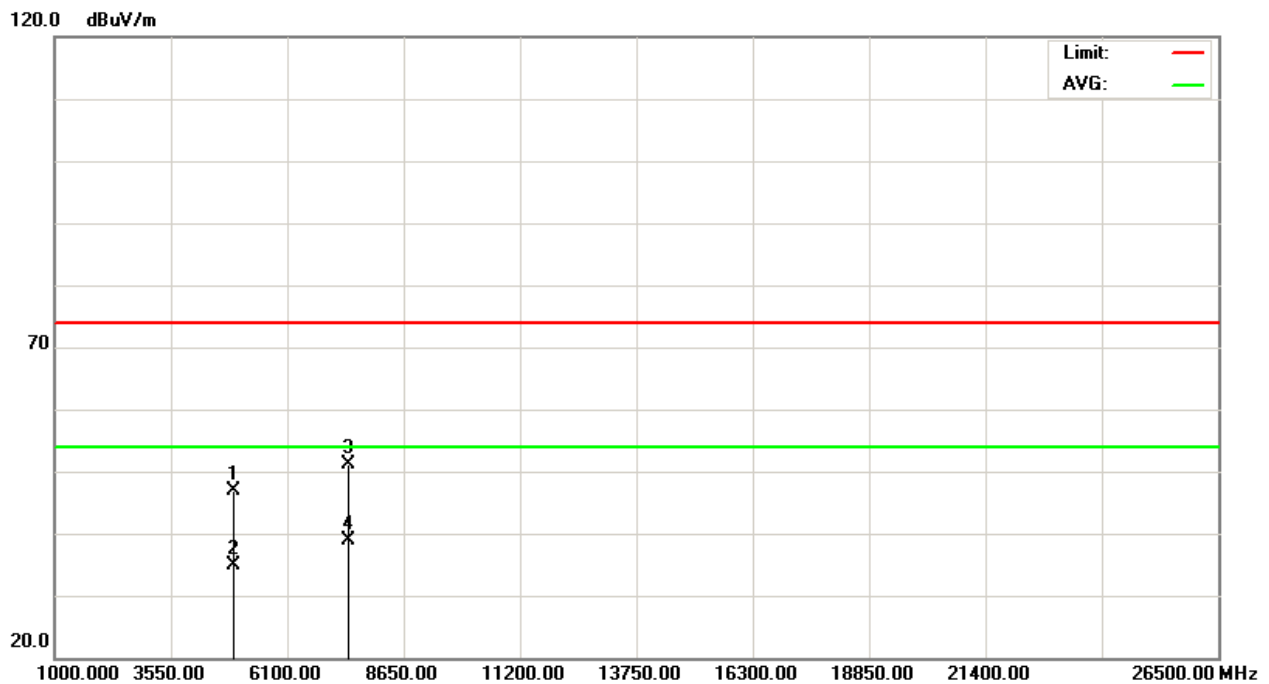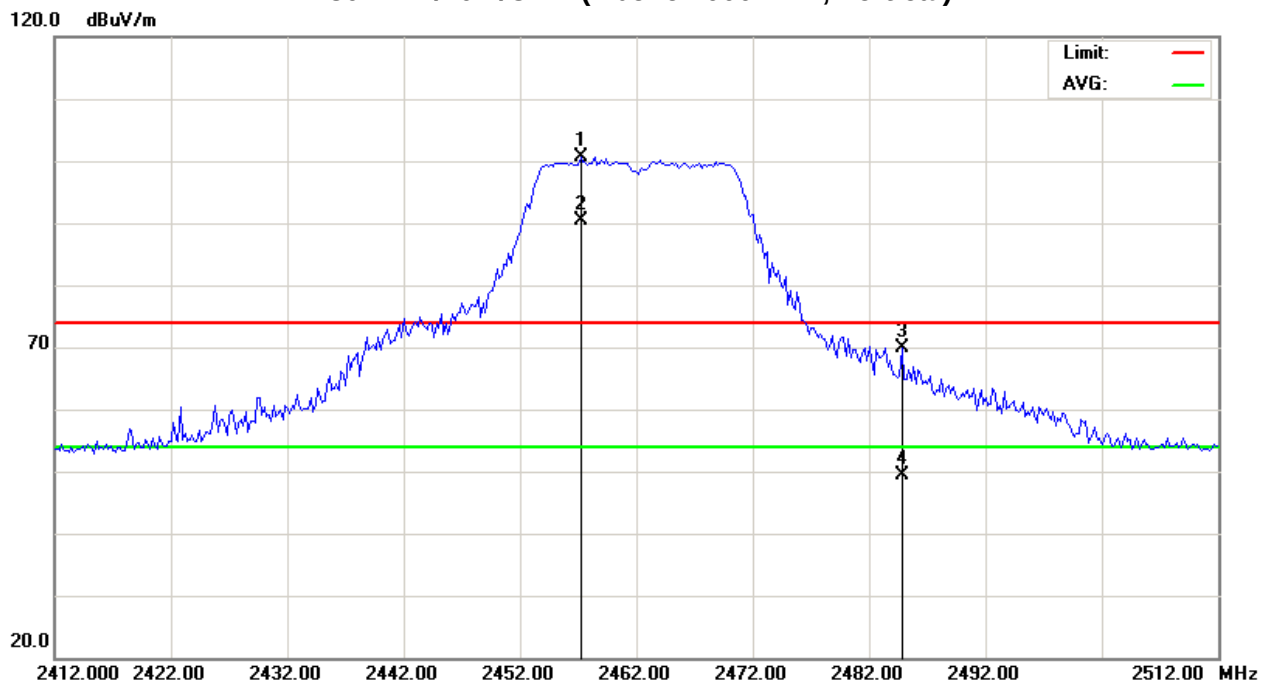



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH11 (APM6P-700096)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2456.000	H	74.06	63.08	31.39	105.45	94.47				
H	2483.700	H	41.71	21.92	31.49	73.20	53.41	74.00	54.00	- 0.59	AV
H	4923.840	H	42.49	31.34	3.49	45.98	34.83	74.00	54.00	- 19.17	AV
H	7385.560	H	41.76	30.75	8.37	50.13	39.12	74.00	54.00	- 14.88	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH11(Above 1000 MHz, Horizontal)

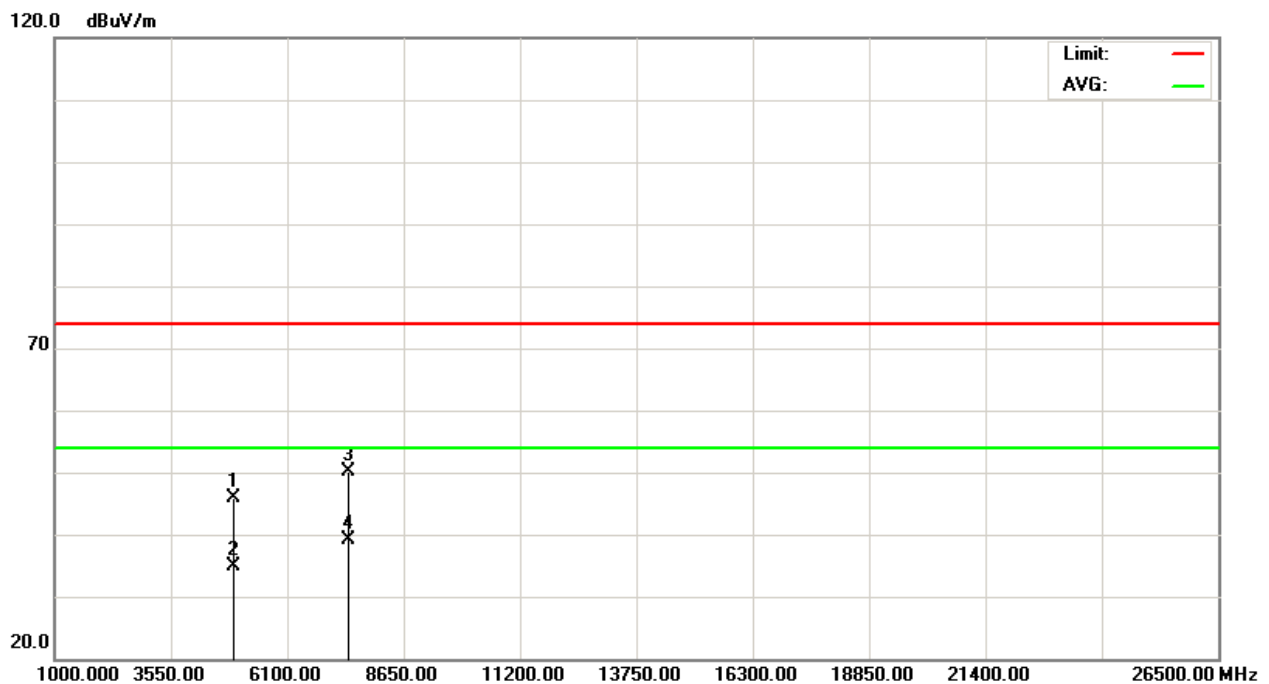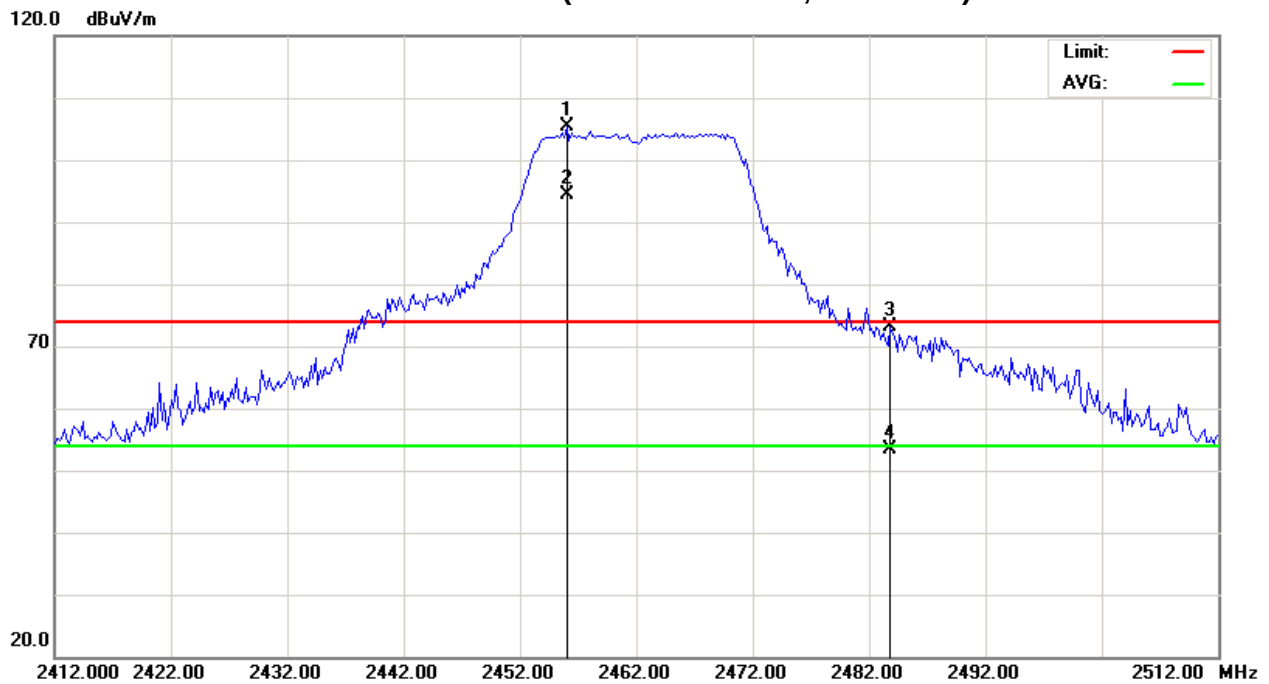





EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH01 (WDAN-1PA92101-1F)		

Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2386.200	V	23.28	12.69	31.14	54.42	43.83	74.00	54.00	- 10.17	AV
F	2410.600	V	62.91	55.90	31.23	94.14	87.13				
H	4824.020	V	50.88	46.82	3.18	54.06	50.00	74.00	54.00	- 4.00	AV
H	7235.960	V	44.37	31.02	8.14	52.51	39.16	74.00	54.00	- 14.84	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

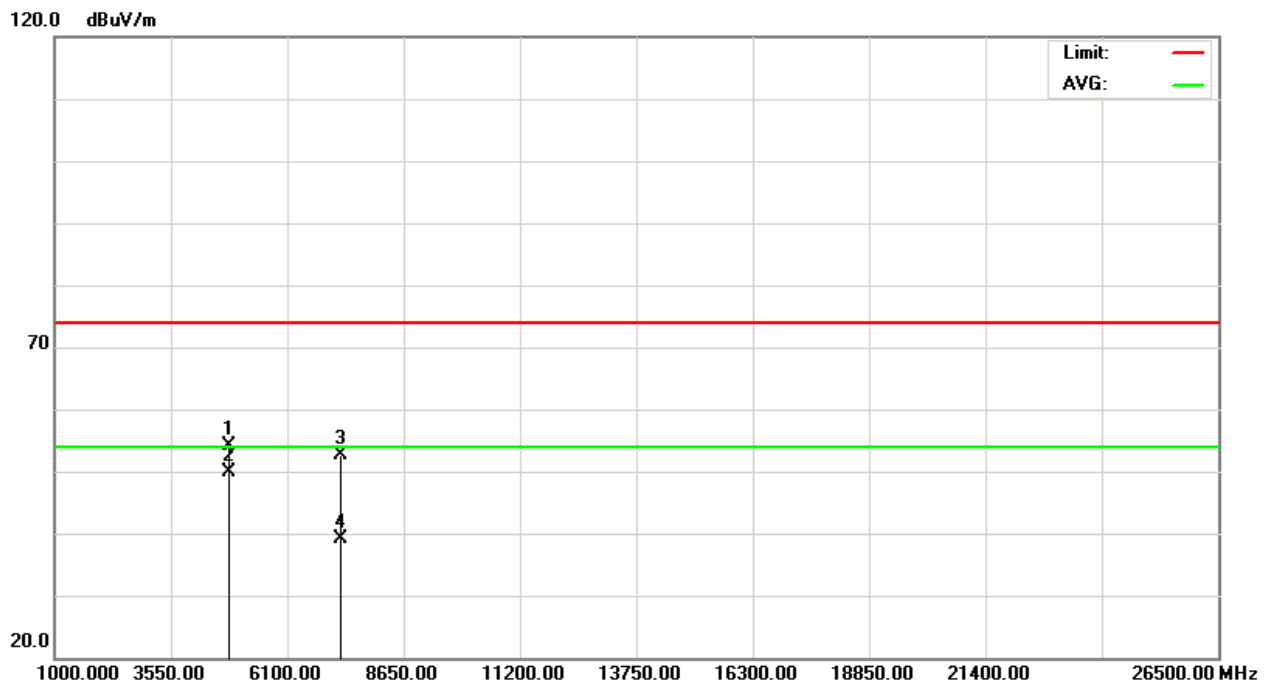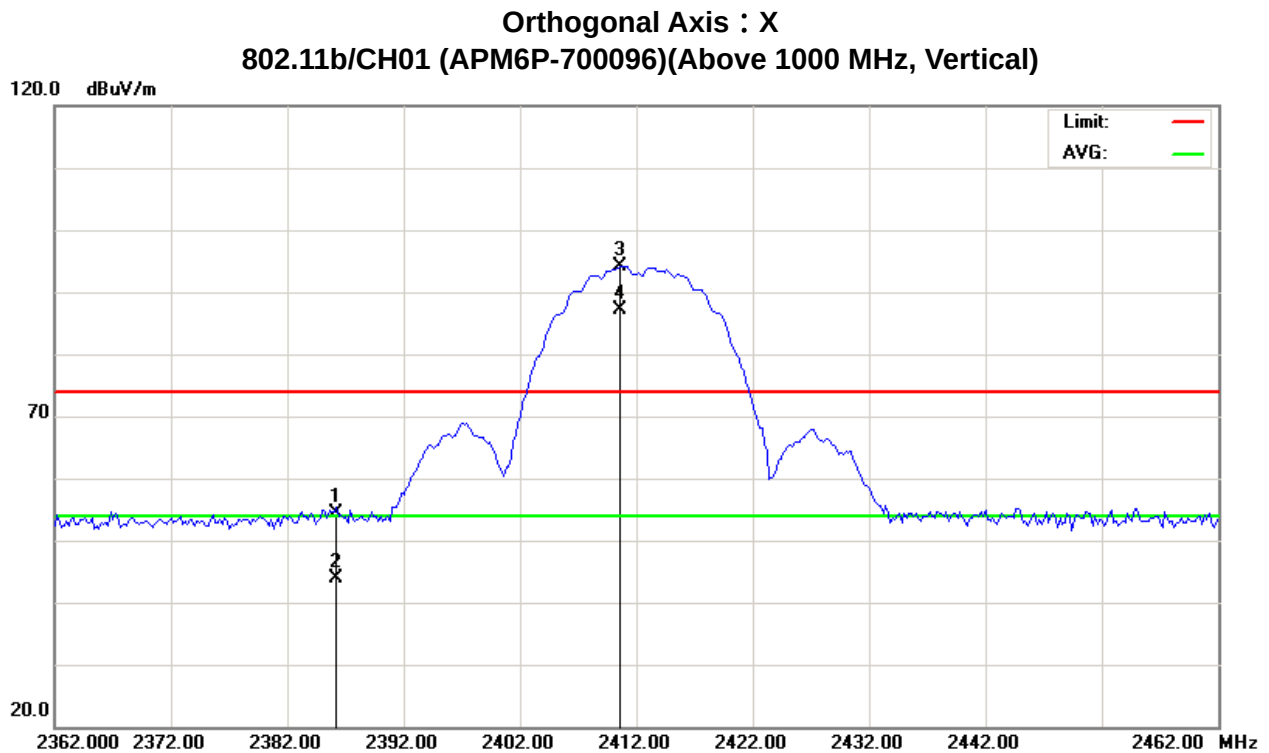



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH01 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2386.400	H	24.28	13.77	31.14	55.42	44.91	74.00	54.00	- 9.09	AV
F	2410.600	H	65.22	58.21	31.23	96.45	89.44				
H	4824.040	H	49.63	44.75	3.18	52.81	47.93	74.00	54.00	- 6.07	AV
H	7235.980	H	43.80	30.57	8.14	51.94	38.71	74.00	54.00	- 15.29	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH01(Above 1000 MHz, Horizontal)

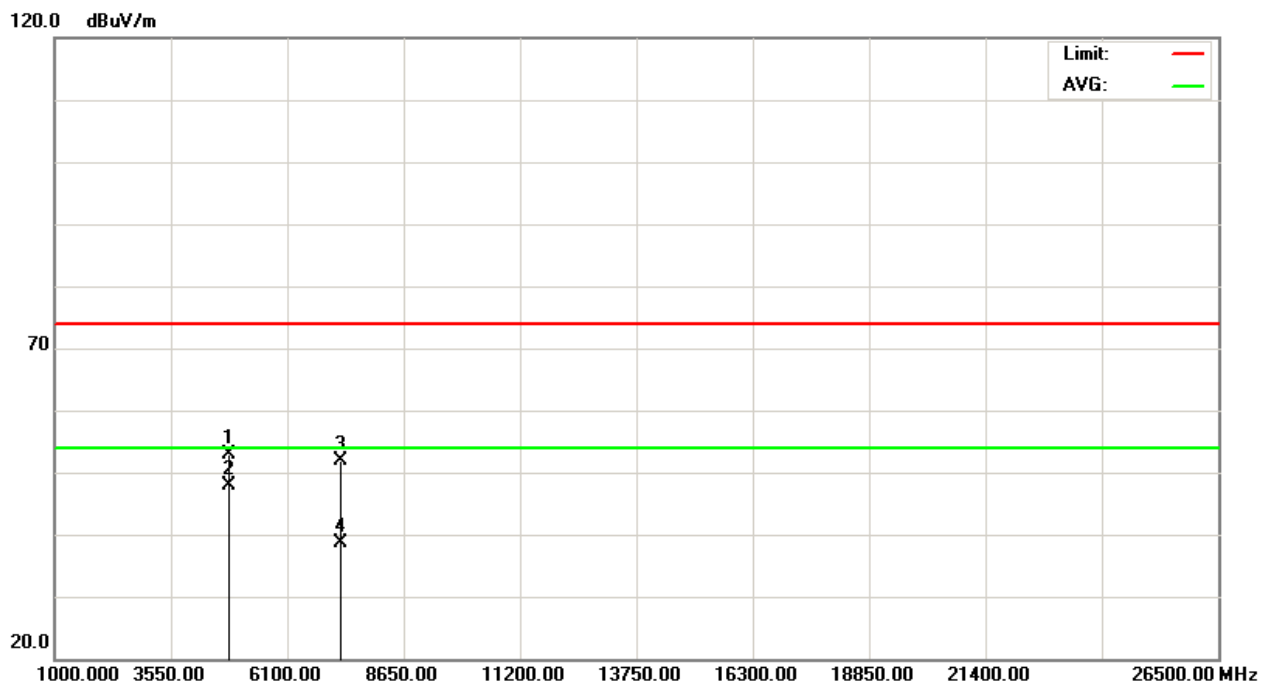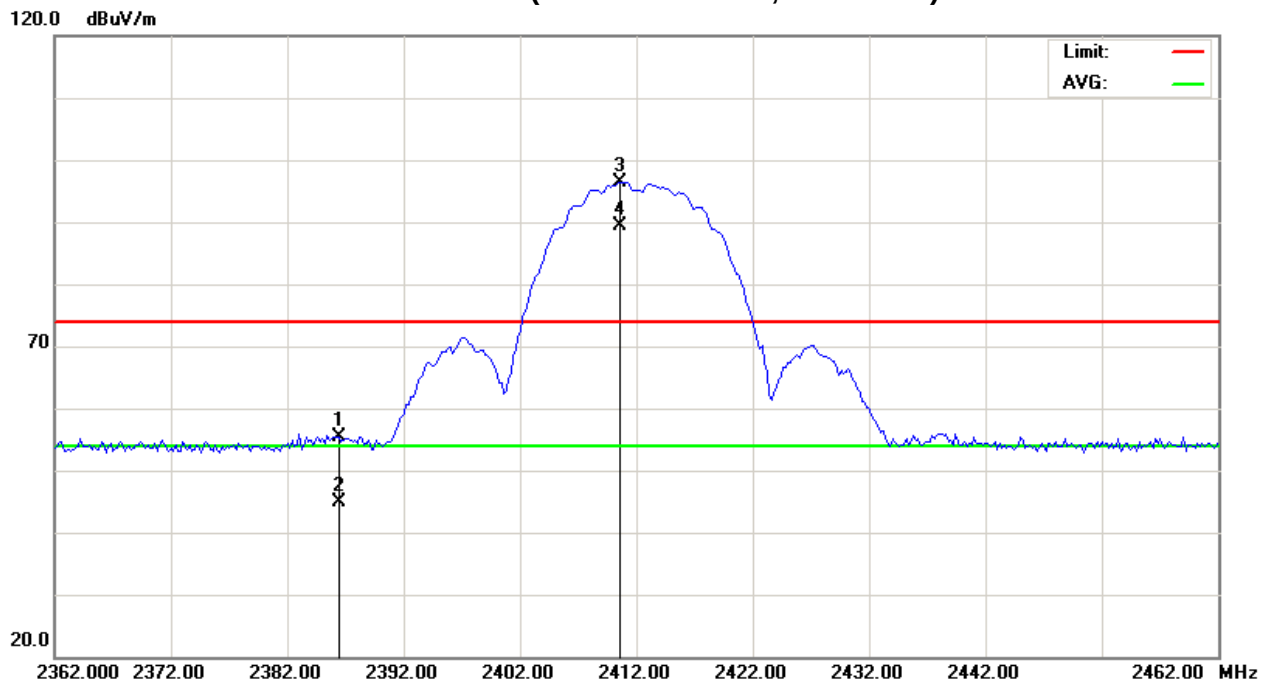



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2436.200	V	61.23	54.51	31.32	92.55	85.83				
H	4873.880	V	51.78	48.39	3.34	55.12	51.73	74.00	54.00	- 2.27	AV
H	7311.000	V	43.98	30.09	8.26	52.24	38.35	74.00	54.00	- 15.65	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Vertical)

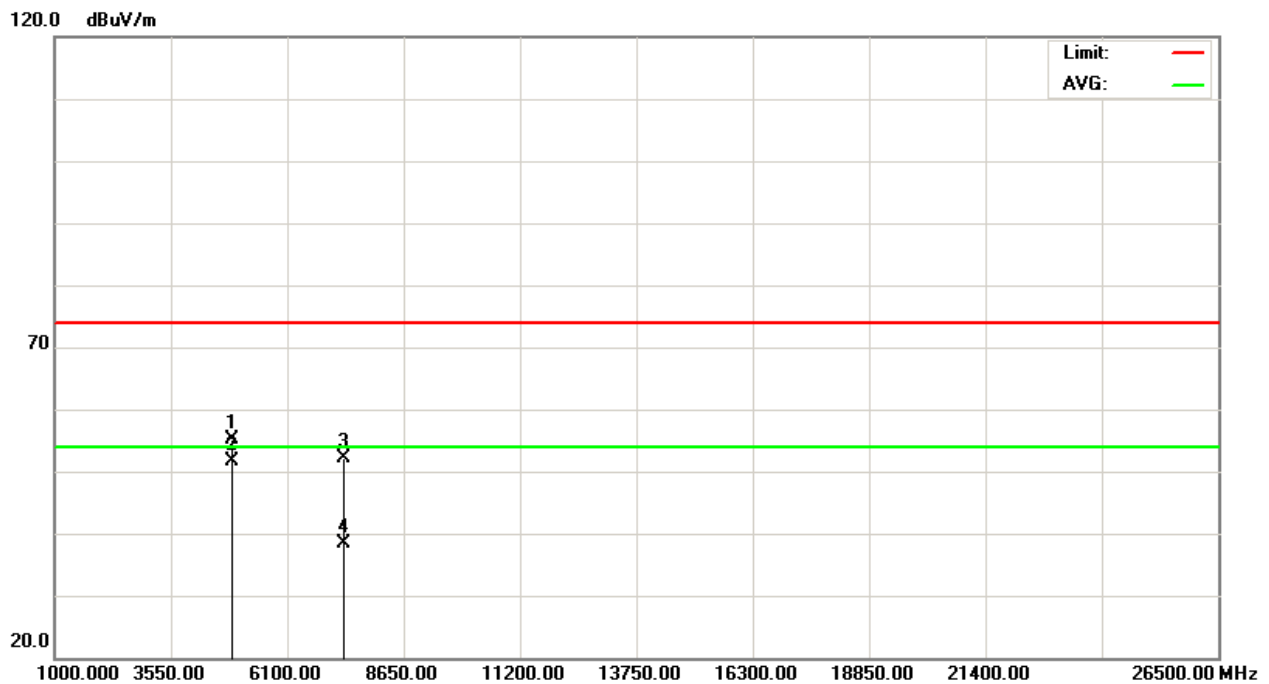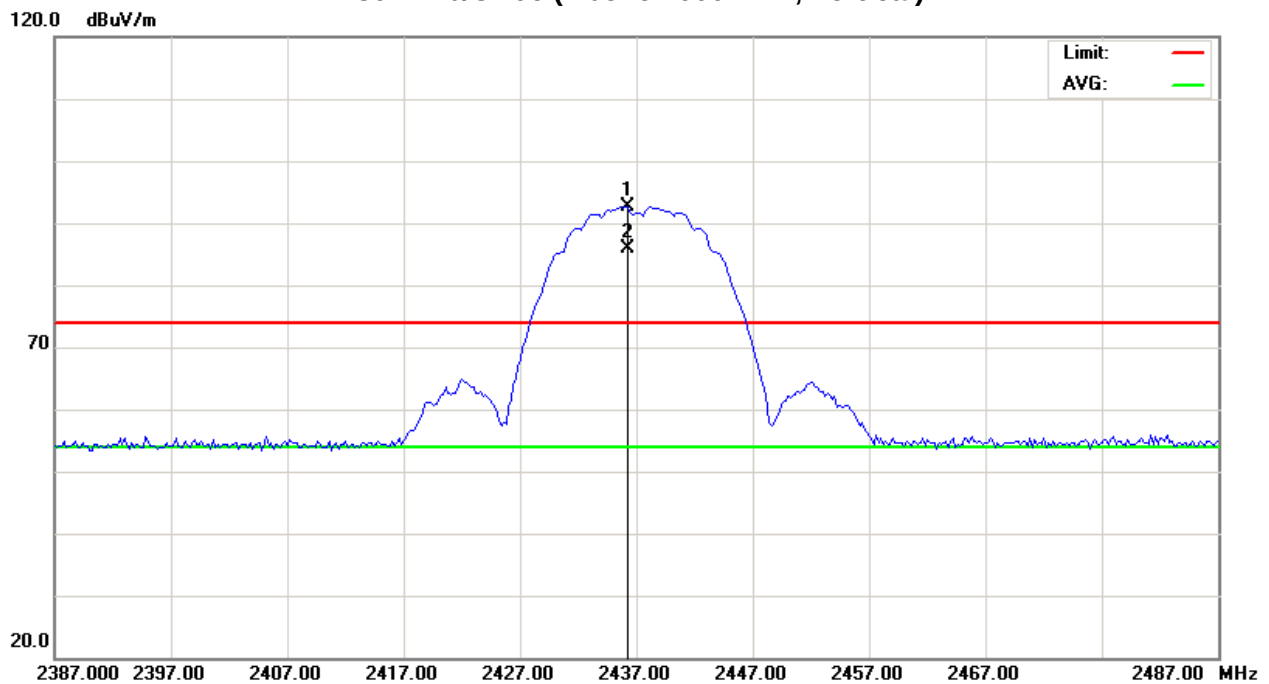



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2438.200	H	62.69	54.98	31.33	94.02	86.31				
H	4874.020	H	50.12	45.82	3.34	53.46	49.16	74.00	54.00	- 4.84	AV
H	7311.000	H	44.24	30.01	8.26	52.50	38.27	74.00	54.00	- 15.73	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH06 (Above 1000 MHz, Horizontal)

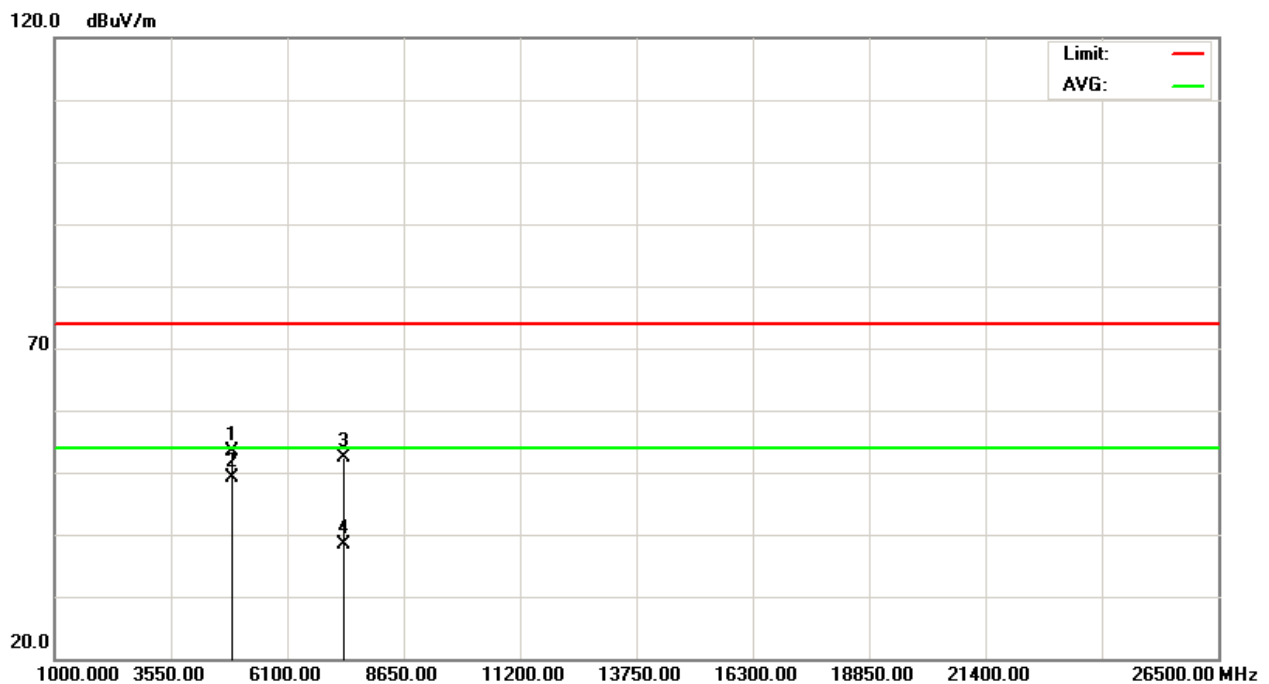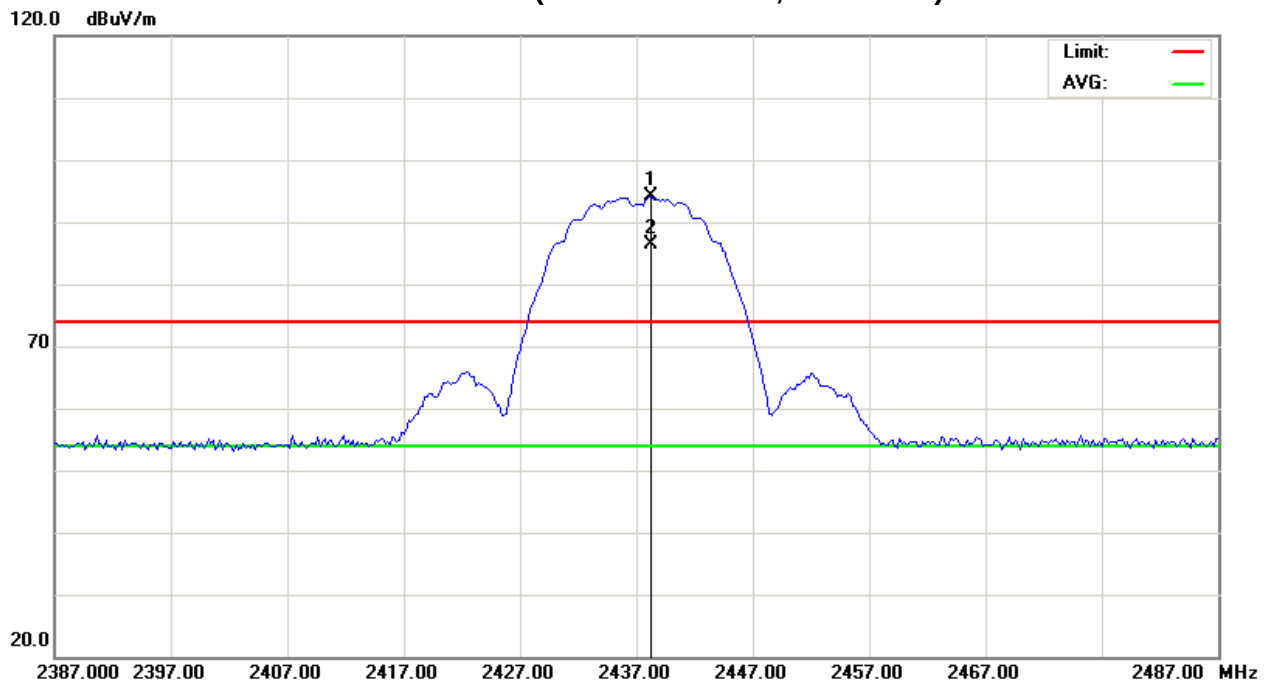



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2463.000	V	64.95	60.73	31.42	96.37	92.15				
H	2483.500	V	22.63	9.76	31.49	54.12	41.25	74.00	54.00	- 12.75	AV
H	4924.030	V	51.94	49.69	3.49	55.43	53.18	74.00	54.00	- 0.82	AV
H	7386.036	V	42.74	30.45	8.37	51.11	38.82	74.00	54.00	- 15.18	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11(Above 1000 MHz, Vertical)

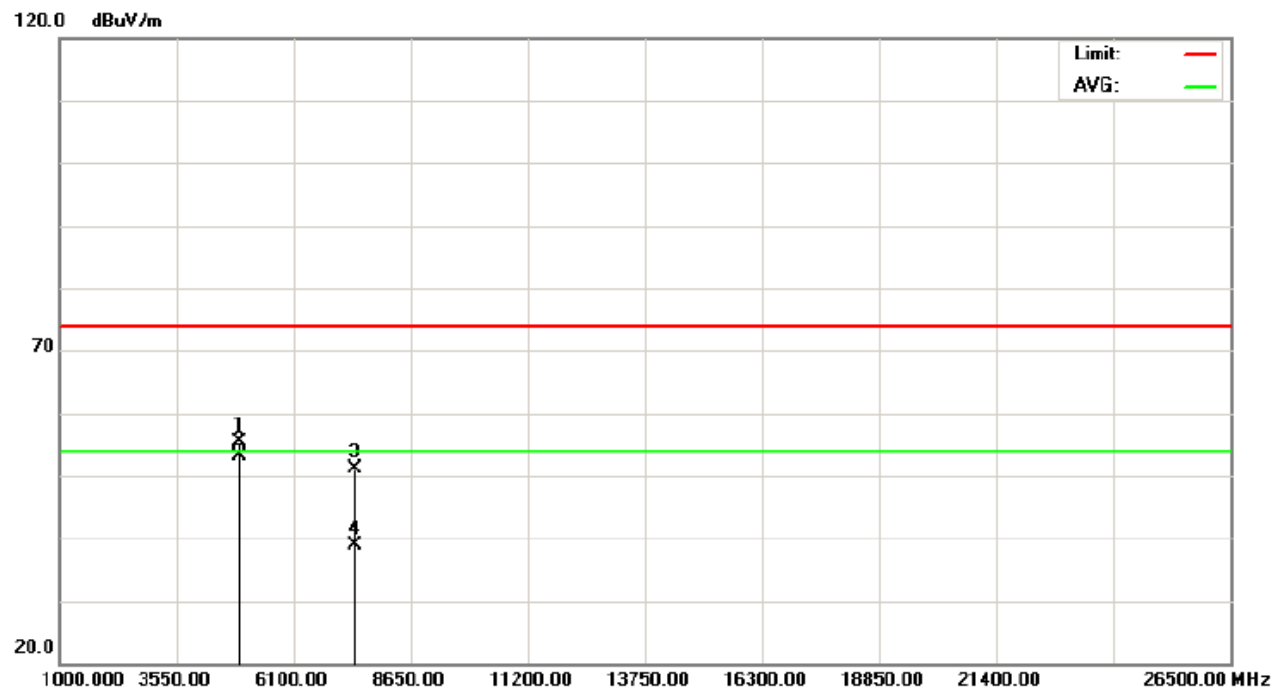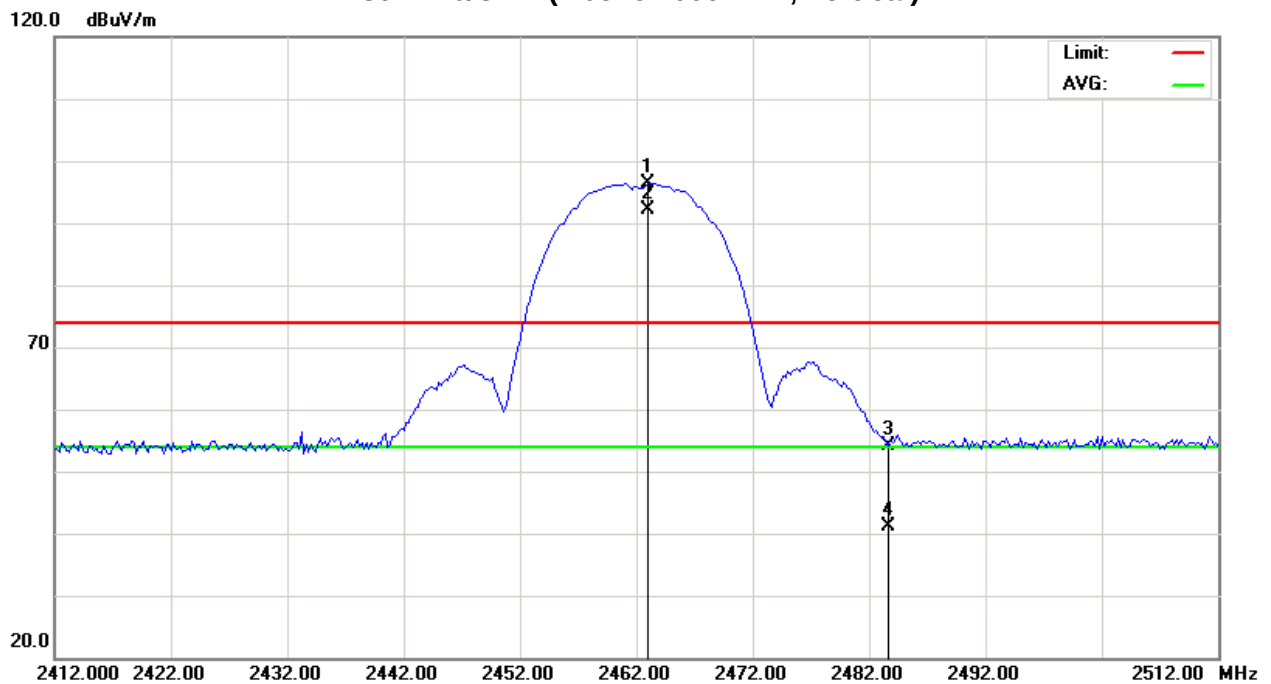



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2462.760	H	66.63	63.70	31.42	98.05	95.12				
H	2483.500	H	23.07	12.72	31.49	54.56	44.21	74.00	54.00	- 9.79	AV
H	4924.028	H	48.77	45.03	3.49	52.26	48.52	74.00	54.00	- 5.48	AV
H	7386.036	H	41.40	30.45	8.37	49.77	38.82	74.00	54.00	- 15.18	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11b/CH11(Above 1000 MHz, Horizontal)

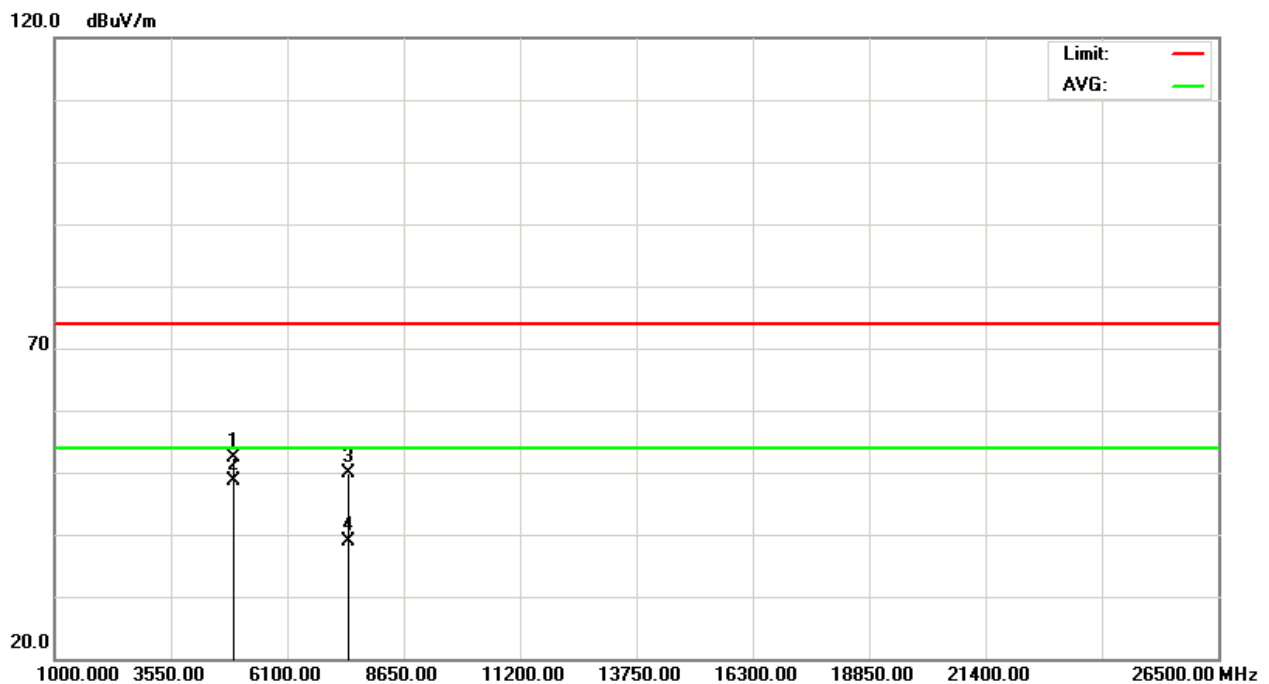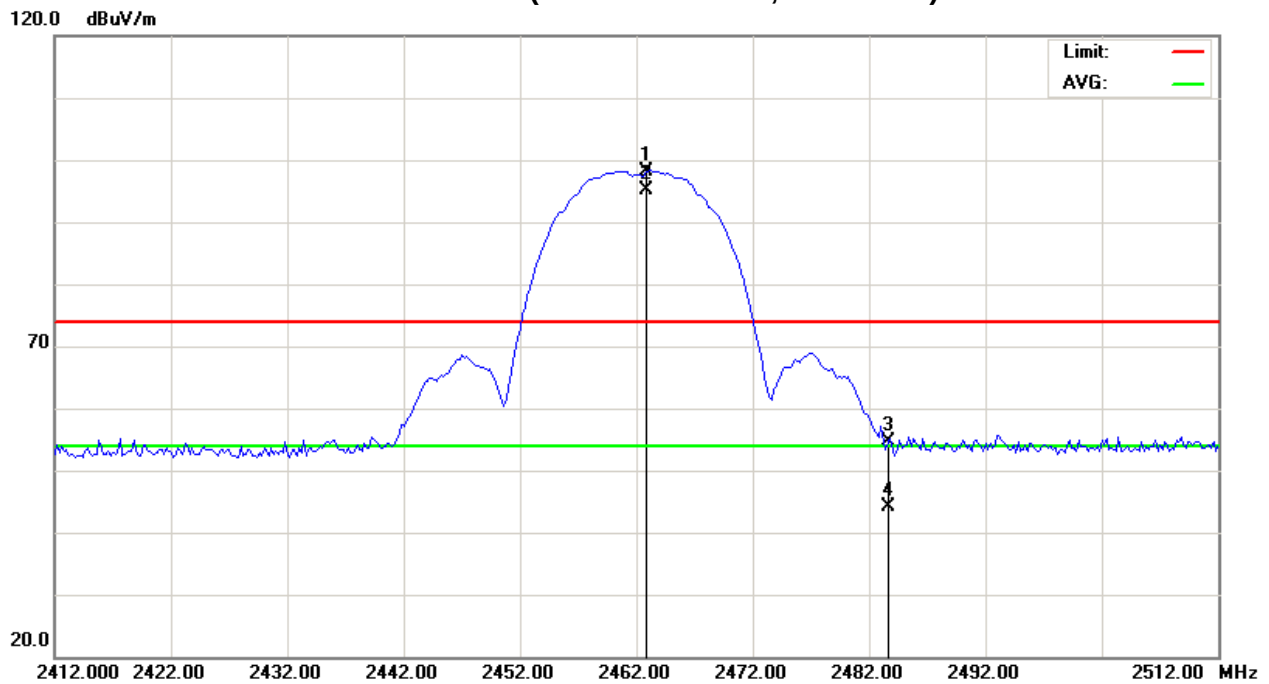



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH01 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	V	24.78	12.92	31.15	55.93	44.07	74.00	54.00	- 9.93	AV
F	2413.600	V	59.58	49.22	31.24	90.82	80.46				
H	4823.760	V	47.08	34.39	3.18	50.26	37.57	74.00	54.00	- 16.43	AV
H	7236.000	V	42.18	30.68	8.14	50.32	38.82	74.00	54.00	- 15.18	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01(Above 1000 MHz, Vertical)

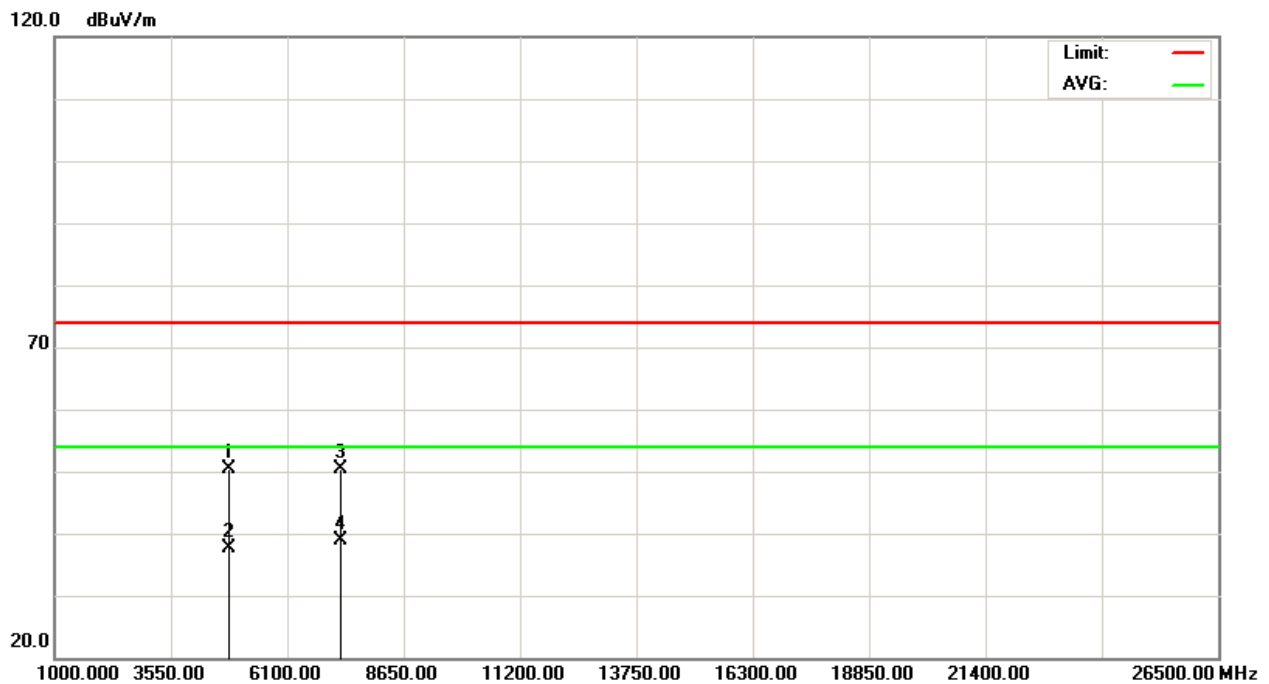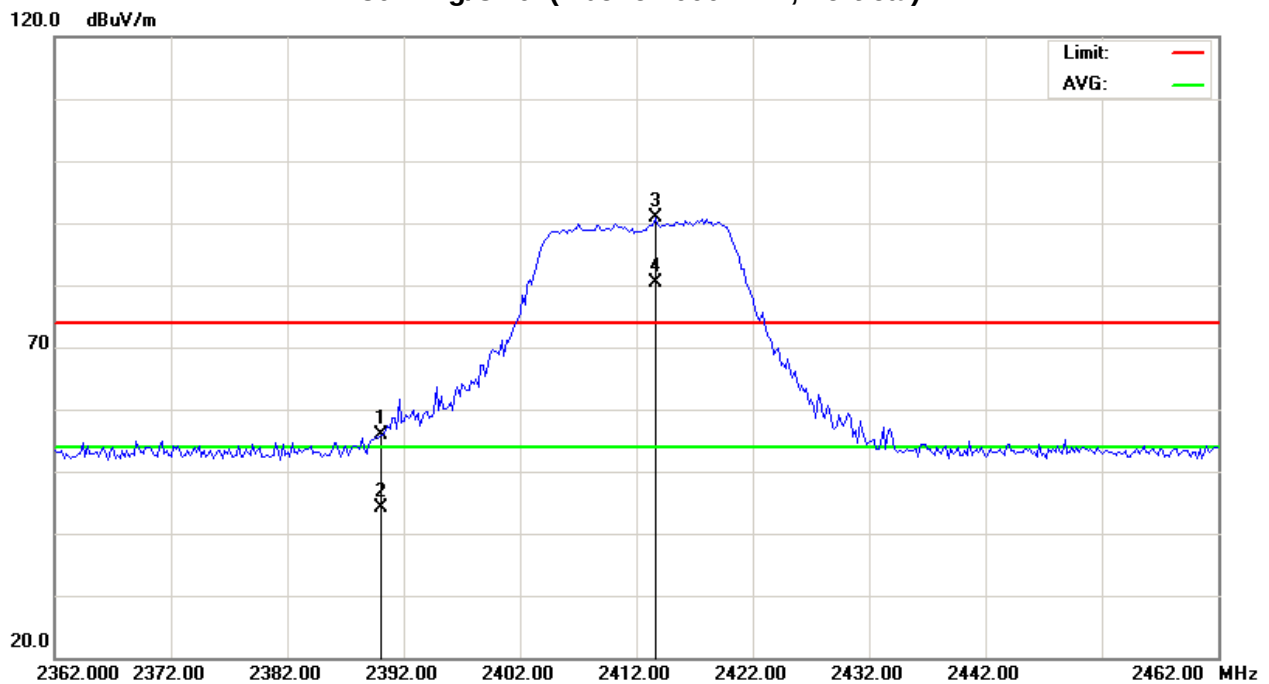



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH01 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	H	31.38	16.44	31.15	62.53	47.59	74.00	54.00	- 6.41	AV
F	2405.600	H	65.28	55.81	31.21	96.49	87.02				
H	4824.760	H	45.35	32.51	3.19	48.54	35.70	74.00	54.00	- 18.30	AV
H	7236.120	H	41.27	30.61	8.14	49.41	38.75	74.00	54.00	- 15.25	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH01(Above 1000 MHz, Horizontal)

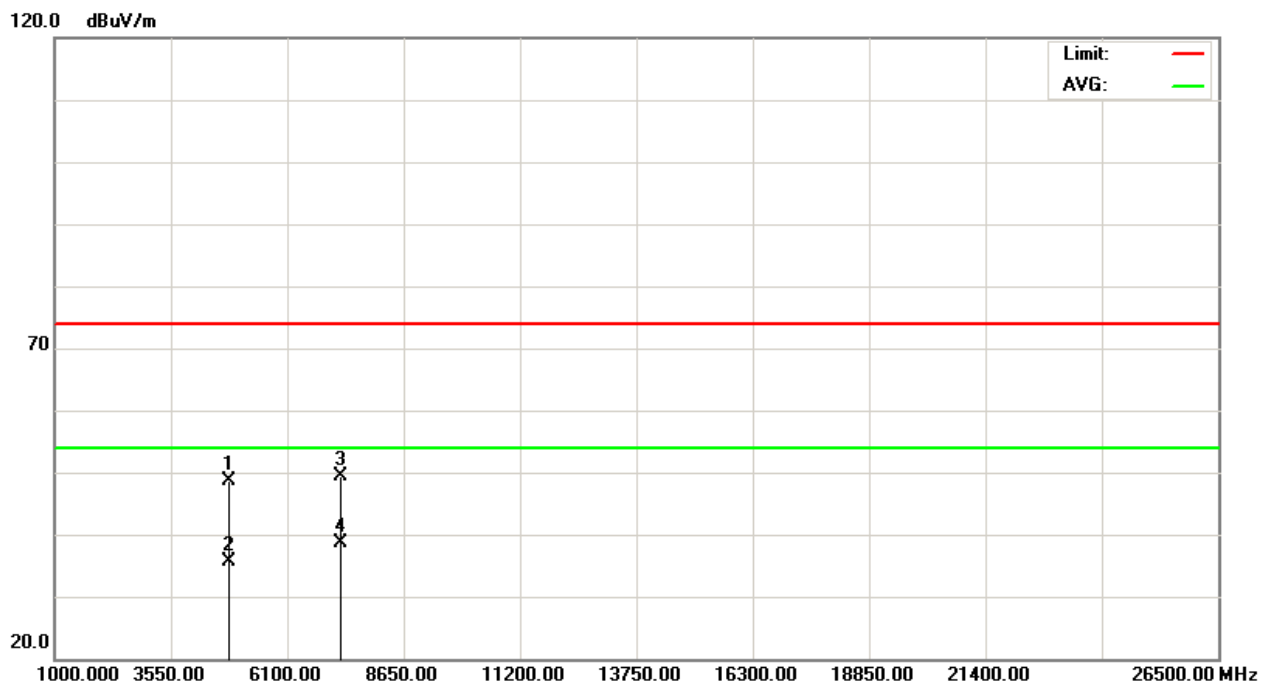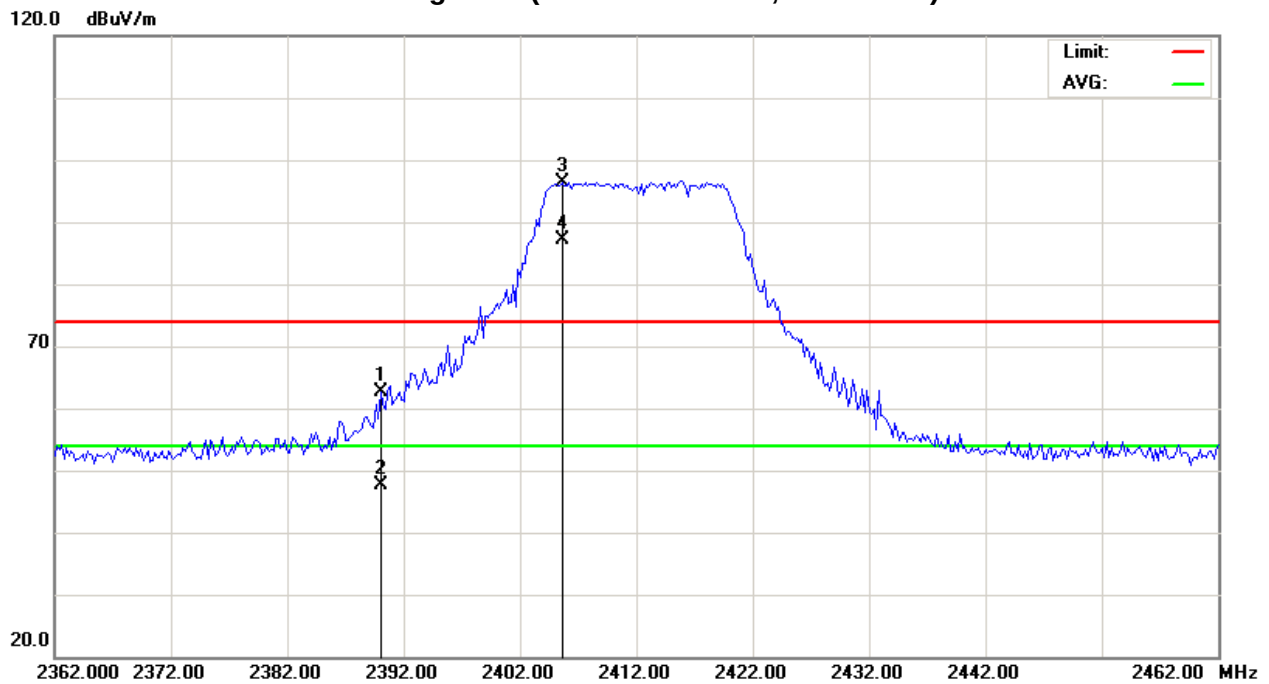



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2430.600	V	64.09	54.41	31.30	95.39	85.71				
H	4874.600	V	49.44	38.92	3.34	52.78	42.26	74.00	54.00	- 11.74	AV
H	7310.100	V	40.46	30.18	8.26	48.72	38.44	74.00	54.00	- 15.56	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06(Above 1000 MHz, Vertical)

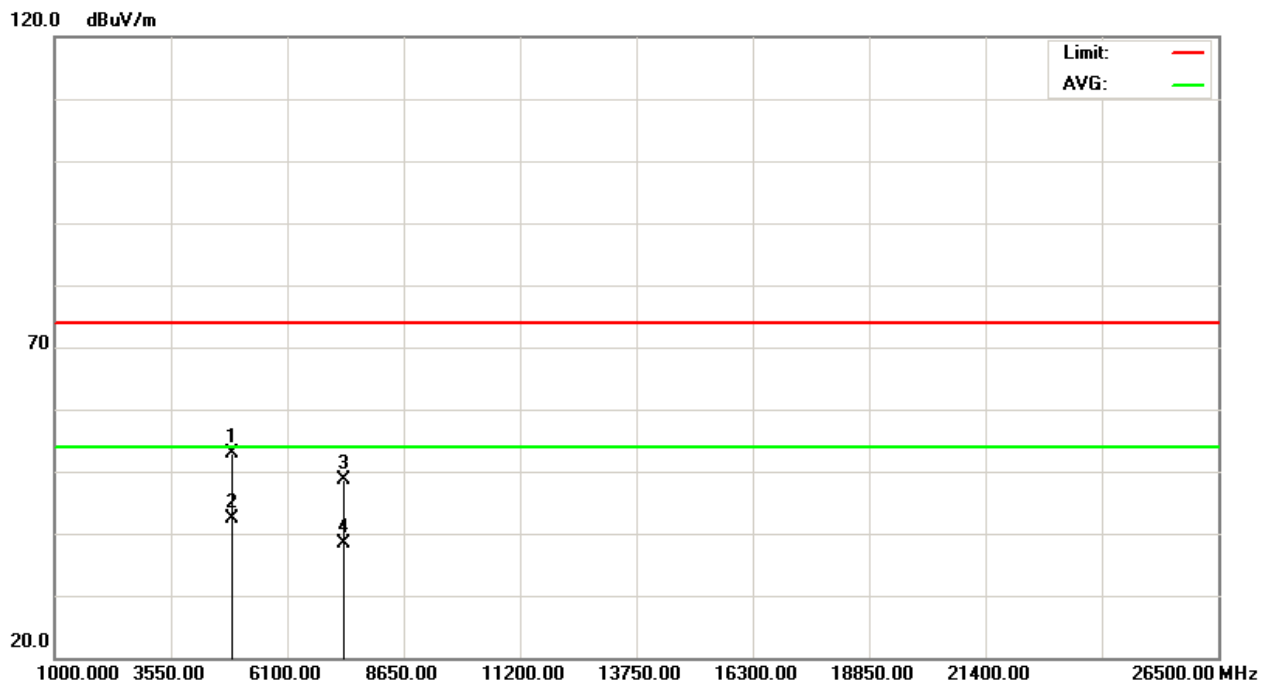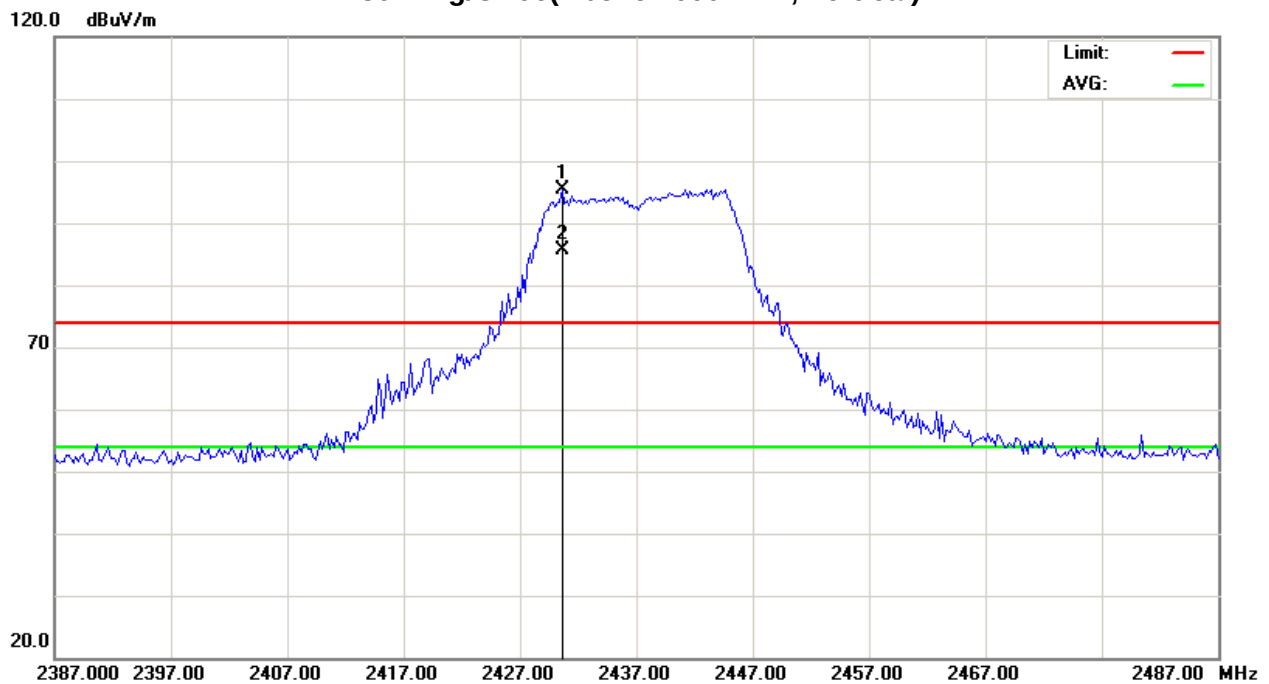



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2438.200	H	67.36	57.41	31.33	98.69	88.74				
H	4874.400	H	49.08	37.52	3.34	52.42	40.86	74.00	54.00	- 13.14	AV
H	7310.900	H	41.93	30.30	8.26	50.19	38.56	74.00	54.00	- 15.44	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH06(Above 1000 MHz, Horizontal)

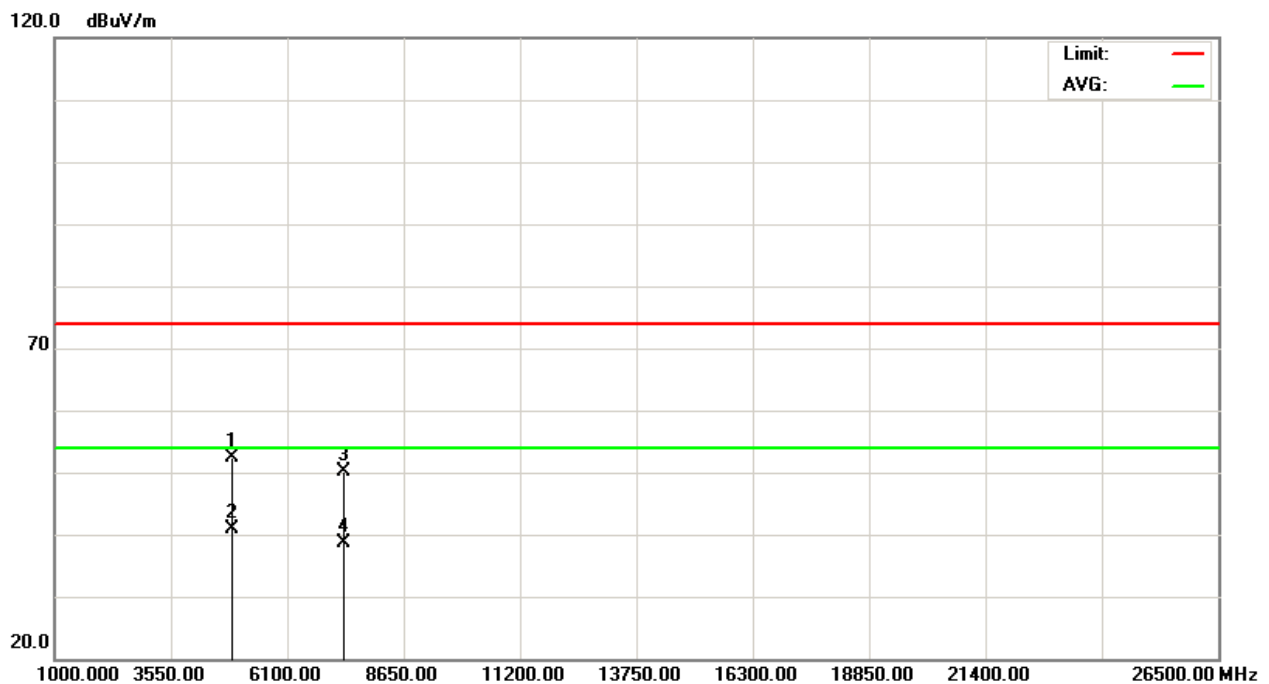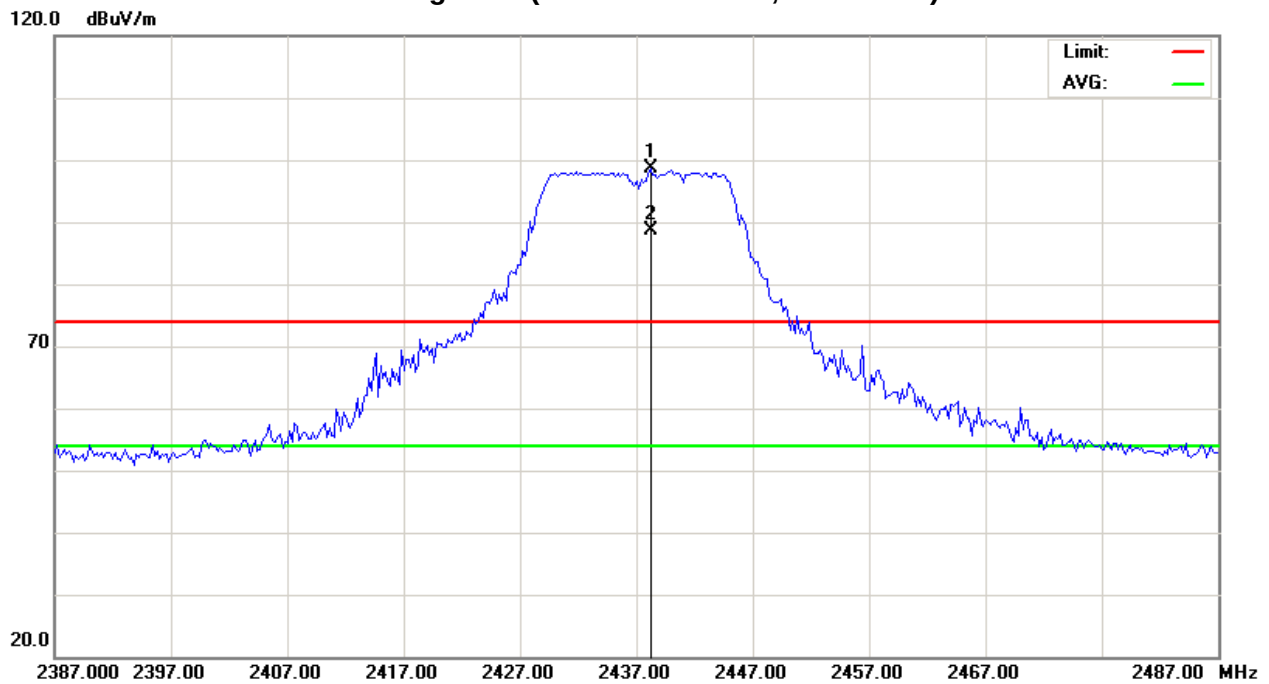



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2459.000	V	66.75	56.71	31.40	98.15	88.11				
H	2483.500	V	35.35	14.71	31.49	66.84	46.20	74.00	54.00	- 7.16	Peak
H	4924.200	V	58.15	45.54	3.50	61.65	49.04	74.00	54.00	- 4.96	AV
H	7387.800	V	41.91	31.52	8.37	50.28	39.89	74.00	54.00	- 14.11	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11(Above 1000 MHz, Vertical)

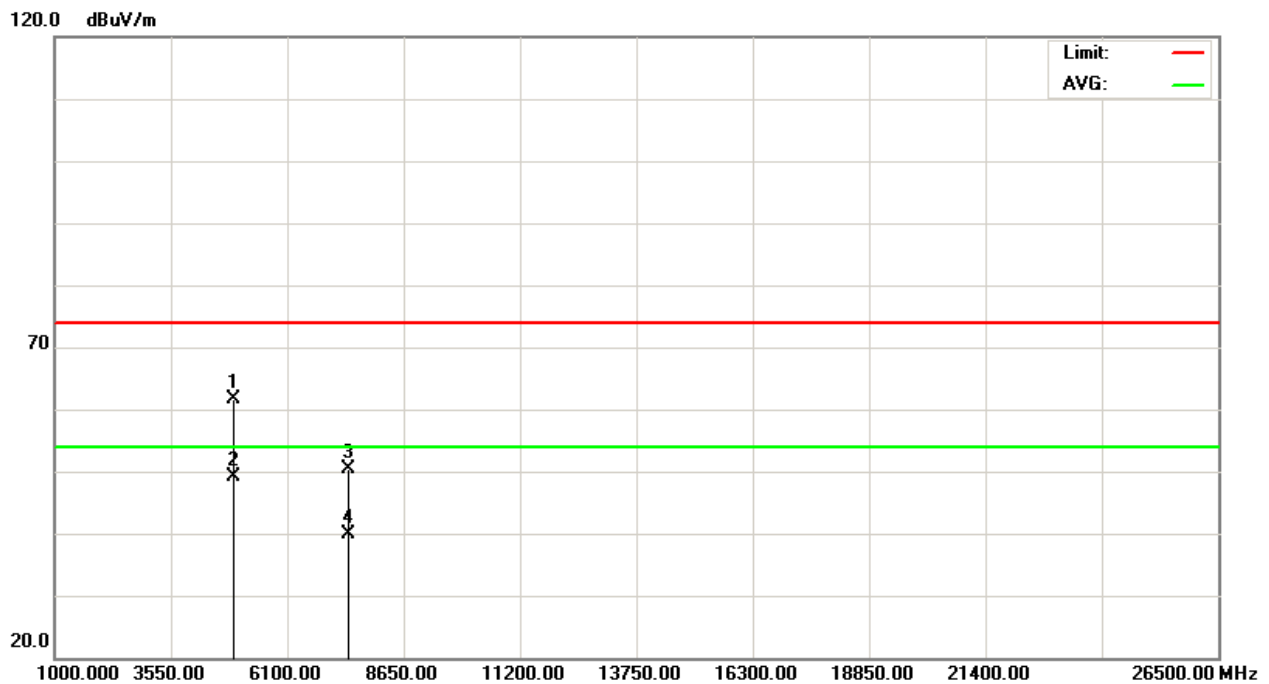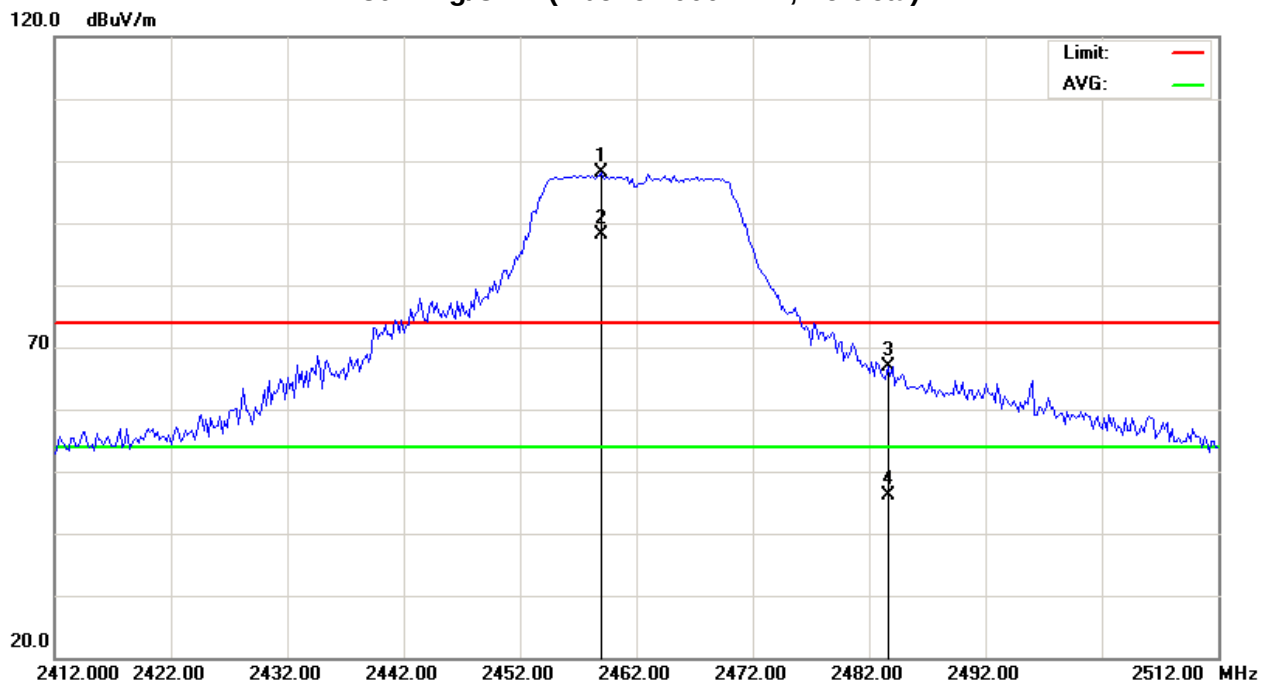



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2464.200	H	70.70	60.33	31.42	102.12	91.75				
H	2484.100	H	38.56	18.33	31.49	70.05	49.82	74.00	54.00	- 3.95	Peak
H	4924.000	H	53.08	42.25	3.49	56.57	45.74	74.00	54.00	- 8.26	AV
H	7387.000	H	40.80	30.61	8.37	49.17	38.98	74.00	54.00	- 15.02	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11g/CH11(Above 1000 MHz, Horizontal)

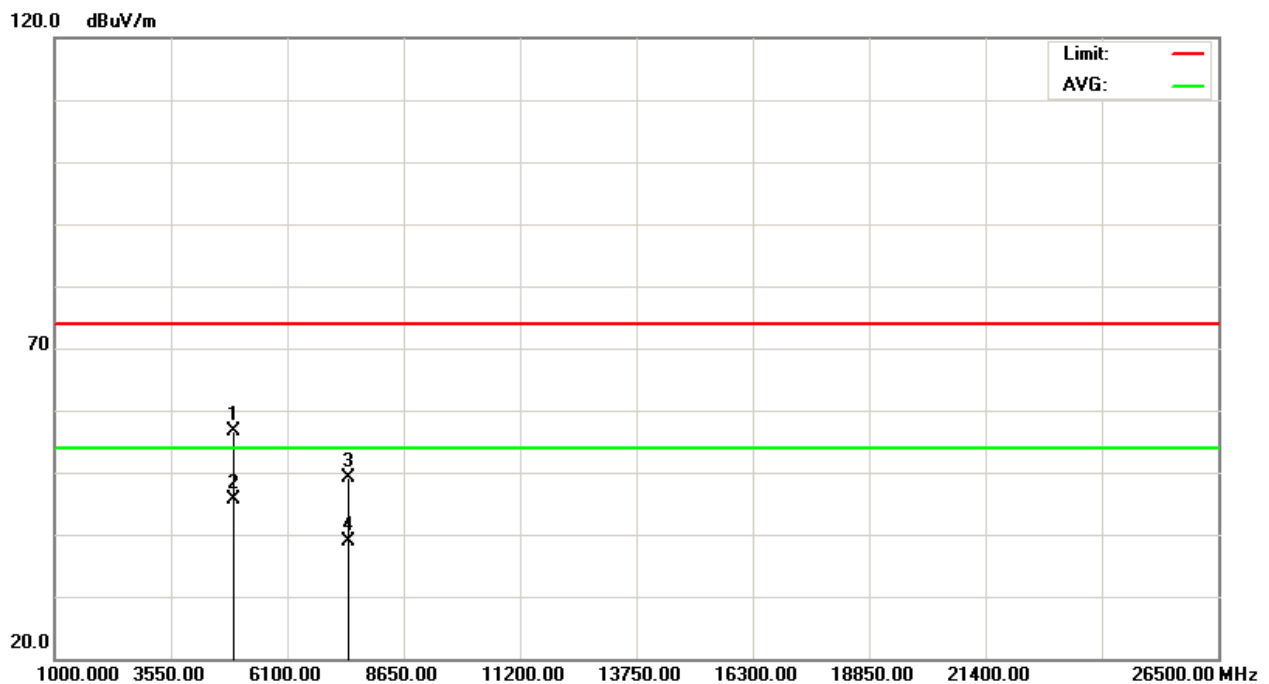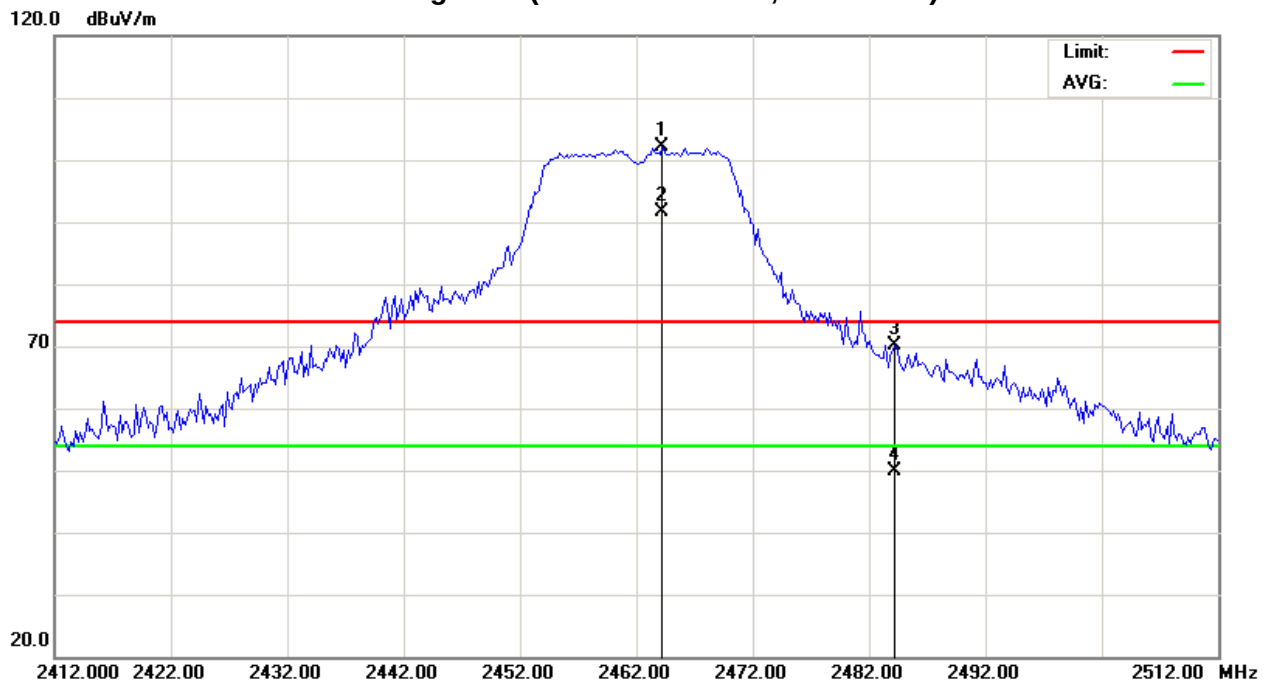



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH01 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2390.000	V	27.95	14.11	31.15	59.10	45.26	74.00	54.00	- 8.74	AV
F	2419.400	V	61.40	51.17	31.26	92.66	82.43				
H	4824.132	V	45.23	30.11	3.18	48.41	33.29	74.00	54.00	- 20.71	AV
H	7236.520	V	45.03	30.91	8.14	53.17	39.05	74.00	54.00	- 14.95	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH01(Above 1000 MHz, Vertical)

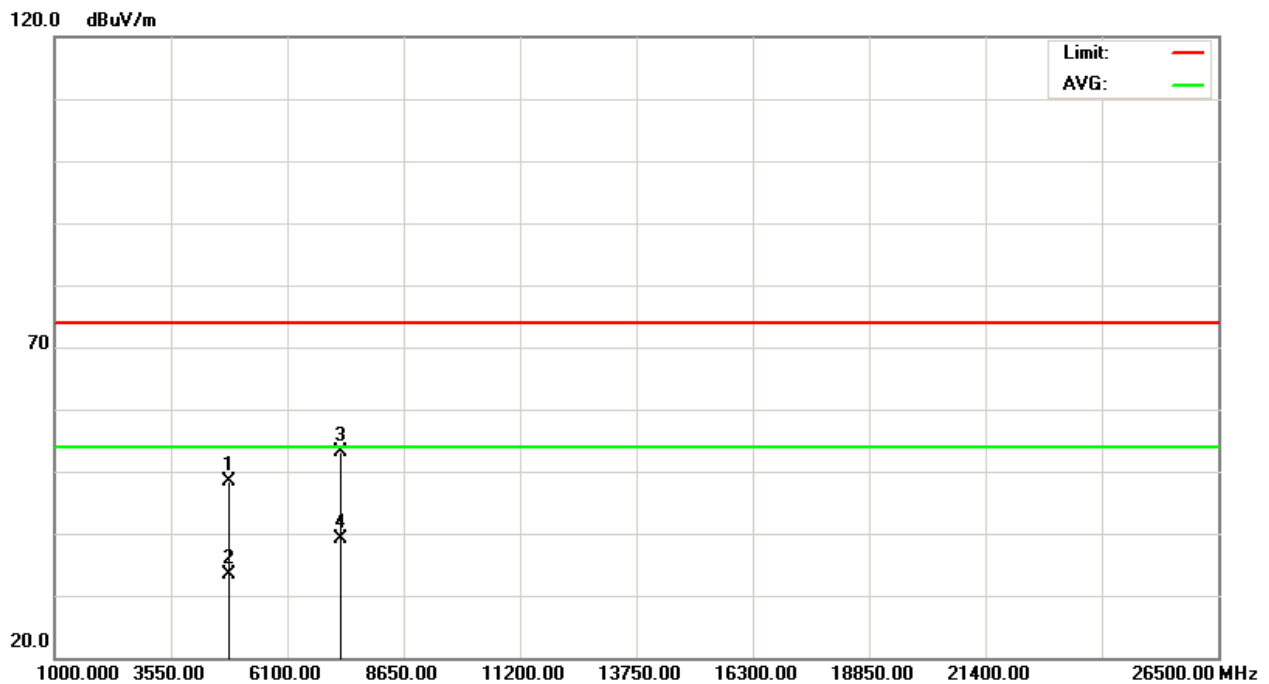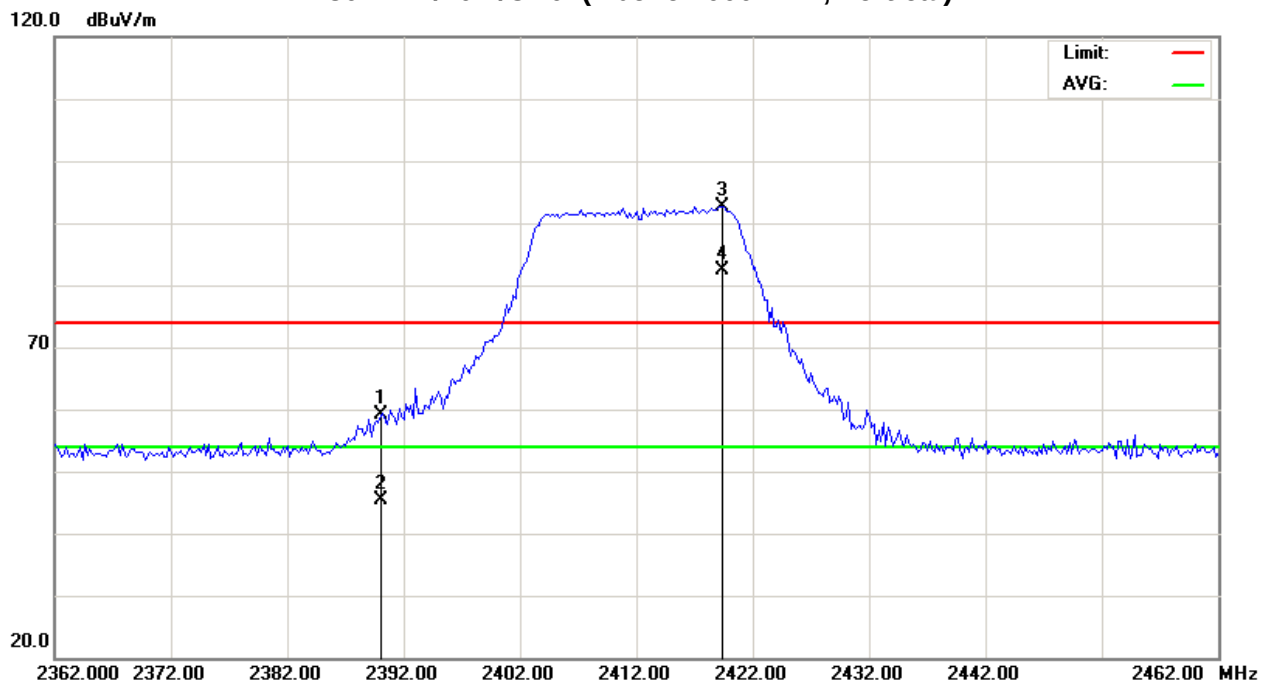



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH01 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
H	2389.800	H	31.56	14.90	31.15	62.71	46.05	74.00	54.00	- 7.95	AV
F	2409.800	H	64.21	53.29	31.22	95.43	84.51				
H	4823.504	H	45.47	31.01	3.18	48.65	34.19	74.00	54.00	- 19.81	AV
H	7236.364	H	44.86	30.82	8.14	53.00	38.96	74.00	54.00	- 15.04	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH01(Above 1000 MHz, Horizontal)

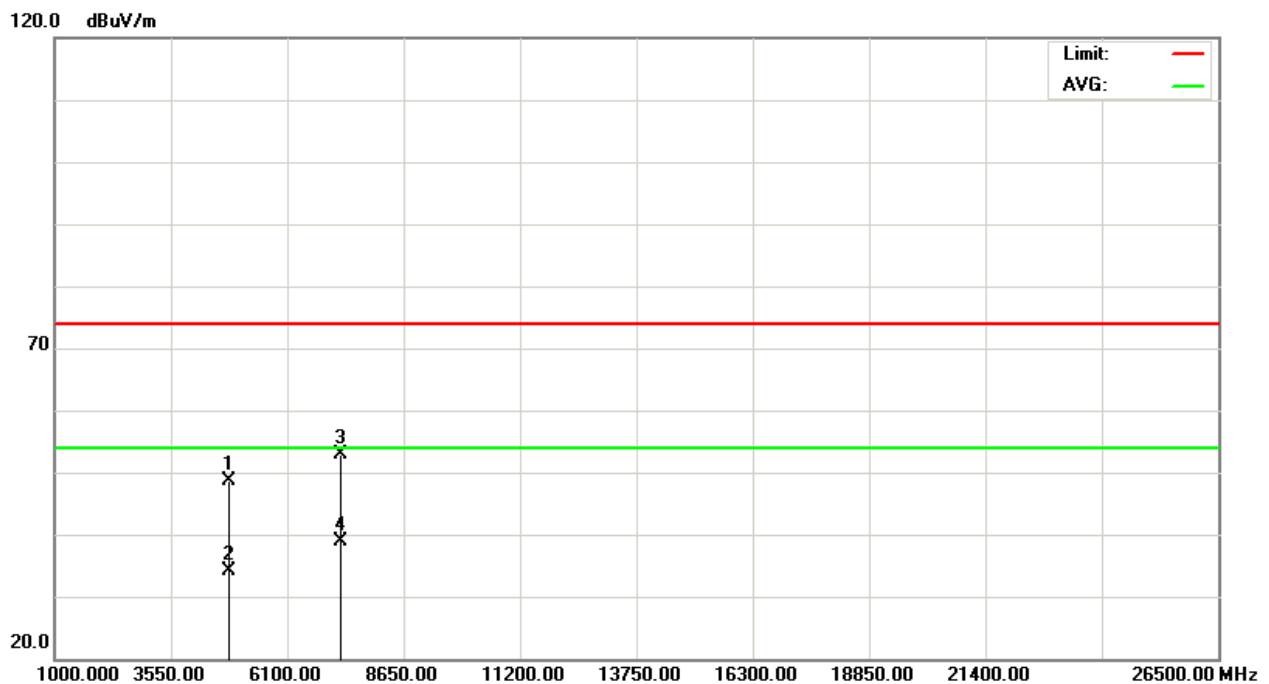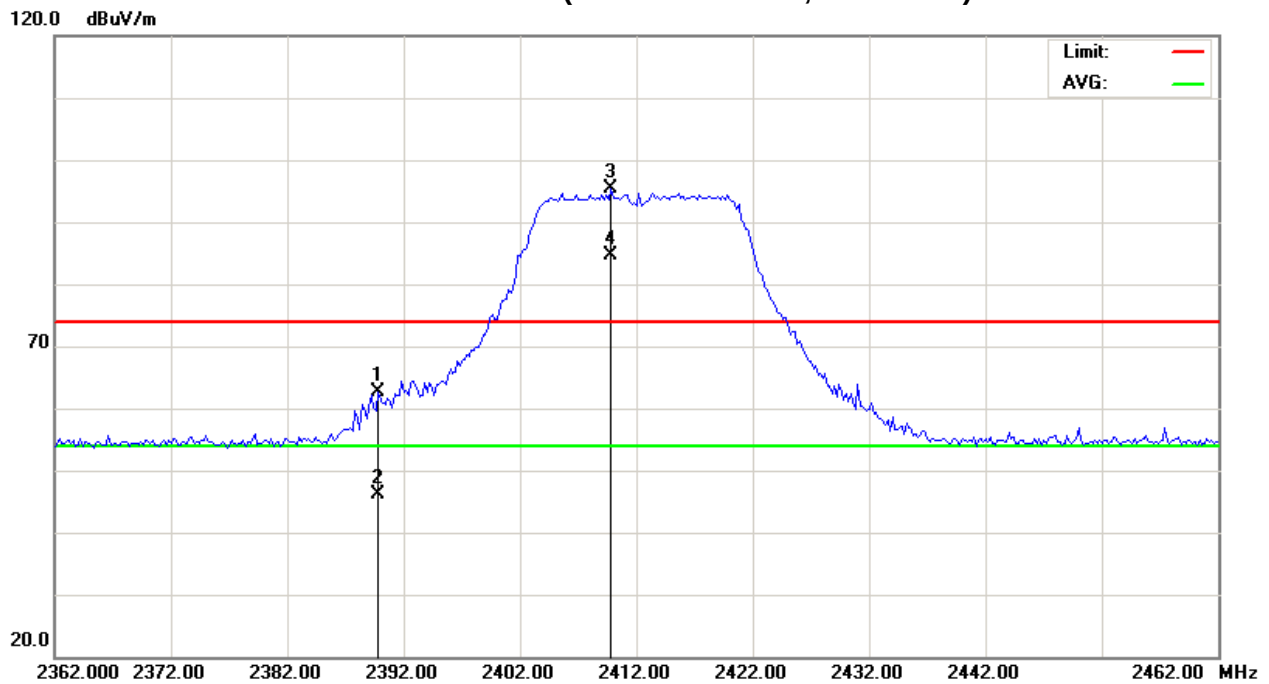



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2442.400	V	63.75	52.92	31.34	95.09	84.26				
H	4878.300	V	52.35	36.22	3.35	55.70	39.57	74.00	54.00	- 14.43	AV
H	7311.700	V	44.04	30.31	8.26	52.30	38.57	74.00	54.00	- 15.43	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH06(Above 1000 MHz, Vertical)

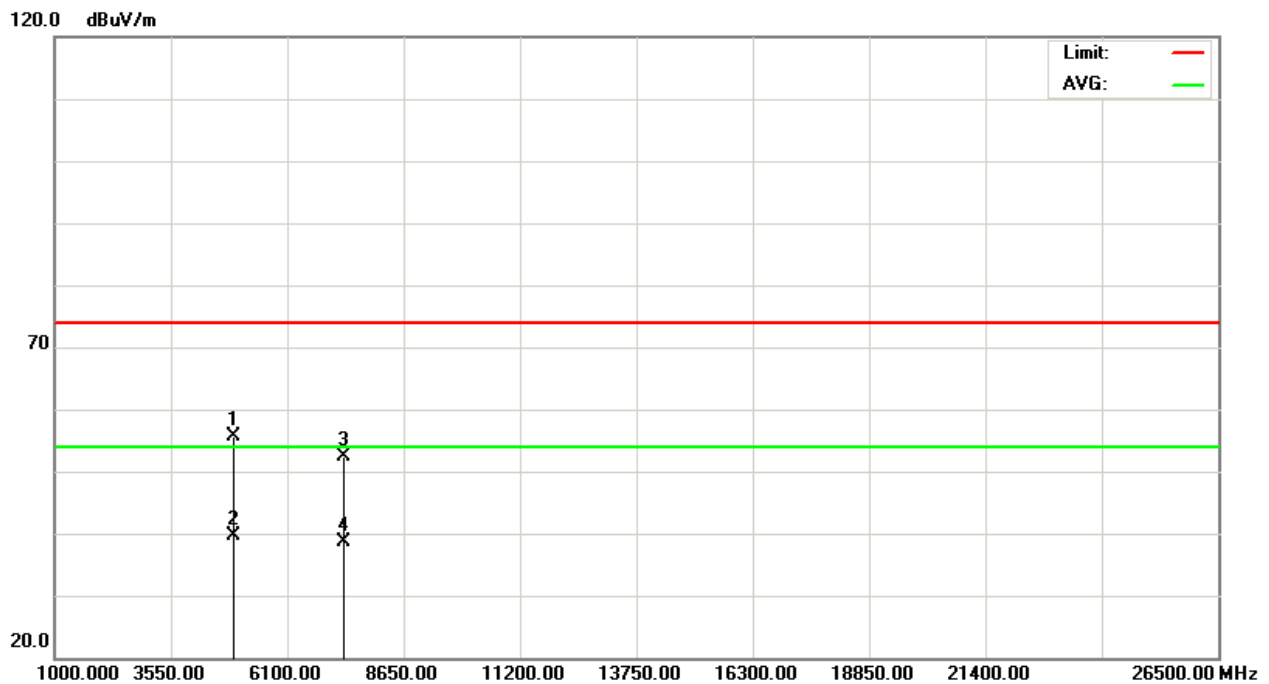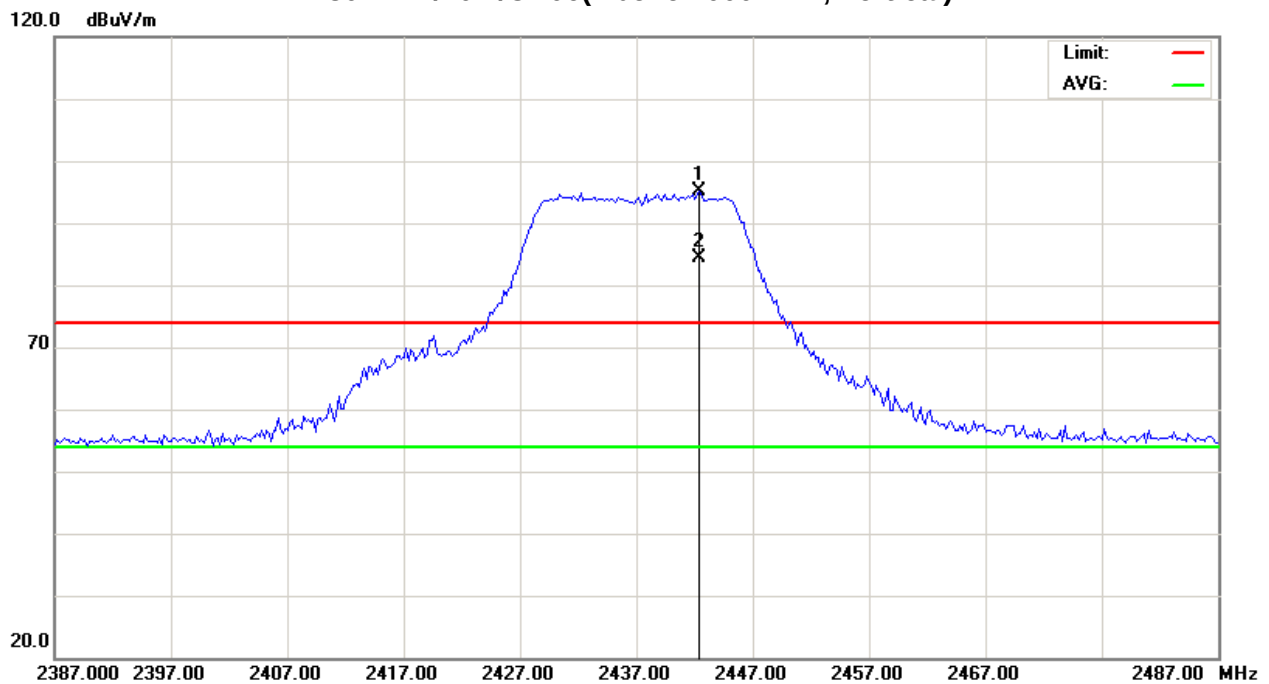



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH06 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2443.800	H	65.21	54.53	31.35	96.56	85.88				
H	4876.200	H	50.99	36.27	3.35	54.34	39.62	74.00	54.00	- 14.38	AV
H	7311.900	H	44.19	30.24	8.26	52.45	38.50	74.00	54.00	- 15.50	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH06(Above 1000 MHz, Horizontal)

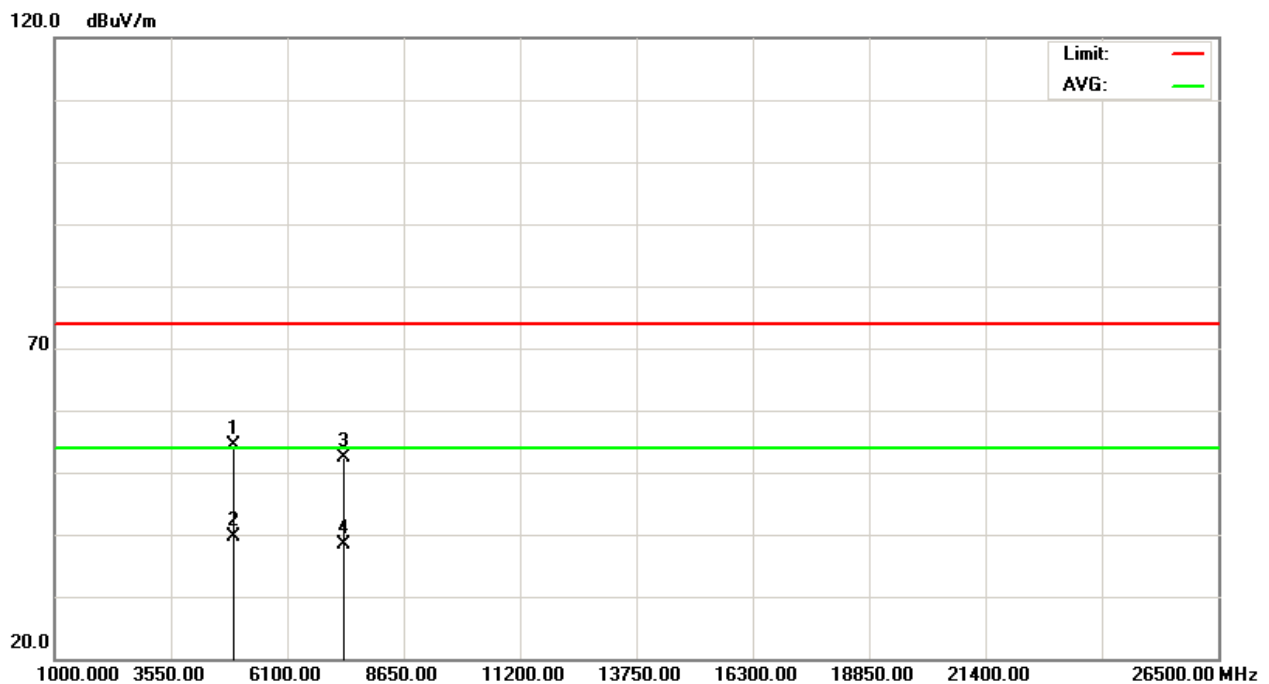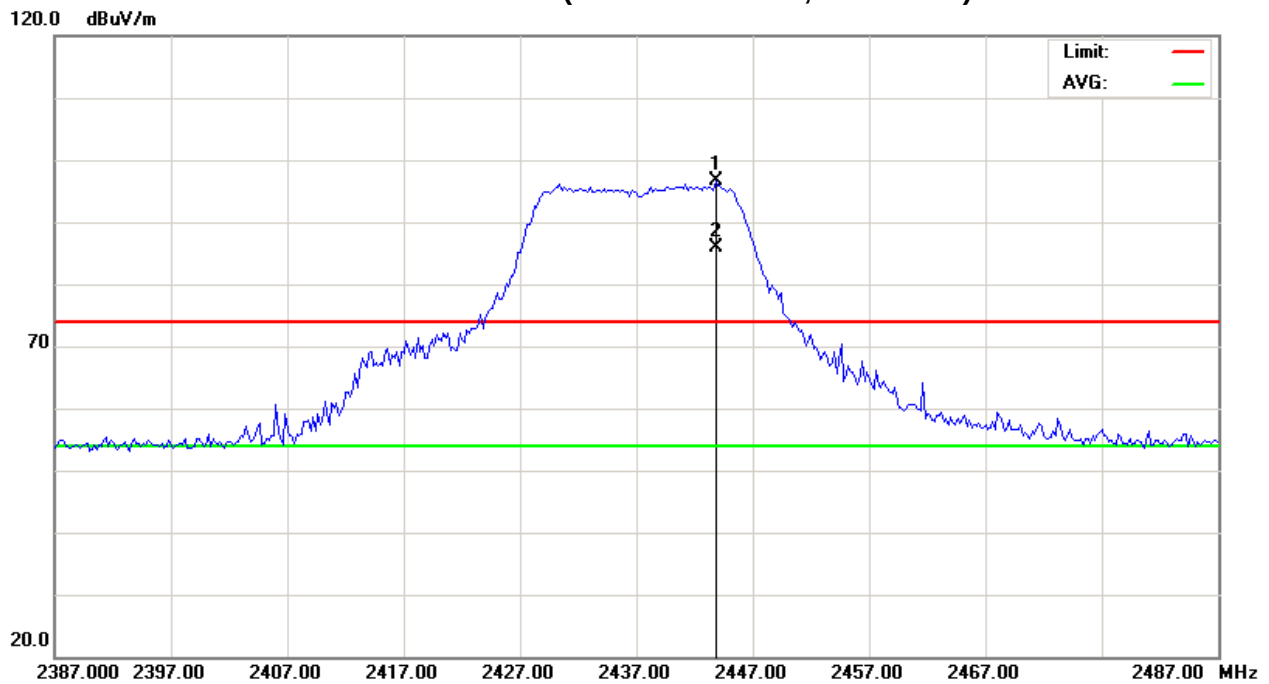



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2460.800	V	64.56	54.19	31.41	95.97	85.60				
H	2484.200	V	33.73	13.19	31.49	65.22	44.68	74.00	54.00	- 8.78	Peak
H	4929.200	V	56.34	40.83	3.51	59.85	44.34	74.00	54.00	- 9.66	AV
H	7385.400	V	44.11	30.90	8.37	52.48	39.27	74.00	54.00	- 14.73	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH11(Above 1000 MHz, Vertical)

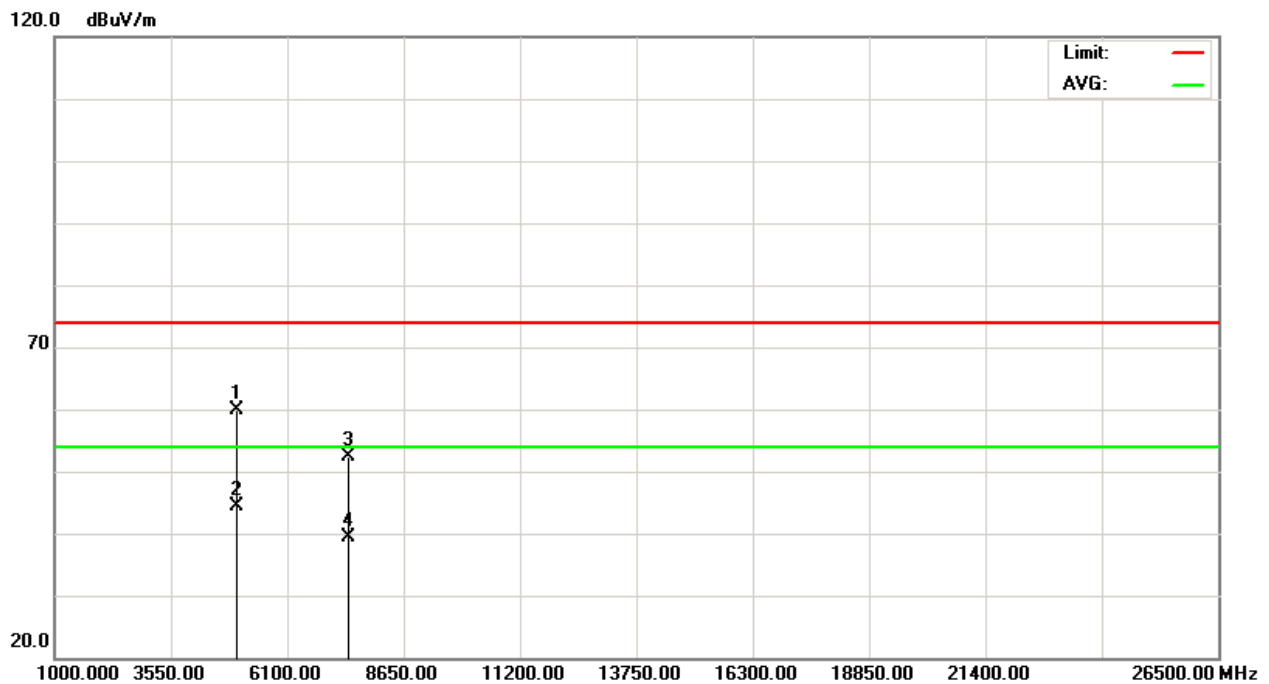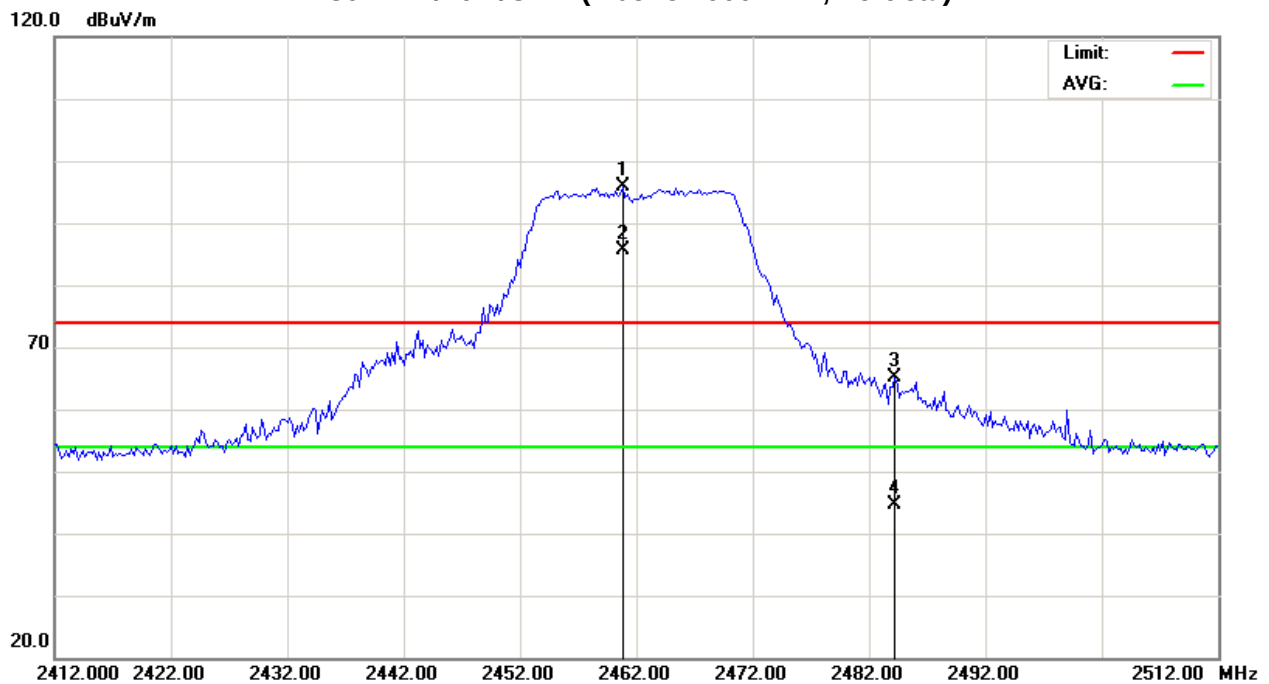



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M/CH11 (WDAN-1PA92101-1F)		



Type F/H/E	Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
			Peak	AV		Peak	AV	Peak	AV		
F	2469.000	H	67.28	56.12	31.44	98.72	87.56				
H	2483.500	H	35.22	15.12	31.49	66.71	46.61	74.00	54.00	- 7.29	Peak
H	4924.400	H	54.08	39.25	3.50	57.58	42.75	74.00	54.00	- 11.25	AV
H	7385.000	H	44.83	30.52	8.37	53.20	38.89	74.00	54.00	- 15.11	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
802.11n/20M/CH11(Above 1000 MHz, Horizontal)

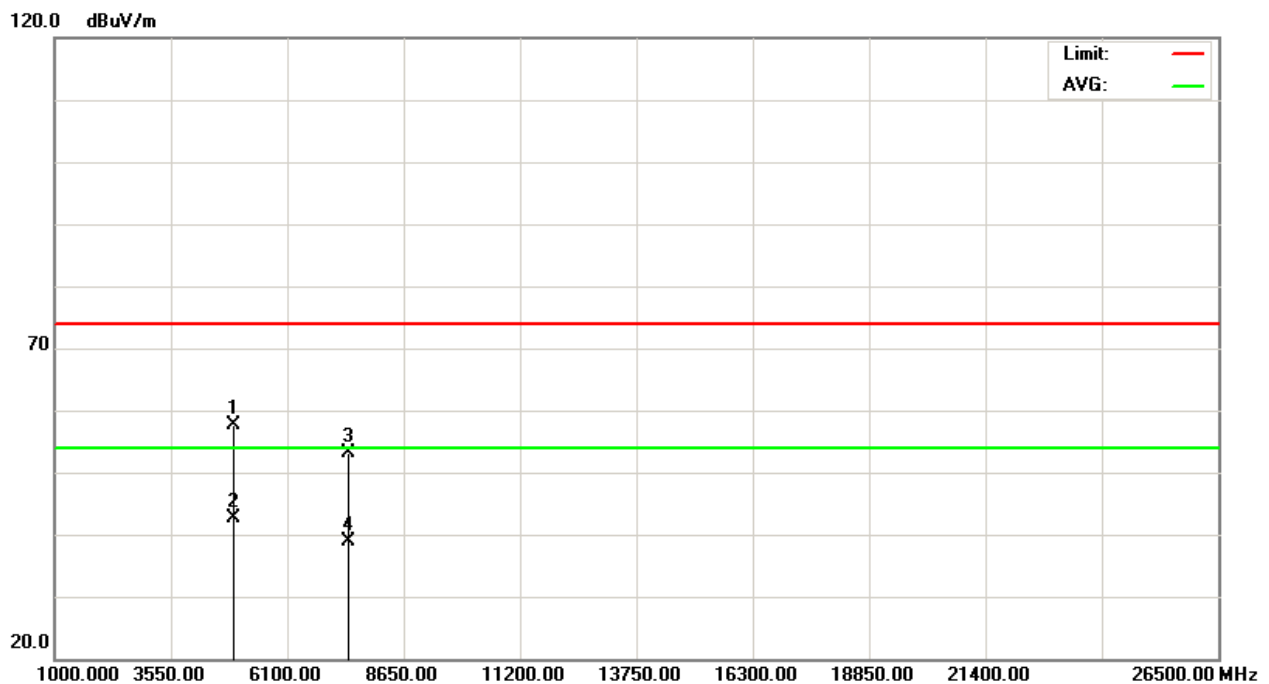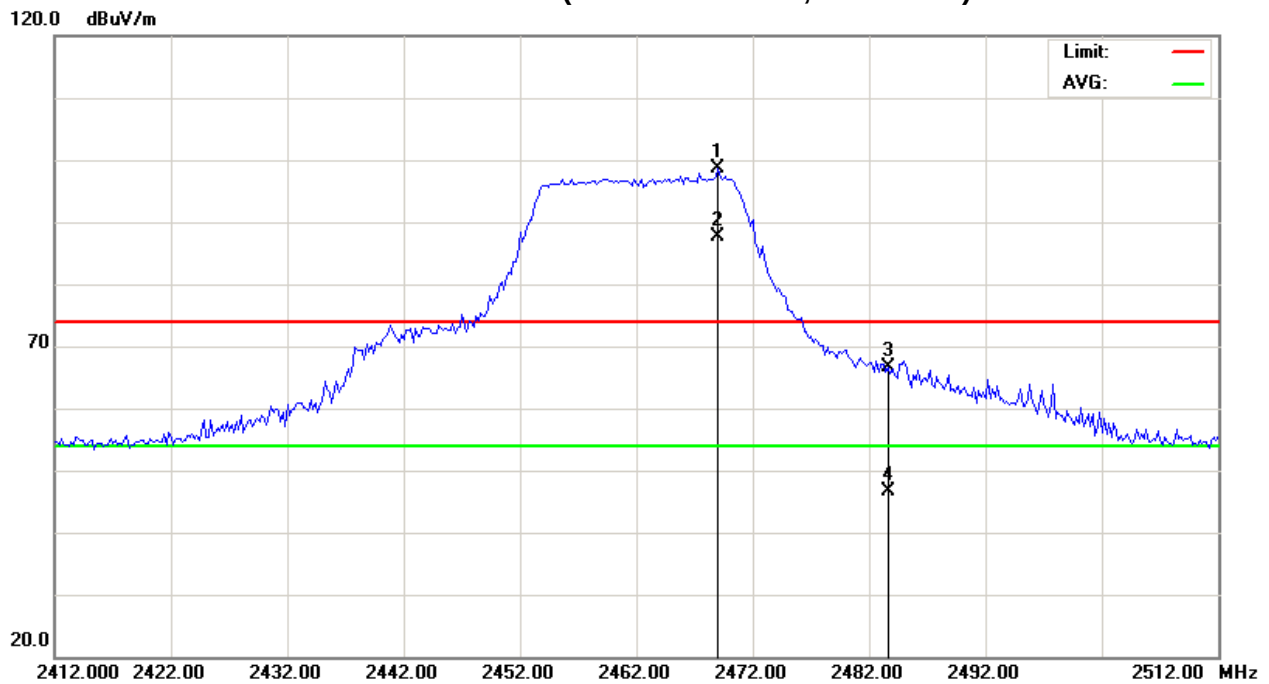



4.2.9 TEST RESULTS-RESTRICTED BANDS REQUIREMENTS

EUT :	RF Module	Model Name :	J20H049
Temperature :	25° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b (APM6P-700096) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2389.600	V	25.85	16.33	31.15	57.00	47.48	74.00	54.00	- 6.52	AV
2483.500	V	23.64	11.26	31.49	55.13	42.75	74.00	54.00	- 11.25	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11b (Restricted Bands Requirements, Vertical)

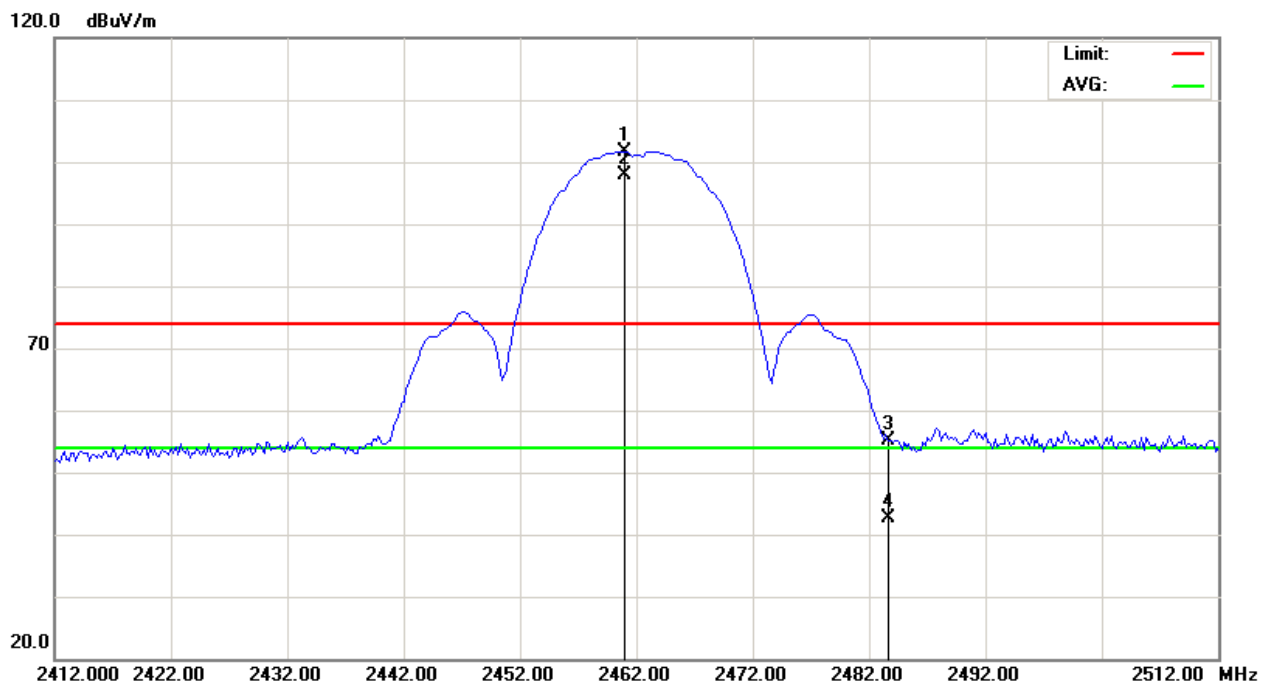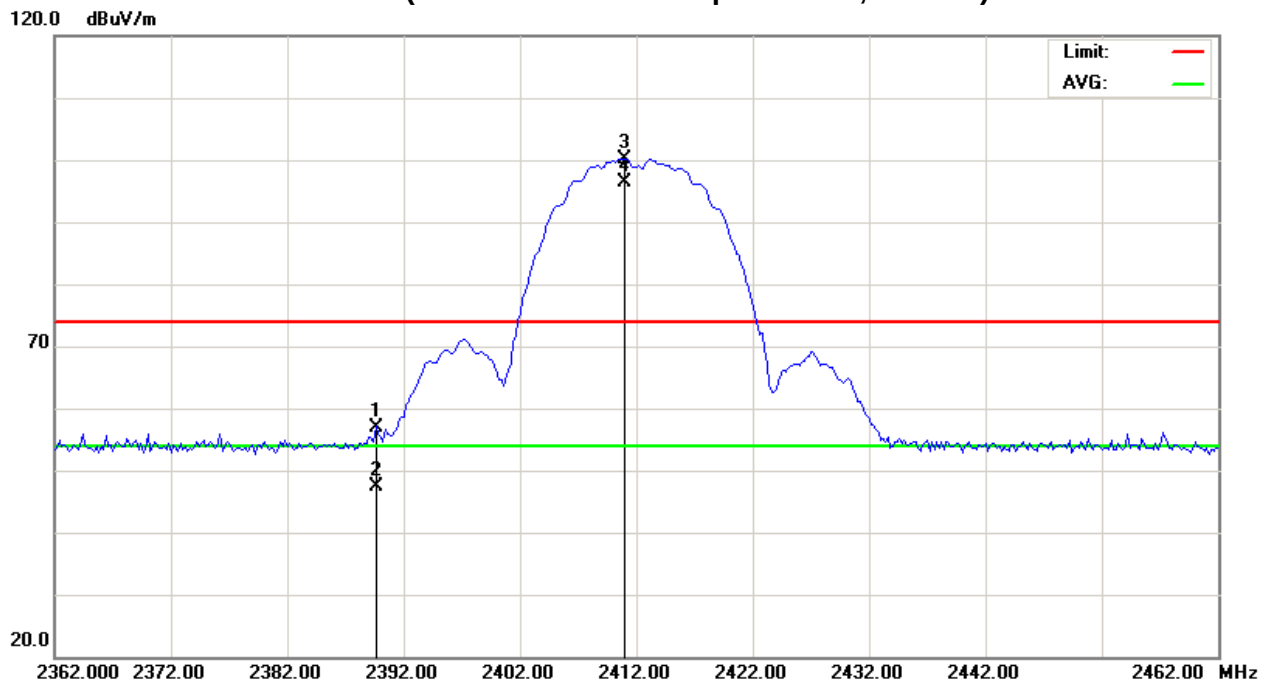



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b (APM6P-700096) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	H	25.13	16.57	31.15	56.28	47.72	74.00	54.00	- 6.28	AV
2483.500	H	23.45	12.67	31.49	54.94	44.16	74.00	54.00	- 9.84	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11b (Restricted Bands Requirements, Horizontal)

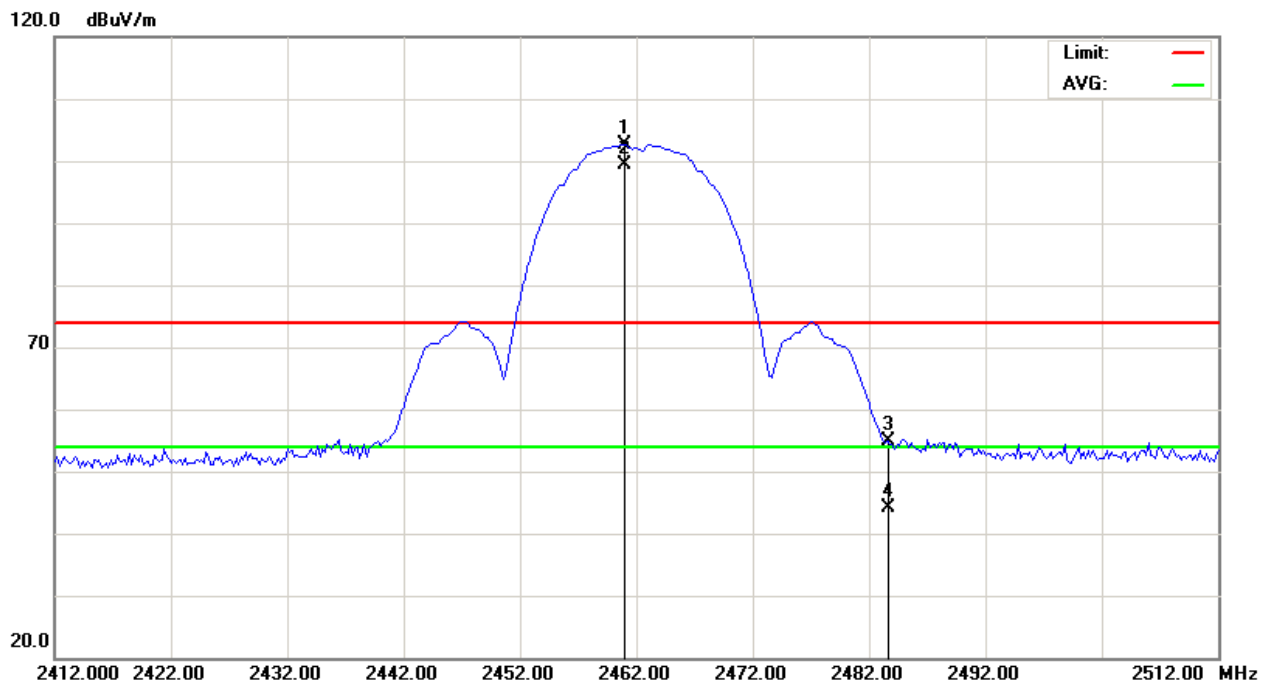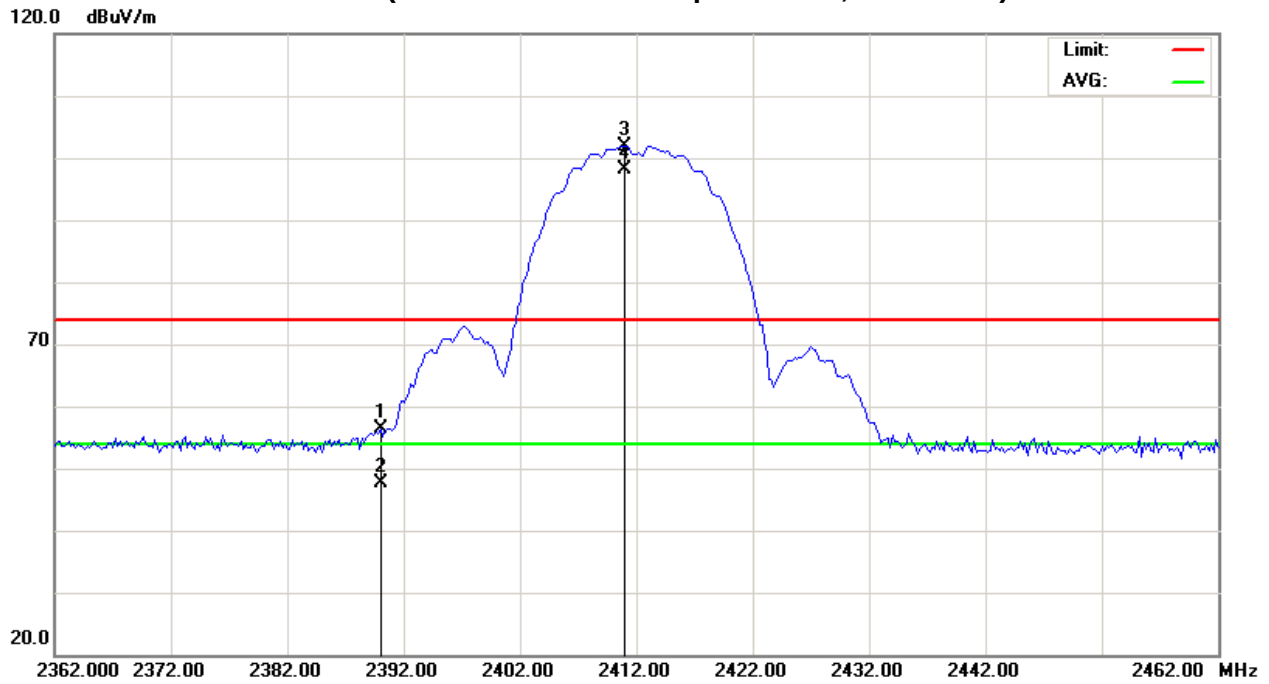



EUT :	RF Module	Model Name :	J20H049
Temperature :	25° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g (APM6P-700096) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2389.200	V	33.07	18.34	31.15	64.22	49.49	74.00	54.00	- 4.51	AV
2483.500	V	36.02	17.47	31.49	67.51	48.96	74.00	54.00	- 5.04	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11g (Restricted Bands Requirements, Vertical)

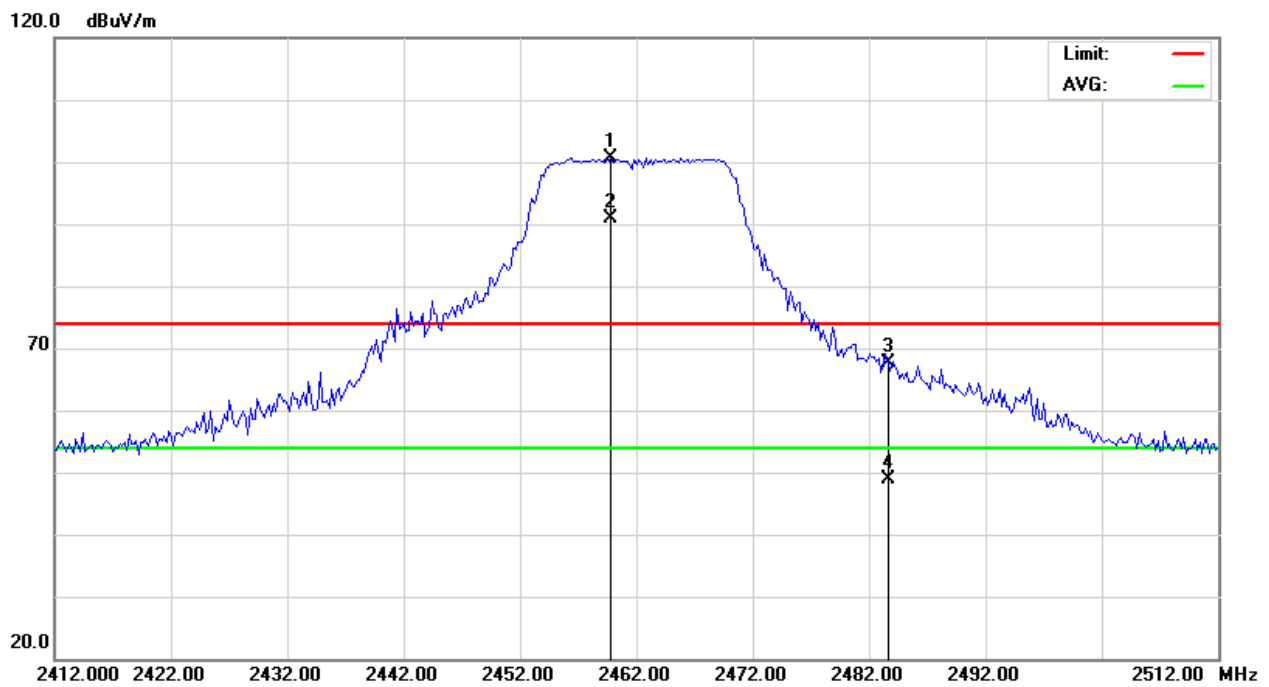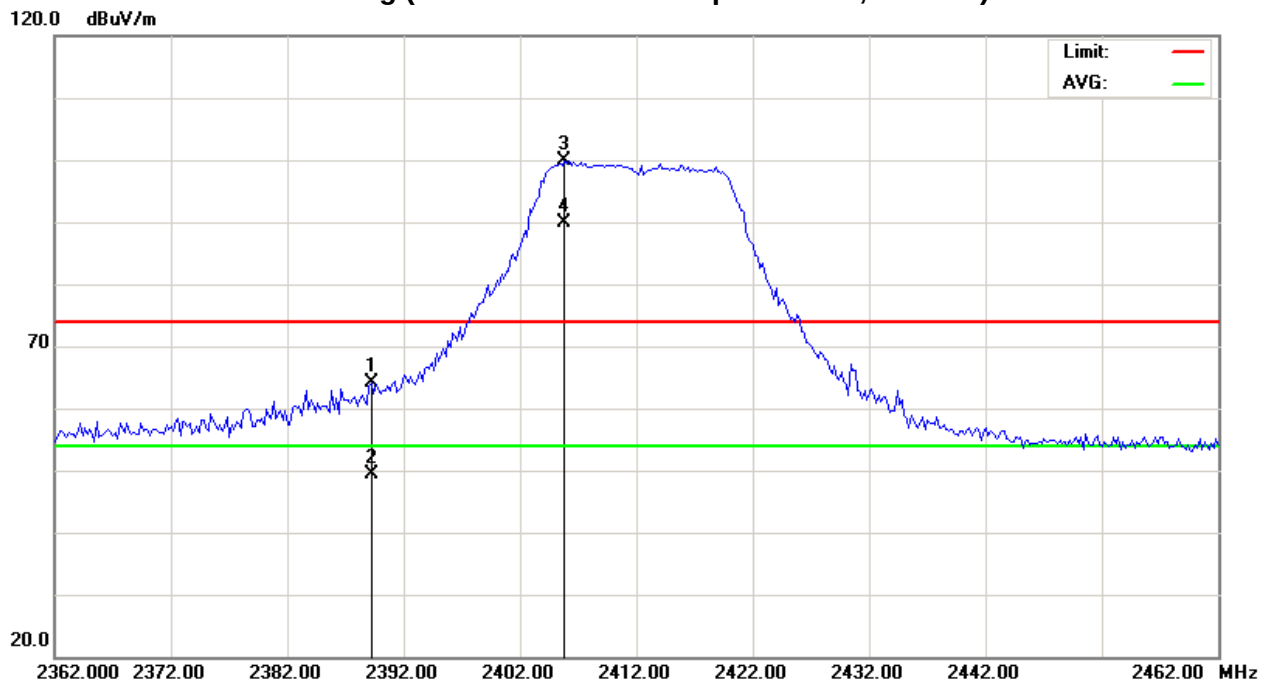



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g (APM6P-700096) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2389.200	H	36.53	20.73	31.15	67.68	51.88	74.00	54.00	- 2.12	AV
2484.700	H	41.13	21.51	31.49	72.62	53.00	74.00	54.00	- 1.00	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Horizontal)

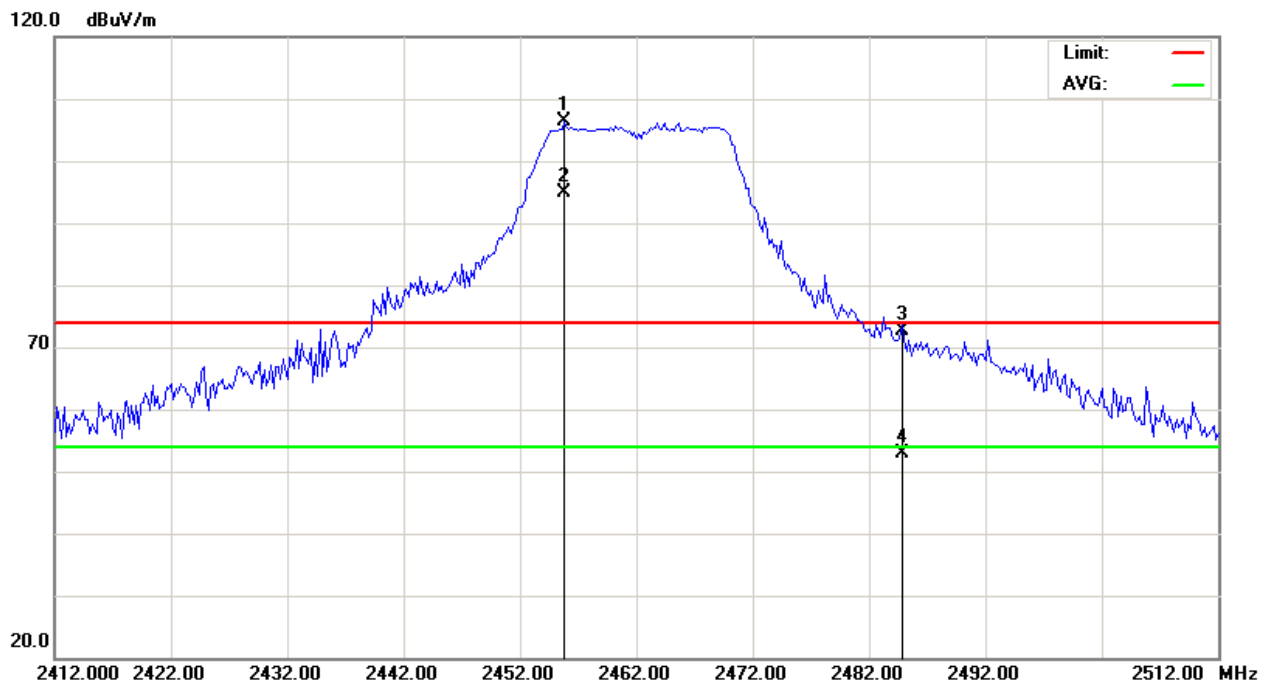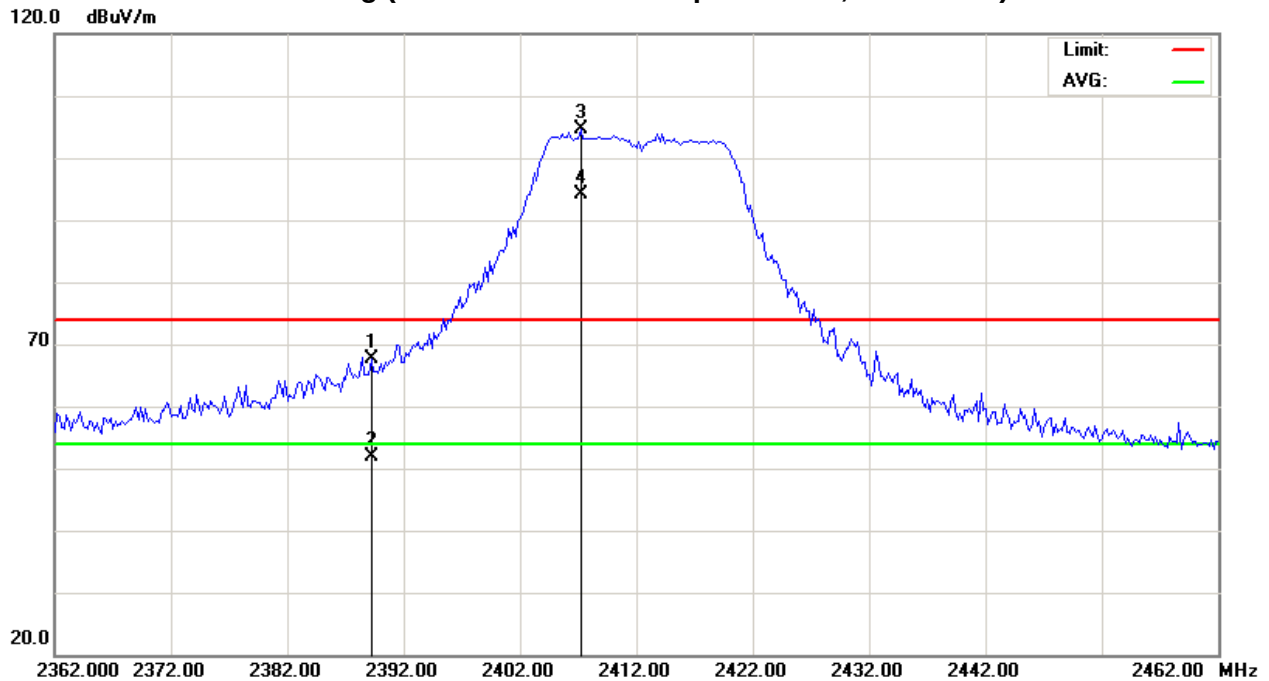



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M (APM6P-700096) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	V	33.66	16.86	31.15	64.81	48.01	74.00	54.00	- 5.99	AV
2484.700	V	38.30	17.81	31.49	69.79	49.30	74.00	54.00	- 4.21	Peak

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Vertical)

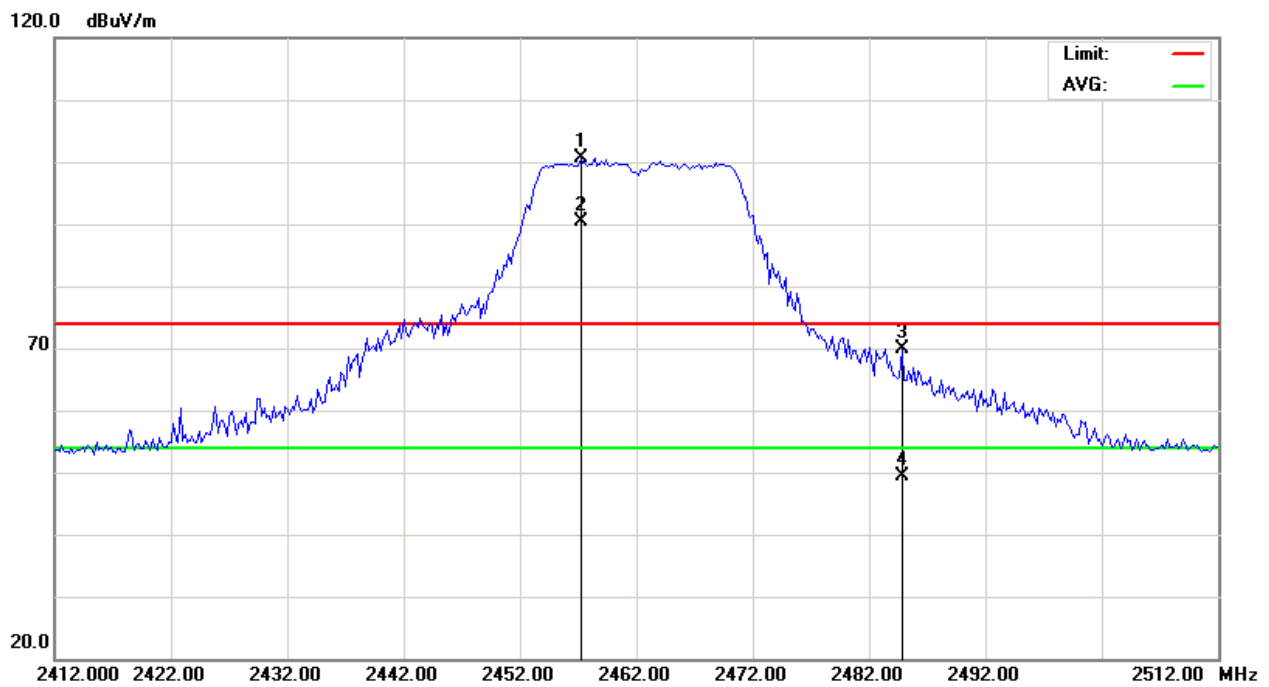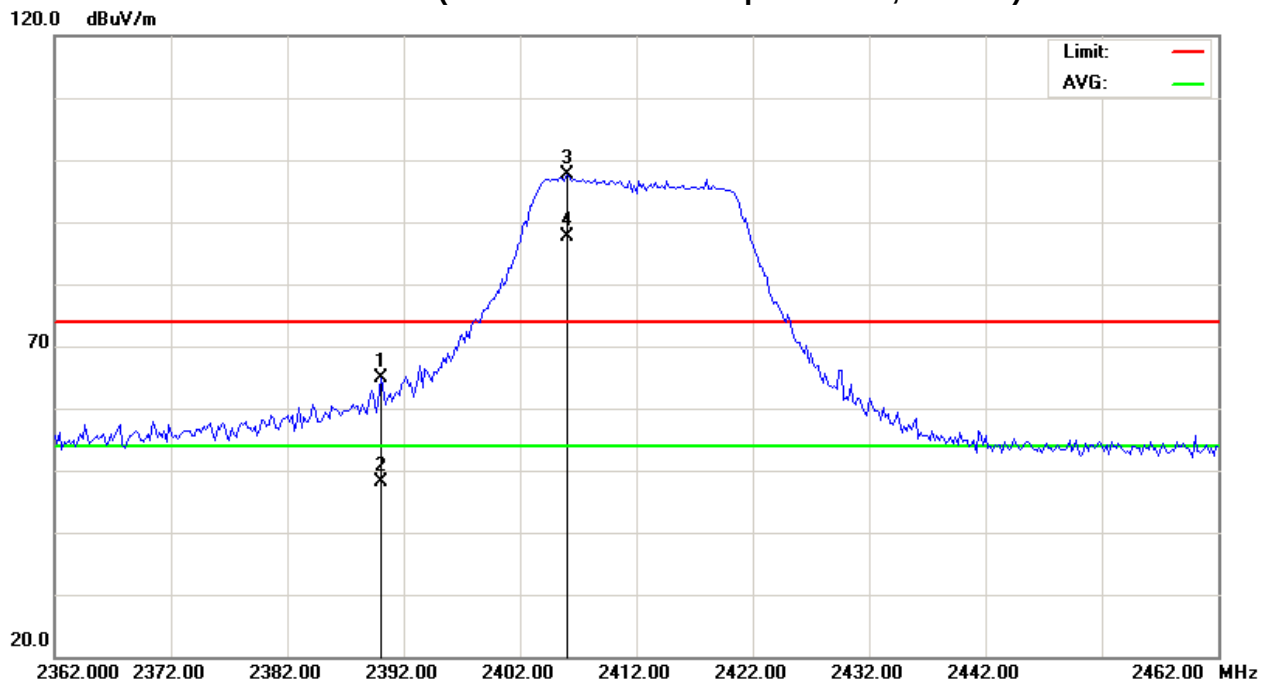



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M (APM6P-700096) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	H	36.53	21.01	31.15	67.68	52.16	74.00	54.00	- 1.84	AV
2483.700	H	41.71	21.91	31.49	73.20	53.40	74.00	54.00	- 0.60	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Horizontal)

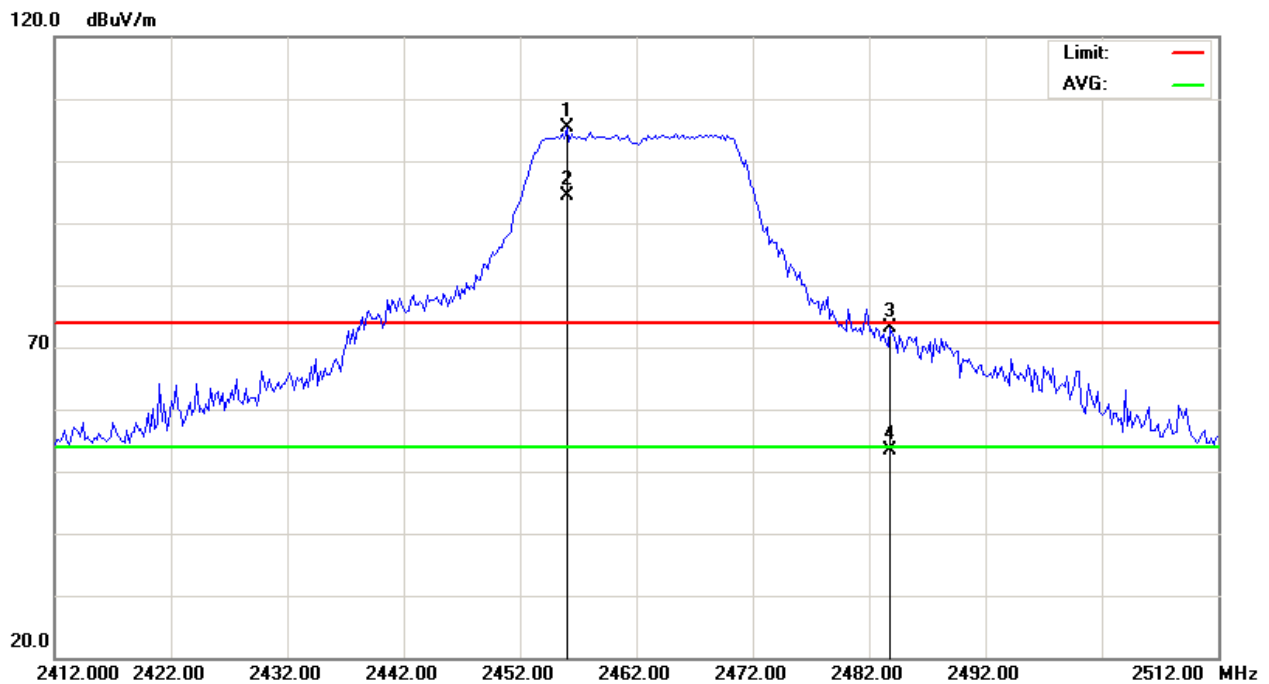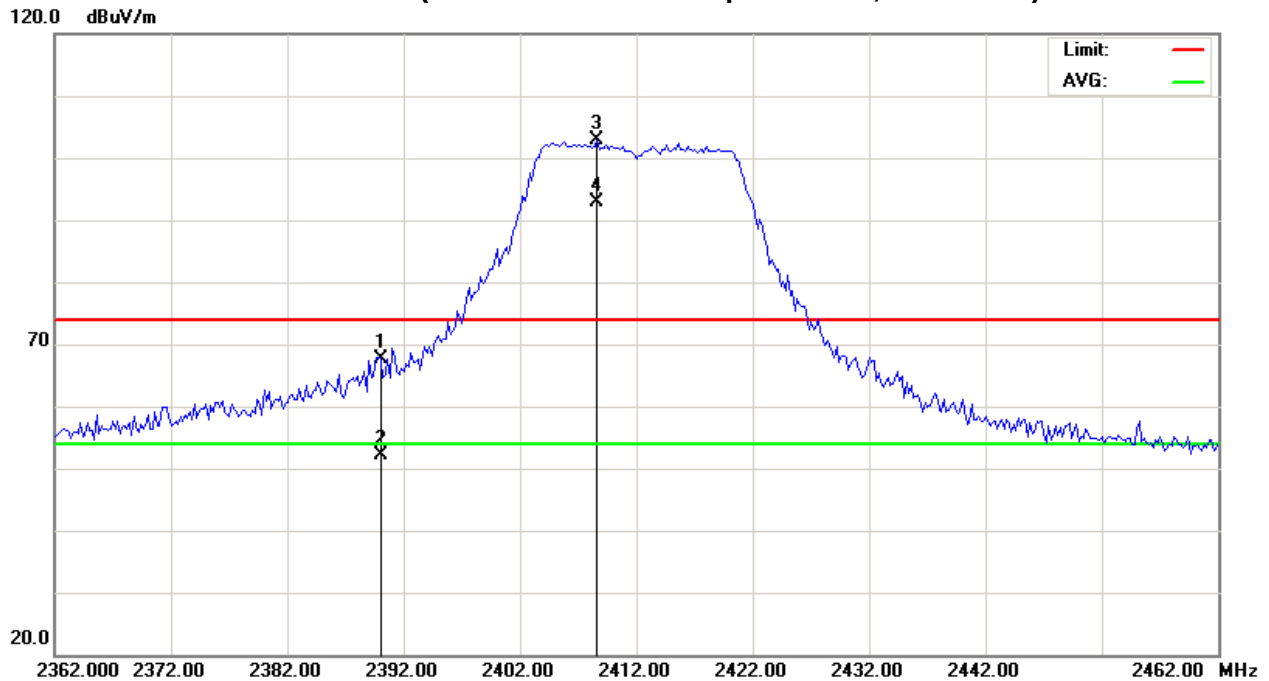



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b (WDAN-1PA92101-1F) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2386.200	V	23.28	12.69	31.14	54.42	43.83	74.00	54.00	- 10.17	AV
2483.500	V	22.63	9.76	31.49	54.12	41.25	74.00	54.00	- 12.75	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Vertical)

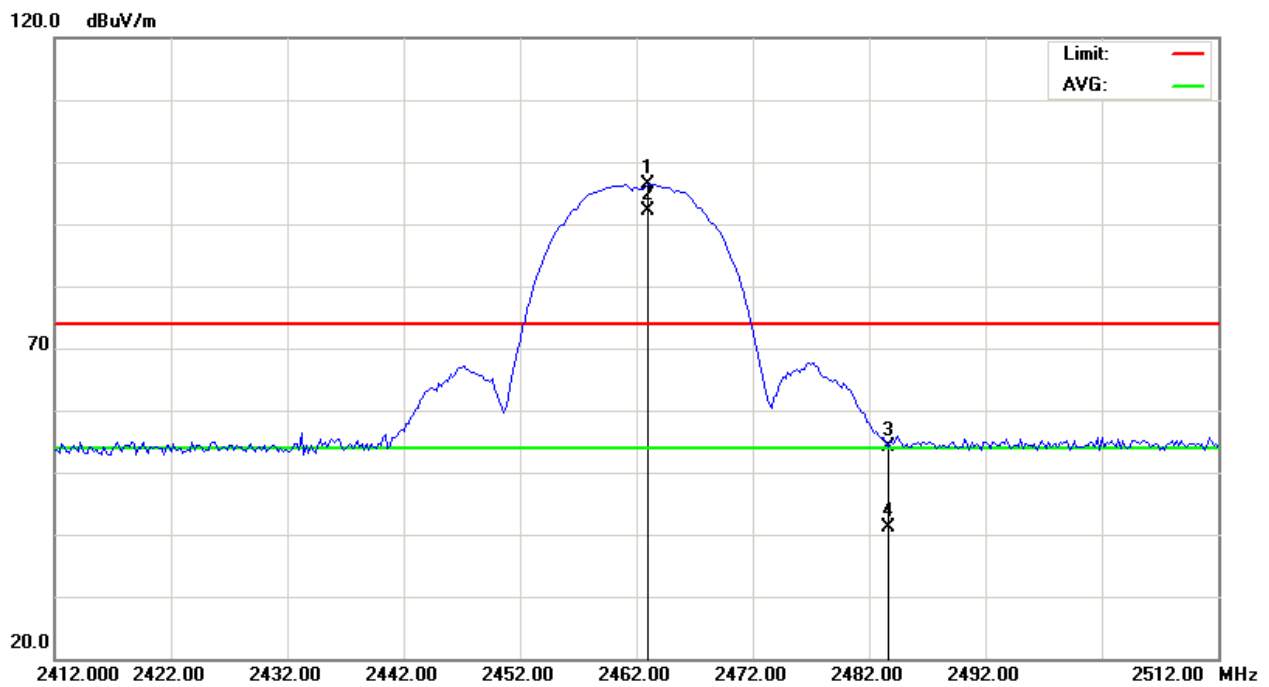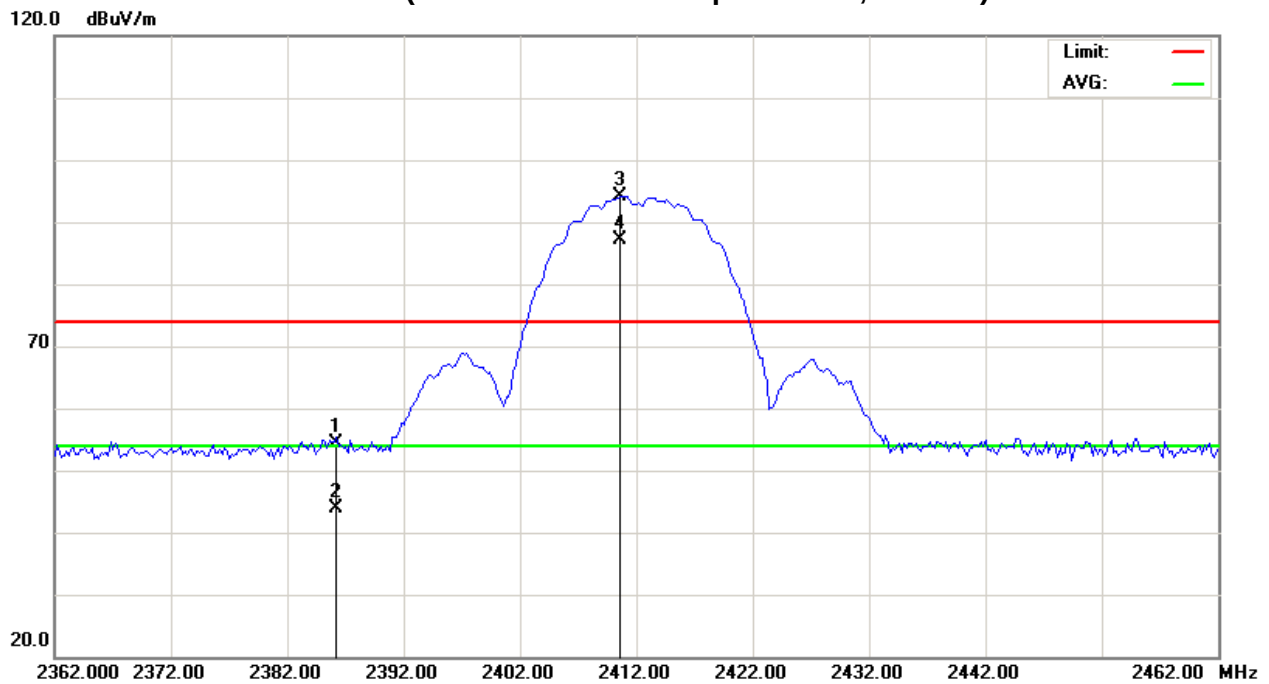



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11b (WDAN-1PA92101-1F) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2386.400	H	24.28	13.77	31.14	55.42	44.91	74.00	54.00	- 9.09	AV
2483.500	H	23.07	12.72	31.49	54.56	44.21	74.00	54.00	- 9.79	AV

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11b (Restricted Bands Requirements, Horizontal)

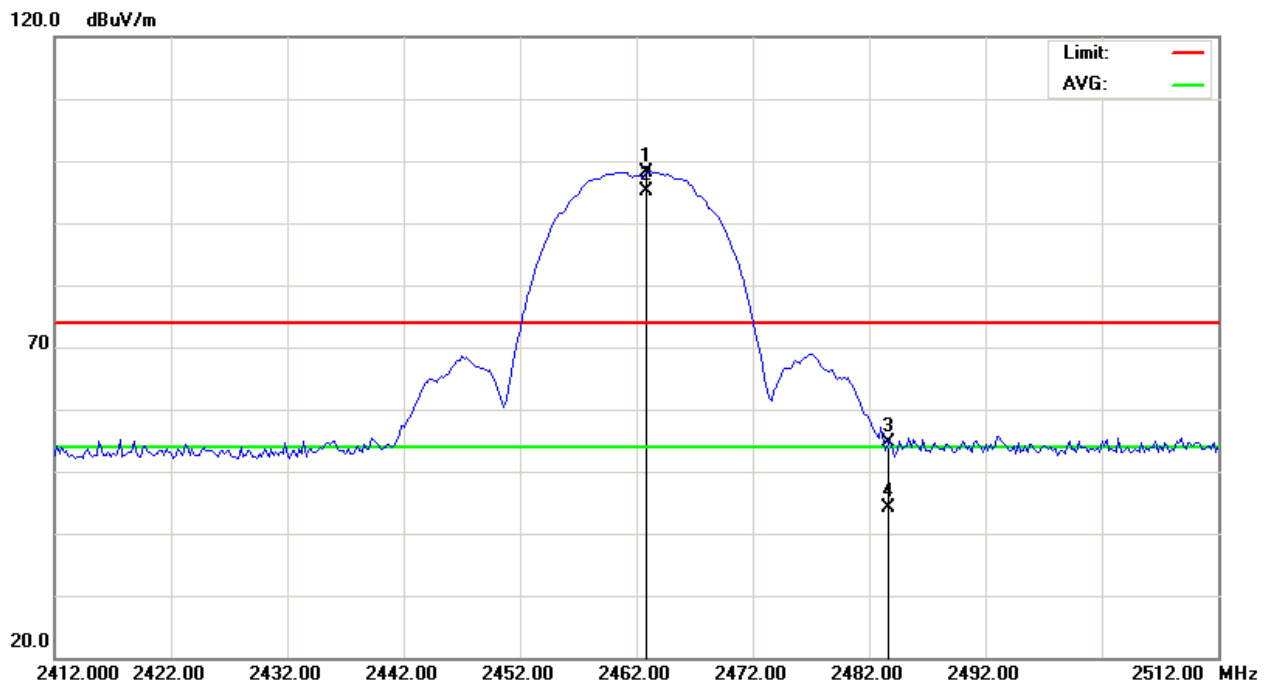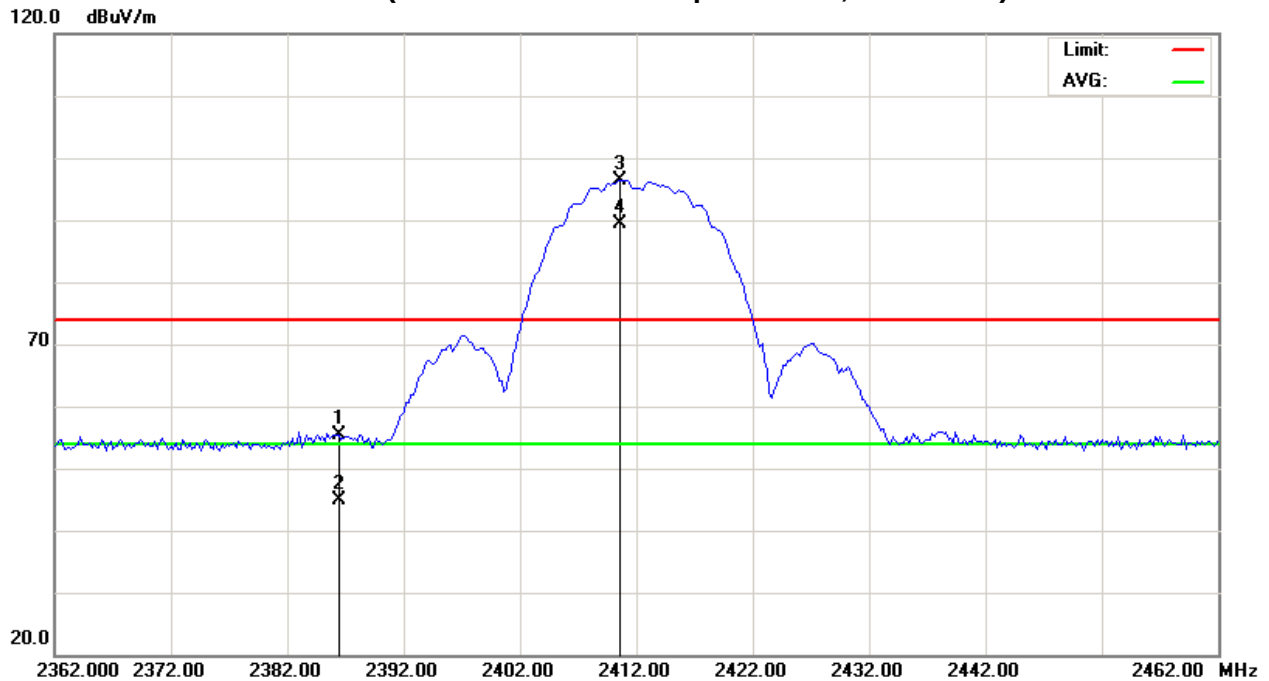



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g (WDAN-1PA92101-1F) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	V	24.78	12.92	31.15	55.93	44.07	74.00	54.00	- 9.93	AV
2483.500	V	35.35	14.71	31.49	66.84	46.20	74.00	54.00	- 7.16	Peak

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand



802.11g (Restricted Bands Requirements, Vertical)

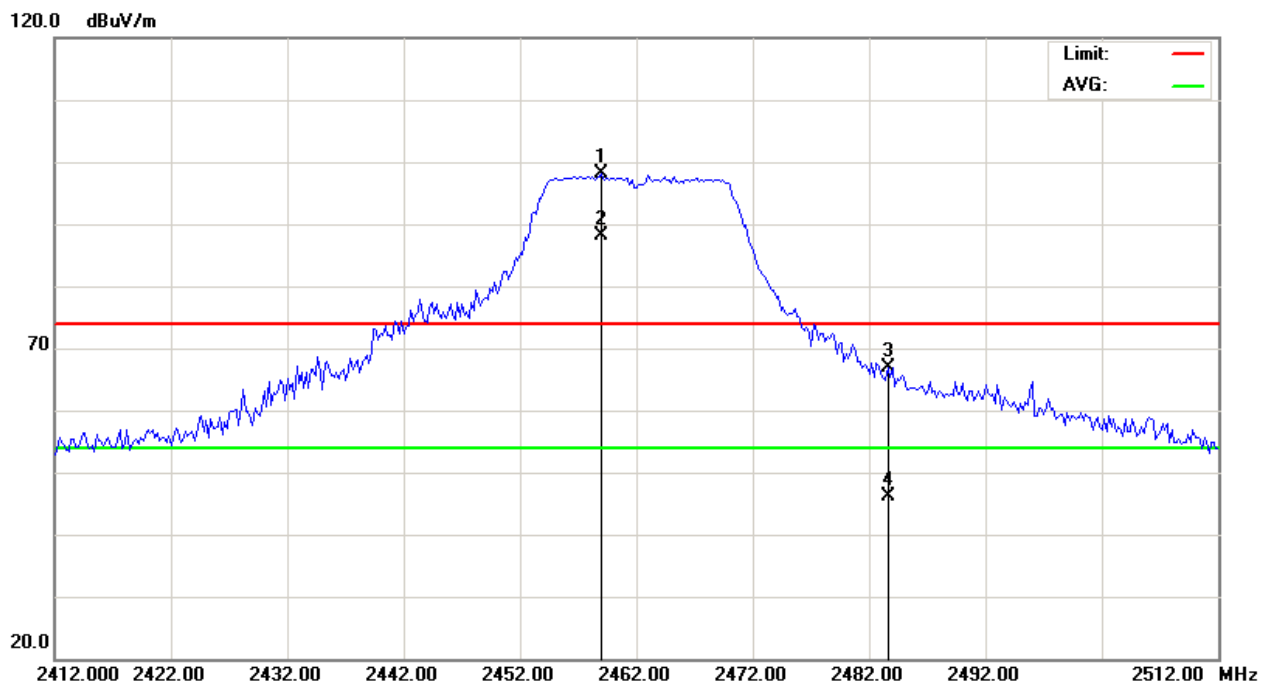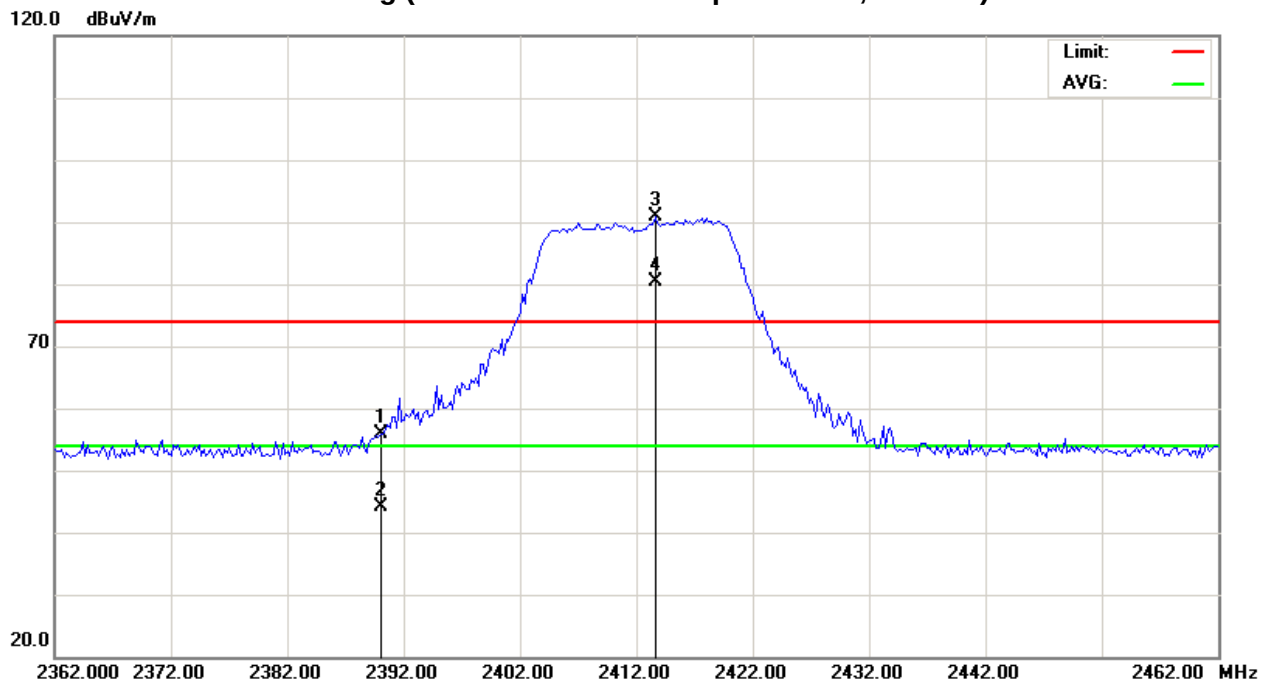



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11g (WDAN-1PA92101-1F) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	H	31.38	16.44	31.15	62.53	47.59	74.00	54.00	- 6.41	AV
2484.100	H	38.56	18.33	31.49	70.05	49.82	74.00	54.00	- 3.95	Peak

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11g (Restricted Bands Requirements, Horizontal)

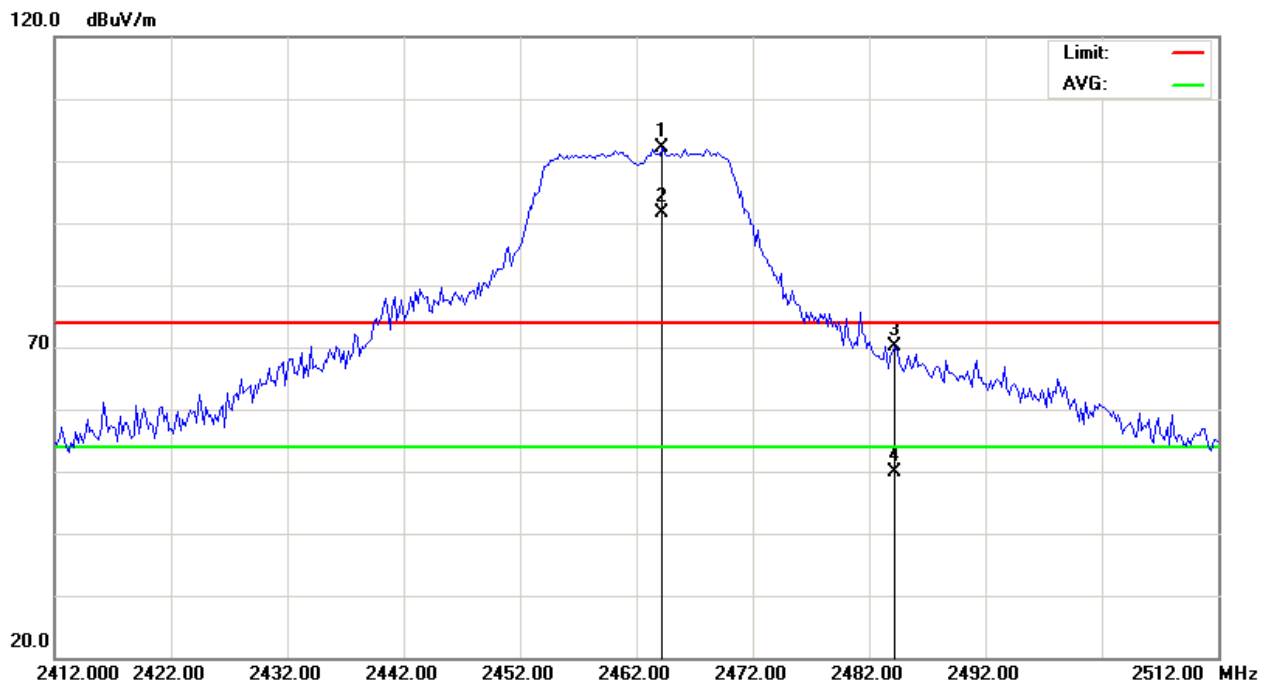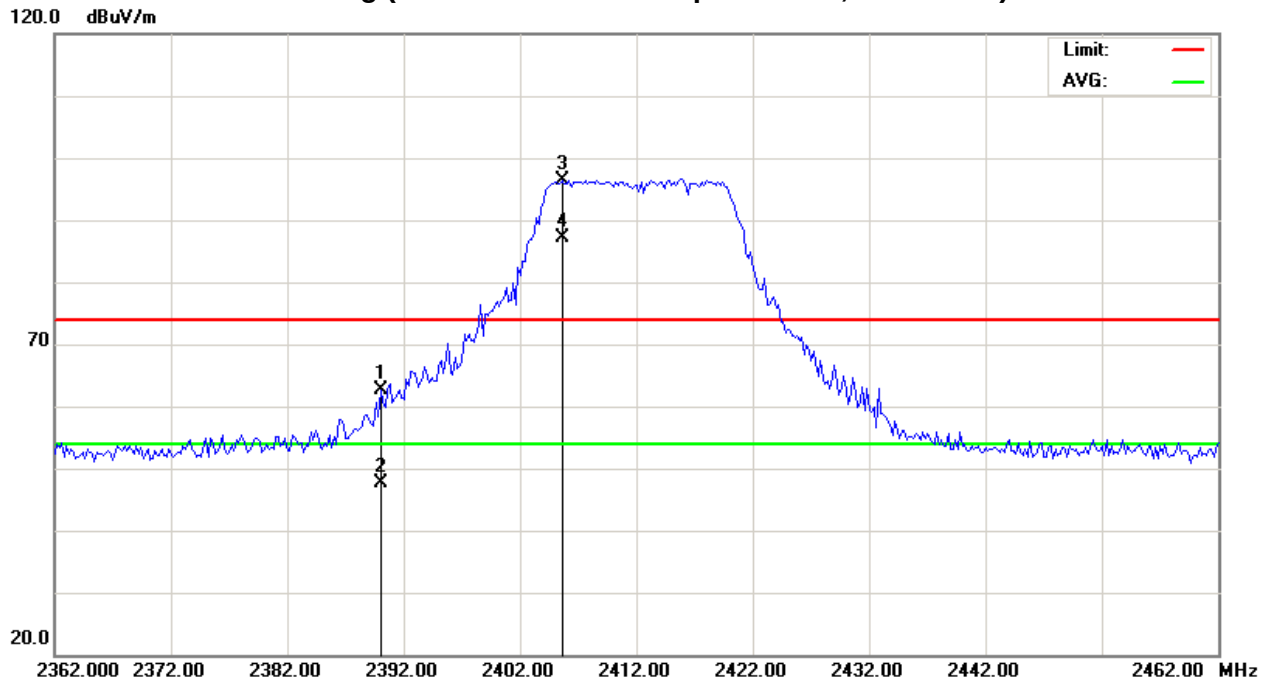



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 °C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M (WDAN-1PA92101-1F) (Vertical)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2390.000	V	27.95	14.11	31.15	59.10	45.26	74.00	54.00	- 8.74	AV
2484.200	V	33.73	13.19	31.49	65.22	44.68	74.00	54.00	- 8.78	Peak

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Vertical)

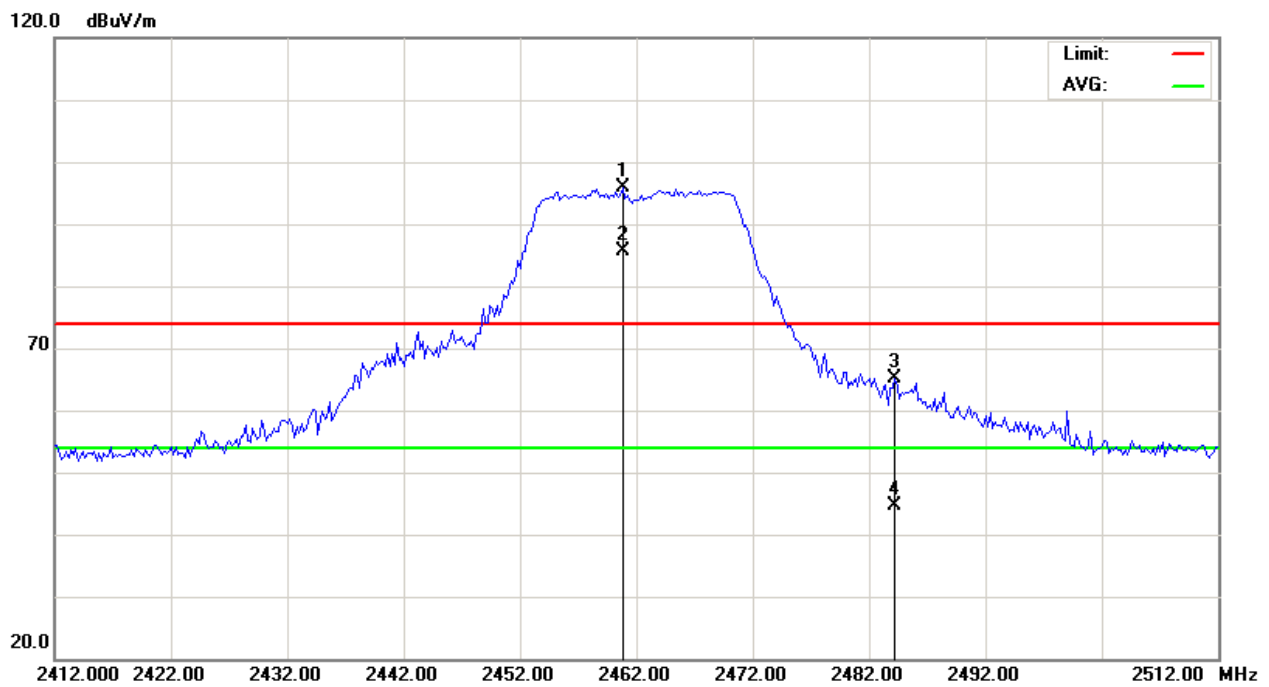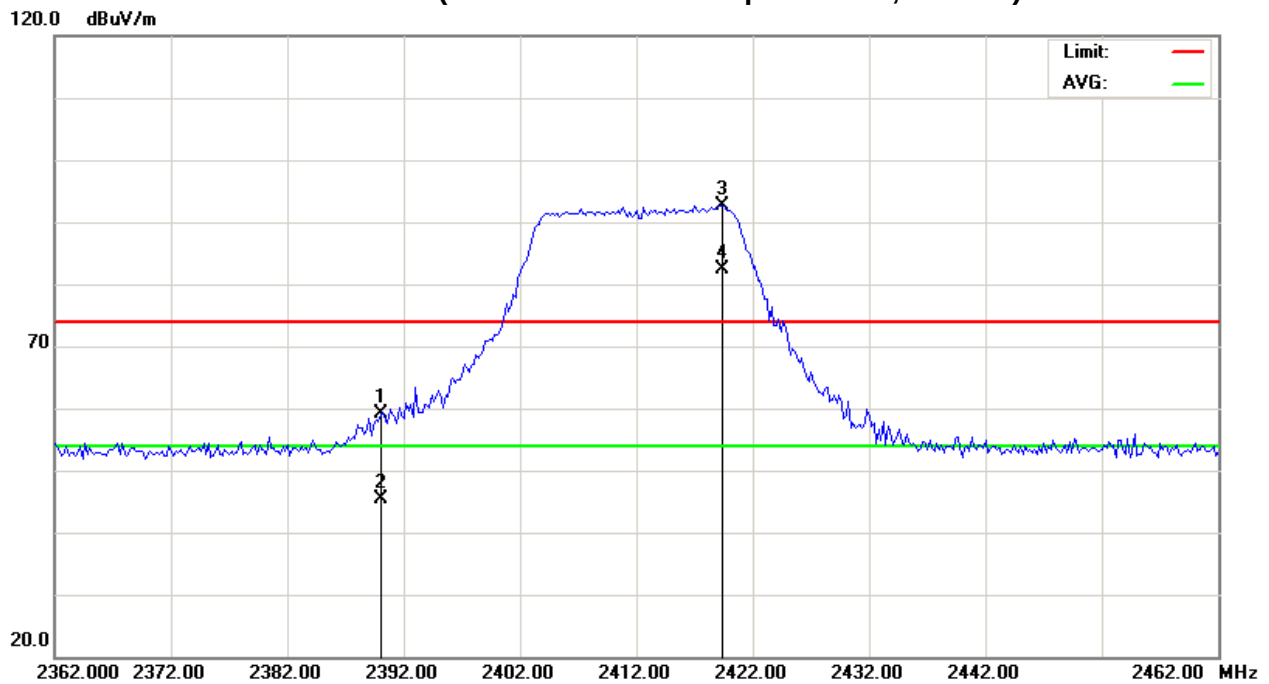



EUT :	RF Module	Model Name :	J20H049
Temperature :	25 ° C	Relative Humidity :	31%
Test Voltage :	AC 120V/60Hz (System)	Orthogonal Axes:	X
Test Mode :	802.11n/20M (WDAN-1PA92101-1F) (Horizontal)		
Note :	The emission of the carrier radiated field strength is measured for CH01/CH11 (Peak and AV) as following: 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz.		



Freq. (MHz)	Polarization H/V	Reading Level(dBuV)		Correct Factor(dB)	Measurement(dBuV/m)		Limit(dBuV/m)		Margin (dB)	Note
		Peak	AV		Peak	AV	Peak	AV		
2389.800	H	31.56	14.90	31.15	62.71	46.05	74.00	54.00	- 7.95	AV
2483.500	H	35.22	15.12	31.49	66.71	46.61	74.00	54.00	- 7.29	Peak

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand



802.11n/20M (Restricted Bands Requirements, Horizontal)

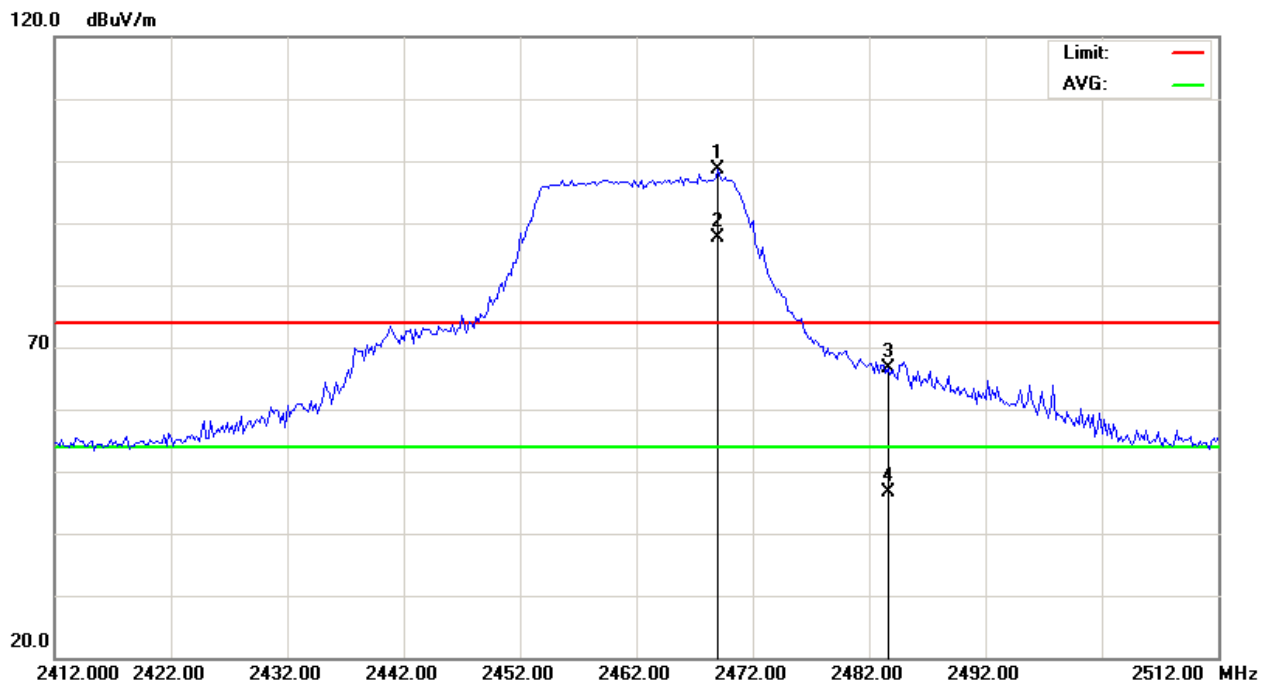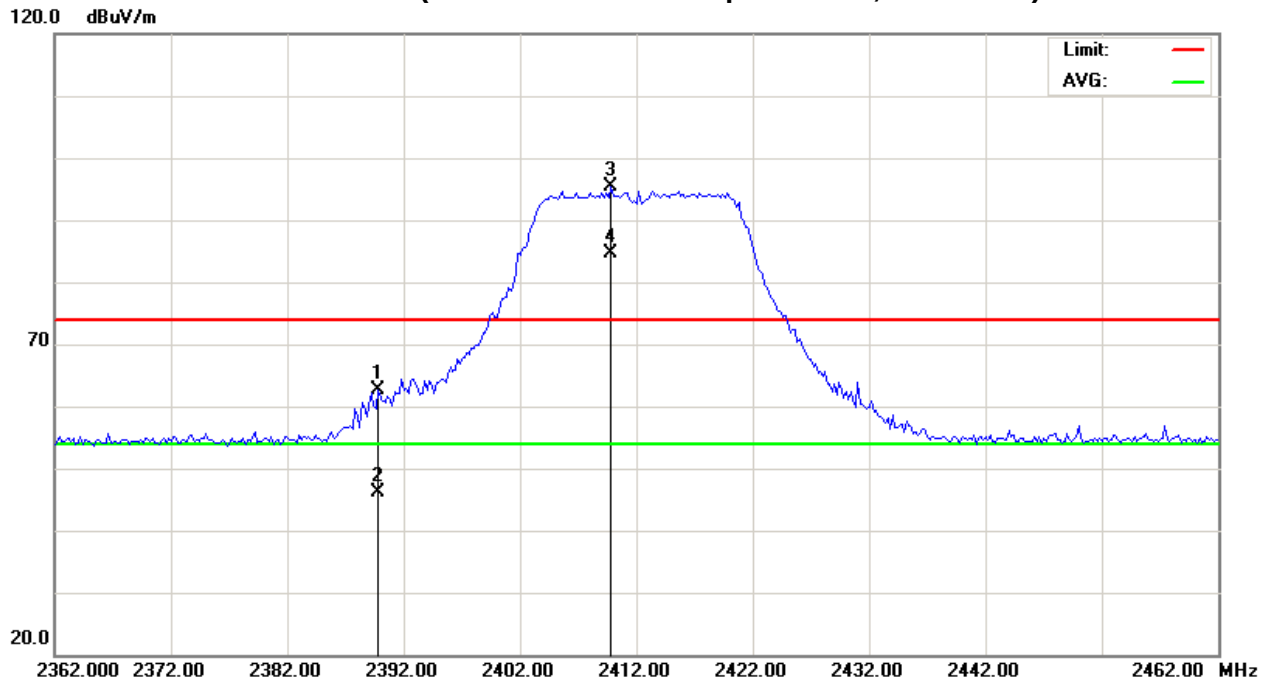

**5. BANDWIDTH TEST****5.1 APPLIED PROCEDURES / LIMIT**

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSL-6	100257	Jul. 08, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

5.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP**5.1.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS


EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH01, CH06, CH11 (APM6P-700096)		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	12.12	>=500KHz
CH06	2437	12.08	>=500KHz
CH11	2462	12.12	>=500KHz

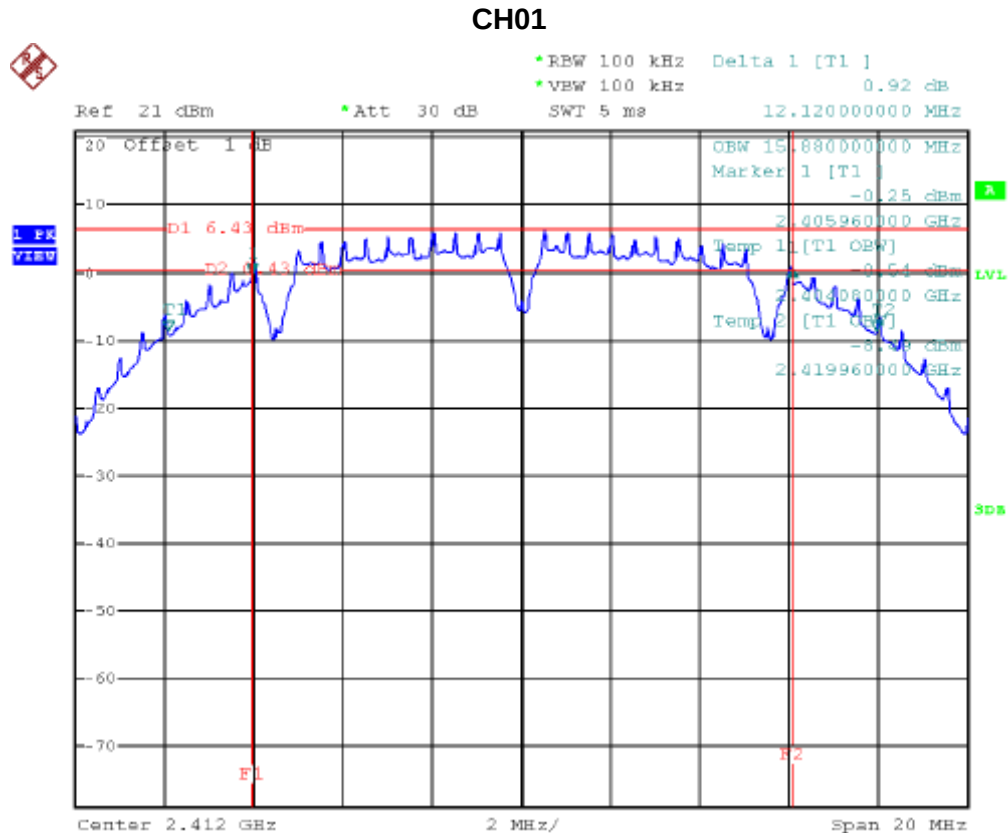




CH06

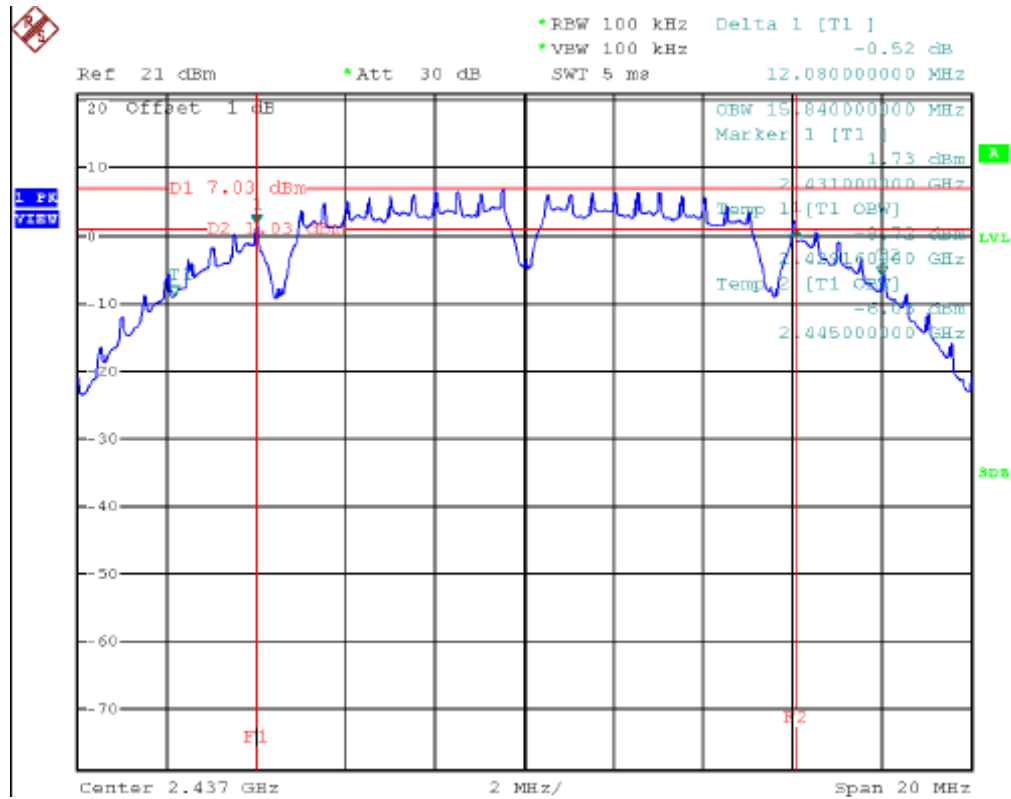

CH11

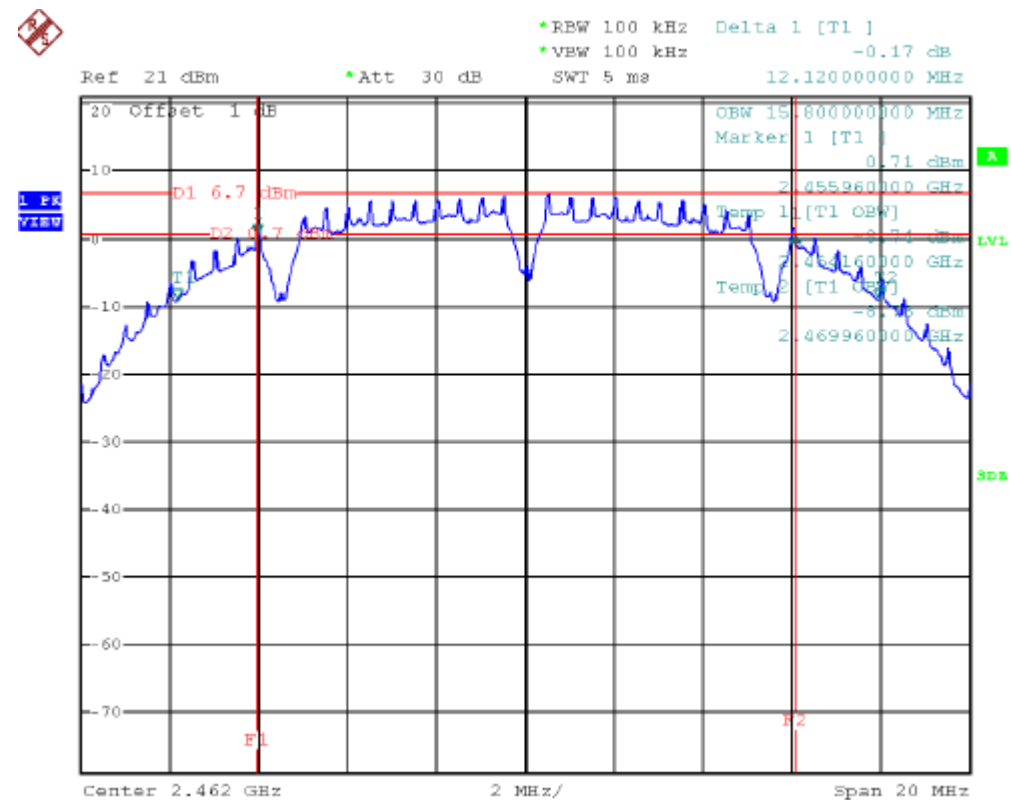





EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11g/CH01, CH06, CH11 (APM6P-700096)		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	16.53	>=500KHz
CH06	2437	16.61	>=500KHz
CH11	2462	16.61	>=500KHz


CH01

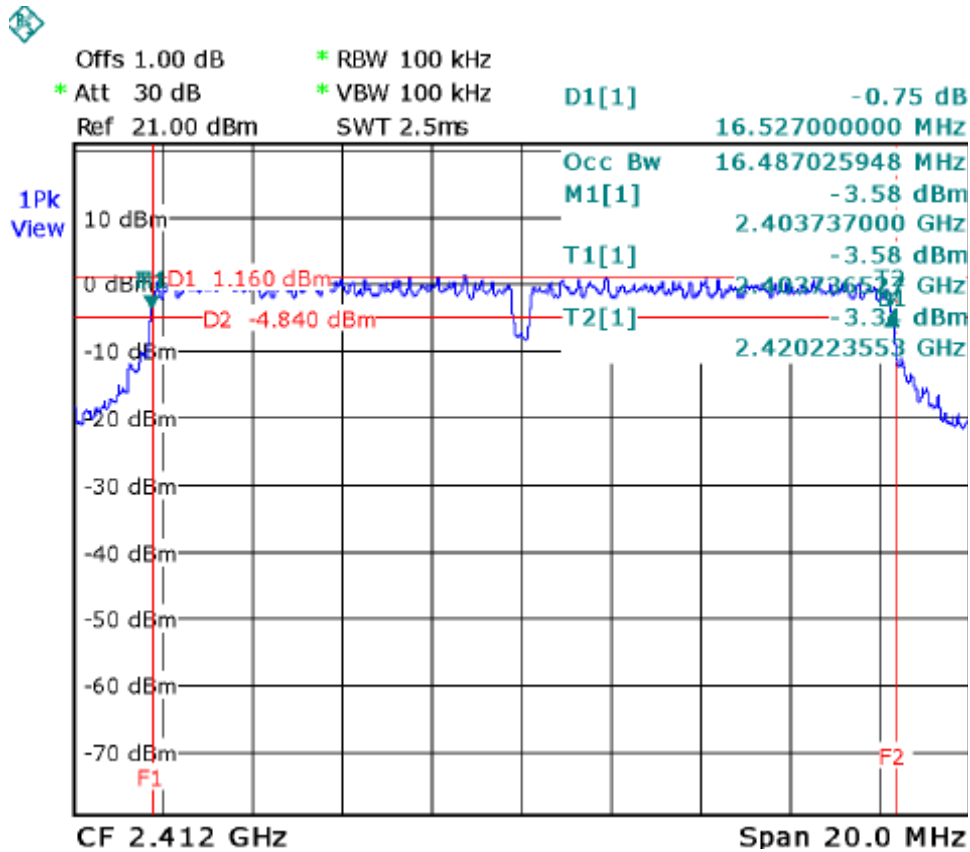

CH06

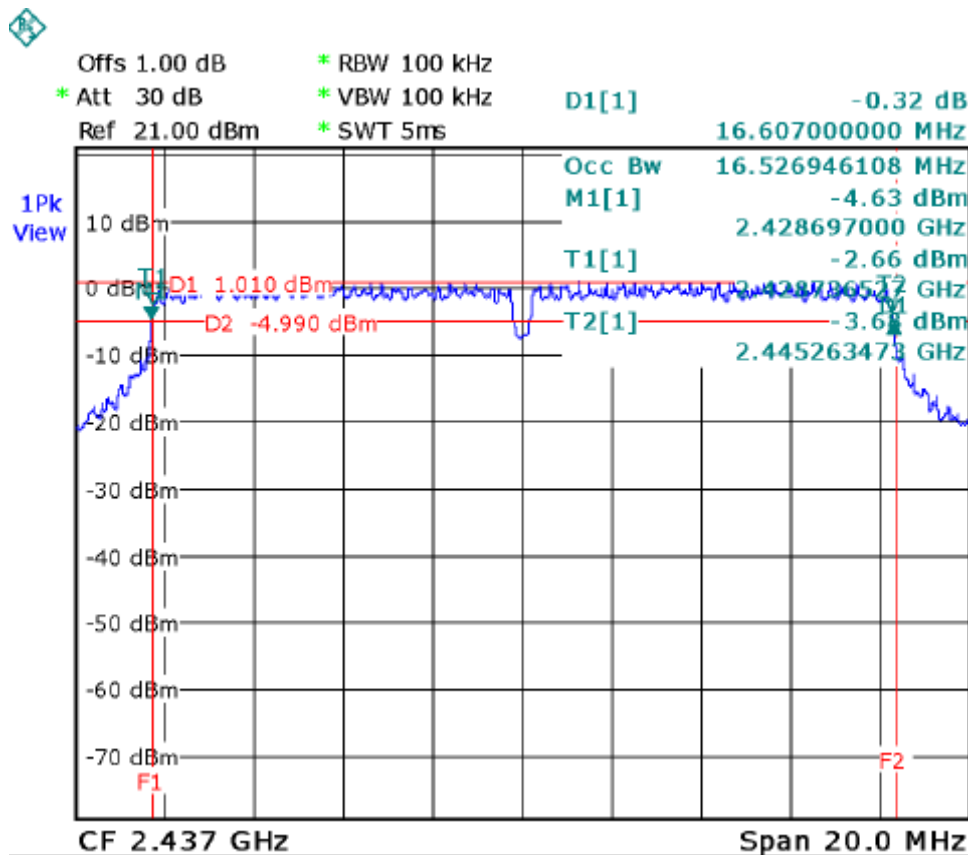

CH11

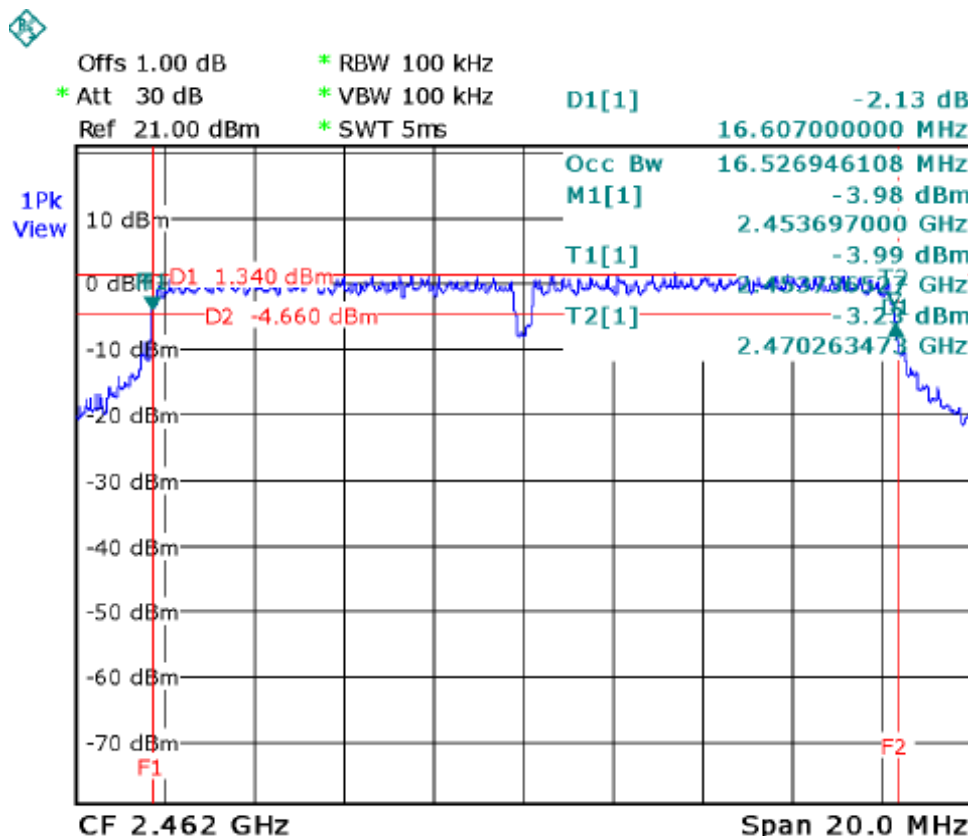




EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11n/20M/CH01, CH06, CH11 (APM6P-700096)		


Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	17.84	>=500KHz
CH06	2437	17.80	>=500KHz
CH11	2462	17.80	>=500KHz

CH01

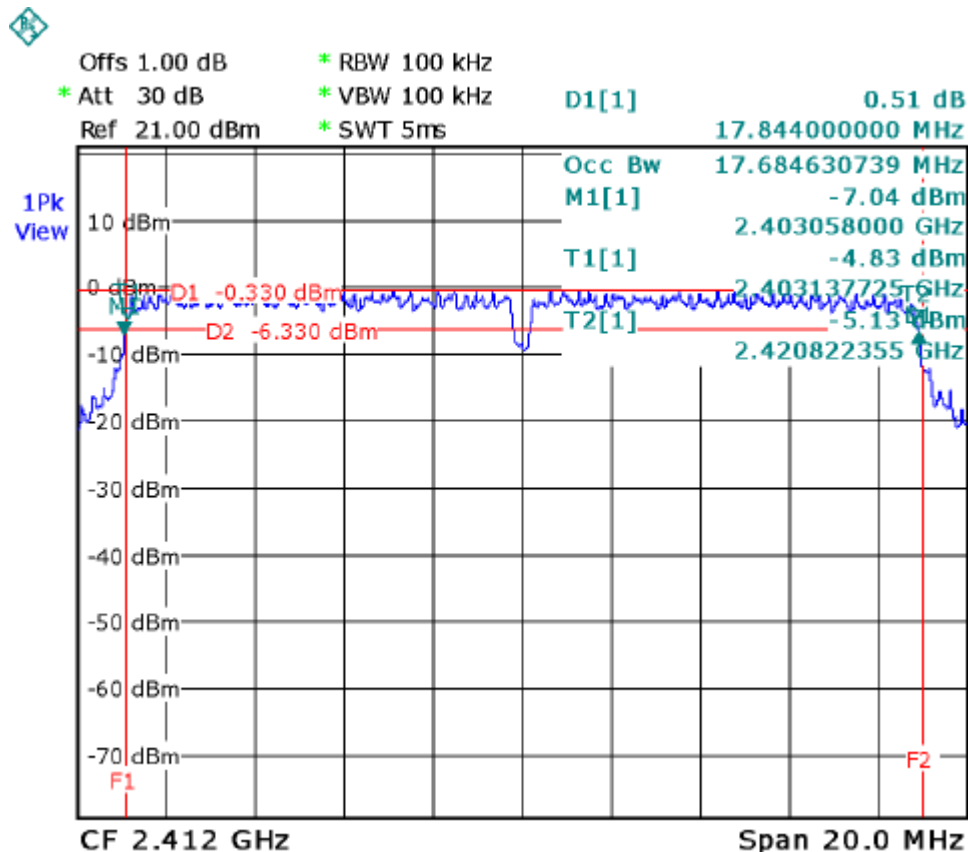




CH06

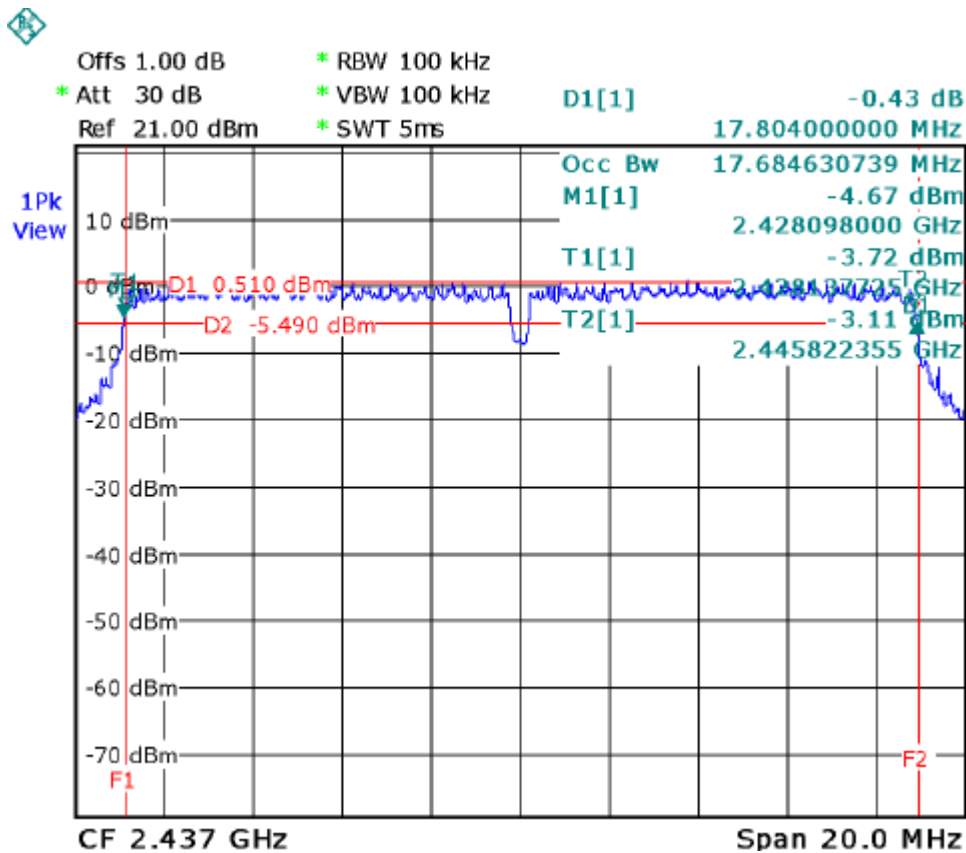

CH11

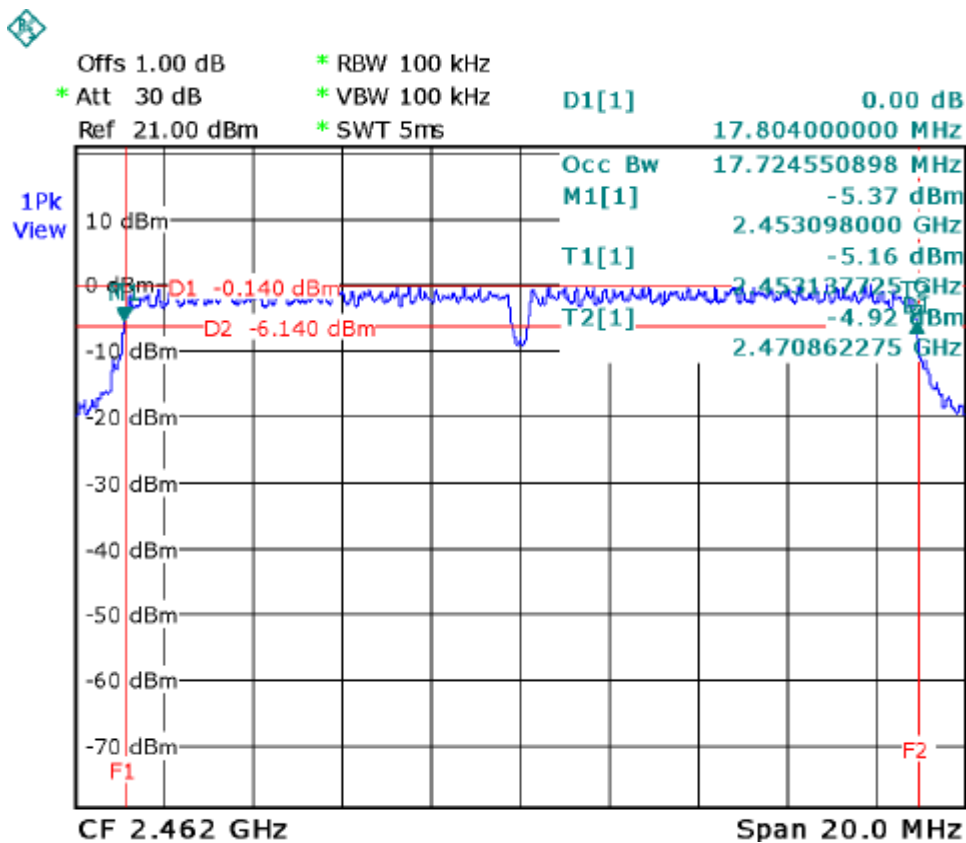

**6. PEAK OUTPUT POWER TEST****6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011


Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

6.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1MHz, VBW= 1MHz, Sweep time = Auto.

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP**6.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.6 TEST RESULTS**

EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH01, CH06, CH11 (APM6P-700096)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	19.62	30	1
CH06	2437	19.90	30	1
CH11	2462	19.82	30	1



EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11g/CH01, CH06, CH11 (APM6P-700096)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	25.18	30	1
CH06	2437	25.08	30	1
CH11	2462	25.32	30	1



EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11n/20M/CH01, CH06, CH11 (APM6P-700096)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	24.92	30	1
CH06	2437	25.08	30	1
CH11	2462	24.08	30	1

**7. ANTENNA CONDUCTED SPURIOUS EMISSION****7.1 APPLIED PROCEDURES / LIMIT**

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSL-6	100257	Jul. 08, 2011

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

7.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP**7.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**7.1.6 TEST RESULTS**

EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH01, CH11		


Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2397.00	-25.43	2484.60	-45.94
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



CH01

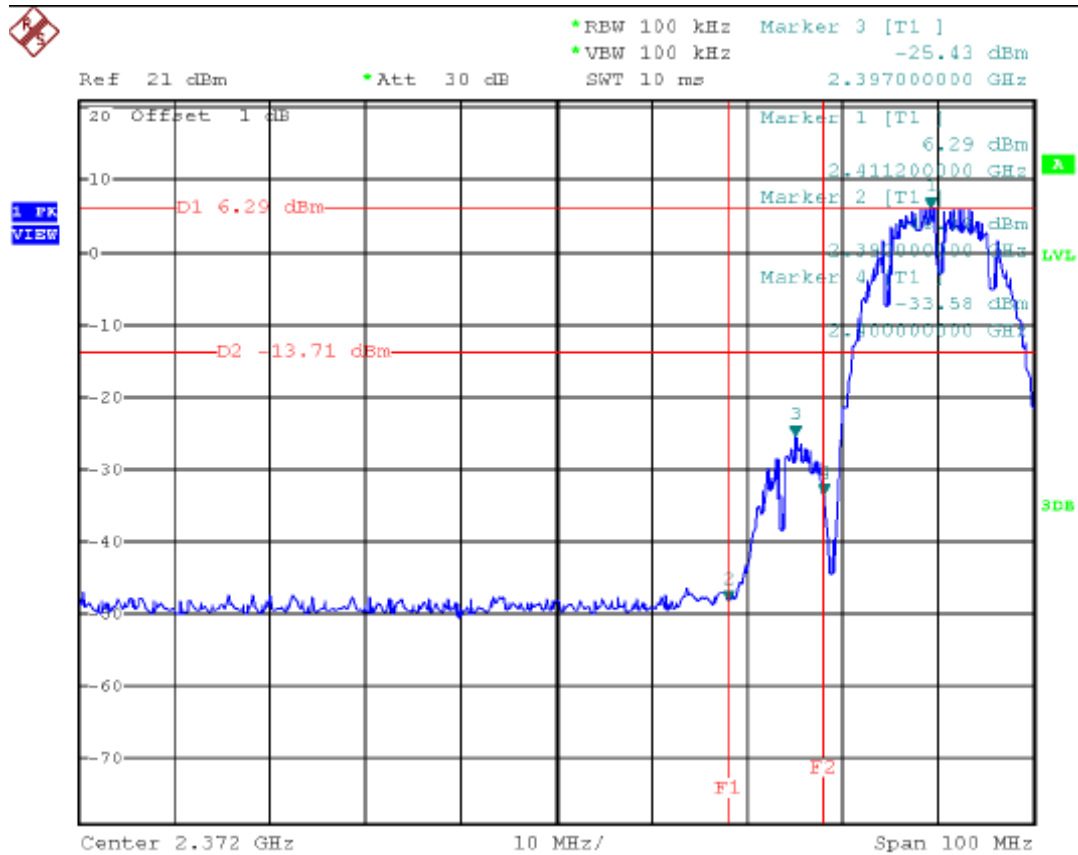


CH11

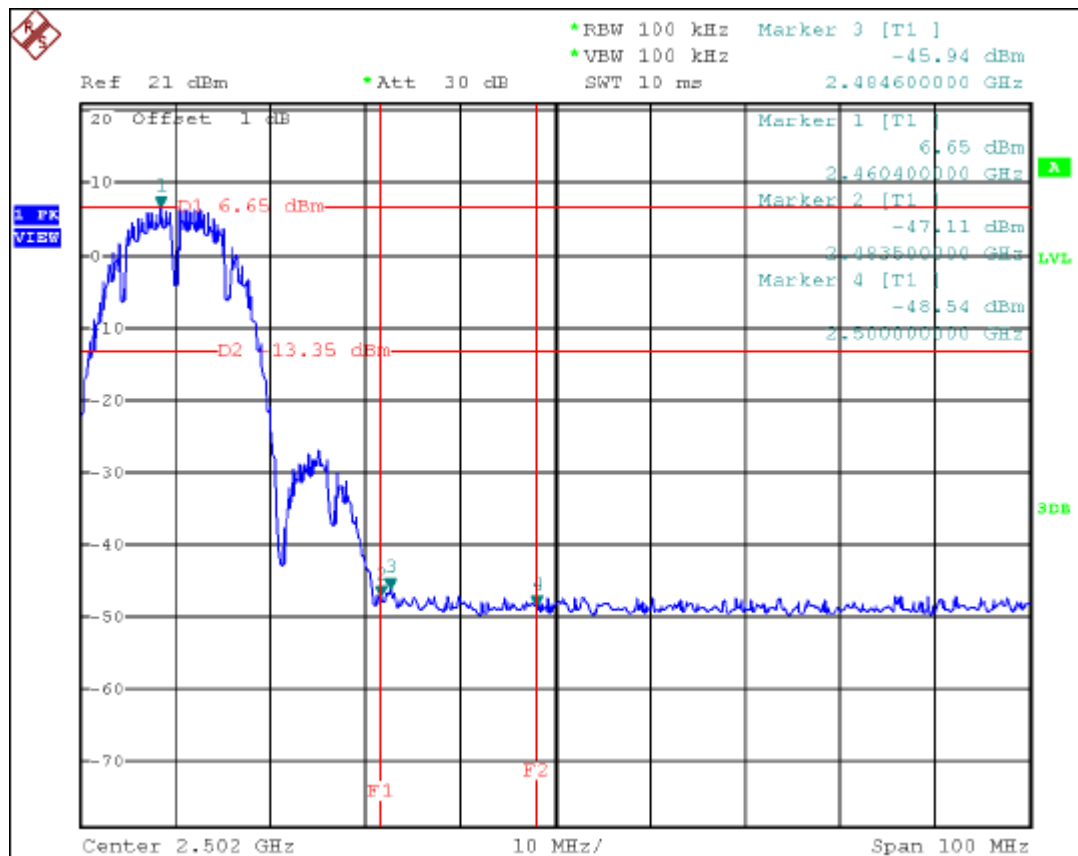




CH01

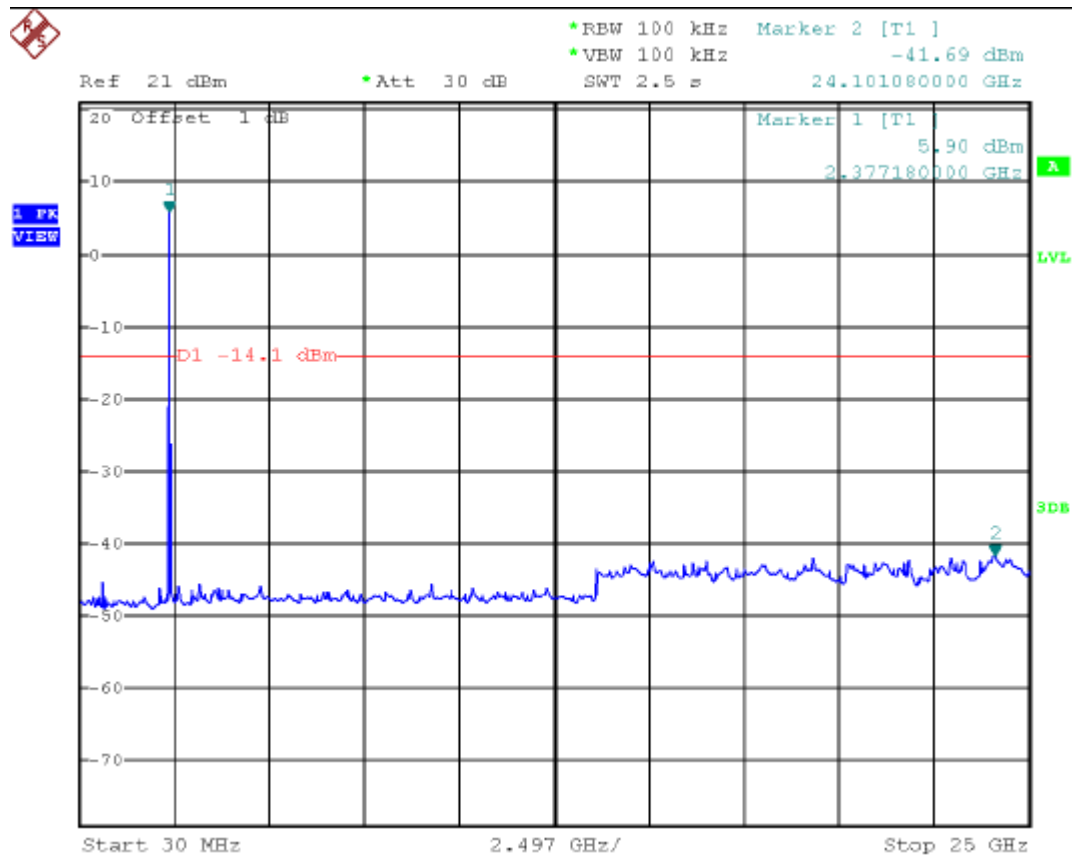


CH06

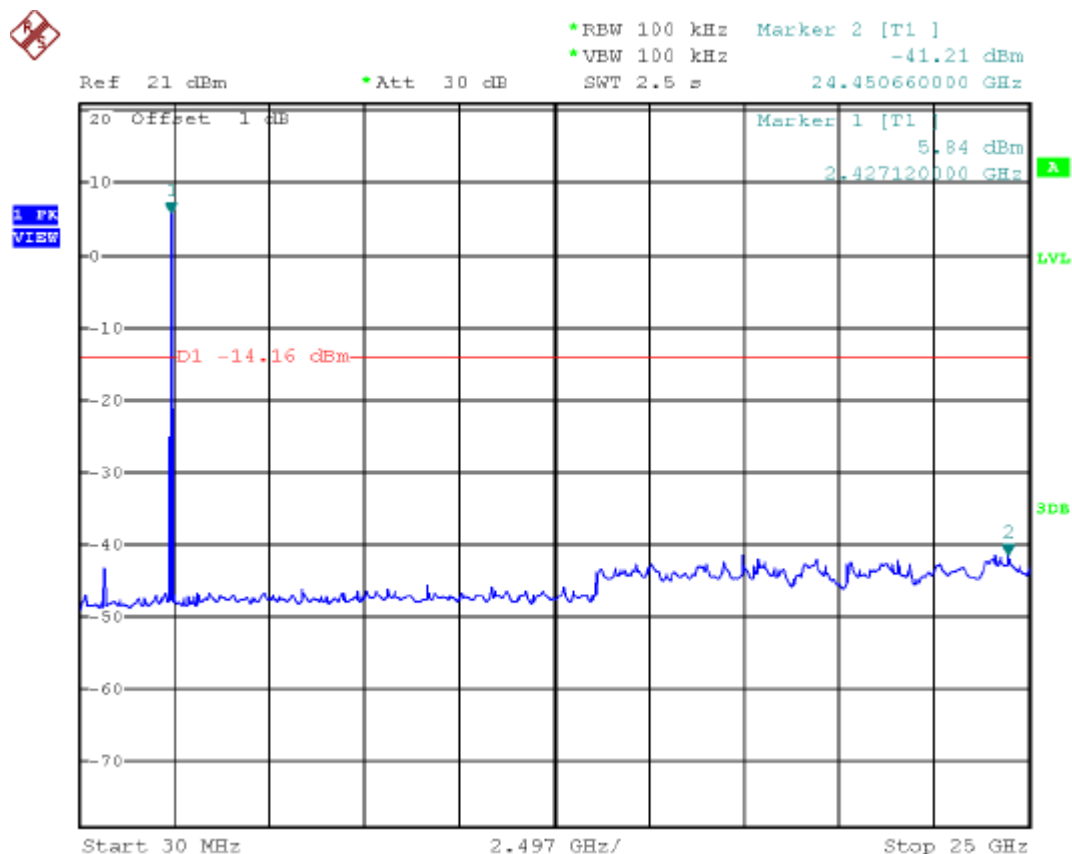



CH11

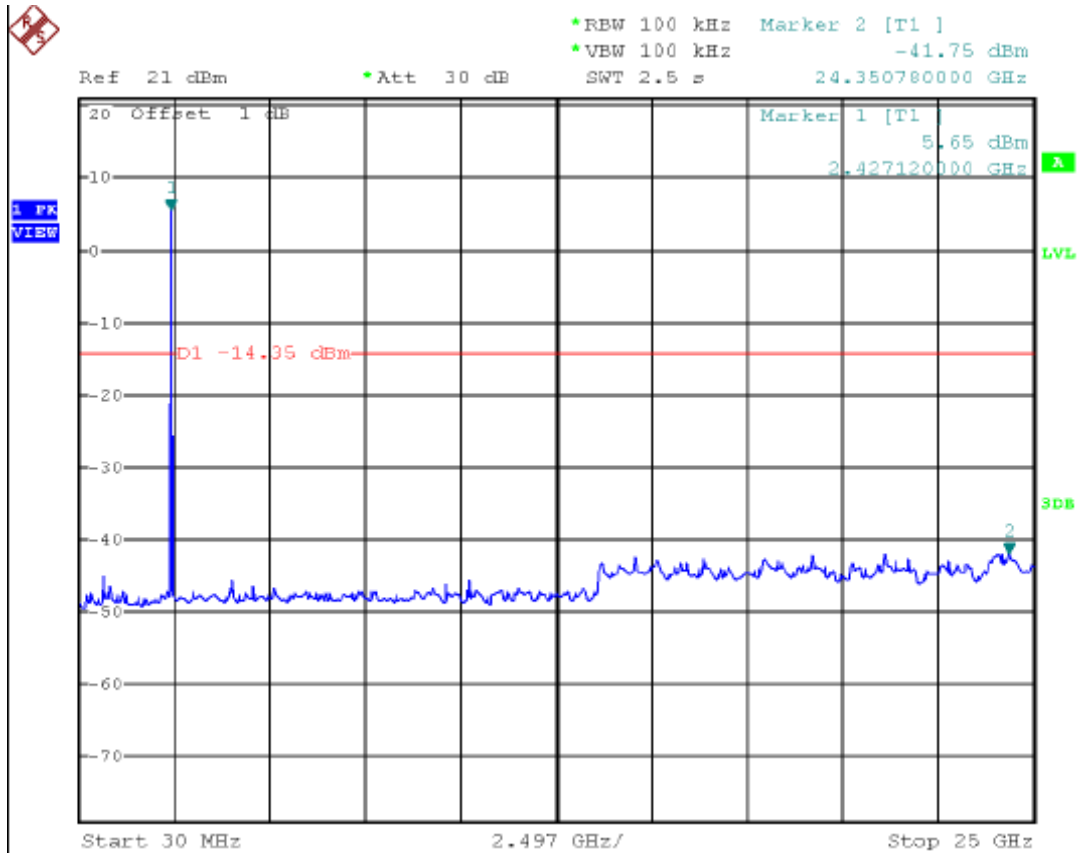




EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11g/CH01, CH11		


Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2399.8	-23.16	2484.24	-37.33
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



CH01

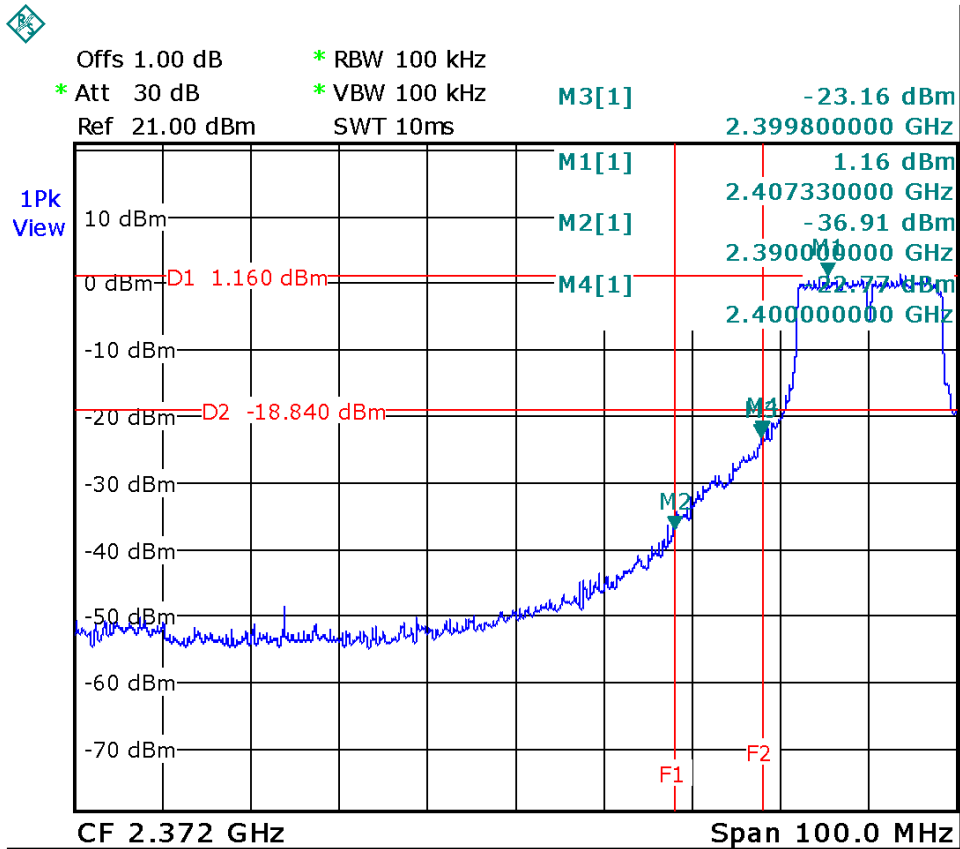

CH11

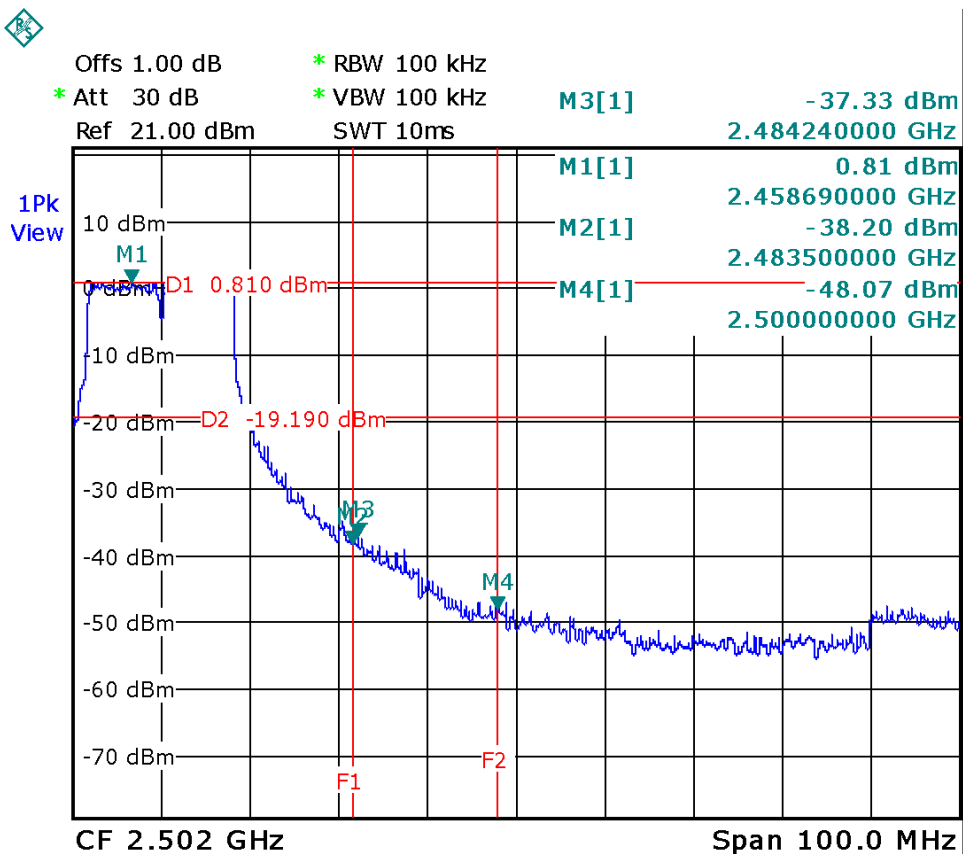




CH01




*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.04 dBm
Ref 21 dBm *Att 30 dB SWT 2.5 s 24.00120000 GHz

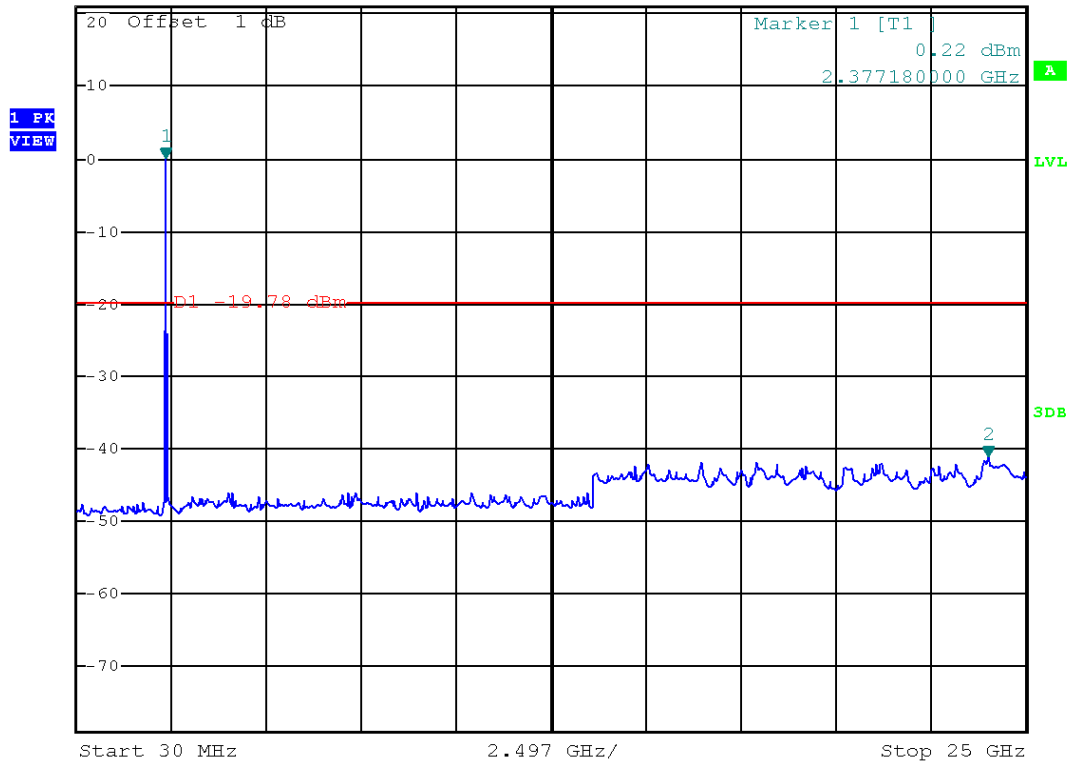

CH06



*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -40.17 dBm
Ref 21 dBm *Att 30 dB SWT 2.5 s 24.400720000 GHz

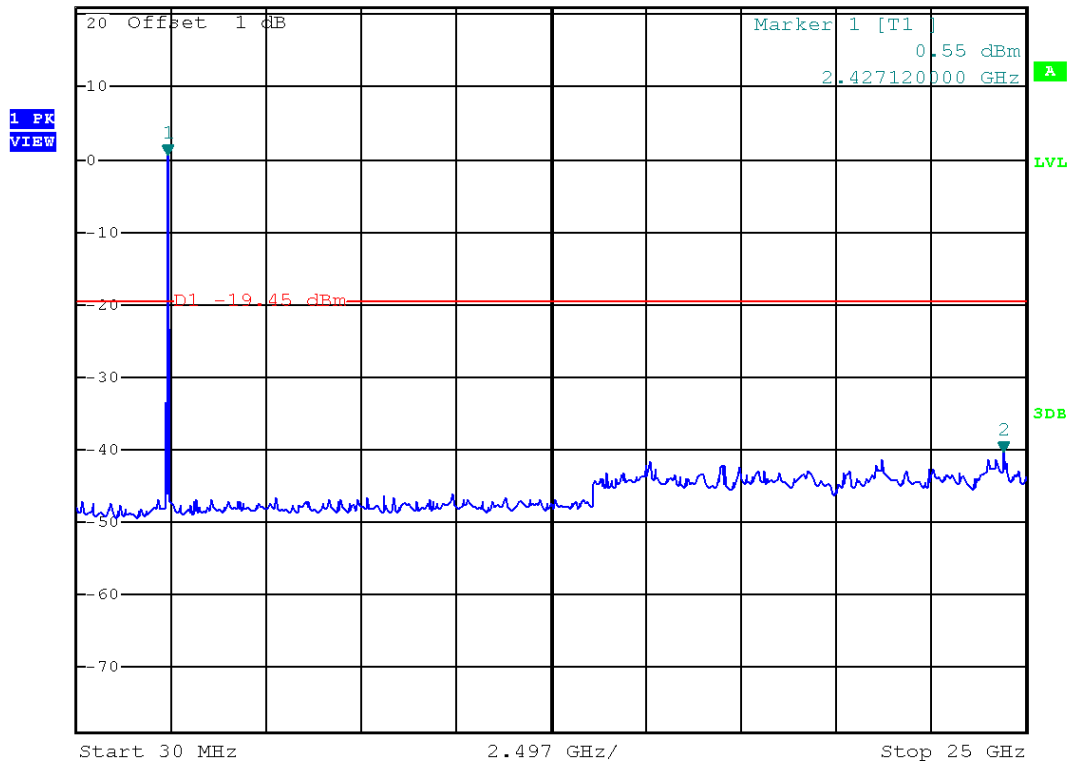




CH11



*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.85 dBm
Ref 21 dBm *Att 30 dB SWT 2.5 s 24.400720000 GHz

1 PK
VIEW

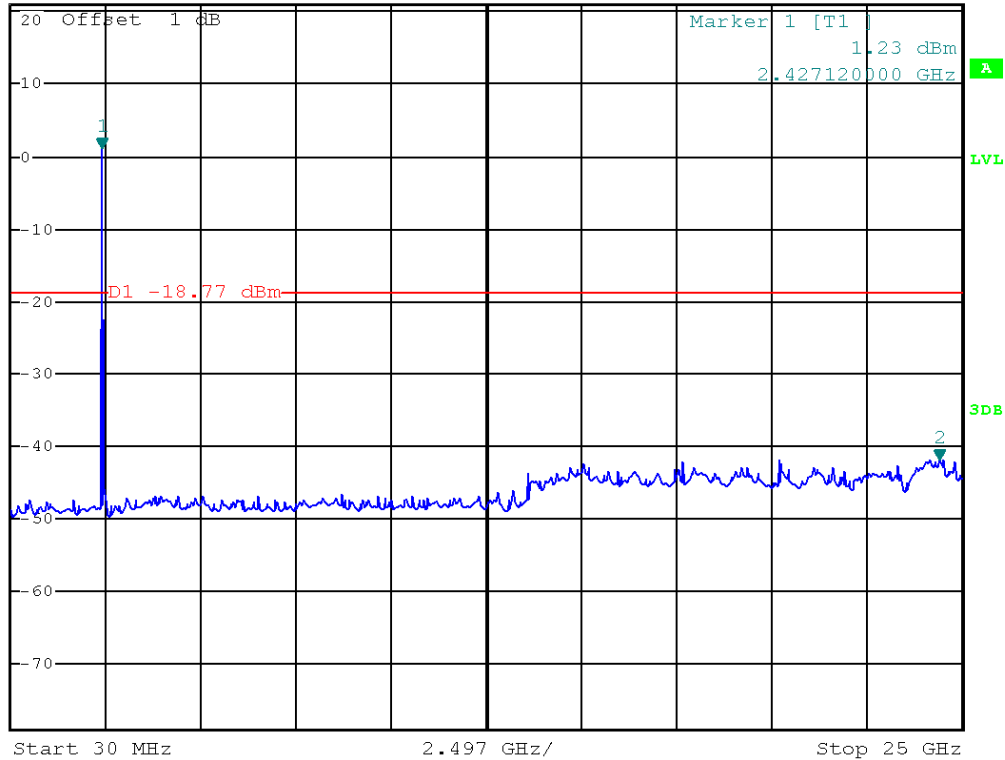




EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11n/20M/CH01, CH11		


Channel of Worst Data: CH1,CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2398.95	-28.59	2483.64	-37.51
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



CH01

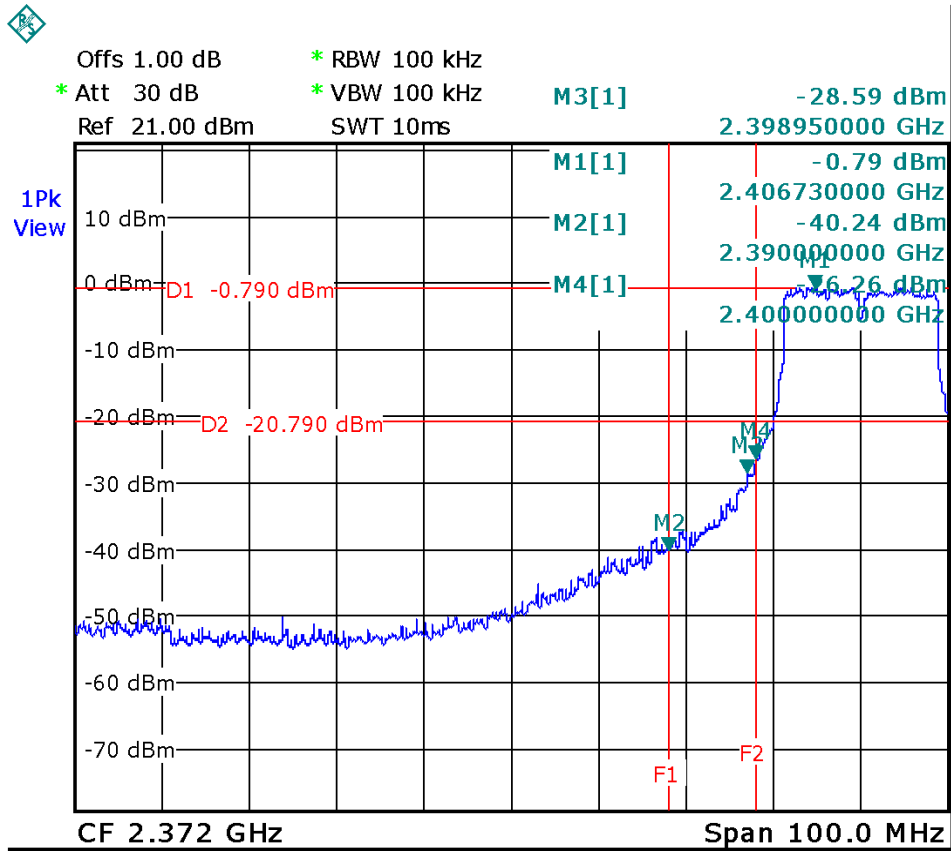

CH11

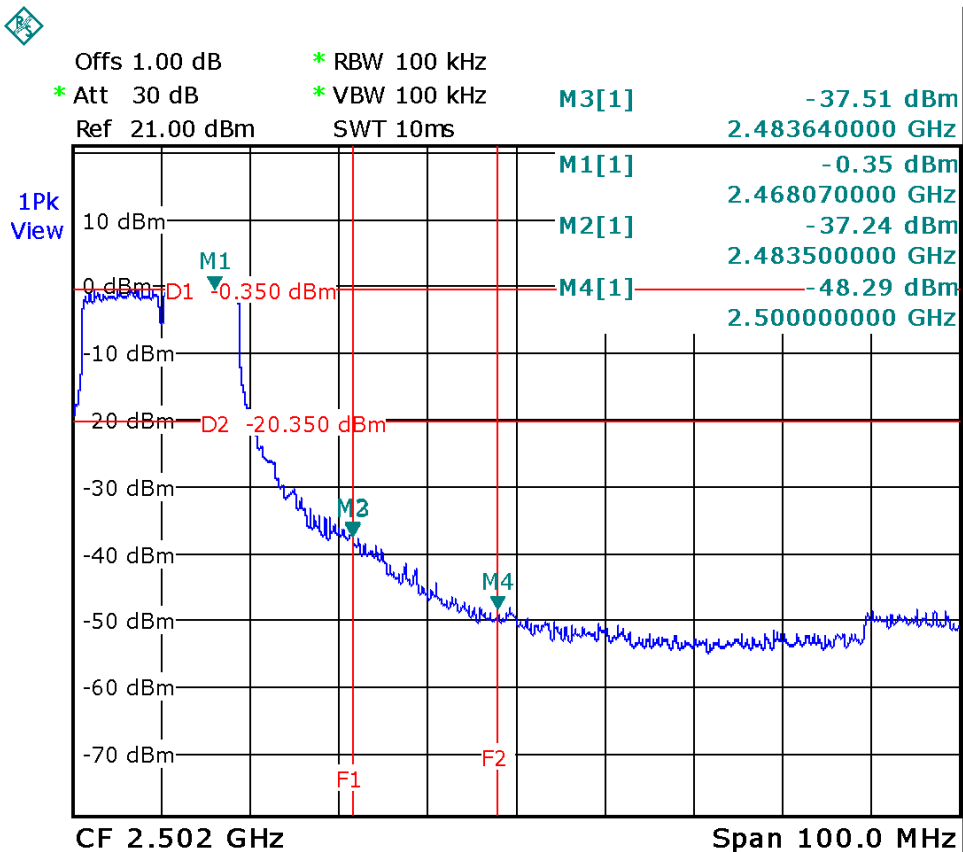




CH01




*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.72 dBm
Ref 21 dBm *Att 30 dB SWT 2.5 s 20.205760000 GHz

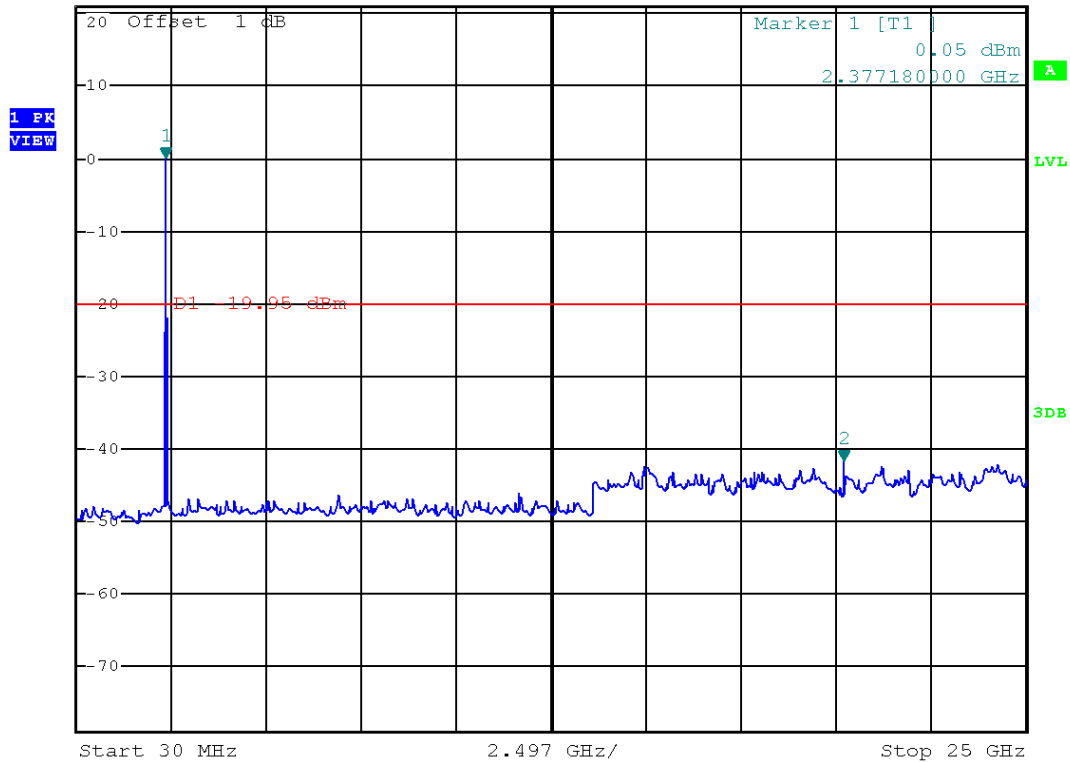

CH06



*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.15 dBm
Ref 21 dBm *Att 30 dB SWT 2.5 s 14.962060000 GHz

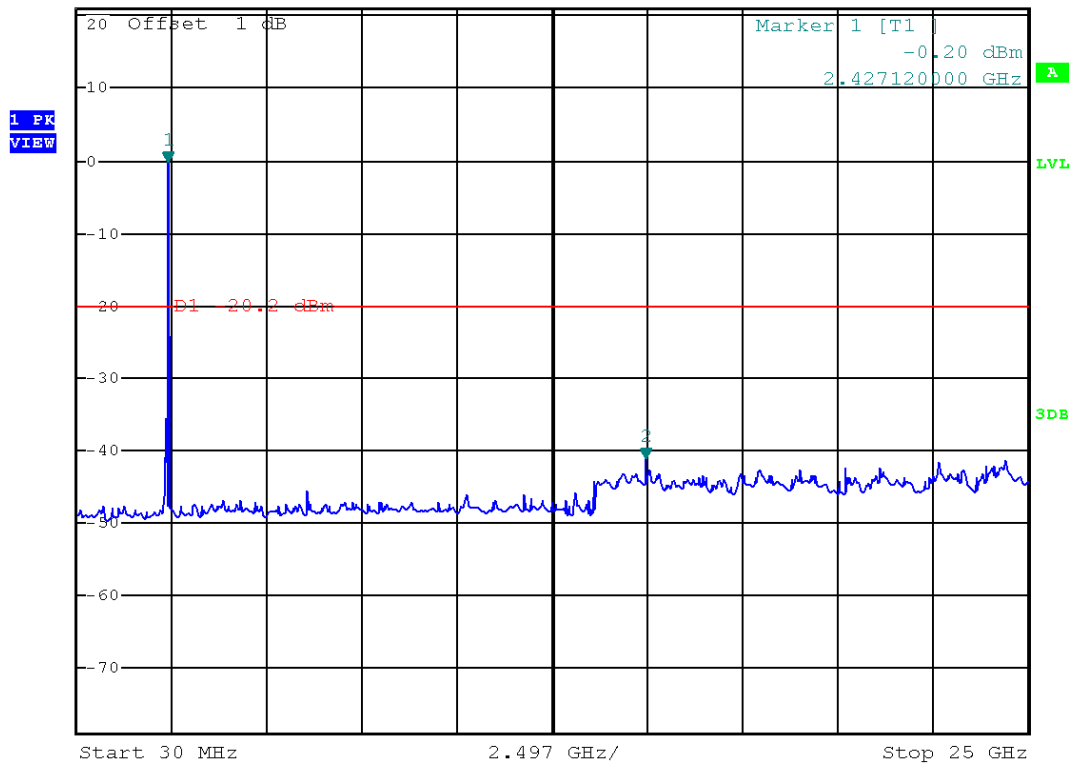



CH11



*RBW 100 kHz Marker 2 [T1]
*VBW 100 kHz -41.26 dBm
SWT 2.5 s 20.355580000 GHz


Ref 21 dBm

*Att 30 dB

SWT 2.5 s

20.355580000 GHz

1 PK
VIEW

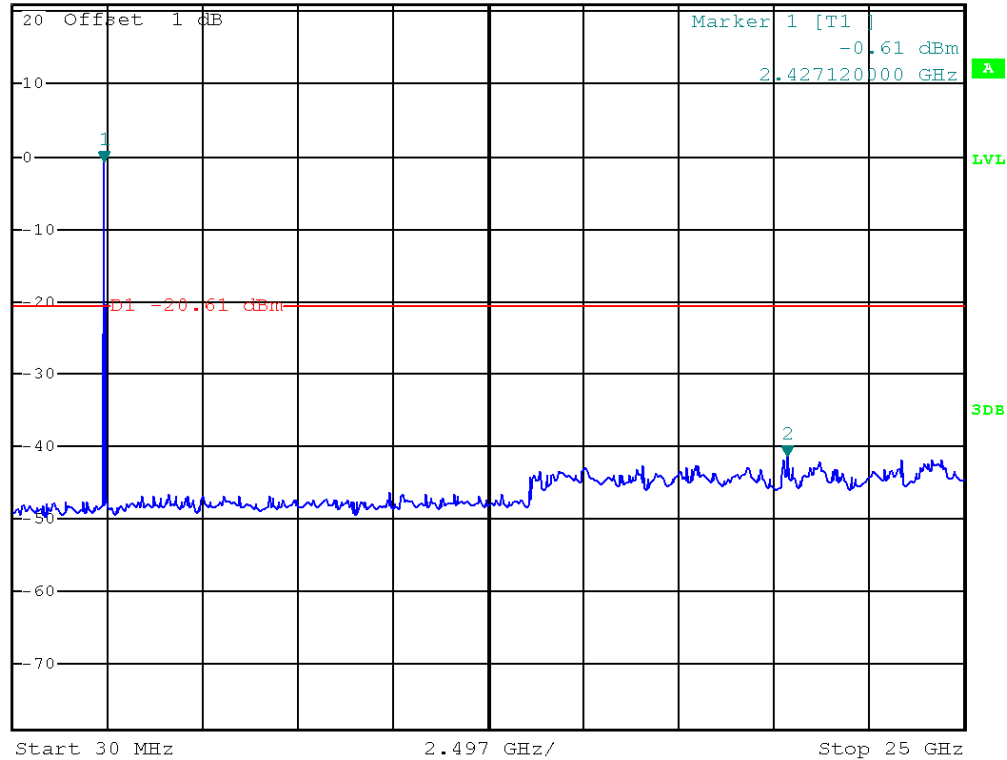

**8. POWER SPECTRAL DENSITY TEST****8.1 APPLIED PROCEDURES / LIMIT**

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSL-6	100257	Jul. 08, 2011


Remark: " N/A" denotes No Model Name, Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

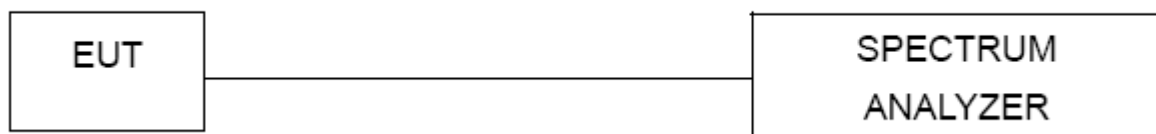8.1.4 TEST SETUP**8.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




8.1.6 TEST RESULTS

EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11b/CH01, CH06, CH11 (APM6P-700096)		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-7.76	8
CH06	2437	-7.92	8
CH11	2462	-7.47	8

CH01

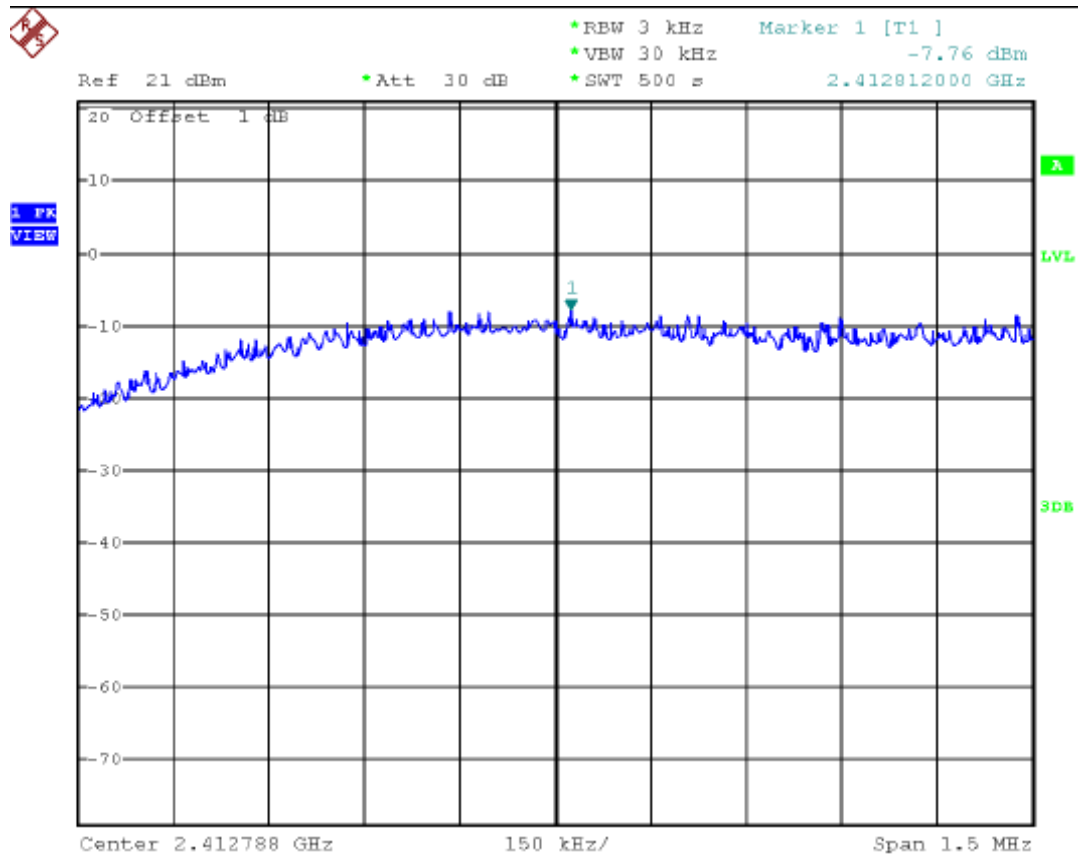




CH06

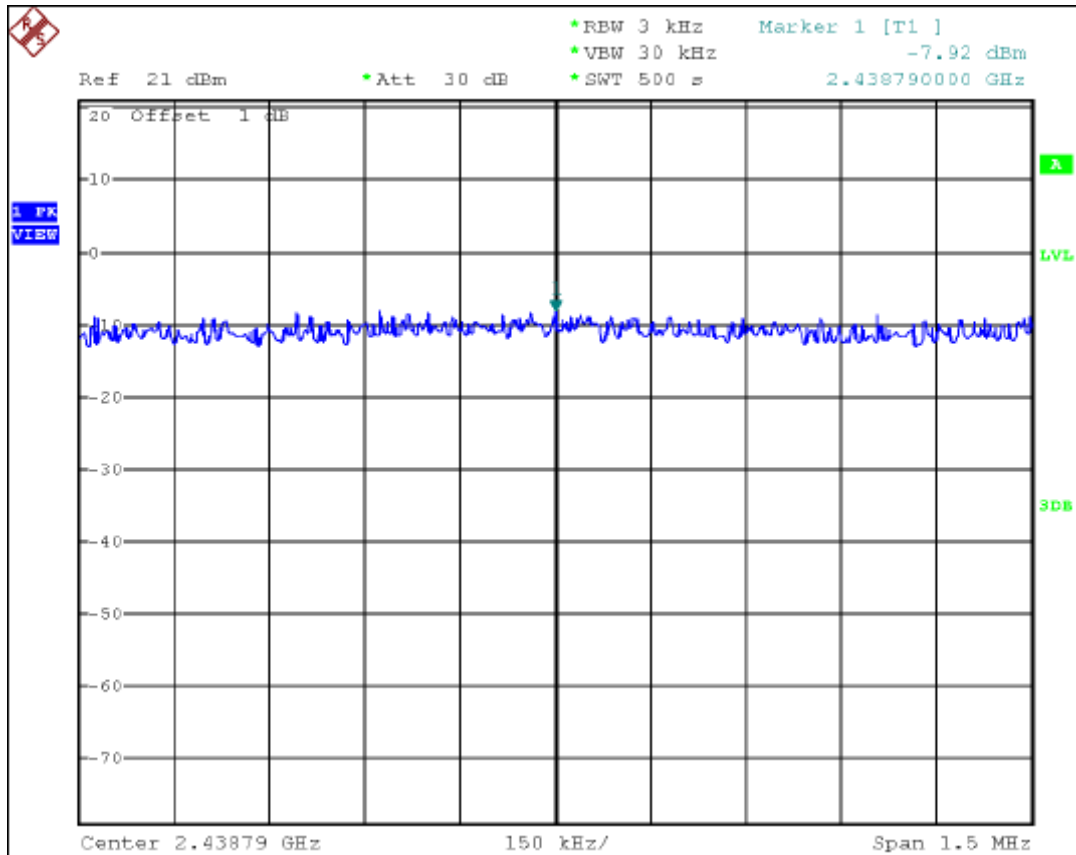


CH11

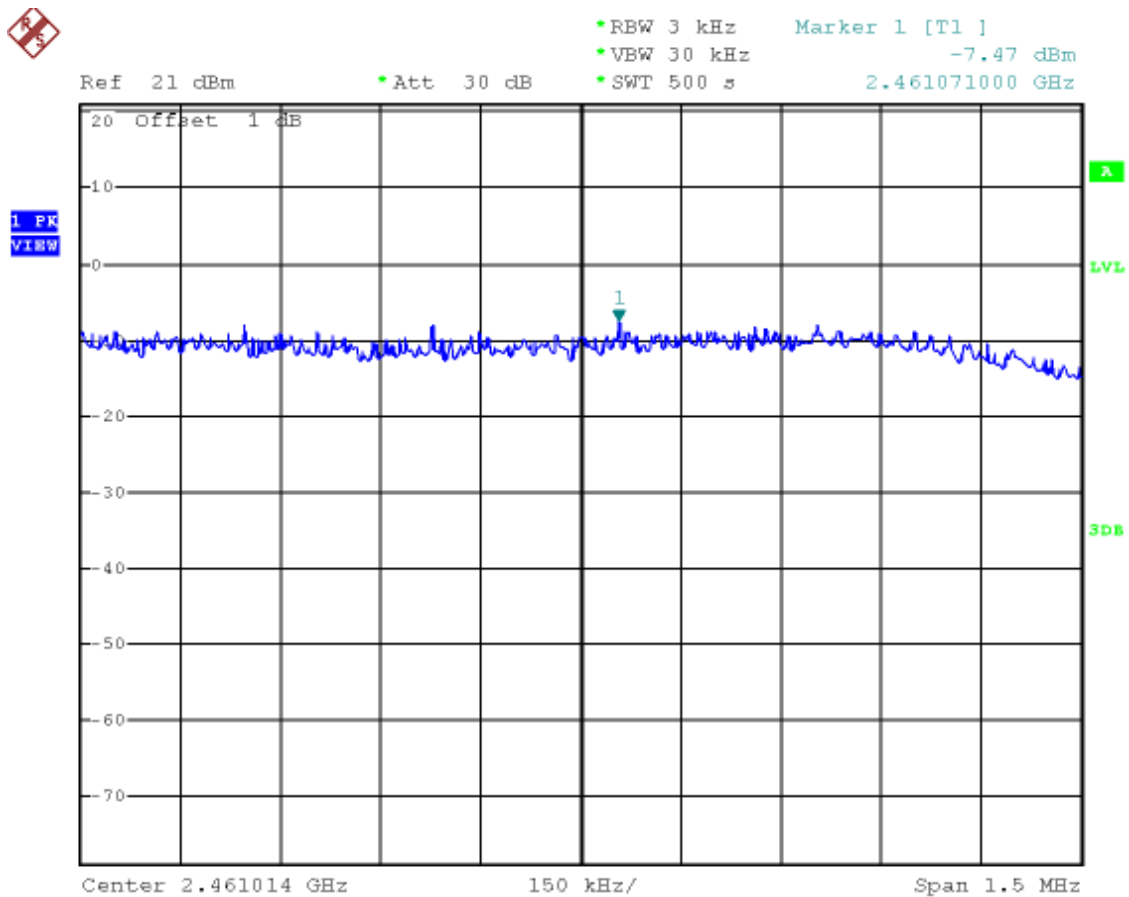



EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11g/CH01, CH06, CH11 (APM6P-700096)		


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412	-9.89	8
CH06	2437	-9.47	8
CH11	2462	-9.15	8

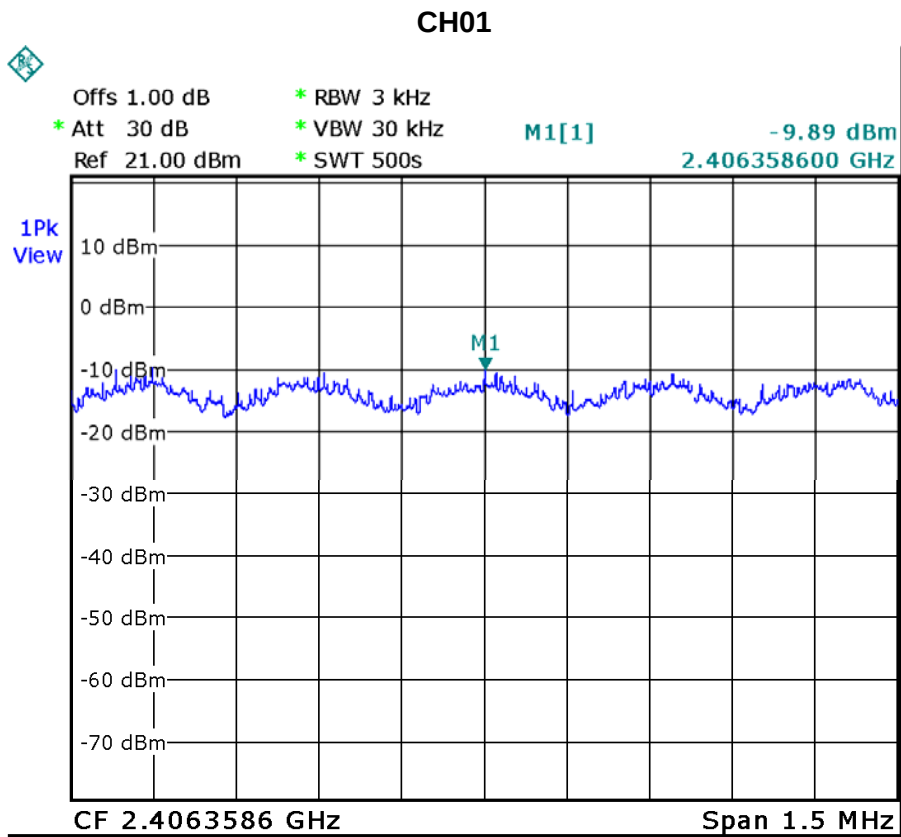

Date: 15.DEC.2010 18:27:54




CH06

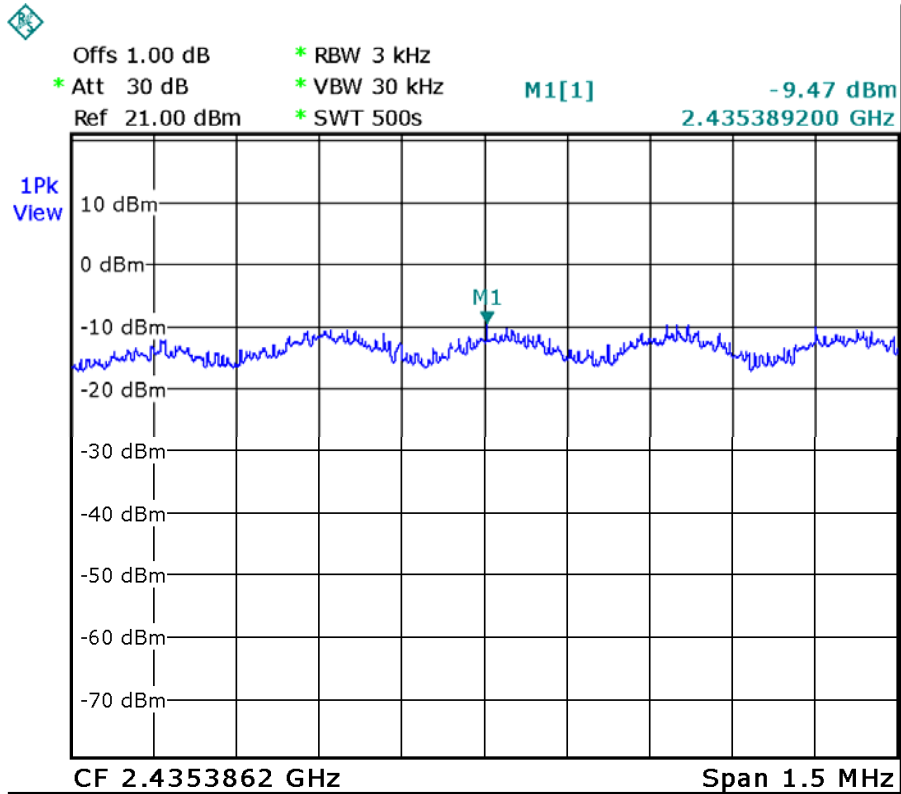

Date: 15.DEC.2010 18:44:01

CH11

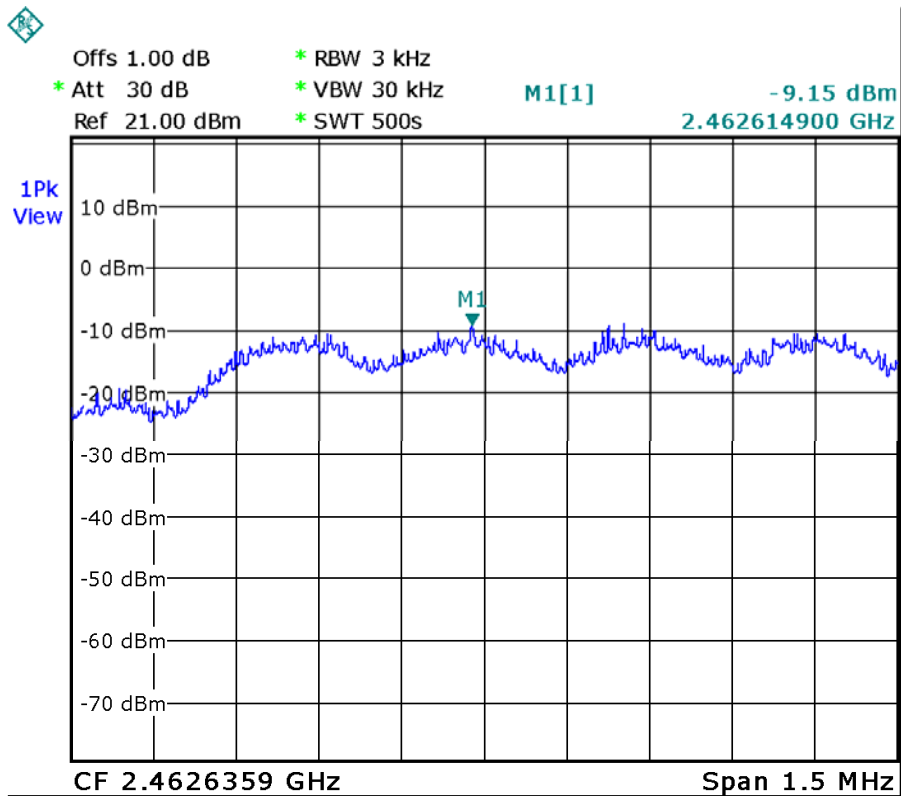


Date: 15.DEC.2010 18:58:34



EUT :	RF Module	Model Name :	J20H049
Temperature :	13°C	Relative Humidity :	64%
Test Voltage :	AC 120V/60Hz (System)		
Test Mode :	802.11n/20M/CH01, CH06, CH11 (APM6P-700096)		


Test Channel	Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	LIMIT (dBm)
CH01	2412	-11.68	0.07	8
CH06	2437	-9.77	0.11	8
CH11	2462	-10.7	0.09	8

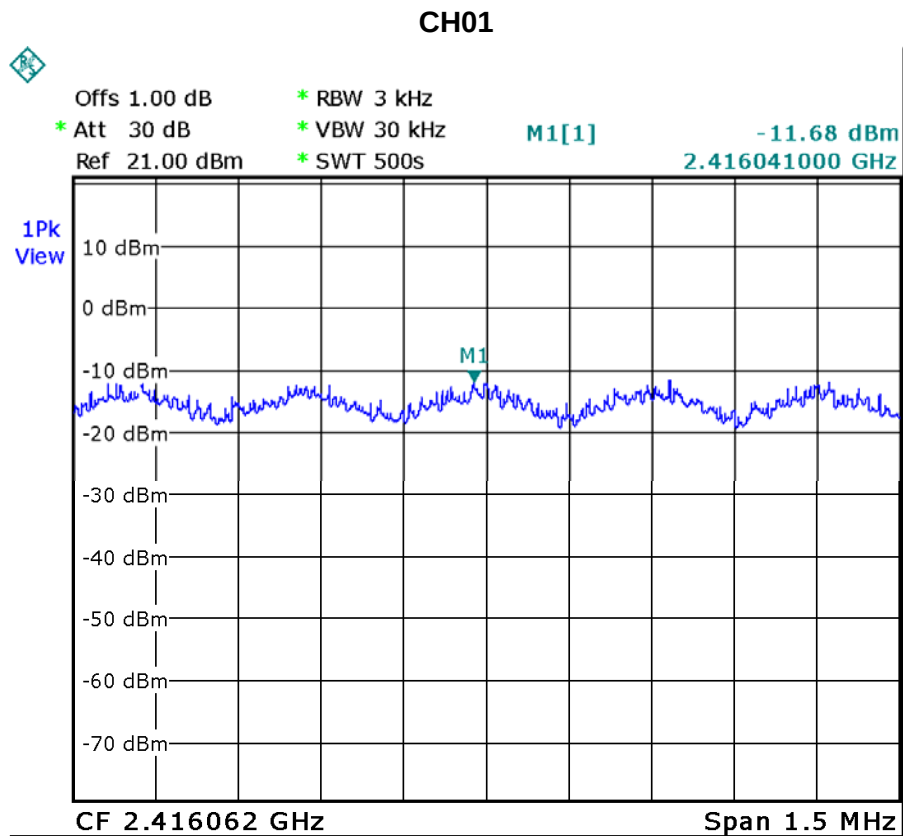

Date: 15.DEC.2010 19:22:46




CH06

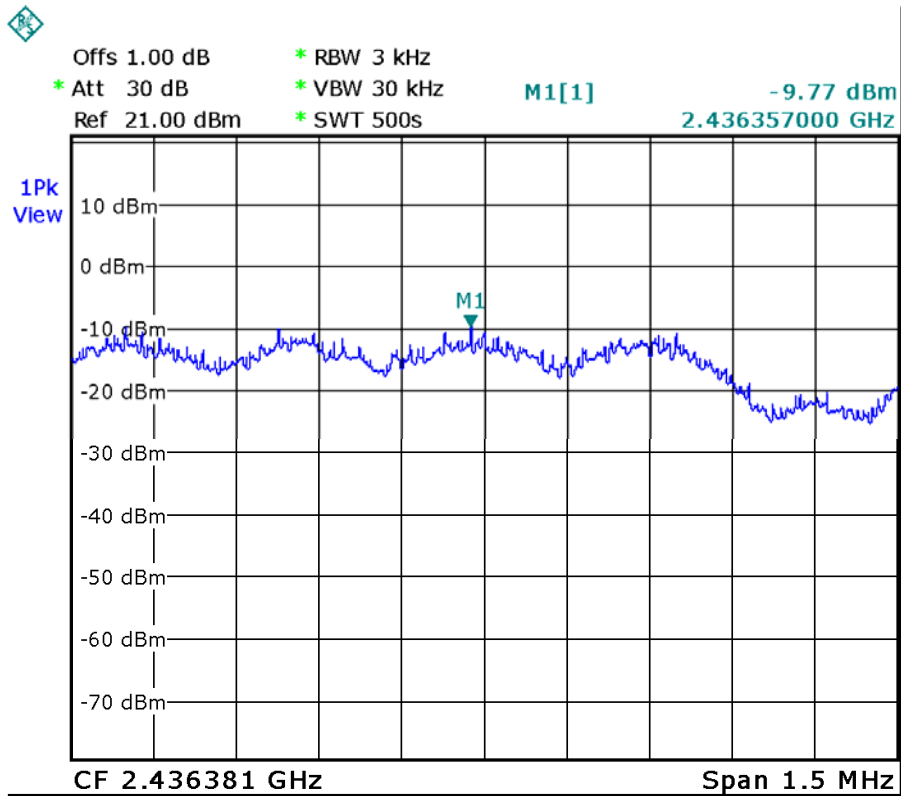

Date: 15.DEC.2010 19:46:12

CH11

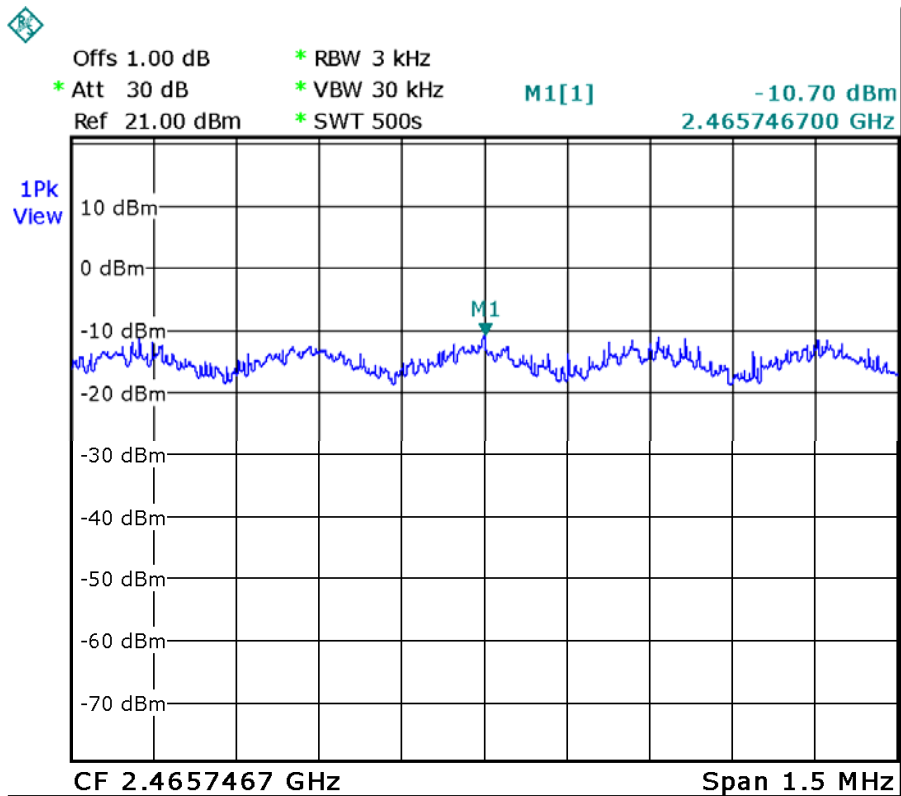

Date: 15.DEC.2010 19:56:44