


Contains RF module FCC ID: MCLJ27H010

Notes:


1."  " "  " logo' dimension not less than 5mm

2."  " logo' dimension not less than 3mm

VER.	MARK	DCR/ECH NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			06.10.25	First Release	Jian xia
01			06.11.18	Add Taiwan and Japan ID no.	Jian xia
02			06.11.24	Dele Japan ID "201 GZ 06215570"	



scale 2:1




scale 1:1

Notes:

1.貼於PCB板 2.文字顏色:黑色

MATERIAL MAKER	25# 白色特多龍商標紙 (冠郝)
MODEL NO.	HTKW25J
SURFACE MATERIAL THICKNESS (mm)	0.025±0.004
ADHSIVE NO.	areylic - #1
ADHSIVE THICKNESS (mm)	0.026±0.002
TOTAL THICKNESS (mm)	0.051±0.005
PEEL ADHESION (kg/25mm)	0.8
RELEASE FORCE (g/25mm)	10±5
HOLDING POWER (hr/kg/20mm2)	8
SERVICE TEMPERATURE (°C)	5~100

MATERIAL (SPEC.)										SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD		
Mylar#25(white)+Light(pp)										1/1			
FINISH										SHEET	PTT Label		
										1 OF 1			
Select										UNIT	MODEL		
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	mm	PART NO.		
0~6	0.05	0.05	0.10					0.20		A4	DESIGNED		
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20			jian xia		
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			APPROVED		
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30			Jun j cai		
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50					
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80					
DRAFT TOLERANCE ±0.2'													
CRITICAL DIM. MARK *													

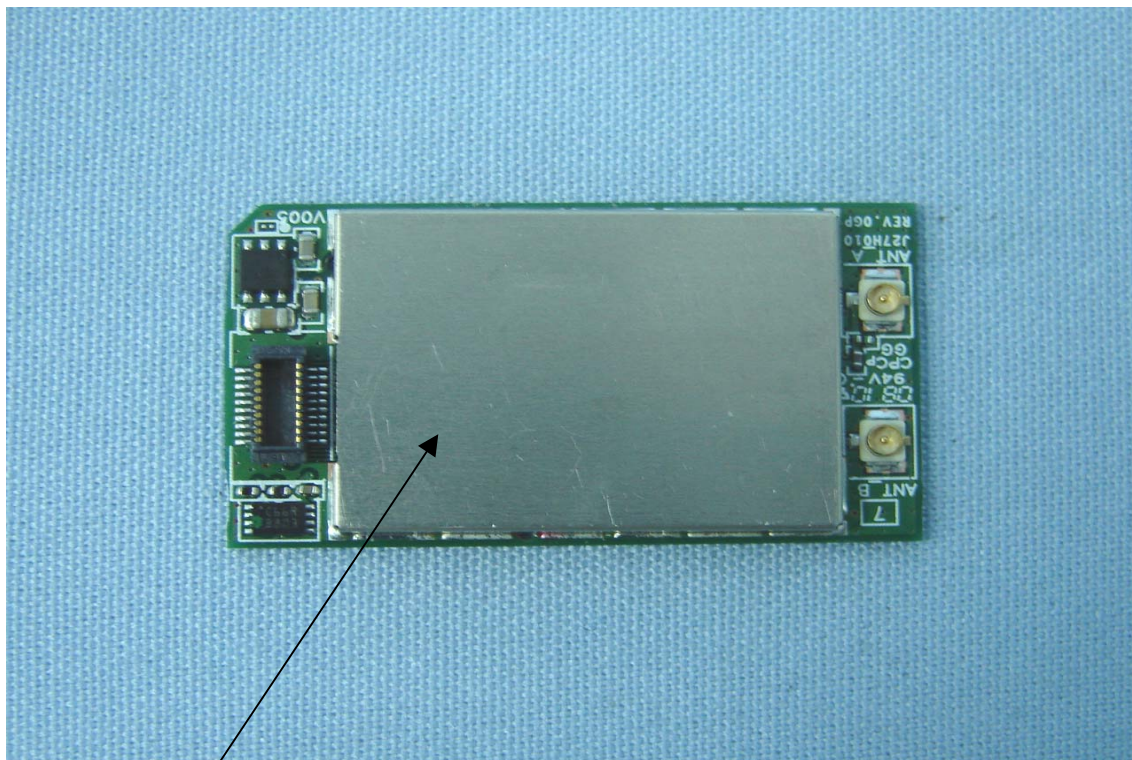

Label Location