

FCC 15 SUBPART C

EMI MEASUREMENT AND TEST REPORT

For

AMBIT Microsystems Corporation

4-1, Ming Shen Street, Tu Chen Industrial District.
Tu Chen, Taipei Hsien 236, Taiwan, R.O.C.

FCC ID: MCLT60H418

May 29, 2002

This Report Concerns: ☒ Original Report	Equipment Type: WLAN 802.11b Module
Test Engineer: Jeff Lee	
Test Date: May 18, 2002	
Reviewed By: Benjamin Jin	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	4
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	4
1.6 TEST EQUIPMENT LIST AND DETAILS.....	5
1.7 HOST SYSTEM CONFIGURATION LIST AND DETAILS	5
1.8 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
1.9 EXTERNAL I/O CABLING LIST AND DETAILS	6
2 - SYSTEM TEST CONFIGURATION.....	7
2.1 JUSTIFICATION	7
2.2 EUT EXERCISE SOFTWARE	7
2.3 SPECIAL ACCESSORIES.....	7
2.4 SCHEMATICS / BLOCK DIAGRAM	7
2.5 EQUIPMENT MODIFICATIONS	7
2.6 CONFIGURATION OF TEST SYSTEM.....	8
2.7 TEST SETUP BLOCK DIAGRAM	8
3 - SUMMARY OF TEST RESULTS.....	9
4 - PEAK OUTPUT POWER MEASUREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 MEASUREMENT PROCEDURE.....	10
4.3 MEASUREMENT RESULT	10
5 - SPURIOUS EMISSION.....	15
5.1 STANDARD APPLICABLE	15
5.2 MEASUREMENT PROCEDURE.....	15
5.3 MEASUREMENT DATA.....	15
6 - PEAK POWER SPECTRAL DENSITY	16
6.1 STANDARD APPLICABLE	16
6.2 MEASUREMENT PROCEDURE.....	16
6.3 TEST RESULTS	16
7 - 6 DB BANDWIDTH.....	17
7.1 STANDARD APPLICABLE	17
7.2 MEASUREMENT PROCEDURE.....	17
7.3 MEASUREMENT DATA.....	17
8 -100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	18
8.1 STANDARD APPLICABLE	18
8.2 MEASUREMENT PROCEDURE.....	18
8.3 TEST RESULTS	18
9 - ANTENNA REQUIREMENT.....	19
9.1 STANDARD APPLICABLE	19
9.2 ANTENNA CONNECTED CONSTRUCTION	19
10 - RF EXPOSURE.....	20
11 - SPURIOUS RADIATED EMISSION DATA	21
11.1 MEASUREMENT UNCERTAINTY	21
11.2 EUT SETUP.....	21
11.3 SPECTRUM ANALYZER SETUP	21
11.4 TEST PROCEDURE	22
11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	22

11.6 SUMMARY OF TEST RESULTS	23
12 - CONDUCTED EMISSIONS TEST DATA.....	27
12.1 MEASUREMENT UNCERTAINTY	27
12.2 EUT SETUP.....	27
12.3 SPECTRUM ANALYZER SETUP	27
12.4 TEST PROCEDURE	27
12.5 SUMMARY OF TEST RESULTS	28
12.6 CONDUCTED EMISSIONS TEST DATA	28
12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA	28
13 - PROCESSING GAIN.....	29
13.1 BRIEF EXPLANATIONS ON PROCESSING GAIN DATA	29
13.2 TEST DATA FOR PROCESSING GAIN	29
13.3 TEST SETUP - PROCESSING GAIN	29

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	AMBIT Microsystems Corporation
Model Name:	T60H418
Product Description:	WLAN 802.11b Module
Dimension:	2.4" L x 1.7" W approximately
FCC ID:	MCLT60H418
TX Frequency:	2400-2497MHz ISM Band
Max. Output Power:	8.20dBm (6.61mW)
Power Supply:	Get power from Host PC P/S, HP F1781S

** The test data in this test report was good for the test sample only. It may have deviation for other test samples.*

1.2 Objective

This type approval report is prepared on behalf of *Ambit Microsystems Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Spurious Radiated Emission, and processing gain.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 Meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI).

The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	12/6/02
HP	Spectrum Analyzer	8593B	2919A00242	12/20/02
HP	Amplifier	8349B	2644A02662	12/20/02
HP	Quasi-Peak Adapter	85650A	917059	12/6/02
HP	Amplifier	8447E	1937A01046	12/6/02
A.H. System	Horn Antenna	SAS0200/571	261	12/27/02
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/02
Com-Power	Biconical Antenna	AB-100	14012	11/2/02
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/02
Com-Power	LISN	LI-200	12208	12/20/02
Com-Power	LISN	LI-200	12005	12/20/02
BACL	Data Entry Software	DES1	0001	12/20/02

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

1.7 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
AMBIT	Motherboard	N/A	N/A	DoC
Samsung	LCD	LIN141XF	N/A	DoC
SONY	3.5" Floppy Drive	MPF920-F	N/A	DoC
HP	Power Sypply	HP F1781A	21104338CB	DoC
Toshiba	Hard Drive	N/A	N/A	DoC
QSI	CD-Rom	SCR-242	N/A	DoC

1.8 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
HP	Notebook PC	KT1	QCHCMF20800115	DoC
Citizen	Printer	LSP-10	5047999-82	DLK66TLSP-10
EVERX	Modem	EV-945	N/A	E3E5UVEV-945

1.9 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Shielded Serial Cable	1.5	Serial Port/Host	Modem
Shielded Printer Cable	2.0	Parallel Port/Host	Printer

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The host system was configured for testing in a typical fashion (as a normally used by a typical user).

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The test software, terminal.exe, provided by the customer, is started the Windows 98 terminal program under the Windows 98 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

1. Lines of Hs scroll across the notebook monitor.
2. The modem(s) receives Hs.
3. The printer output Hs.

This process is continuous throughout all tests.

2.3 Special Accessories

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC and their respective support equipment manufacturers. The host pc and other peripherals featured shielded metal connectors.


2.4 Schematics / Block Diagram

Appendix A contains a copy of the EUT's schematics diagram as reference.


2.5 Equipment Modifications

No modifications were made by BACL Corporation to ensure the EUT to comply with the applicable limits and requirements.

2.6 Configuration of Test System

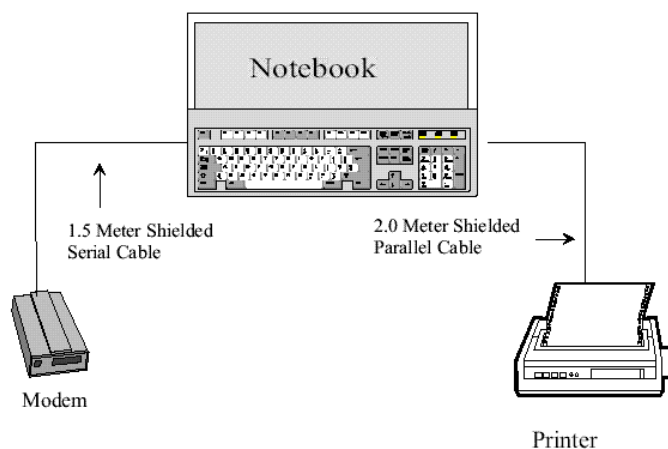

2.7 Test Setup Block Diagram

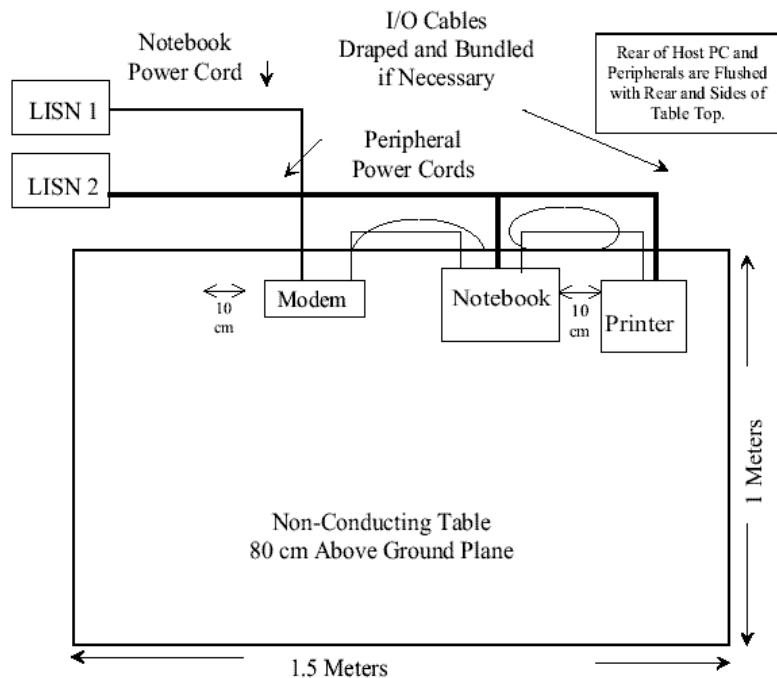

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.205	Restricted Bands	Compliant
§ 2.1091	RF Safety Requirements	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emission	Compliant
§15.209 (a)	Radiated Emission	Compliant
§15.209 (f)	Spurious Emission	Compliant
§15.247 (a) (2)	6 dB Bandwidth	Compliant
§15.247 (b) (2)	Peak Output Power	Compliant
§15.247 (b) (4)	RF Exposure	Compliant
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edges	Compliant
§15.247 (d)	Peak Power Spectral Density	Compliant
§15.247 (e)	Processing Gain	Compliant

4 - PEAK OUTPUT POWER MEASUREMENT

4.1 Standard Applicable

According to §15.247(b) (2), for all direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

4.2 Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

4.3 Measurement Result

Please refer to the attached pictures for more information.

Frequency (MHz)	Output Power in dBm	Output Power in mW	Standard	Result
Port 1 with B24-18 Antenna				
2413.50	7.55	5.69	$\leq 1W$	Compliant
2438.17	7.40	5.50	$\leq 1W$	Compliant
2464.20	7.19	5.24	$\leq 1W$	Compliant
Port 2 with B24-18 Antenna				
2413.50	7.56	5.70	$\leq 1W$	Compliant
2438.17	7.31	5.38	$\leq 1W$	Compliant
2464.20	7.17	5.21	$\leq 1W$	Compliant
Port 1 with B24-19 Antenna				
2413.50	7.32	5.40	$\leq 1W$	Compliant
2438.17	8.20	6.61	$\leq 1W$	Compliant
2464.20	7.19	5.24	$\leq 1W$	Compliant
Port 2 with B24-19 Antenna				
2413.50	7.37	5.46	$\leq 1W$	Compliant
2438.17	7.47	5.58	$\leq 1W$	Compliant
2464.20	8.12	6.49	$\leq 1W$	Compliant

4.4 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
Agilent	E4419b	GB40202891	4/8/03
Agilent	E4412a	US38486529	4/8/03









5 - SPURIOUS EMISSION

5.1 Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

5.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

5.3 Measurement Data

Please refer to the appending for more information.

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -42.00dB

-747MHz


AMBIT T60H418 B2

4-18 (1, LOW CH)

Δ MKR

-747 MHz

-42.00 dB

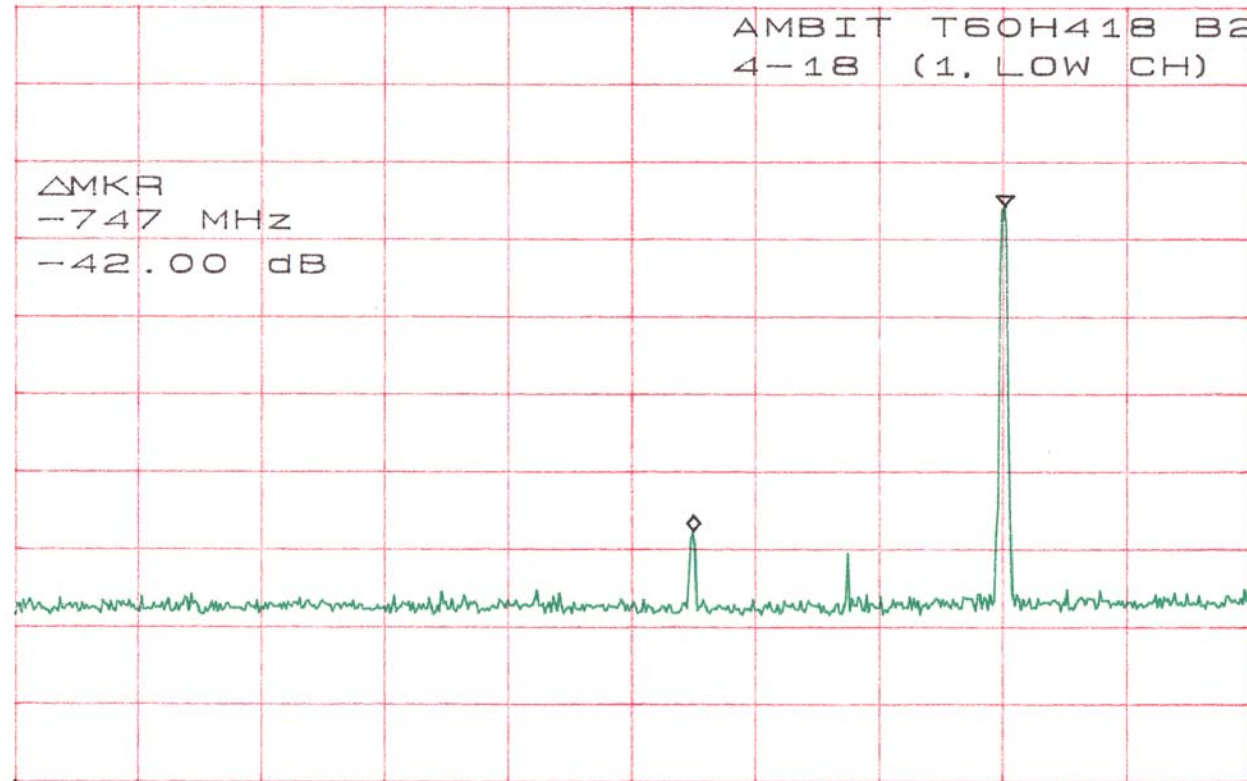

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

MKR -48.50dBm
24.05GHz

AMBIT T60H418 B2
4-18 (1, LOW CH)

MKR
24.05 GHz
-48.50 dBm

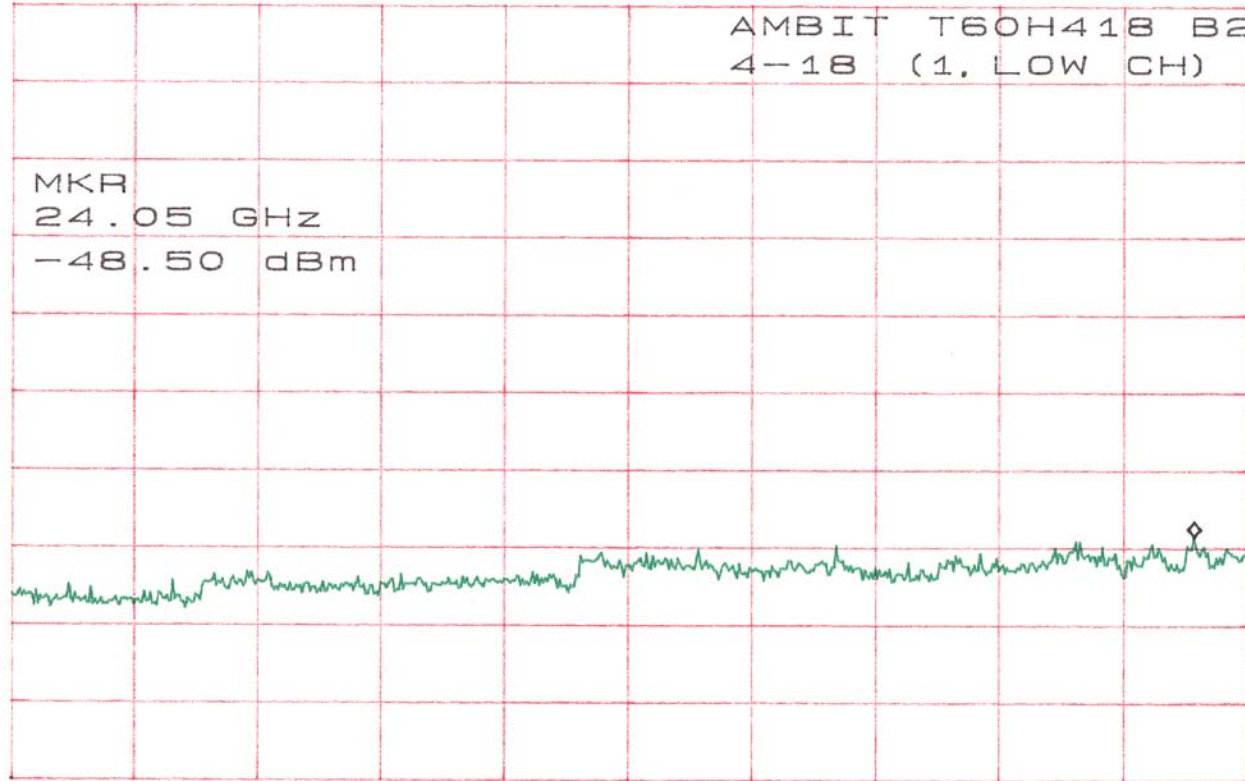

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -37.50dB
-747MHz

AMBIT T60H418 B2
4-18 (1, MID CH)

D Δ MKR
-747 MHz
-37.50 dB

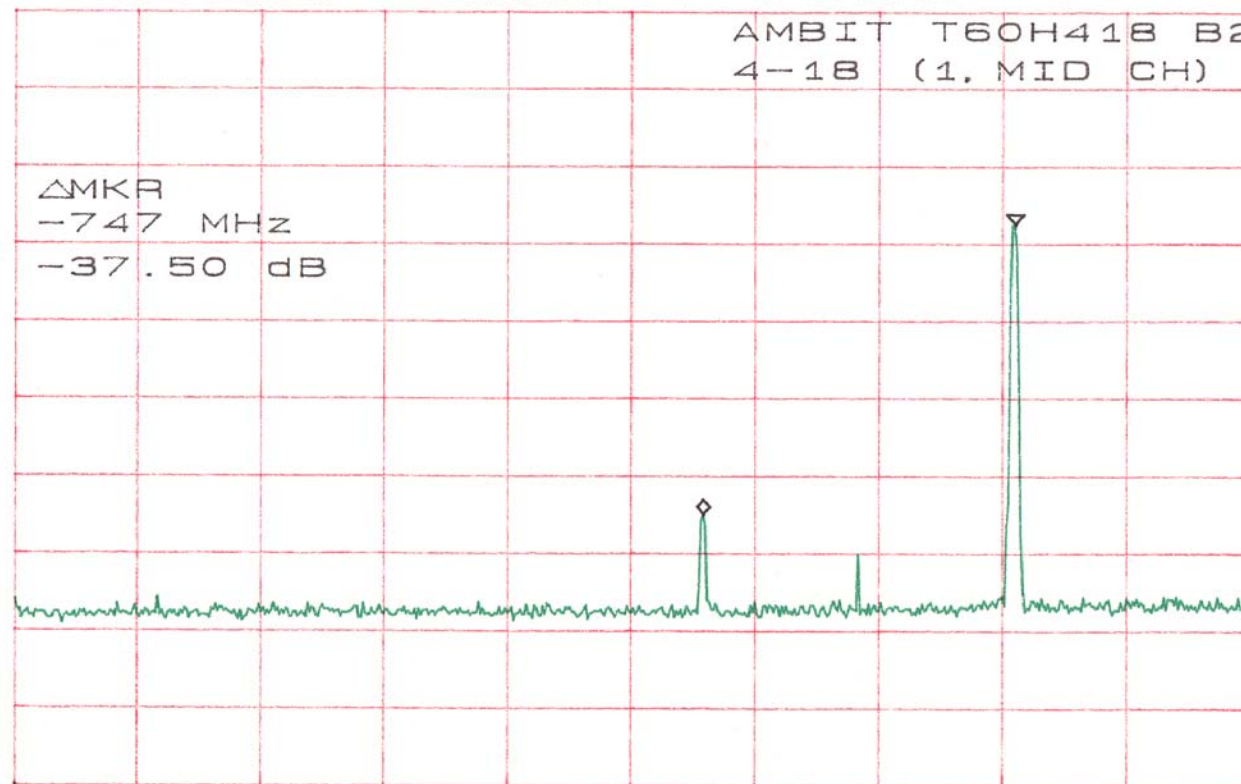

START 30MHz
*RBW 100kHz

VBW 100kHz

STOP 3.000GHz
*SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

MKR -49.17dBm
24.05GHz

AMBIT T60H418 B2
4-18 (1, MID CH)

D MKR
24.05 GHz
-49.17 dBm

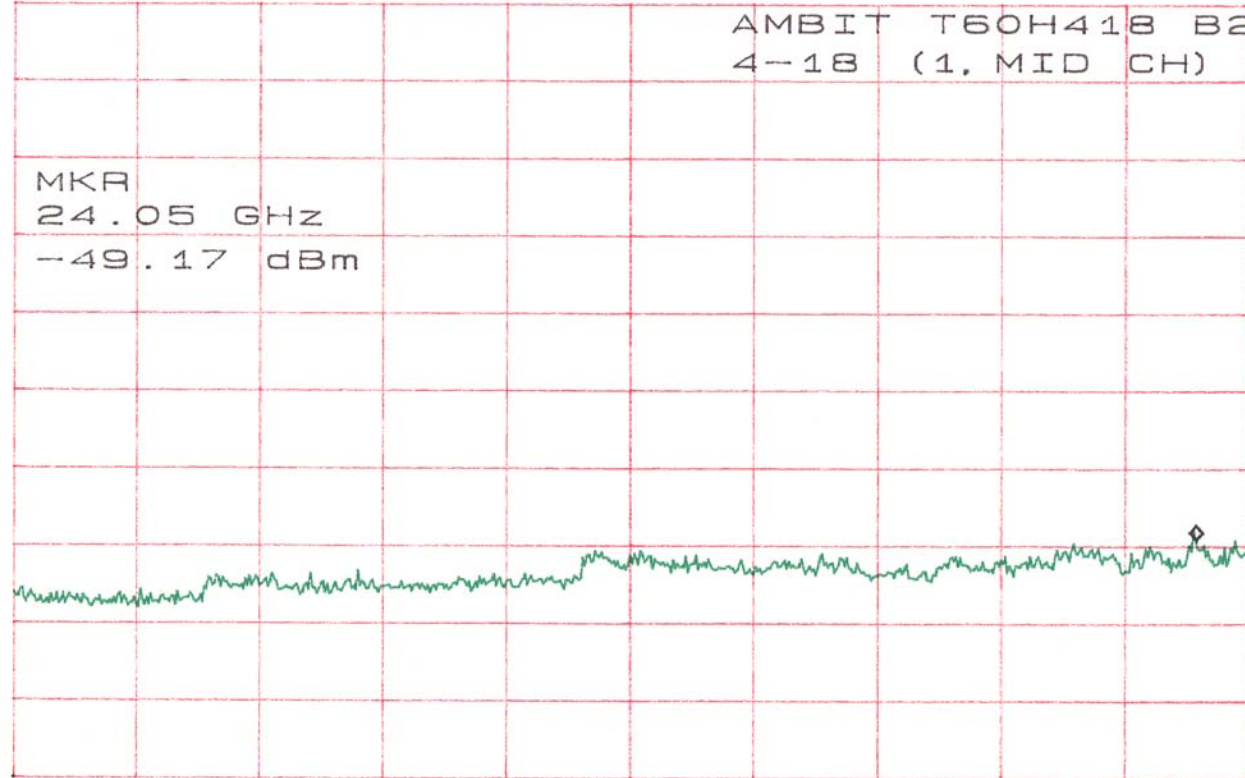

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -46.50dB
-747MHz

AMBIT T60H418 B2
4-18 (1, HIGH CH)

Δ MKR
-747 MHz
-46.50 dB

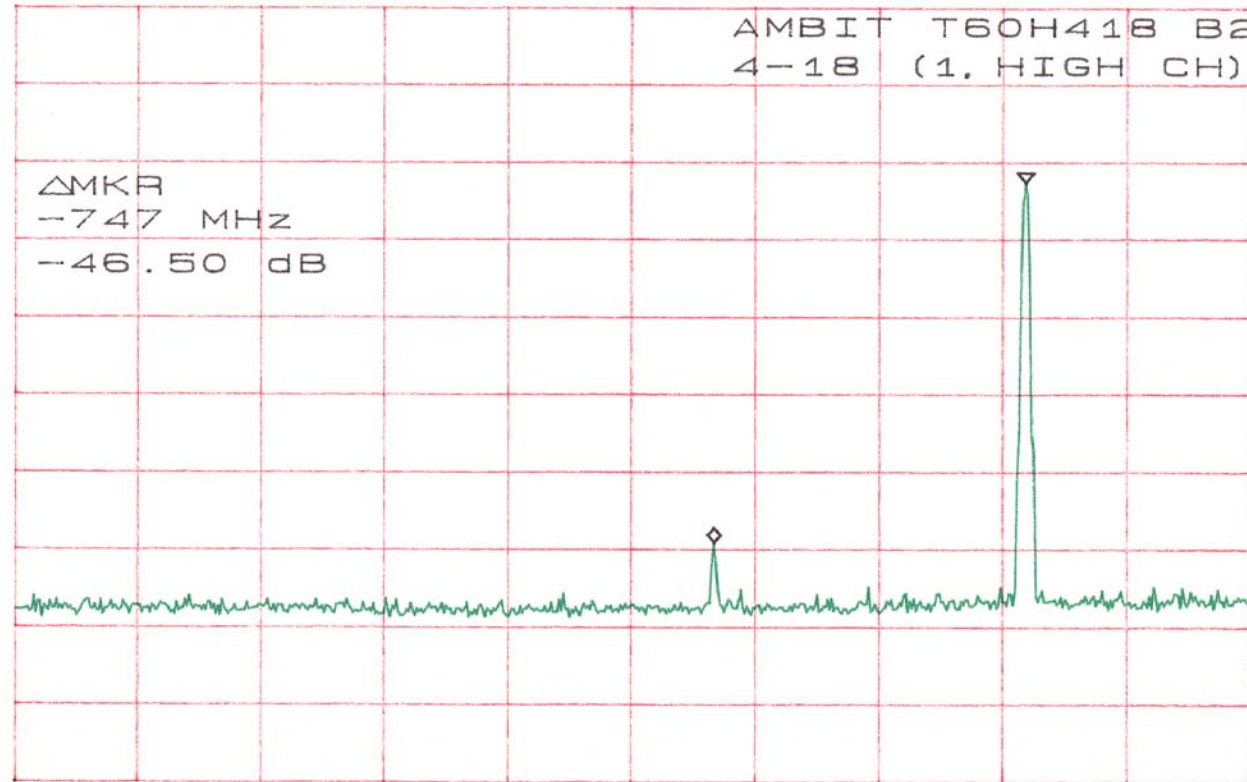

START 30MHz STOP 3.000GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

MKR -49.17dBm
15.36GHz

AMBIT T60H418 B2
4-18 (1, HIGH CH)

MKR
15.36 GHz
-49.17 dBm

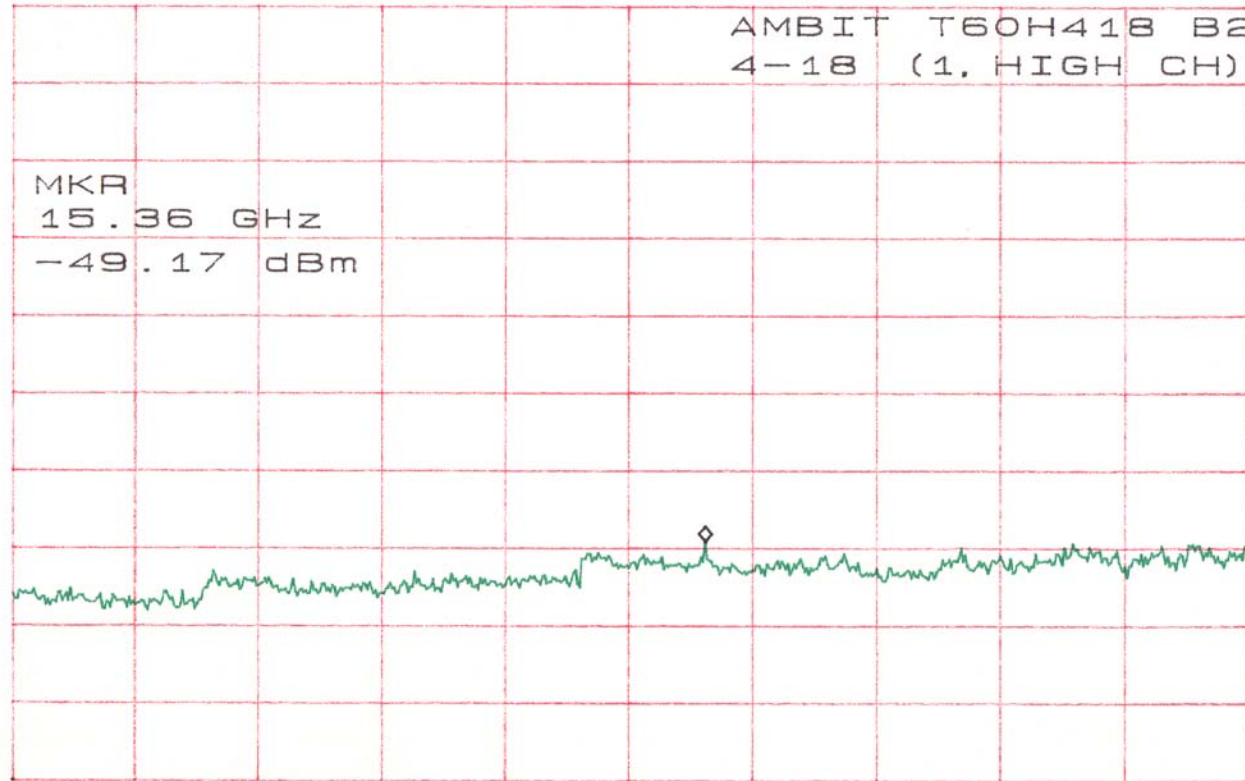

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec

ATTEN 30dB

RL 20.0dBm

10dB/

Δ MKR -41.00dB

-749MHz


AMBIT T60H418 B2

4-19 (1, LOW CH)

D

Δ MKR
-749 MHz

-41.00 dB

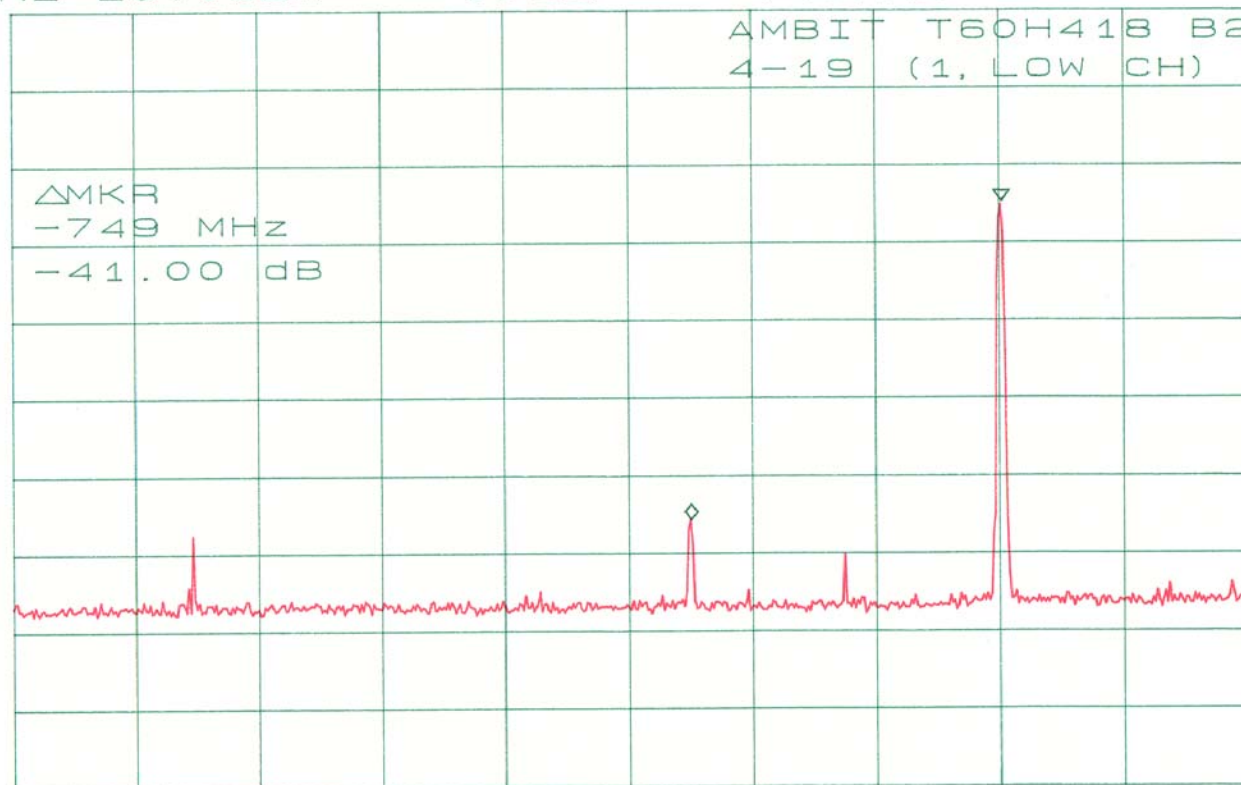

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -47.67dBm

21.92GHz

AMBIT T60H418 B2


4-19 (1. LOW CH)

D

MKR

21.92 GHz

-47.67 dBm

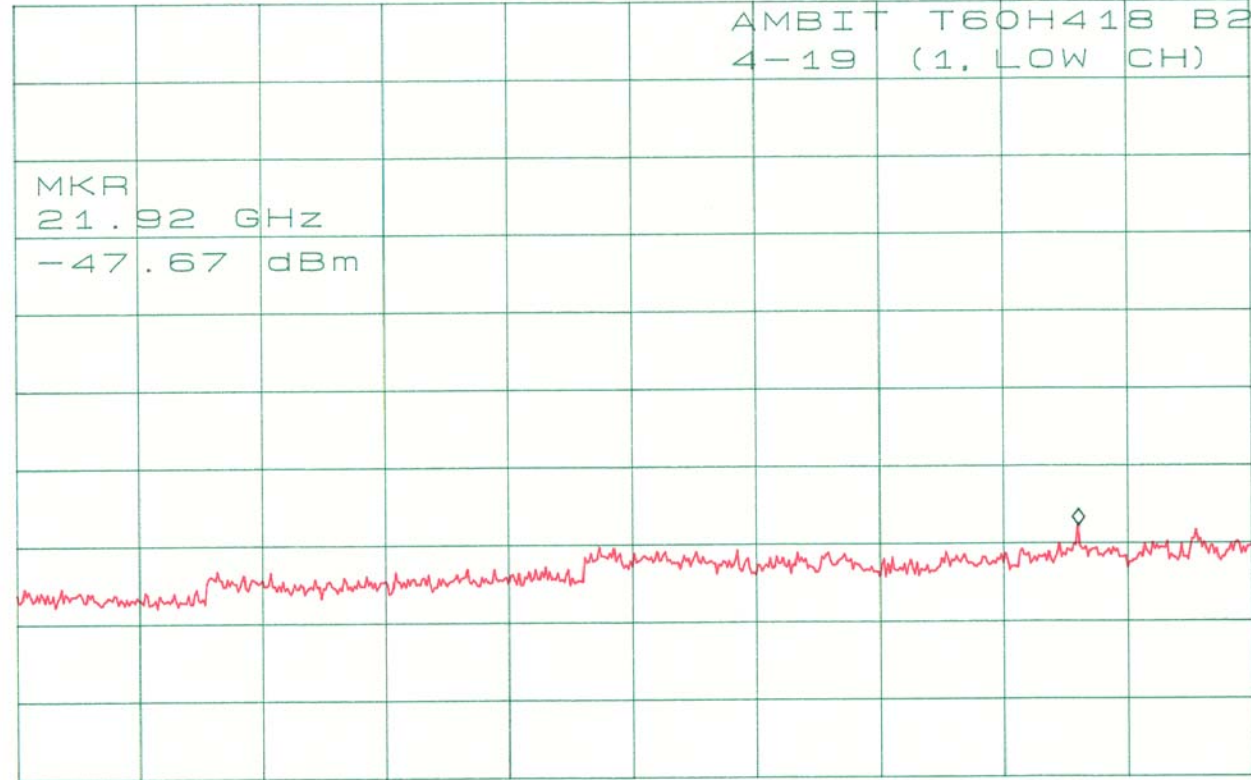

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec


ATTEN 30dB
RL 20.0dBm

10dB/

Δ MKR -39.50dB
-747MHz

AMBIT T60H418 B2
4-19 (1, MID CH)

Δ MKR
-747 MHz
-39.50 dB

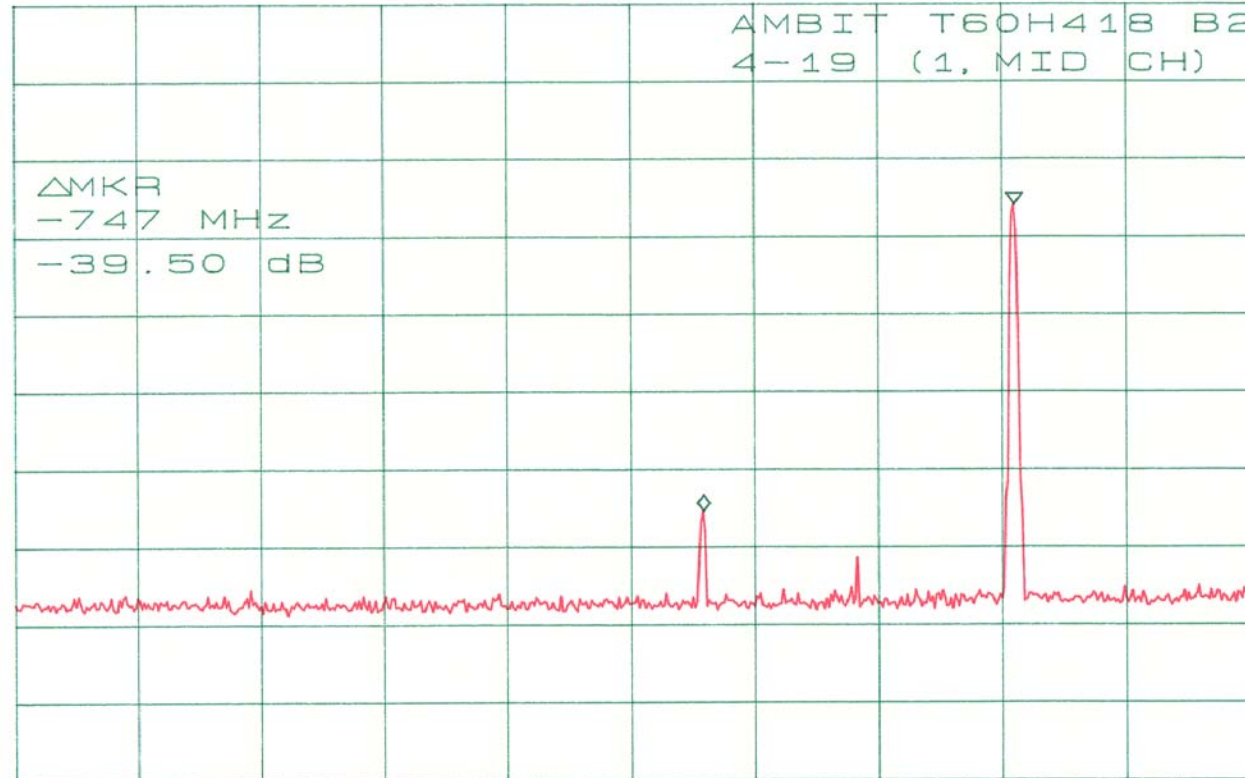

START 30MHz
*RBW 100KHz

VBW 100KHz

STOP 3.000GHz
*SWP 10.0sec

ATTEN 30dB

RL 20.0dBm

10dB/

MKR -48.50dBm

21.92GHz

AMBIT T60H418 B2


4-19 (1, MID CH)

D

MKR

21.92 GHz

-48.50 dBm

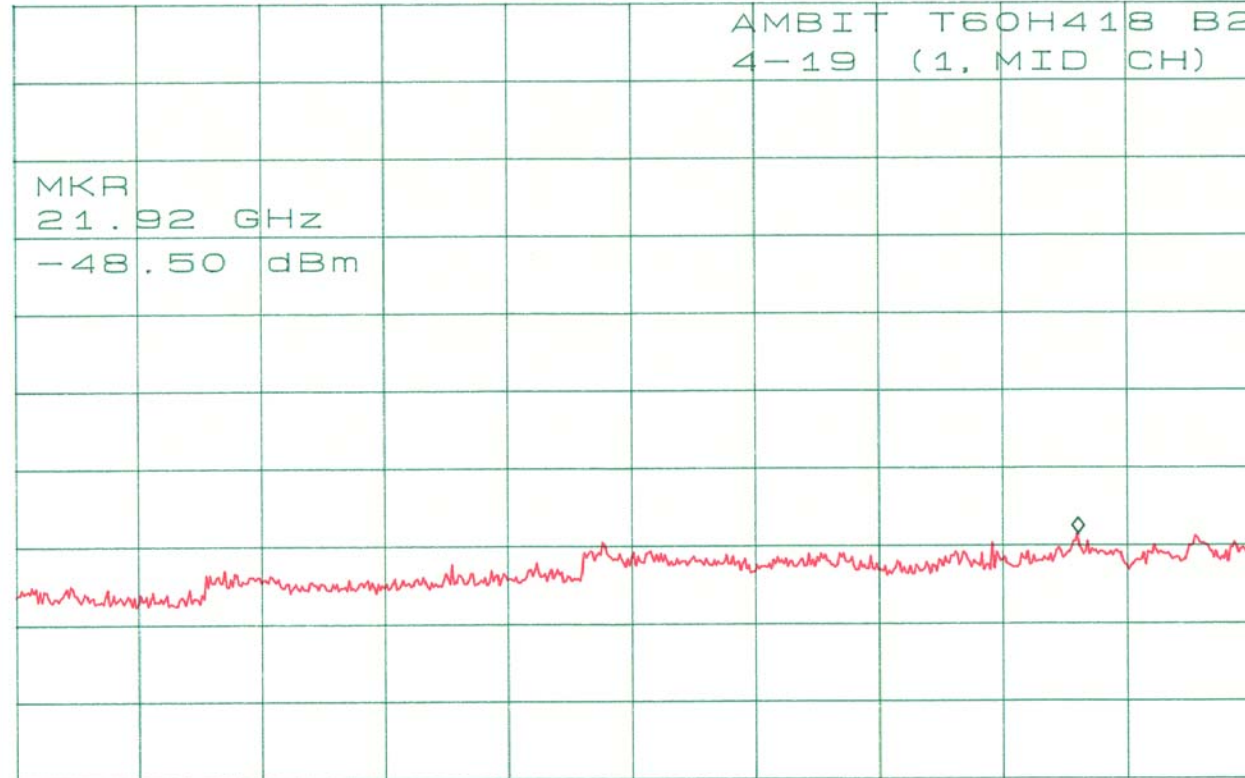

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

ATTEN 30dB

RL 20.0dBm


10dB/

Δ MKR -41.50dB

-747MHz

AMBIT T60H418 B2
4-19 (1. HIGH CH)

Δ MKR
-747 MHz
-41.50 dB

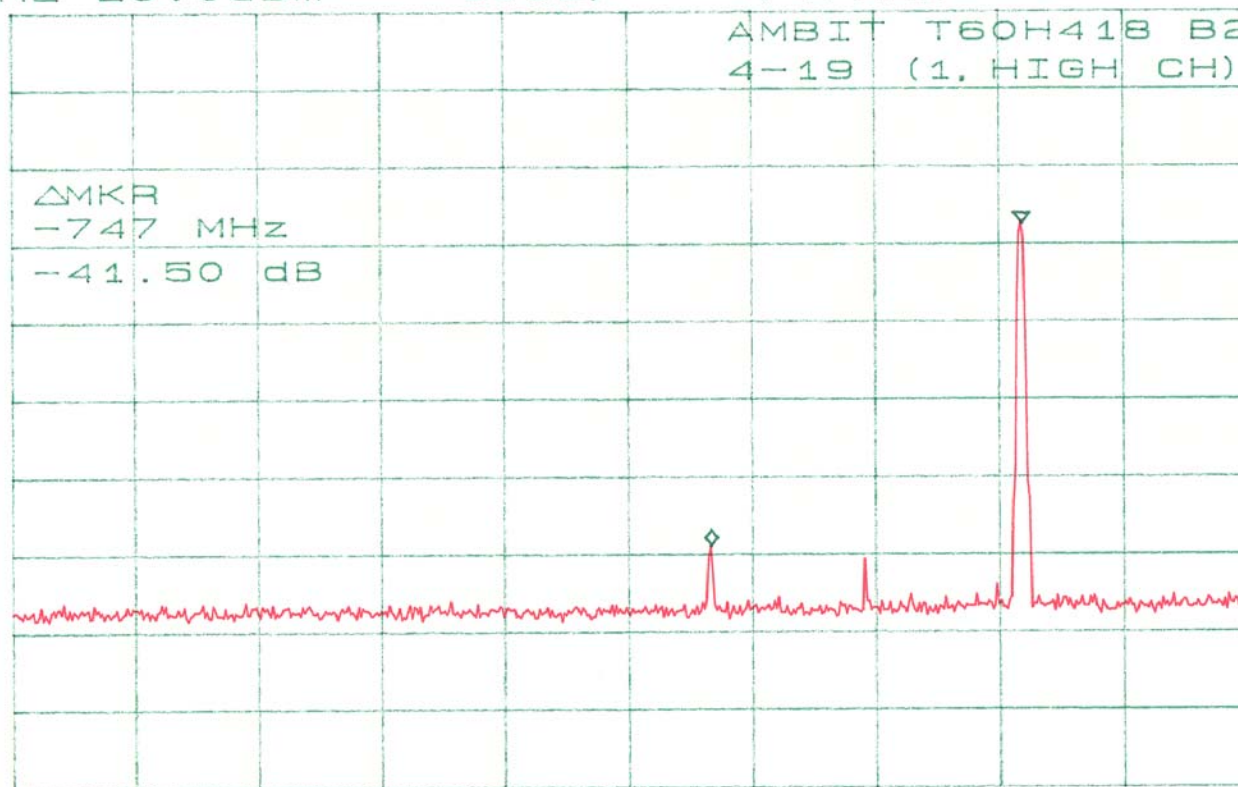

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

ATTEN 30dB

RL 20.0dBm

10dB/


MKR -49.00dBm

24.08GHz

AMBIT T60H418 B2

4-19 (1. HIGH CH)

MKR
24.08 GHz
-49.00 dBm

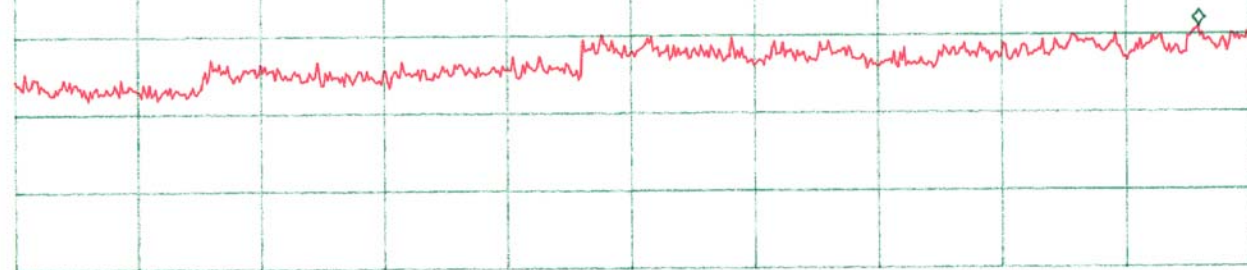

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec


*ATTEN 0dB
RL -10.0dBm

10dB/

Δ MKR -34.00dB
-376MHz

Δ MBIT T60H418 B2
4-18 (2, LOW CH)

Δ MKR
-376 MHz
-34.00 dB

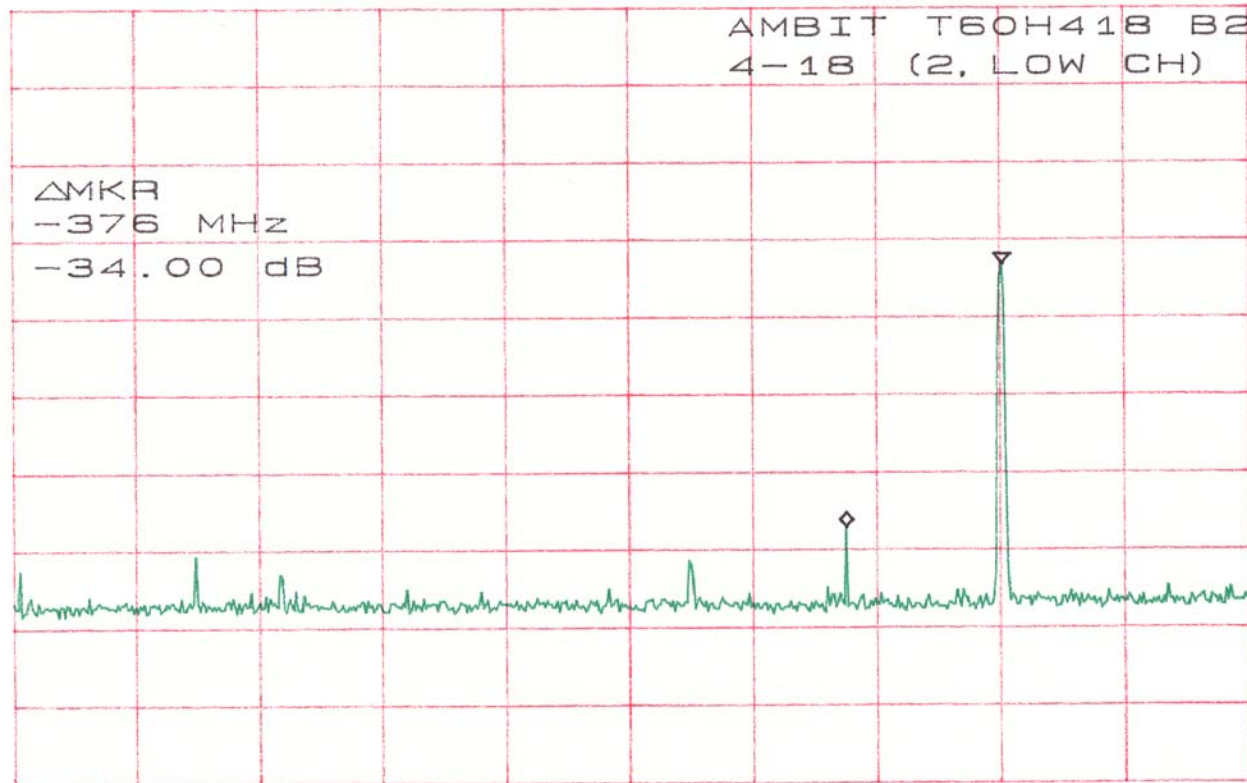

START 30MHz
*RBW 100kHz

STOP 3.000GHz
VBW 100kHz

*SWP 10.0sec


*ATTEN 0dB
RL -10.0dBm

10dB/

MKR -75.33dBm
4.06GHz

AMBIT T60H418 B2
4-18 (2, LOW CH)

MKR
4.06 GHz
-75.33 dBm

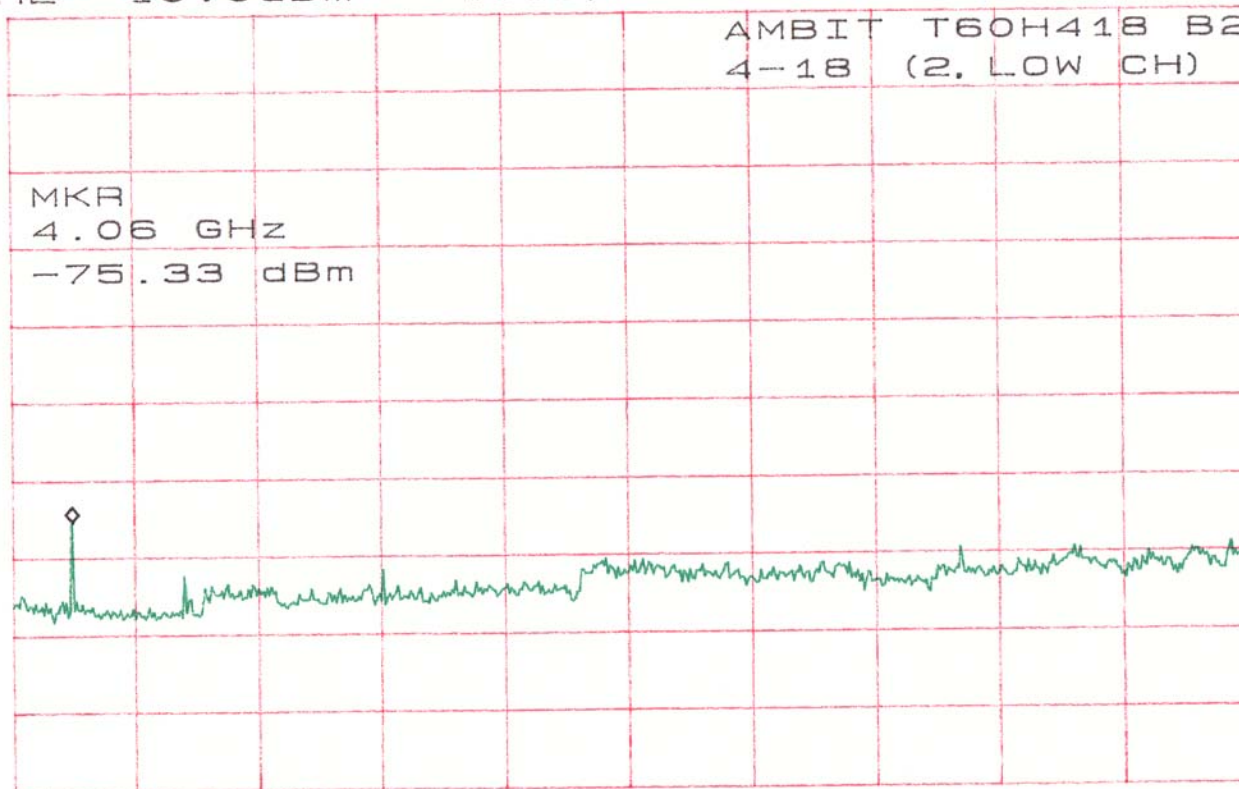

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec


*ATTEN 0dB
RL -10.0dBm

10dB/

Δ MKR -33.33dB
-376MHz

AMBIT T60H418 B2
4-18 (2. MID CH)

Δ MKR
-376 MHz
-33.33 dB

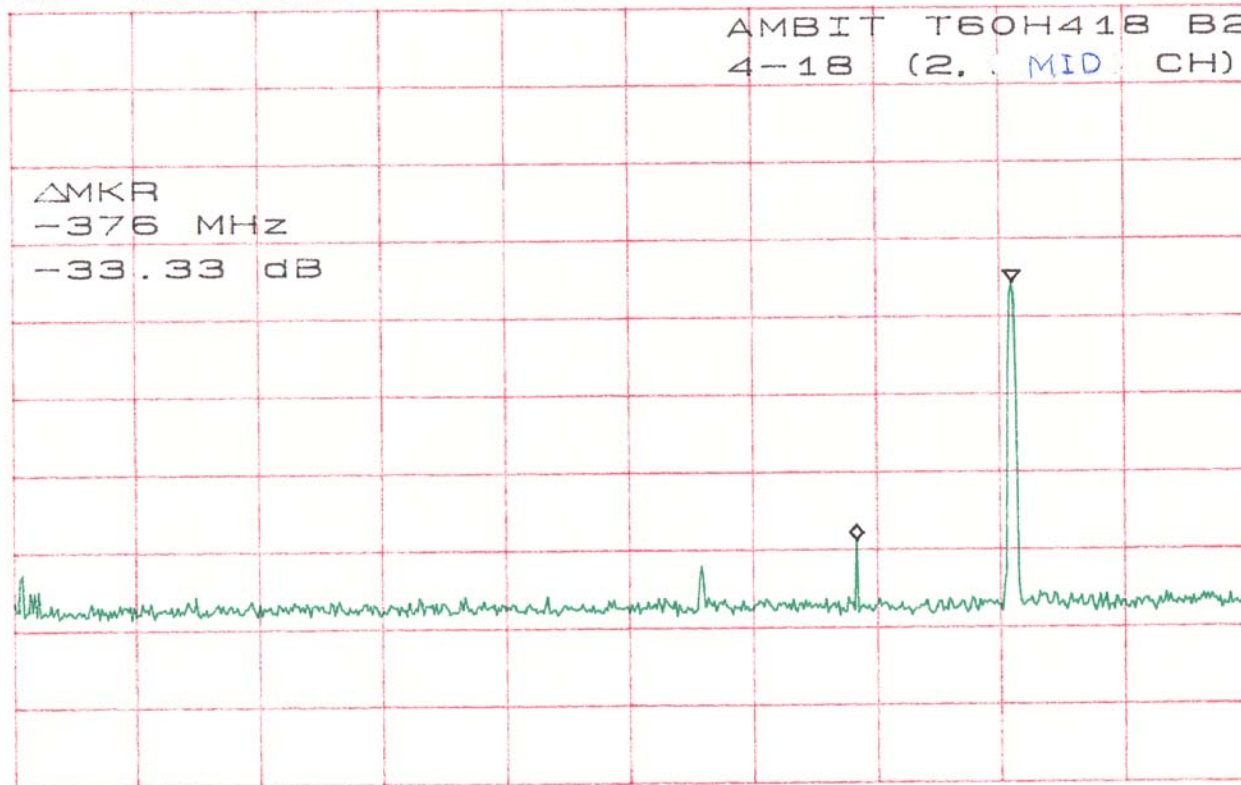

START 30MHz
*RBW 100kHz

VBW 100kHz

STOP 3.000GHz
*SWP 10.0sec

*ATTEN 0dB

RL -10.0dBm

10dB/

MKR -77.17dBm

4.10GHz


AMBIT T60H418 B2

4-18 (2. MID CH)

MKR

4.10 GHz

-77.17 dBm

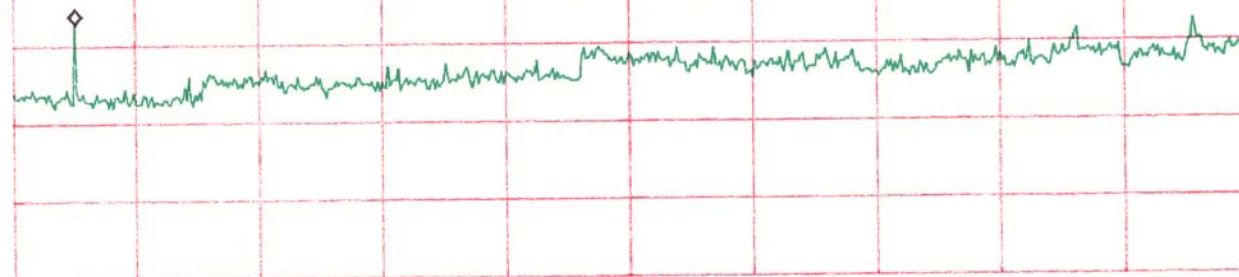

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

ATTEN 30dB

RL 20.0dBm


10dB/

Δ MKR -41.50dB

-747MHz

AMBIT T60H418 B2
4-19 (1. HIGH CH)

Δ MKR
-747 MHz
-41.50 dB

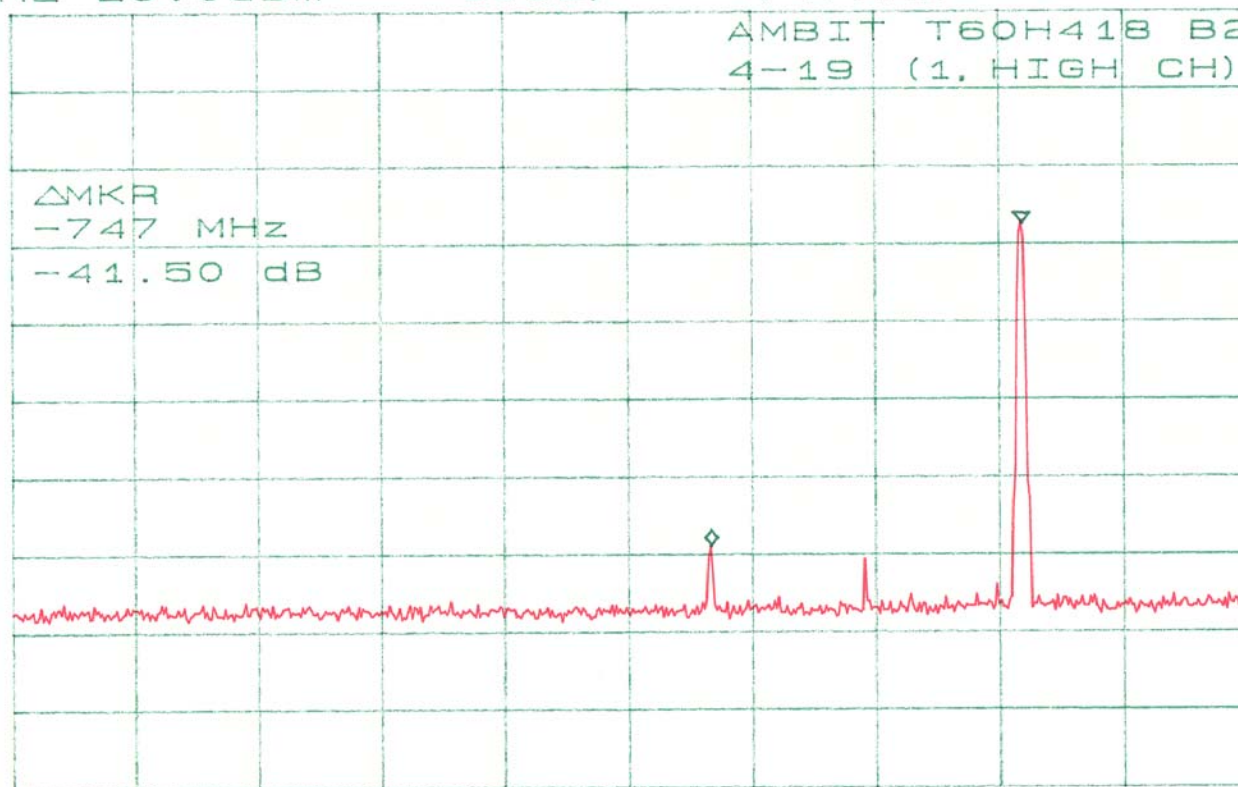

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec


*ATTEN 0dB
RL -10.0dBm

10dB/

MKR -74.50dBm
4.14GHz

AMBIT T60H418 B2
4-18 (2, HIGH CH)

MKR
4.14 GHz
-74.50 dBm

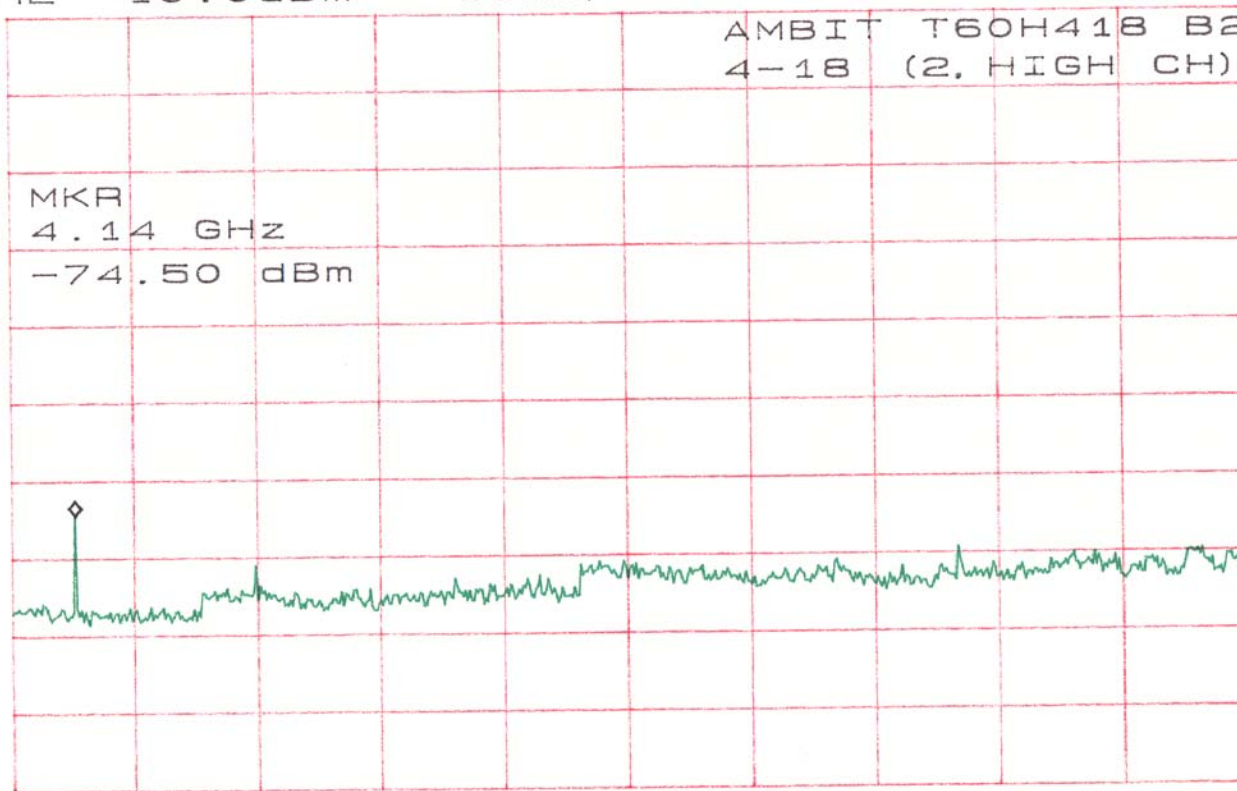

START 3.00GHz STOP 25.00GHz
*RBW 100kHz VBW 100kHz *SWP 10.0sec

*ATTEN 0dB


RL -10.0dBm

10dB/

Δ MKR -25.50dB

-2.208GHz

Δ MBIT T60H418 B2
4-19 (2, LOW CH)

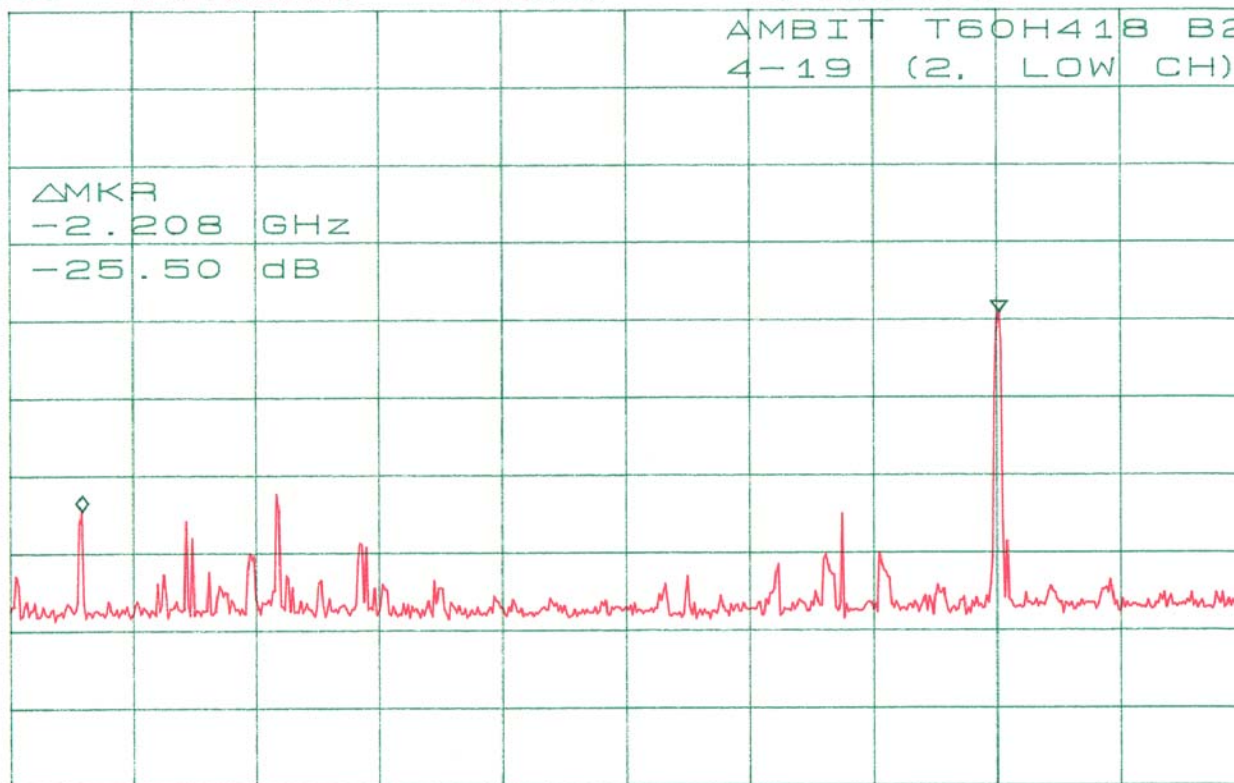

Δ MKR

-2.208 GHz

-25.50 dB

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

*ATTEN 0dB


RL -10.0dBm

10dB/

MKR -78.33dBm

4.06GHz

AMBIT T60H418 B2
4-19 (2, LOW CH)

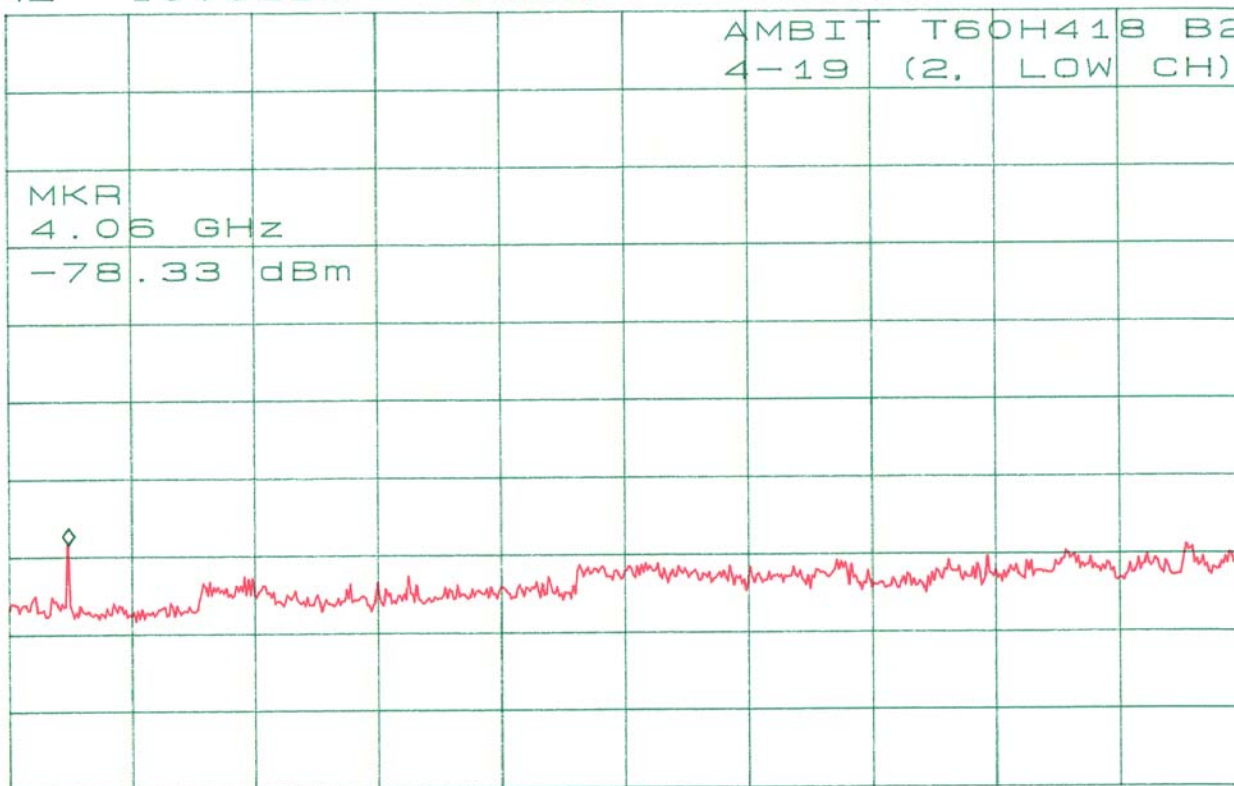

MKR

4.06 GHz

-78.33 dBm

START 3.00GHz

STOP 25.00GHz

*RBW 100KHz

VBW 100KHz

*SWP 10.0sec

*ATTEN 0dB

RL -10.0dBm

10dB/


Δ MKR -25.66dB

-2.232GHz

AMBIT T60H418 B2

4-19 (2, MID CH)

Δ MKR
-2.232 GHz
-25.66 dB

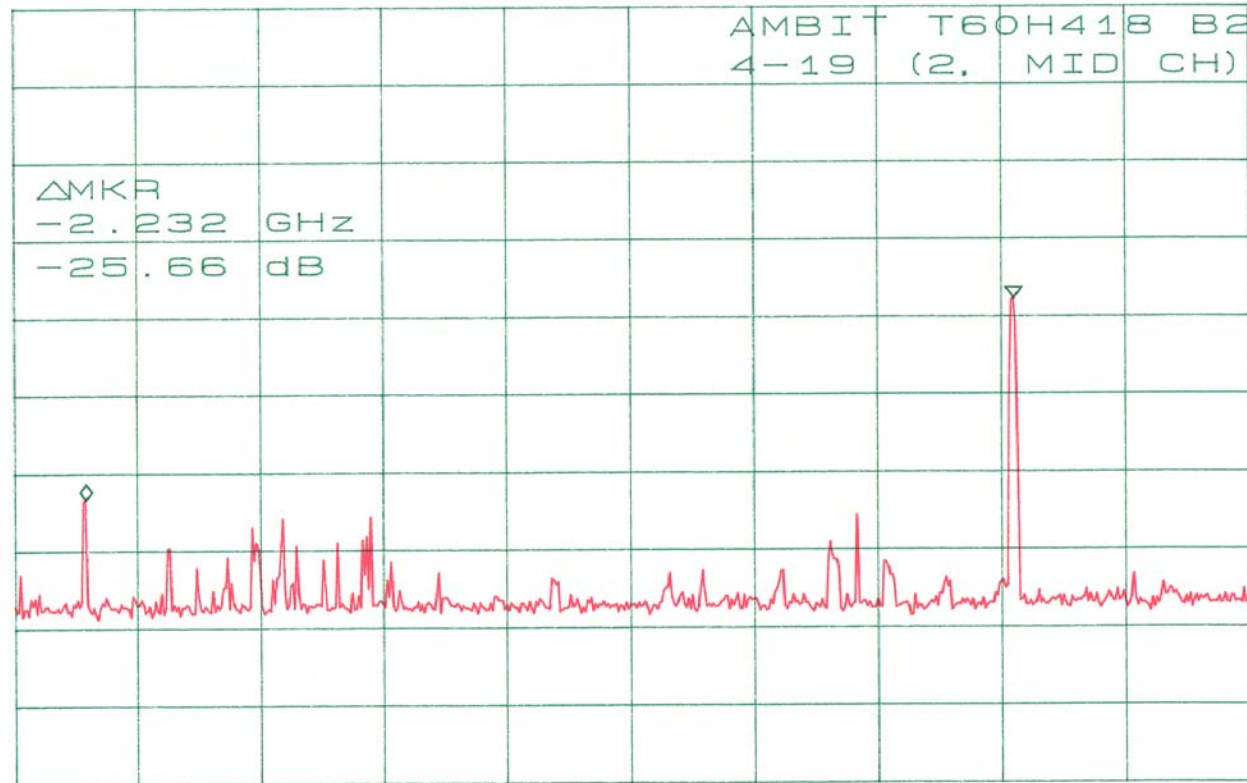

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

*ATTEN 0dB

RL -10.0dBm


10dB/

MKR -79.00dBm

4.10GHz

AMBIT T60H418 B2
4-19 (2, MID CH)

MKR
4.10 GHz
-79.00 dBm

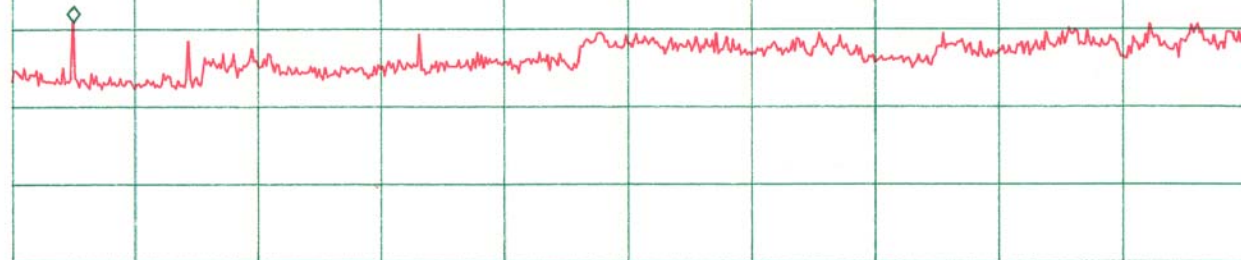

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

*ATTEN 0dB

RL -10.0dBm


10dB/

Δ MKR -21.00dB

-1.856GHz

AMBIT T60H418 B2
4-19 (2, HIGH CH)

Δ MKR
-1.856 GHz
-21.00 dB

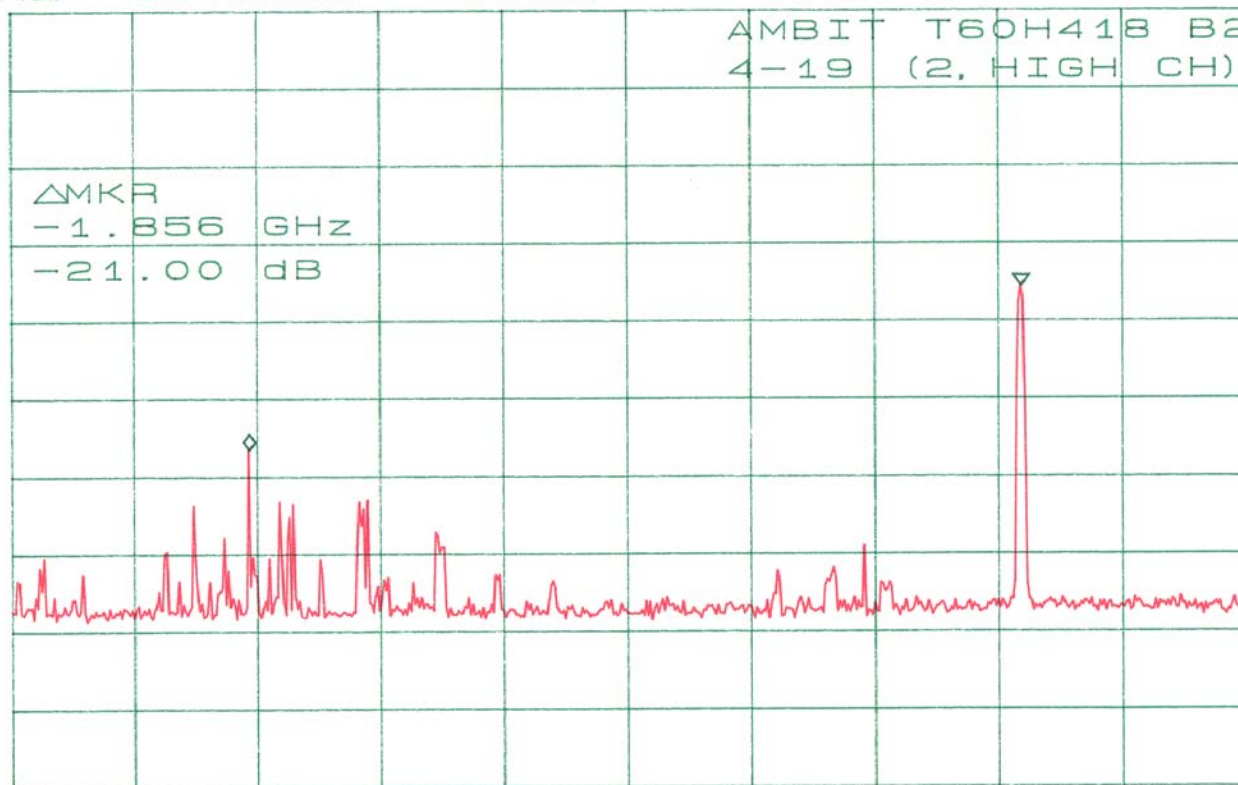

START 30MHz

STOP 3.000GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec

*ATTEN 0dB

RL -10.0dBm


10dB/

MKR -79.67dBm

21.96GHz

AMBIT T60H418 B2
4-19 (2. HIGH CH)

MKR
21.96 GHz
-79.67 dBm

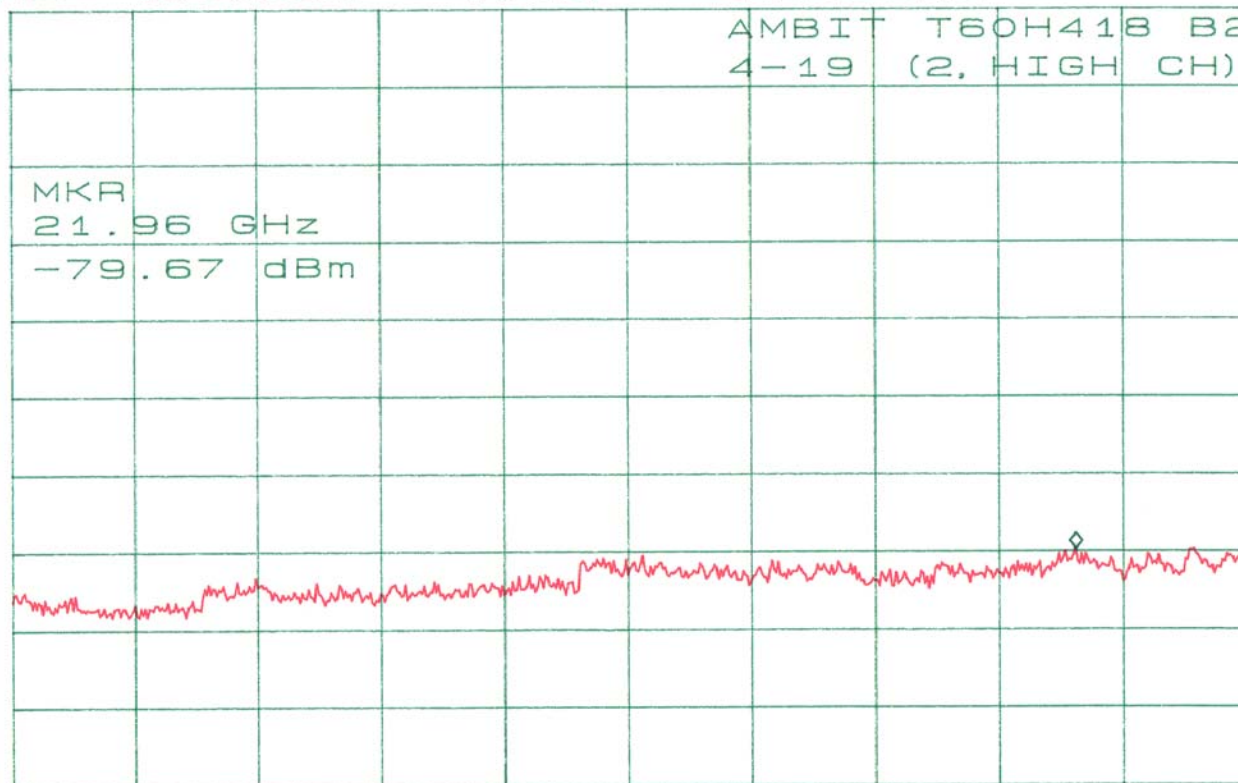

START 3.00GHz

STOP 25.00GHz

*RBW 100kHz

VBW 100kHz

*SWP 10.0sec