

Original placement/ RF solution

w/o docking


main

Frequency	Efficiency	Efficiency . dE	Peak Gain . dBi
2400	49.20	-3.08	0.24
2442	51.25	-2.90	1.43
2450	50.87	-2.94	1.48
2484	52.60	-2.79	2.19
2500	53.34	-2.73	2.27
4800	42.91	-3.67	0.26
5150	44.45	-3.52	-0.34
5250	48.74	-3.12	0.21
5350	51.20	-2.91	0.36
5470	52.43	-2.80	1.02
5600	53.81	-2.69	-0.07
5725	56.10	-2.51	-0.17
5850	57.16	-2.43	-0.08
5875	62.44	-2.05	0.78

aux

Frequency	Efficiency	Efficiency . dE	Peak Gain . dBi
2400	54.41	-2.64	0.77
2442	55.70	-2.54	1.06
2450	55.69	-2.54	1.16
2484	56.79	-2.46	1.35
2500	57.77	-2.38	1.25
4800	54.64	-2.62	-0.23
5150	58.04	-2.36	0.55
5250	55.17	-2.58	0.74
5350	58.55	-2.32	1.34
5470	56.89	-2.45	1.46
5600	54.51	-2.63	0.88
5725	53.59	-2.71	2.00
5850	50.86	-2.94	2.13
5875	54.84	-2.61	2.60

main w/ RF solution

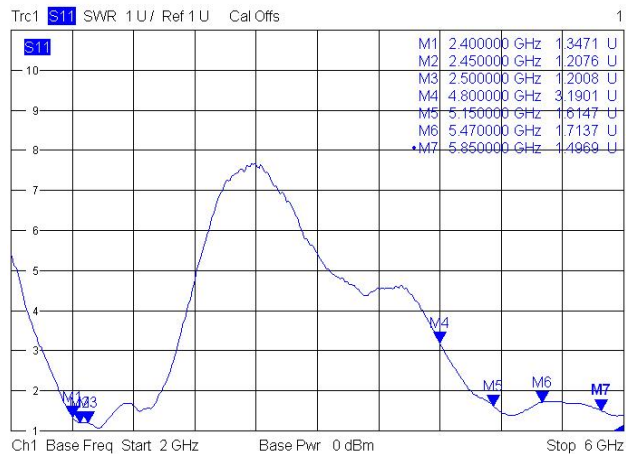

aux w/ RF solution

