

FCC SAR Test Report

Report No. : SA181204C54

Applicant : HON HAI Precision Ind. Co., Ltd.

Address : 5F-1, 5 Hsin-An Road Hsinchu, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C

Product : LTE M.2 Module

FCC ID : MCLT77W968

Brand : FOXCONN

Model No. : T77W968

Standards : FCC 47 CFR Part 2 (2.1093), IEEE C95.1:1992, IEEE Std 1528:2013
KDB 865664 D01 v01r04, KDB 865664 D02 v01r02
KDB 248227 D01 v02r02, KDB 447498 D01 v06, KDB 616217 D04 v01r02
KDB 941225 D01 v03r01, KDB 941225 D05 v02r05, KDB 941225 D05A v01r02

Sample Received Date : Dec. 05, 2018

Date of Testing : Jan. 26, 2019

Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location : No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :

Gina Liu

Gina Liu / Specialist

Approved By :

Gordon Lin

Gordon Lin / Assistant Manager



FCC Accredited No.: TW0003

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement Evaluation	7
3.1 Maximum Output Power	7
3.1.1 SAR Test Exclusion Evaluations	14
4. Antenna Location	17
5. Information of the Testing Laboratories	18

Appendix A. Photographs of EUT

Release Control Record

Report No.	Reason for Change	Date Issued
SA181204C54	Initial release	Feb. 20, 2019

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest SAR-1g Body (W/kg)	
PCB	WCDMA II	Not Required	
	WCDMA IV	Not Required	
	WCDMA V	Not Required	
	LTE 2 / 25	Not Required	
	LTE 4 / 66	Not Required	
	LTE 5 / 26	Not Required	
	LTE 7	Not Required	
	LTE 12 / 17	Not Required	
	LTE 13	Not Required	
	LTE 14	Not Required	
	LTE 30	Not Required	
	LTE 38 / 41	Not Required	
Equipment Class	Mode	Highest SAR-1g Body (W/kg)	
		9560NGW	QCNFA344A
DTS	2.4G WLAN	Not Required	Not Required
NII	5.3G WLAN	Not Required	Not Required
	5.6G WLAN	Not Required	Not Required
	5.8G WLAN	Not Required	Not Required
DSS	Bluetooth	Not Required	Not Required

Note:

1. The SAR criteria (**Head & Body: SAR-1g 1.6 W/kg, and Extremity: SAR-10g 4.0 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. This device supports both LTE band 12 and band 17. The frequency span of LTE band 12 can completely cover LTE band 17, and they has the same tune-up power. SAR was tested for LTE band 12 only.
3. This device supports both LTE band 66 and band 4. The frequency span of LTE band 66 can completely cover LTE band 4, and they has the same tune-up power. SAR was tested for LTE band 66 only.
4. This device supports both LTE band 25 and band 2. The frequency span of LTE band 25 can completely cover LTE band 2, and they has the same tune-up power. SAR was tested for LTE band 25 only.
5. This device supports both LTE band 41 and band 38. The frequency span of LTE band 41 can completely cover LTE band 38, and they has the same tune-up power. SAR was tested for LTE band 41 only.
6. This device supports both LTE band 26 and band 5. The frequency span of LTE band 26 can completely cover LTE band 5, and they has the same tune-up power. SAR was tested for LTE band 26 only.

2. Description of Equipment Under Test

EUT Type	LTE M.2 Module
FCC ID	MCLT77W968
Brand Name	FOXCONN
Model Name	T77W968
Tx Frequency Bands (Unit: MHz)	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 4 : 1710.7 ~ 1754.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 5 : 824.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 7 : 2502.5 ~ 2567.5 (BW: 5M, 10M, 15M, 20M) LTE Band 12 : 699.7 ~ 715.3 (BW: 1.4M, 3M, 5M, 10M) LTE Band 13 : 779.5 ~ 784.5 (BW: 5M, 10M) LTE Band 14 : 790.5 ~ 795.5 (BW: 5M, 10M) LTE Band 17 : 706.5 ~ 713.5 (BW: 5M, 10M) LTE Band 25 : 1850.7 ~ 1914.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M) LTE Band 26 : 814.7 ~ 848.3 (BW: 1.4M, 3M, 5M, 10M, 15M) LTE Band 30 : 2307.5 ~ 2312.5 (BW: 5M, 10M) LTE Band 38 : 2572.5 ~ 2617.5 (BW: 5M, 10M, 15M, 20M) LTE Band 41 : 2498.5 ~ 2687.5 (BW: 5M, 10M, 15M, 20M) LTE Band 66 : 1710.7 ~ 1779.3 (BW: 1.4M, 3M, 5M, 10M, 15M, 20M)
Uplink Modulations	WCDMA : QPSK LTE : QPSK, 16QAM, 64QAM
Maximum Tune-up Conducted Power (Unit: dBm)	Please refer to section 4.6.1 of this report
Antenna Type	Refer to Note as below
EUT Stage	Mass product

Note:

- The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product	Brand	Model
Portable Computer	DELL	P99G

- The WLAN modules (Brand: Intel, Model: 9560NGW / Brand: Qualcomm Atheros, Model: QCNFA344A) were installed in the End-product. The specification is listed as below.

WLAN module	
Tx Frequency Bands (Unit: MHz)	WLAN : 2412 ~ 2472, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type	WLAN/BT: PIFA Antenna (Peak Antenna Gain : 1.10 dBi for 2.4GHz, 1.01 dBi for 5GHz)
FCC ID	PD99560NG / PPD-QCNFA344AH

- The antenna information is listed as below.

Antenna Type	Manufacturer	Parts Number	Antenna Gain (dBi)													
			WCDMA I LTE 2	WCDMA IV LTE 4	WCDMA V LTE 5	LTE 7	LTE 12	LTE 13	LTE 14	LTE 17	LTE 25	LTE 26	LTE 30	LTE 38	LTE 41	LTE 66
PIFA	Ethertronics	Main Antenna: 5003084/DC33002731L	1.85	1.85	-0.74	1.16	1.52	1.52	1.52	1.52	1.85	-0.74	1.16	1.16	1.16	1.85

Antenna Type	Manufacturer	Parts Number	Antenna Gain (dBi)			
			2.400-2.500	5.150-5.350	5.470-5.725	5.725-5.850
PIFA	Ethertronics	5003086/DC33002730L	Main: 1.10 Aux.: 0.27	Main: 0.50 Aux.: 0.99	Main: 1.01 Aux.: 0.28	Main: -0.09 Aux.: -1.16

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory of End-product:

4 Cell battery	Brand Name	DELL
	Model Name	MXV9V
	Power Rating	7.6 Vdc, 60 Wh
	Type	Li-ion
3 Cell battery	Brand Name	DELL
	Model Name	OG74G
	Power Rating	11.4 Vdc, 42 Wh
	Type	Li-ion

3. SAR Measurement Evaluation

3.1 Maximum Output Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	WCDMA Band II	WCDMA Band IV	WCDMA Band V
RMC 12.2K	24.5	24.5	24.5
HSDPA / HSUPA / DC-HSDPA	24.5	24.5	24.5

Mode	LTE 2	LTE 4	LTE 5	LTE 7
QPSK	24.5	24.5	24.5	24.5
16QAM	23.5	23.5	23.5	23.5
64QAM	22.5	22.5	22.5	22.5

Mode	LTE 12	LTE 13	LTE 14	LTE 17
QPSK	24.5	24.5	24.5	24.5
16QAM	23.5	23.5	23.5	23.5
64QAM	22.5	22.5	22.5	22.5

Mode	LTE 25	LTE 26	LTE 30	LTE 38
QPSK	24.5	24.5	23.0	24.5
16QAM	23.5	23.5	22.0	23.5
64QAM	22.5	22.5	21.0	22.5

Mode	LTE 41	LTE 66
QPSK	24.5	24.5
16QAM	23.5	23.5
64QAM	22.5	22.5

<9560NGW>**<WLAN 2.4G>**

Mode	Channel	Frequency (MHz)	SISO Ant-0	SISO Ant-1
802.11b	1	2412	21.0	21.0
	6	2437	21.0	21.0
	11	2462	21.0	21.0
	12	2467	21.0	21.0
	13	2472	21.0	21.0
802.11g	1	2412	21.0	21.0
	6	2437	21.0	21.0
	11	2462	21.0	21.0
	12	2467	21.0	21.0
	13	2472	21.0	21.0
802.11n HT20	1	2412	21.0	21.0
	6	2437	21.0	21.0
	11	2462	21.0	21.0
	12	2467	21.0	21.0
	13	2472	21.0	21.0
802.11n HT40	3	2422	16.0	16.0
	6	2437	16.0	16.0
	9	2452	16.0	16.0
	10	2457	16.0	16.0
	11	2462	16.0	16.0

<WLAN 2.4G>

Mode	Channel	Frequency (MHz)	MIMO Ant-0	MIMO Ant-1	MIMO Ant-0+1
802.11b	1	2412	21.0	21.0	24.0
	6	2437	21.0	21.0	24.0
	11	2462	21.0	21.0	24.0
	12	2467	19.0	19.0	22.0
	13	2472	18.0	18.0	21.0
802.11g	1	2412	21.0	21.0	24.0
	6	2437	21.0	21.0	24.0
	11	2462	21.0	21.0	24.0
	12	2467	21.0	21.0	24.0
	13	2472	21.0	21.0	24.0
802.11n HT20	1	2412	21.0	21.0	24.0
	6	2437	21.0	21.0	24.0
	11	2462	21.0	21.0	24.0
	12	2467	21.0	21.0	24.0
	13	2472	21.0	21.0	24.0
802.11n HT40	3	2422	16.0	16.0	19.0
	6	2437	16.0	16.0	19.0
	9	2452	16.0	16.0	19.0
	10	2457	16.0	16.0	19.0
	11	2462	16.0	16.0	19.0

<WLAN 5.2G>

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11a	36	5180	21.5	21.5	24.5
	40	5200	21.5	21.5	24.5
	44	5220	21.5	21.5	24.5
	48	5240	21.5	21.5	24.5
802.11n (HT20)	36	5180	21.5	21.5	24.5
	40	5200	21.5	21.5	24.5
	44	5220	21.5	21.5	24.5
	48	5240	21.5	21.5	24.5
802.11n (HT40)	38	5190	18.5	18.5	21.5
	46	5230	18.5	18.5	21.5
802.11ac (VHT80)	42	5210	18.5	18.0	21.0
802.11ac (VHT160)	50	5250	14.0	14.0	17.0

<WLAN 5.3G>

Mode	Channel	Frequency (MHz)	SISO Ant-0	SISO Ant-1	MIMO Ant-0+1
802.11a	52	5260	21.5	21.5	24.5
	56	5280	21.5	21.5	24.5
	60	5300	21.5	21.5	24.5
	64	5320	18.0	18.0	21.0
802.11n (HT20)	52	5260	21.5	21.5	24.5
	56	5280	21.5	21.5	24.5
	60	5300	21.5	21.5	24.5
	64	5320	21.5	21.5	24.5
802.11n (HT40)	54	5270	19.0	19.0	22.0
	62	5310	19.0	19.0	22.0
802.11ac (VHT80)	58	5290	16.0	15.5	18.5

<WLAN 5.3G>

Mode	Channel	Frequency (MHz)	MIMO Ant-0	MIMO Ant-1	MIMO Ant-0+1
802.11a	52	5260	21.5	21.5	24.5
	56	5280	21.5	21.5	24.5
	60	5300	21.5	21.5	24.5
	64	5320	18.0	18.0	21.0
802.11n (HT20)	52	5260	21.5	21.5	24.5
	56	5280	21.5	21.5	24.5
	60	5300	21.5	21.5	24.5
	64	5320	21.5	21.5	24.5
802.11n (HT40)	54	5270	19.0	19.0	22.0
	62	5310	19.0	19.0	22.0
802.11ac (VHT80)	58	5290	15.5	15.5	18.5

<WLAN 5.6G>

Mode	Channel	Frequency (MHz)	SISO Ant-0	SISO Ant-1
802.11a	100	5500	21.0	21.5
	116	5580	21.0	21.5
	132	5660	21.0	21.5
	140	5700	21.0	21.5
	144	5720	21.0	21.5
802.11n (HT20)	100	5500	21.0	21.5
	116	5580	21.0	21.5
	132	5660	21.0	21.5
	140	5700	21.0	21.5
	144	5720	21.0	21.5
802.11n (HT40)	102	5510	21.5	21.5
	110	5550	21.5	21.5
	134	5670	21.5	21.5
	142	5710	21.5	21.5
802.11ac (VHT80)	106	5530	21.0	21.0
	138	5690	21.0	21.0
802.11ac (VHT160)	114	5570	15.0	15.0

Mode	Channel	Frequency (MHz)	MIMO Ant-0	MIMO Ant-1	MIMO Ant-0+1
802.11a	100	5500	21.5	21.5	24.5
	116	5580	21.5	21.5	24.5
	132	5660	21.5	21.5	24.5
	140	5700	21.5	21.5	24.5
	144	5720	21.5	21.5	24.5
802.11n (HT20)	100	5500	21.5	21.5	24.5
	116	5580	21.5	21.5	24.5
	132	5660	21.5	21.5	24.5
	140	5700	21.5	21.5	24.5
	144	5720	21.5	21.5	24.5
802.11n (HT40)	102	5510	21.5	21.5	24.5
	110	5550	21.5	21.5	24.5
	134	5670	21.5	21.5	24.5
	142	5710	21.5	21.5	24.5
802.11ac (VHT80)	106	5530	21.0	21.0	24.0
	138	5690	21.0	21.0	24.0
802.11ac (VHT160)	114	5570	15.0	15.0	18.0

<WLAN 5.8G>

Mode	Channel	Frequency (MHz)	SISO Ant-0	SISO Ant-1
802.11a	149	5745	21.0	21.5
	153	5765	21.0	21.5
	157	5785	21.0	21.5
	161	5805	21.0	21.5
	165	5825	21.0	21.5
802.11n (HT20)	149	5745	21.5	21.5
	153	5765	21.5	21.5
	157	5785	21.5	21.5
	161	5805	21.5	21.5
	165	5825	21.5	21.5
802.11n (HT40)	151	5755	20.0	20.0
	159	5795	20.0	20.0
802.11ac (VHT80)	155	5775	20.5	20.5

Mode	Channel	Frequency (MHz)	MIMO Ant-0	MIMO Ant-1	MIMO Ant-0+1
802.11a	149	5745	21.5	21.5	24.5
	153	5765	21.5	21.5	24.5
	157	5785	21.5	21.5	24.5
	161	5805	21.5	21.5	24.5
	165	5825	21.5	21.5	24.5
802.11n (HT20)	149	5745	21.5	21.5	24.5
	153	5765	21.5	21.5	24.5
	157	5785	21.5	21.5	24.5
	161	5805	21.5	21.5	24.5
	165	5825	21.5	21.5	24.5
802.11n (HT40)	151	5755	20.0	20.0	23.0
	159	5795	20.0	20.0	23.0
802.11ac (VHT80)	155	5775	20.5	20.5	23.5

<Bluetooth>

Mode	Channel	Frequency (MHz)	Tune-up
Bluetooth EDR	0	2402	11.5
	39	2441	11.5
	78	2480	11.5
Bluetooth LE	0	2402	10.0
	19	2440	10.0
	39	2480	10.0

<QCNFA344A>**<WLAN 2.4G>**

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11b	1	2412	17.0	17.0	20.0
	6	2437	17.0	17.0	20.0
	11	2462	17.0	17.0	20.0
	12	2467	12.5	12.5	15.5
	13	2472	11.5	11.5	14.5
802.11g	1	2412	17.0	17.0	20.0
	6	2437	17.0	17.0	20.0
	11	2462	17.0	17.0	20.0
	12	2467	12.5	12.5	15.5
	13	2472	11.5	11.5	14.5
802.11n HT20 / 802.11ac VHT20	1	2412	17.0	17.0	20.0
	6	2437	17.0	17.0	20.0
	11	2462	17.0	17.0	20.0
	12	2467	12.5	12.5	15.5
	13	2472	11.5	11.5	14.5
802.11n HT40 / 802.11ac VHT40	3	2422	12.5	12.5	15.5
	6	2437	17.0	17.0	20.0
	9	2452	11.0	11.0	14.0
	10	2457	11.0	11.0	14.0
	11	2462	2.5	2.5	5.5

<WLAN 5.2G>

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11a	36	5180	12.5	12.5	15.5
	40	5200	12.5	12.5	15.5
	44	5220	12.5	12.5	15.5
	48	5240	12.5	12.5	15.5
802.11n HT20 / 802.11ac VHT20	36	5180	12.5	12.5	15.5
	40	5200	12.5	12.5	15.5
	44	5220	12.5	12.5	15.5
	48	5240	12.5	12.5	15.5
802.11n HT40 / 802.11ac VHT40	38	5190	11.5	11.5	14.5
	46	5230	12.5	12.5	15.5
802.11ac (VHT80)	42	5210	9.5	9.5	12.5

<WLAN 5.3G>

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11a	52	5260	12.5	12.5	15.5
	56	5280	12.5	12.5	15.5
	60	5300	12.5	12.5	15.5
	64	5320	12.5	12.5	15.5
802.11n HT20 / 802.11ac VHT20	52	5260	12.5	12.5	15.5
	56	5280	12.5	12.5	15.5
	60	5300	12.5	12.5	15.5
	64	5320	12.5	12.5	15.5
802.11n HT40 / 802.11ac VHT40	54	5270	12.5	12.5	15.5
	62	5310	12.5	12.5	15.5
802.11ac (VHT80)	58	5290	11.0	11.0	14.0

<WLAN 5.6G>

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11a	100	5500	12.5	12.5	15.5
	116	5580	12.5	12.5	15.5
	132	5660	12.5	12.5	15.5
	140	5700	12.0	12.0	15.0
	144	5720	12.5	12.5	15.5
802.11n HT20 / 802.11ac VHT20	100	5500	12.5	12.5	15.5
	116	5580	12.5	12.5	15.5
	132	5660	12.5	12.5	15.5
	140	5700	12.0	12.0	15.0
	144	5720	12.5	12.5	15.5
802.11n HT40 / 802.11ac VHT40	102	5510	12.5	12.5	15.5
	110	5550	12.5	12.5	15.5
	134	5670	12.5	12.5	15.5
	142	5710	12.0	12.0	15.0
802.11ac (VHT80)	106	5530	12.5	12.5	15.5
	138	5690	12.5	12.5	15.5

<WLAN 5.8G>

Mode	Channel	Frequency (MHz)	SISO / MIMO Ant-0	SISO / MIMO Ant-1	MIMO Ant-0+1
802.11a	149	5745	12.5	12.5	15.5
	153	5765	12.5	12.5	15.5
	157	5785	12.5	12.5	15.5
	161	5805	12.5	12.5	15.5
	165	5825	12.5	12.5	15.5
802.11n HT20 / 802.11ac VHT20	149	5745	12.5	12.5	15.5
	153	5765	12.5	12.5	15.5
	157	5785	12.5	12.5	15.5
	161	5805	12.5	12.5	15.5
	165	5825	12.5	12.5	15.5
802.11n HT40 / 802.11ac VHT40	151	5755	11.5	11.5	14.5
	159	5795	12.5	12.5	15.5
802.11ac (VHT80)	155	5775	10.0	10.0	13.0

<Bluetooth>

Mode	Channel	Frequency (MHz)	Tune-up
Bluetooth EDR	0	2402	3.0
	39	2441	3.0
	78	2480	3.0
Bluetooth LE	0	2402	-3.5
	19	2440	-3.5
	39	2480	-3.5

3.1.1 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

1. For the test separation distance ≤ 50 mm

$$\frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \sqrt{f_{(\text{GHz})}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. For the test separation distance > 50 mm, and the frequency at 100 MHz to 1500 MHz

$$\left[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times \left(\frac{f_{(\text{MHz})}}{150} \right) \right]_{(\text{mW})}$$

3. For the test separation distance > 50 mm, and the frequency at > 1500 MHz to 6 GHz

$$[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times 10]_{(\text{mW})}$$

<For WWAN Ant-0>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		Require SAR Testing?
			Ant. to Surface (mm)	Calculated Result	
WCDMA II	24.5	282	198.05	1589 mW	No
WCDMA IV	24.5	282	198.05	1594 mW	No
WCDMA V	24.5	282	198.05	999 mW	No
LTE 2	24.5	282	198.05	1589 mW	No
LTE 4	24.5	282	198.05	1594 mW	No
LTE 5	24.5	282	198.05	1001 mW	No
LTE 7	24.5	282	198.05	1574 mW	No
LTE 12	24.5	282	198.05	884 mW	No
LTE 13	24.5	282	198.05	946 mW	No
LTE 14	24.5	282	198.05	956 mW	No
LTE 17	24.5	282	198.05	884 mW	No
LTE 26	24.5	282	198.05	1001 mW	No
LTE 30	23.0	200	198.05	1579 mW	No
LTE 38	24.5	282	198.05	1573 mW	No
LTE4 1	24.5	282	198.05	1572 mW	No
LTE 66	24.5	282	198.05	1593 mW	No

Note:

Since GSM has multi-slot operation, the maximum tune-up power shown in above table for GSM is source-based time-averaged maximum power.

<9560NGW>**<For WLAN Ant-0>**

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	21.0	126	198.05	1576 mW	No
WLAN 5.2G	21.5	141	198.05	1546 mW	No
WLAN 5.3G	21.5	141	198.05	1546 mW	No
WLAN 5.6G	21.5	141	198.05	1543 mW	No
WLAN 5.8G	21.5	141	198.05	1543 mW	No

<For BT/WLAN Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	21.0	126	198.05	1576 mW	No
WLAN 5.2G	21.5	141	198.05	1546 mW	No
WLAN 5.3G	21.5	141	198.05	1546 mW	No
WLAN 5.6G	21.5	141	198.05	1543 mW	No
WLAN 5.8G	21.5	141	198.05	1543 mW	No
BT	11.5	14	198.05	1576 mW	No

<For WLAN Ant-0 + Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	24.0	251	198.05	1576 mW	No
WLAN 5.2G	24.5	282	198.05	1546 mW	No
WLAN 5.3G	24.5	282	198.05	1546 mW	No
WLAN 5.6G	24.5	282	198.05	1543 mW	No
WLAN 5.8G	24.5	282	198.05	1543 mW	No

<QCIFA344A>**<For WLAN Ant-0>**

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	17.0	50	198.05	1576 mW	No
WLAN 5.2G	12.5	18	198.05	1546 mW	No
WLAN 5.3G	12.5	18	198.05	1546 mW	No
WLAN 5.6G	12.5	18	198.05	1543 mW	No
WLAN 5.8G	12.5	18	198.05	1543 mW	No

<For BT/WLAN Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	17.0	50	198.05	1576 mW	No
WLAN 5.2G	12.5	18	198.05	1546 mW	No
WLAN 5.3G	12.5	18	198.05	1546 mW	No
WLAN 5.6G	12.5	18	198.05	1543 mW	No
WLAN 5.8G	12.5	18	198.05	1543 mW	No
BT	3.0	2	198.05	1576 mW	No

<For WLAN Ant-0 + Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	20.0	100	198.05	1576 mW	No
WLAN 5.2G	15.5	35	198.05	1546 mW	No
WLAN 5.3G	15.5	35	198.05	1546 mW	No
WLAN 5.6G	15.5	35	198.05	1543 mW	No
WLAN 5.8G	15.5	35	198.05	1543 mW	No


Note:

1. When separation distance ≤ 50 mm and the calculated result shown in above table is ≤ 3.0 , the SAR testing exclusion is applied.
2. When separation distance > 50 mm and the device output power is less than the calculated result (power threshold, mW) shown in above table, the SAR testing exclusion is applied.

Summary:


Since the SAR testing for all device orientations apply SAR test exclusion per KDB 447498, SAR testing for this device is not required.

4. Antenna Location

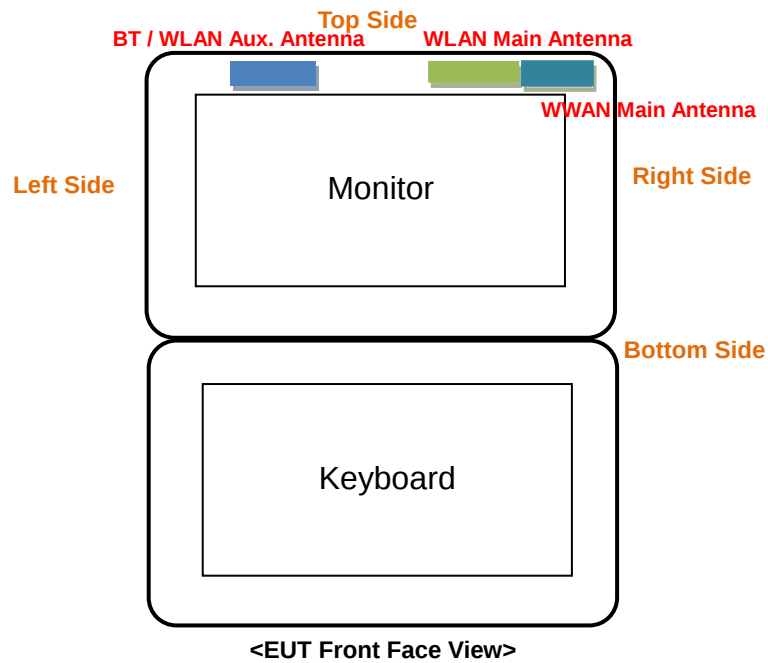

The separation distance for antenna to edge:

Antenna	To Top Side (mm)	To Bottom Side (mm)	To Left Side (mm)	To Right Side (mm)
WWAN Main	5	198.05	213	11
WLAN Main	5	198.05	195	96
BT/WLAN Aux.	5	198.05	96	195

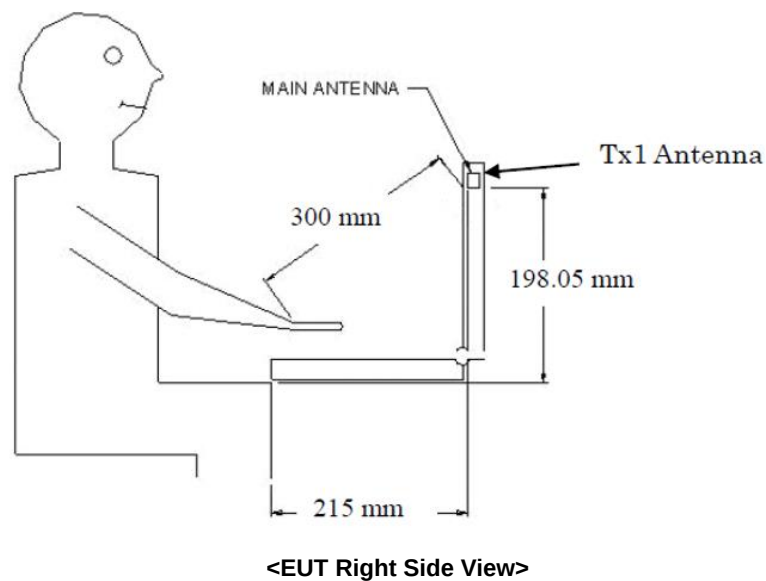

5. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47-2, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 30078, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The road map of all our labs can be found in our web site also.

---END---

Appendix A. Photographs of EUT

Please refer to attached file - External photo