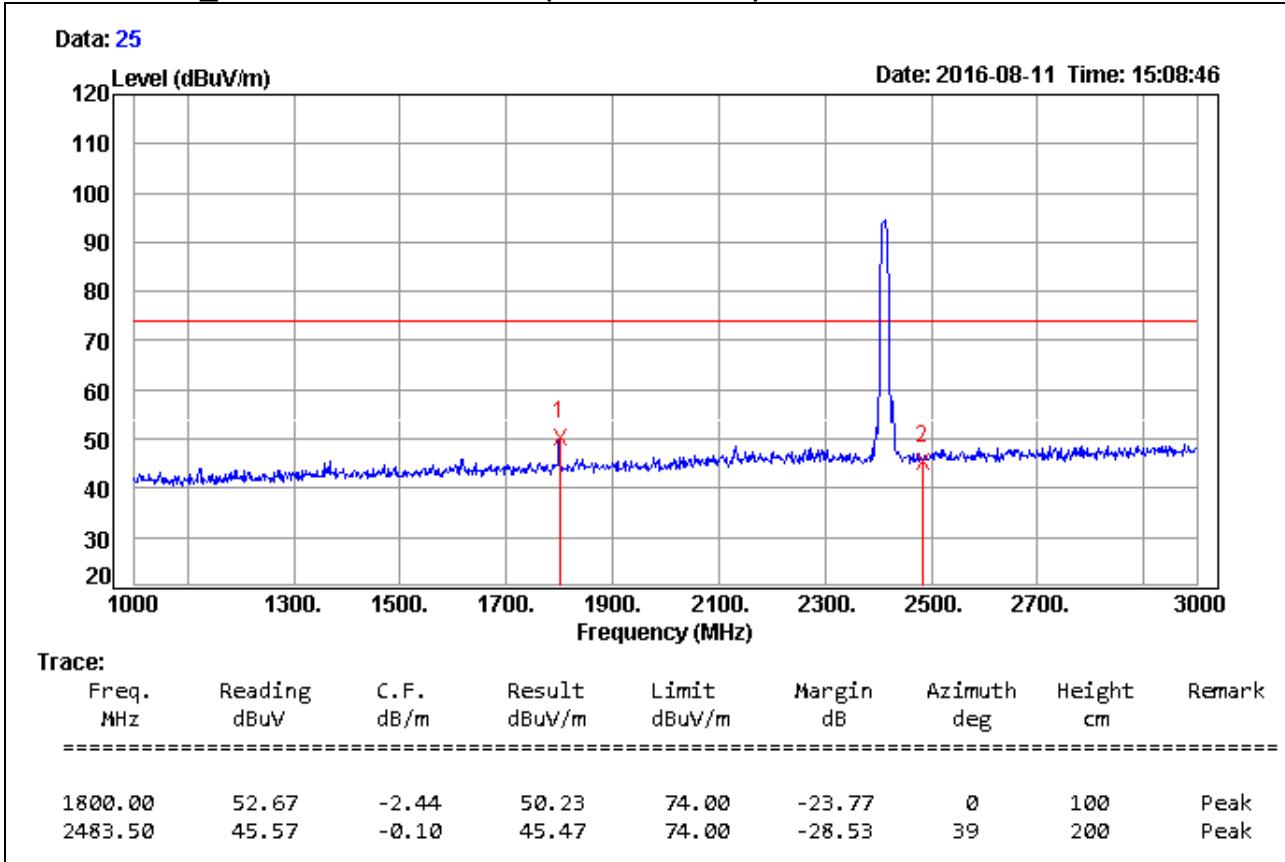


Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

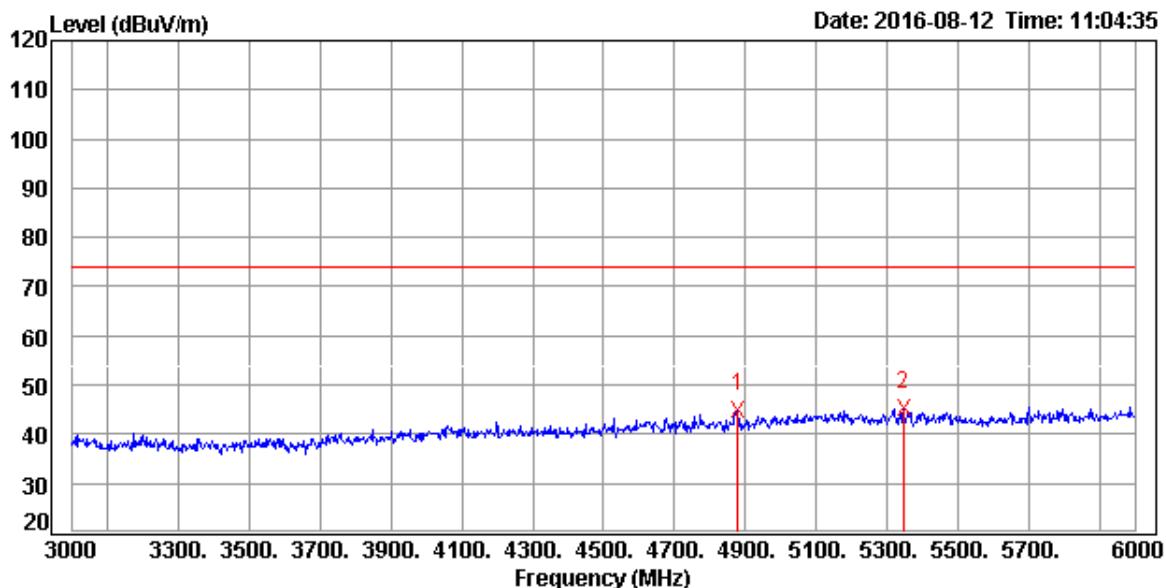
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 60



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4878.00	38.65	6.23	44.88	74.00	-29.12	226	200	Peak
5346.00	37.85	7.35	45.20	74.00	-28.80	18	200	Peak

Remark:

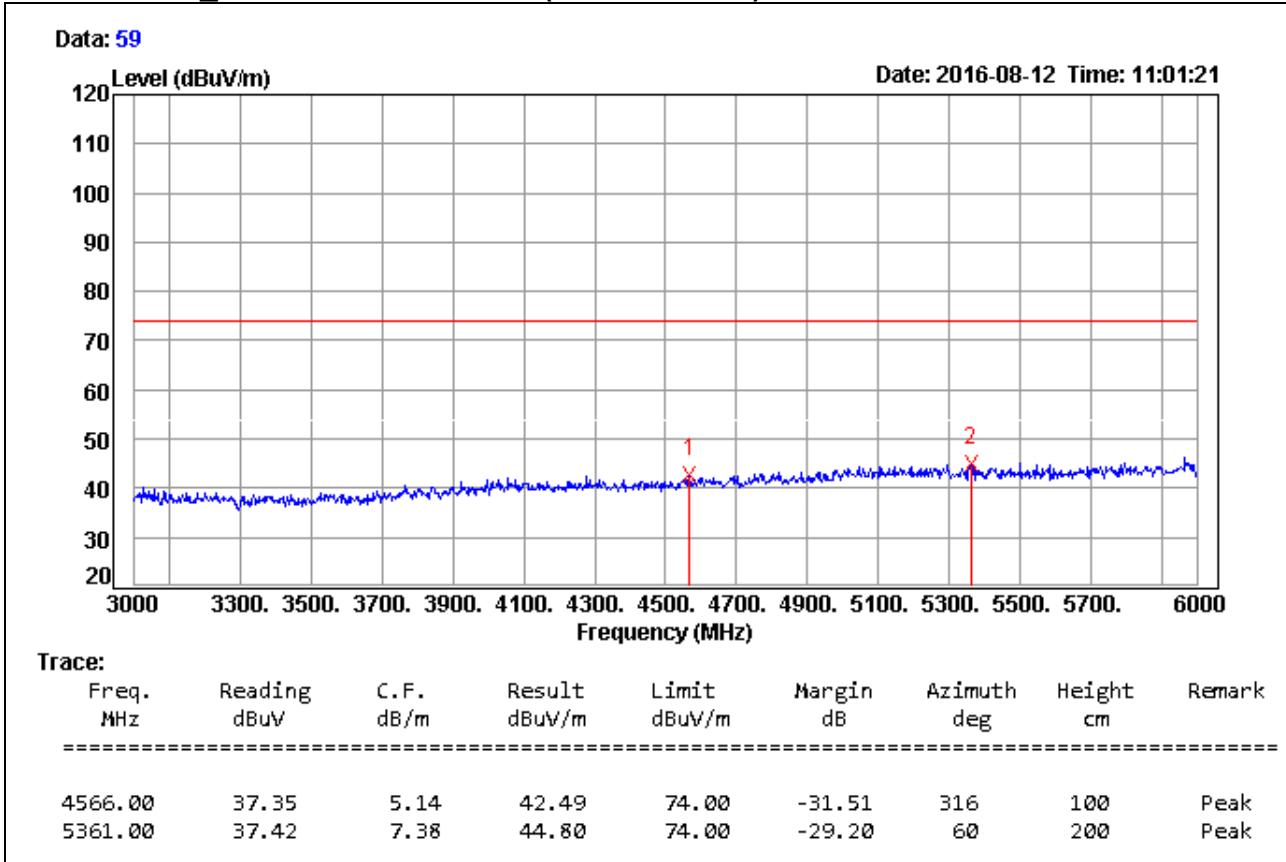
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)



Remark:

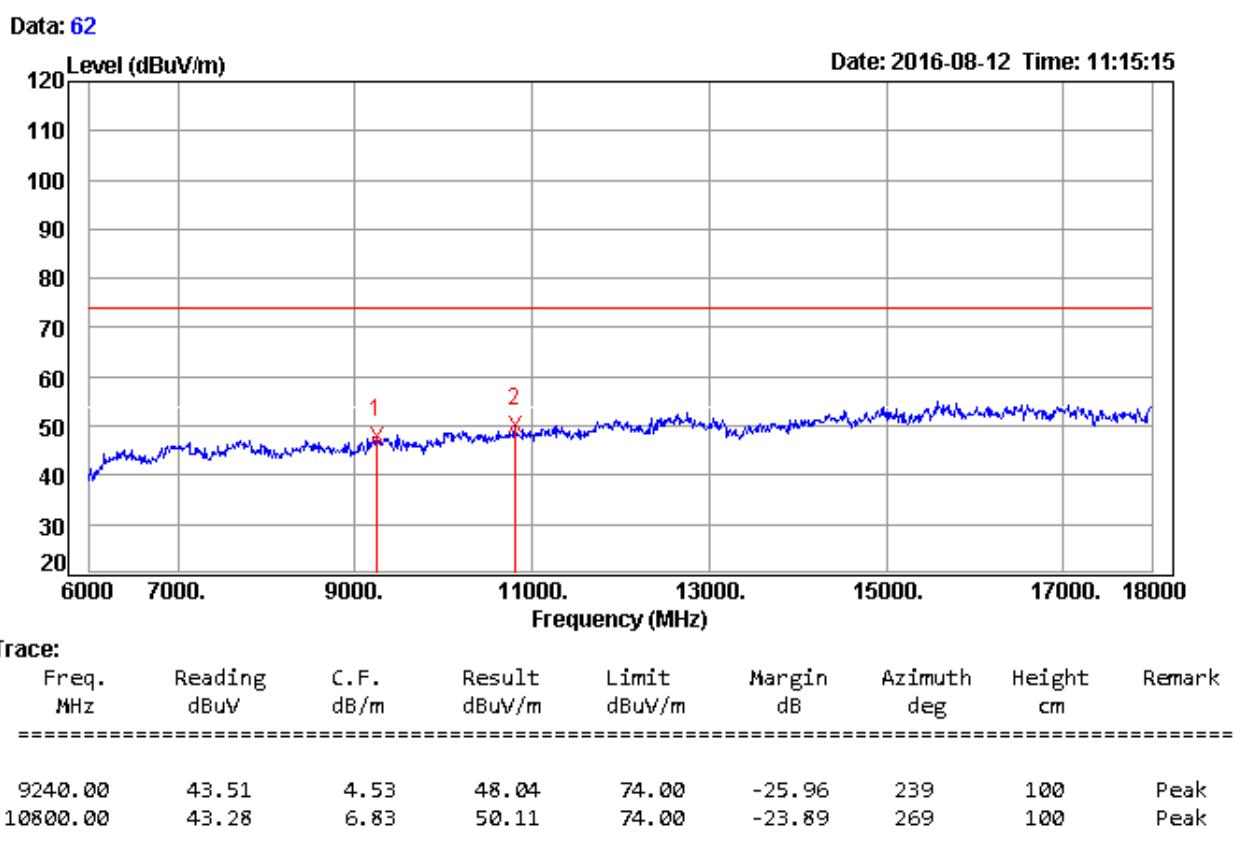
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

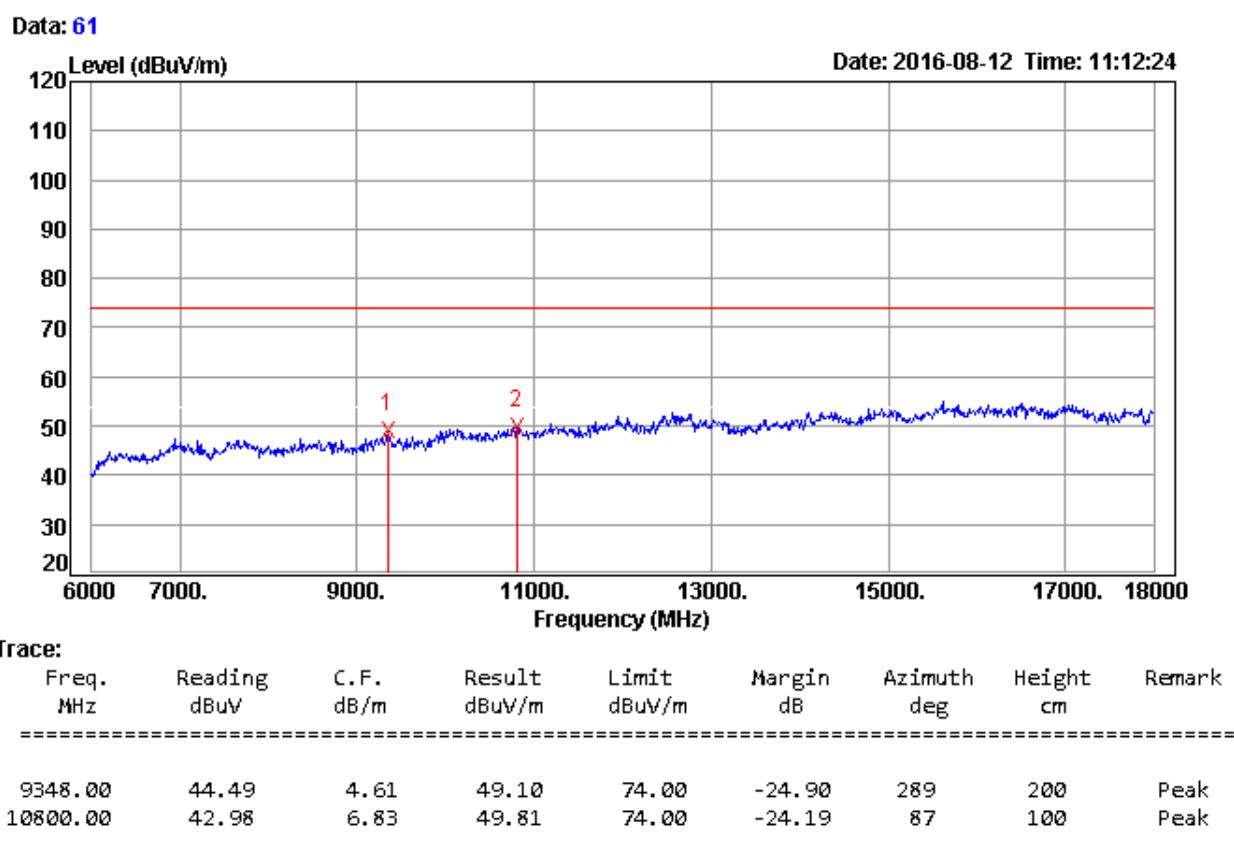
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

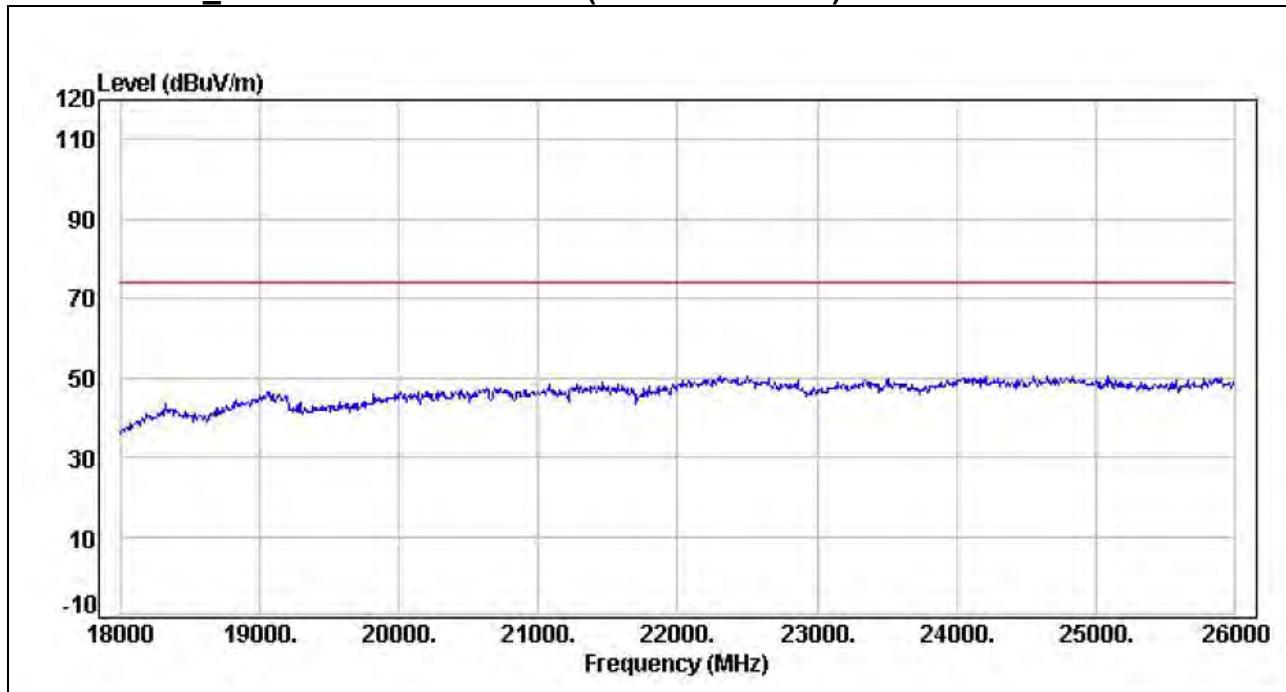
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

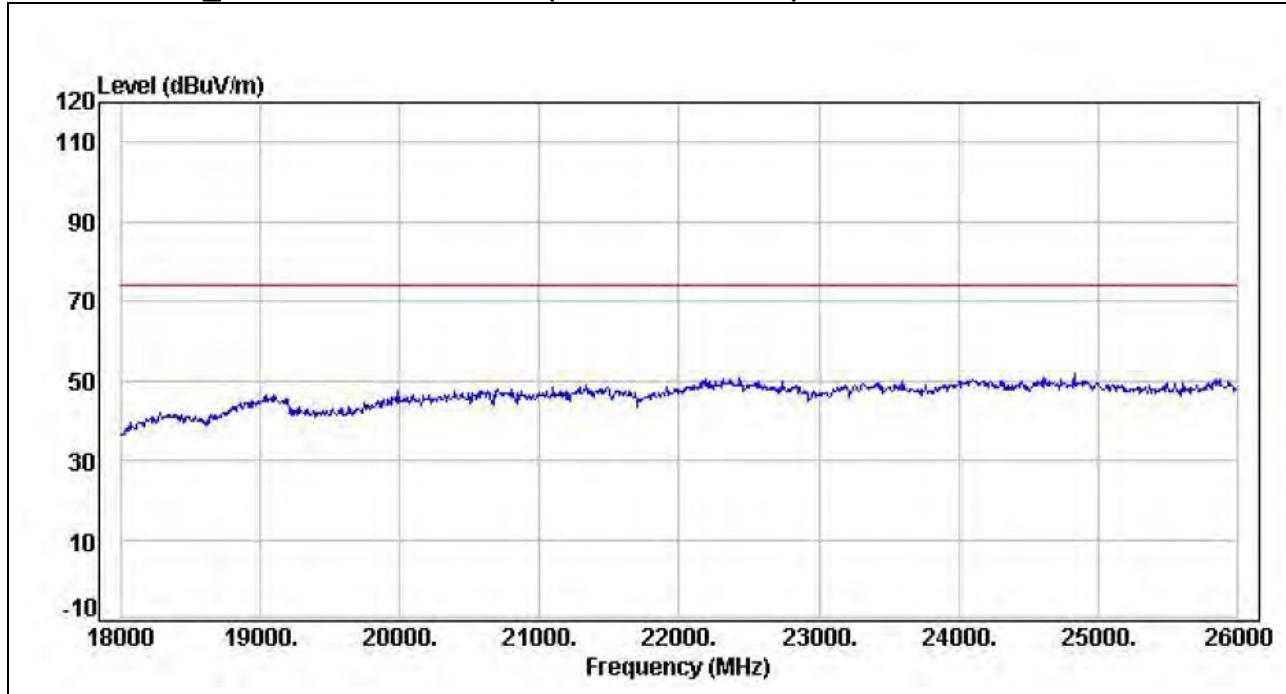
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

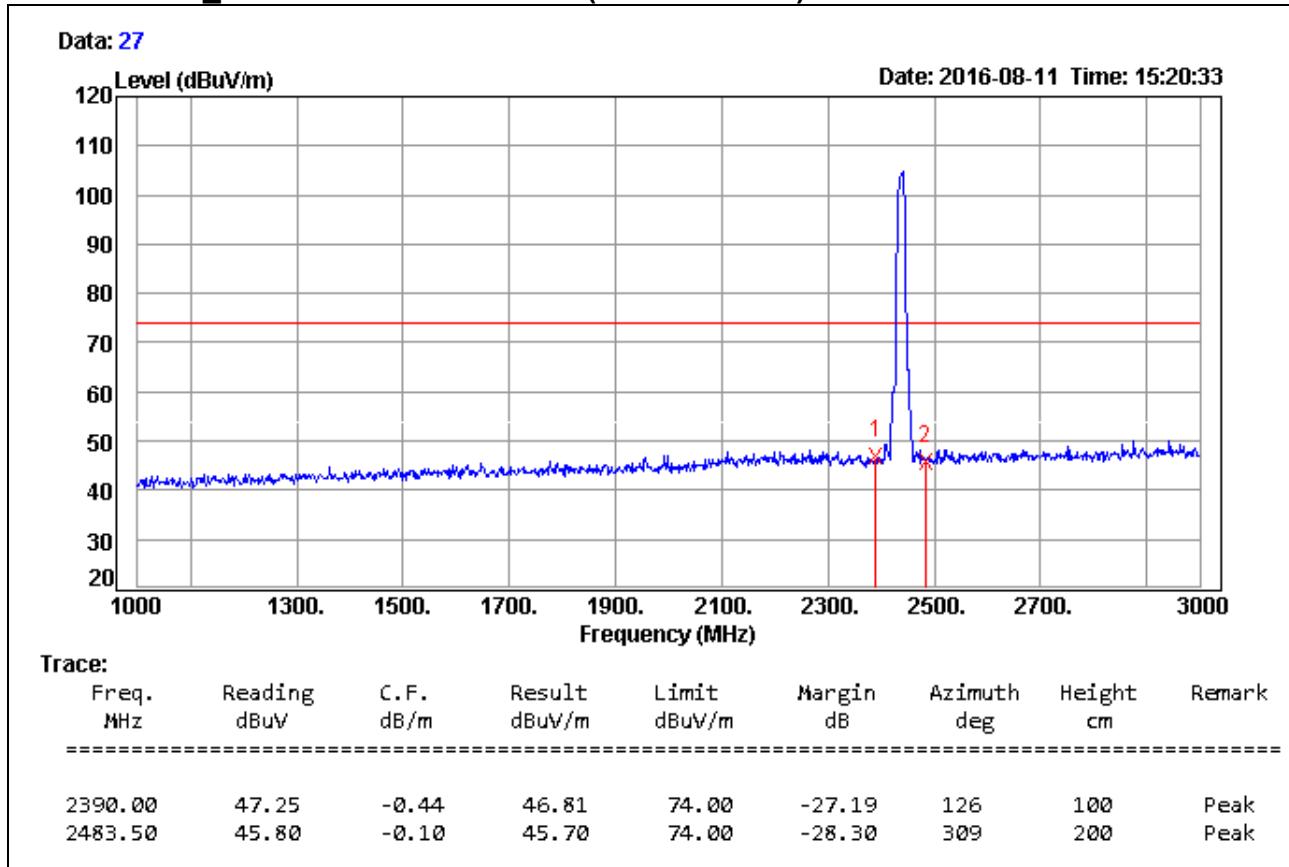
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

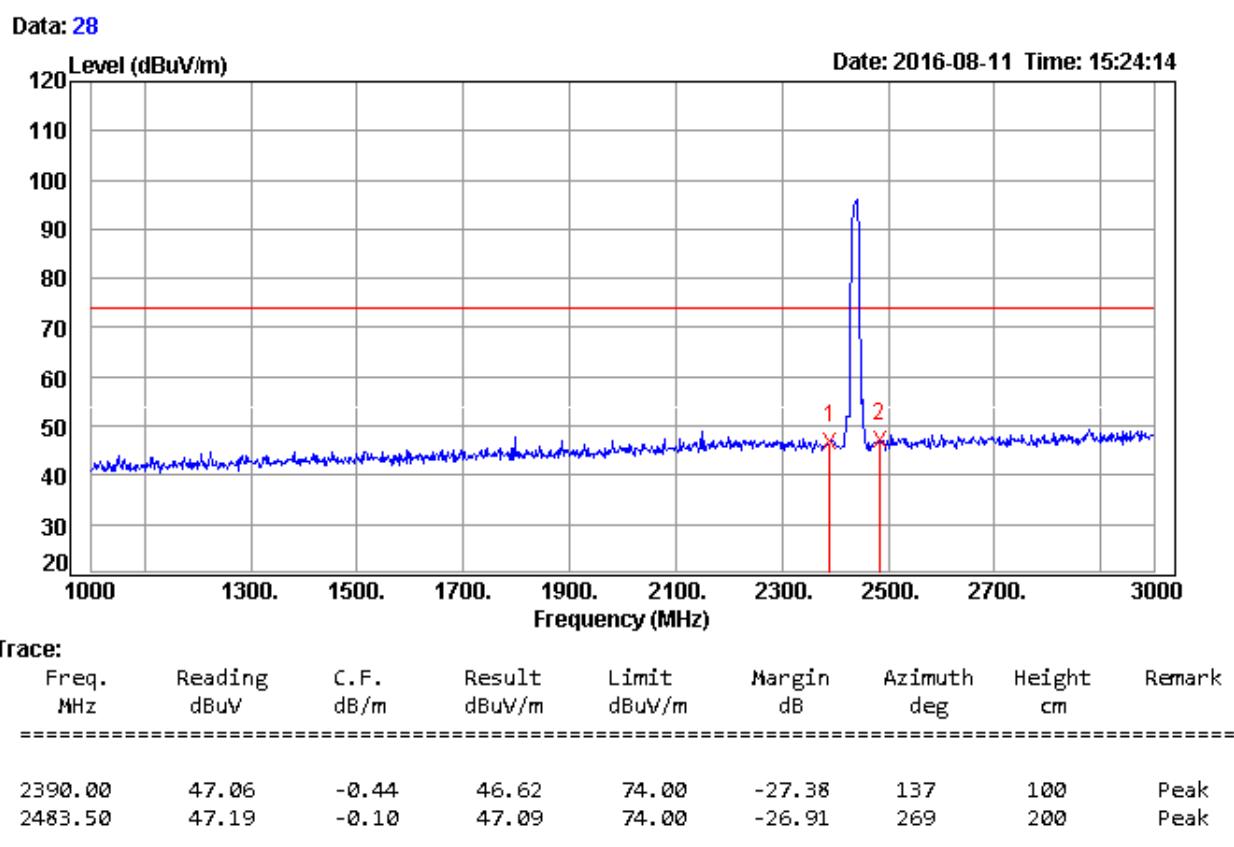
966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

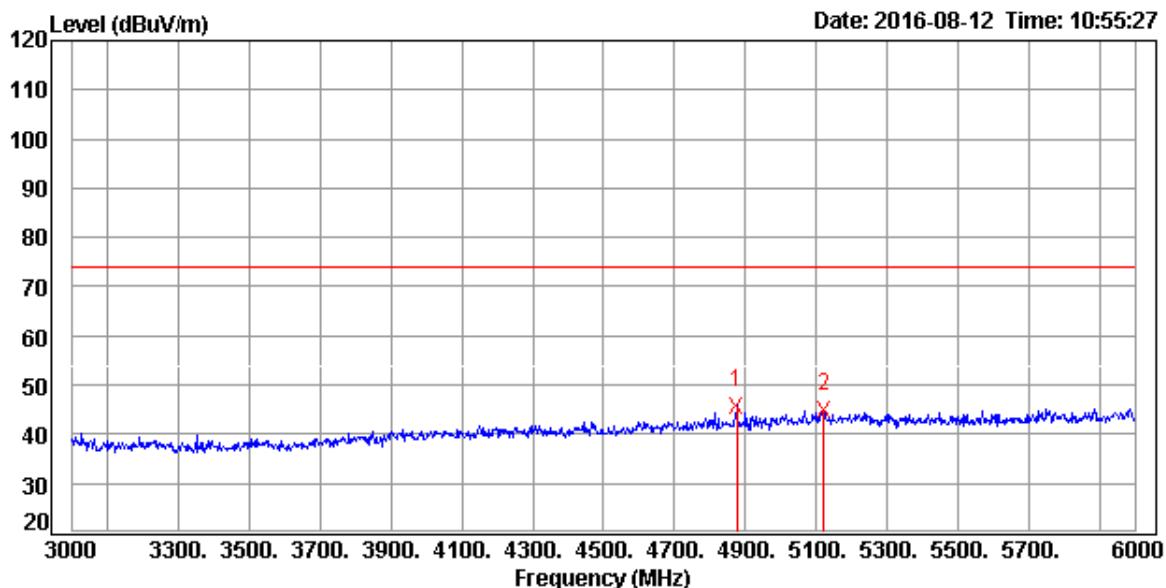
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 57



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4875.00	39.55	6.22	45.77	74.00	-28.23	222	200	Peak
5121.00	38.13	6.89	45.02	74.00	-28.98	0	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

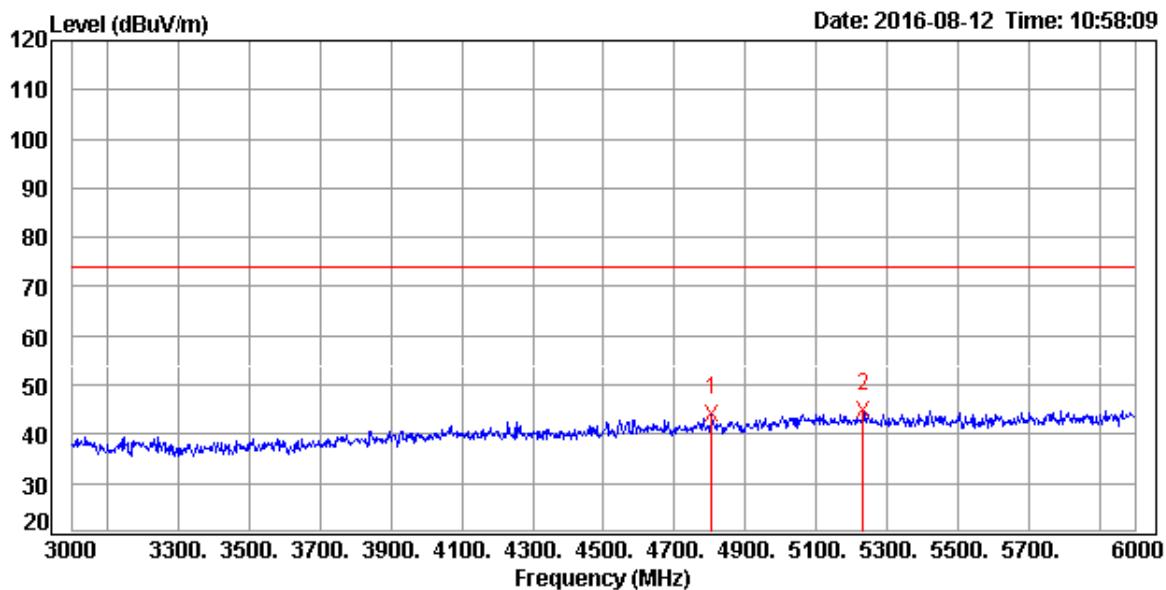
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 58



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
4806.00	38.05	5.97	44.02	74.00	-29.98	118	200	Peak
5232.00	37.82	7.12	44.94	74.00	-29.06	94	200	Peak

Remark:

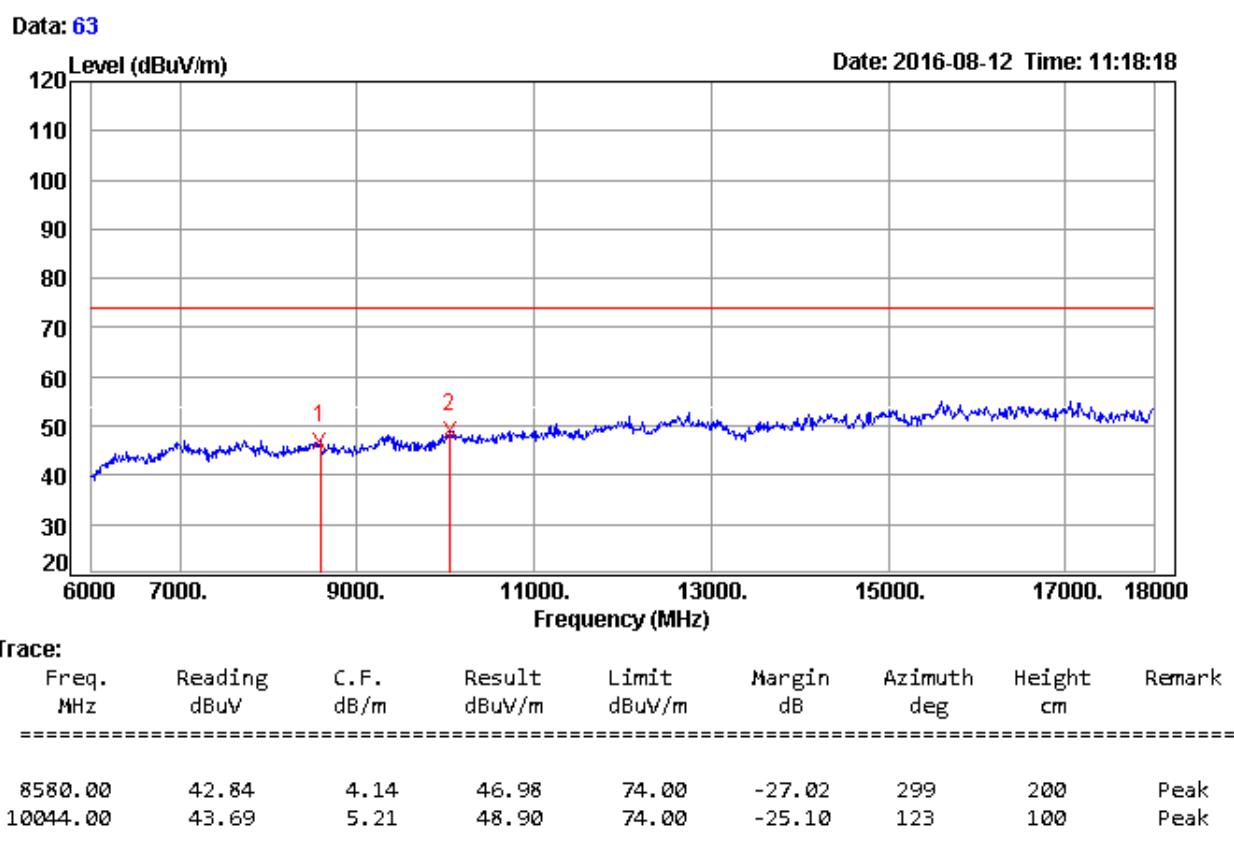
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

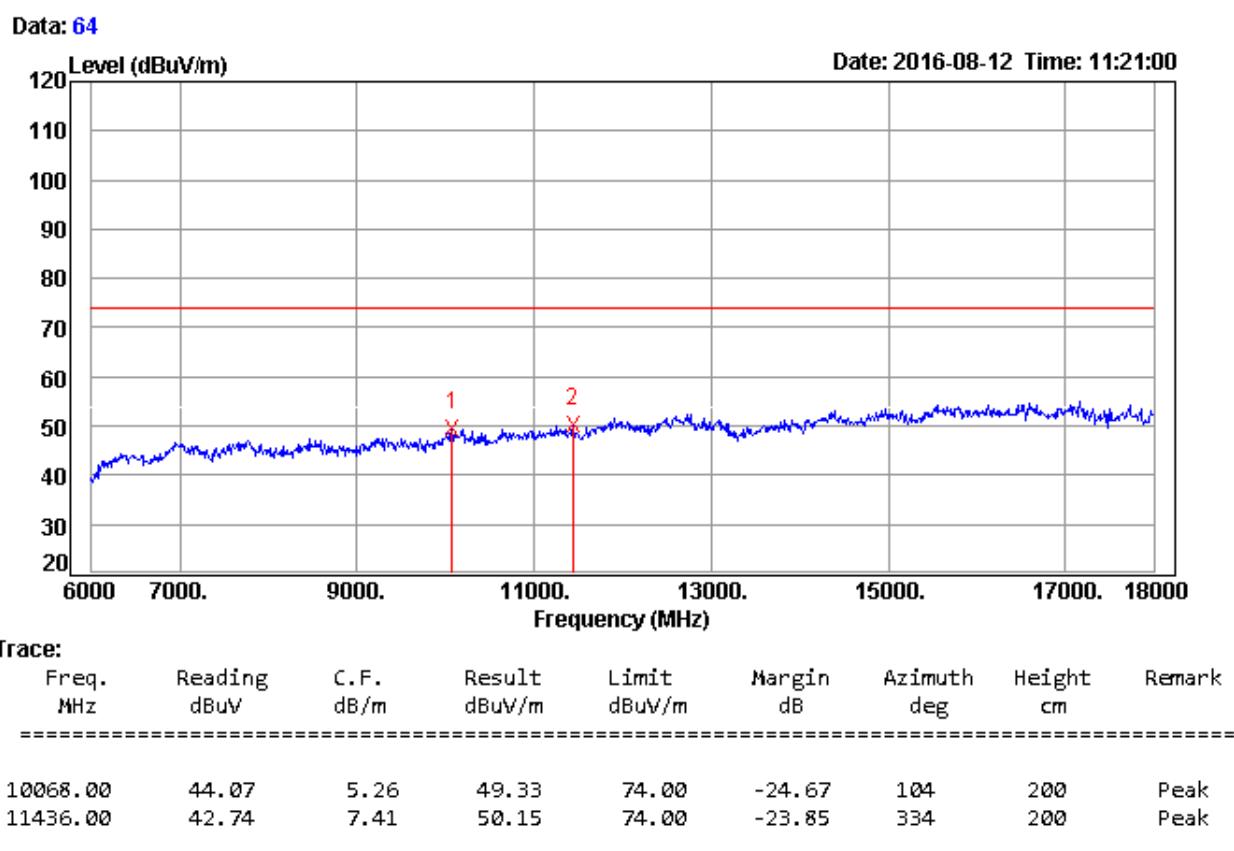
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

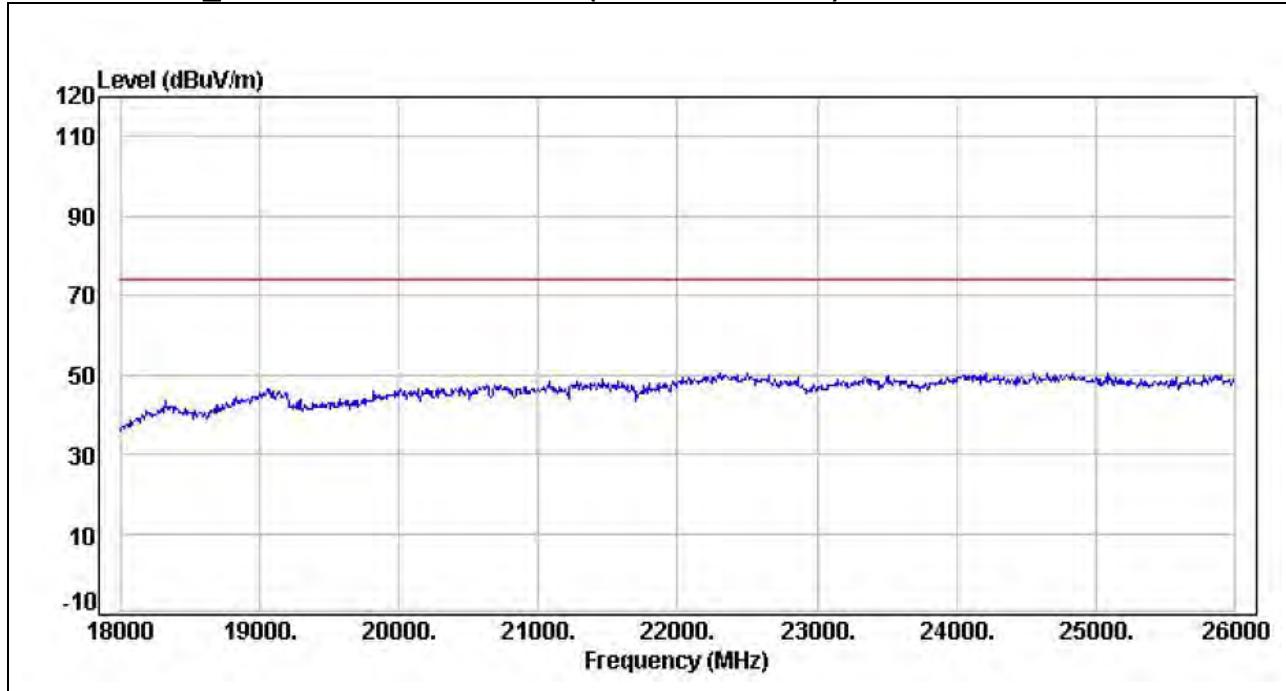
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

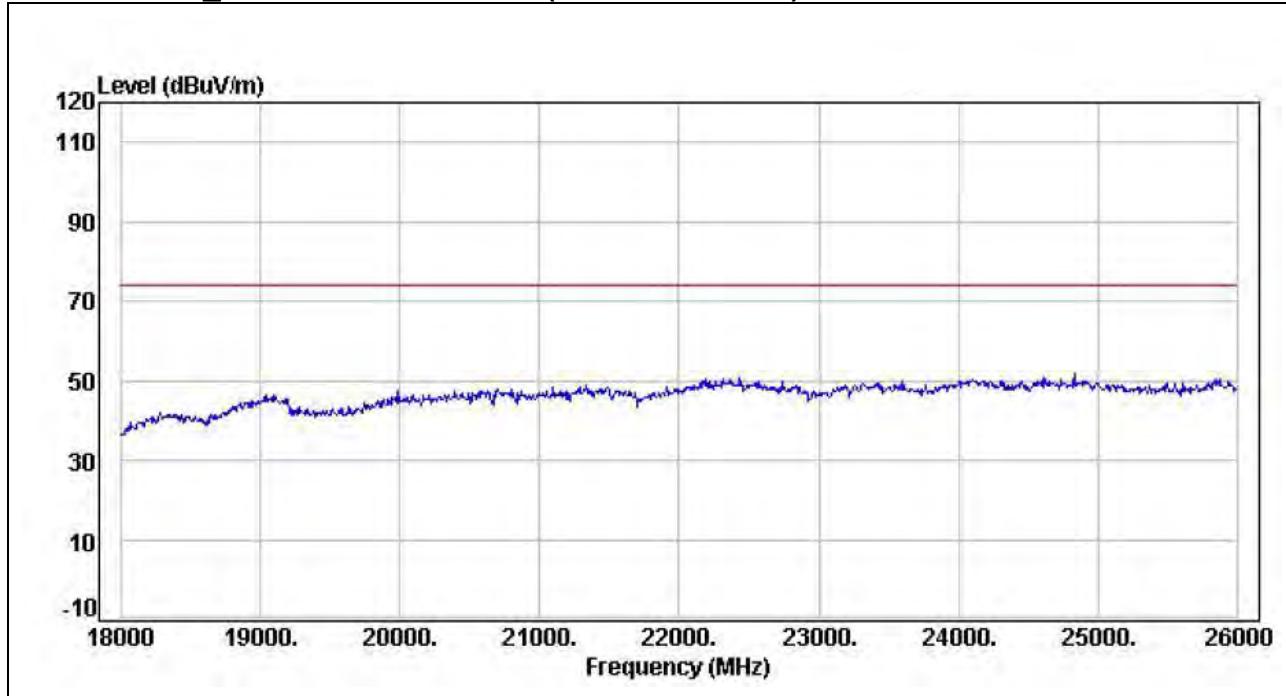
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

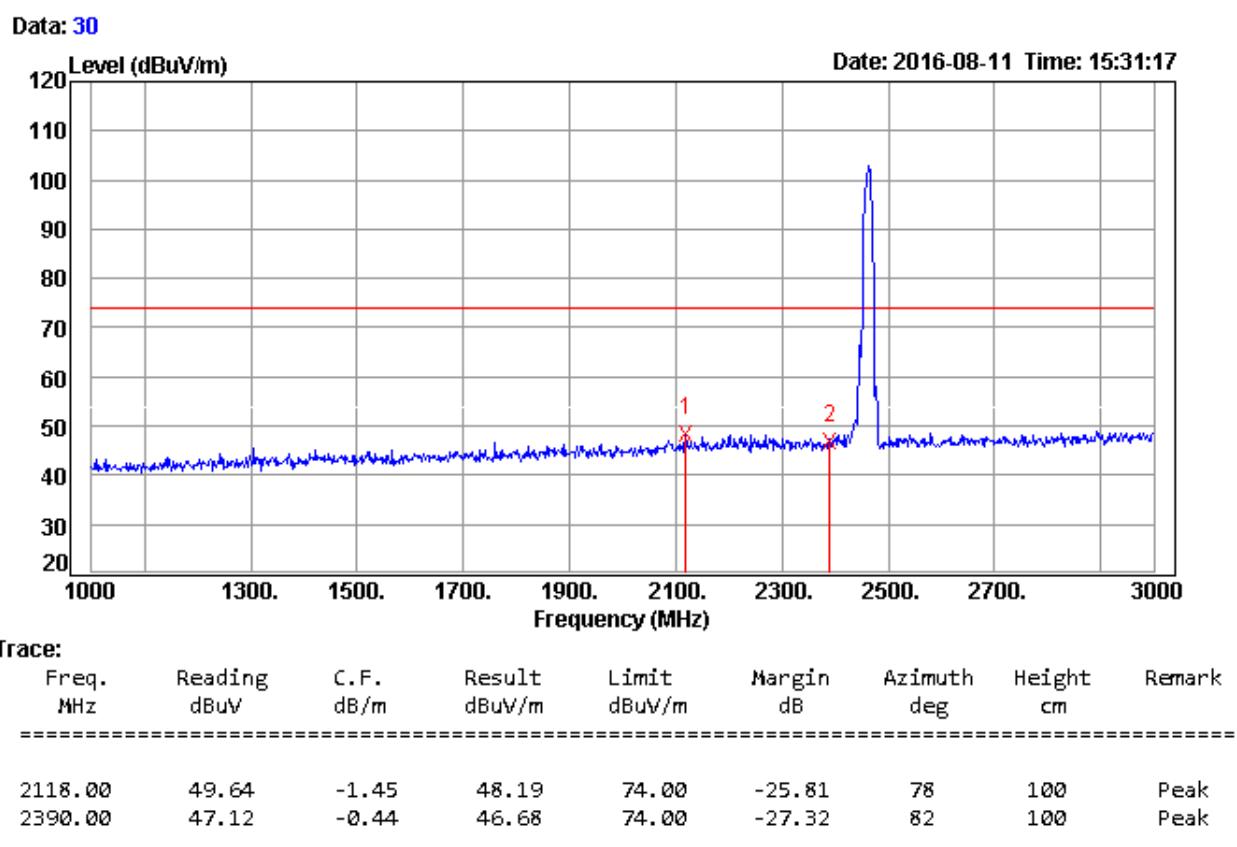
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

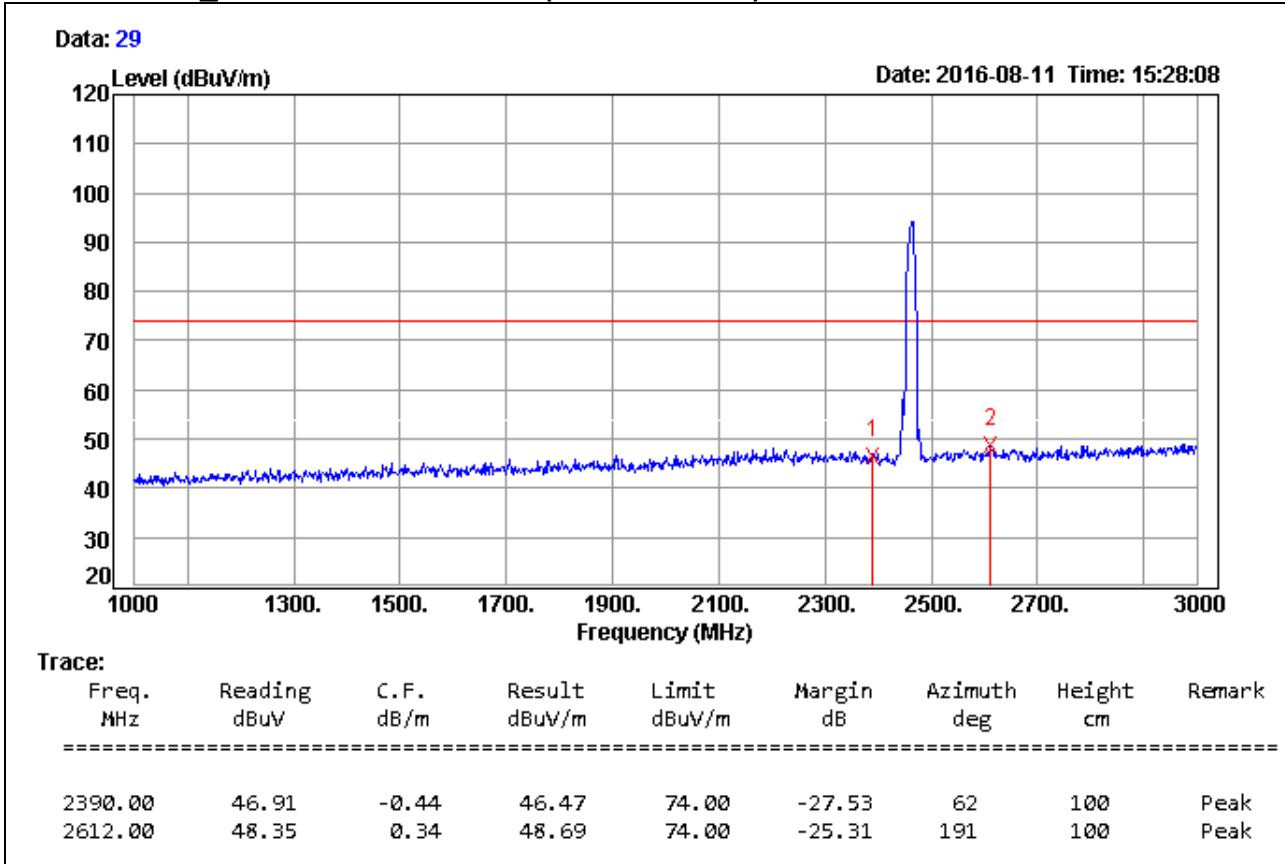
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

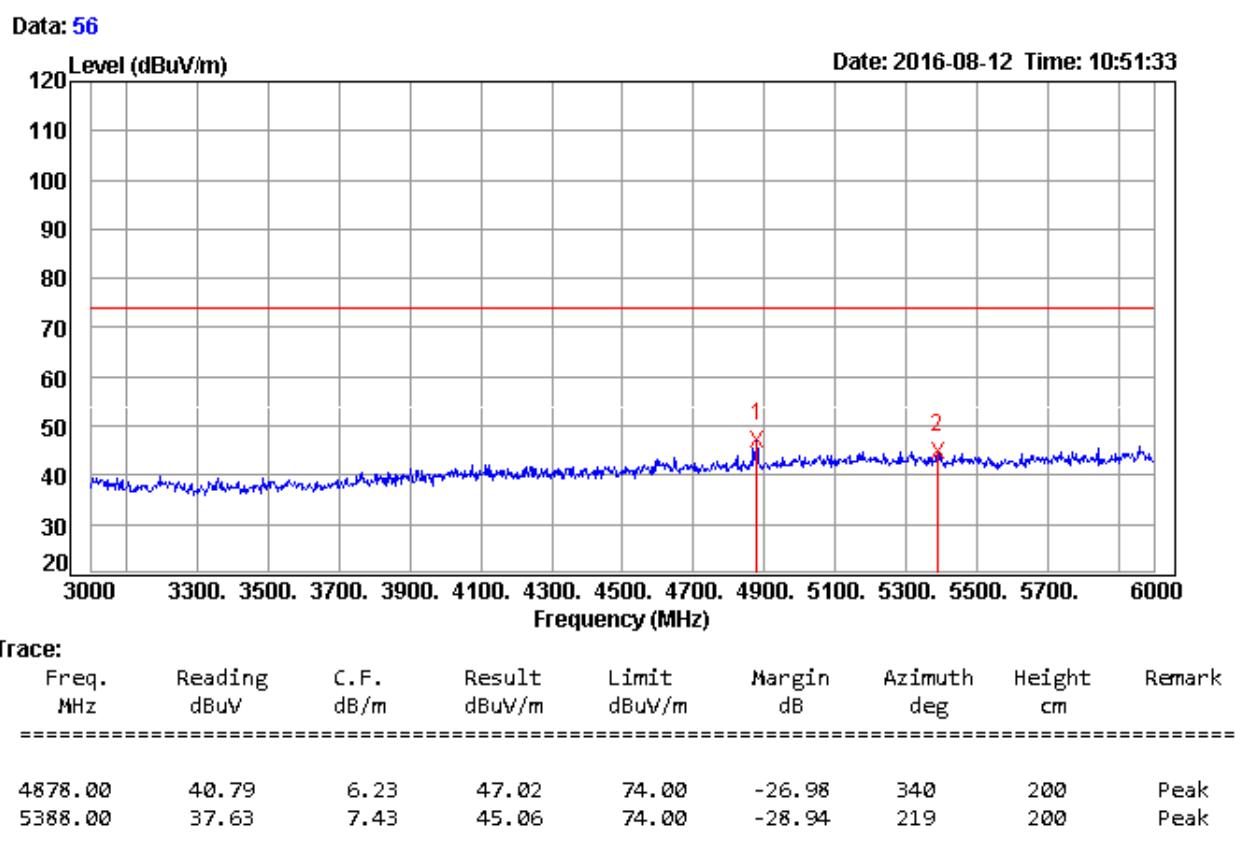
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

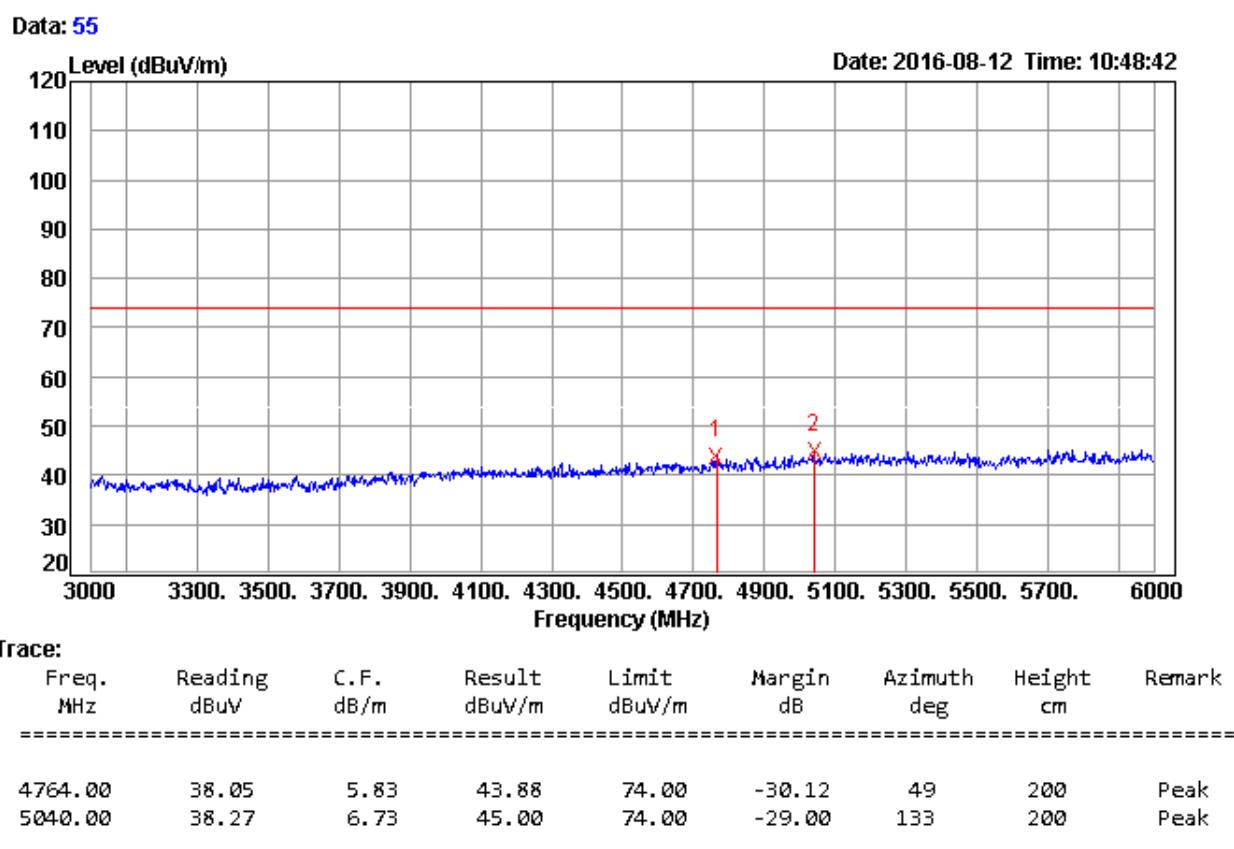
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)



Remark:

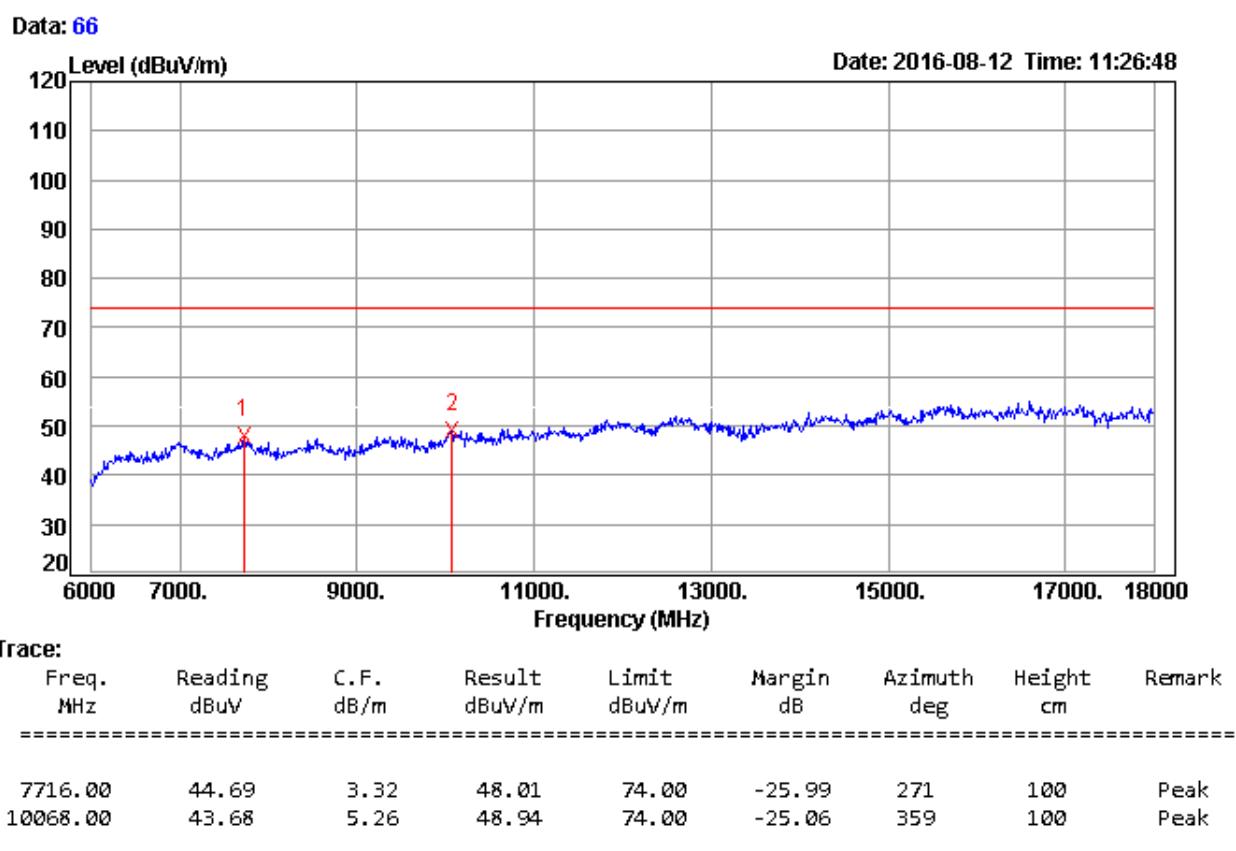
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

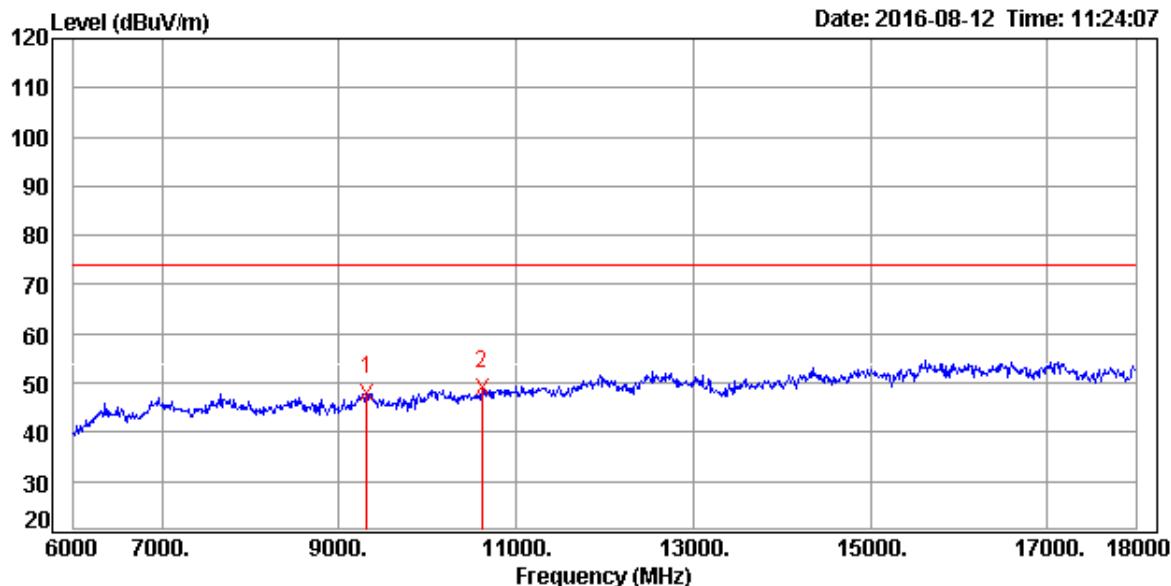
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)

Data: 65



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
9312.00	43.29	4.58	47.87	74.00	-26.13	33	100	Peak
10608.00	42.84	6.44	49.28	74.00	-24.72	212	100	Peak

Remark:

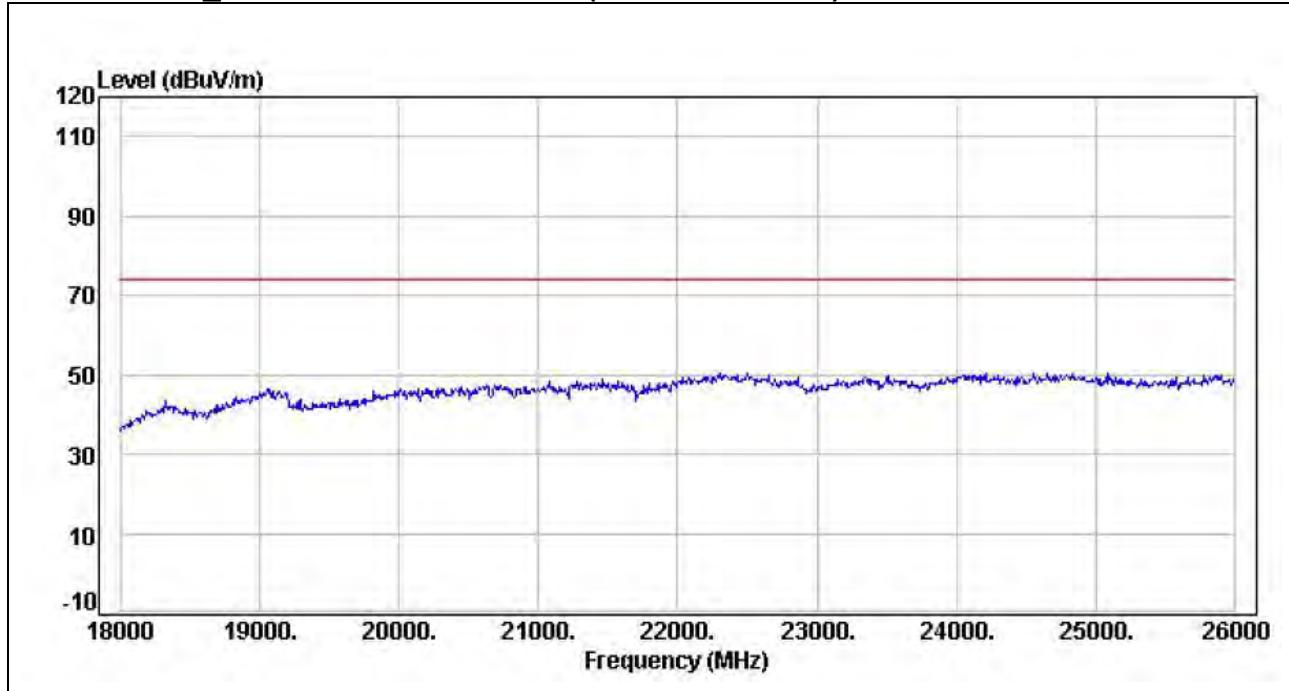
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

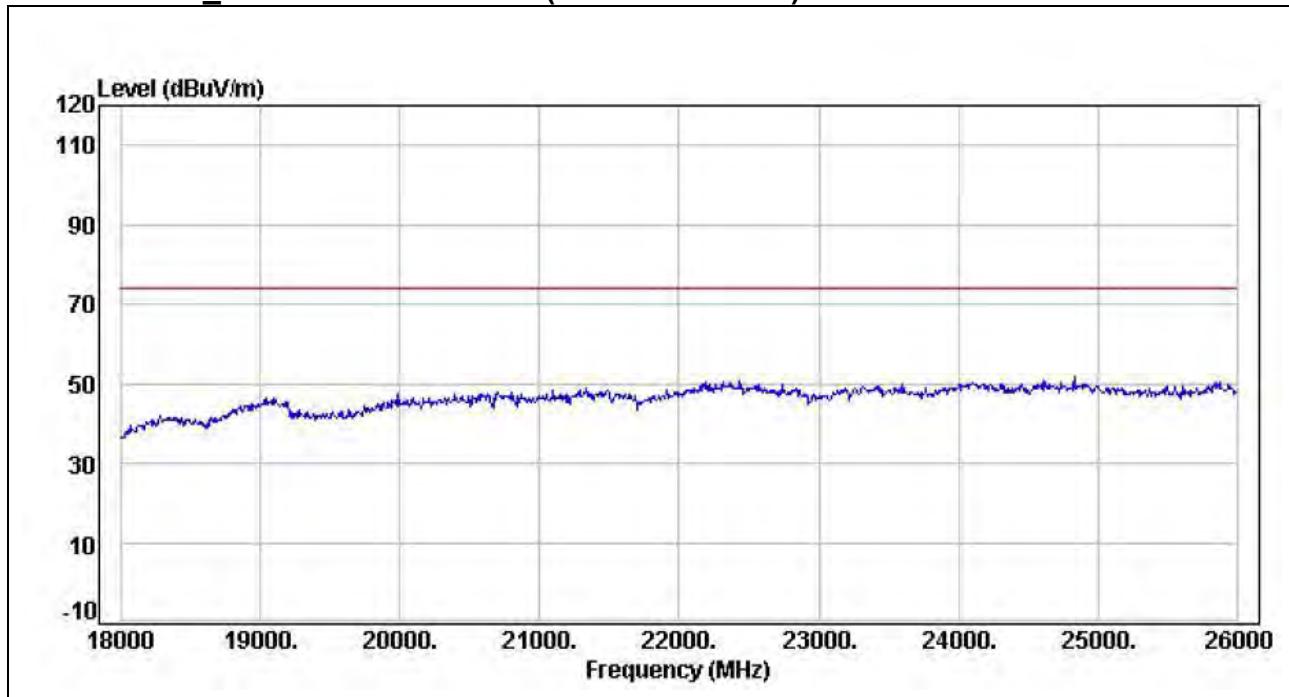
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

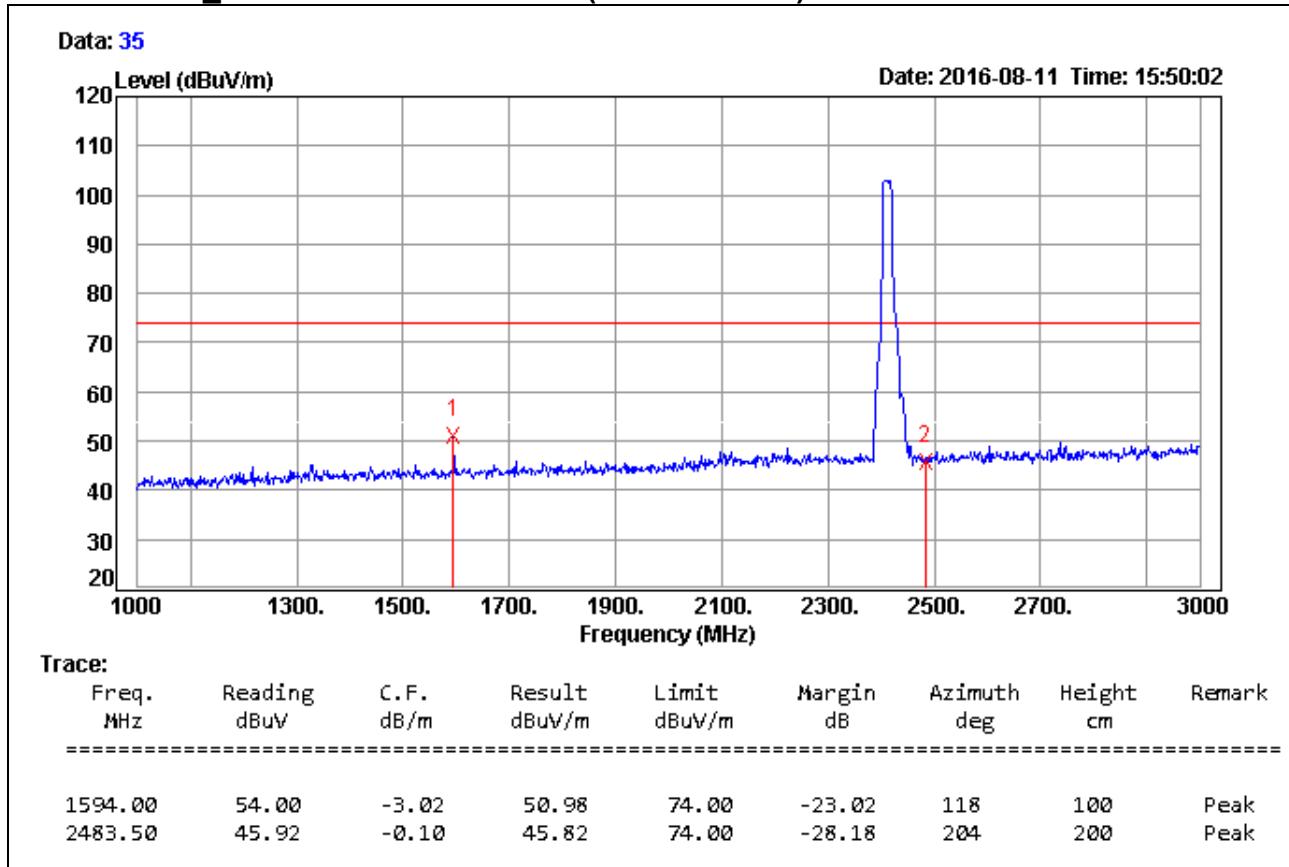
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

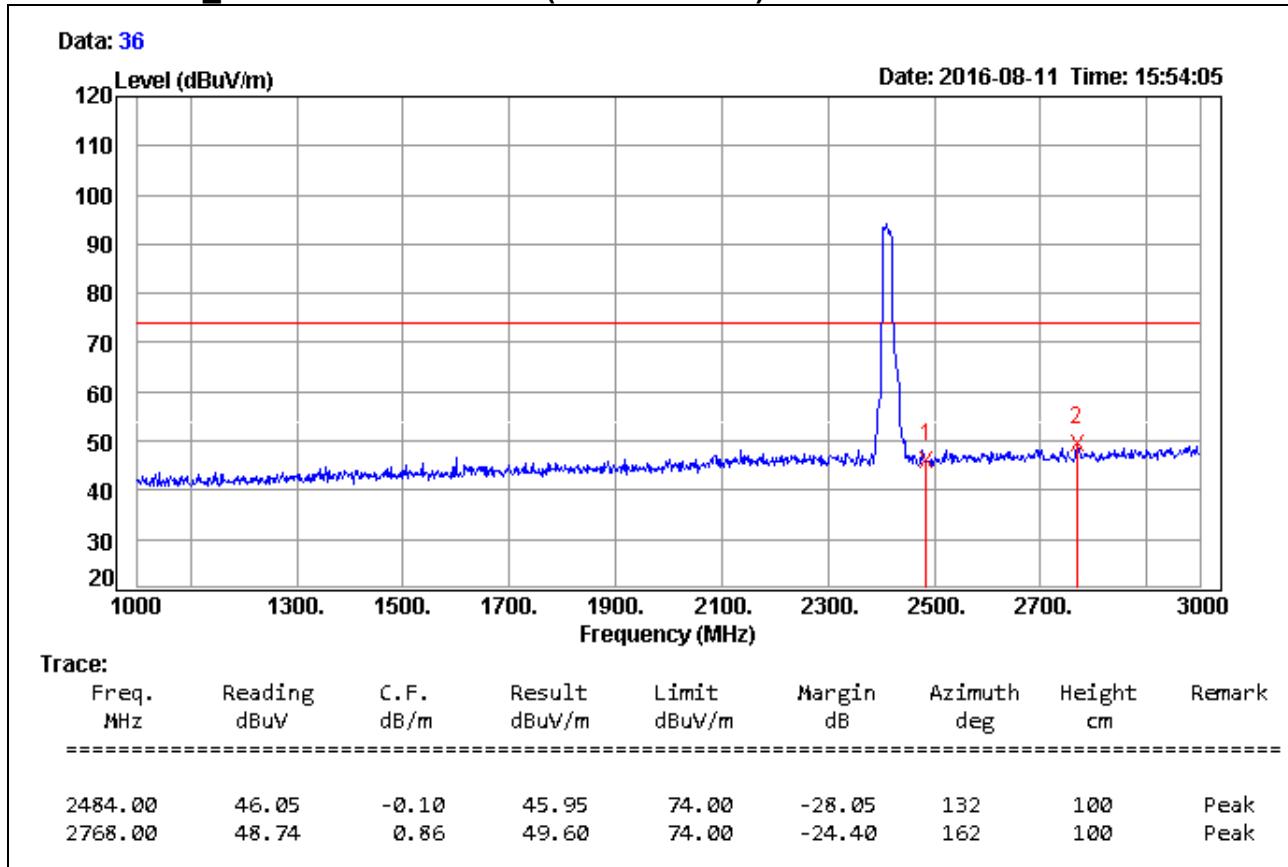


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)

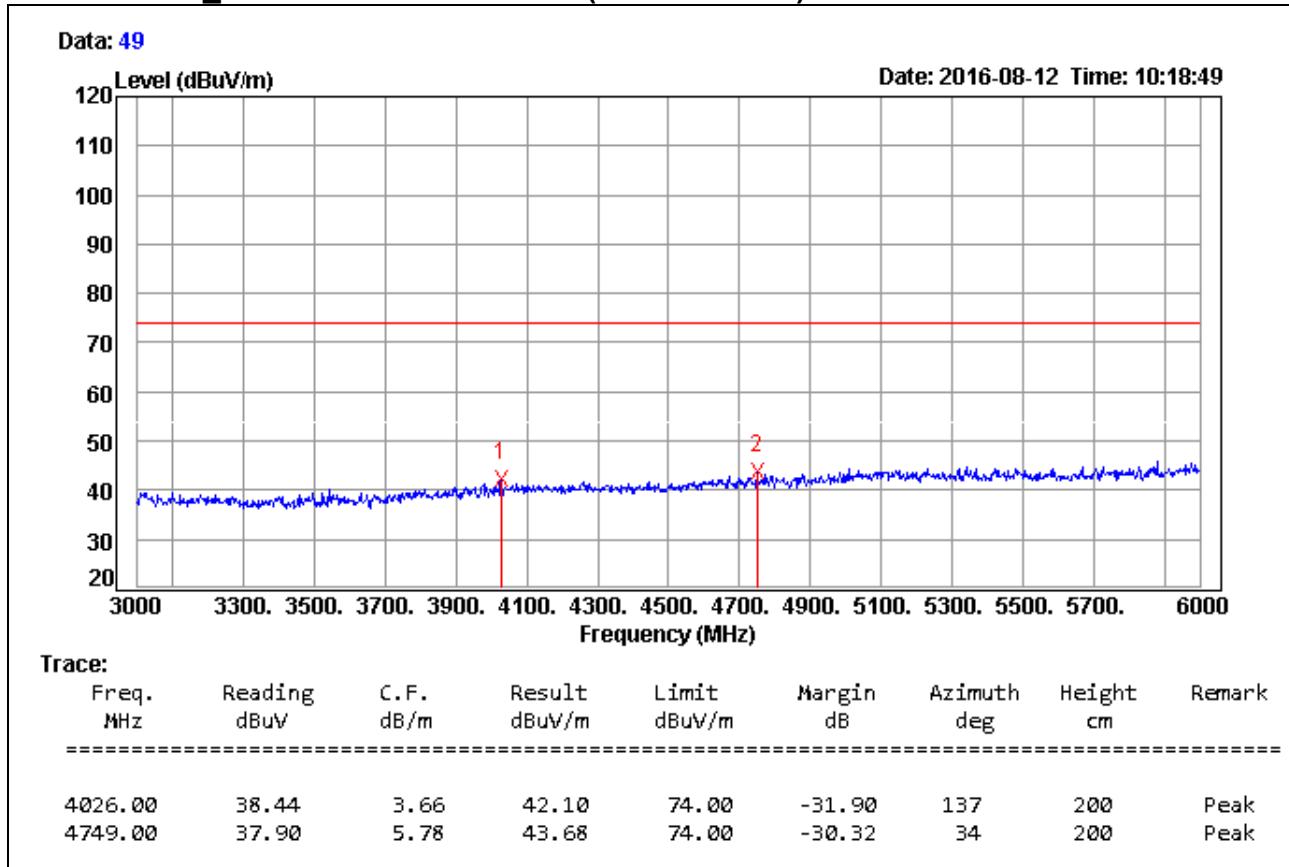


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

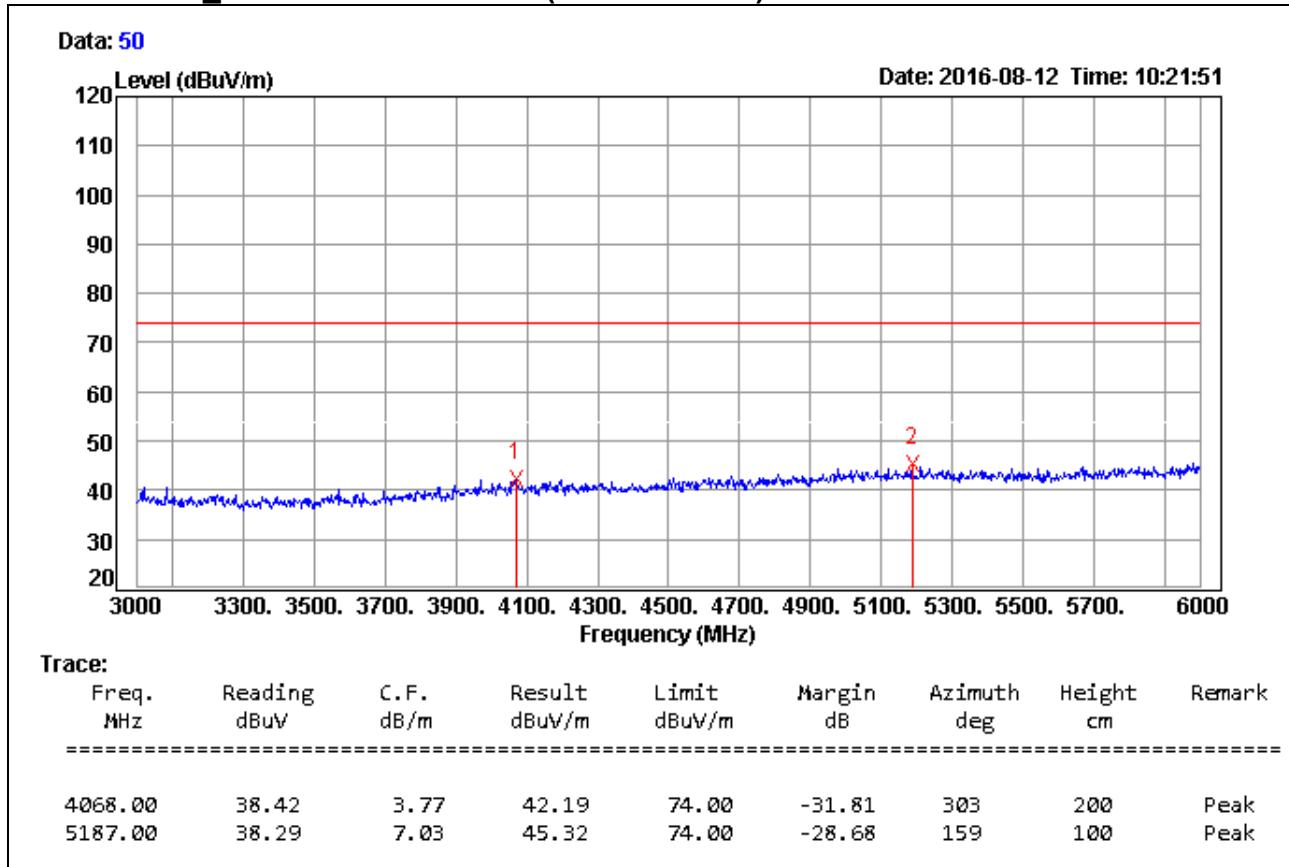
966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

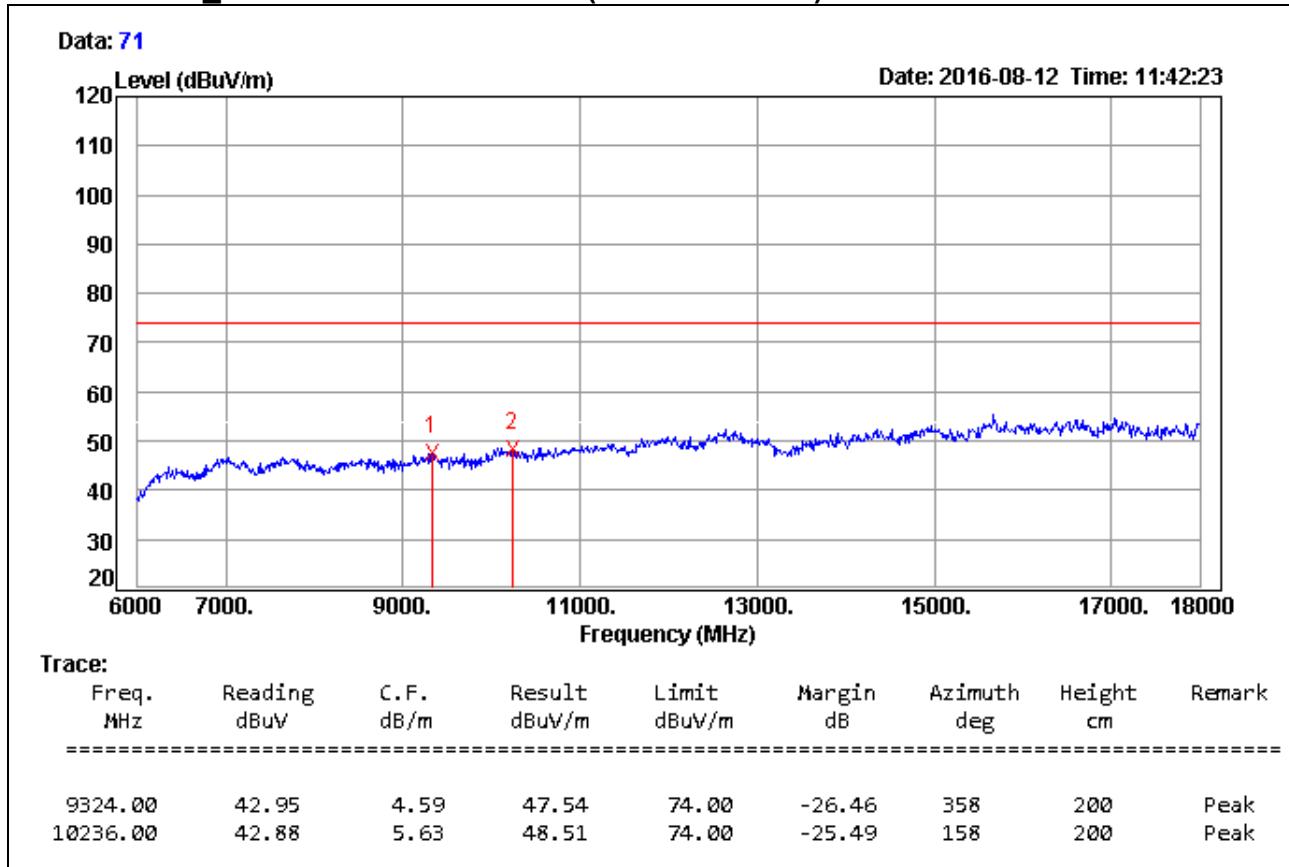
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

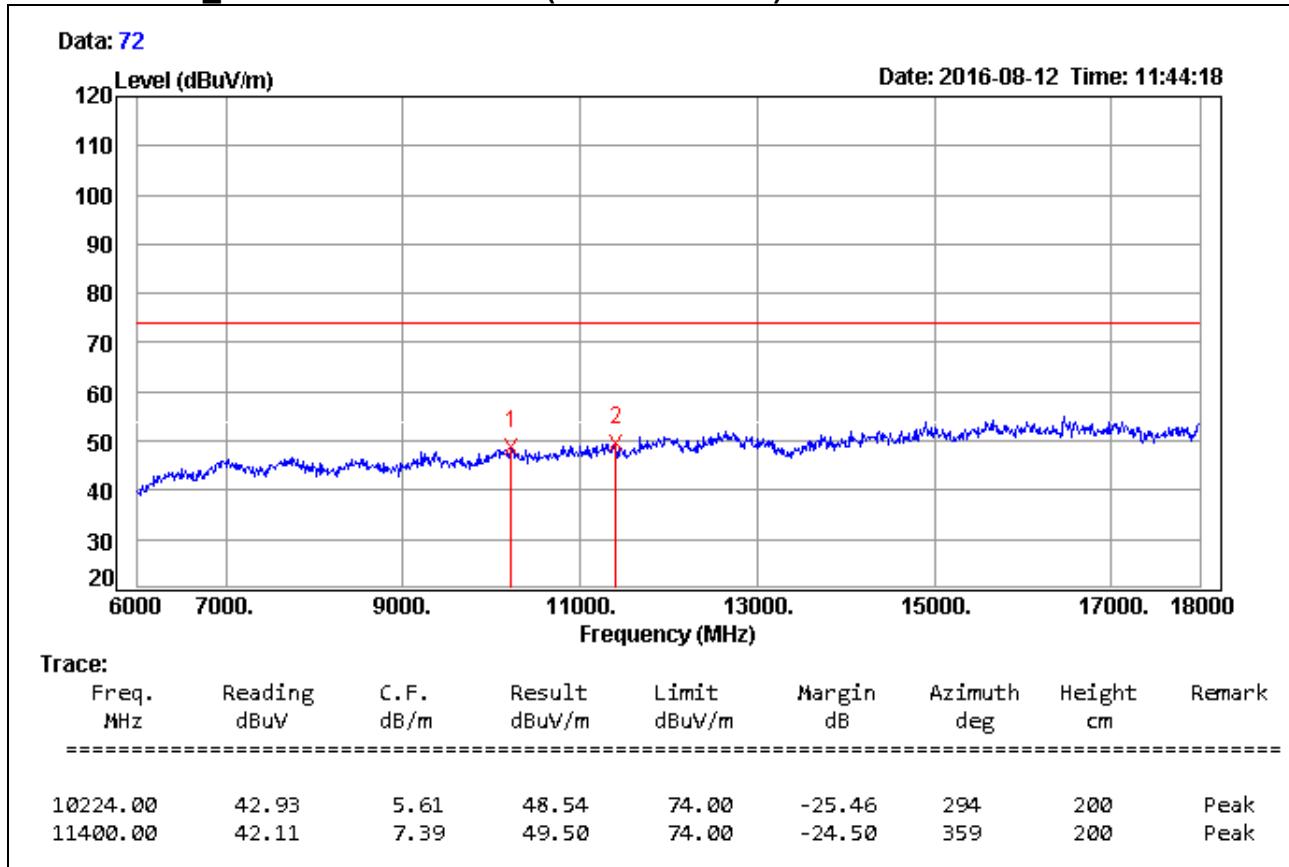
966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

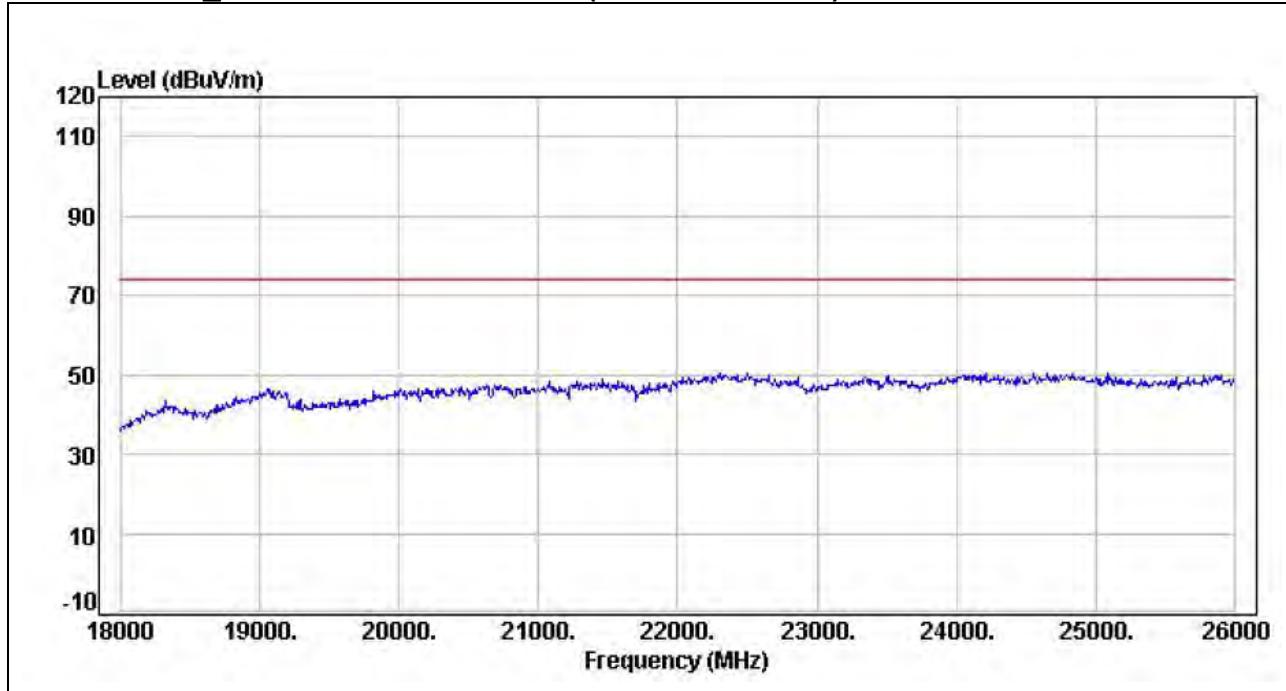
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

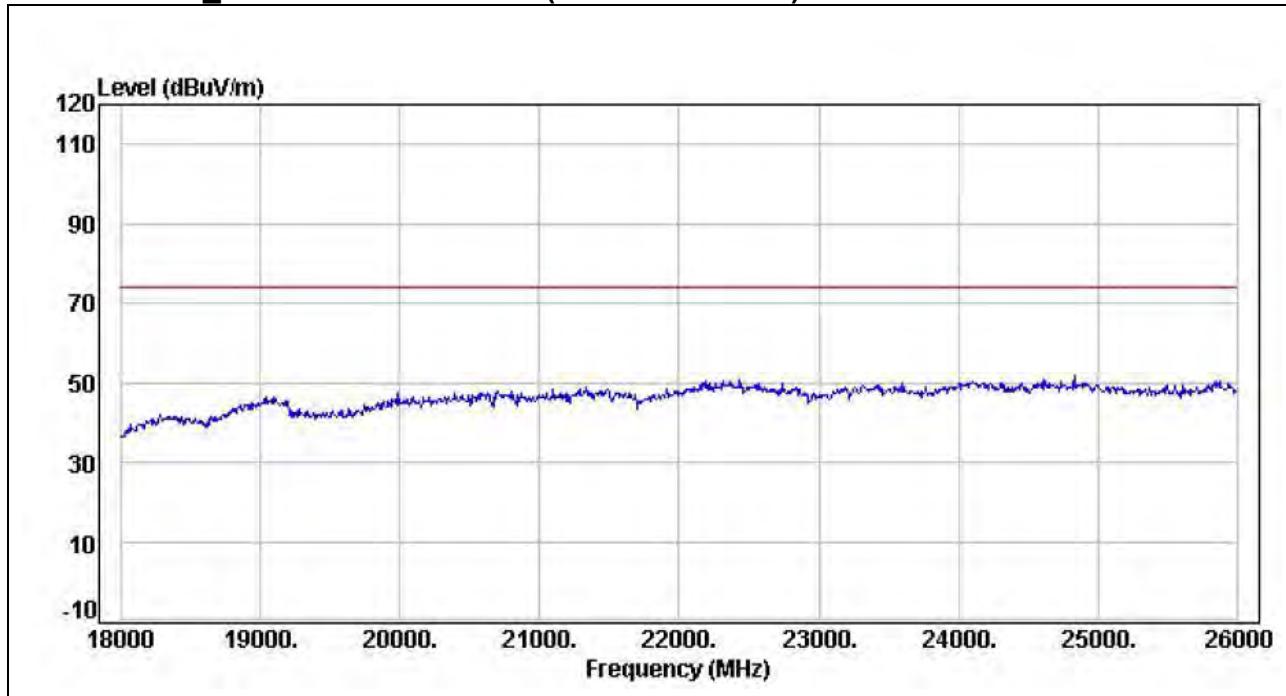
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

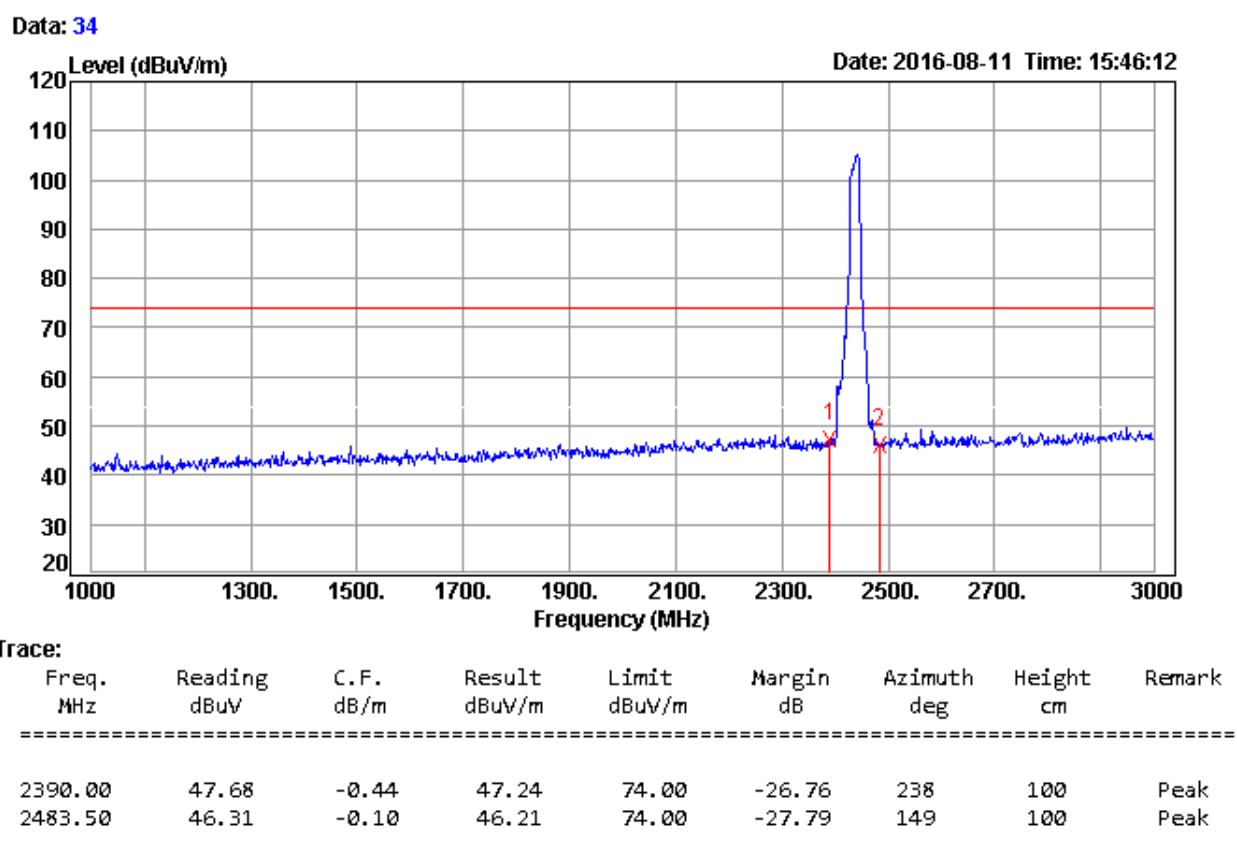
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)**Remark:**

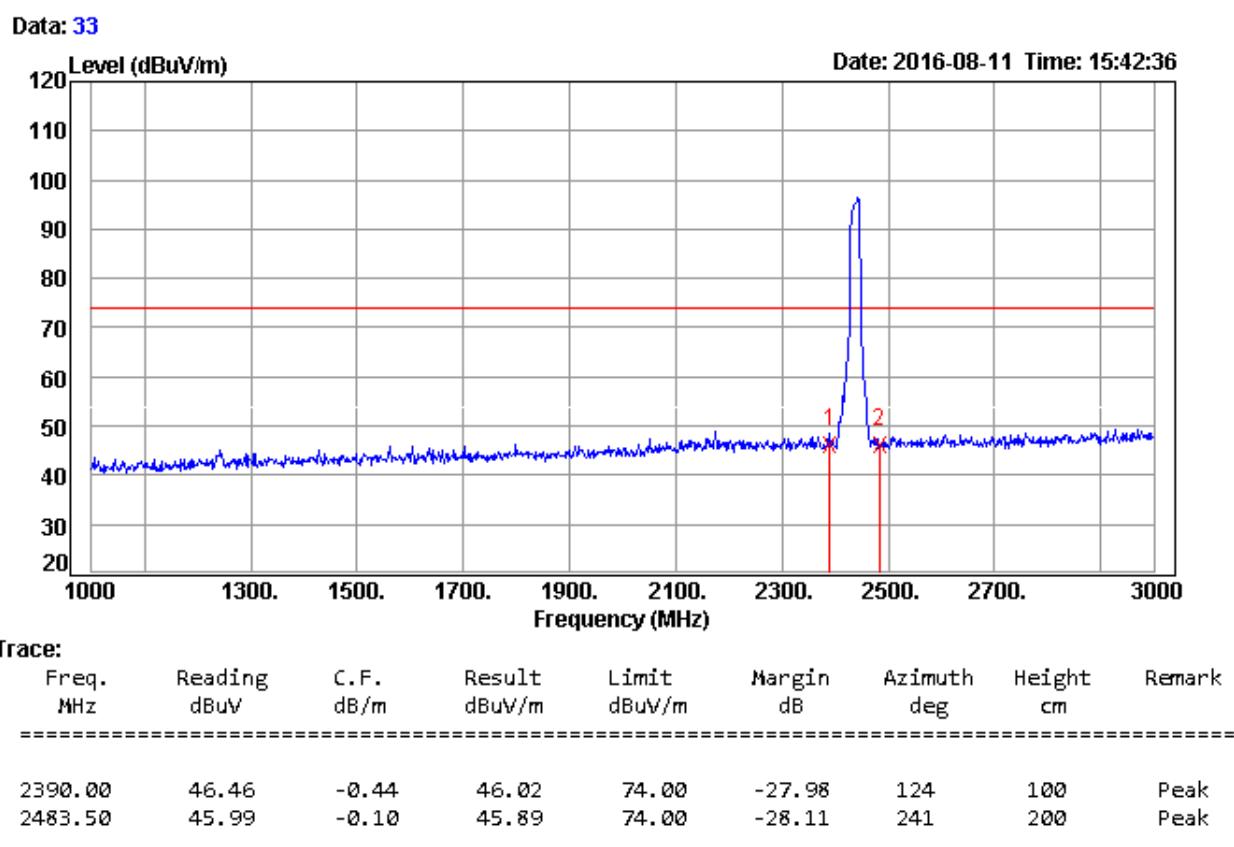
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

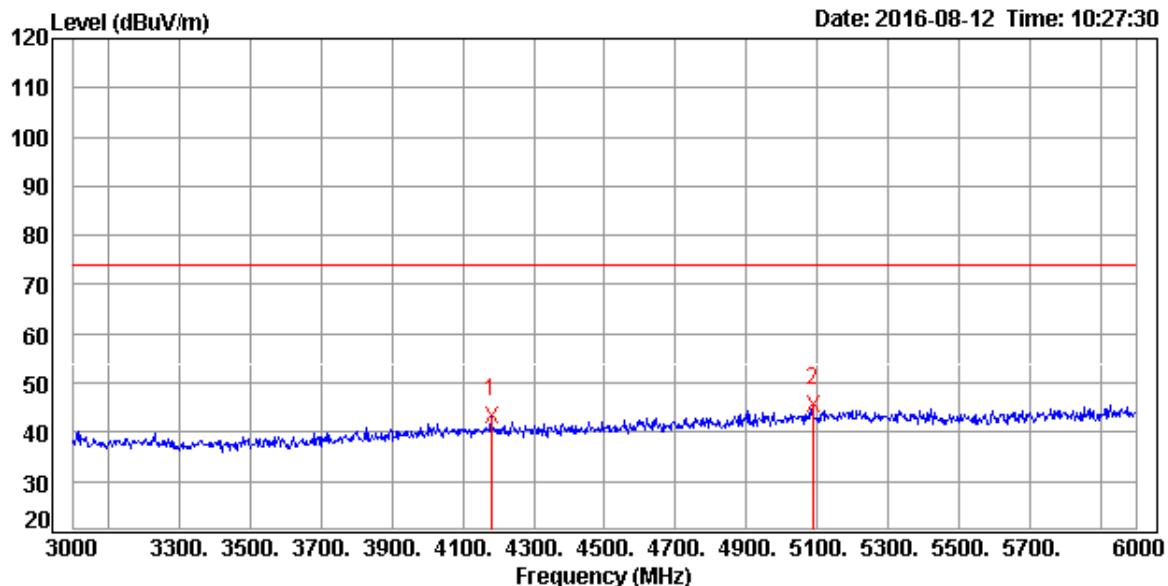
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 52



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4179.00	39.27	4.06	43.33	74.00	-30.67	266	100	Peak
5088.00	38.88	6.83	45.71	74.00	-28.29	145	100	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

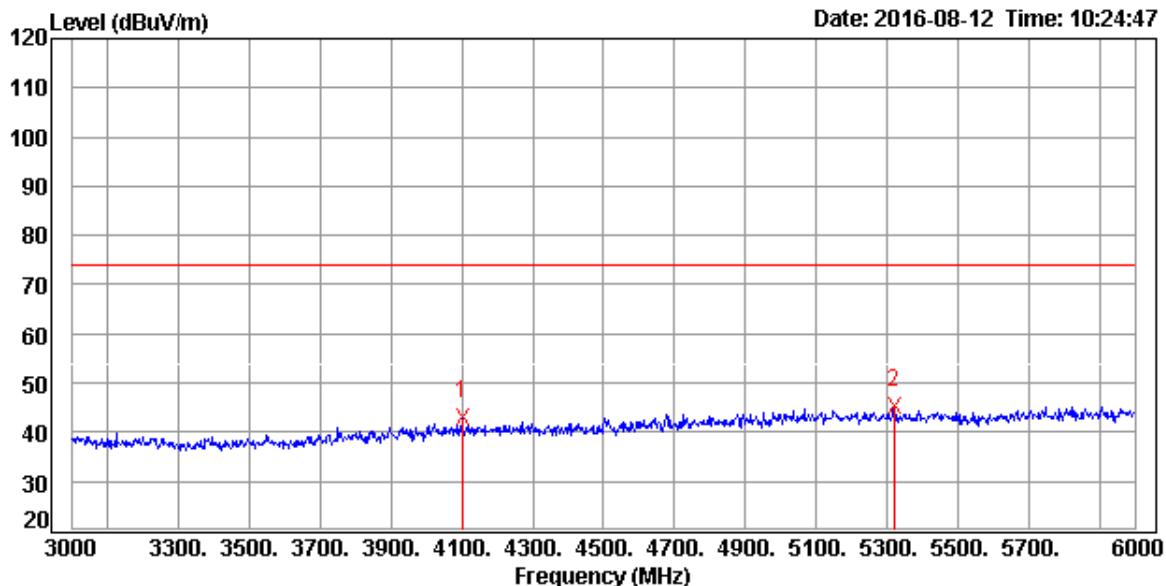
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 51



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
4101.00	39.08	3.86	42.94	74.00	-31.06	95	100	Peak
5319.00	38.10	7.29	45.39	74.00	-28.61	76	100	Peak

Remark:

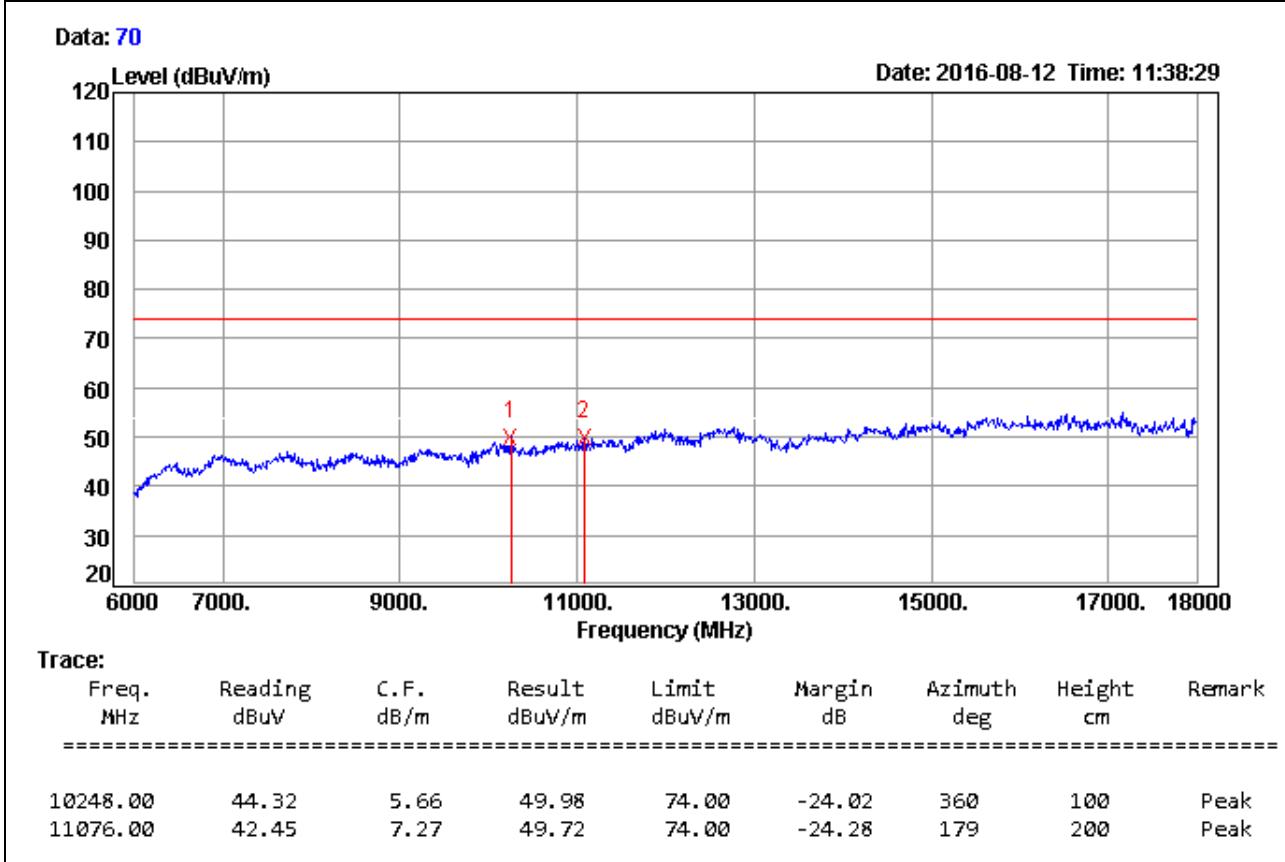
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

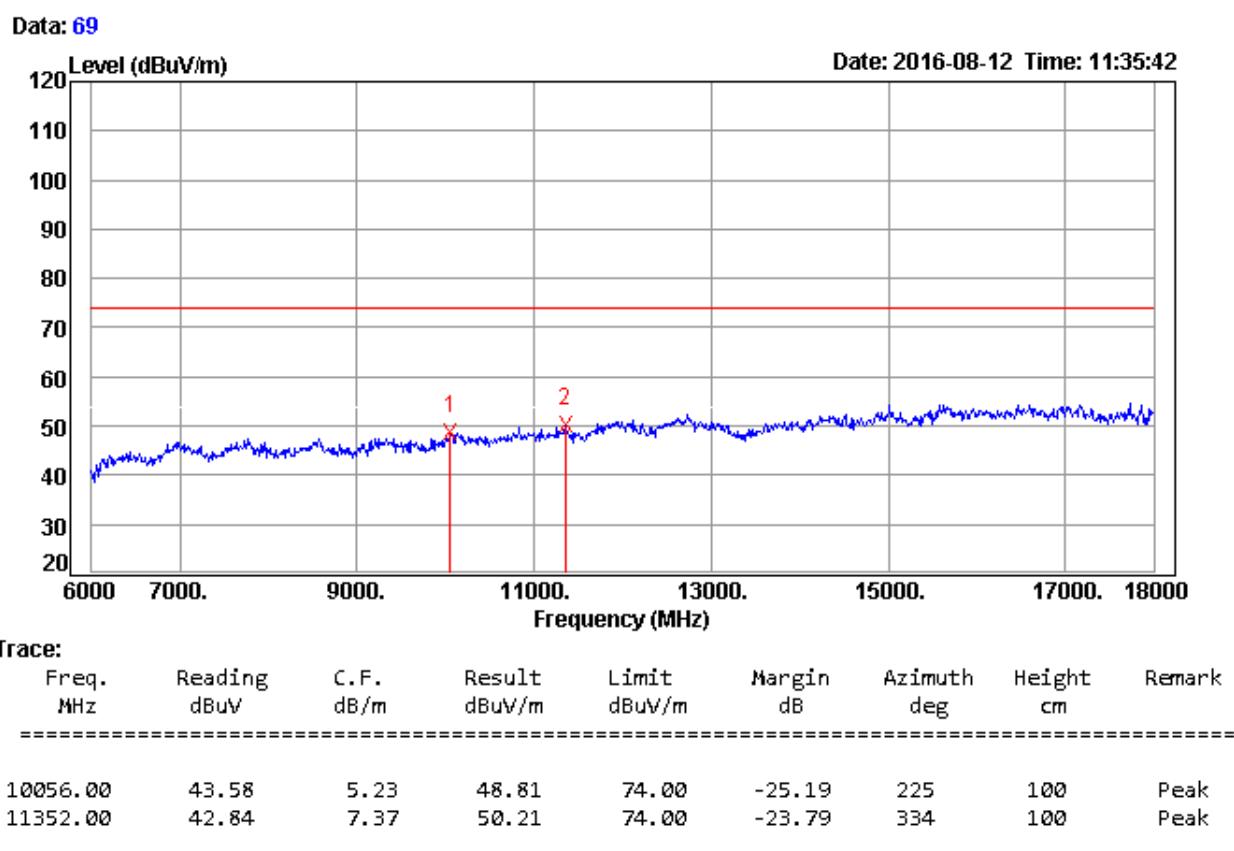
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

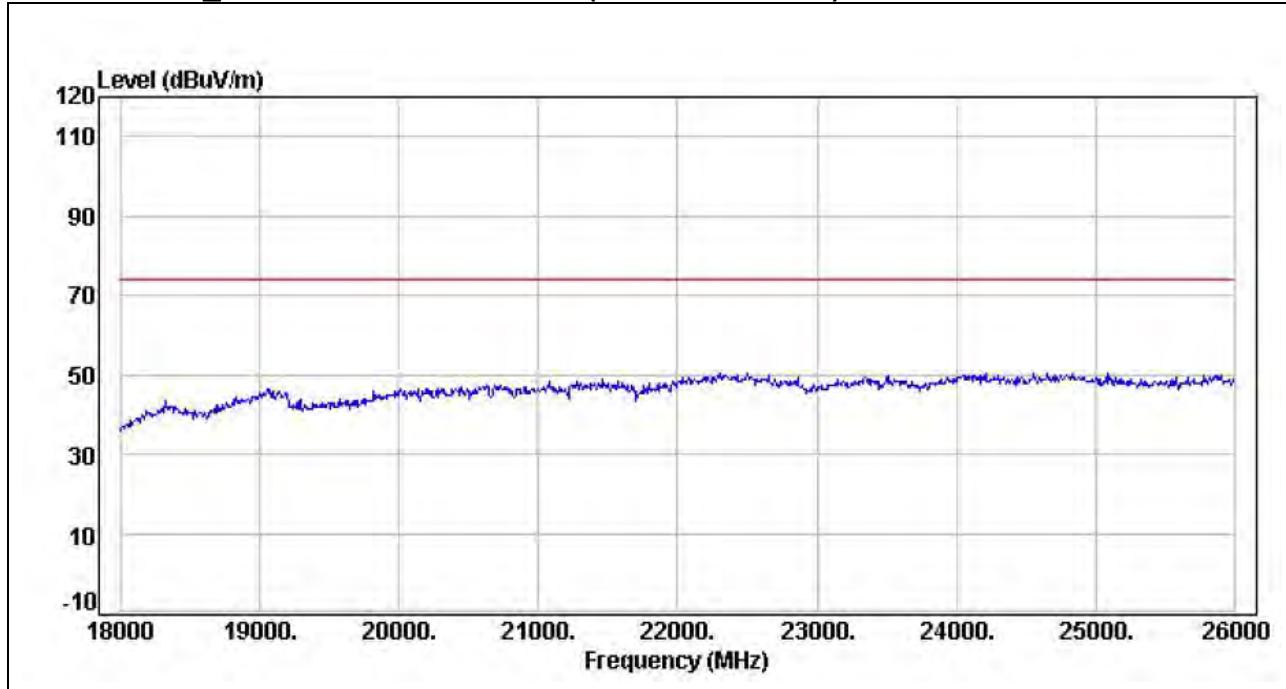
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

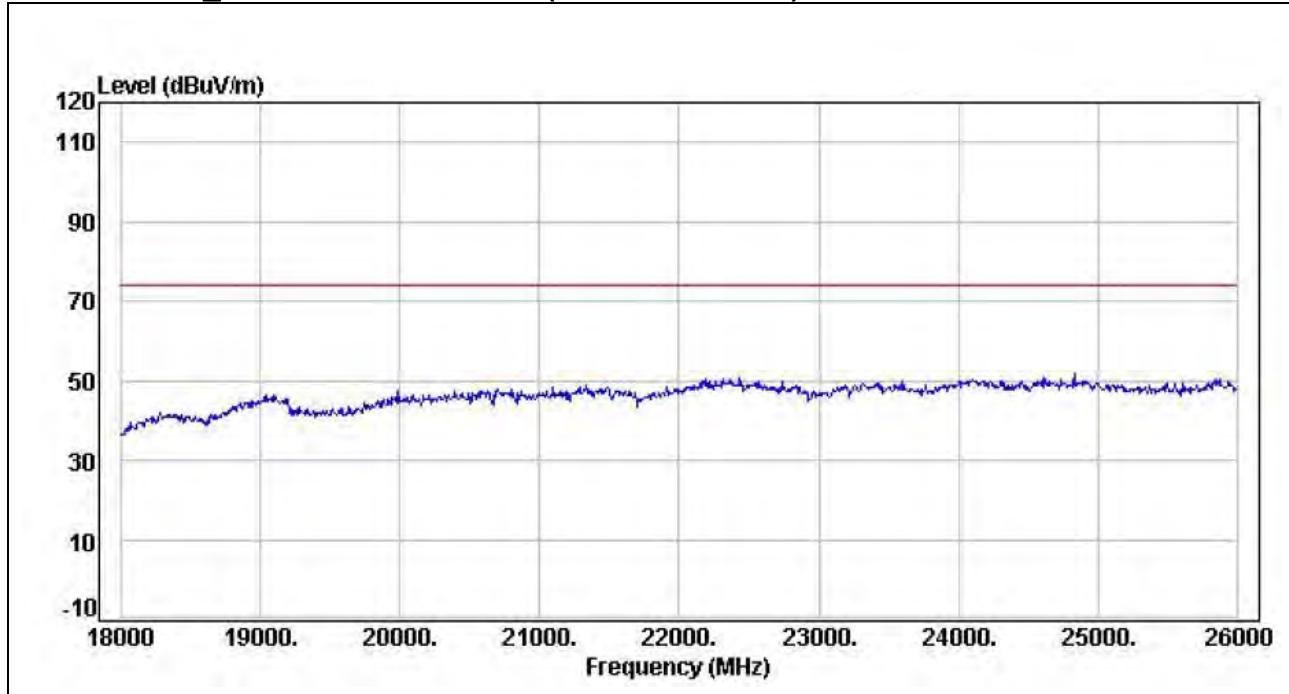
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

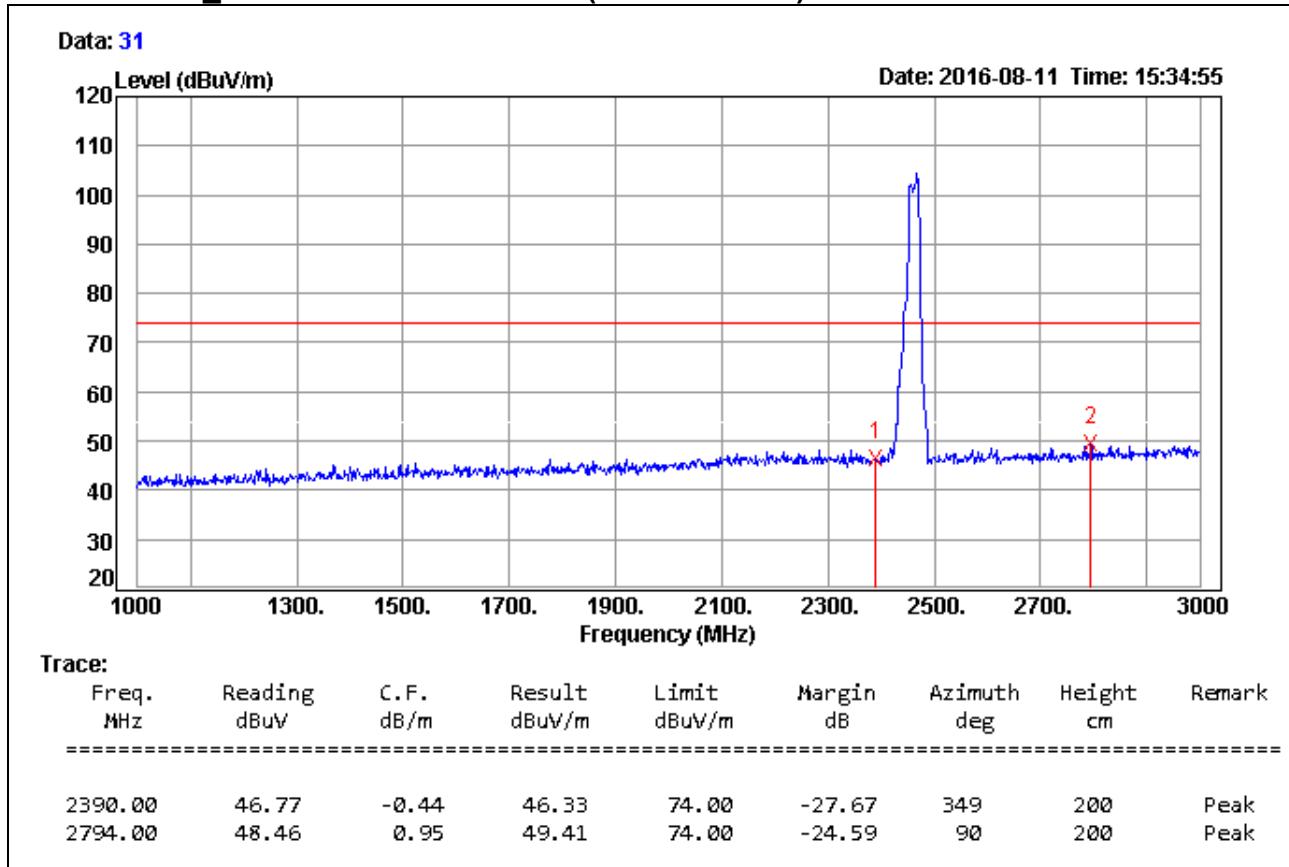
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

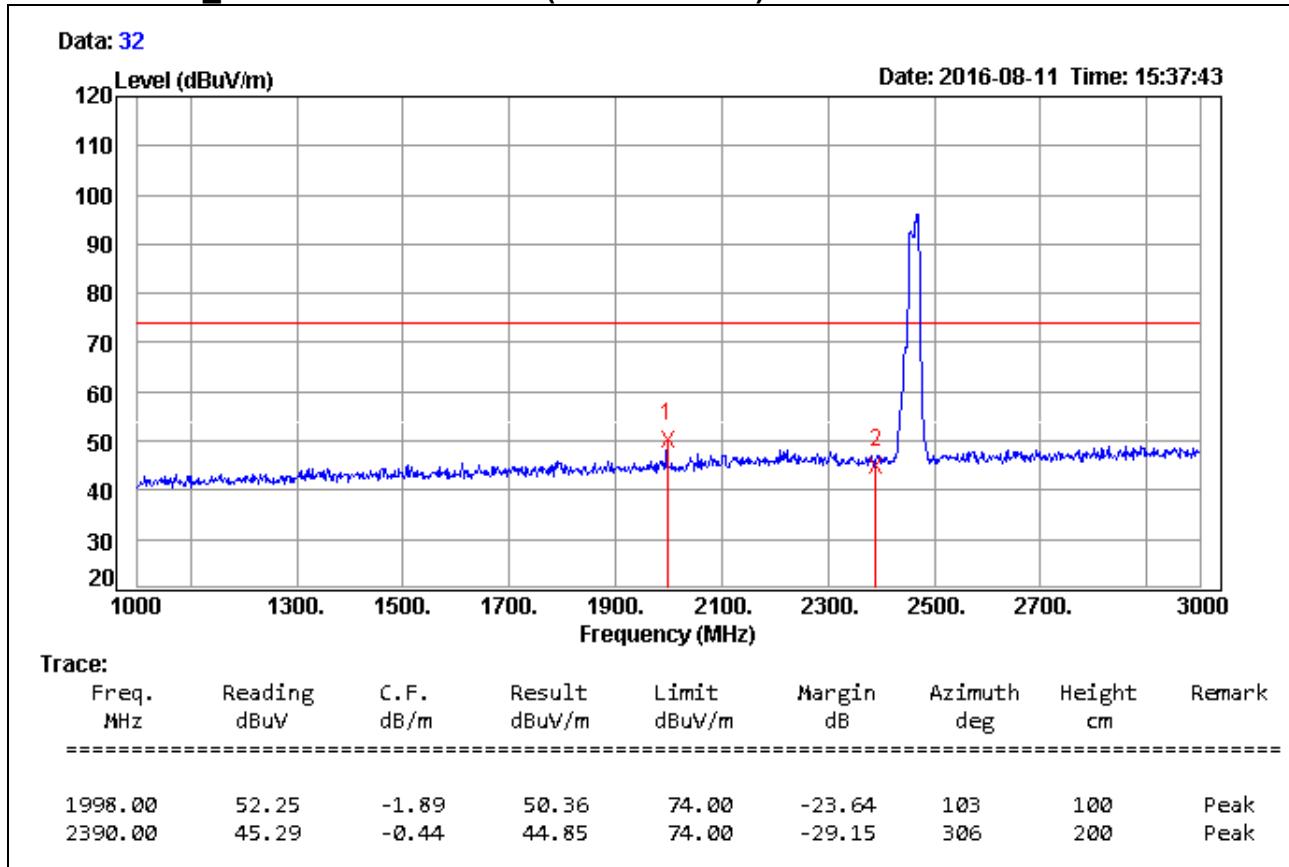


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

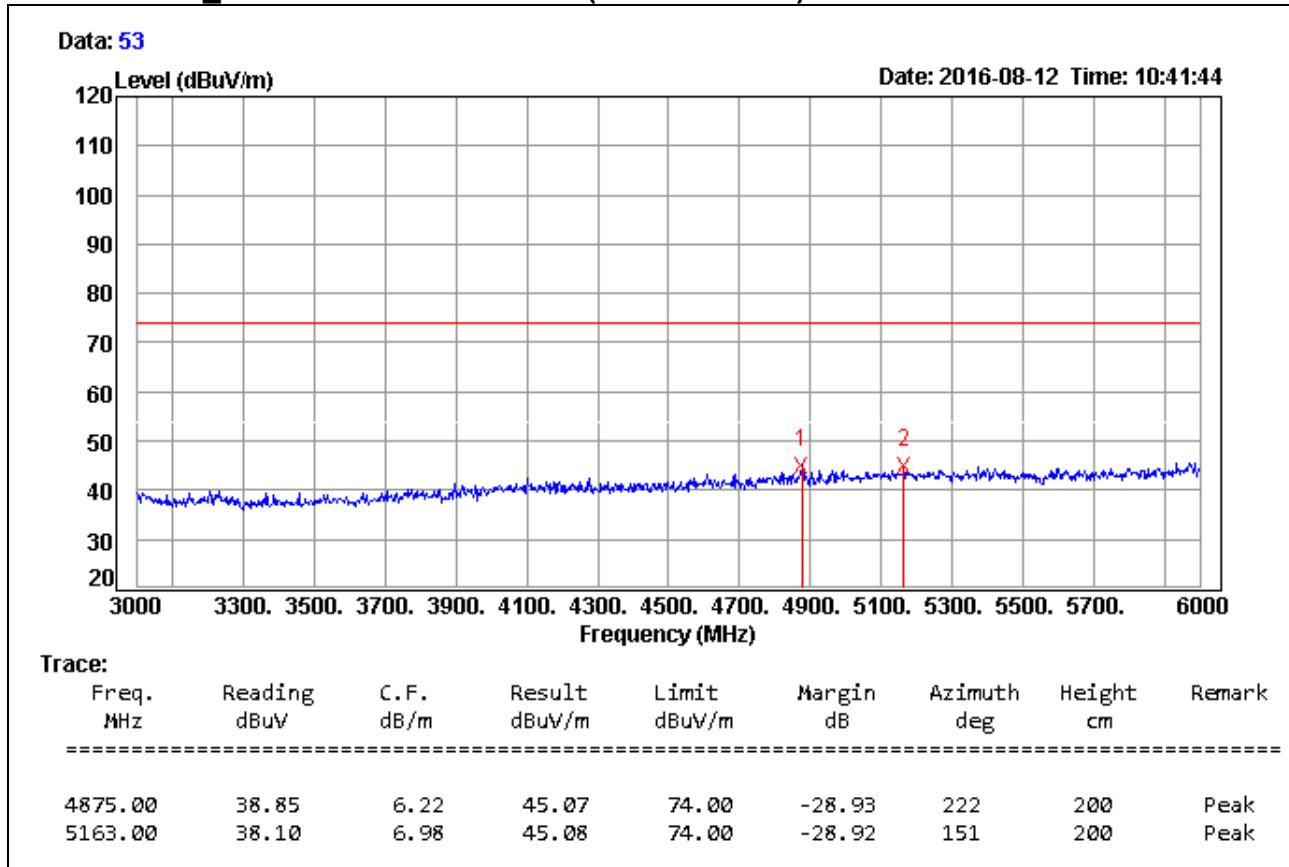
966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

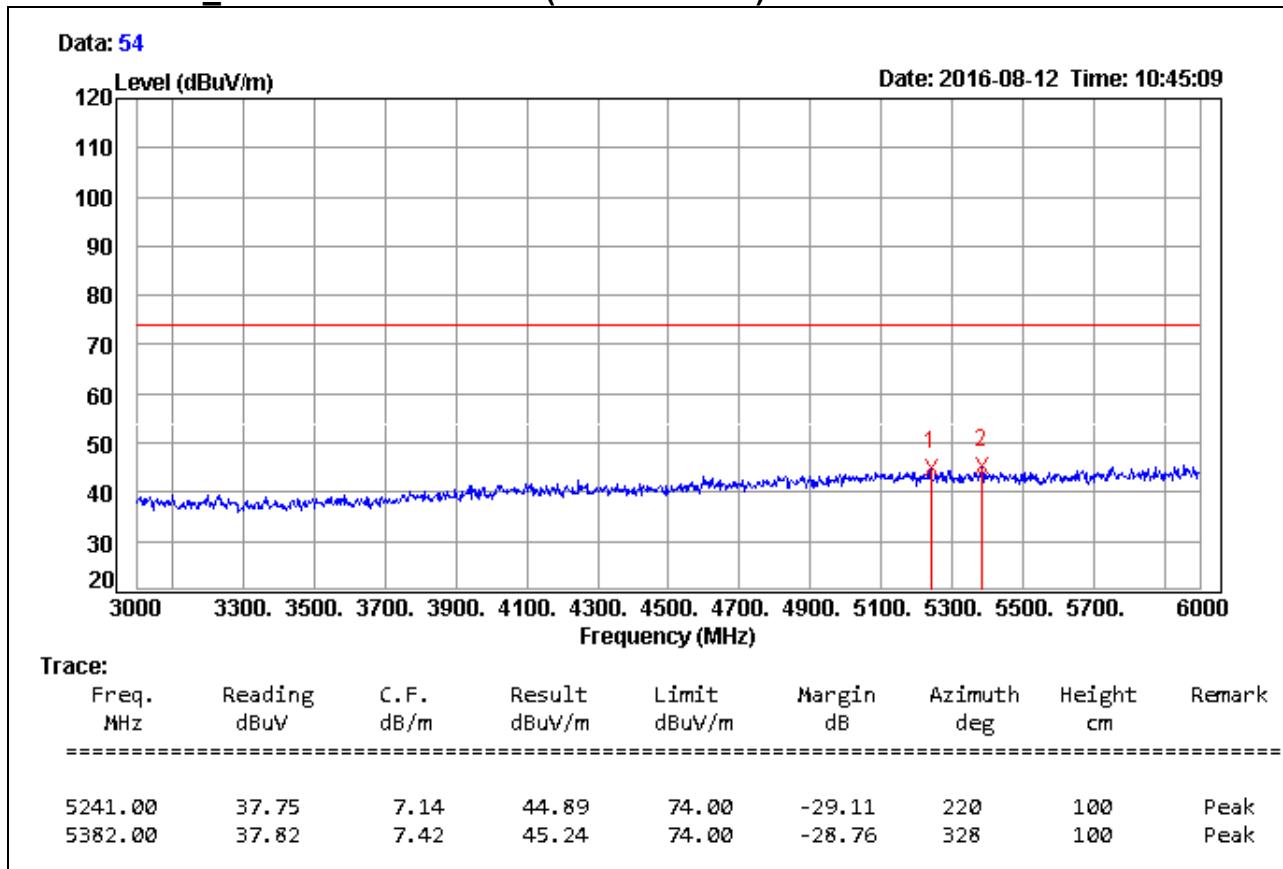
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

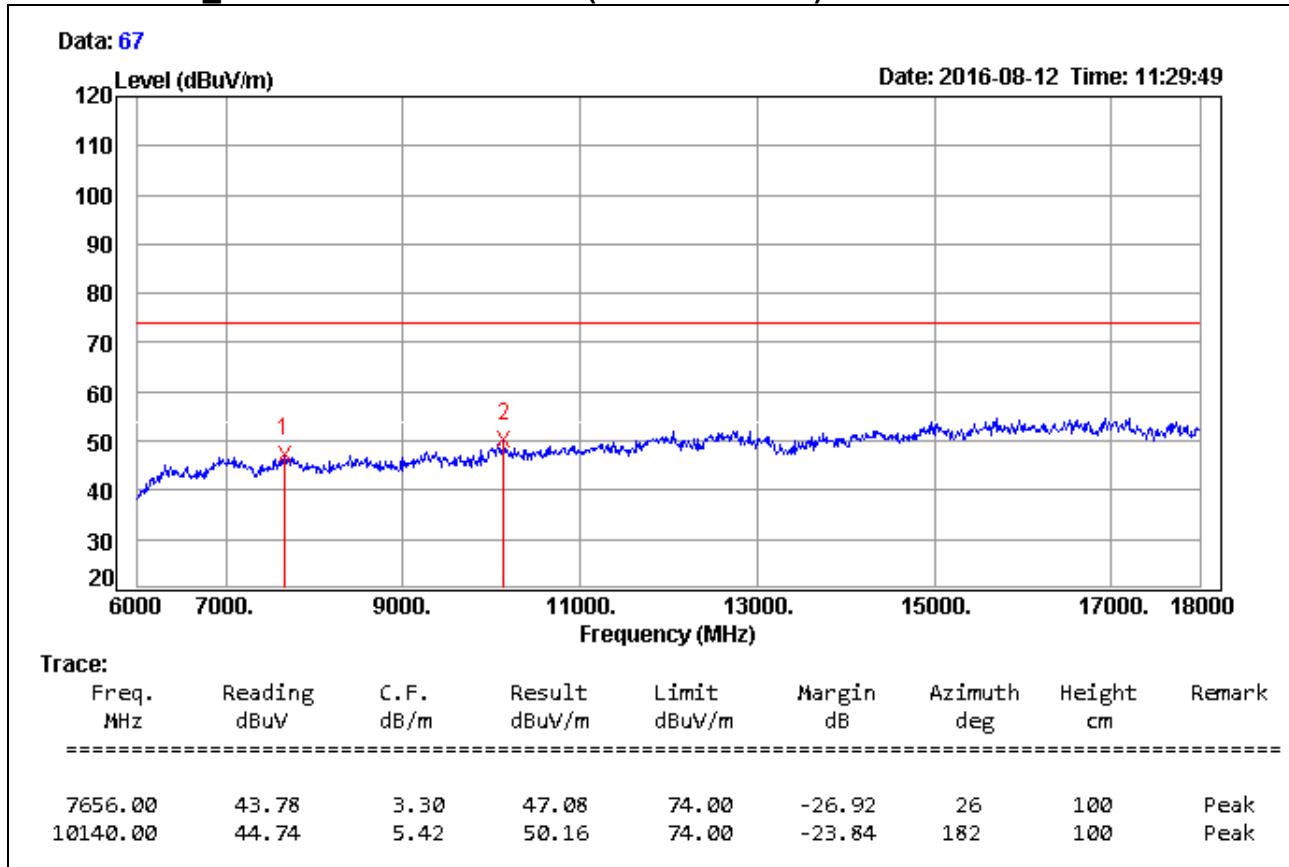
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

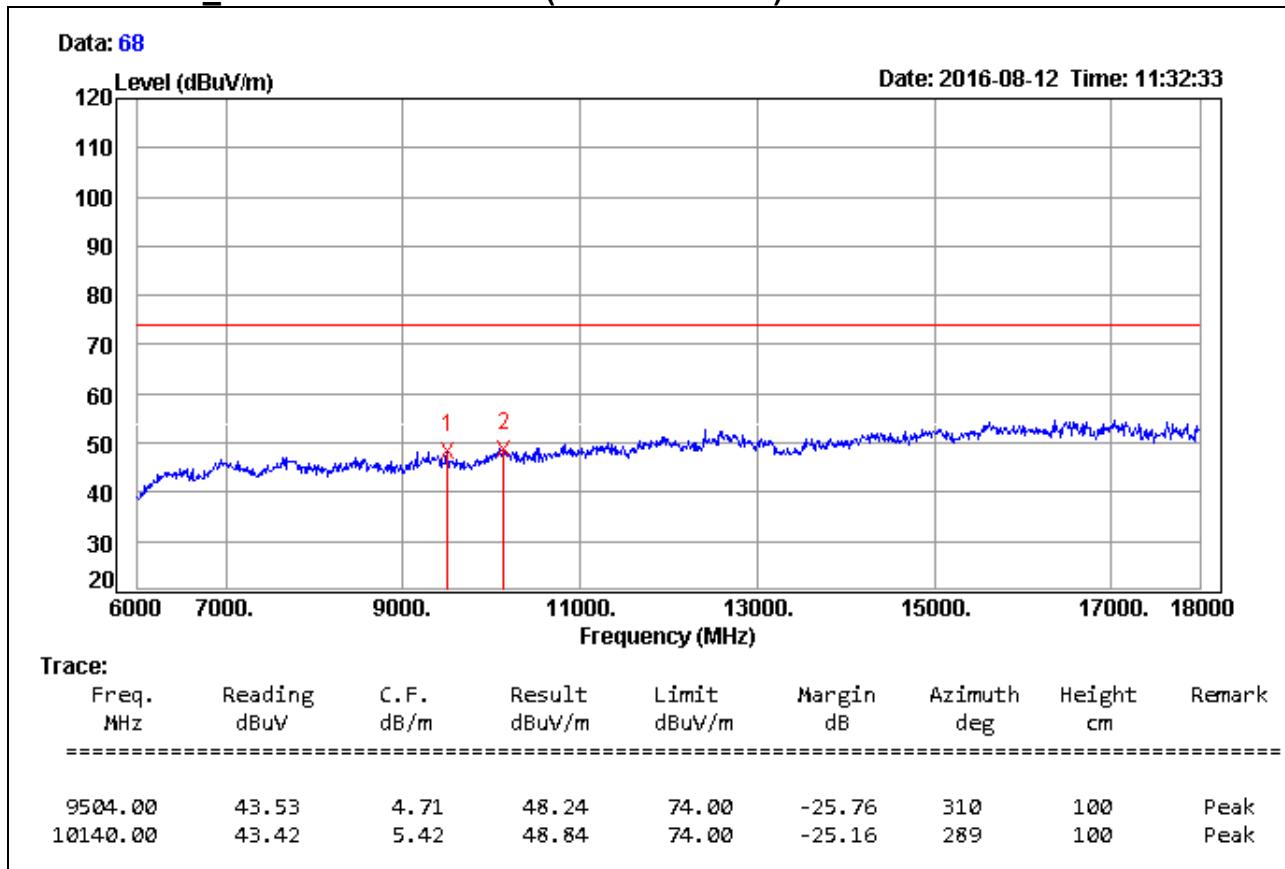
966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

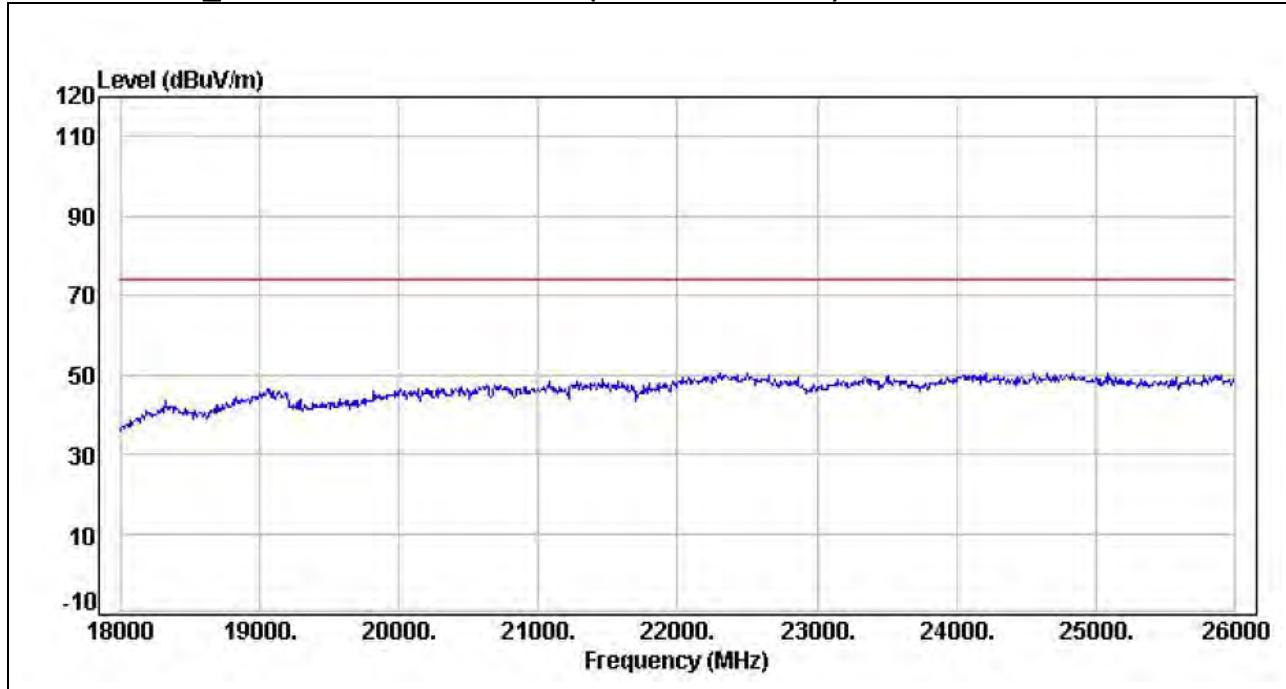
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

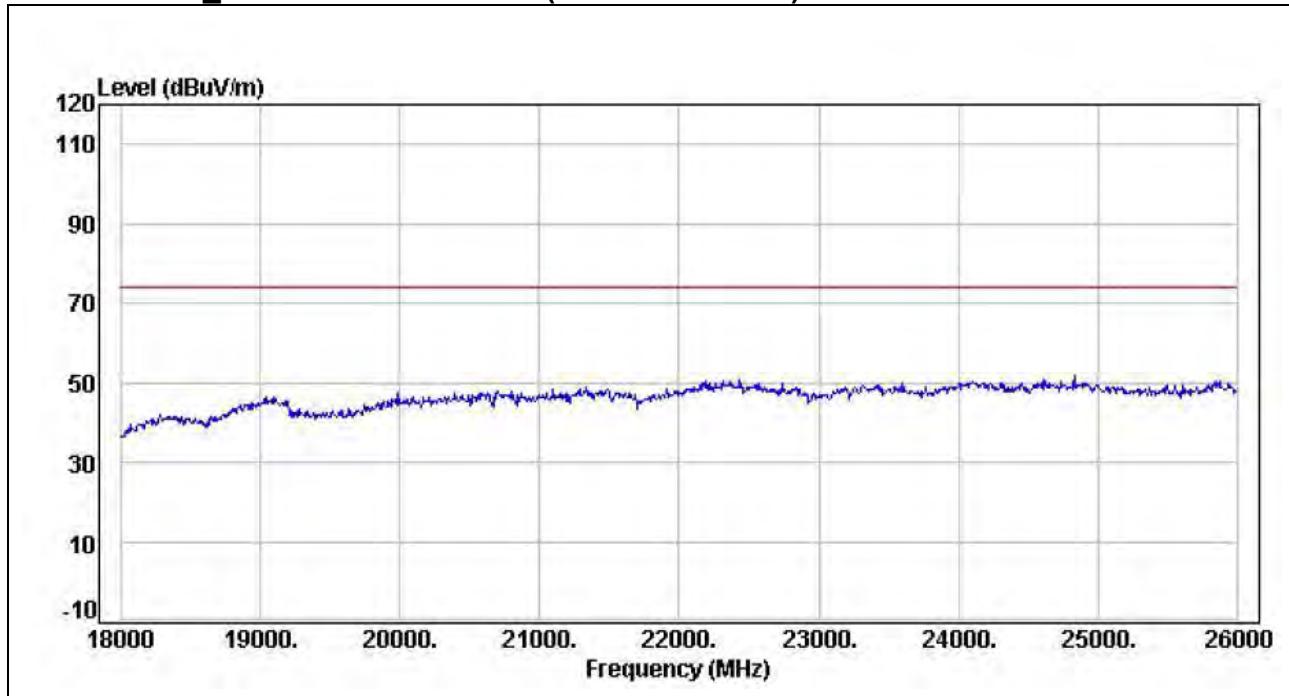
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

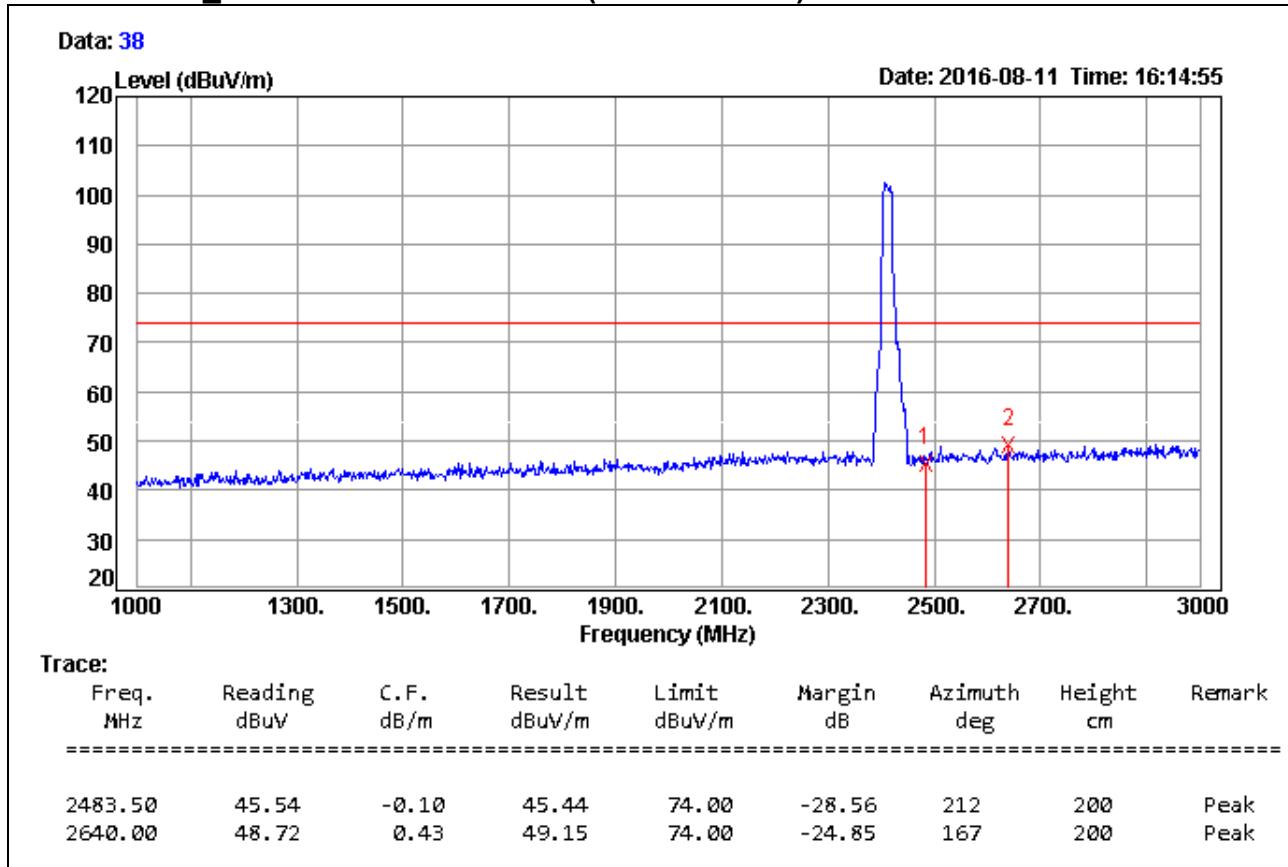
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

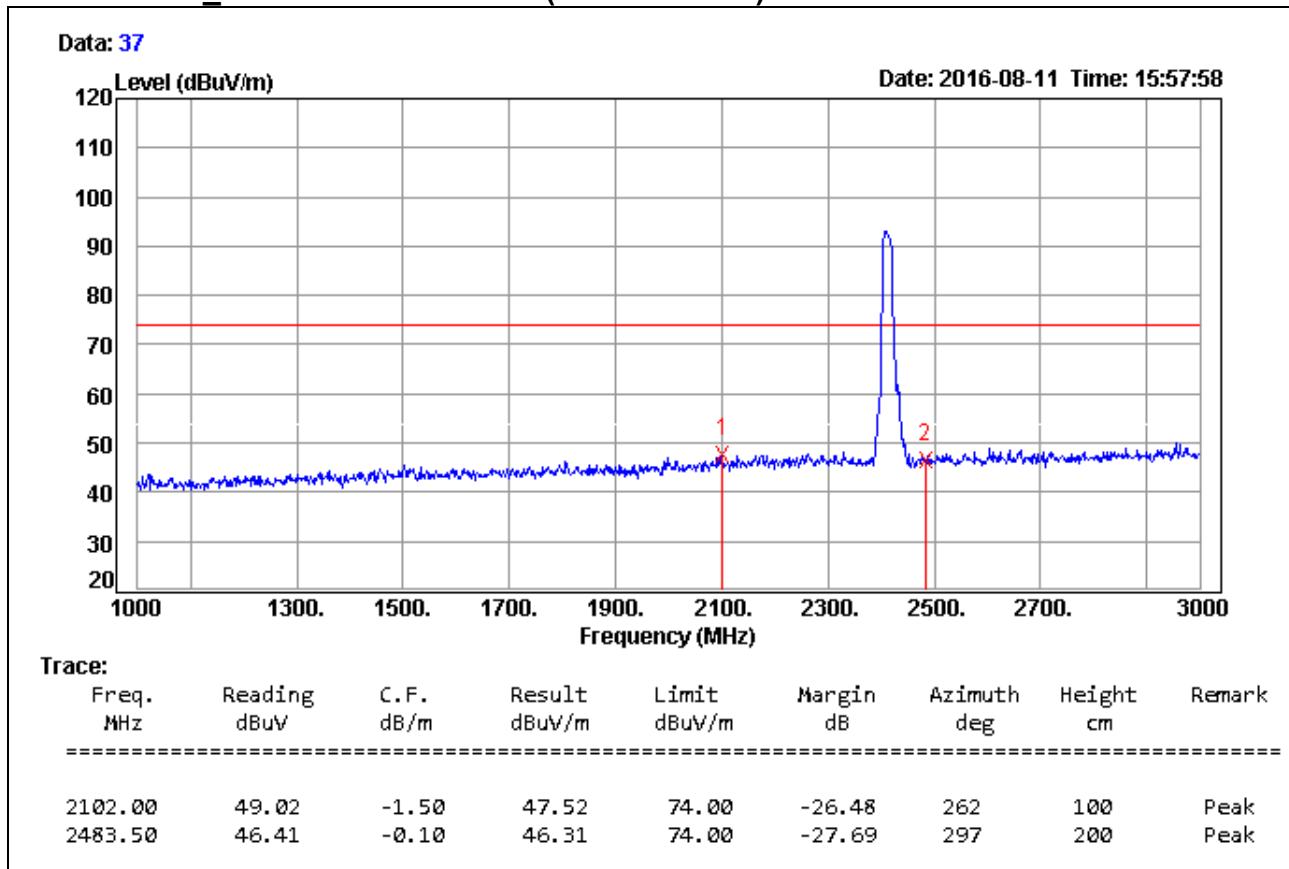
966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

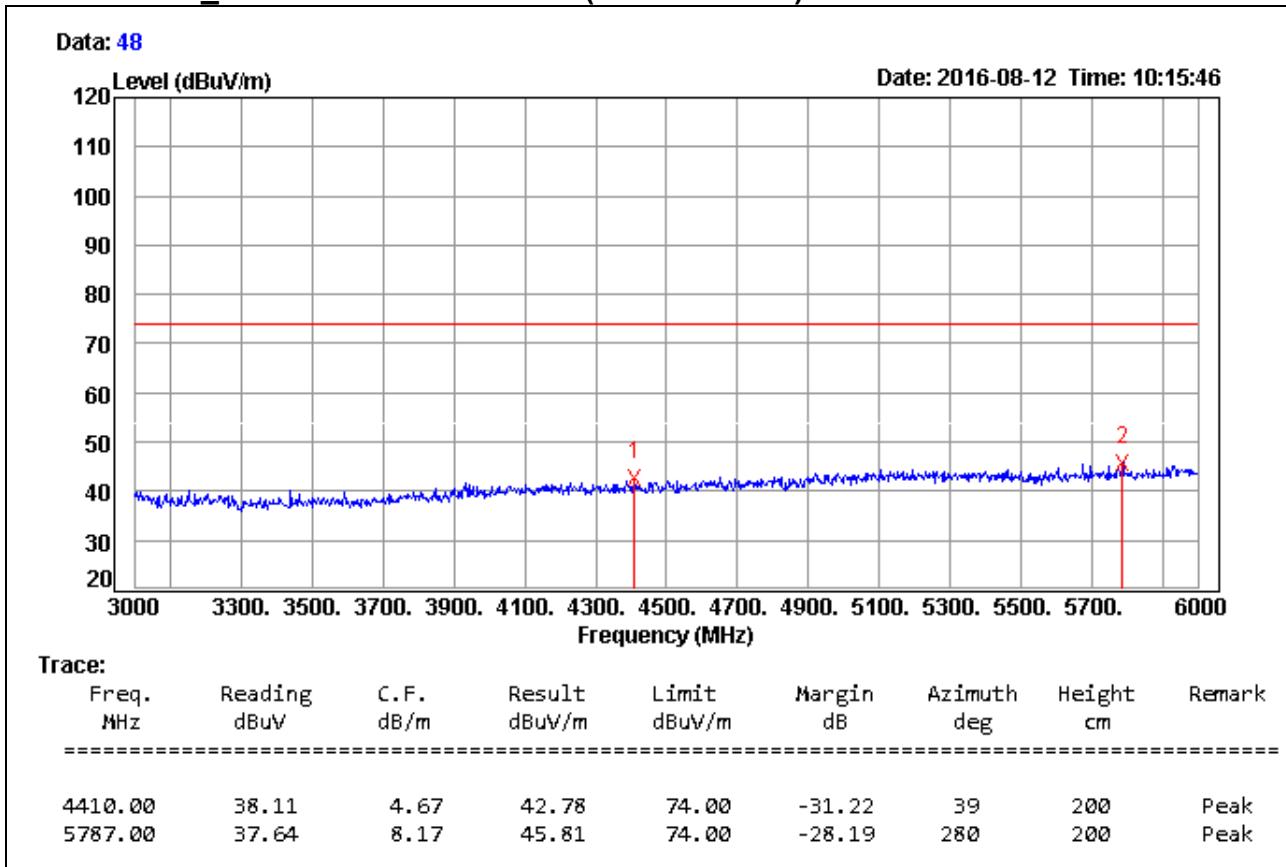
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/11
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

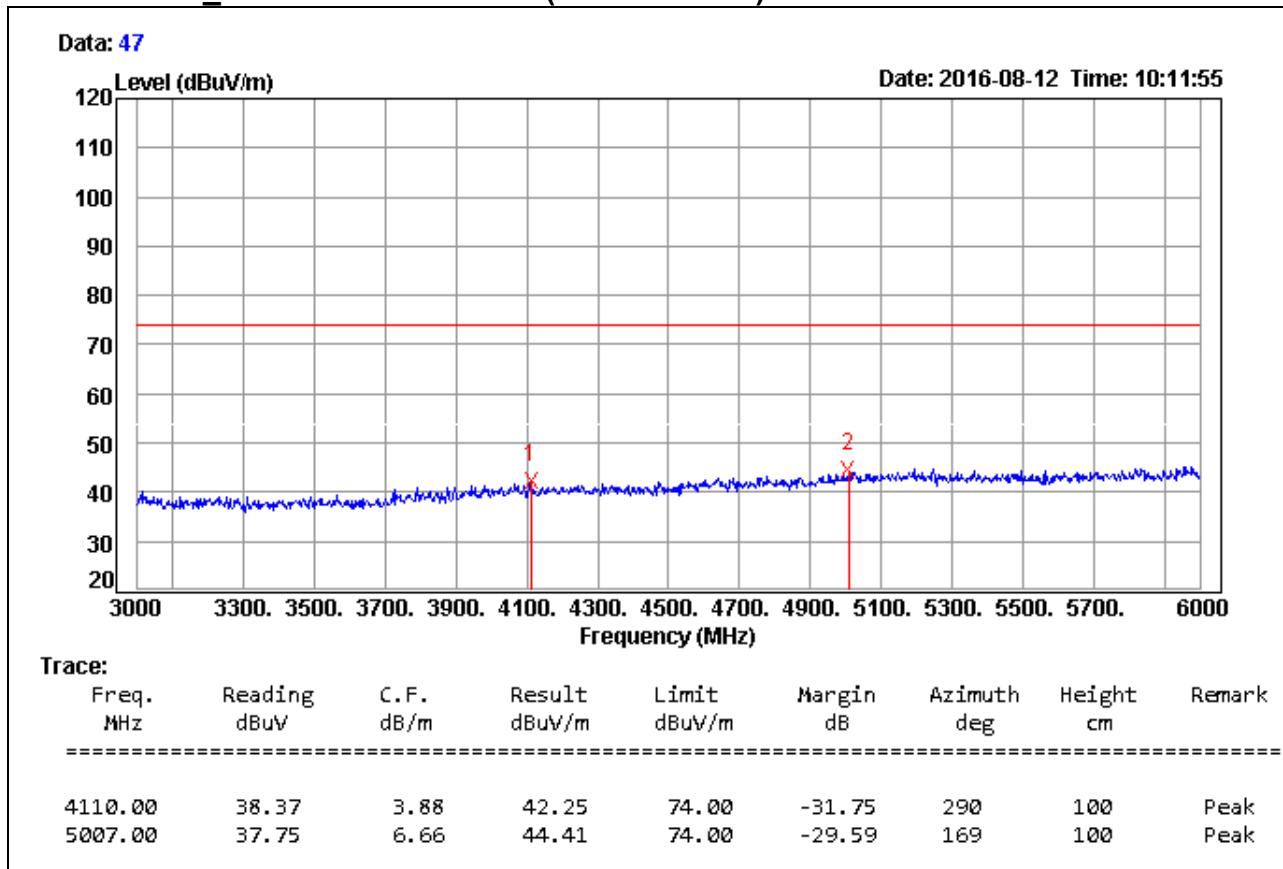
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

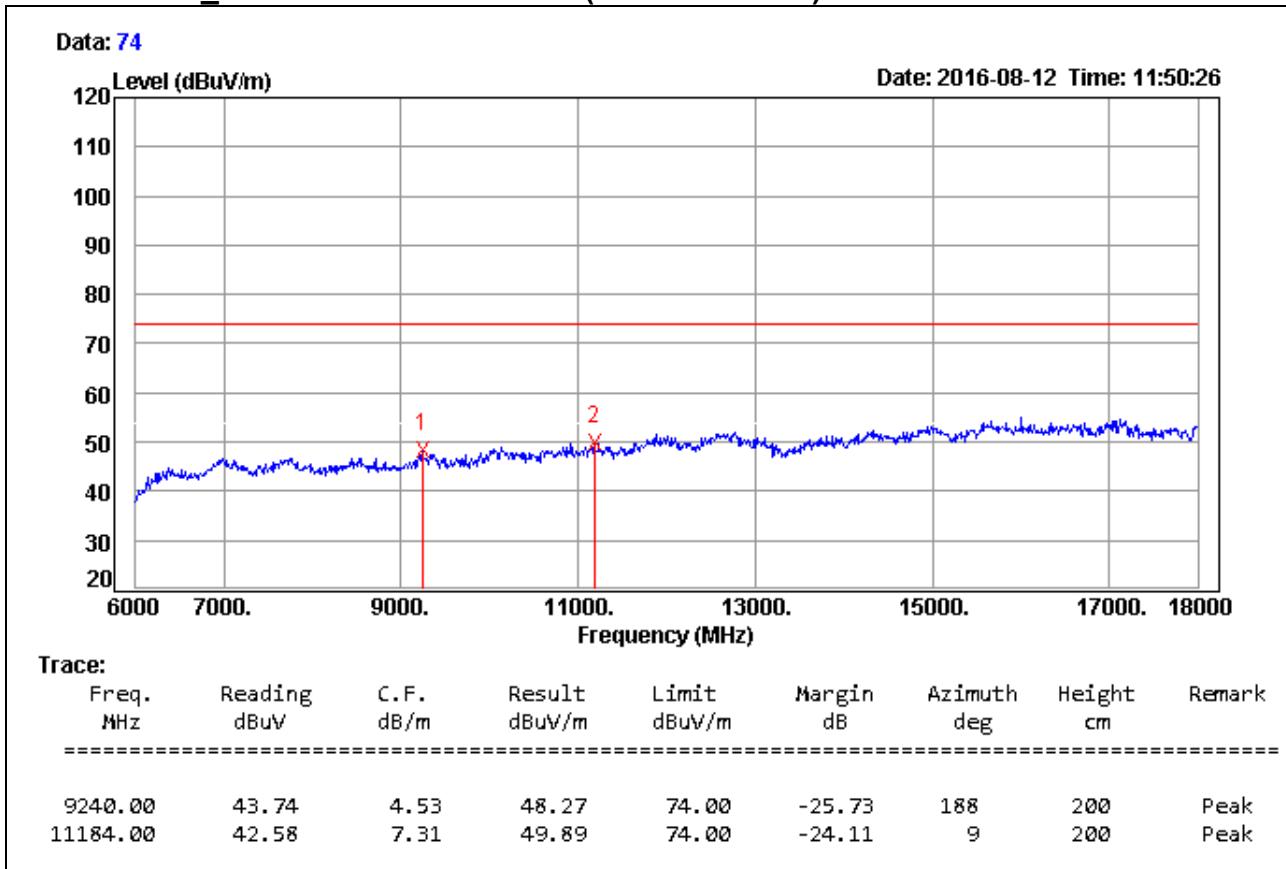
966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)



Remark:

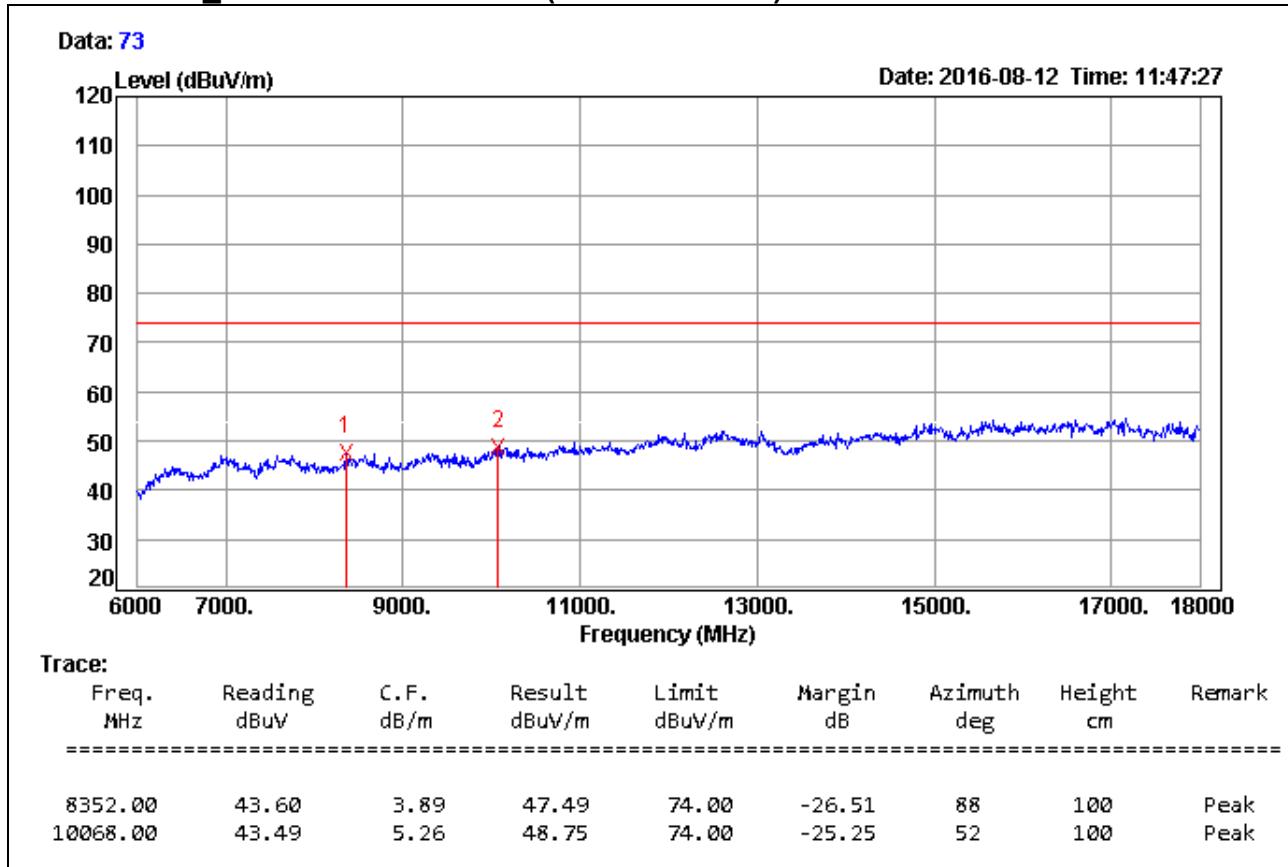
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

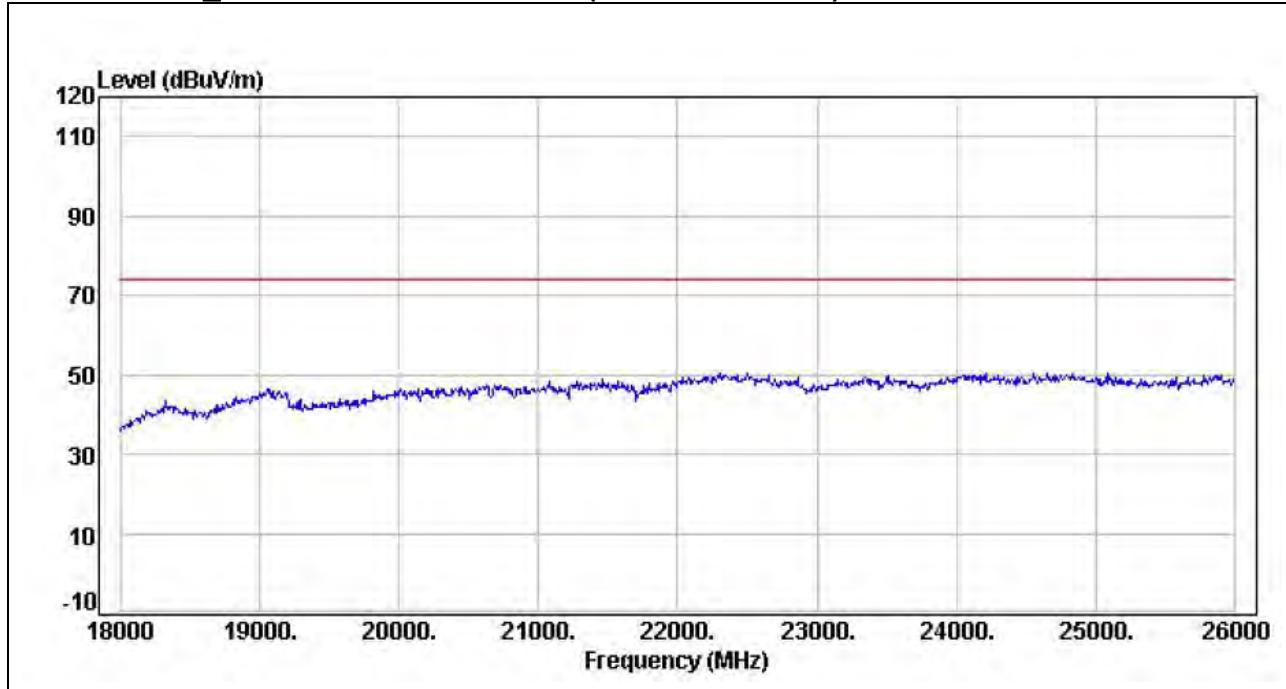
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

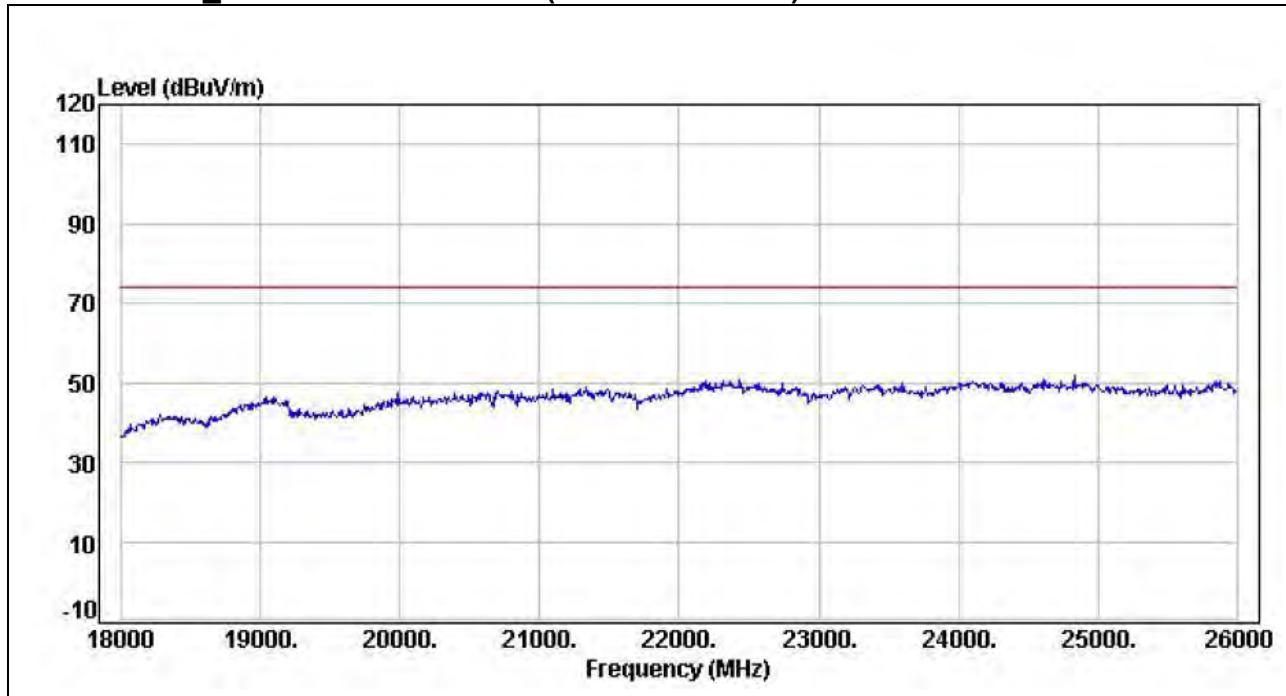
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

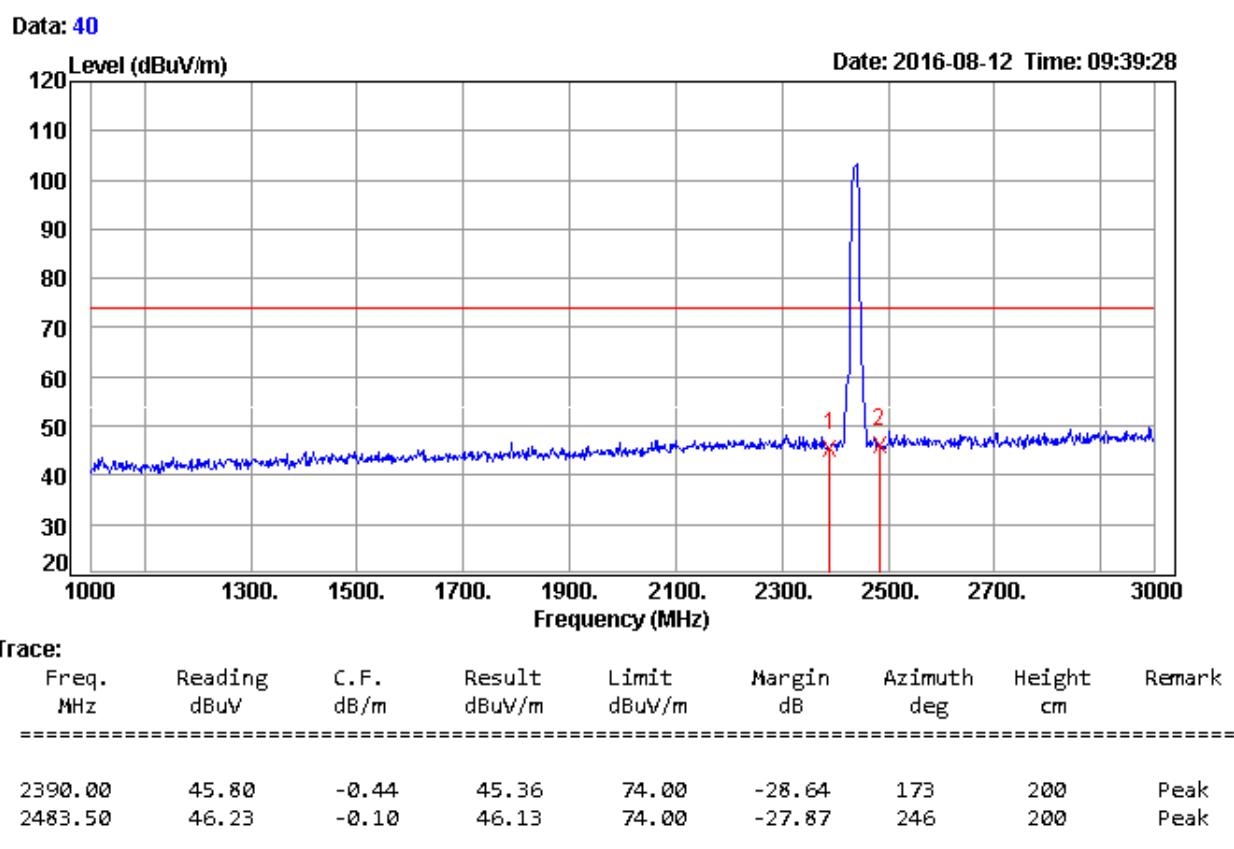
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

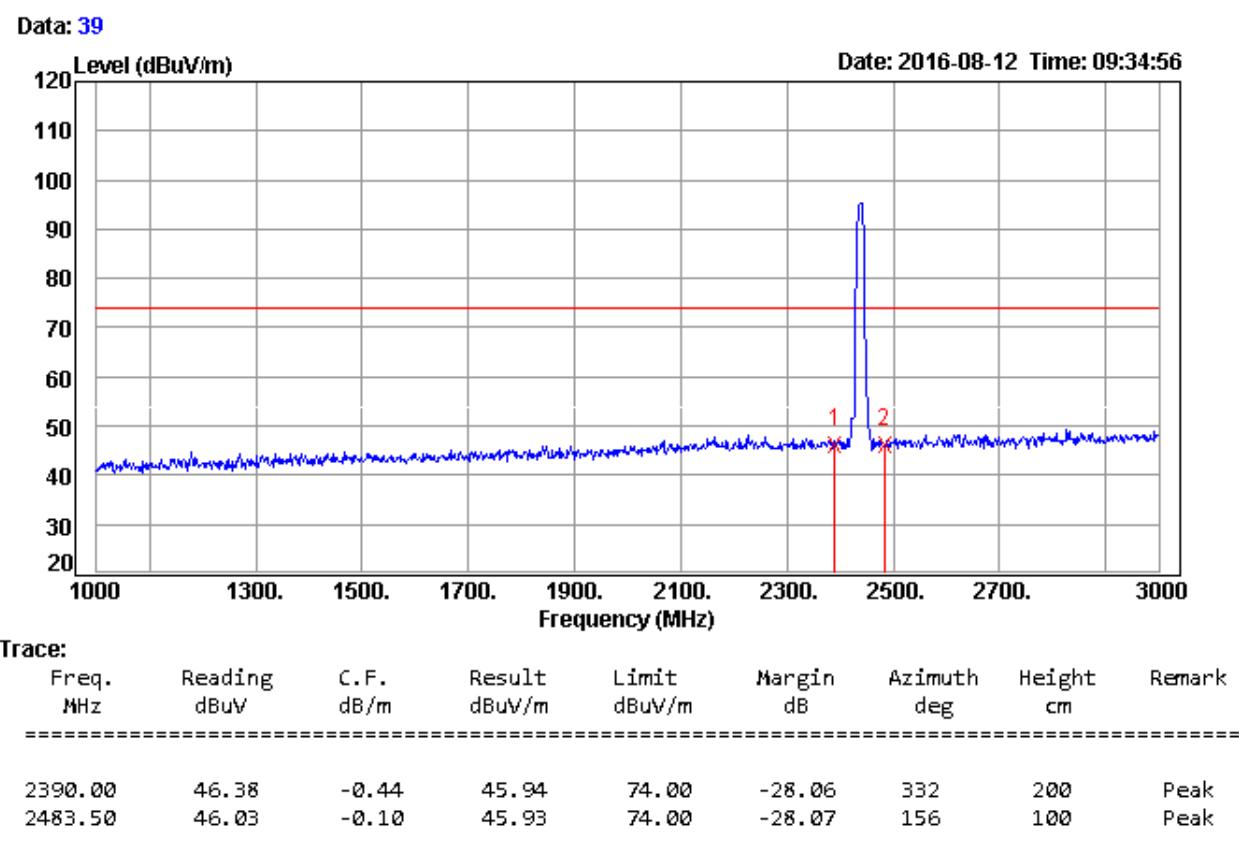
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

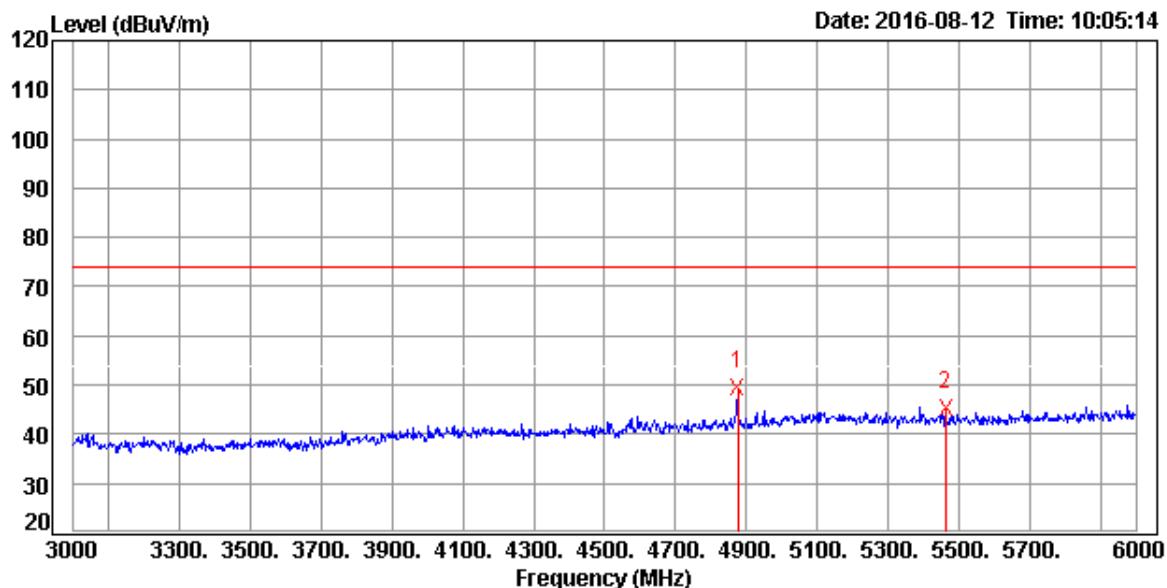
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 45



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4875.00	43.22	6.22	49.44	74.00	-24.56	217	200	Peak
5463.00	37.84	7.59	45.43	74.00	-28.57	120	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

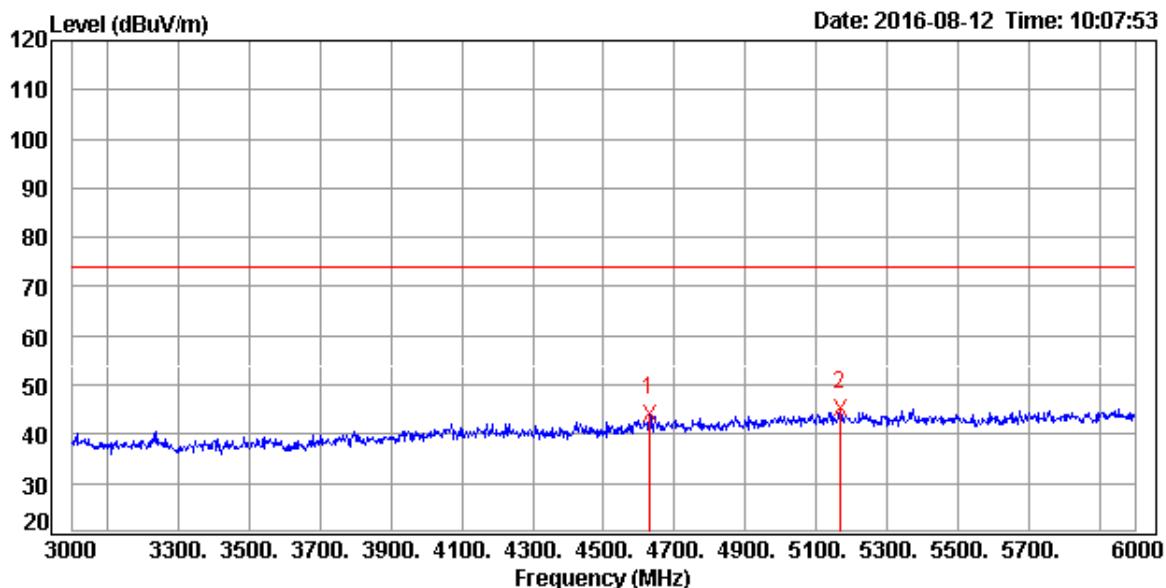
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 46



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4629.00	38.68	5.36	44.04	74.00	-29.96	233	200	Peak
5166.00	38.31	6.99	45.30	74.00	-28.70	63	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

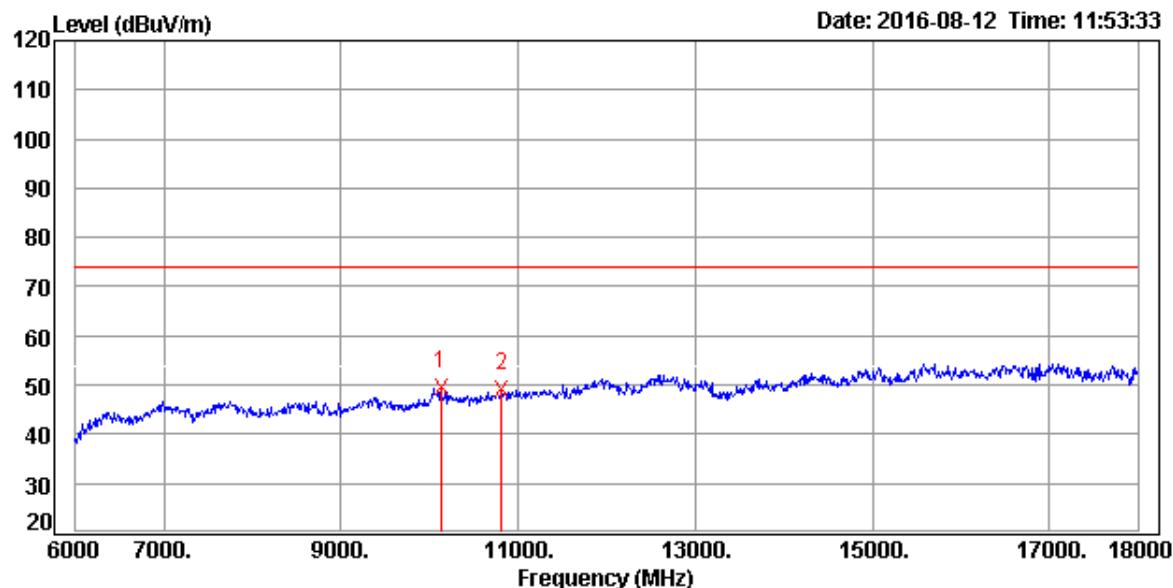
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)

Data: 75



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
10128.00	44.22	5.39	49.61	74.00	-24.39	110	100	Peak
10812.00	42.41	6.86	49.27	74.00	-24.73	253	200	Peak

Remark:

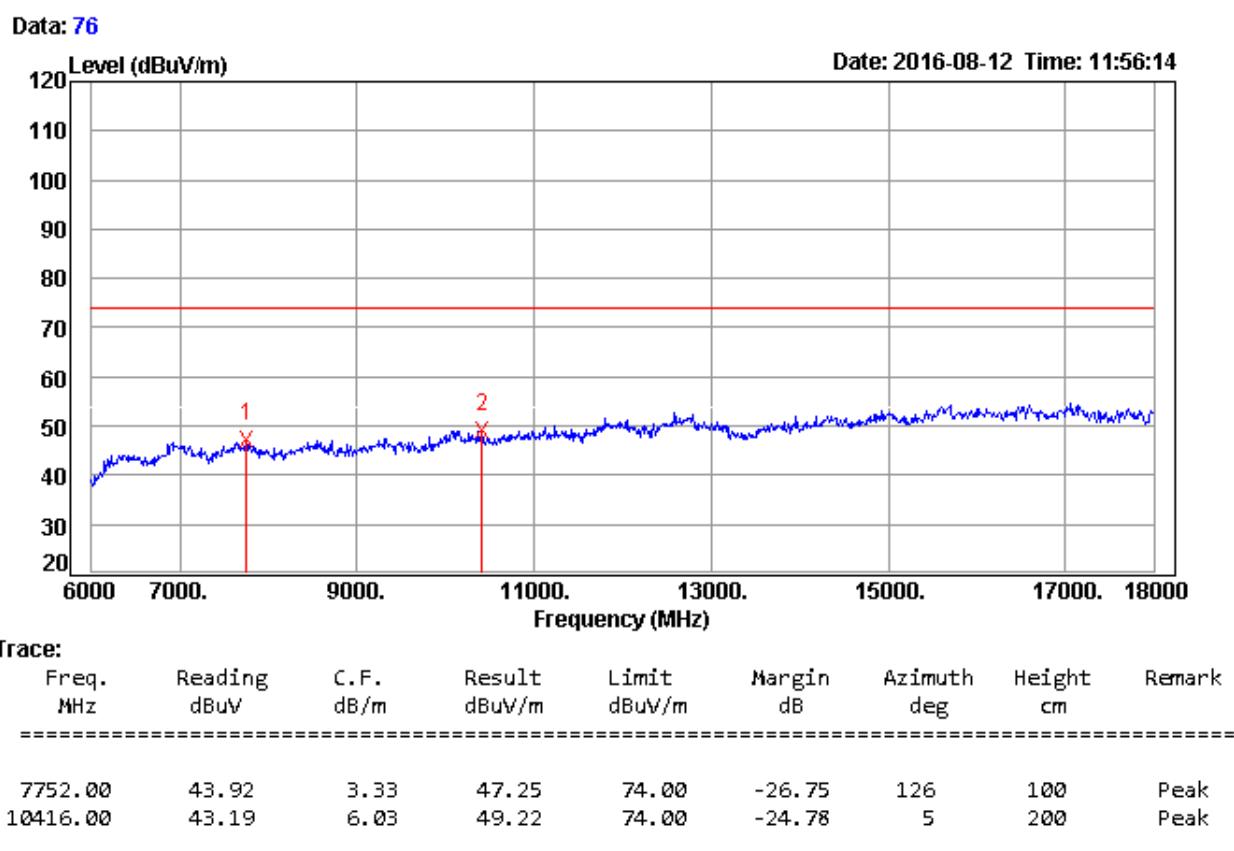
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

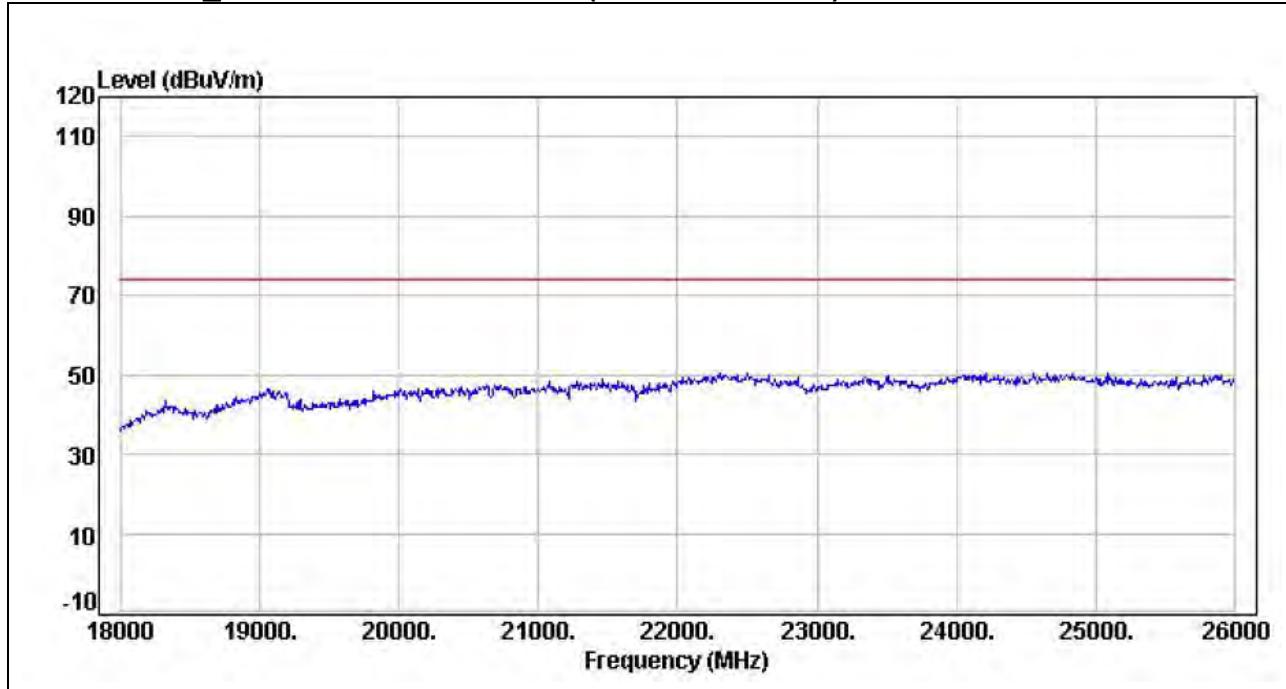
966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

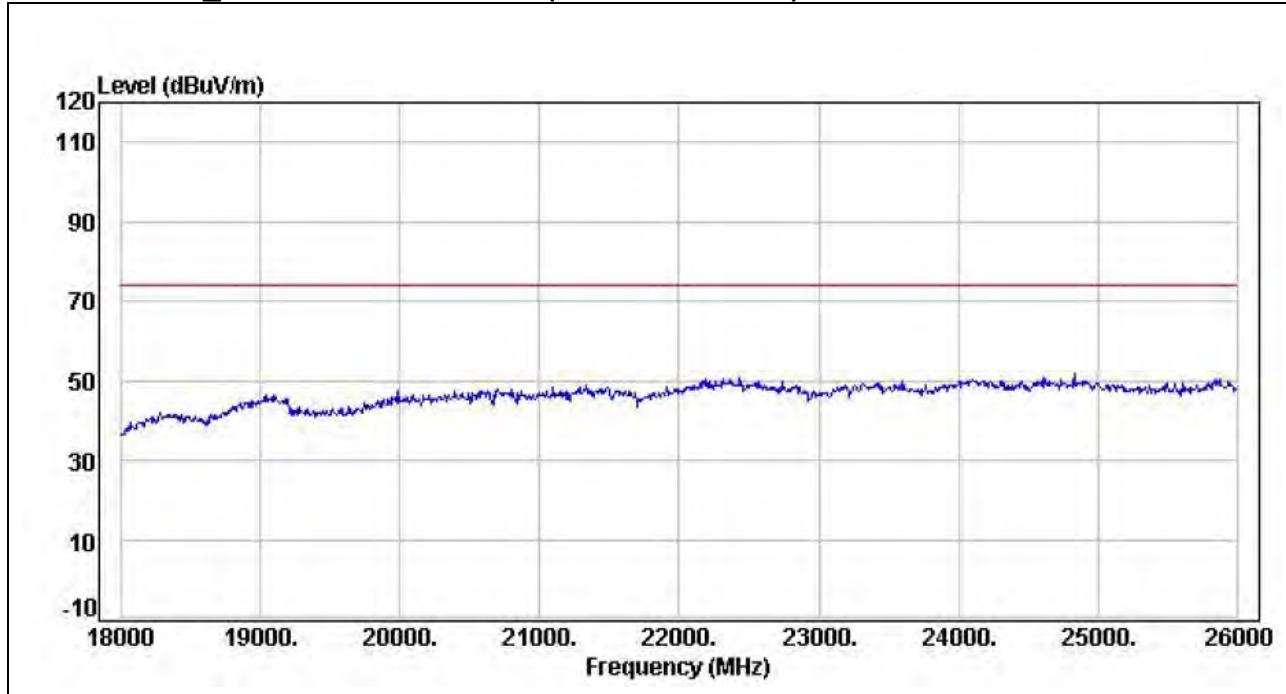
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

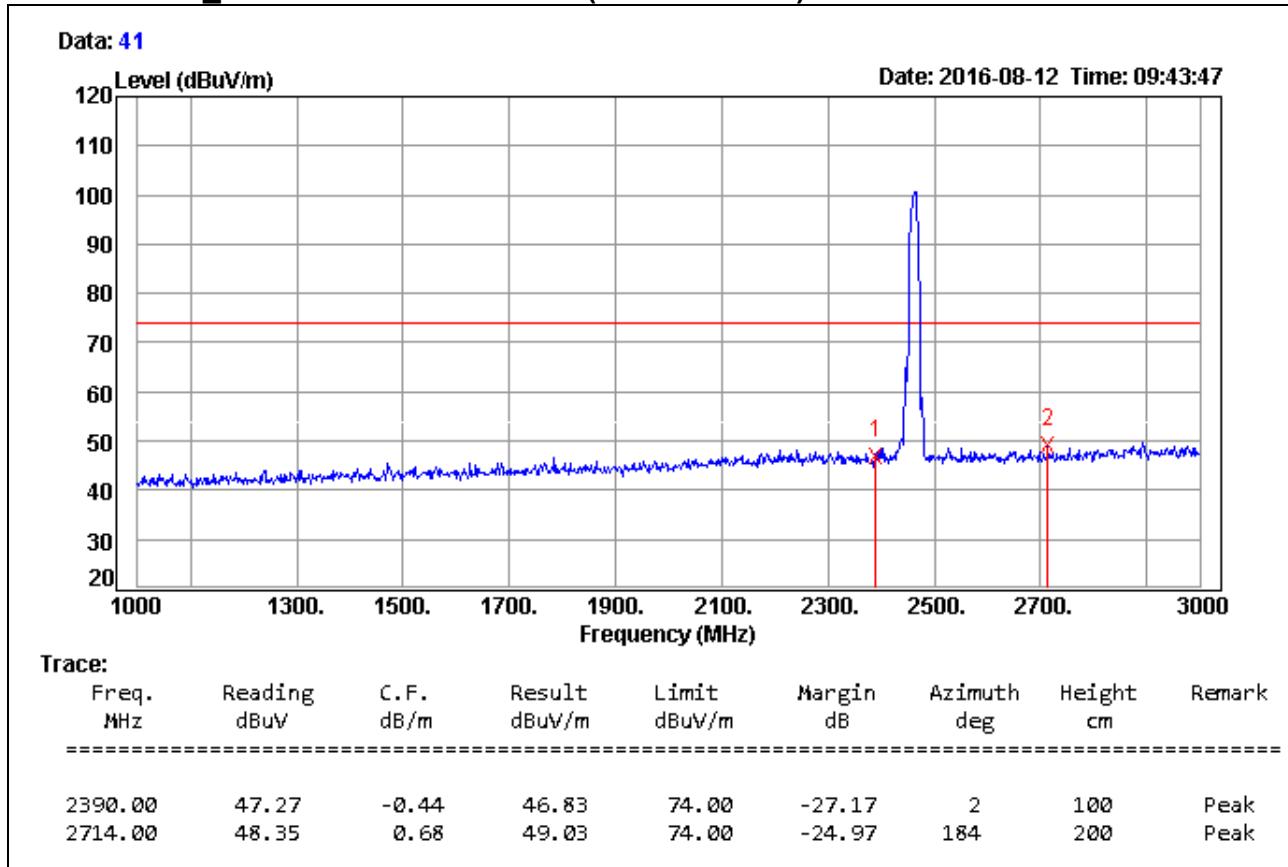
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

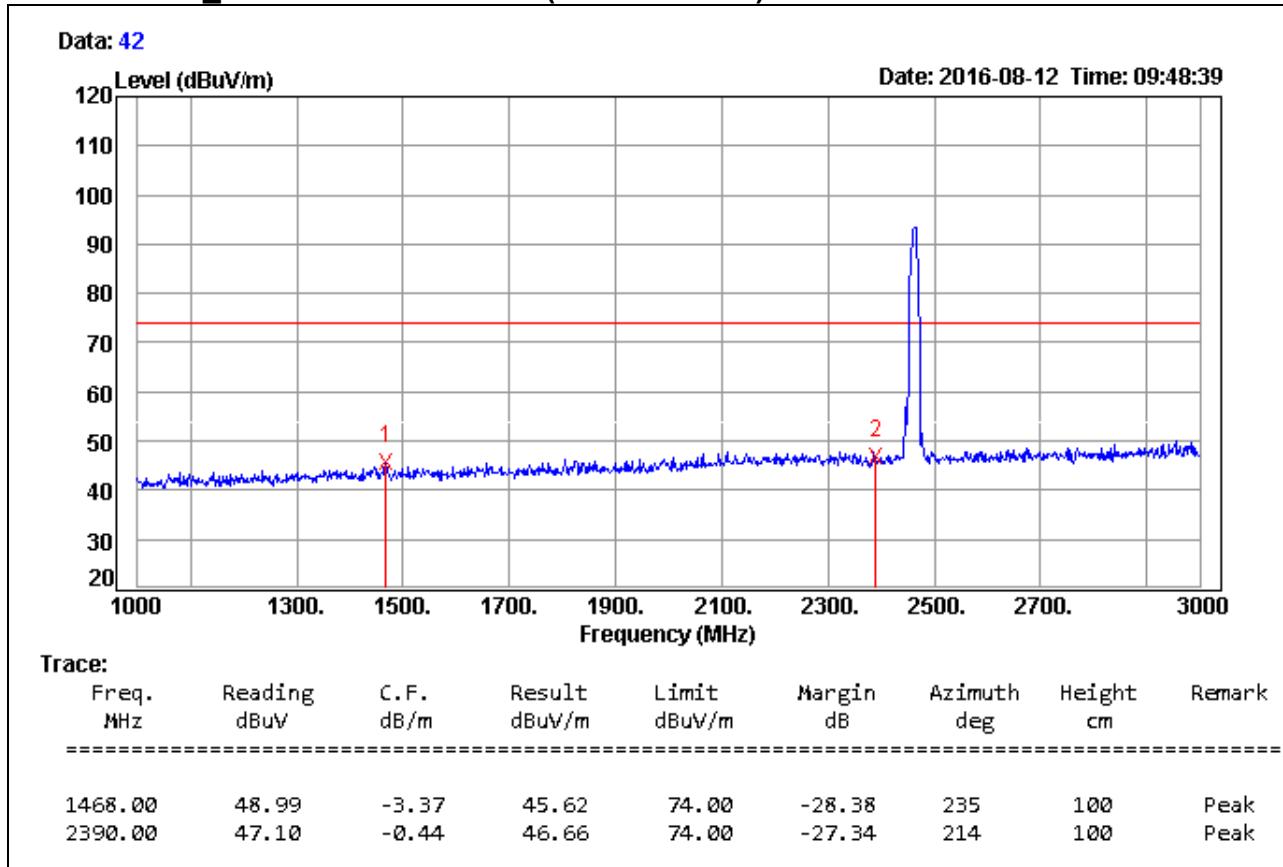


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)

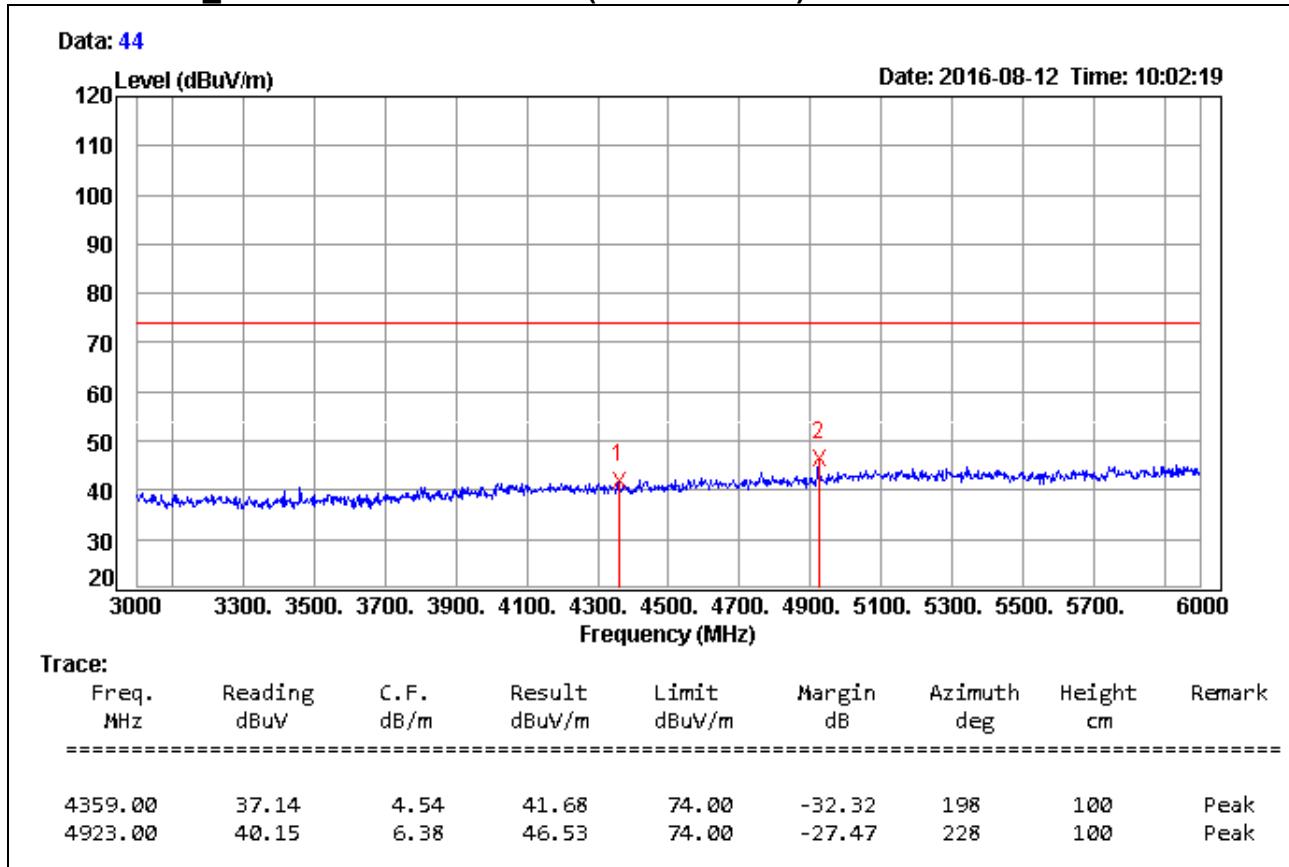


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

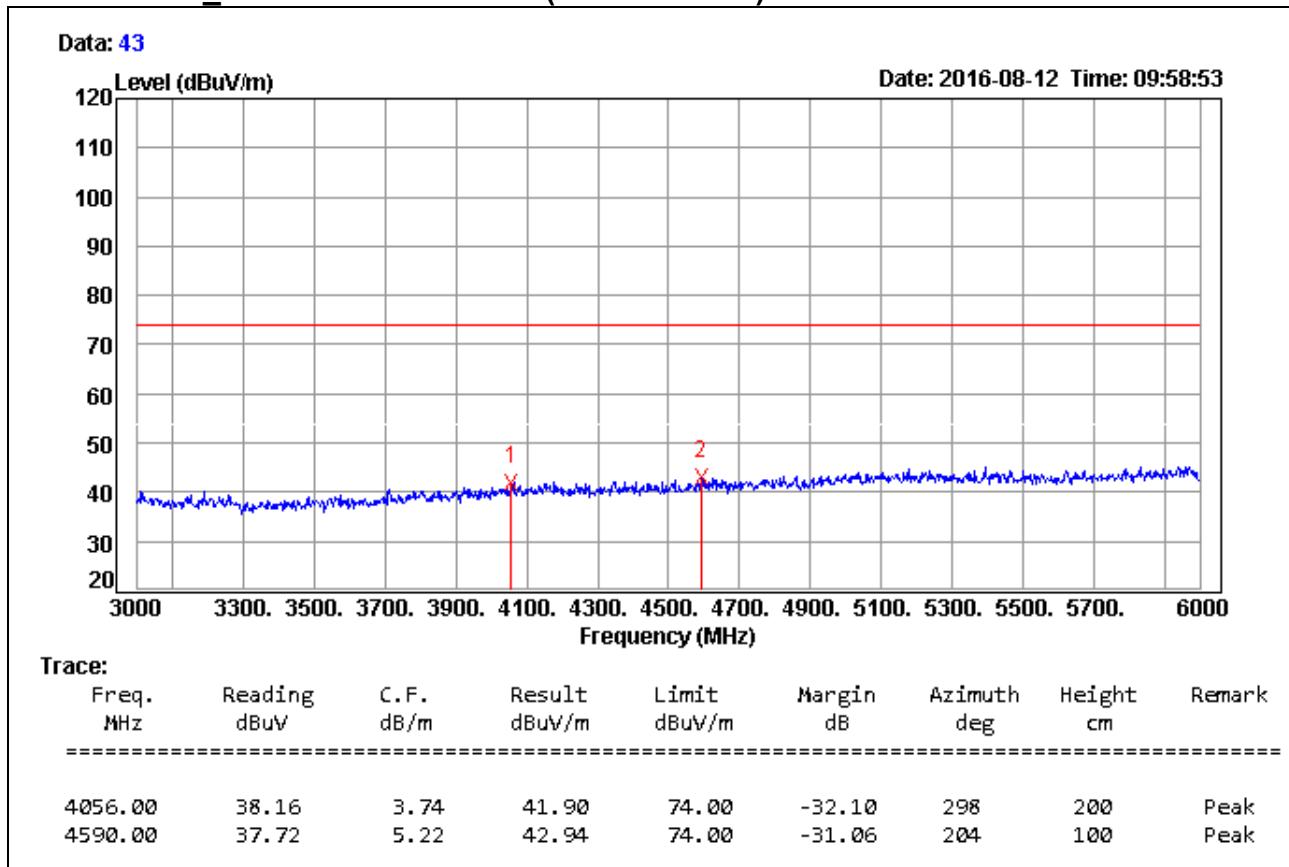
966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

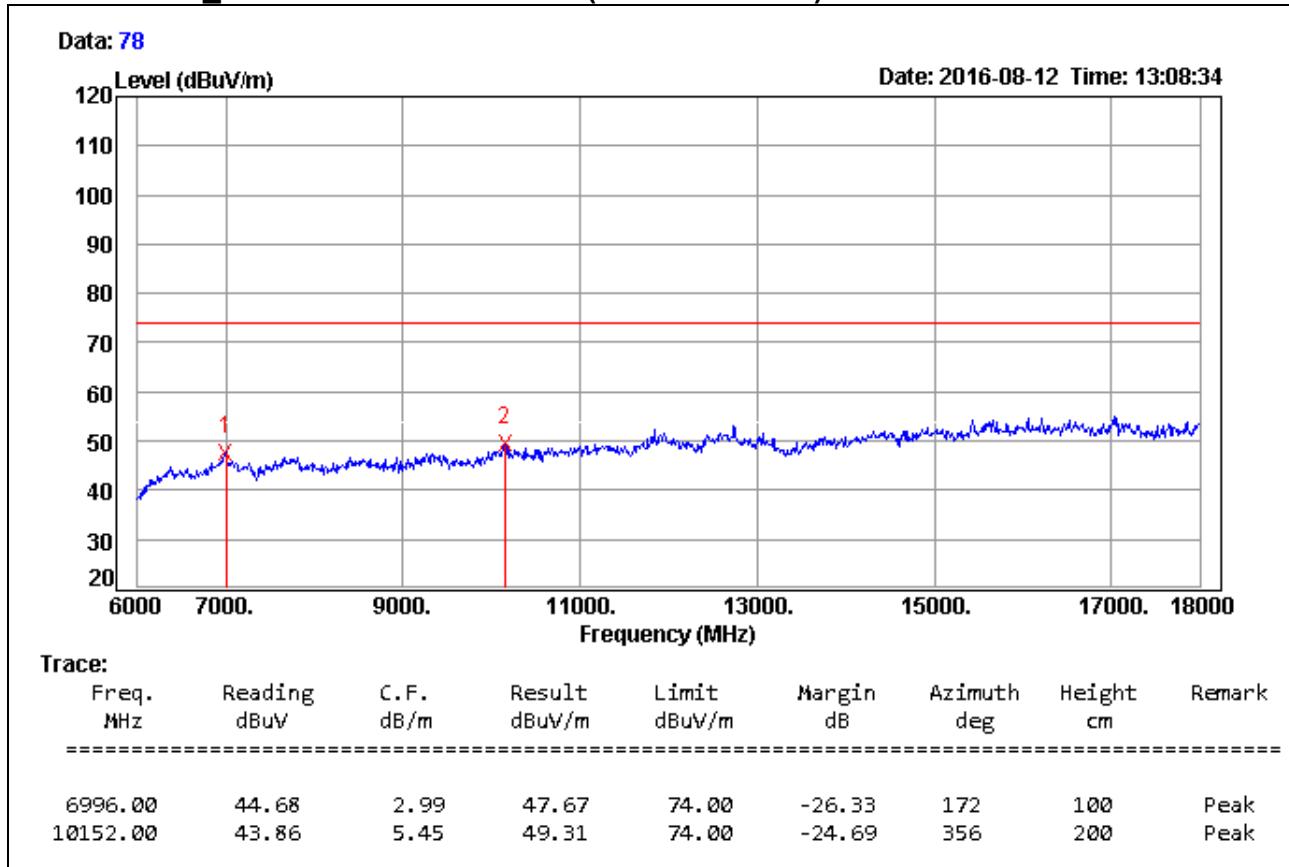
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

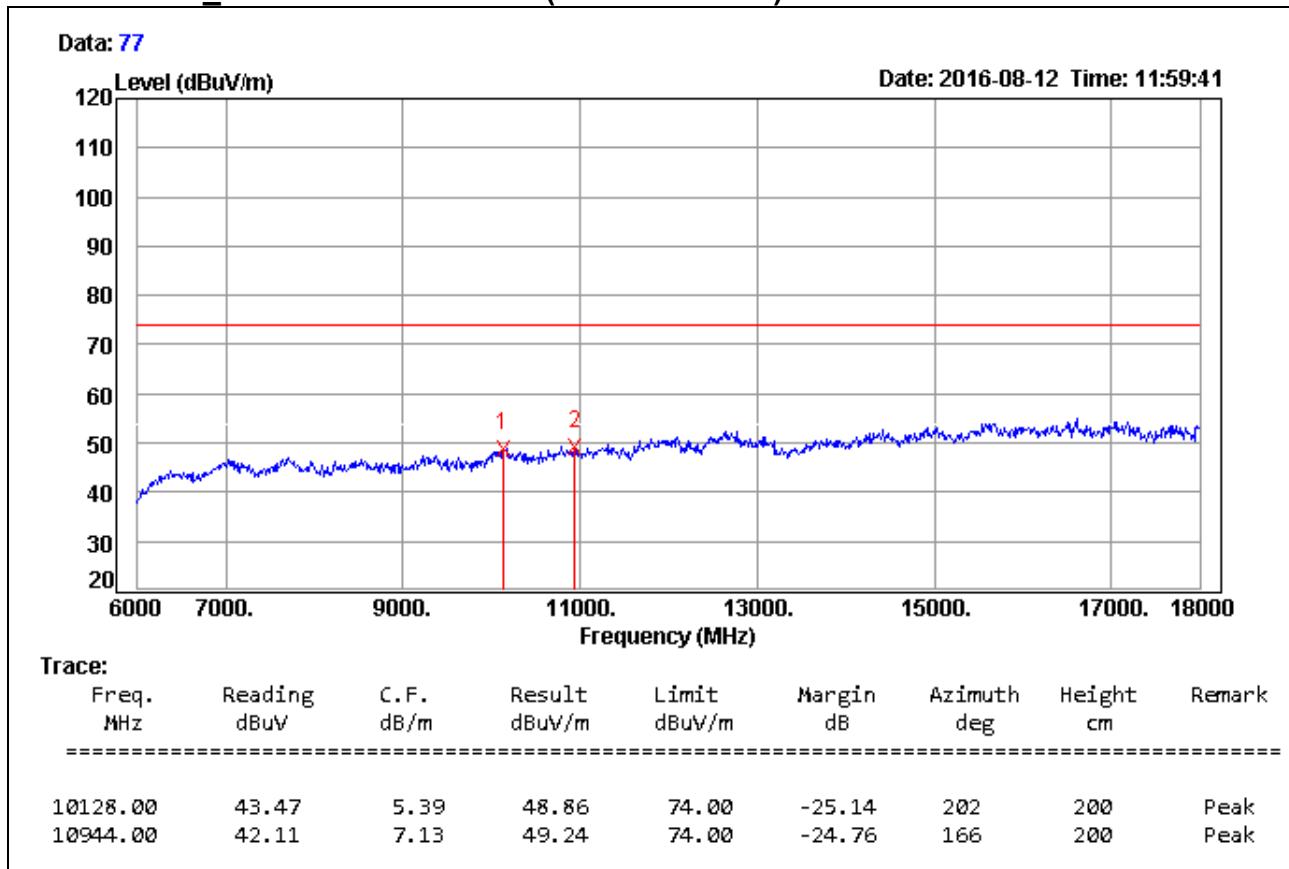
966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

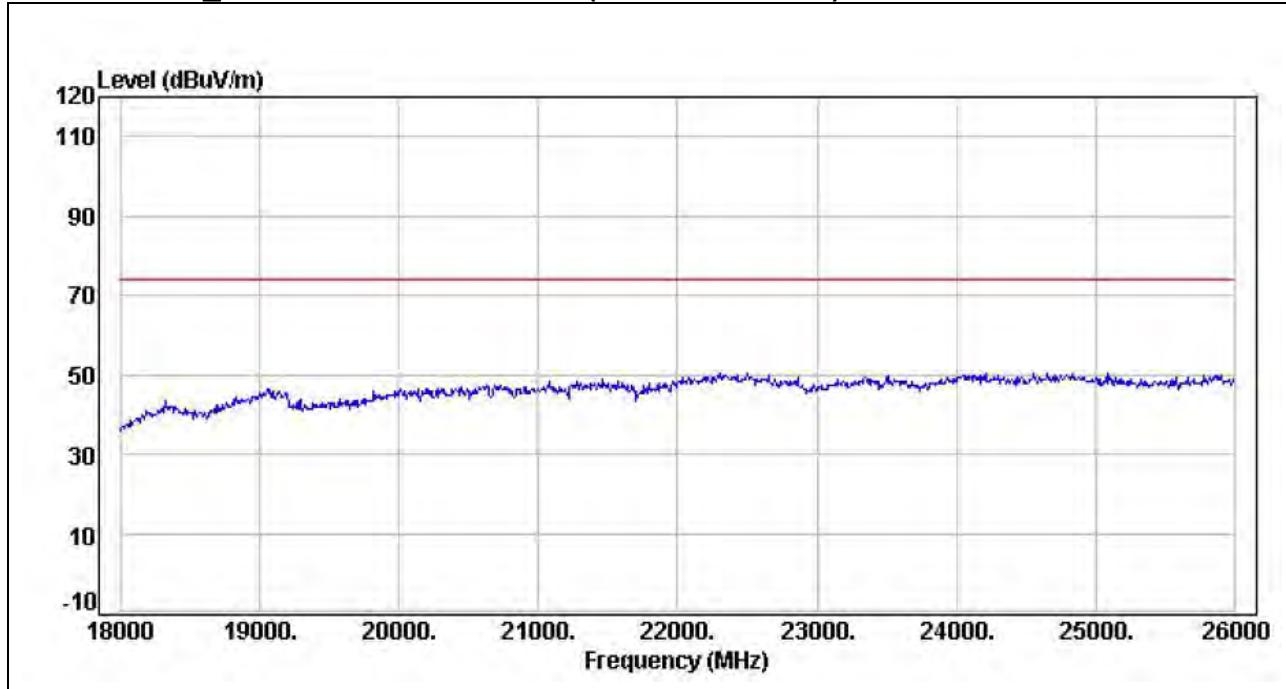
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

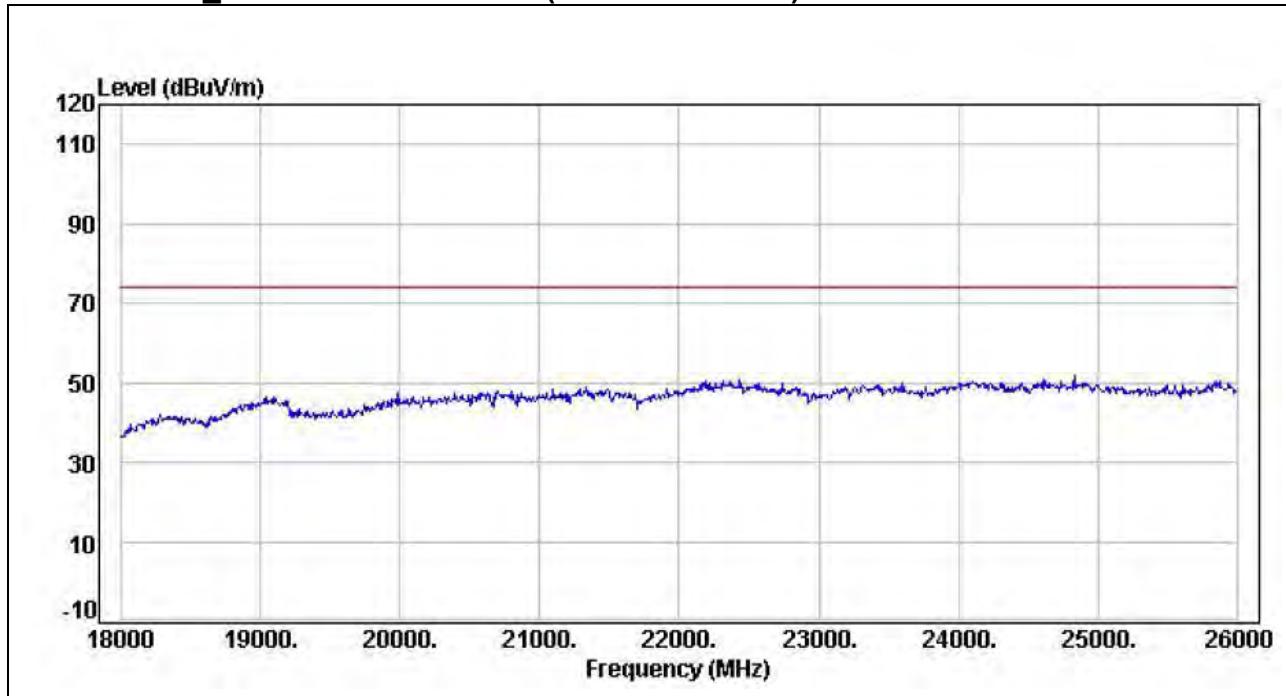
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

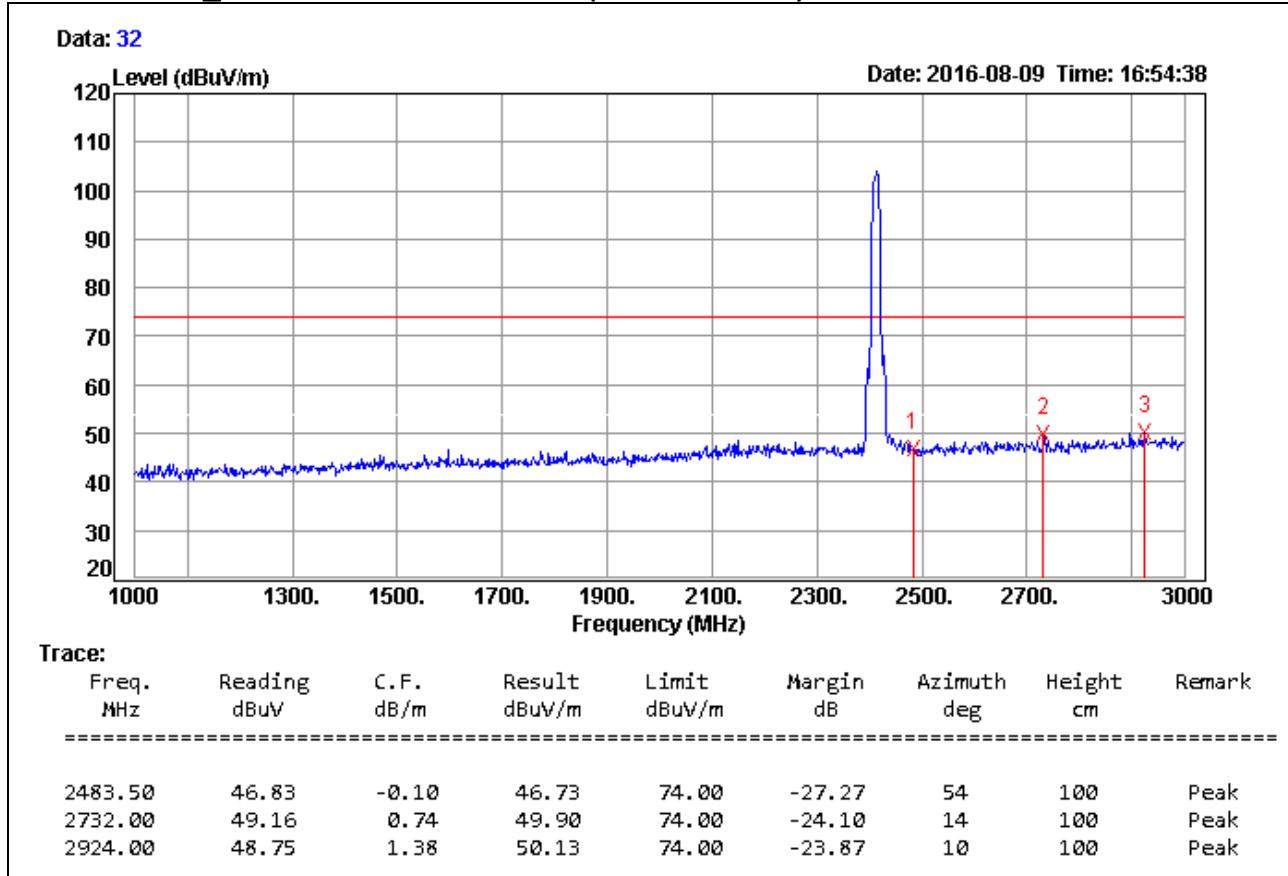
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_External Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

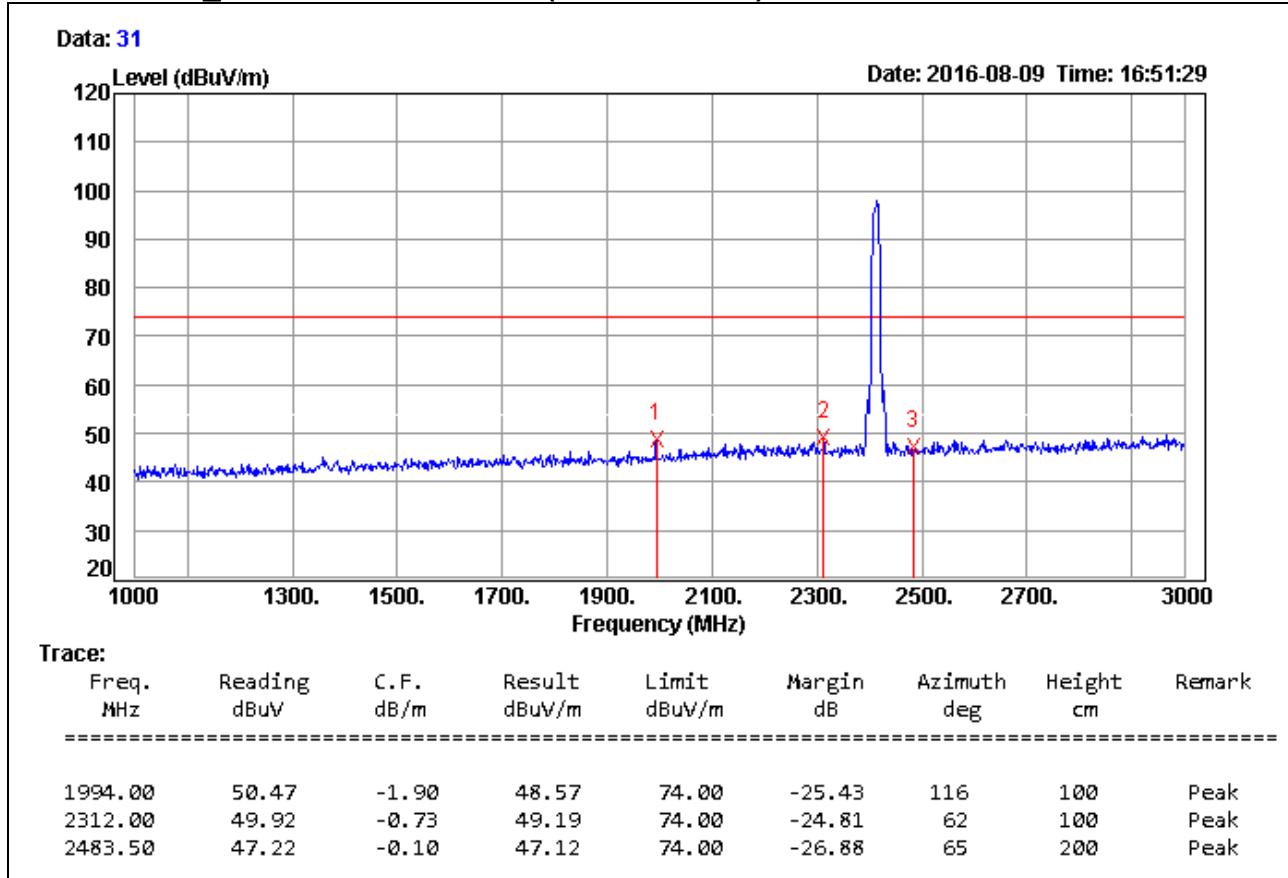


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



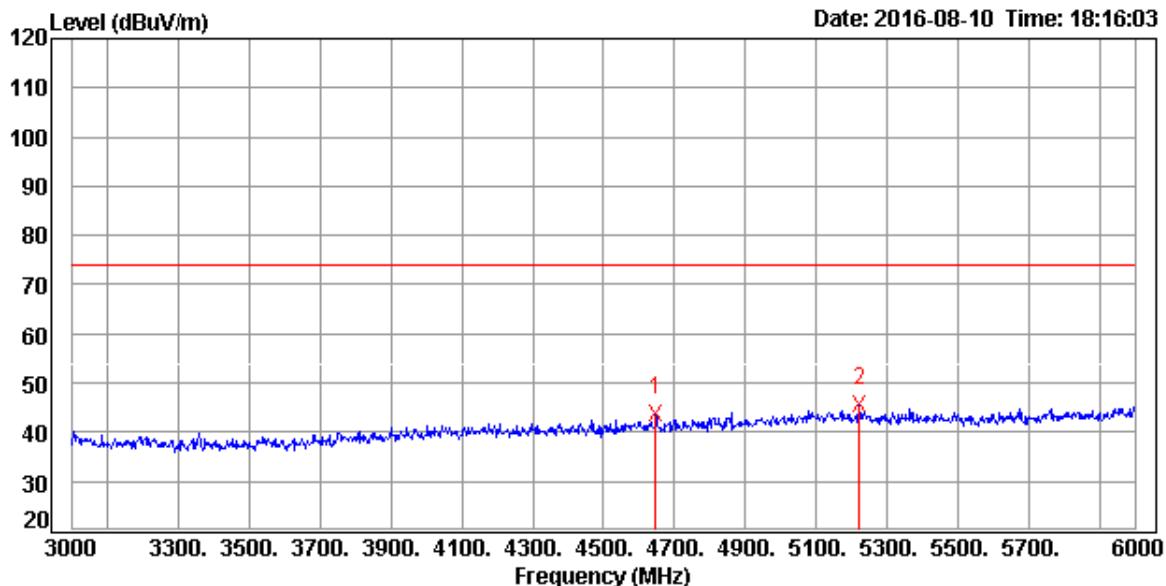
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 50



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4647.00	38.24	5.42	43.66	74.00	-30.34	85	200	Peak
5223.00	38.50	7.10	45.60	74.00	-28.40	24	100	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

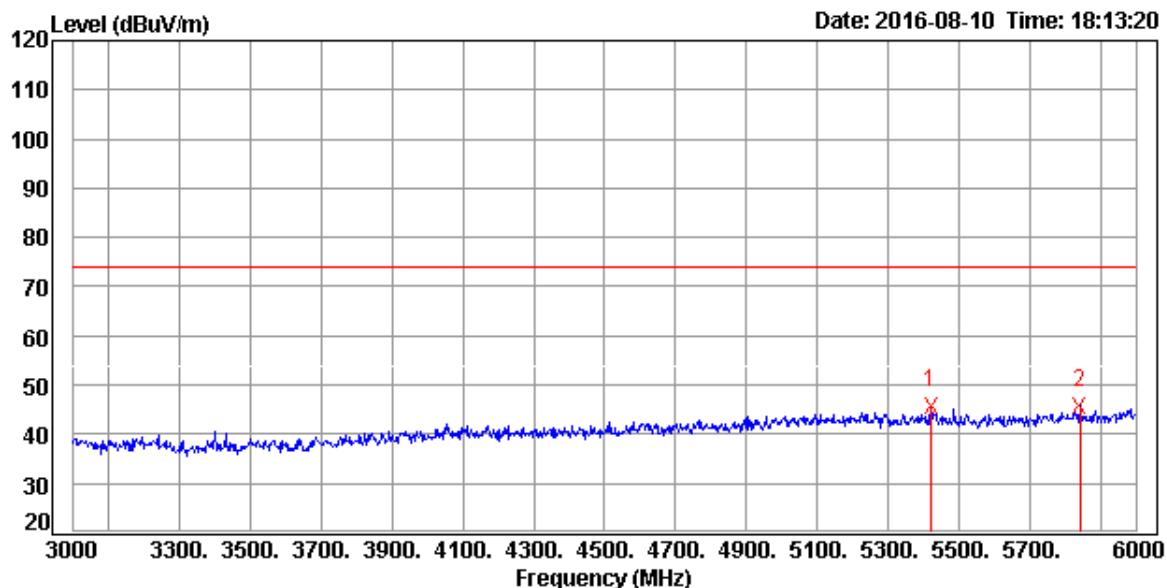
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 49



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
5421.00	38.19	7.50	45.69	74.00	-28.31	50	100	Peak
5841.00	37.56	8.27	45.83	74.00	-28.17	288	200	Peak

Remark:

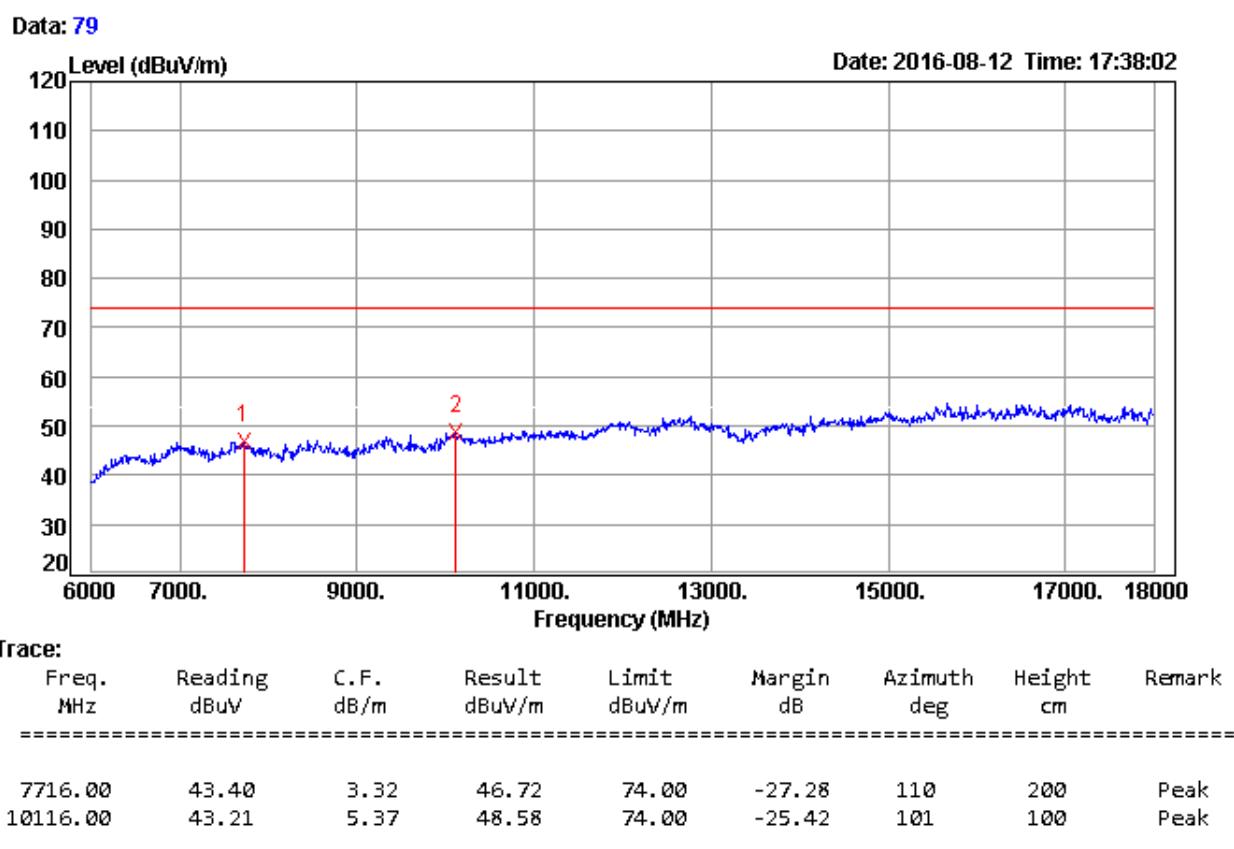
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

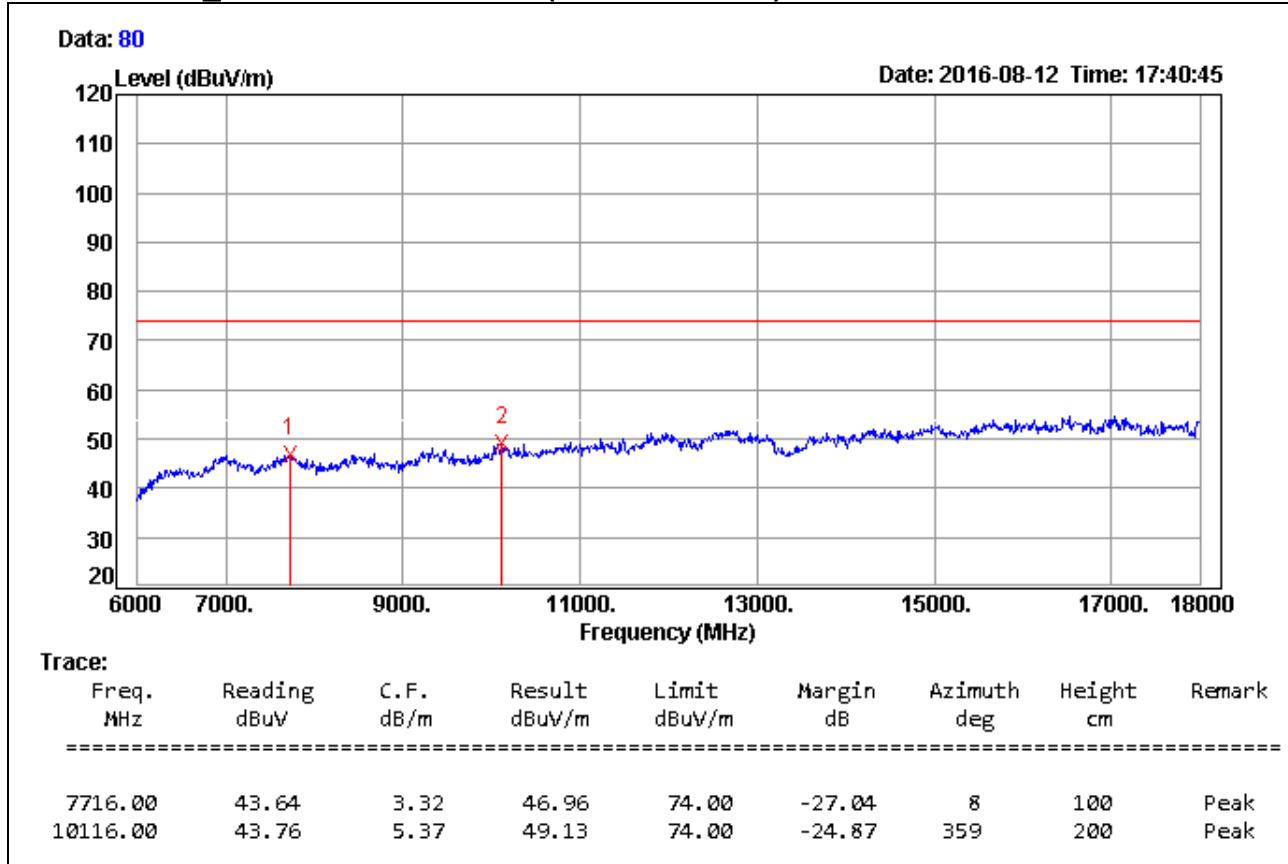
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

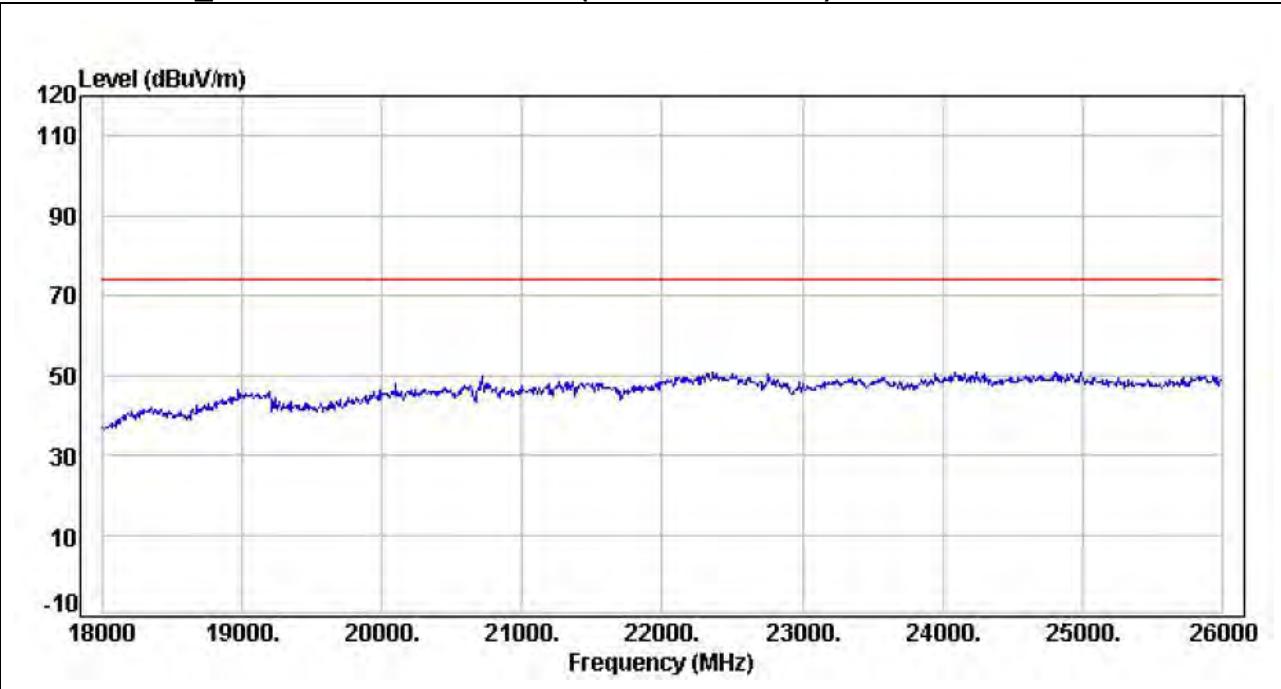
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

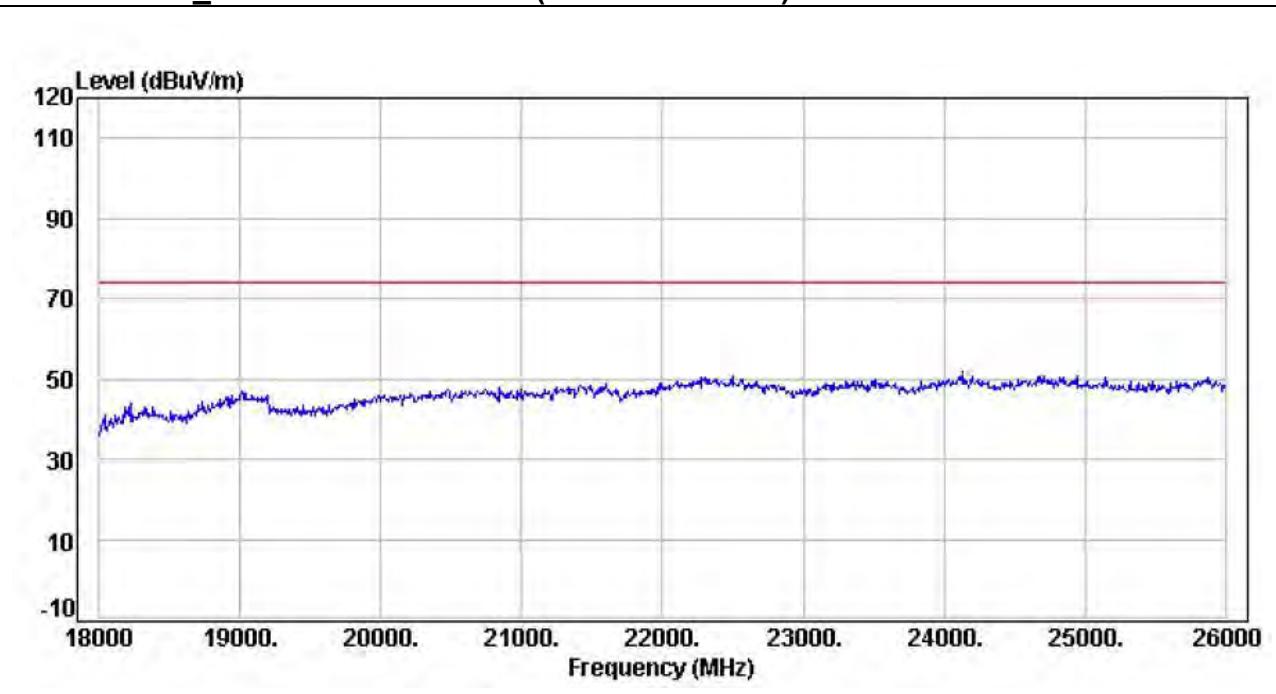
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

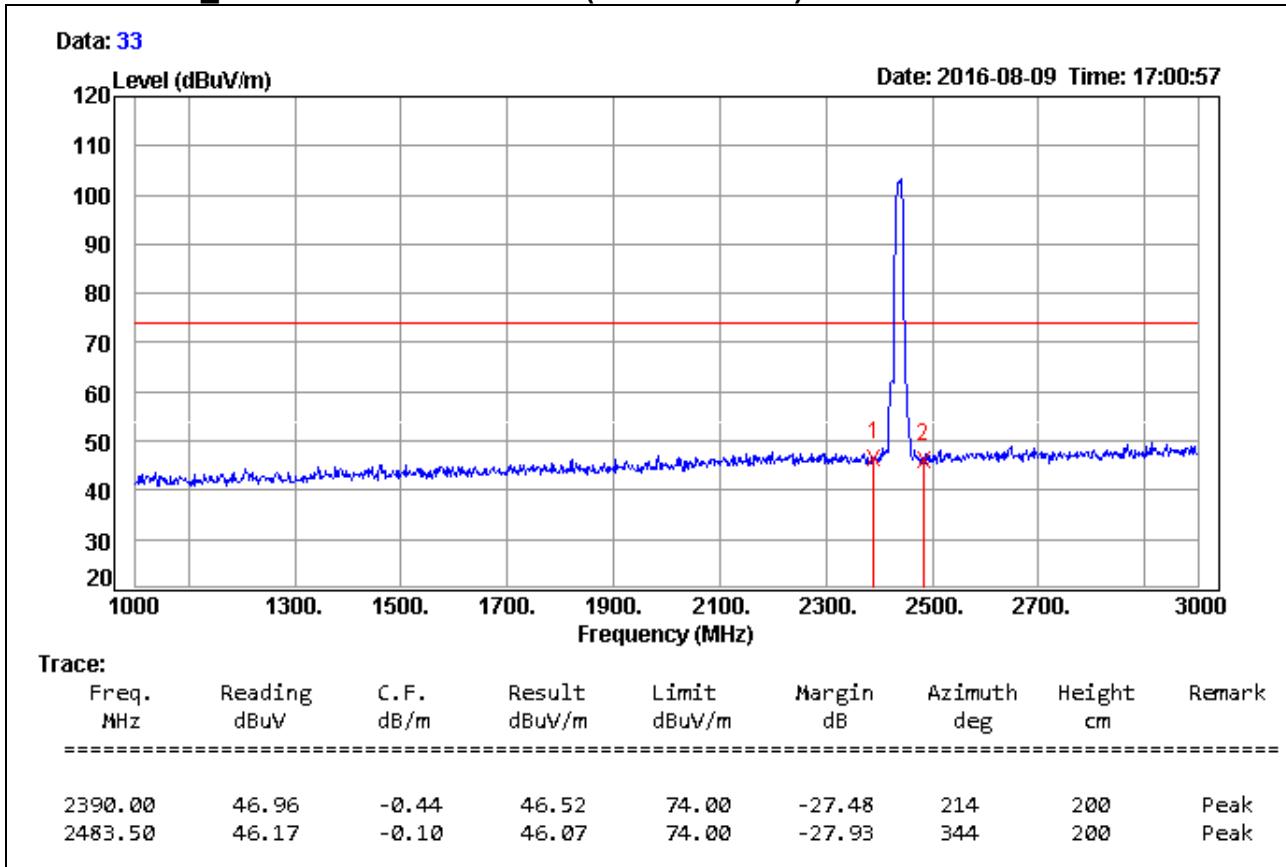
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

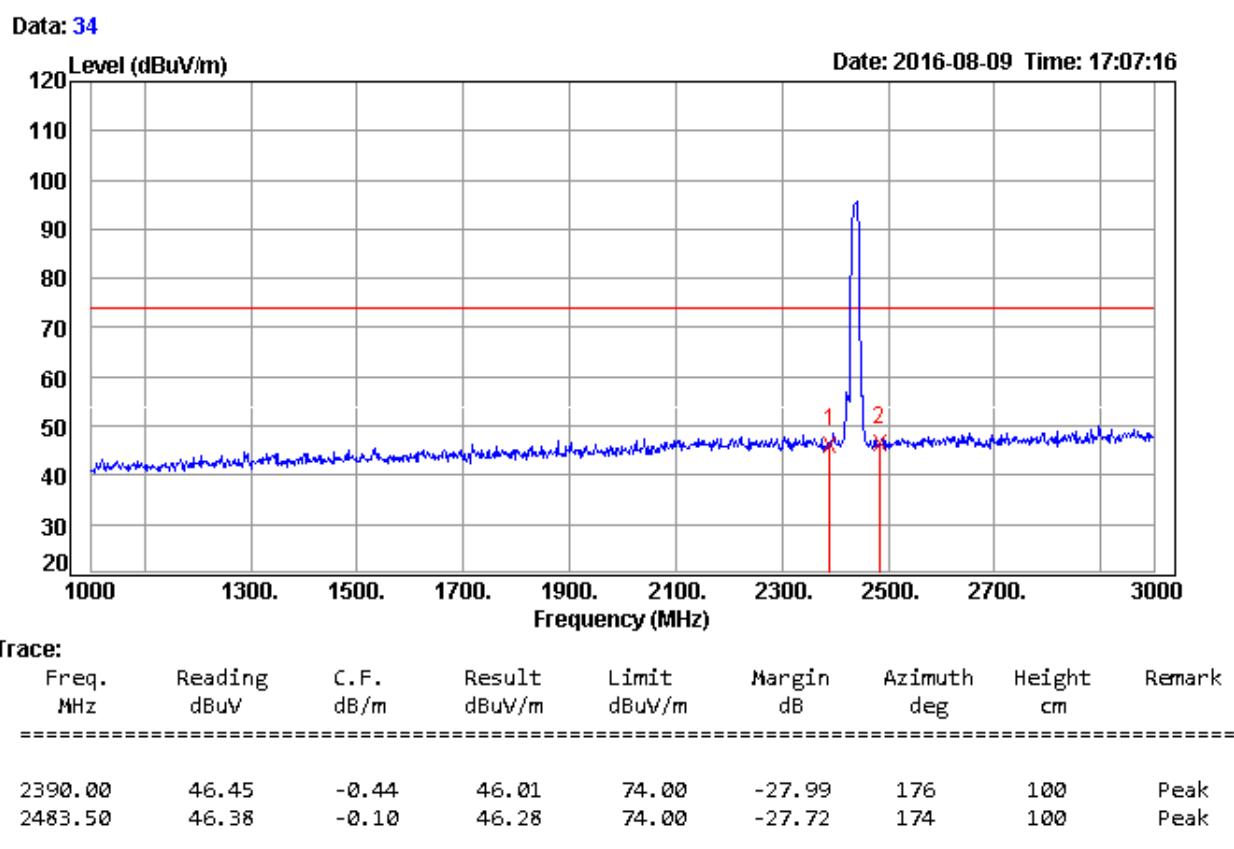
966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

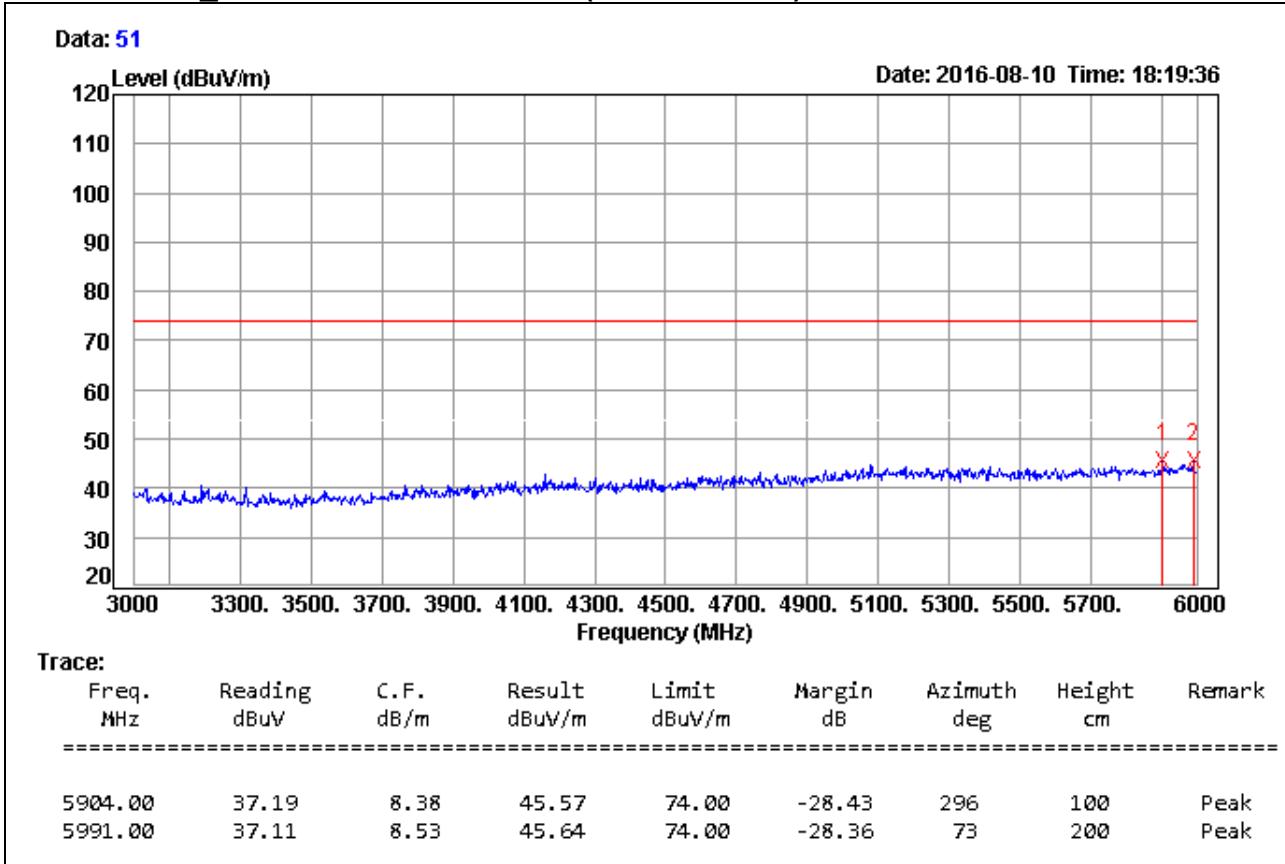
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

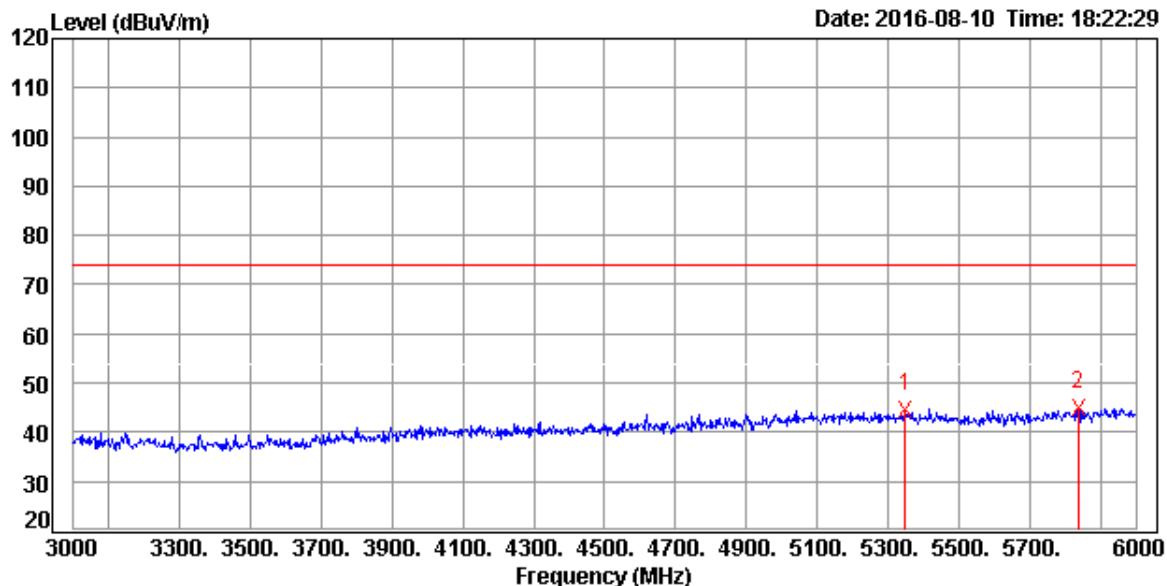
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 52



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
5349.00	37.21	7.35	44.56	74.00	-29.44	285	100	Peak
5838.00	36.72	8.26	44.98	74.00	-29.02	158	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

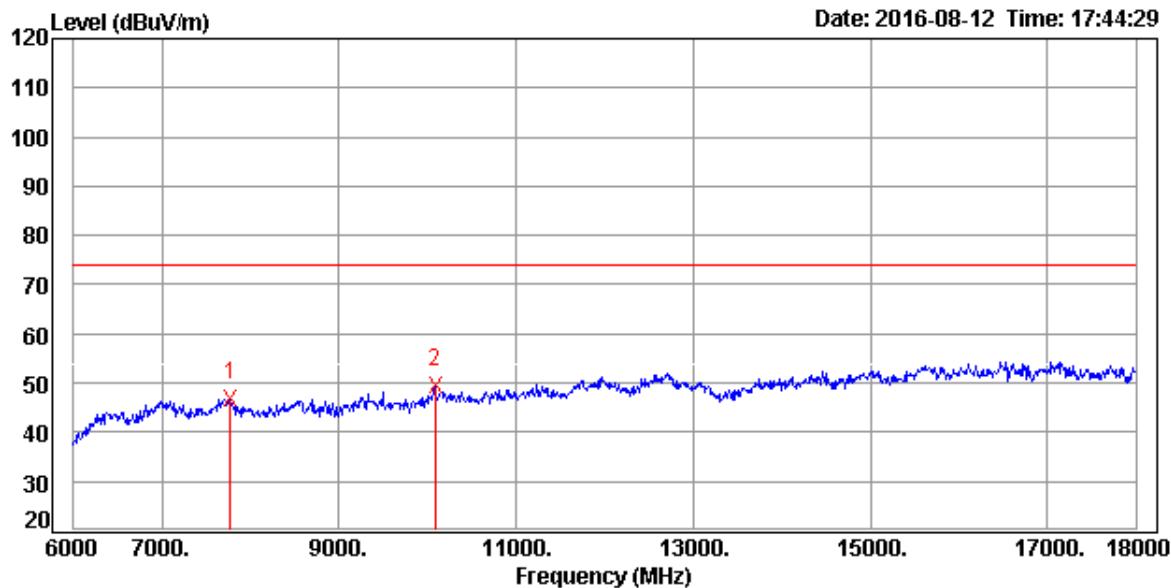
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)

Data: 82



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
7776.00	43.38	3.34	46.72	74.00	-27.28	287	200	Peak
10080.00	44.09	5.29	49.38	74.00	-24.62	231	200	Peak

Remark:

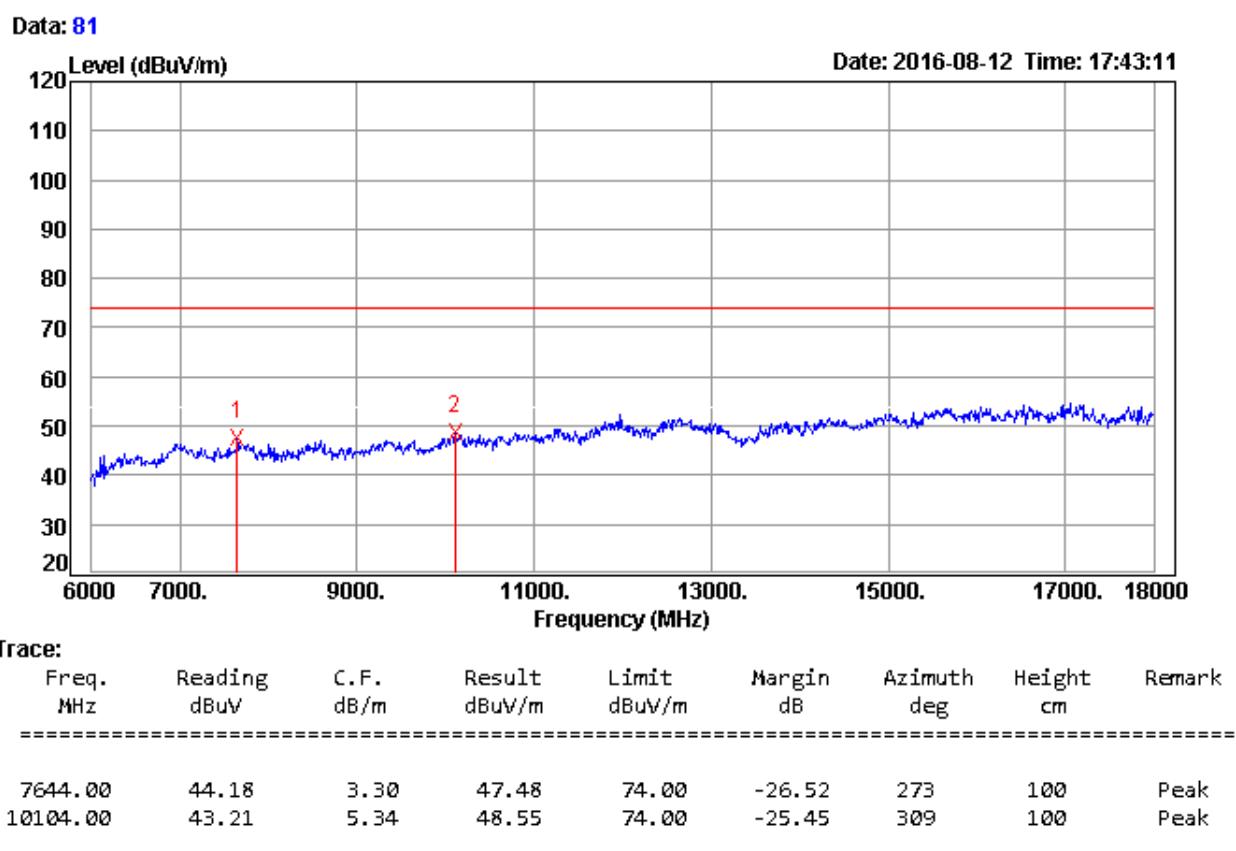
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

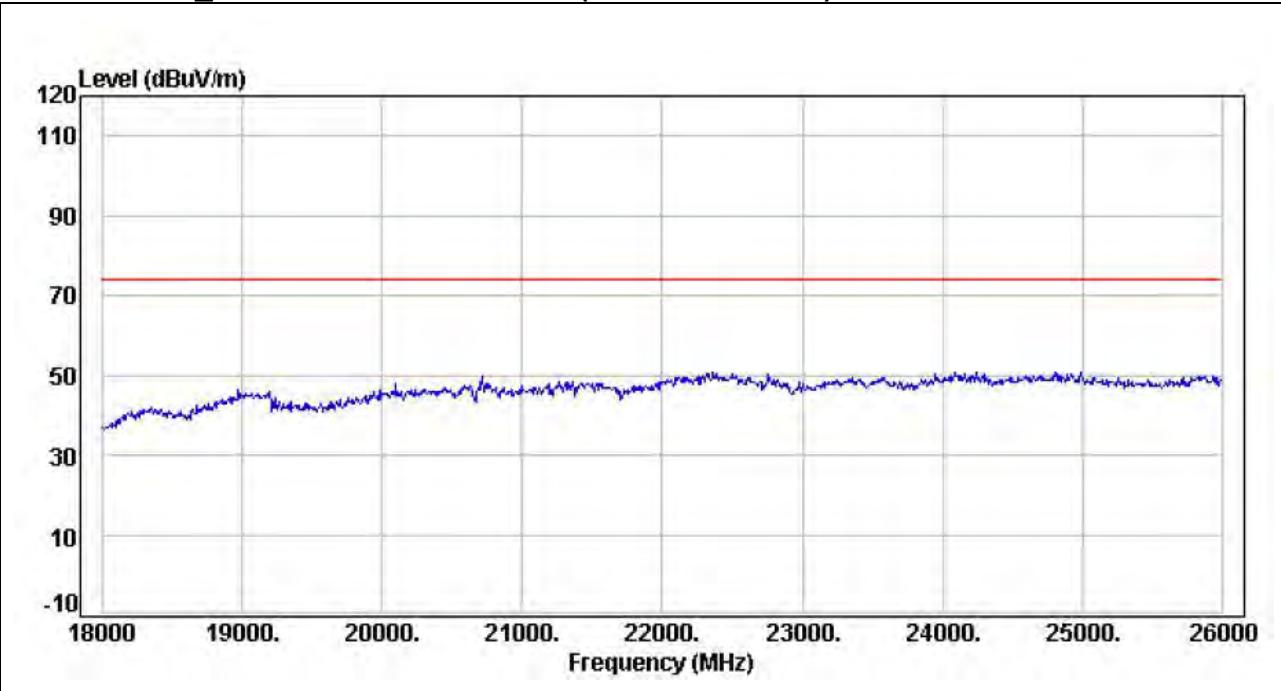
966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

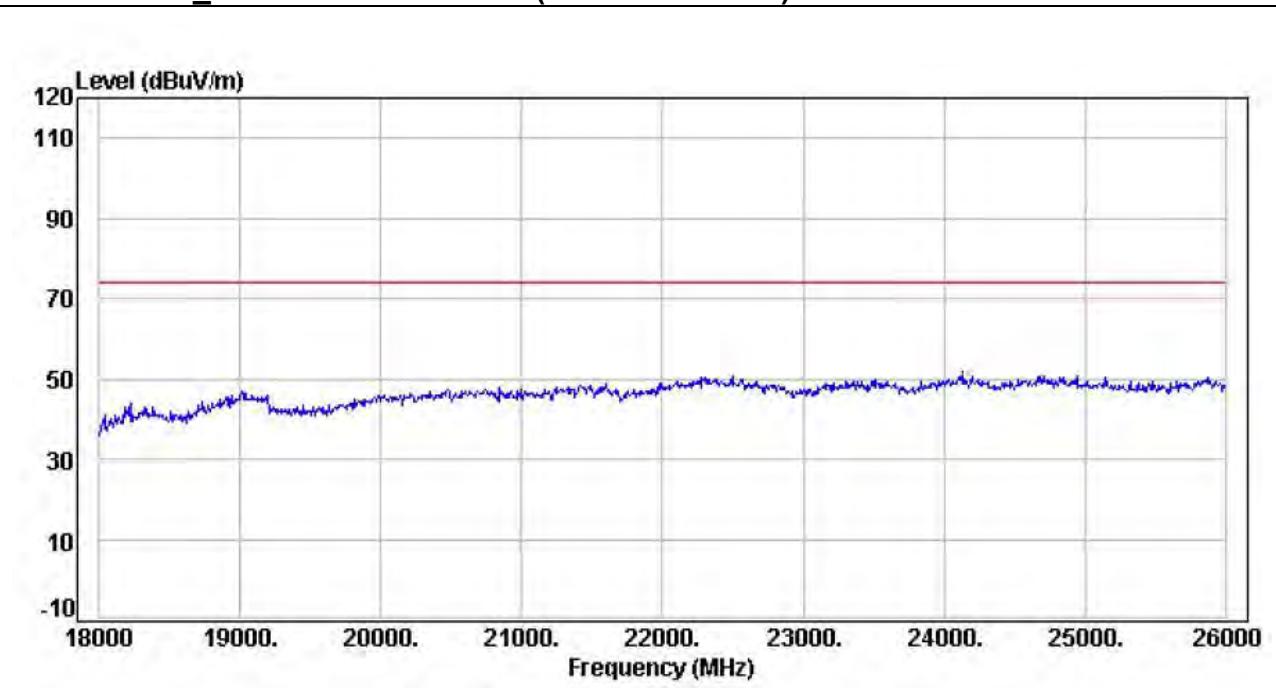
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

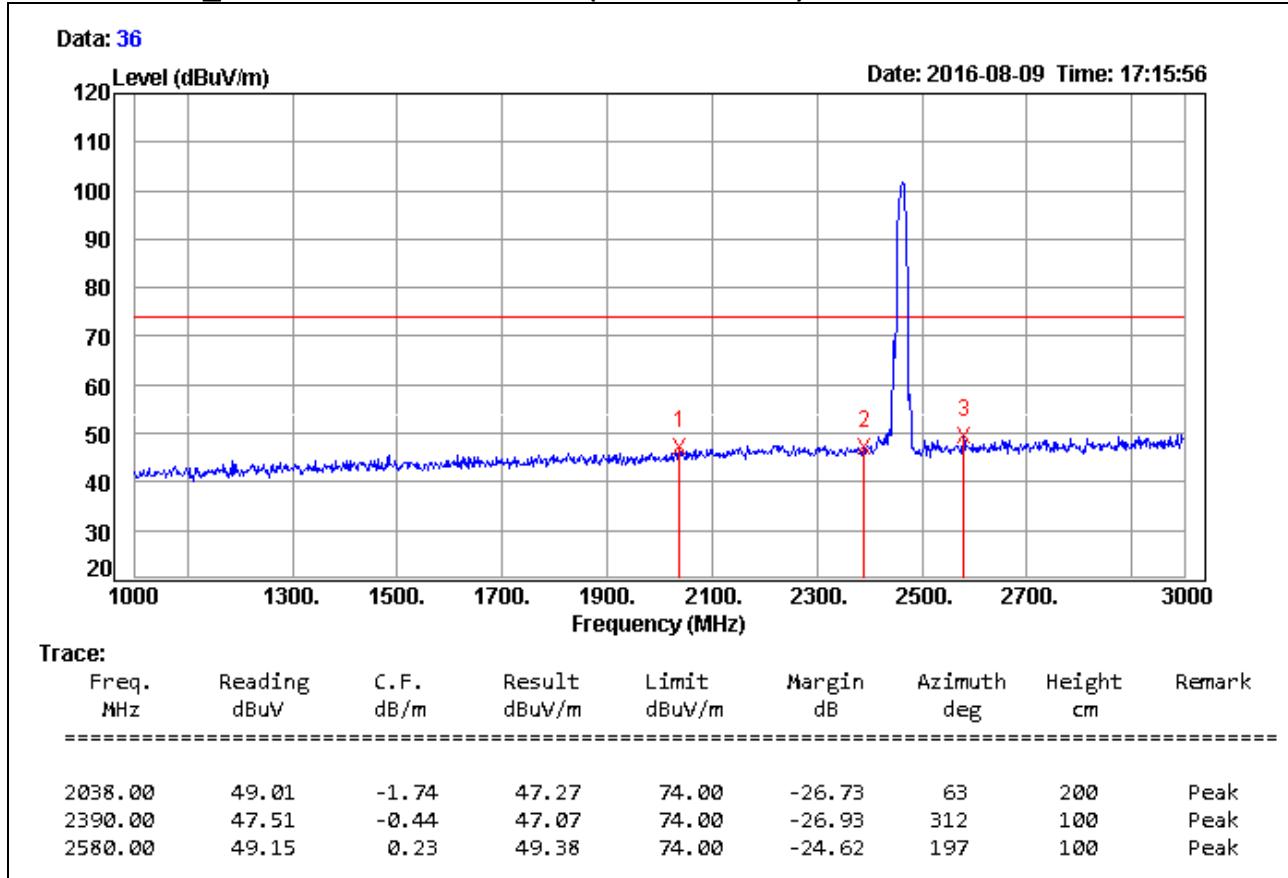
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

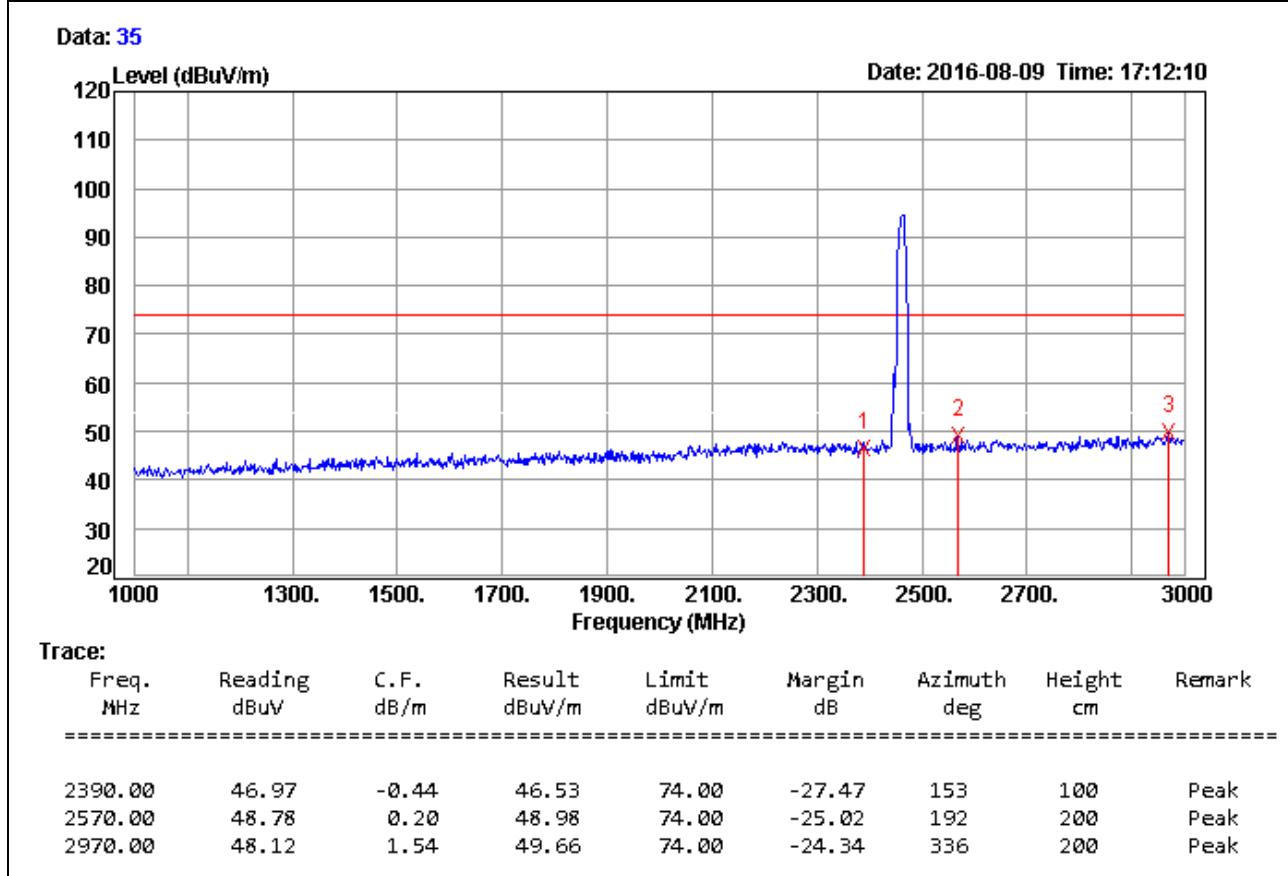


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



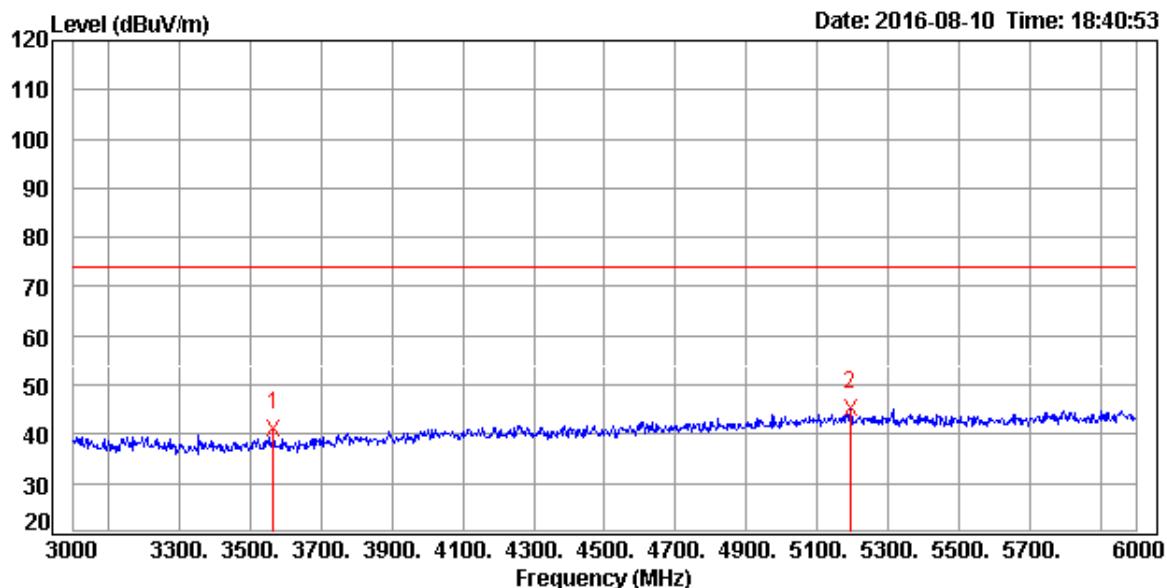
Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 54



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
3565.00	39.00	2.28	41.28	74.00	-32.72	63	200	Peak
5193.00	38.14	7.04	45.18	74.00	-28.82	317	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

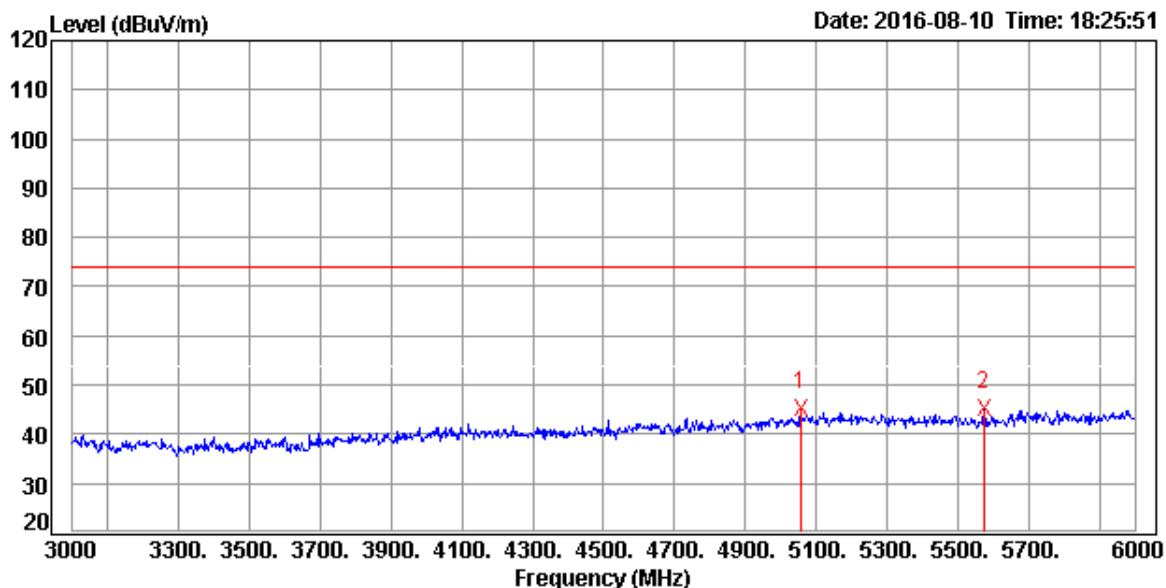
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 53



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
5055.00	38.53	6.76	45.29	74.00	-28.71	1	100	Peak
5574.00	37.33	7.79	45.12	74.00	-28.88	61	100	Peak

Remark:

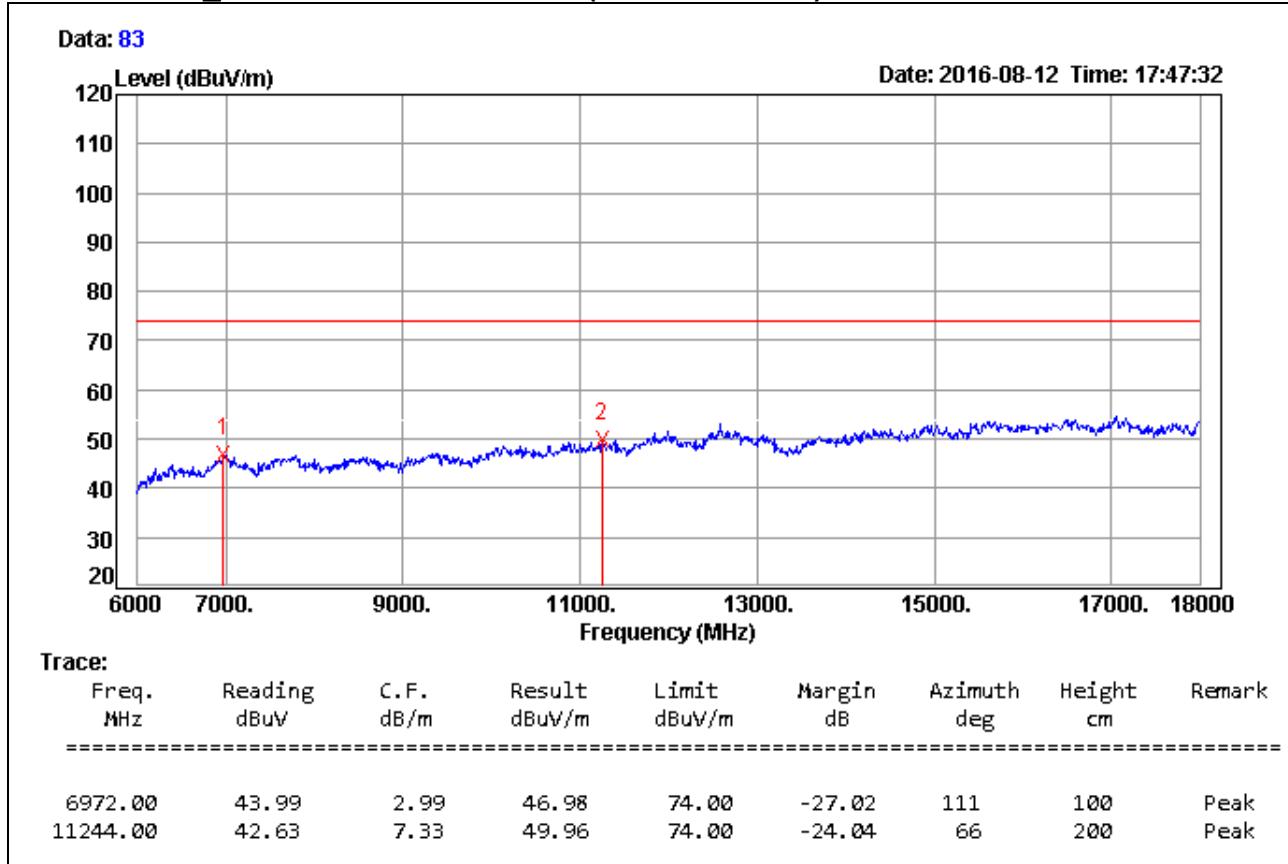
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

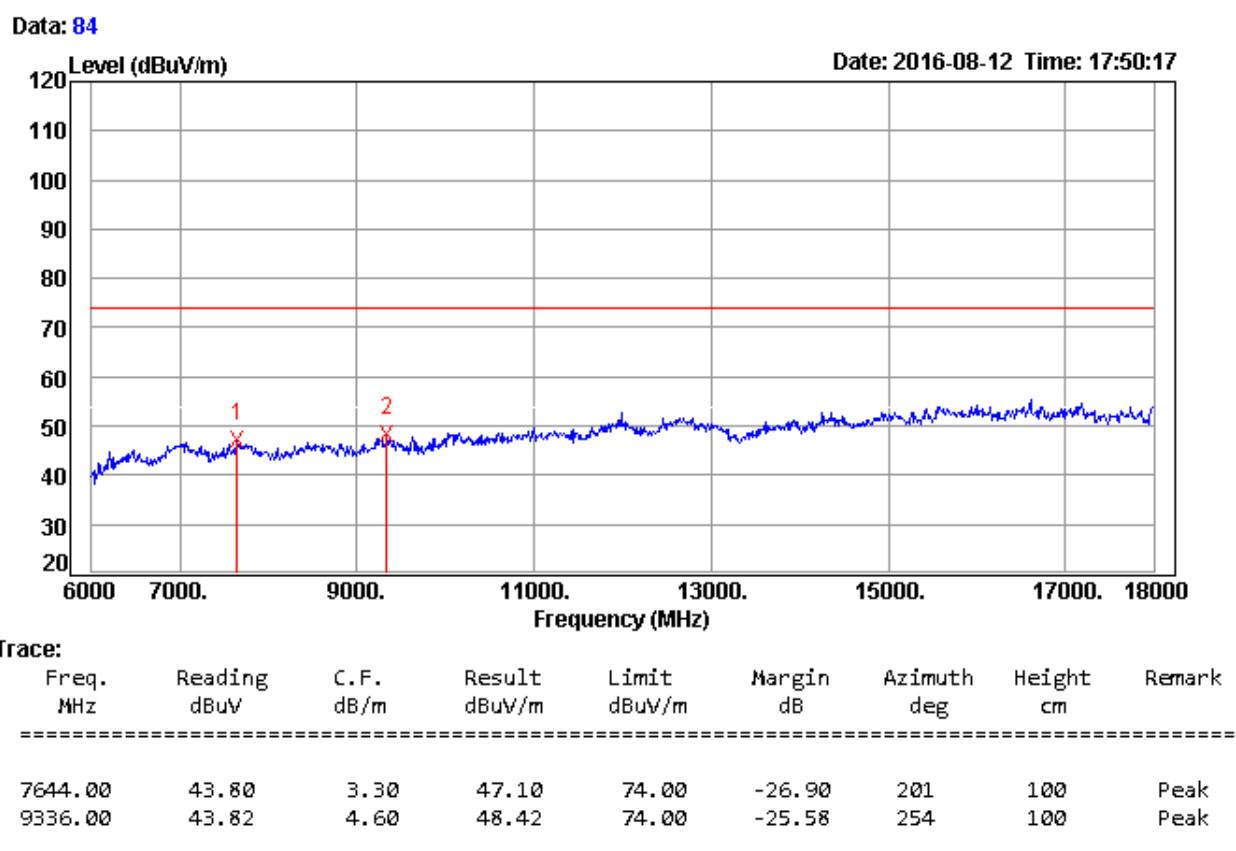
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/12
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

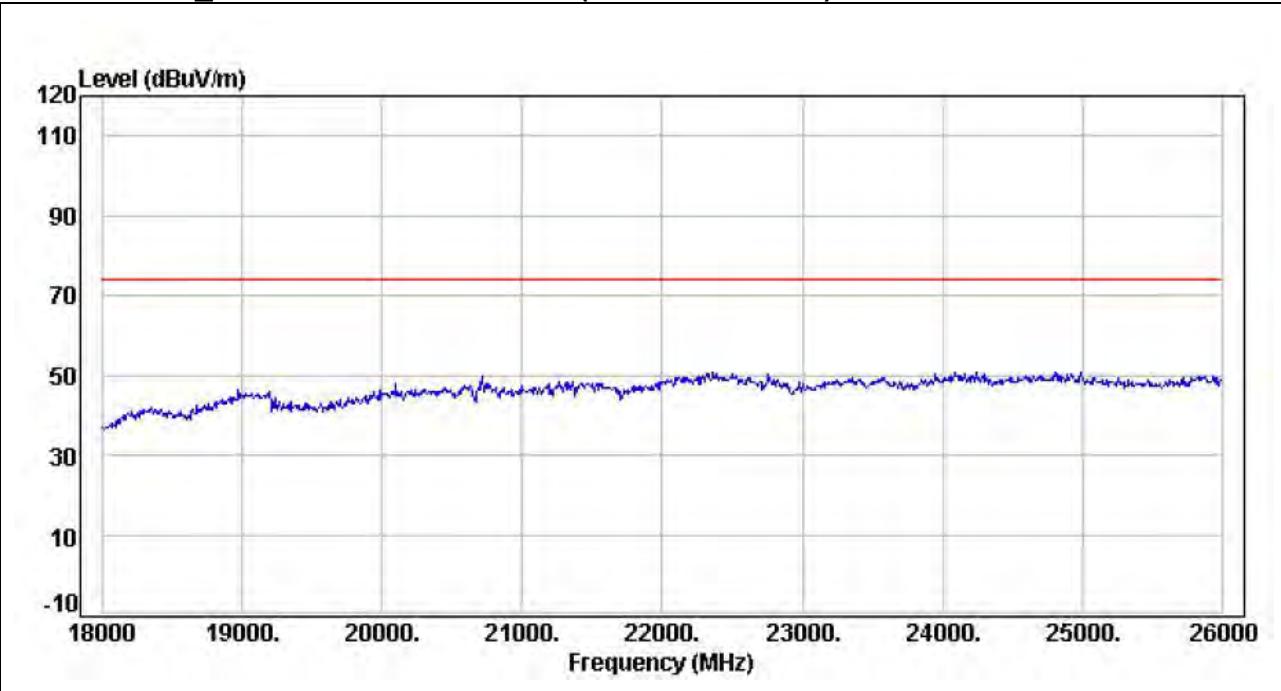
966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

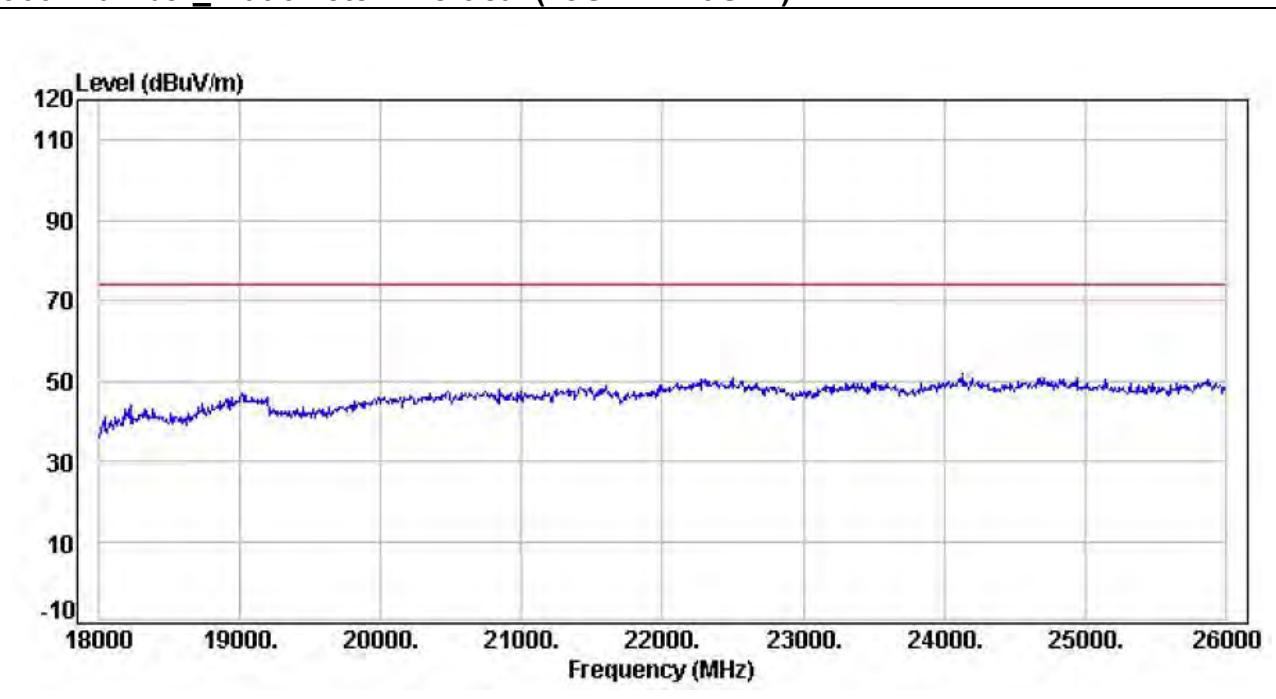
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

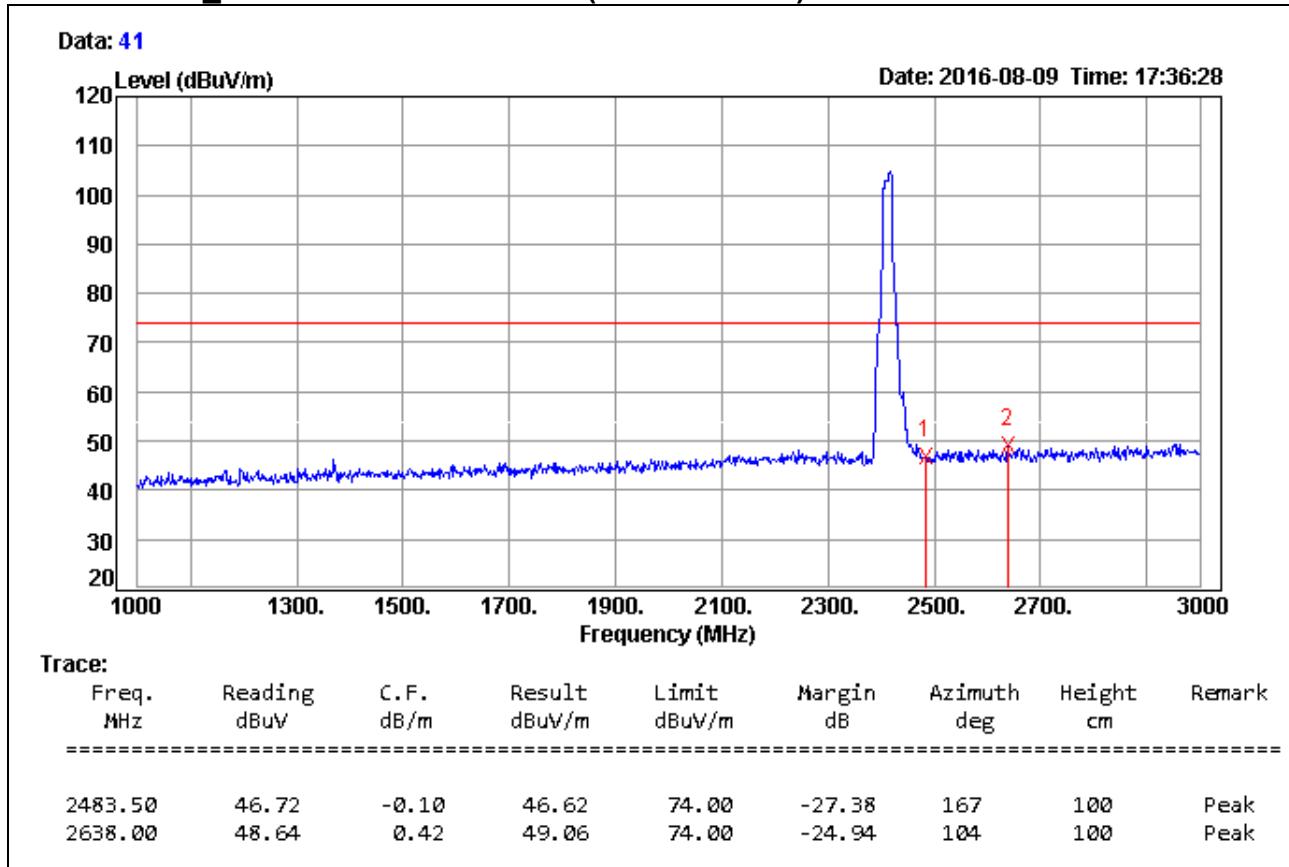
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11b Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

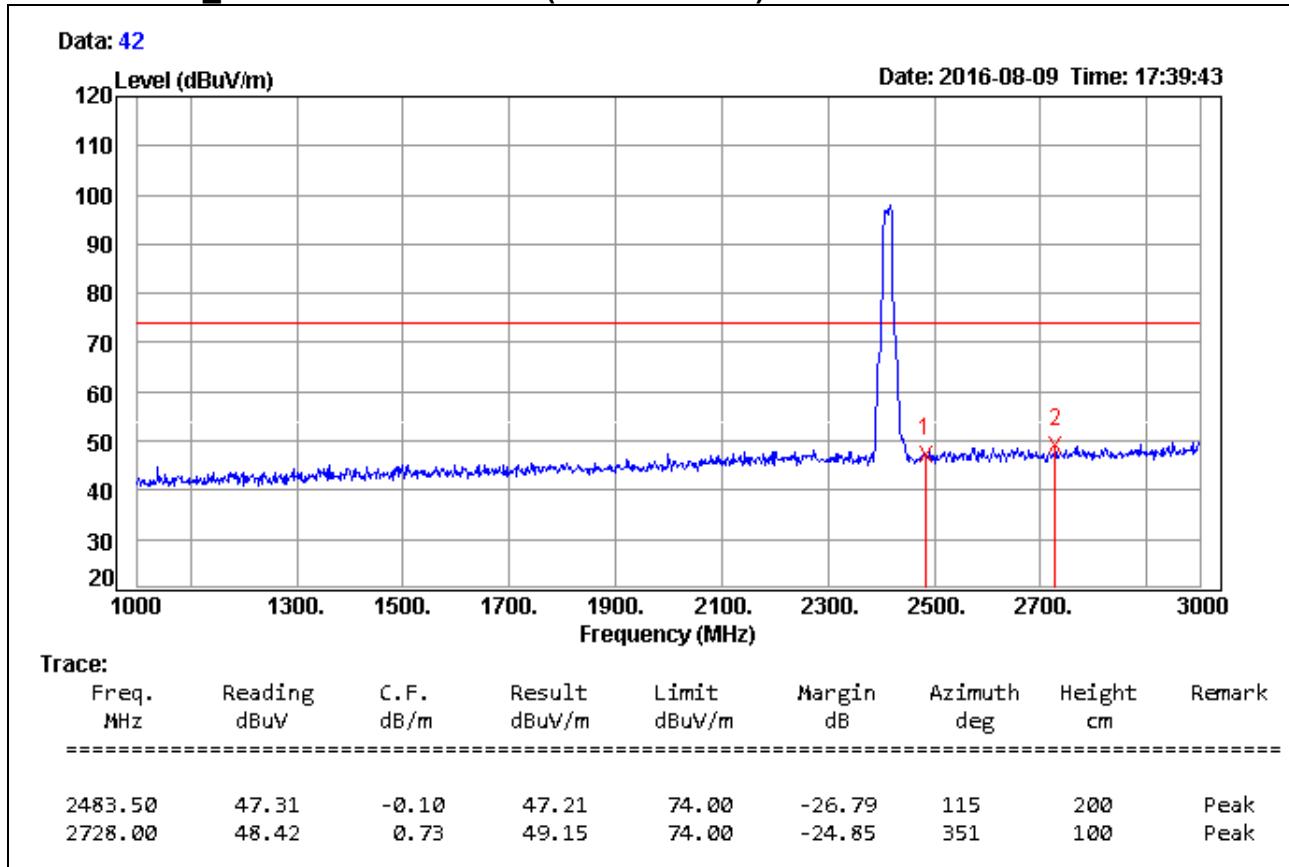


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

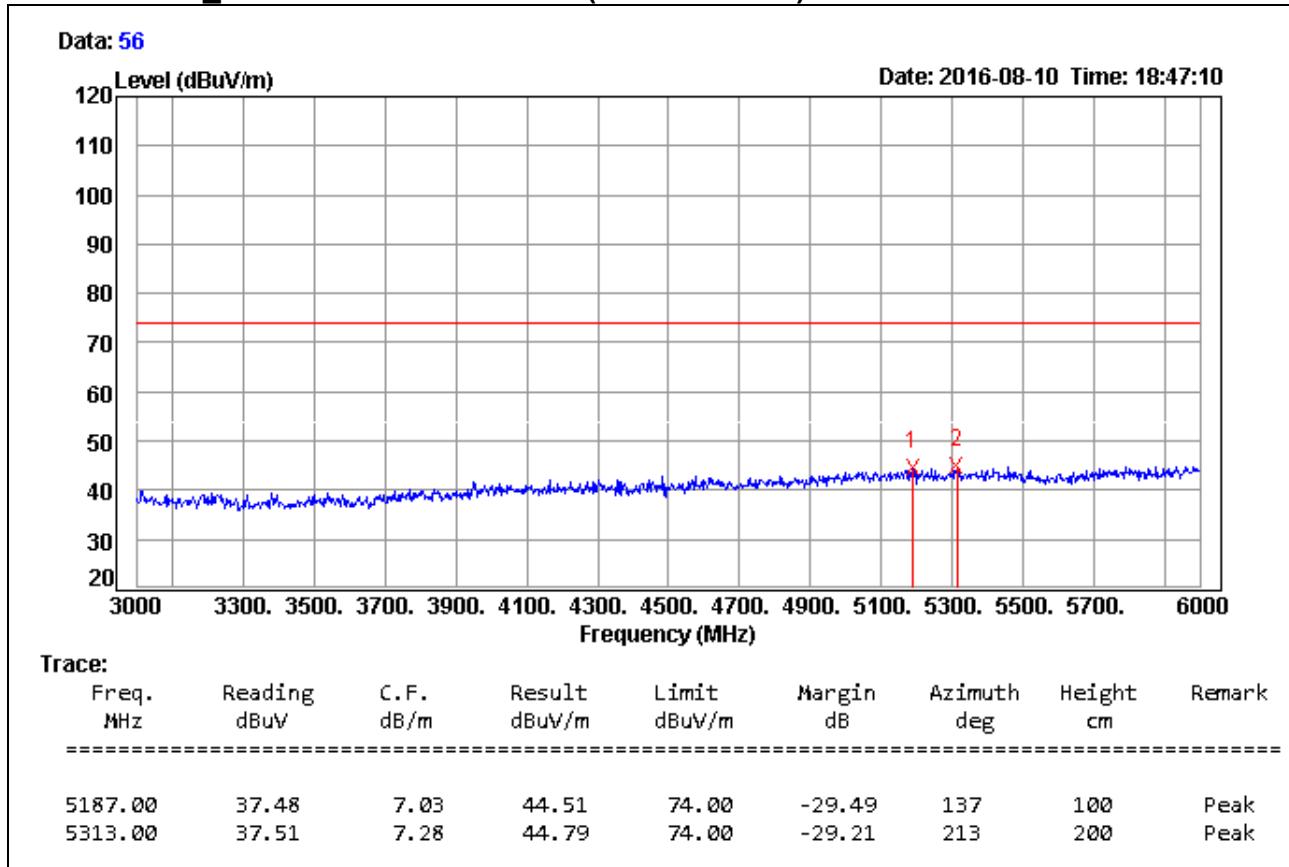
$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

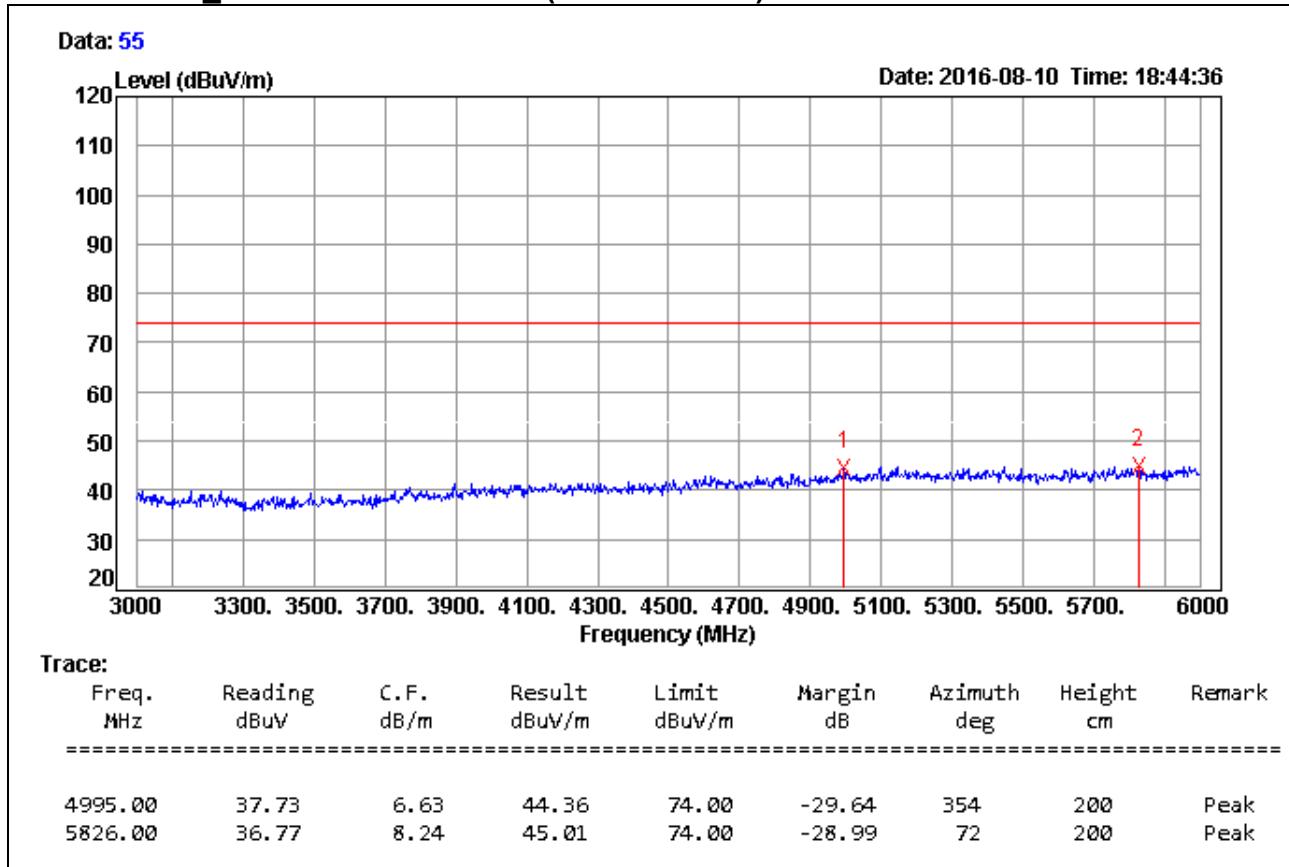
$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

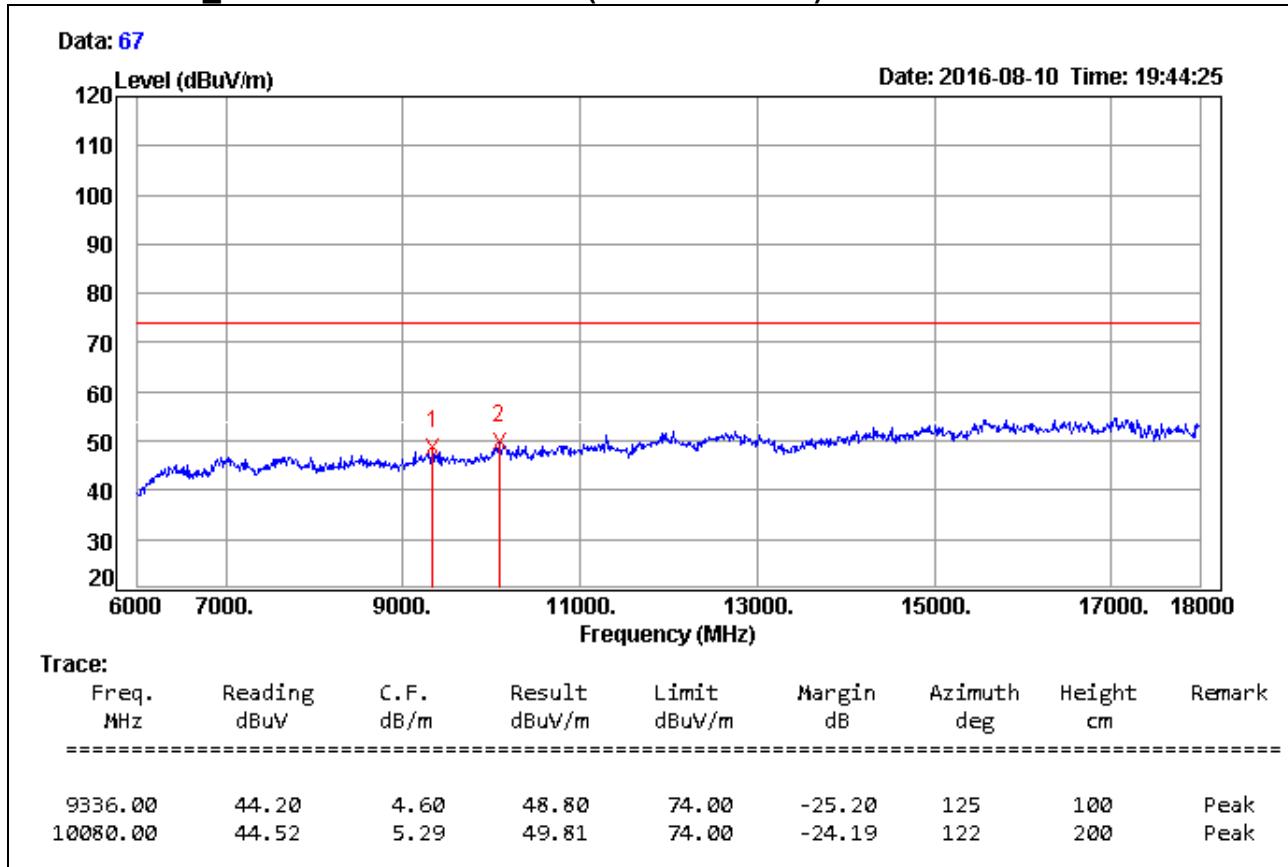
$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

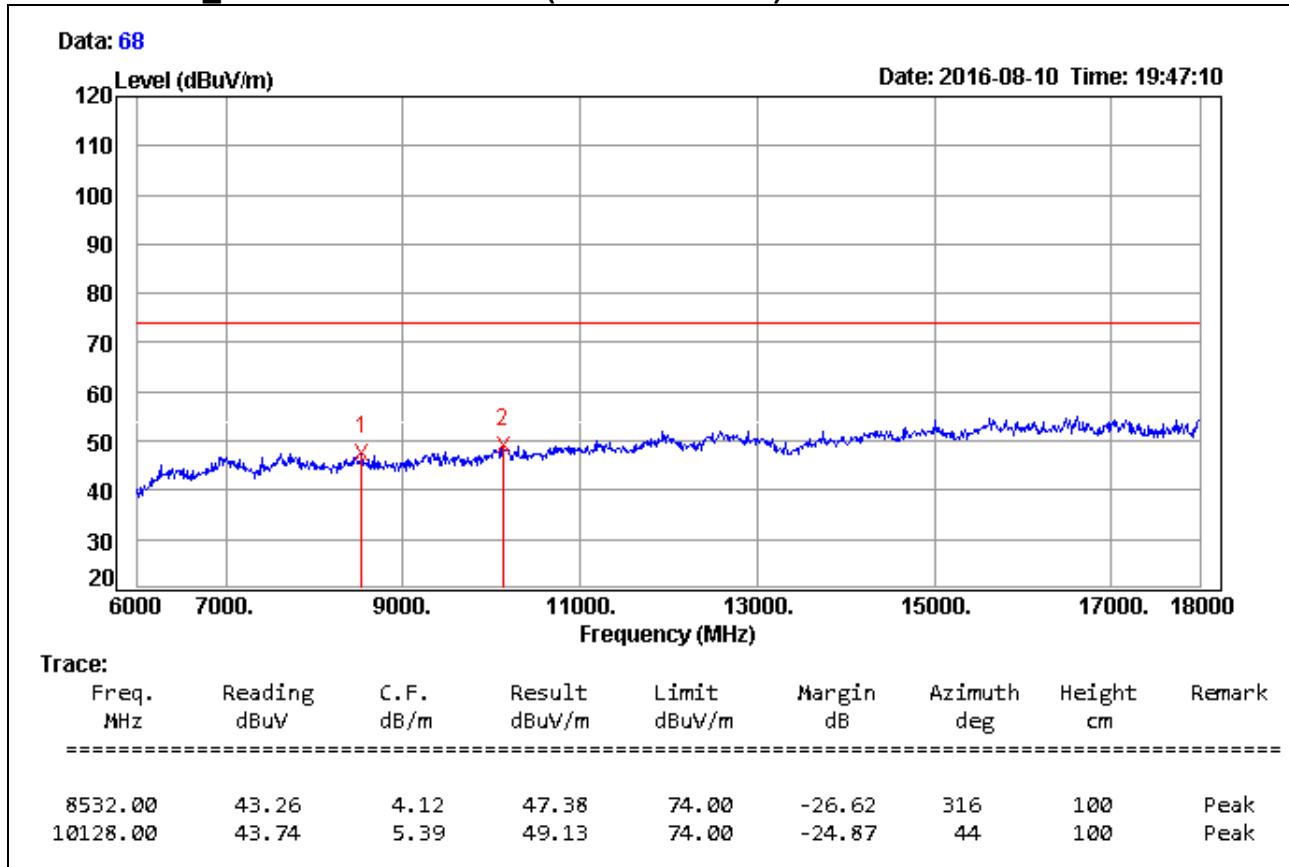
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

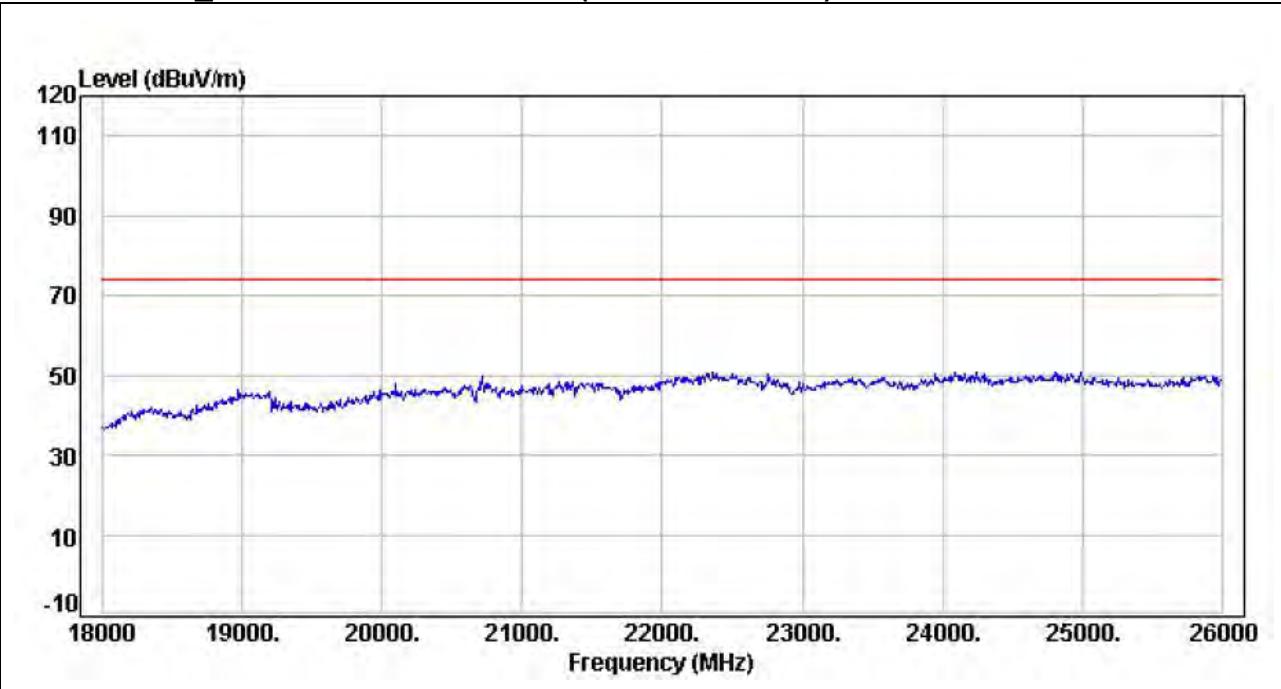
$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

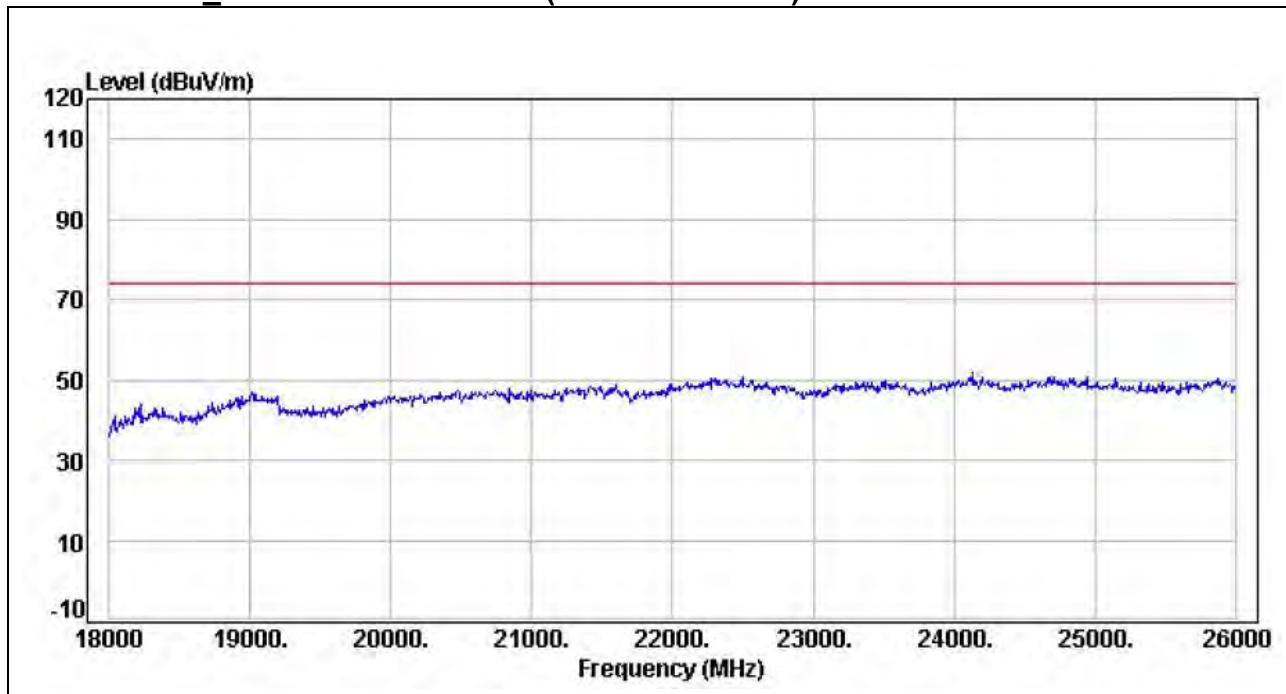
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

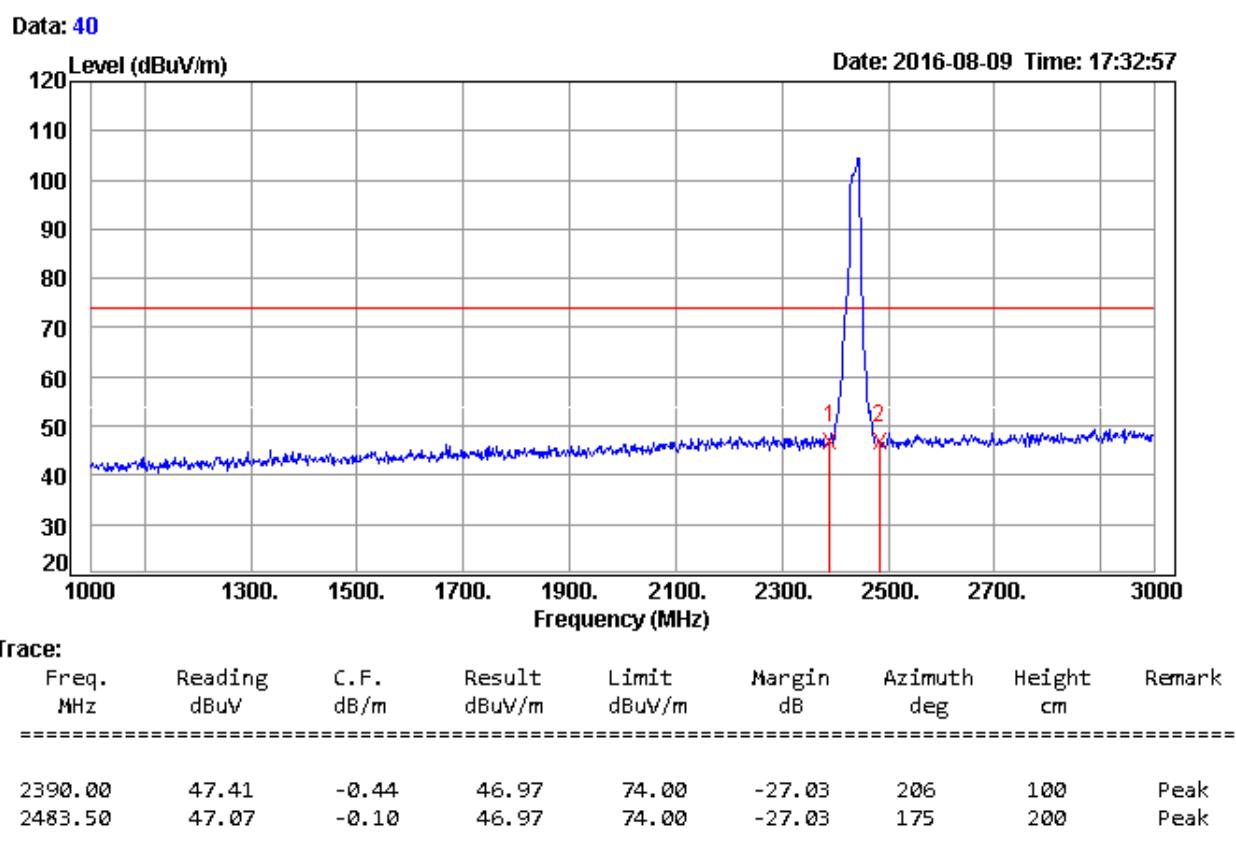
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)**Remark:**

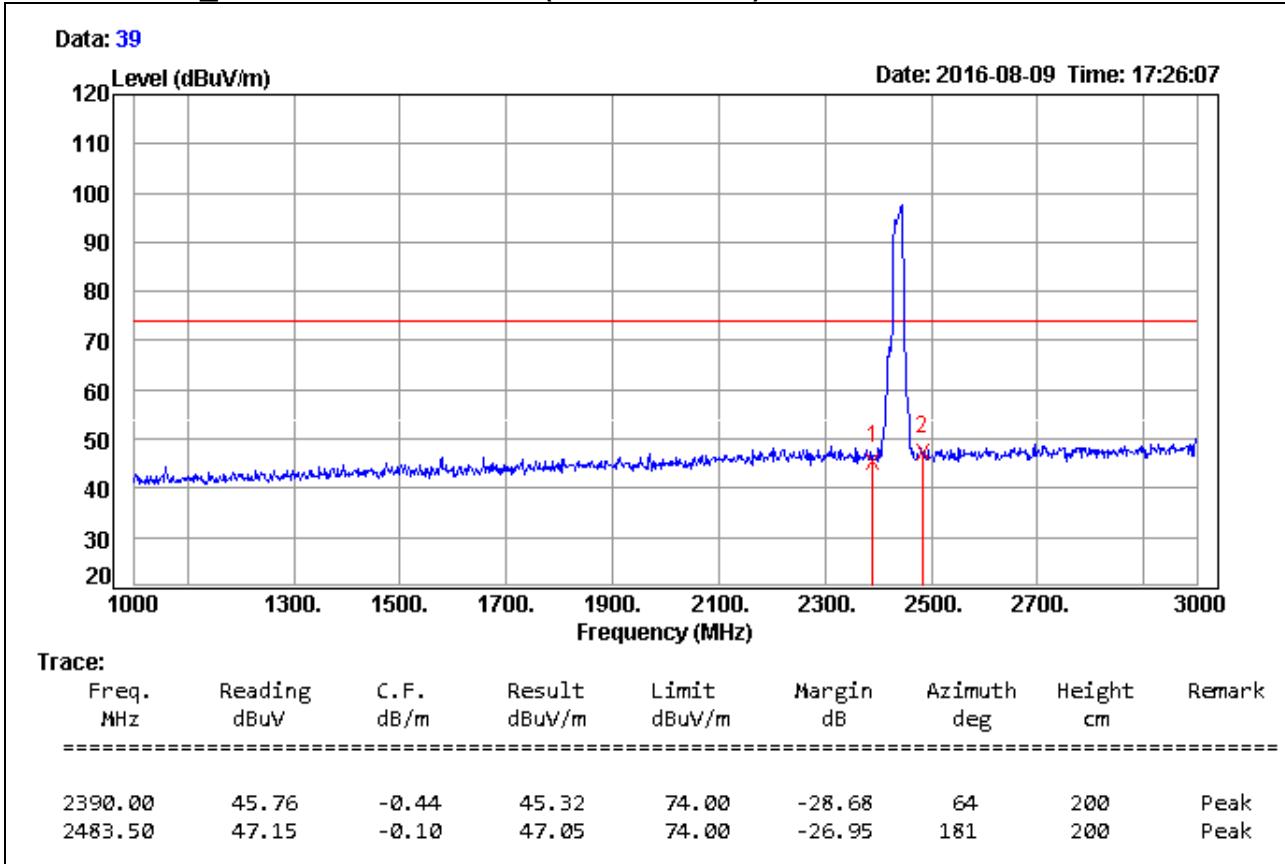
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

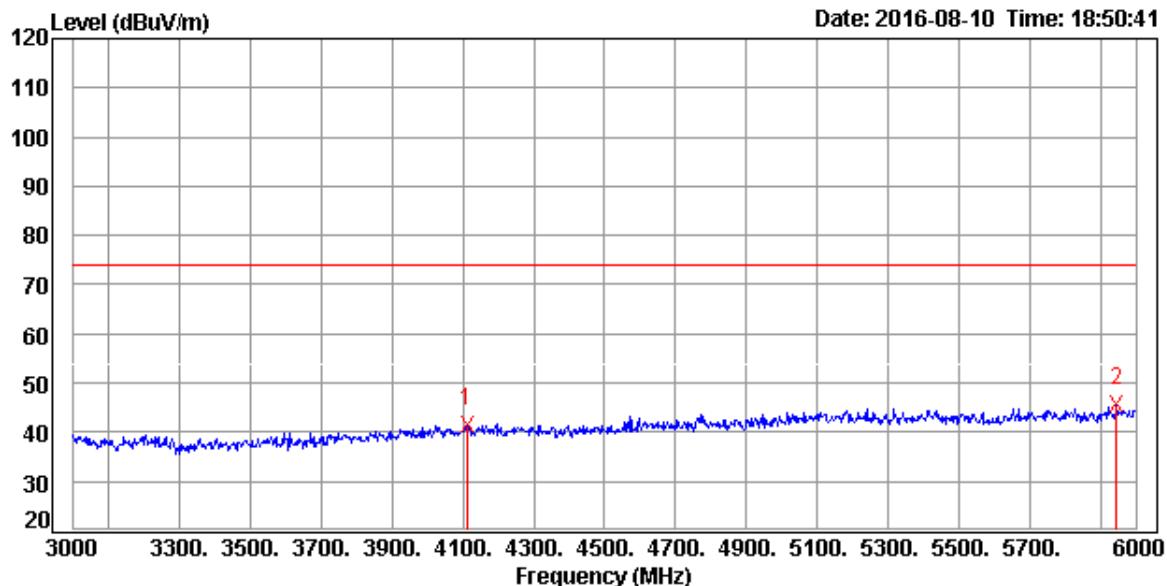
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

Data: 57



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4110.00	37.58	3.88	41.46	74.00	-32.54	279	200	Peak
5946.00	37.21	8.45	45.66	74.00	-28.34	30	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

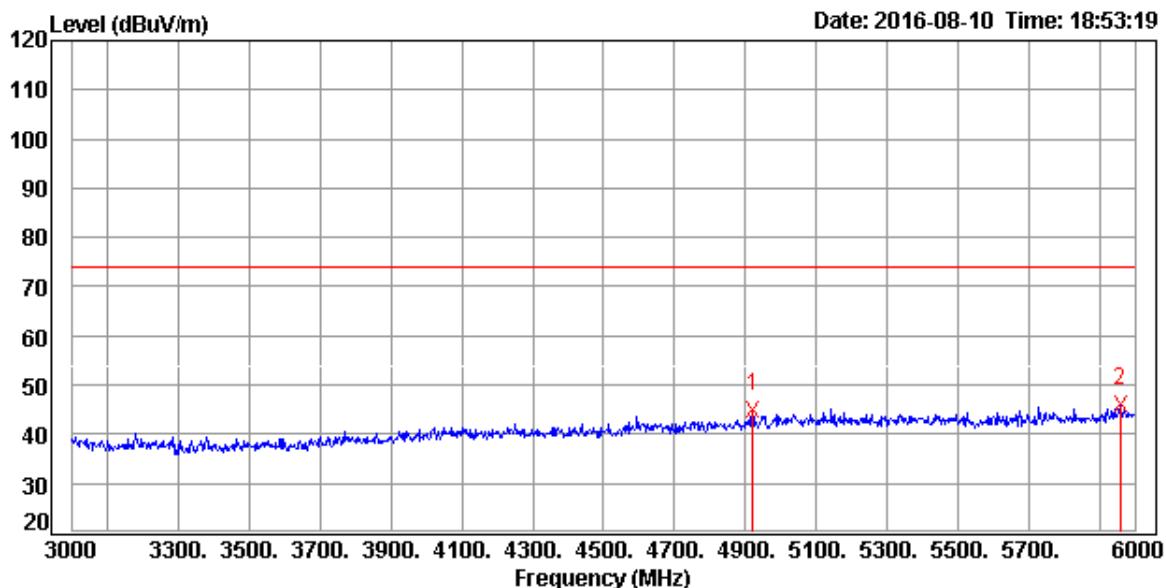
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 58



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
4920.00	38.61	6.37	44.98	74.00	-29.02	211	200	Peak
5958.00	37.44	8.48	45.92	74.00	-28.08	311	200	Peak

Remark:

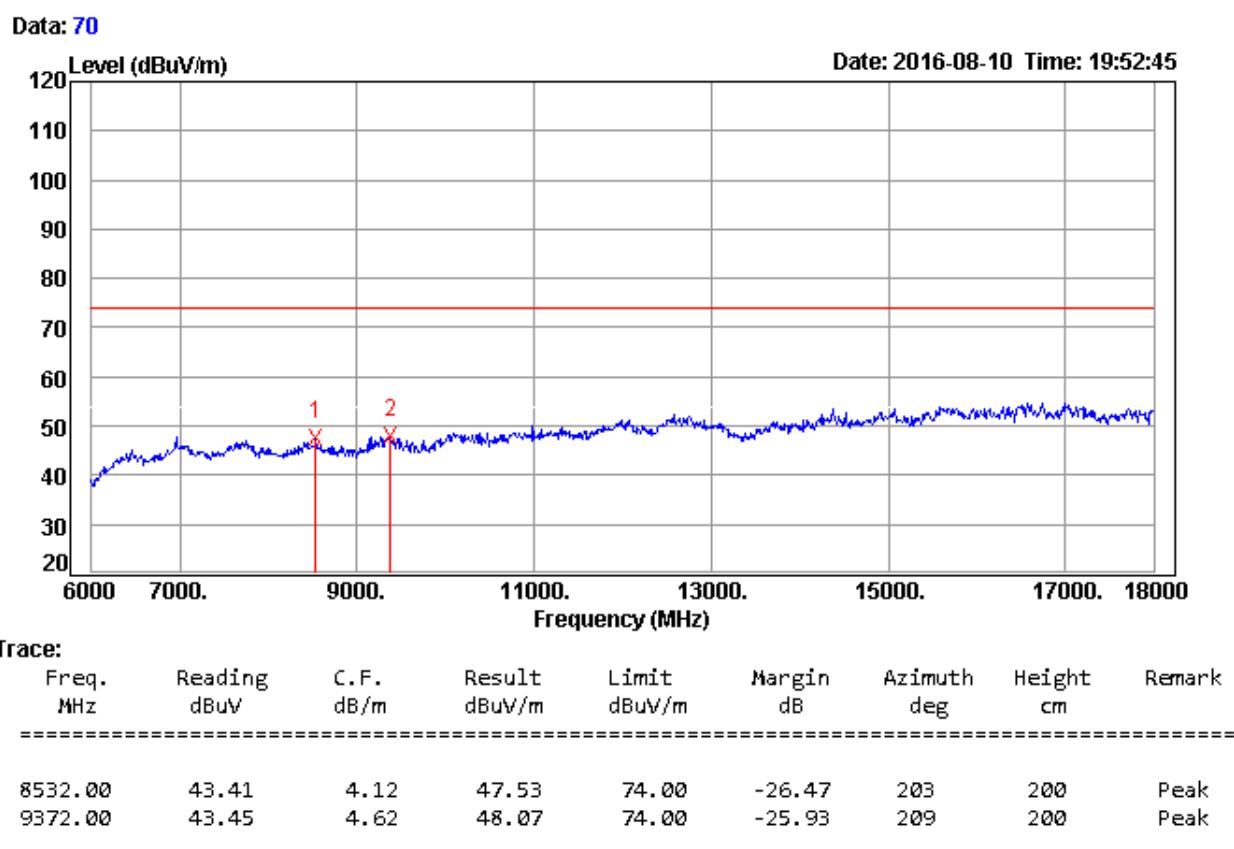
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

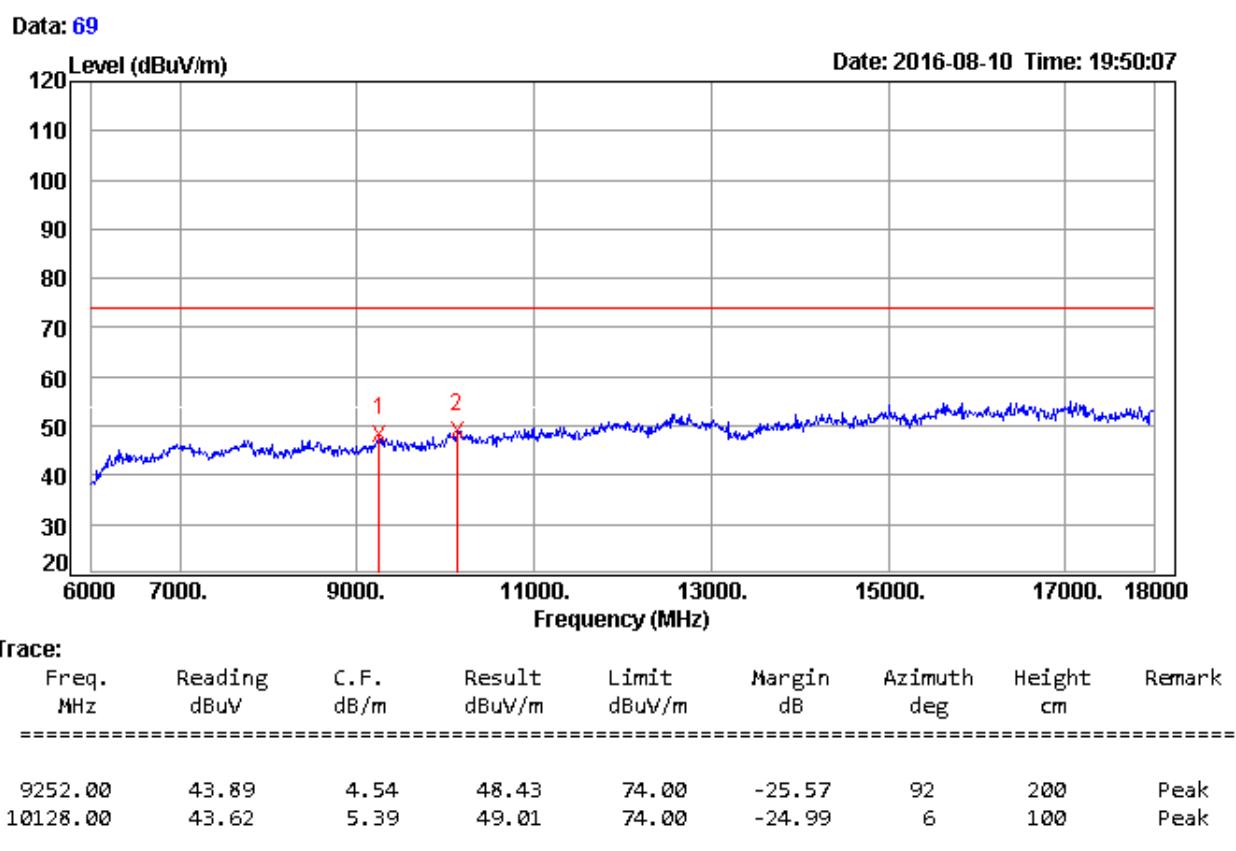
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

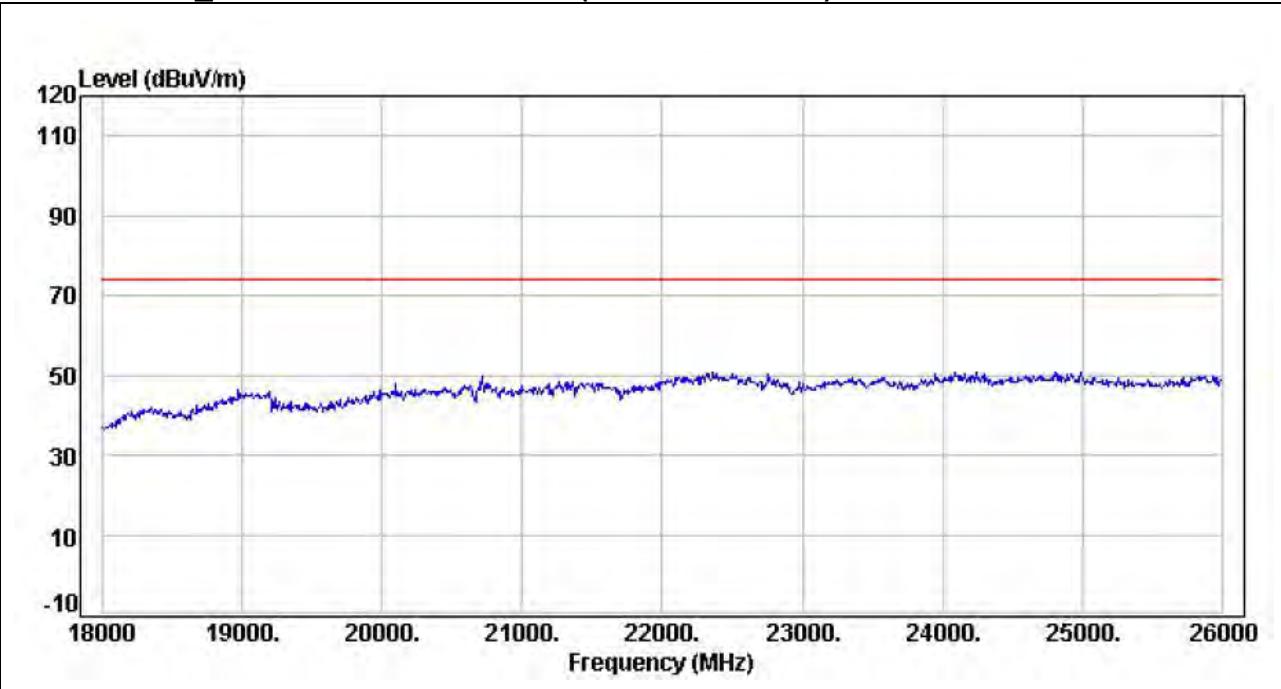
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

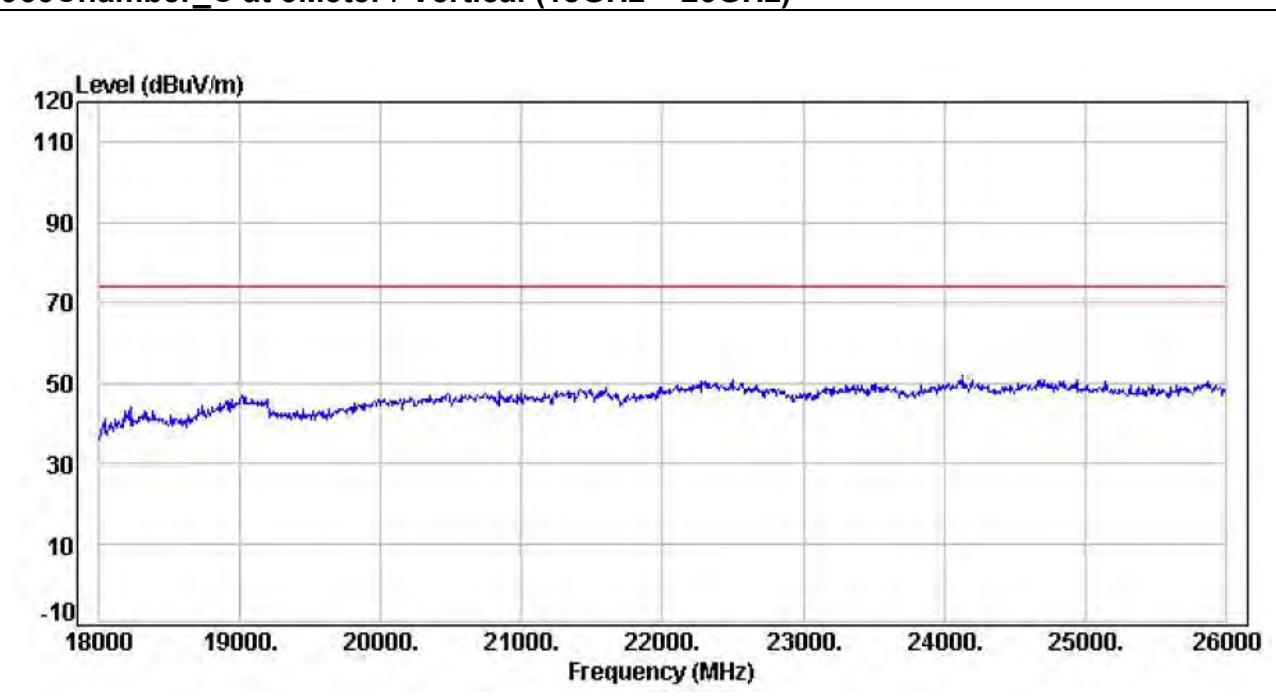
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

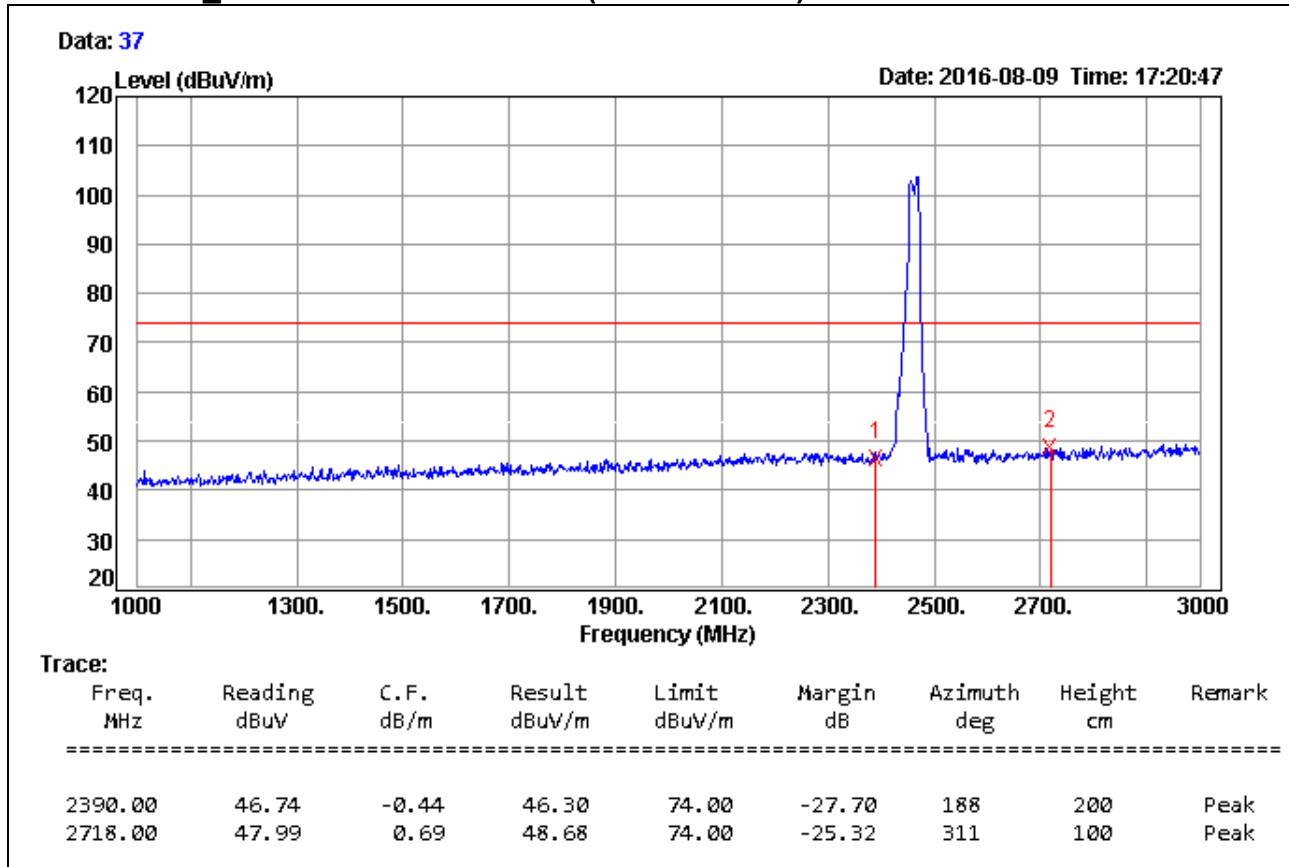
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)

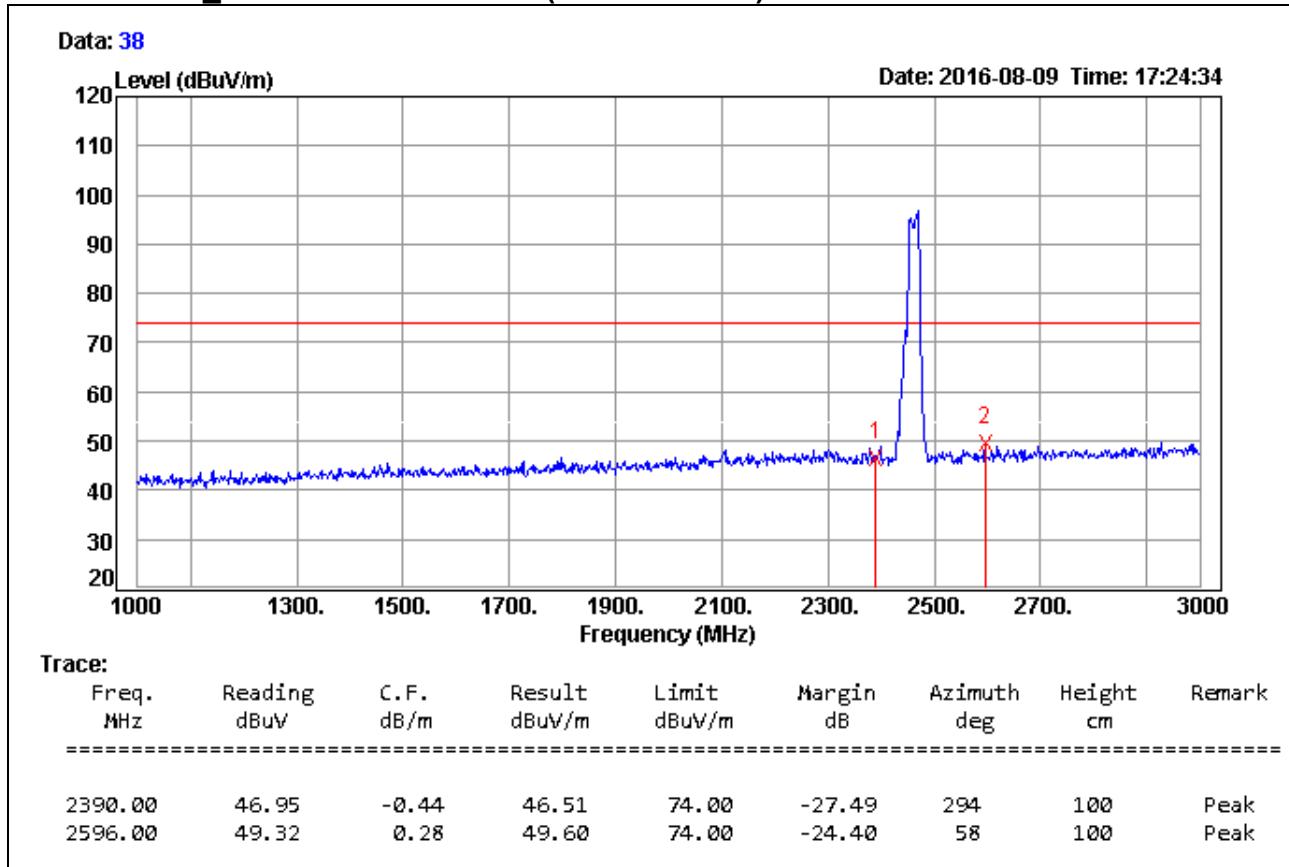


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)

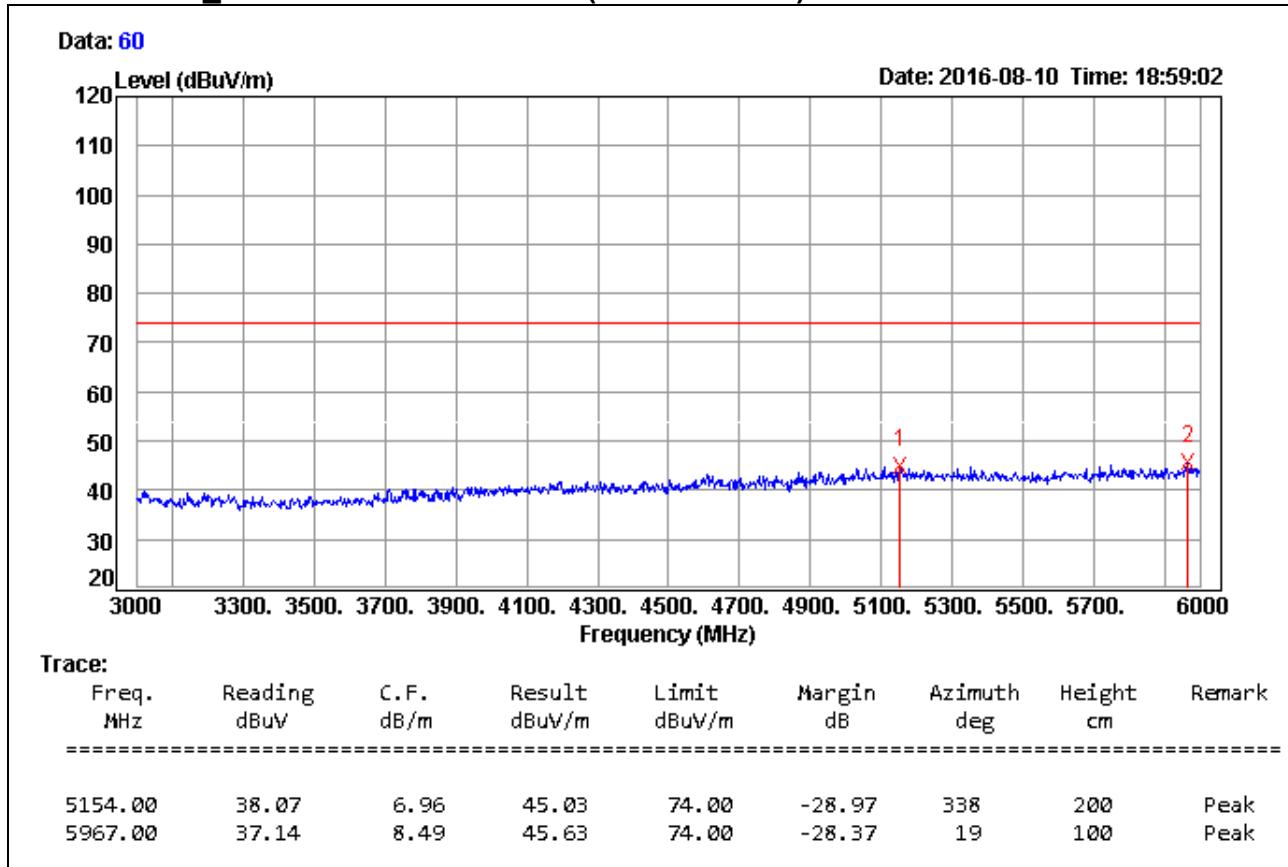


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)

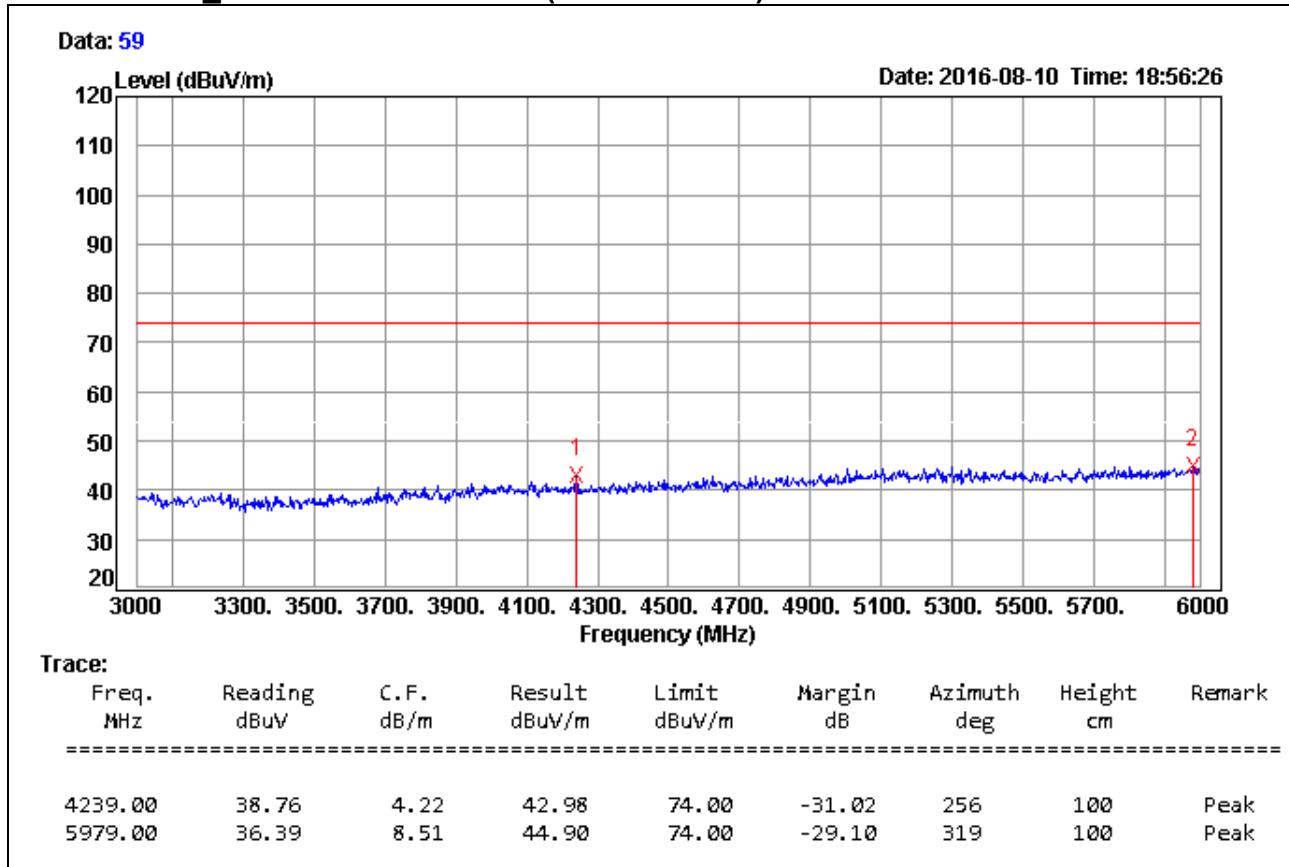


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)



Remark:

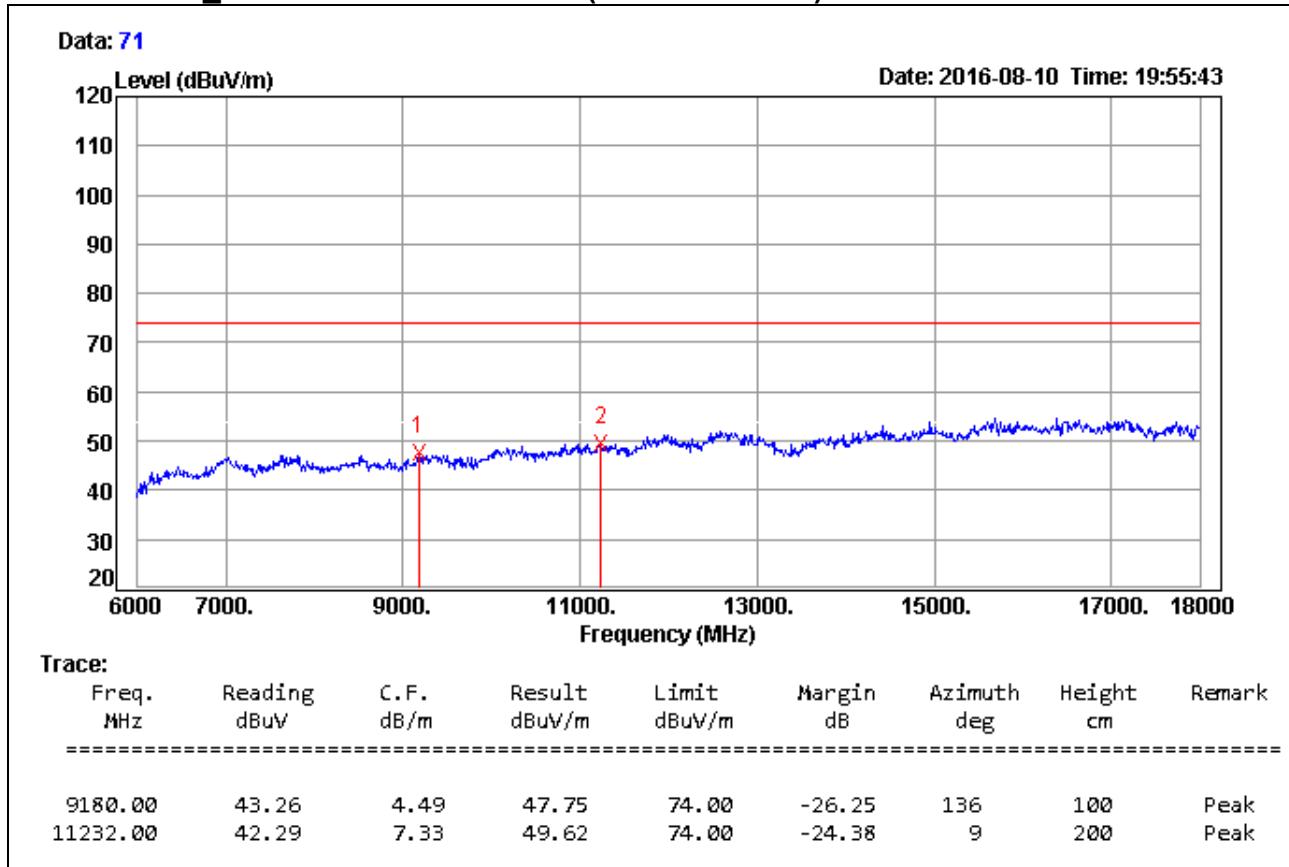
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

$$\text{Margin} = \text{Result} - \text{Limit}$$

$$\text{Remark Peak} = \text{Result(PK)} - \text{Limit(PK)}$$

$$\text{Remark AVG} = \text{Result(AV)} - \text{Limit(AV)}$$

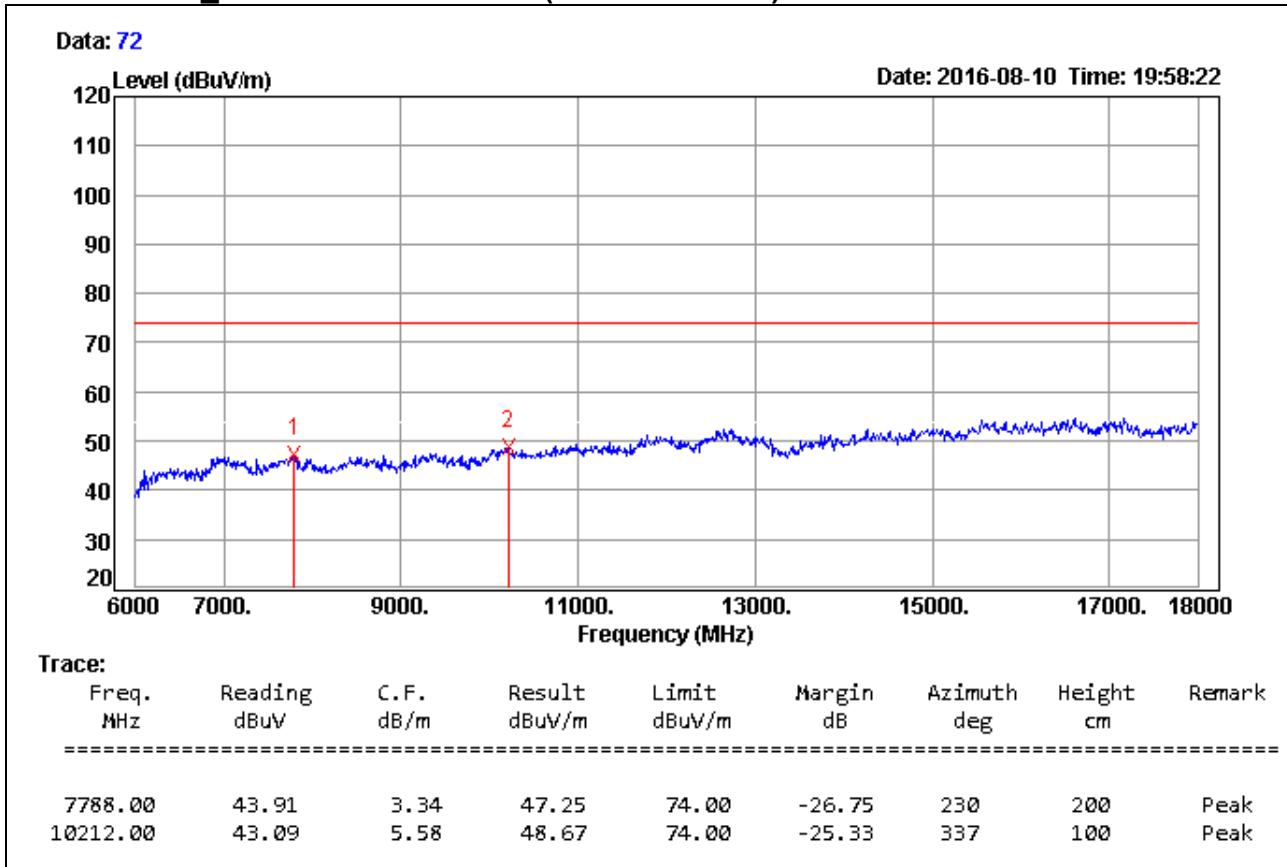
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

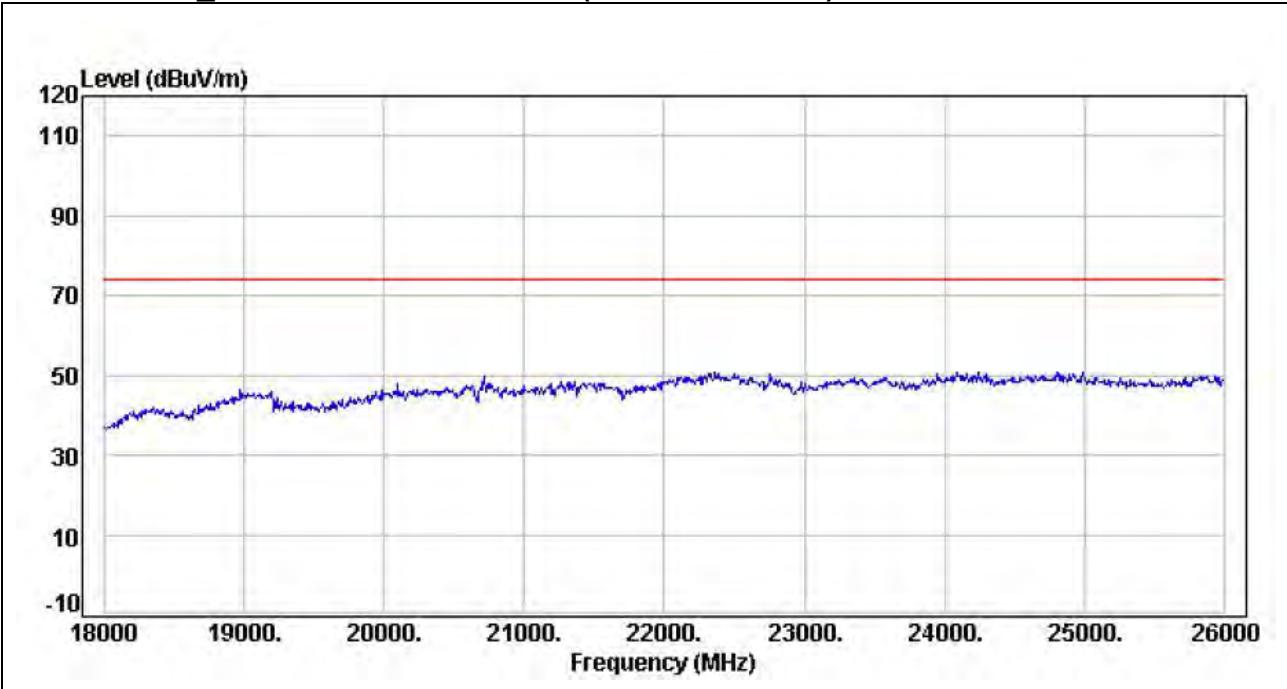
966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)



Remark:

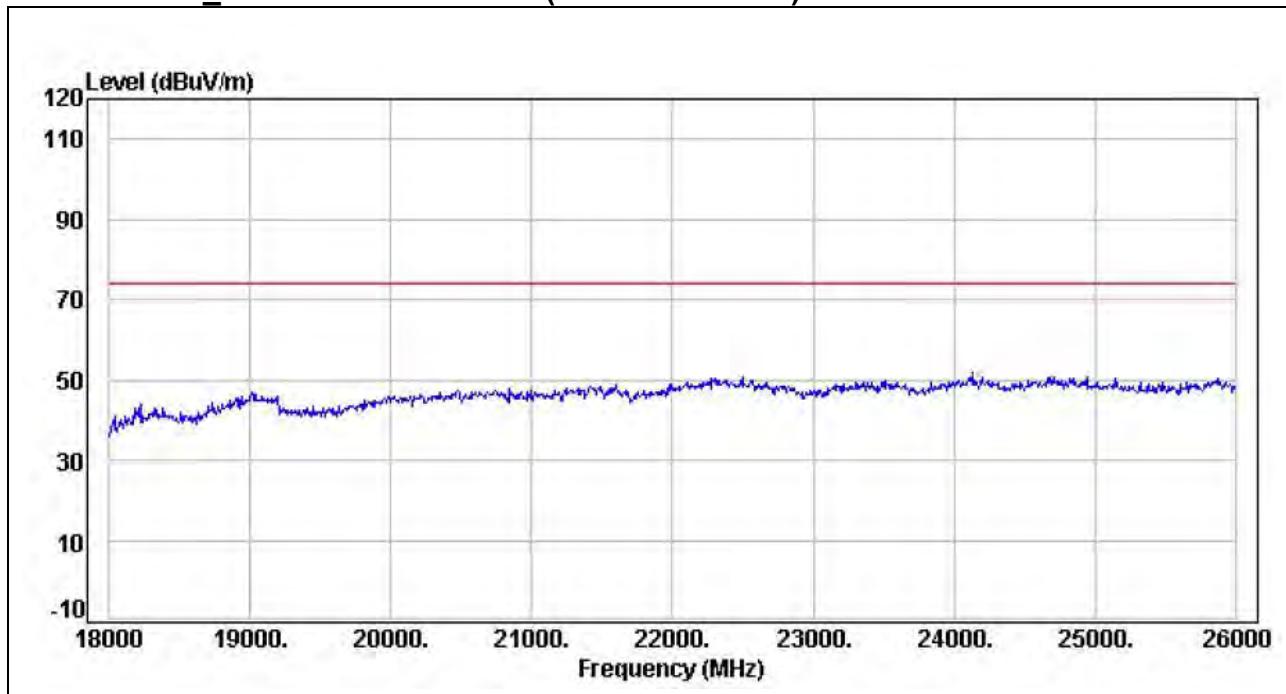
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

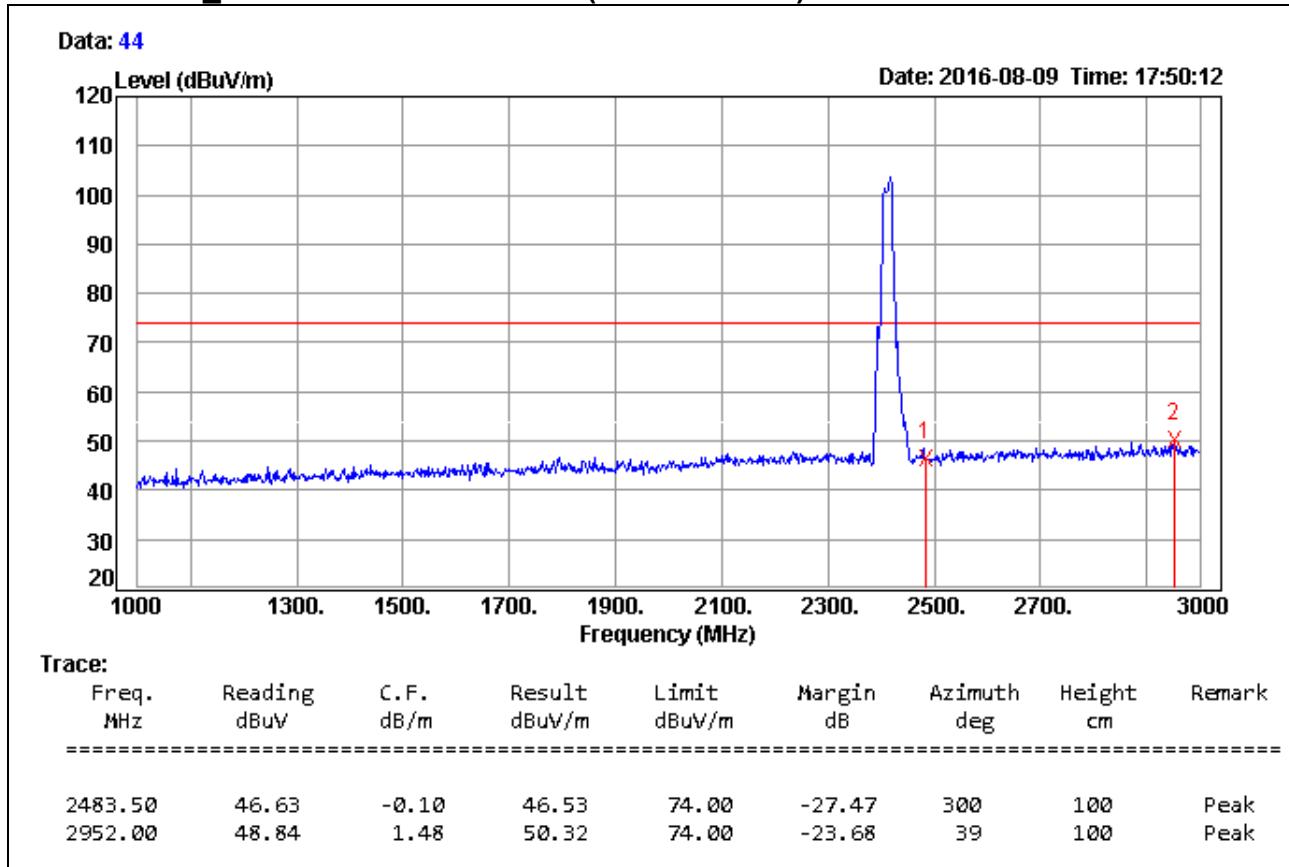
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11g Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

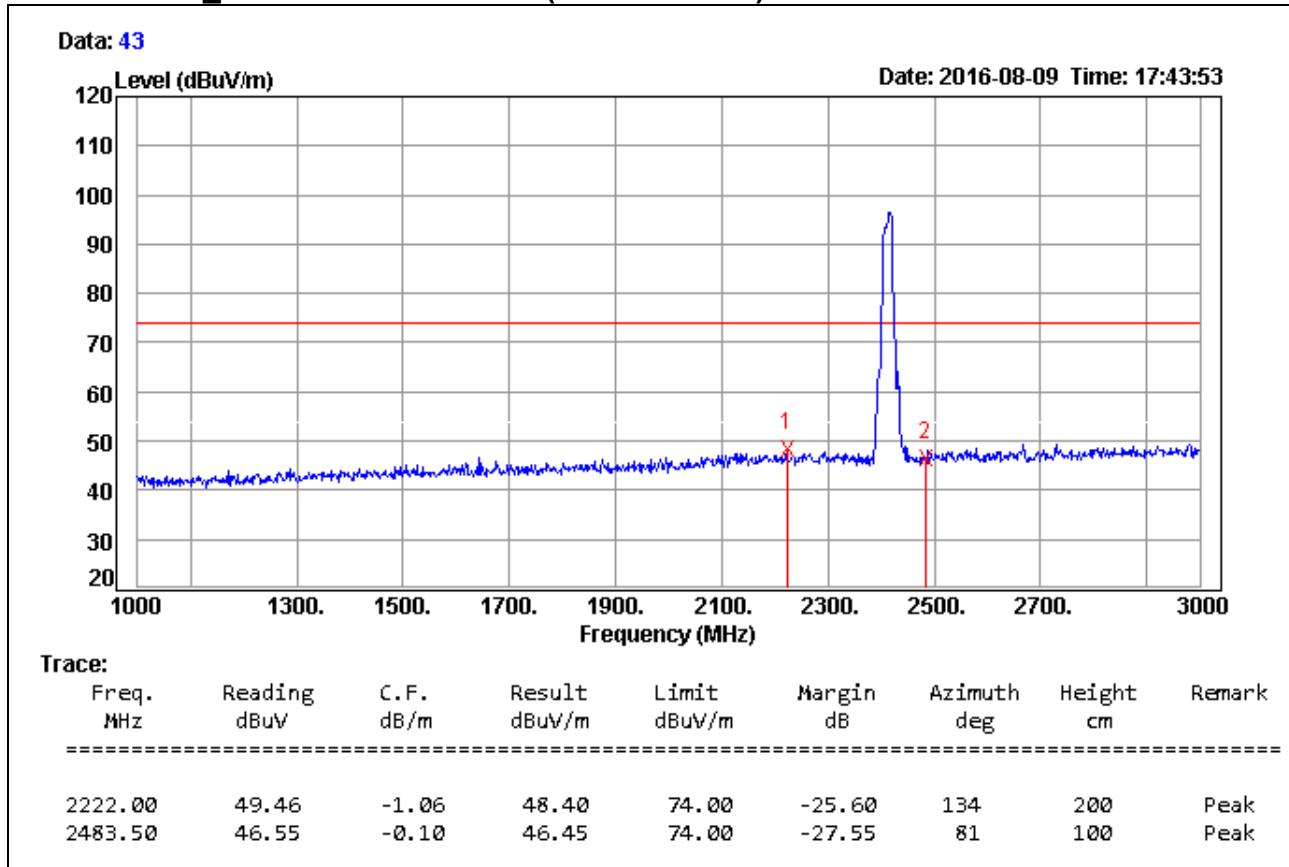
966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

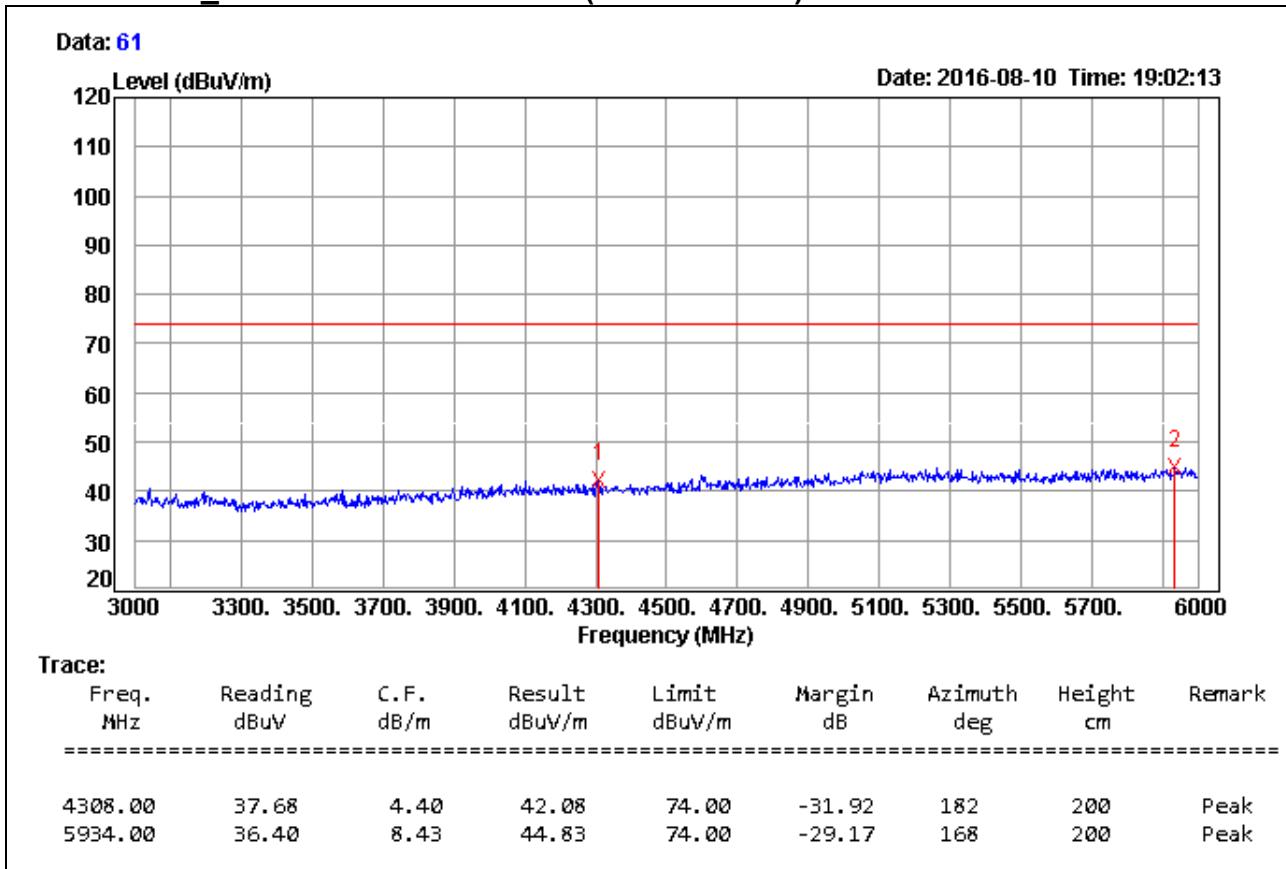
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

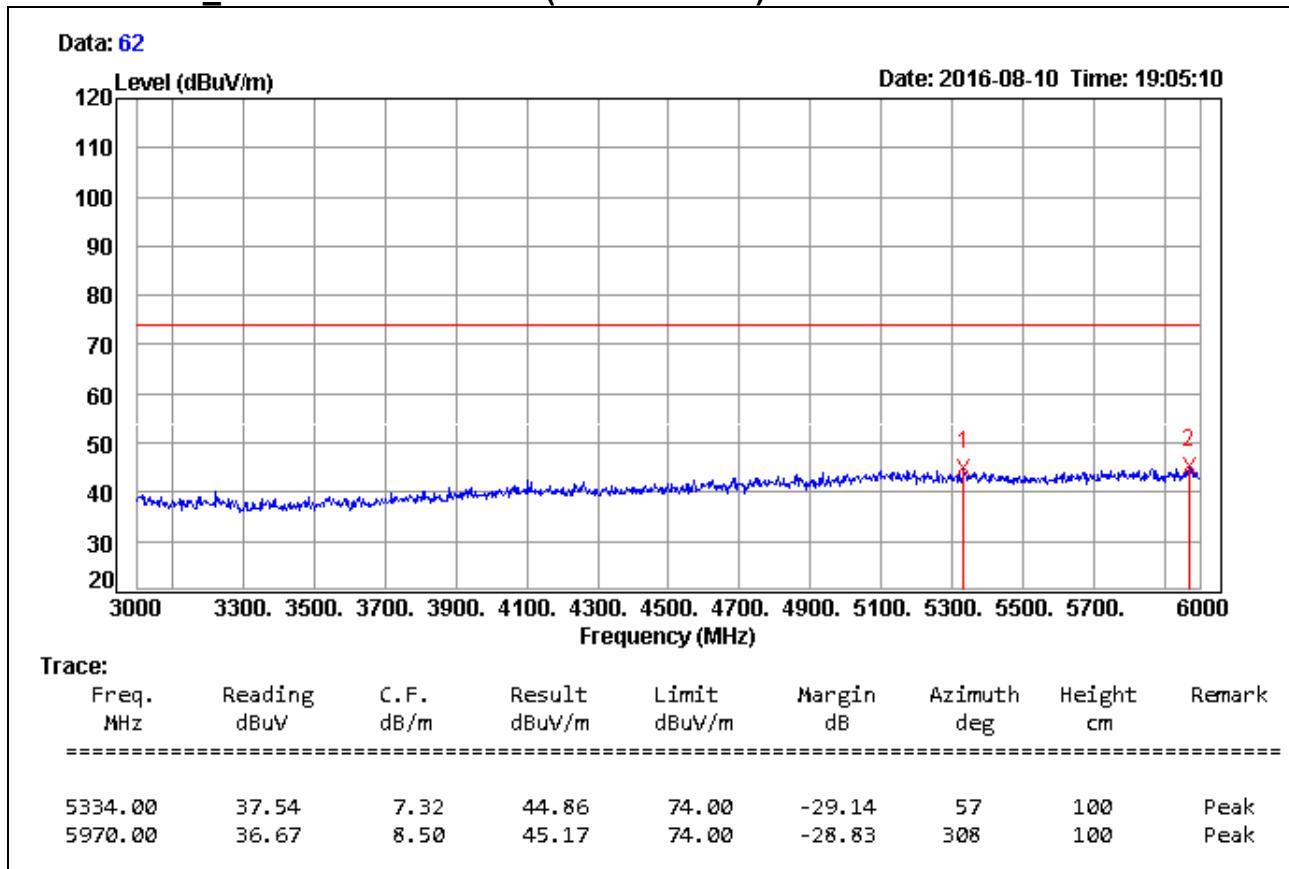
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)**Remark:**

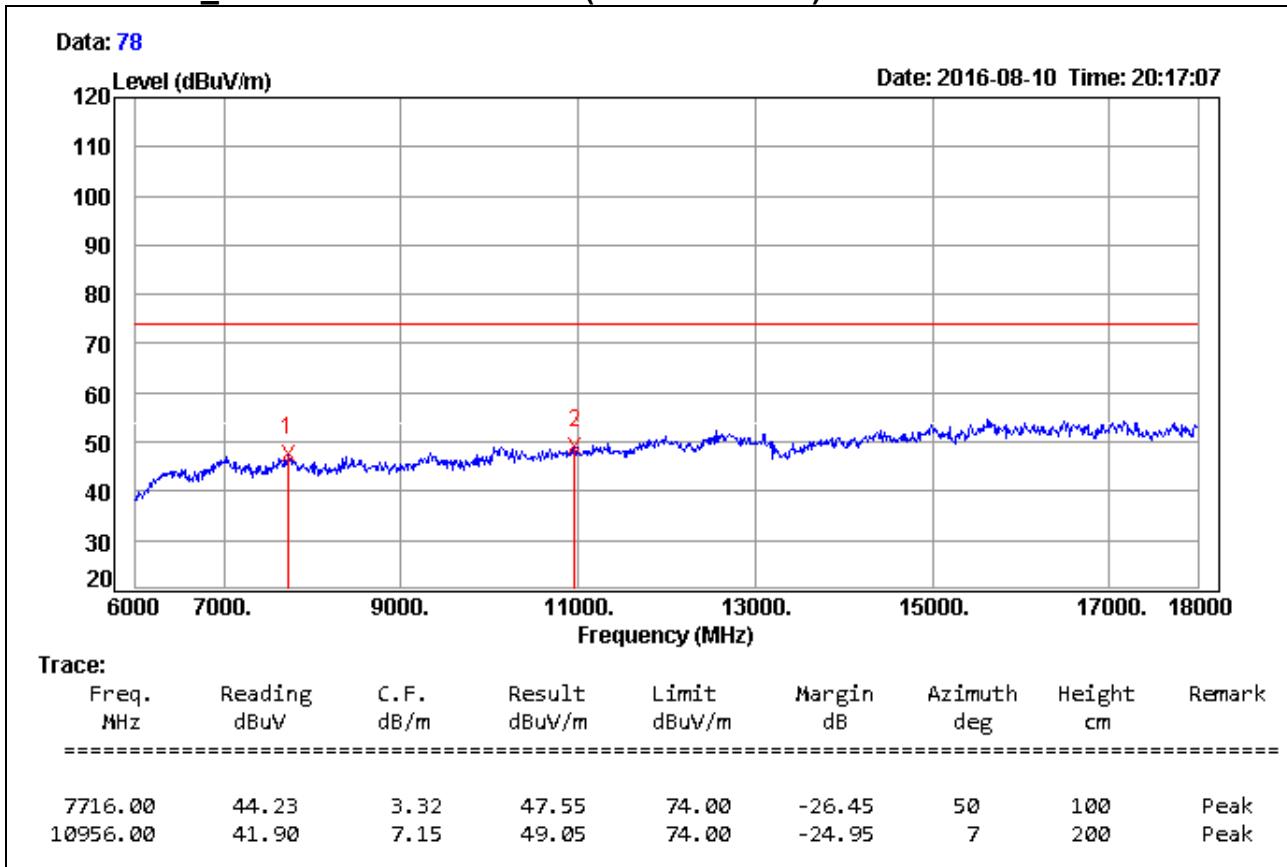
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)**Remark:**

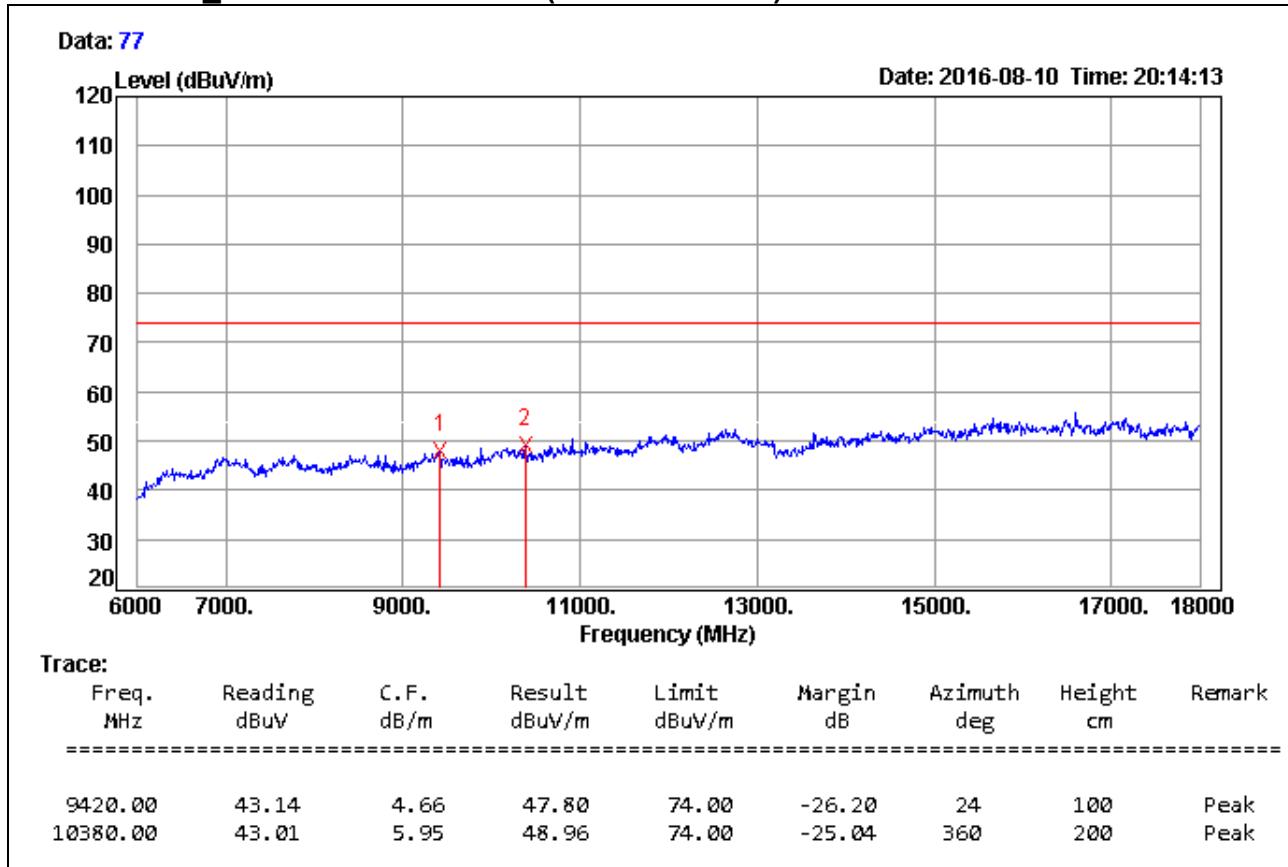
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)**Remark:**

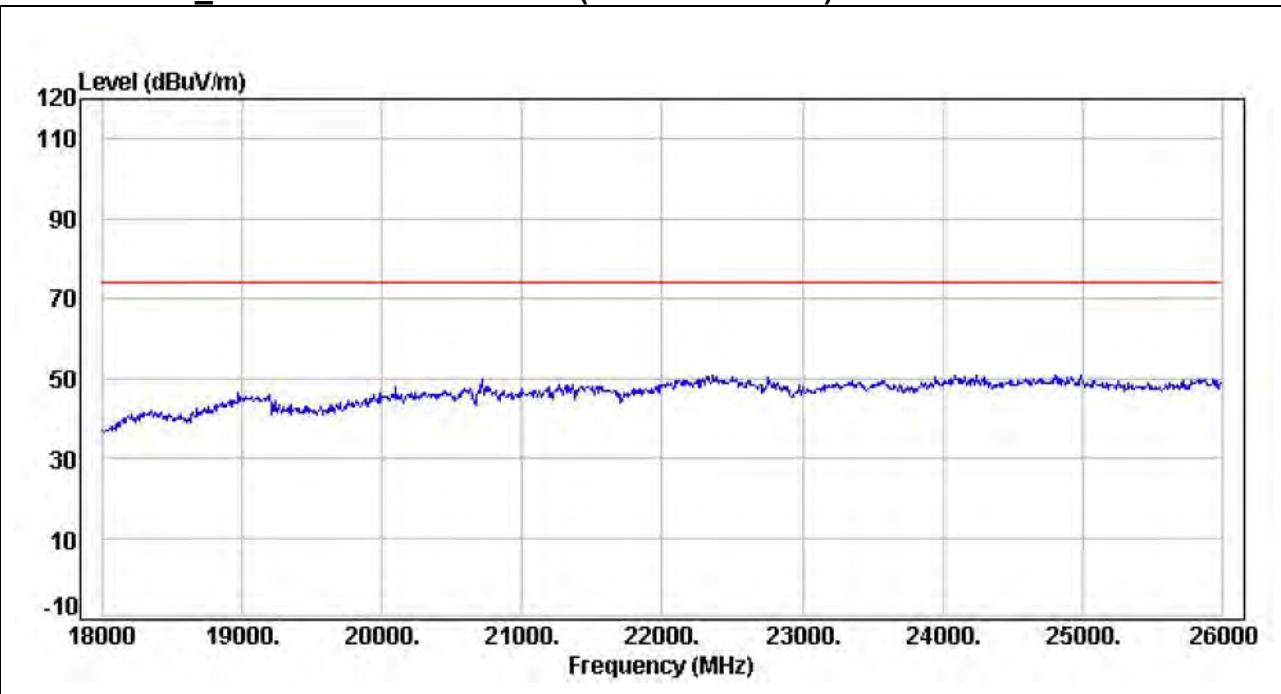
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

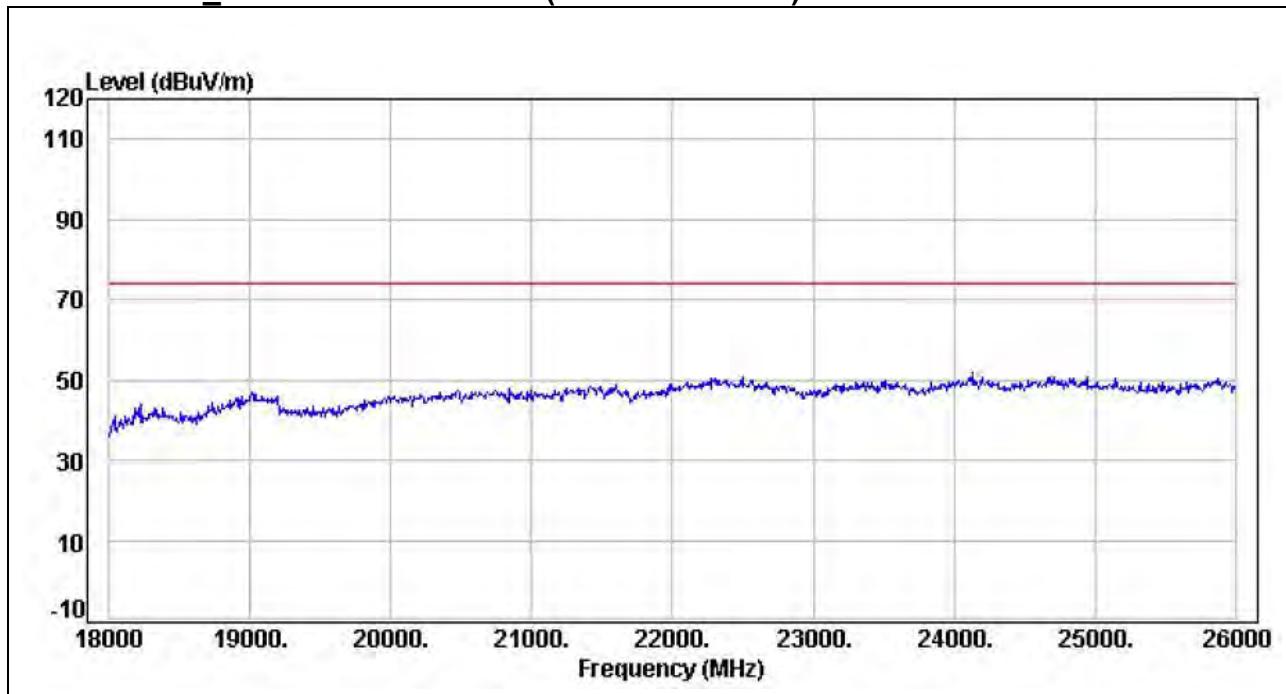
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

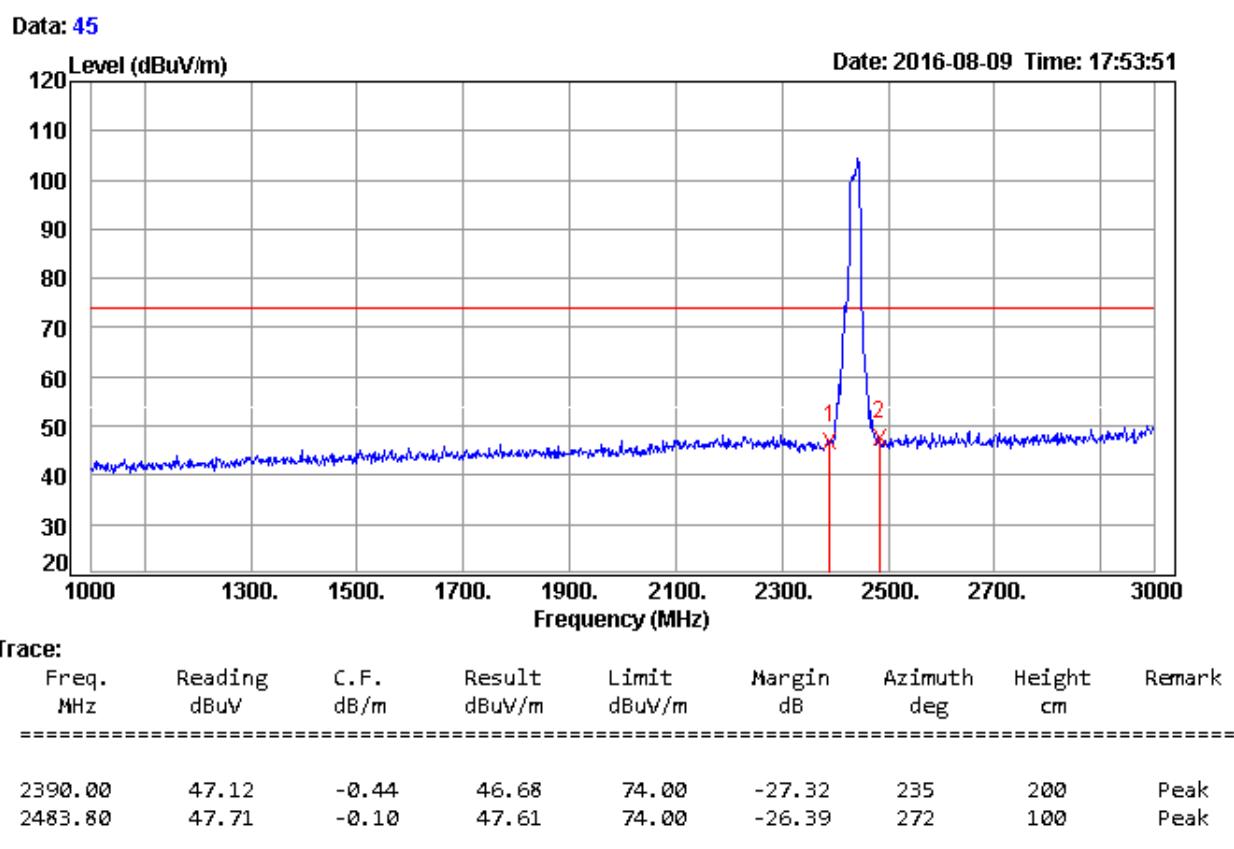
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Low / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

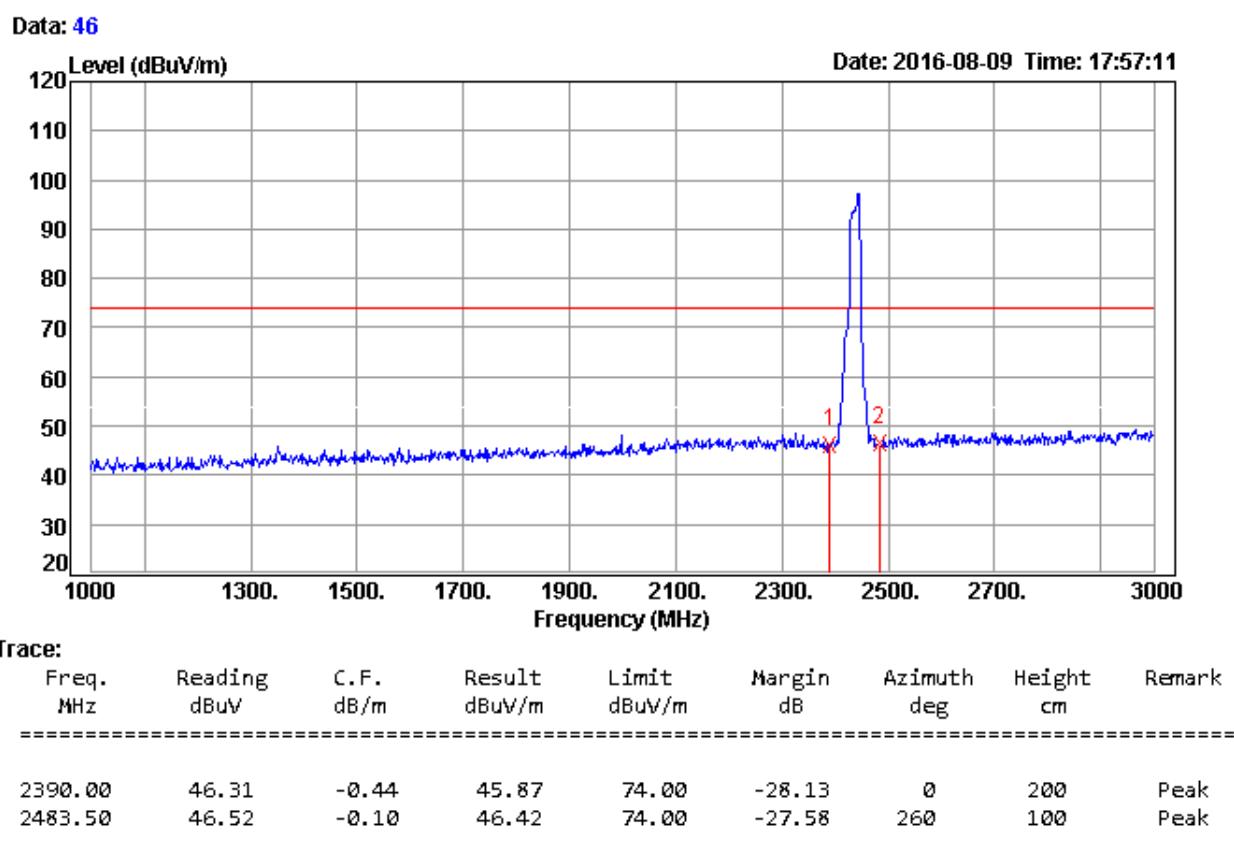
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

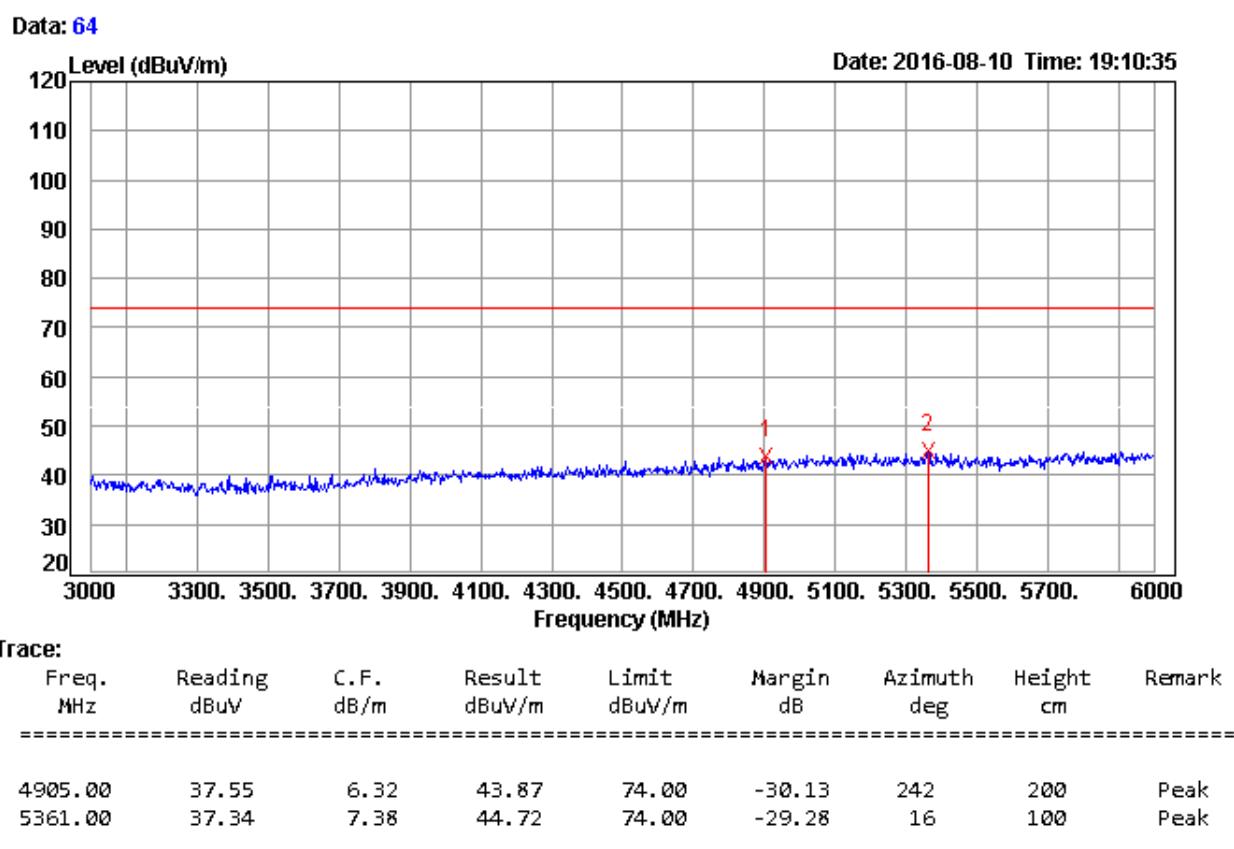
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

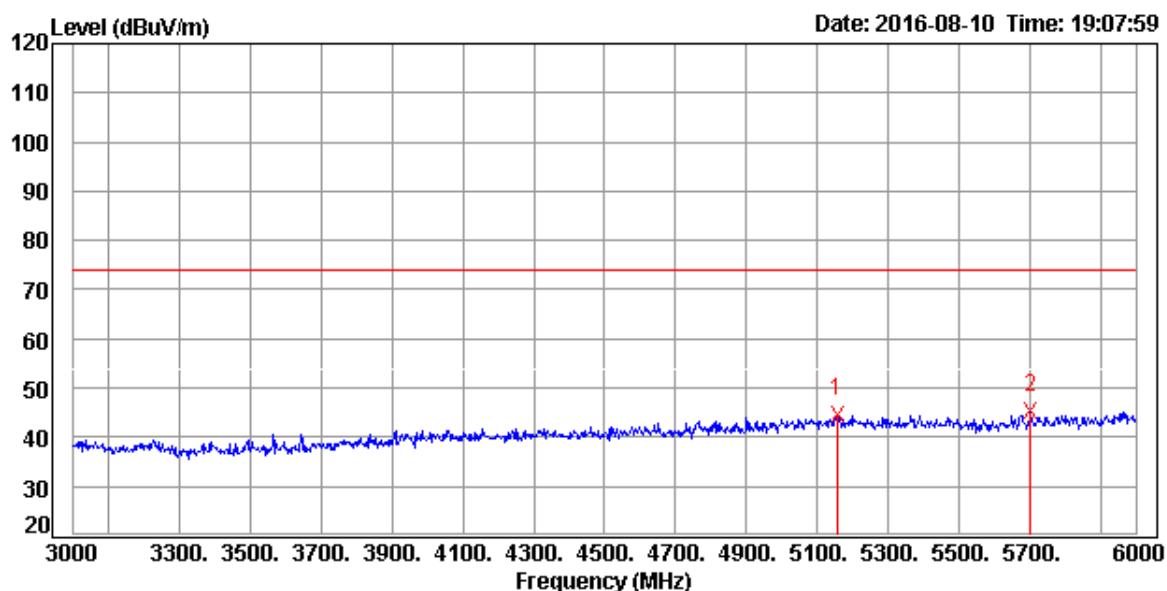
Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)

Data: 63



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
5157.00	37.67	6.97	44.64	74.00	-29.36	24	100	Peak
5703.00	37.17	8.02	45.19	74.00	-28.81	133	200	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

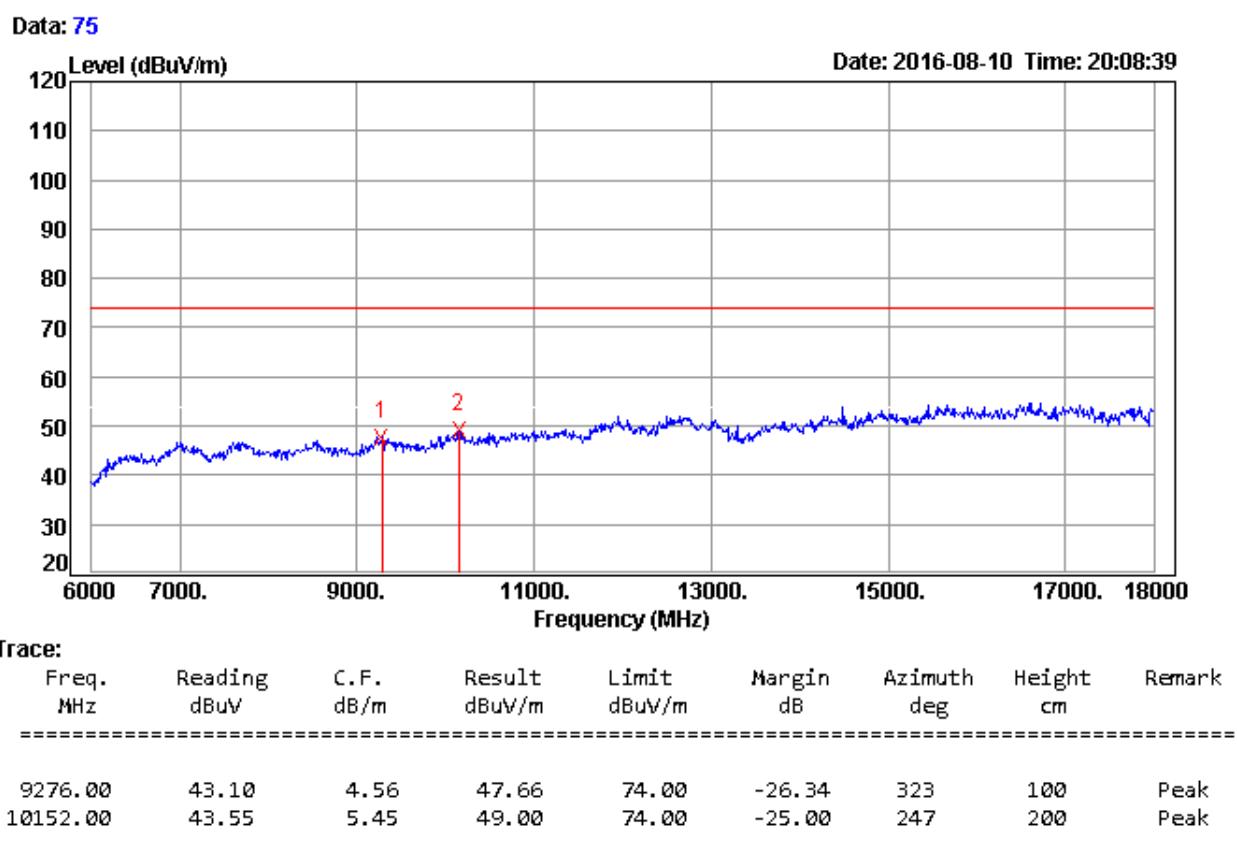
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

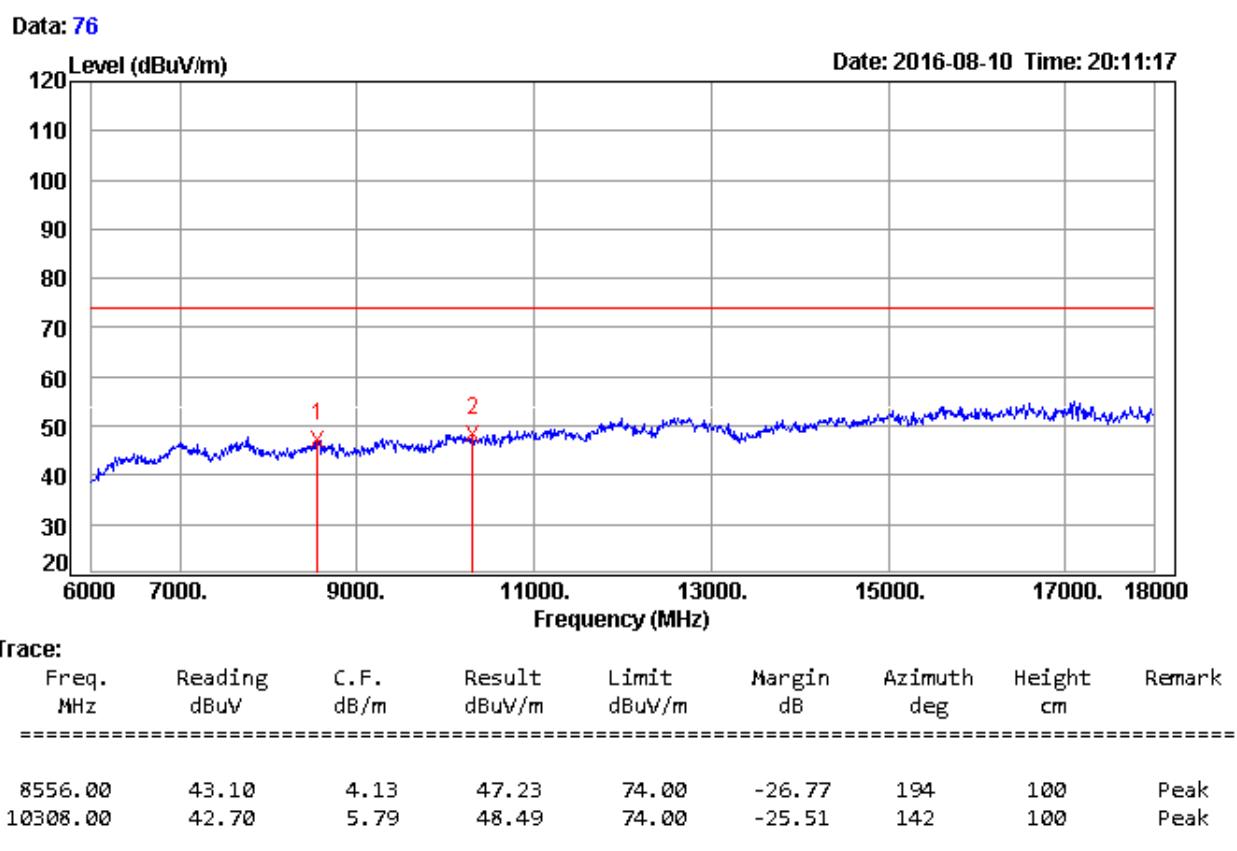
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

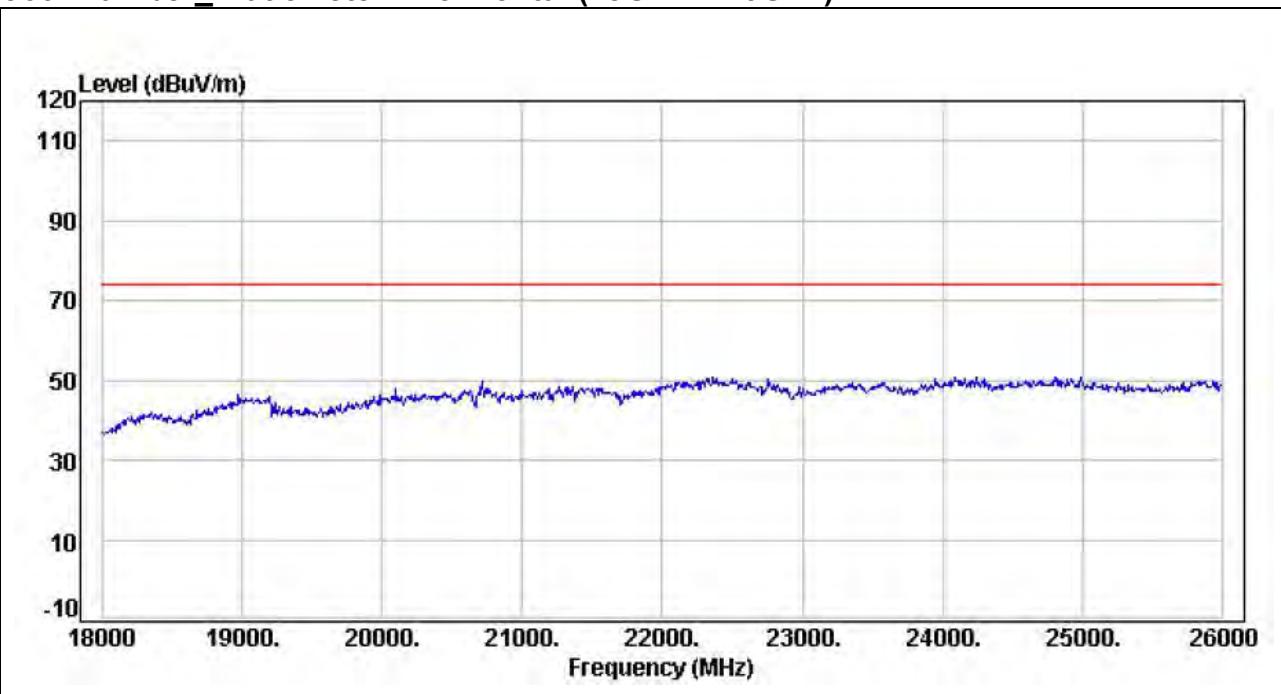
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

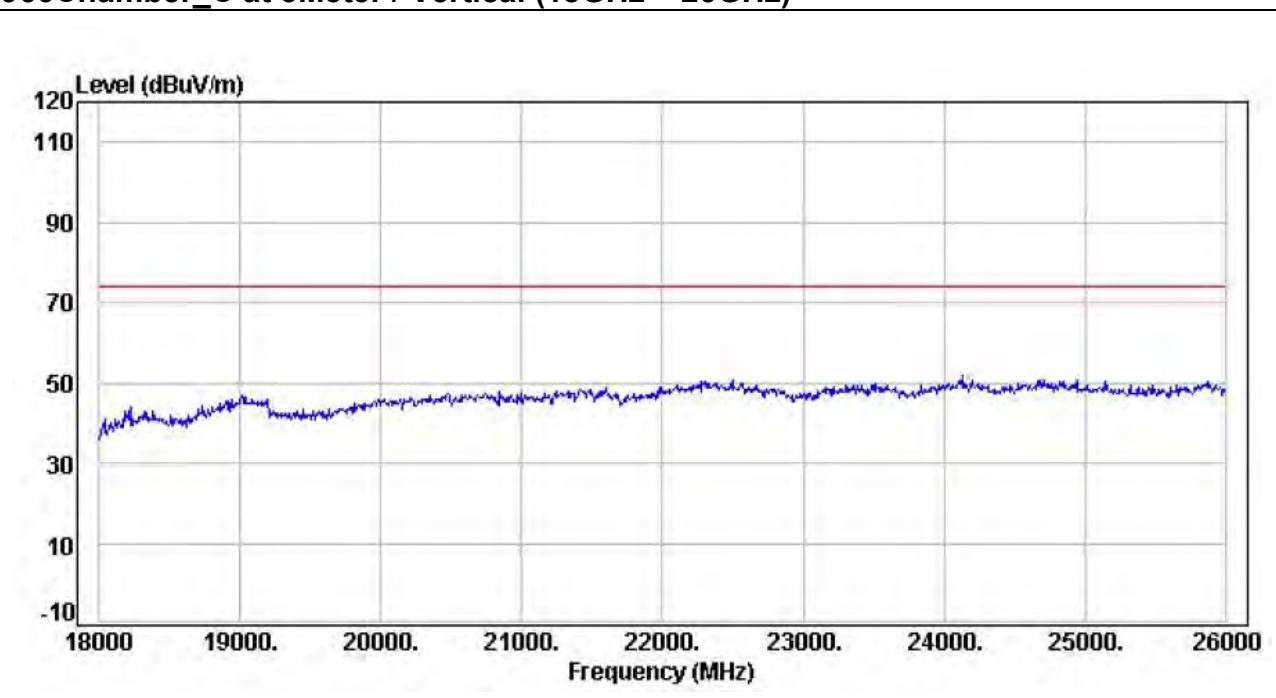
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

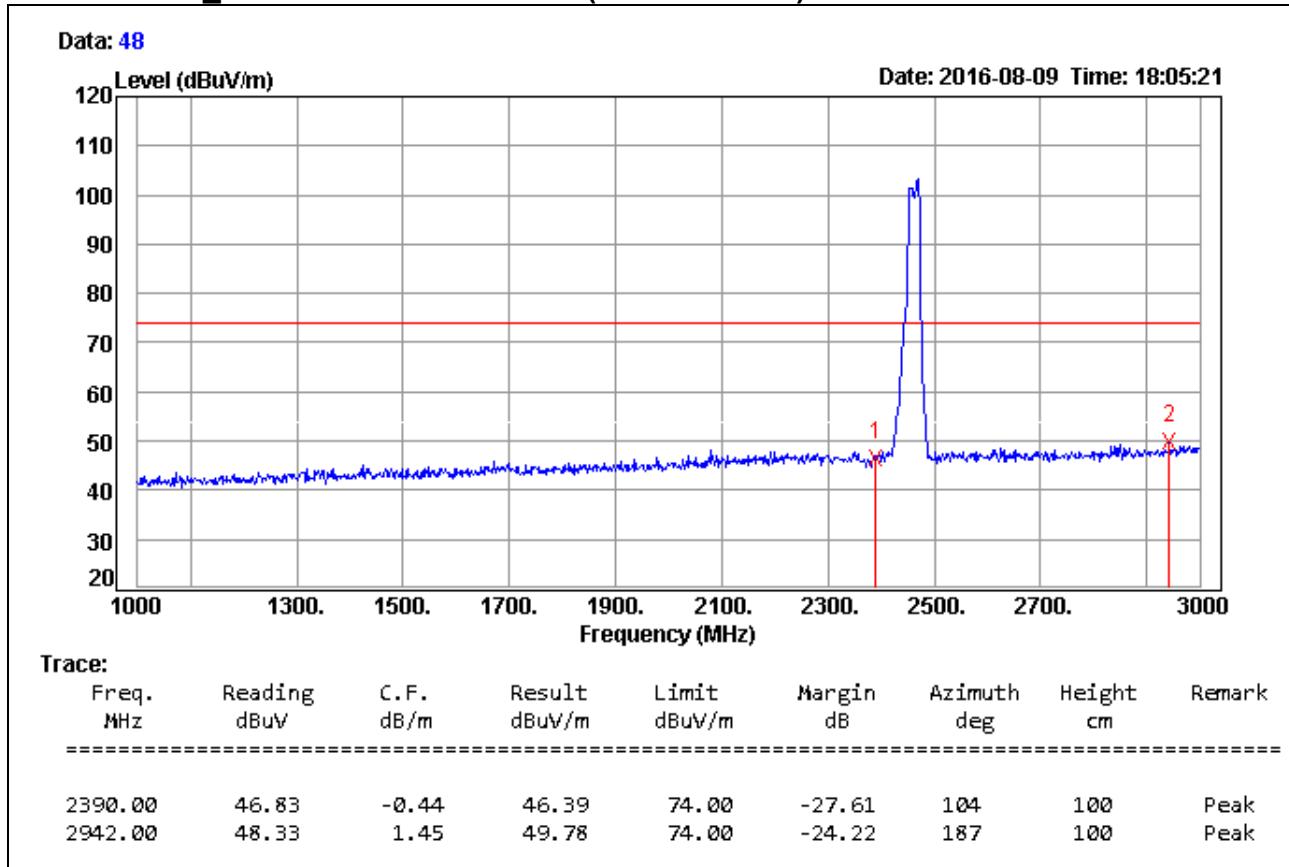
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH Middle / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

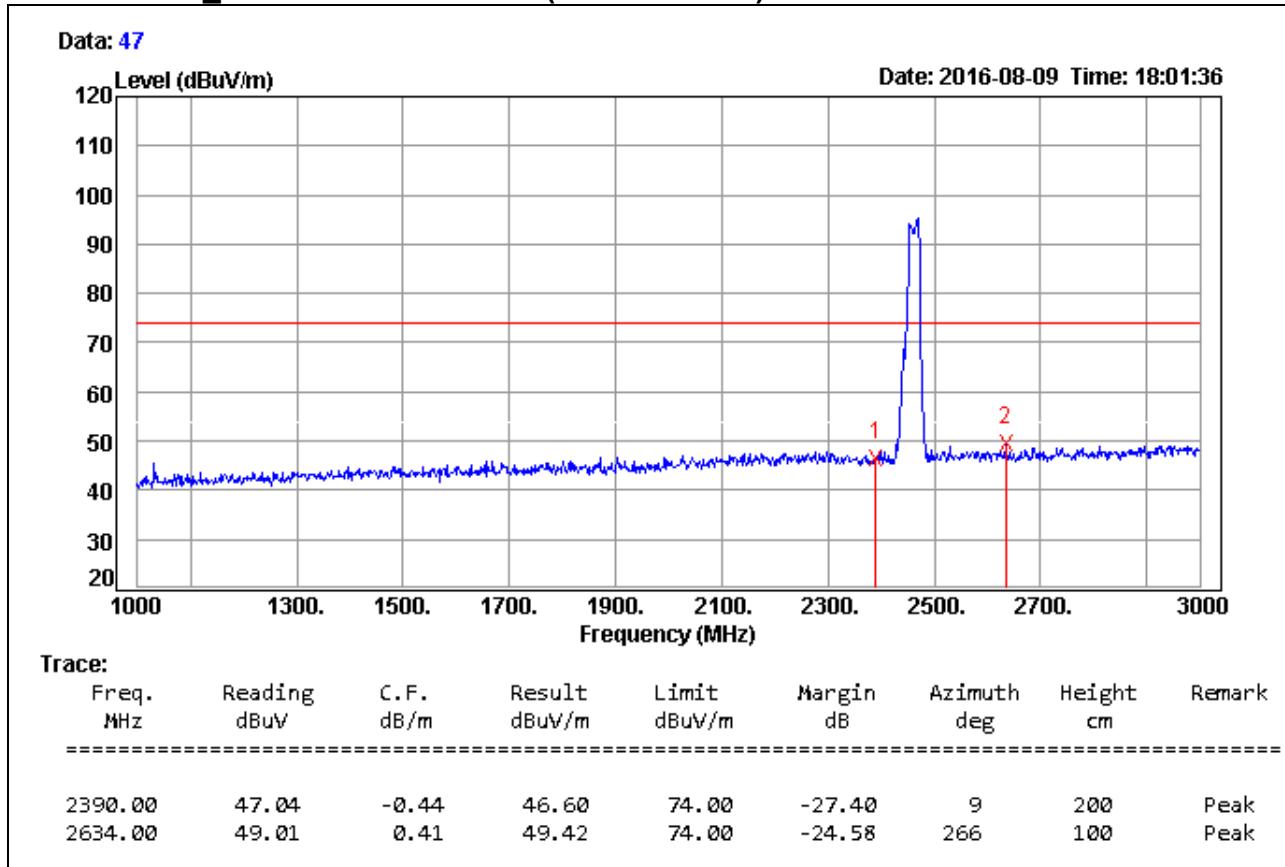
966Chamber_C at 3Meter / Horizontal (1GHz ~ 3GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

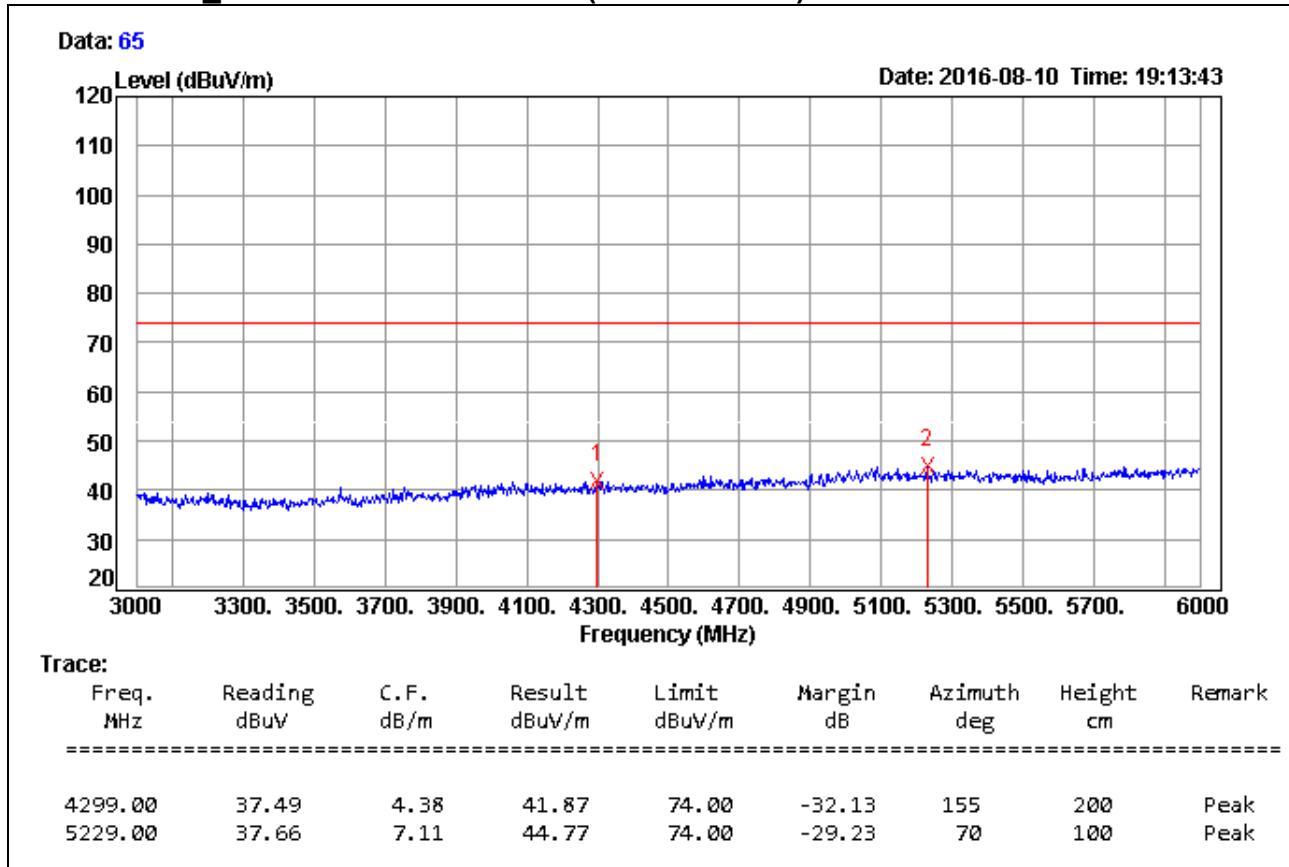
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/09
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (1GHz ~ 3GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

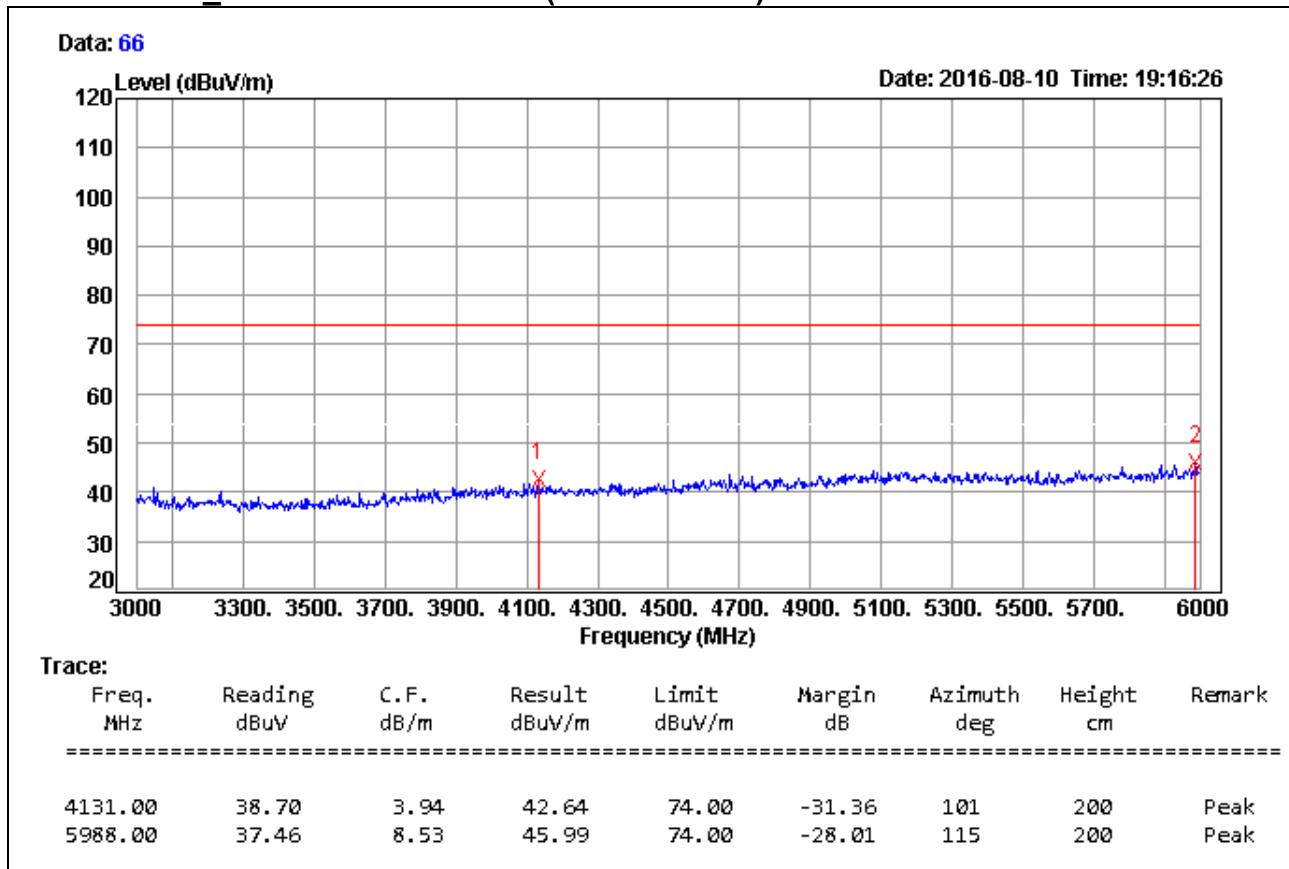
966Chamber_C at 3Meter / Horizontal (3GHz ~ 6GHz)



Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

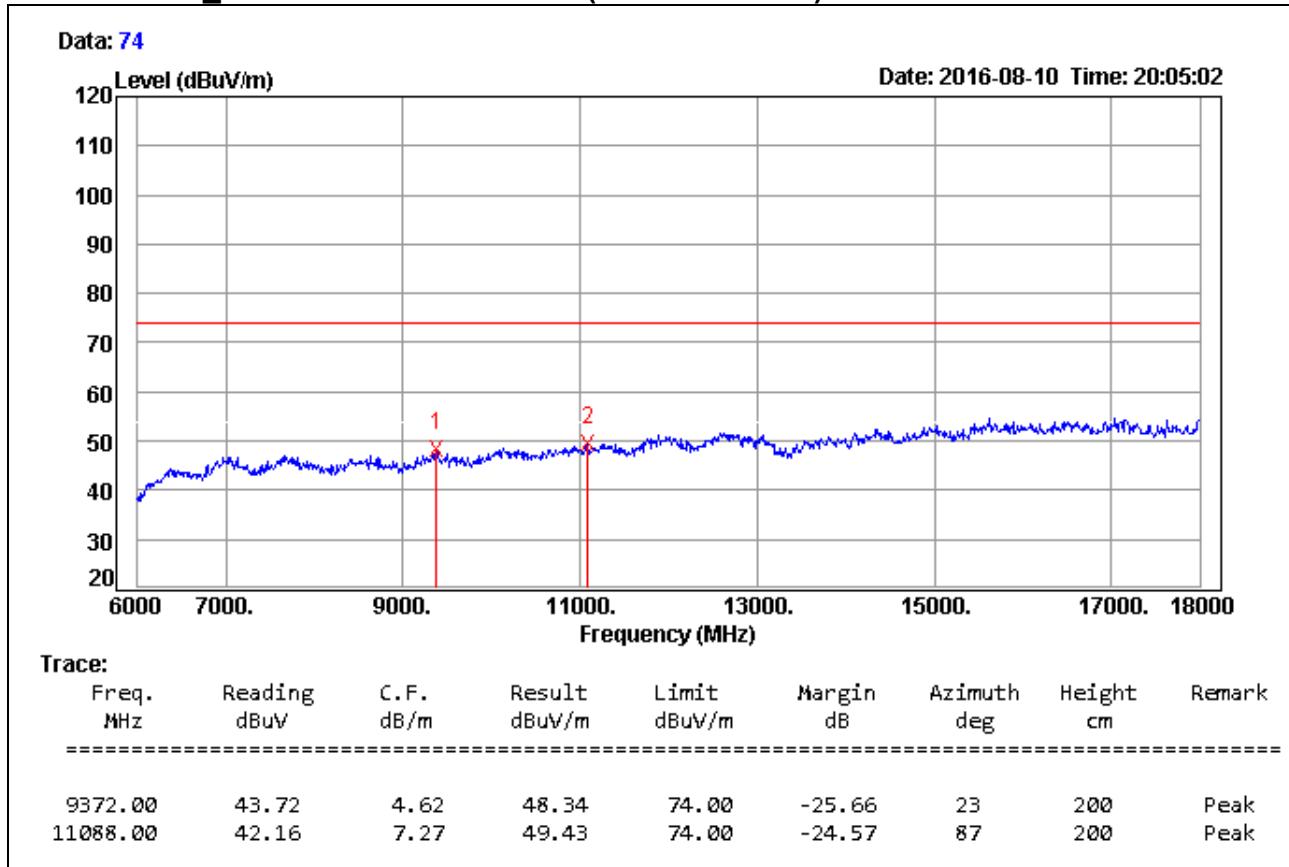
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (3GHz ~ 6GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

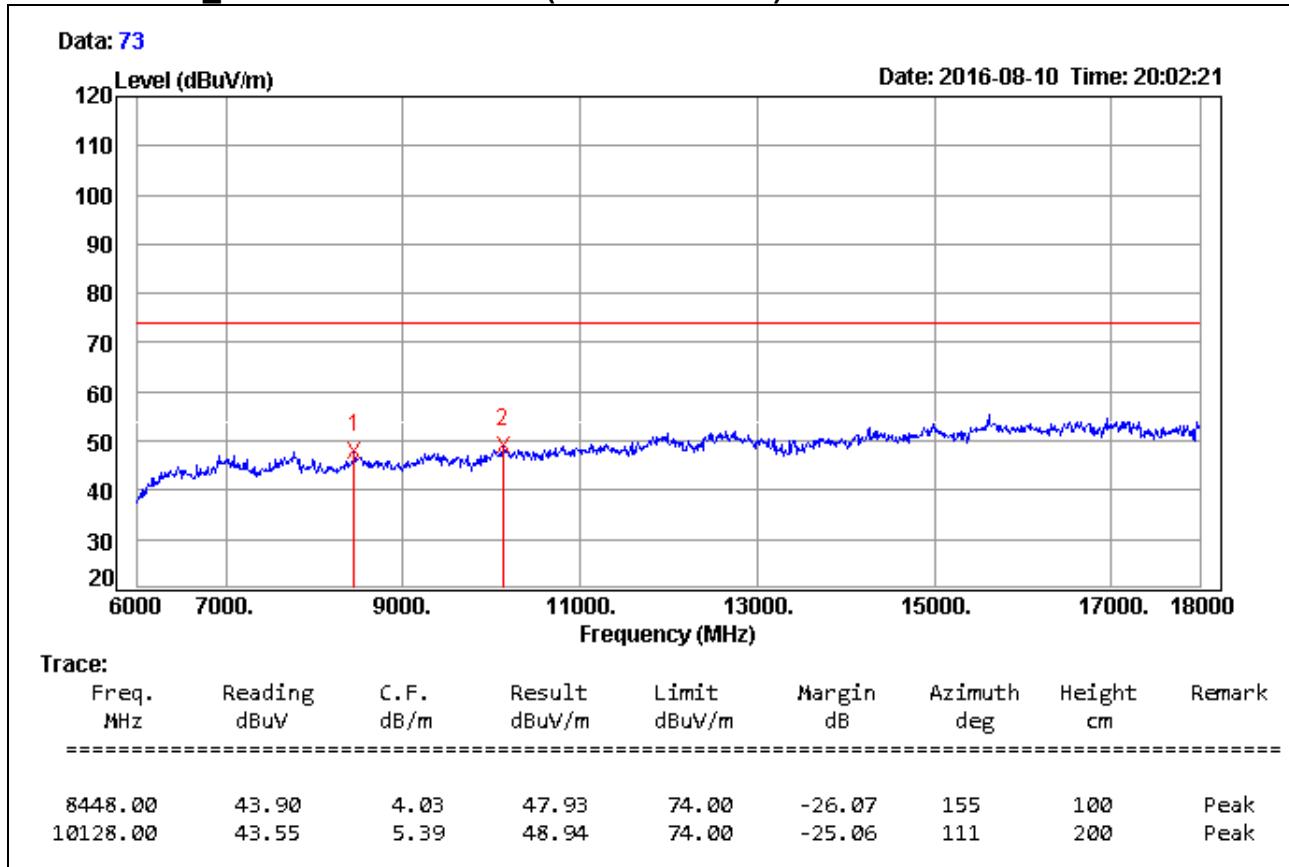
966Chamber_C at 3Meter / Horizontal (6GHz ~ 18GHz)



Remark:

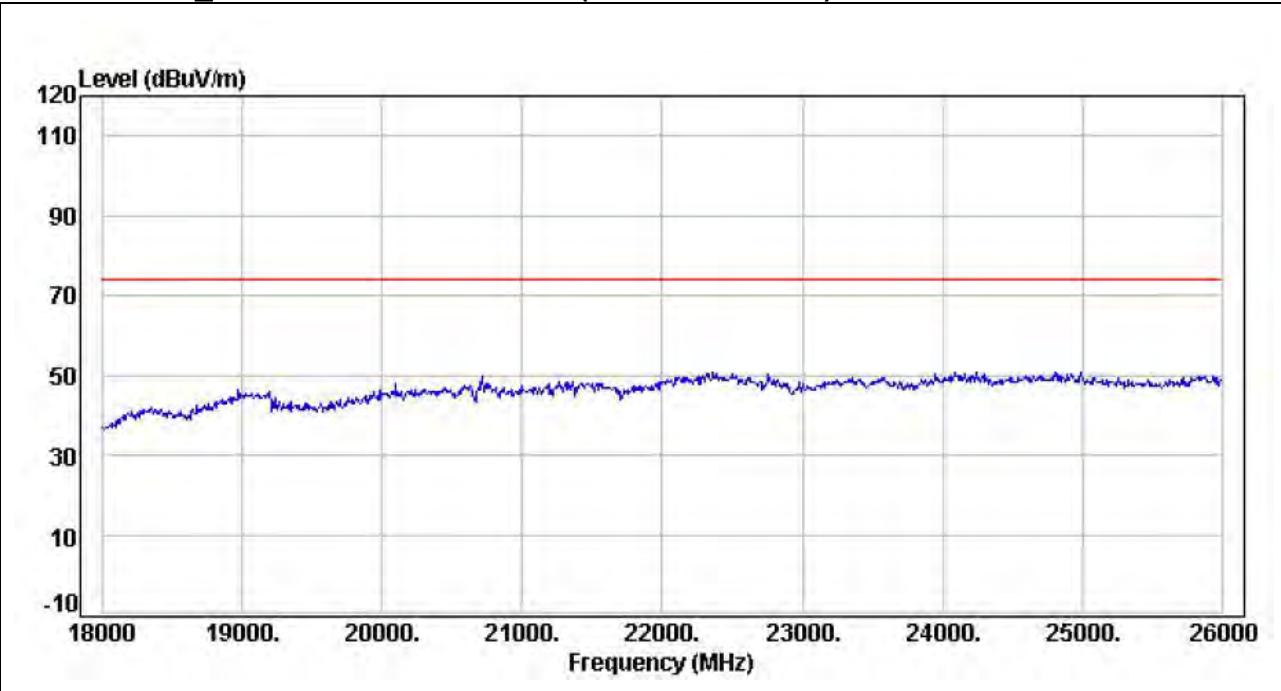
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/10
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Vertical (6GHz ~ 18GHz)**Remark:**

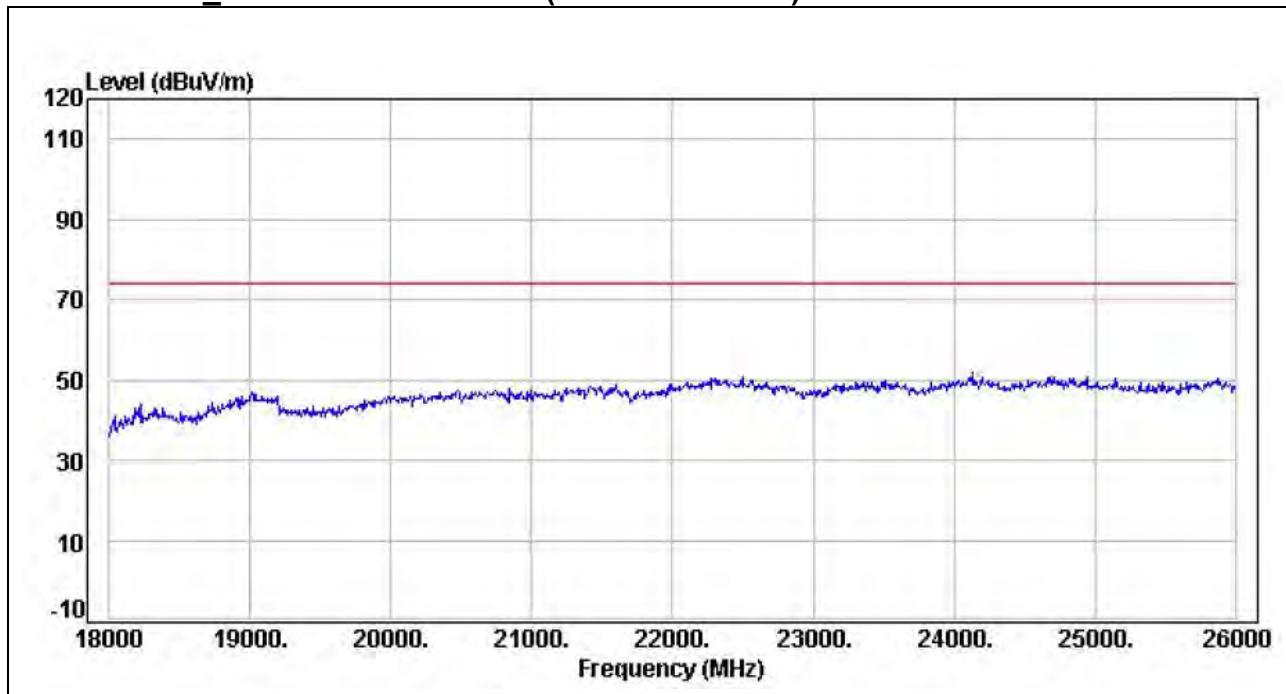
1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

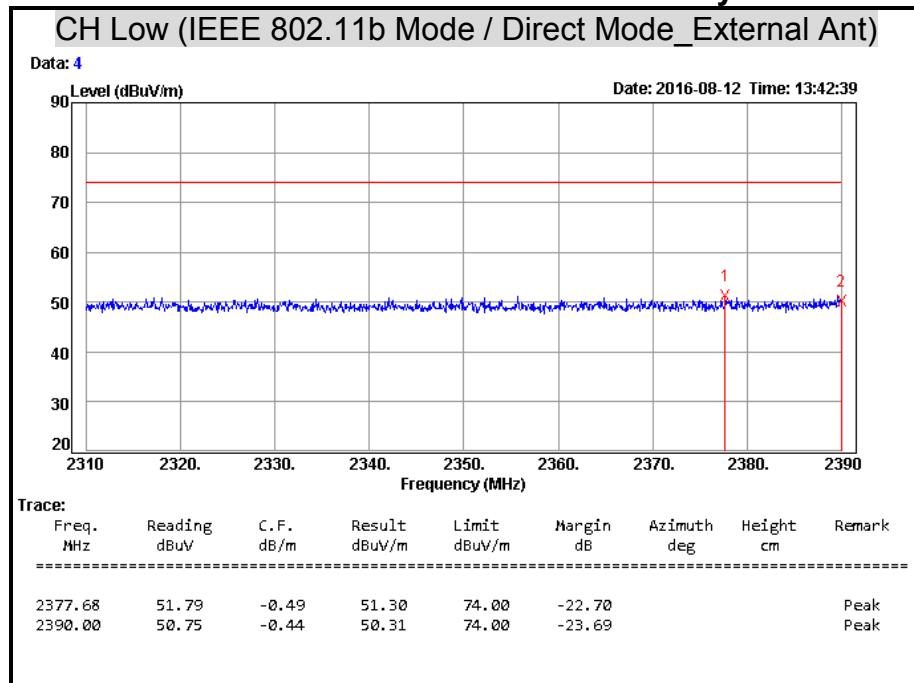
966Chamber_C at 3Meter / Horizontal (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	IEEE 802.11gn HT20 MCS0 Mode / TX / CH High / STA Mode_Internal Ant	Temp. & Humidity	28°C, 52%

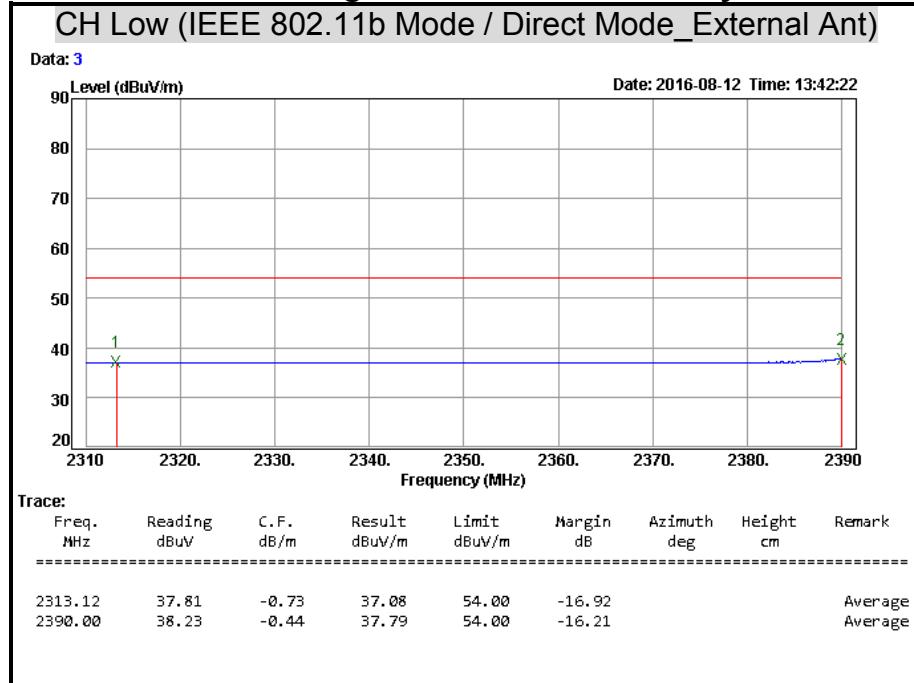
966Chamber_C at 3Meter / Vertical (18GHz ~ 26GHz)**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Restricted Band Edges**Detector mode: Peak****Polarity: Horizontal****Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal****Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

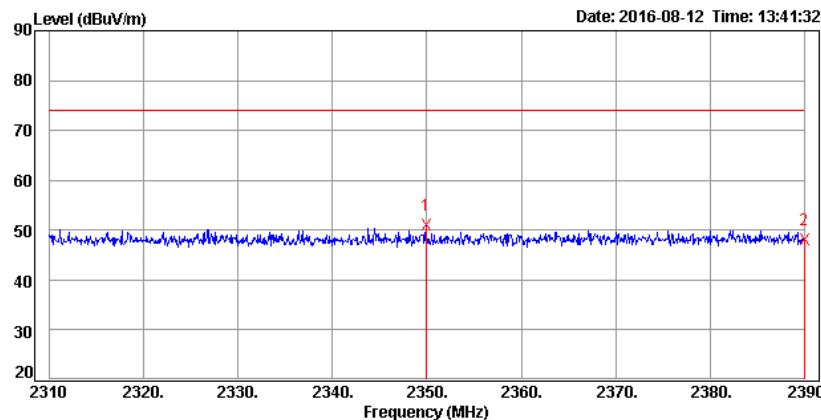
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11b Mode / Direct Mode _External Ant)

Data: 2

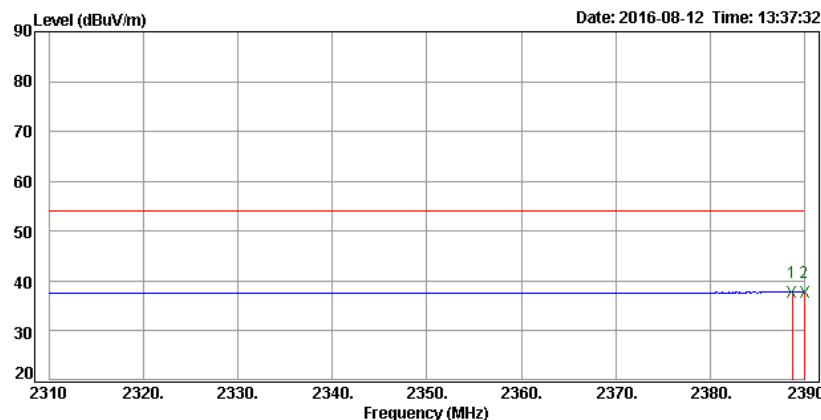
*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark Peak = Result(PK) - Limit(PK)*

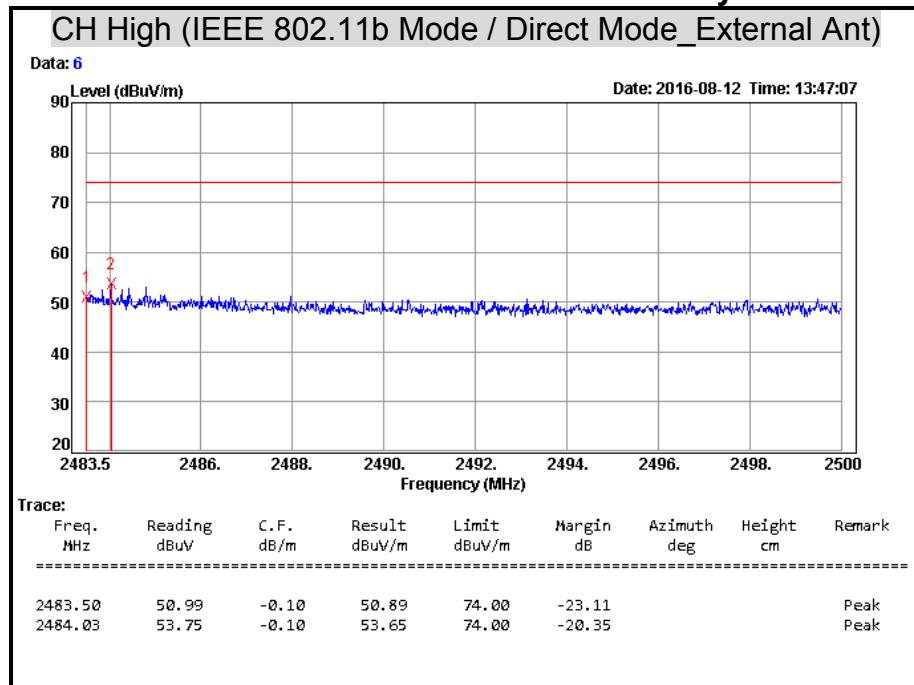
Detector mode: Average

Polarity: Vertical

CH Low (IEEE 802.11b Mode / Direct Mode _External Ant)

Data: 1

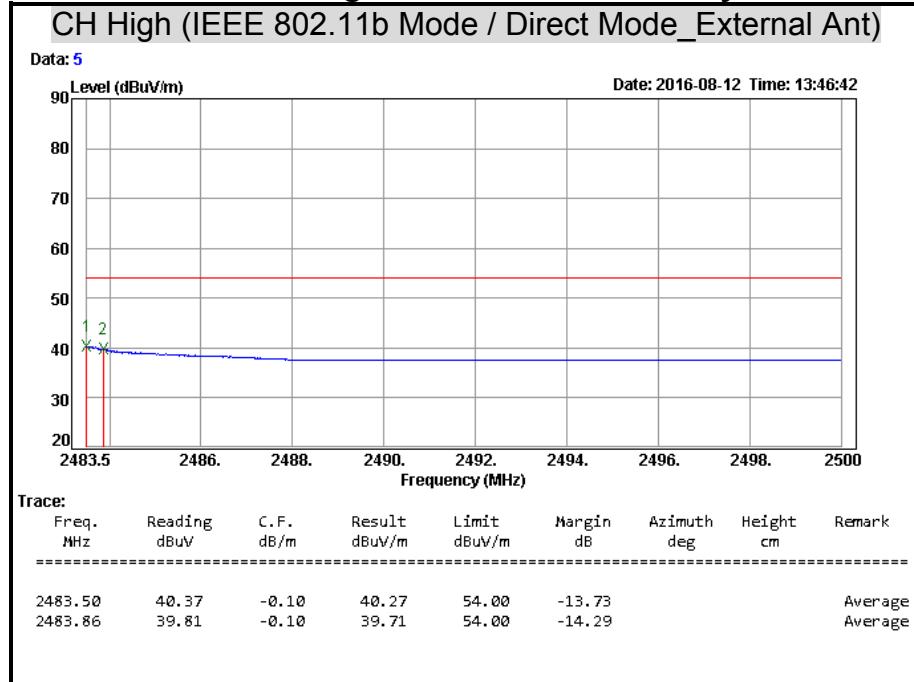
*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark AVG = Result(AV) - Limit(AV)*

Detector mode: Peak**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

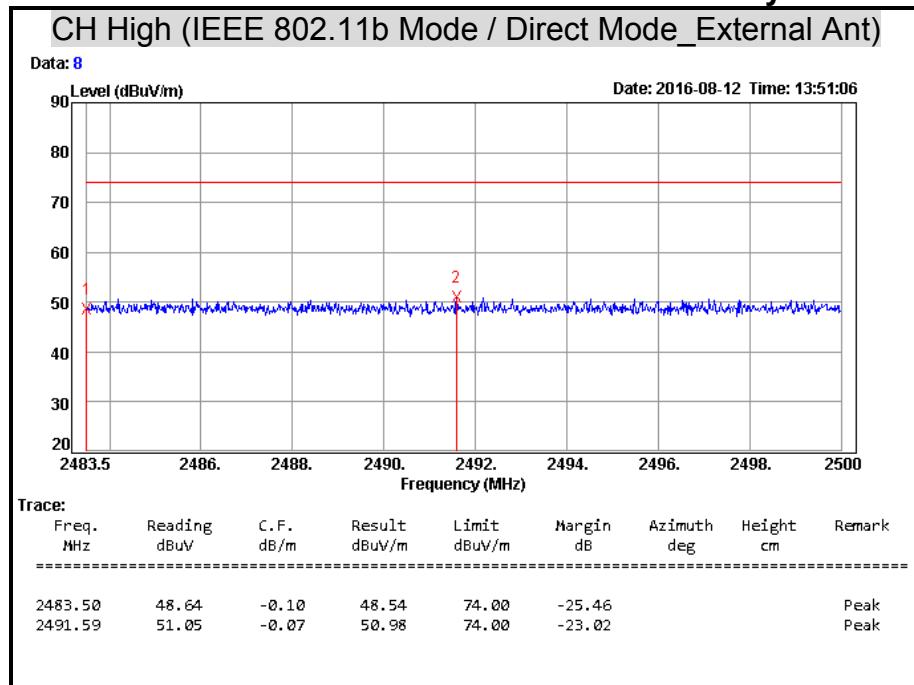
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

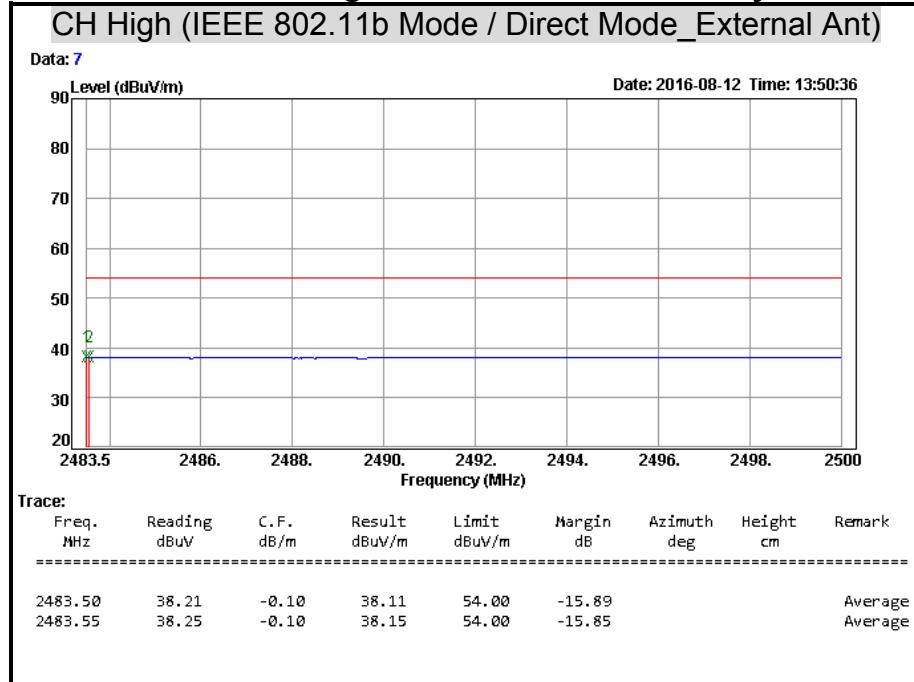
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

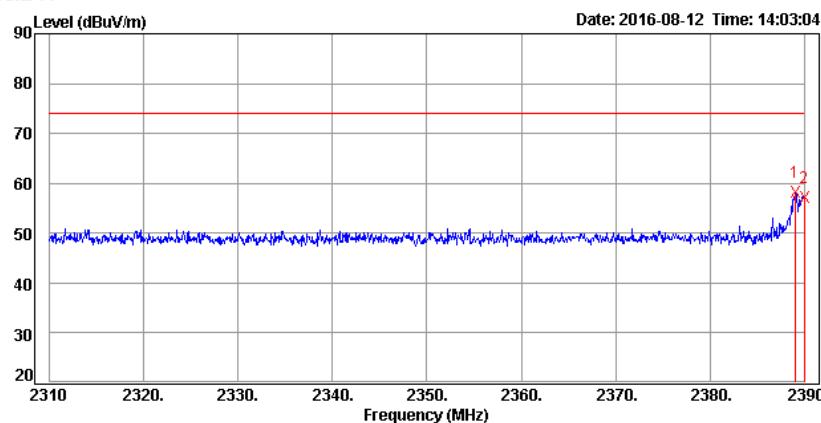
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH Low (IEEE 802.11g Mode / Direct Mode _External Ant)

Data: 14

**Remark:** Result = Reading + Correction Factor

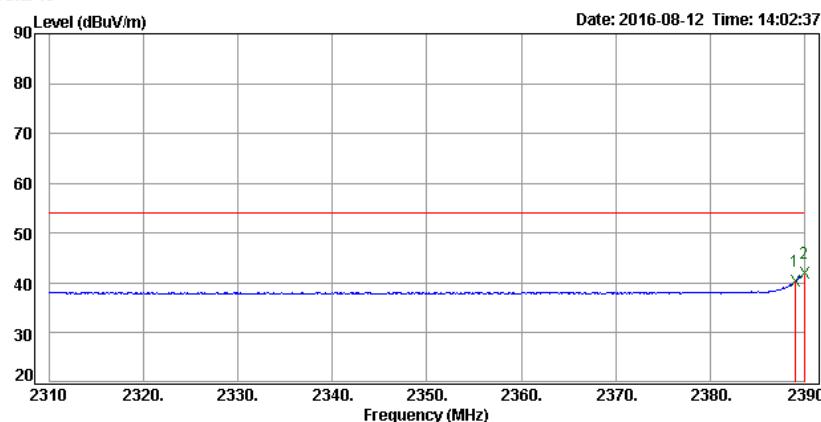
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH Low (IEEE 802.11g Mode / Direct Mode _External Ant)

Data: 13

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

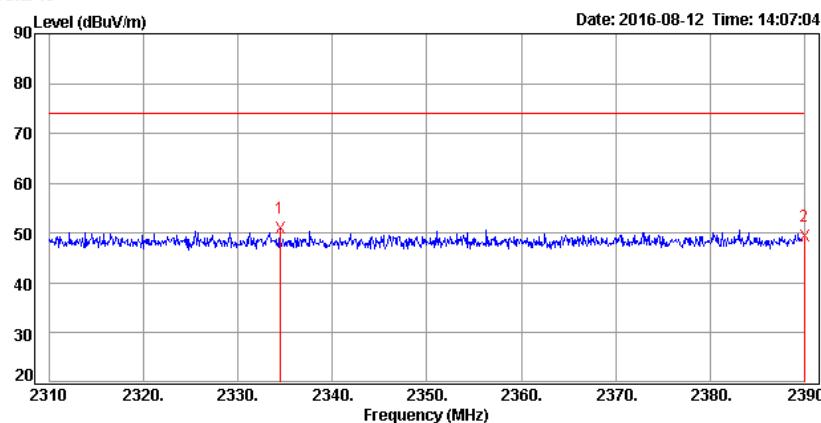
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11g Mode / Direct Mode _External Ant)

Data: 16

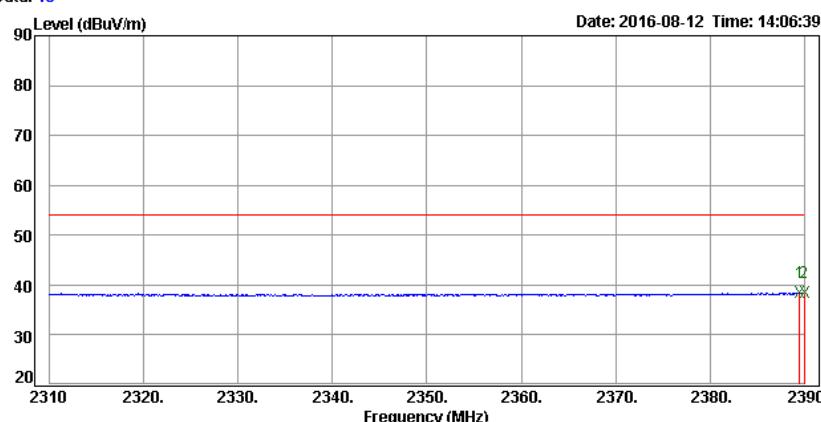
*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark Peak = Result(PK) - Limit(PK)*

Detector mode: Average

Polarity: Vertical

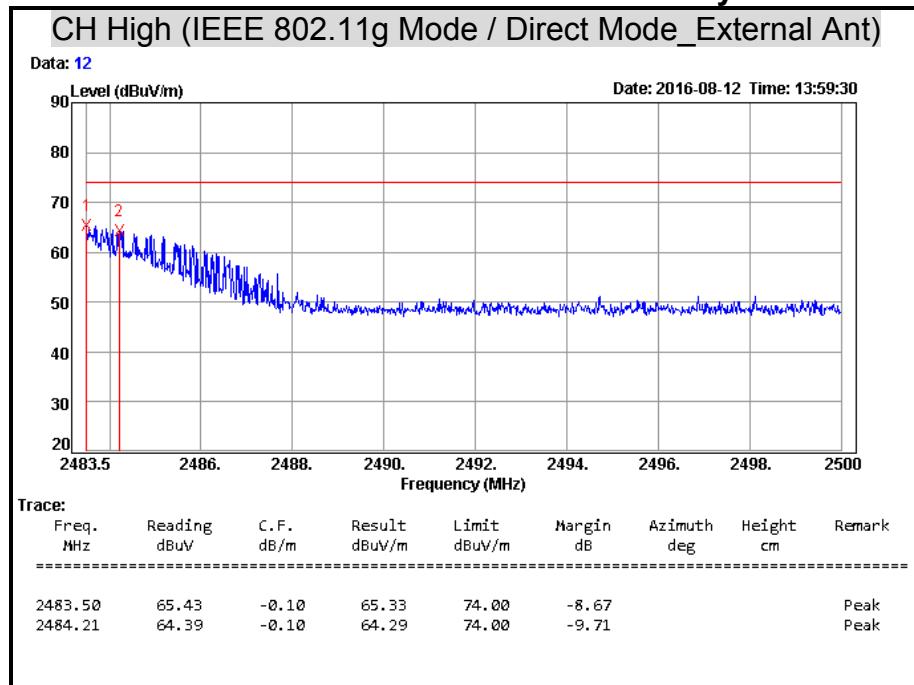
CH Low (IEEE 802.11g Mode / Direct Mode _External Ant)

Data: 15

*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark AVG = Result(AV) - Limit(AV)*

Detector mode: Peak

Polarity: Horizontal



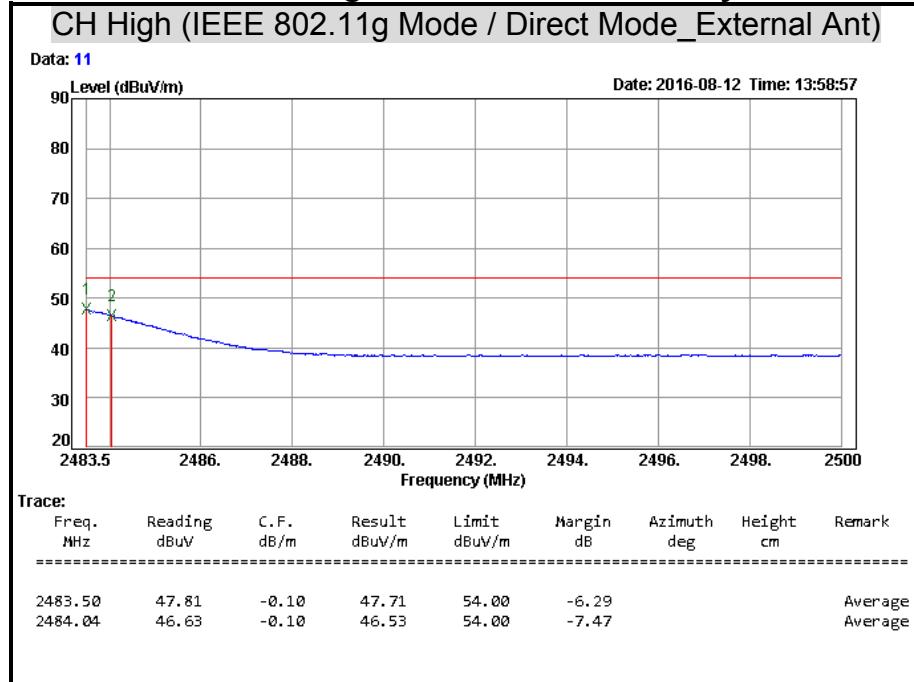
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

Polarity: Horizontal



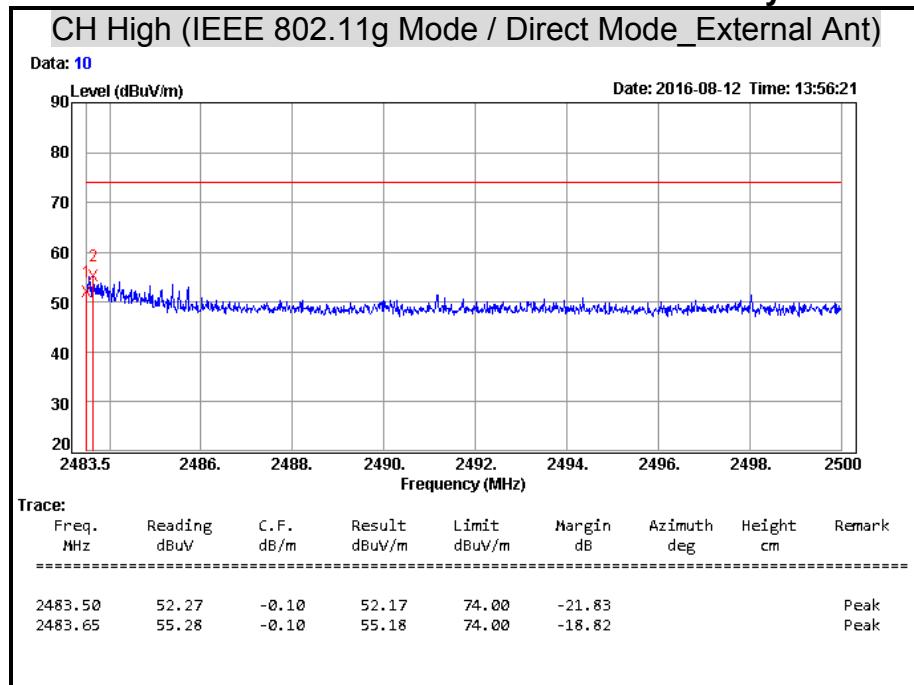
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Vertical



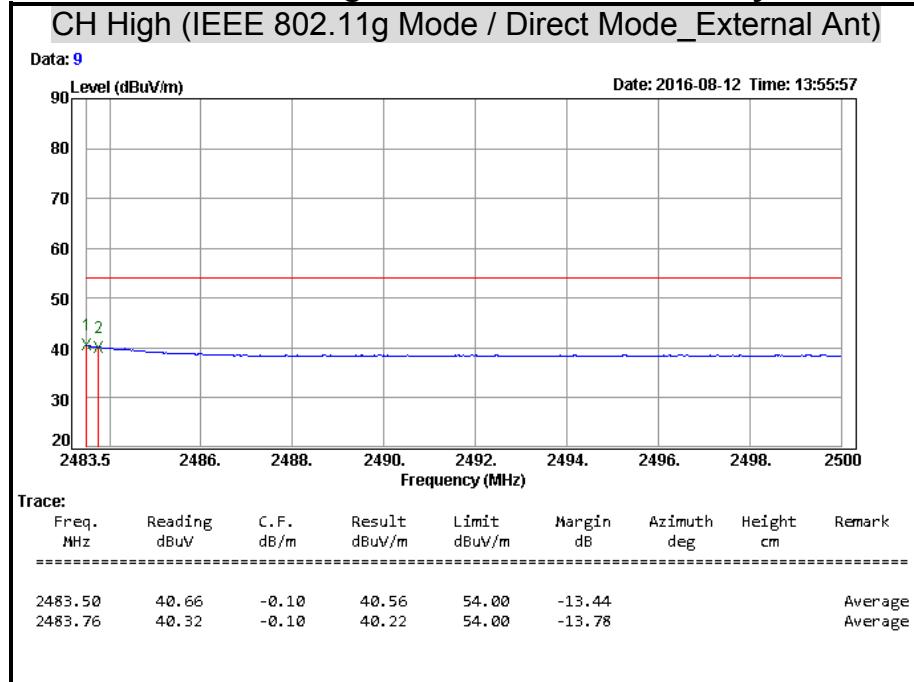
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

Polarity: Vertical



Remark: Result = Reading + Correction Factor

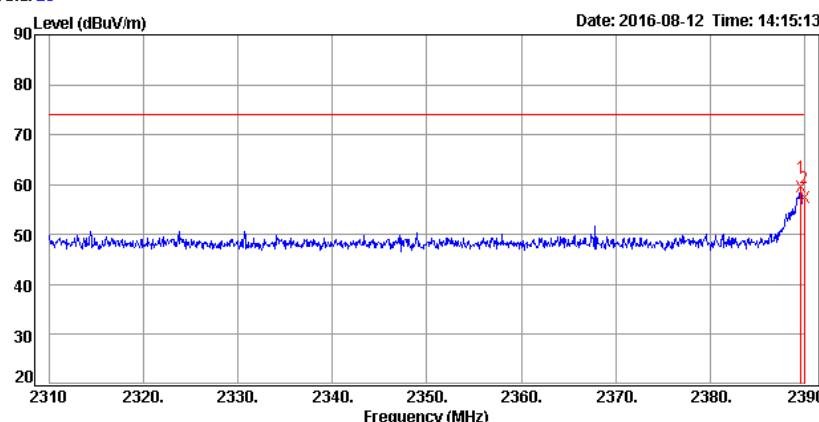
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 20

**Remark:** Result = Reading + Correction Factor

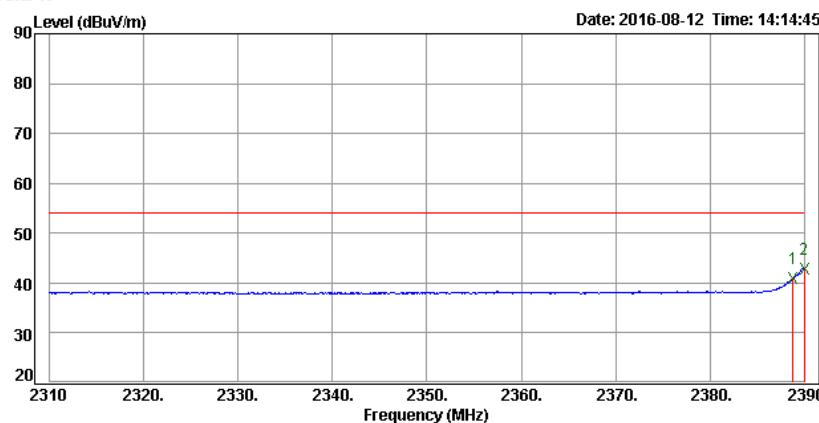
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 19

**Remark:** Result = Reading + Correction Factor

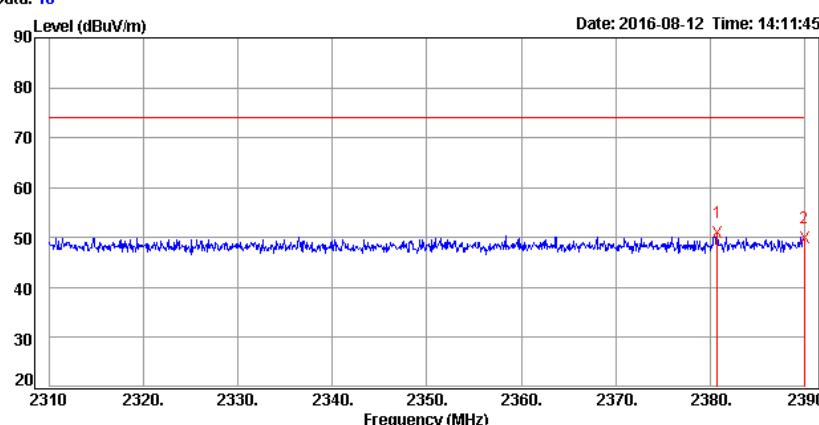
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 18

**Remark:** Result = Reading + Correction Factor

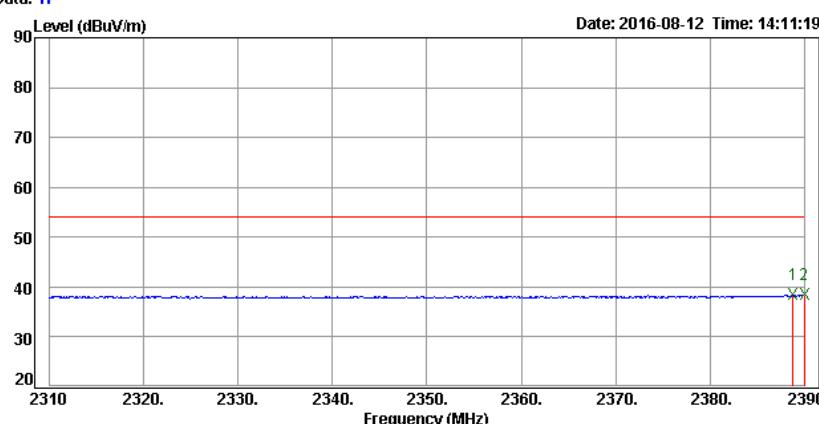
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 17

**Remark:** Result = Reading + Correction Factor

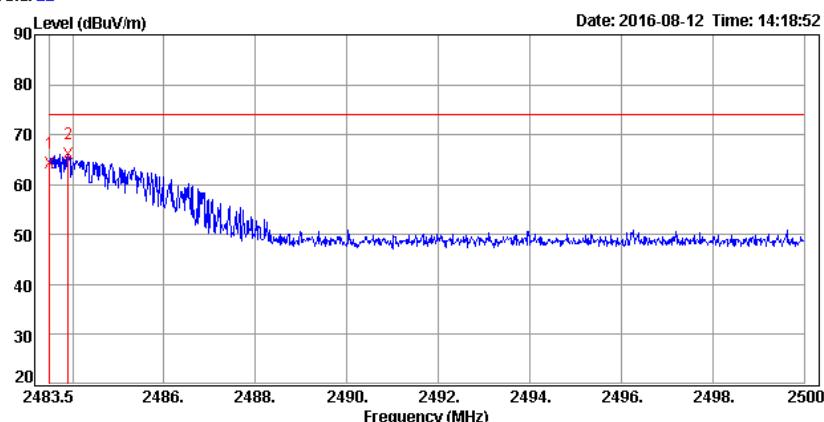
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 22

**Remark:** Result = Reading + Correction Factor

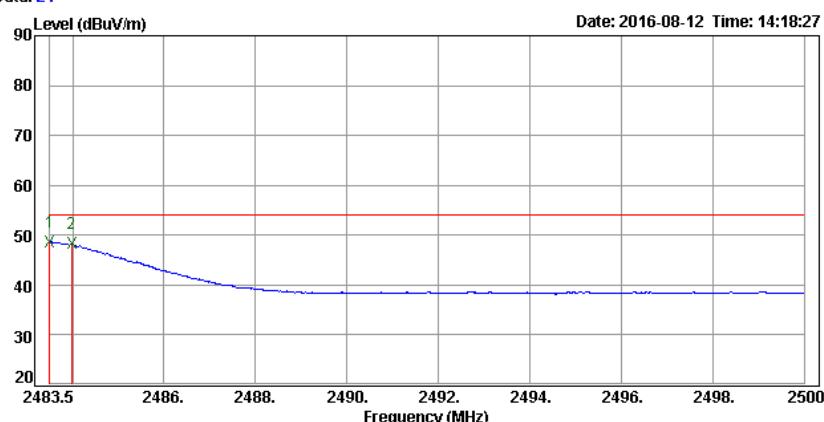
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 21

**Remark:** Result = Reading + Correction Factor

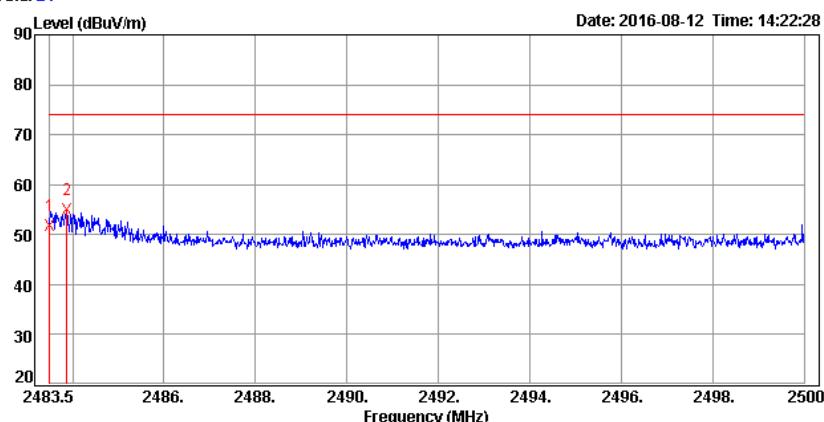
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH High (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 24

**Remark:** Result = Reading + Correction Factor

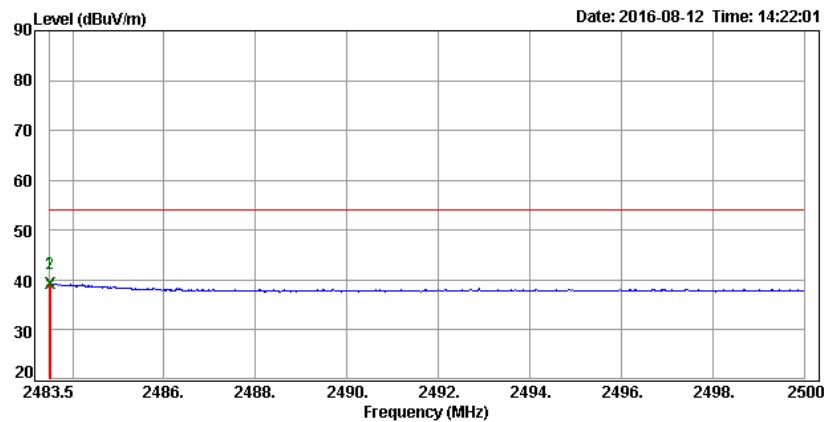
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

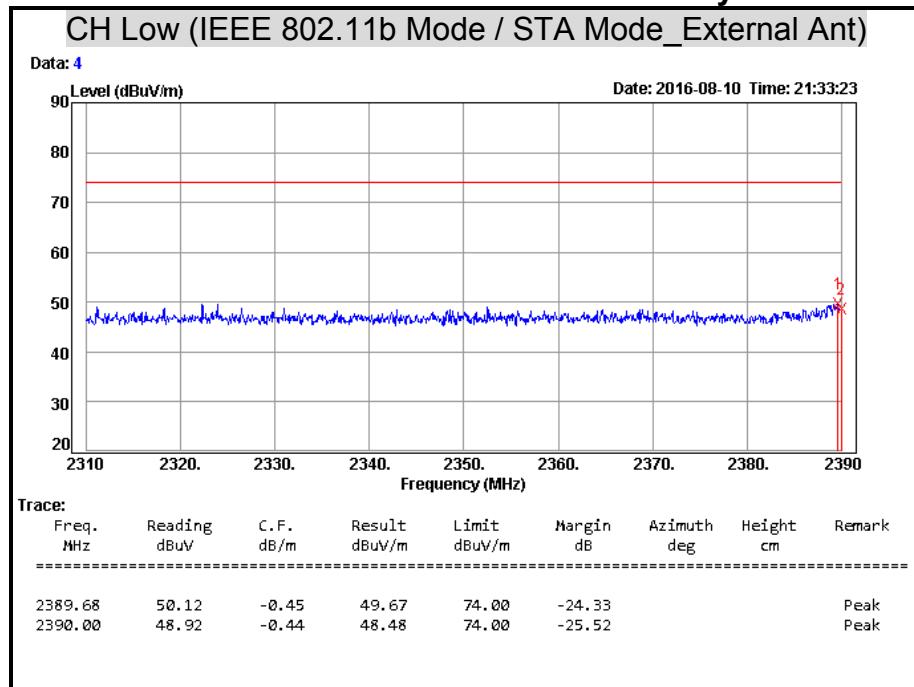
CH High (IEEE 802.11gn HT20 MCS0 Mode / Direct Mode_External Ant)

Data: 23

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

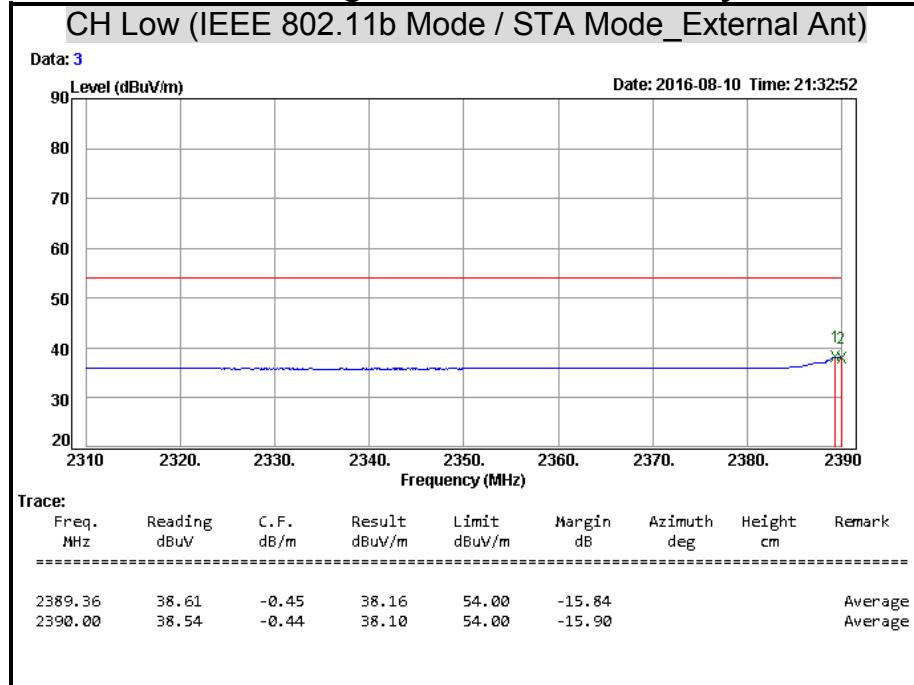
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

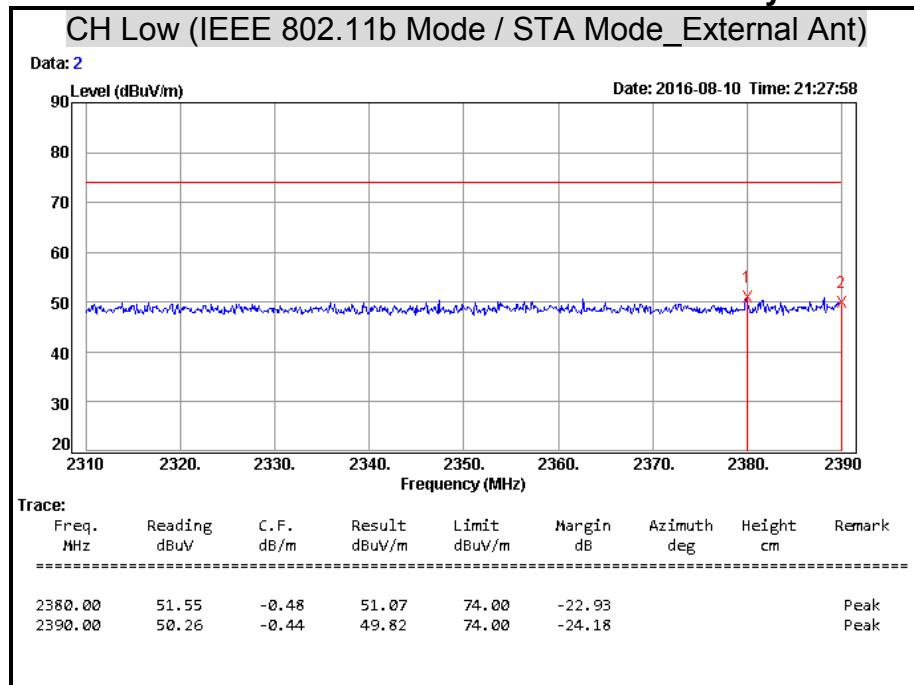
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

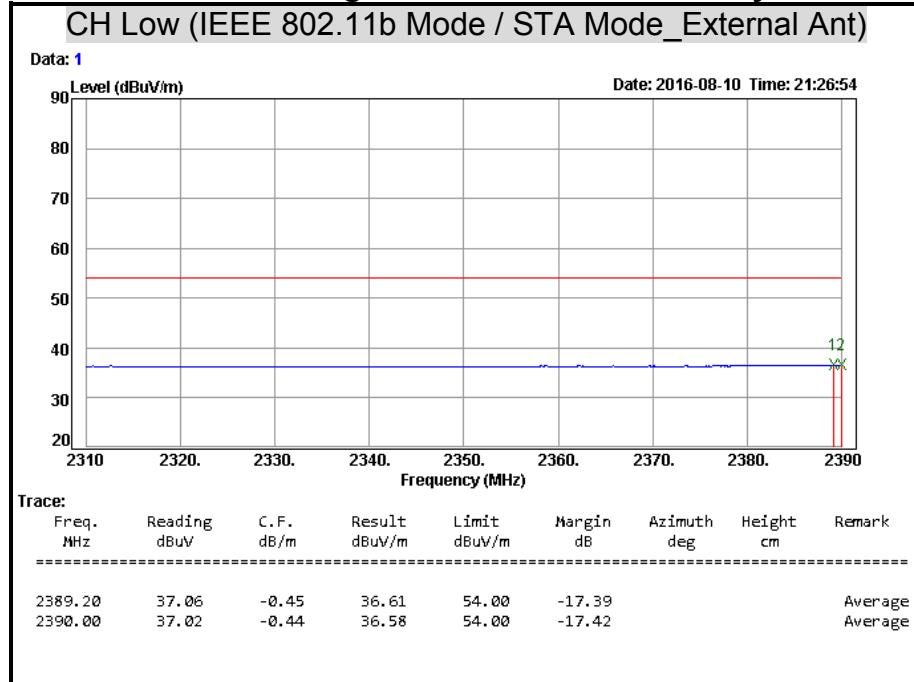
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

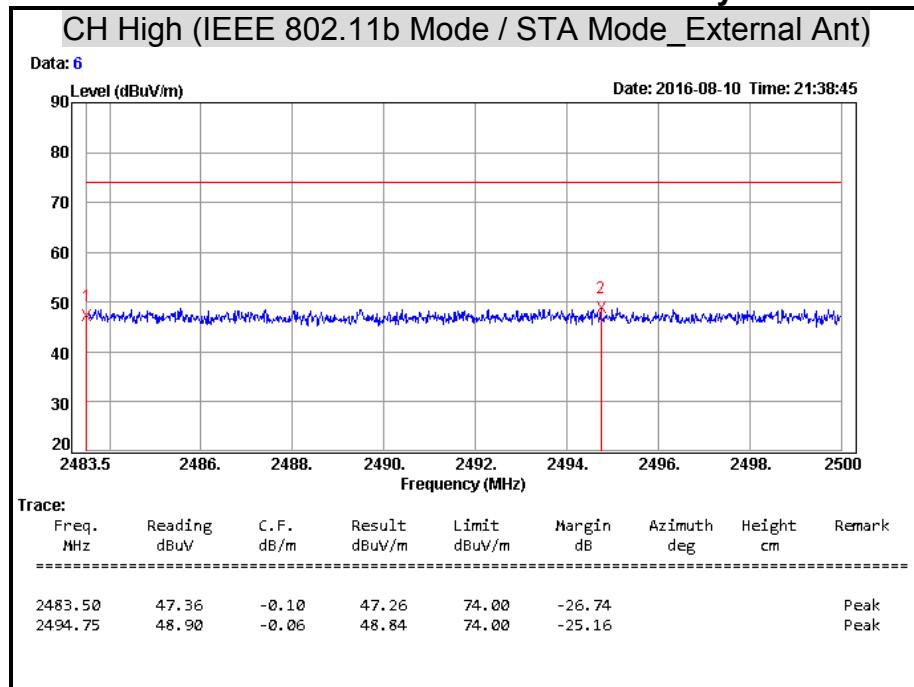
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

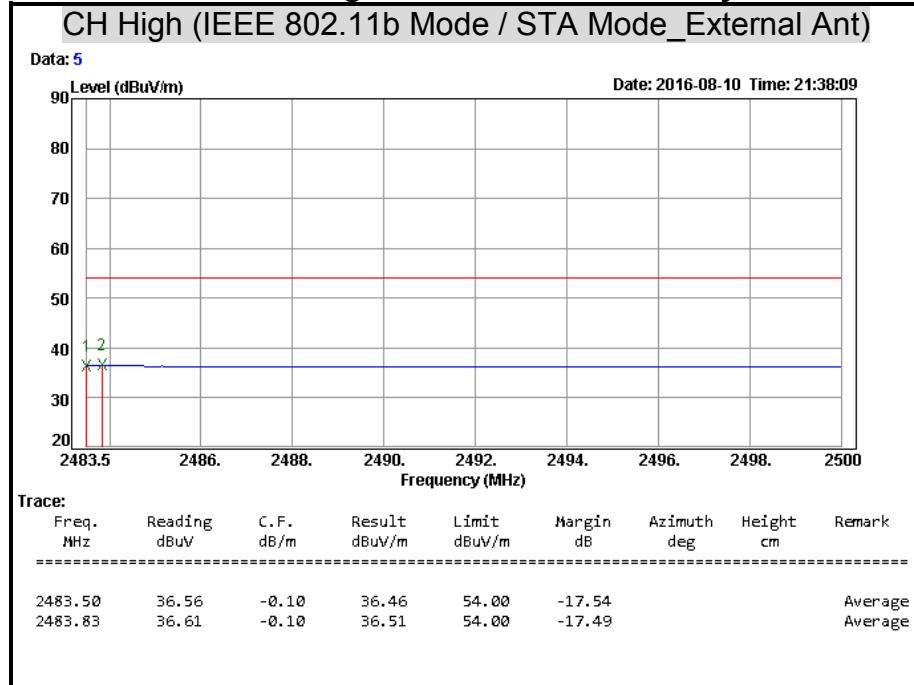
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

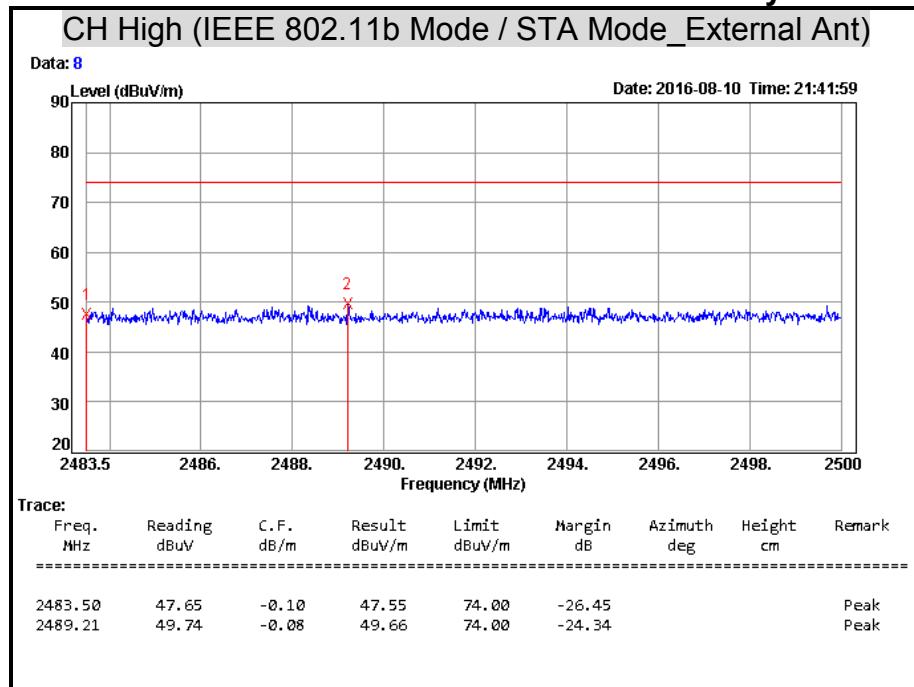
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

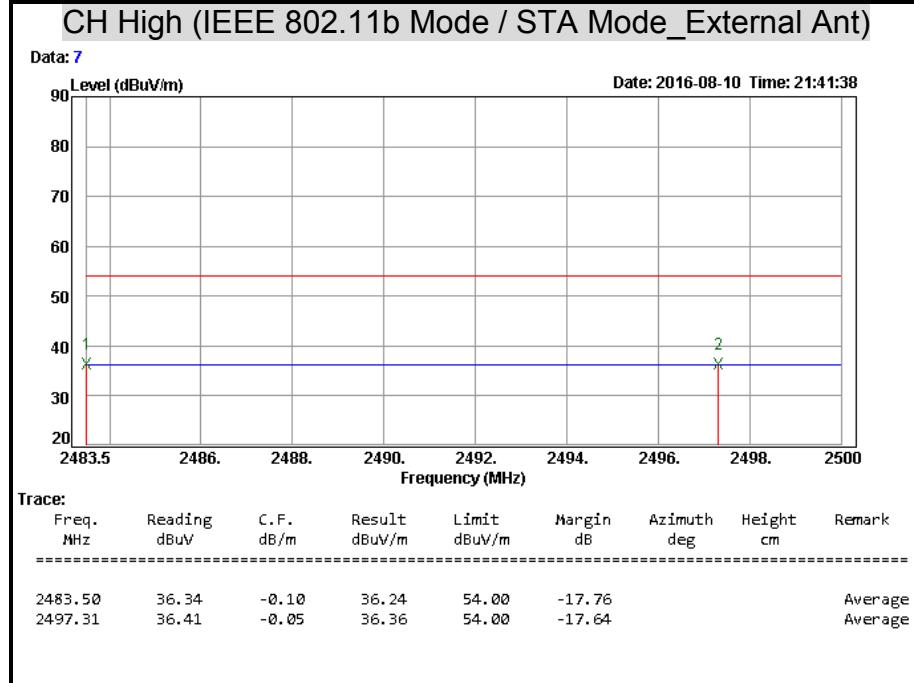
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

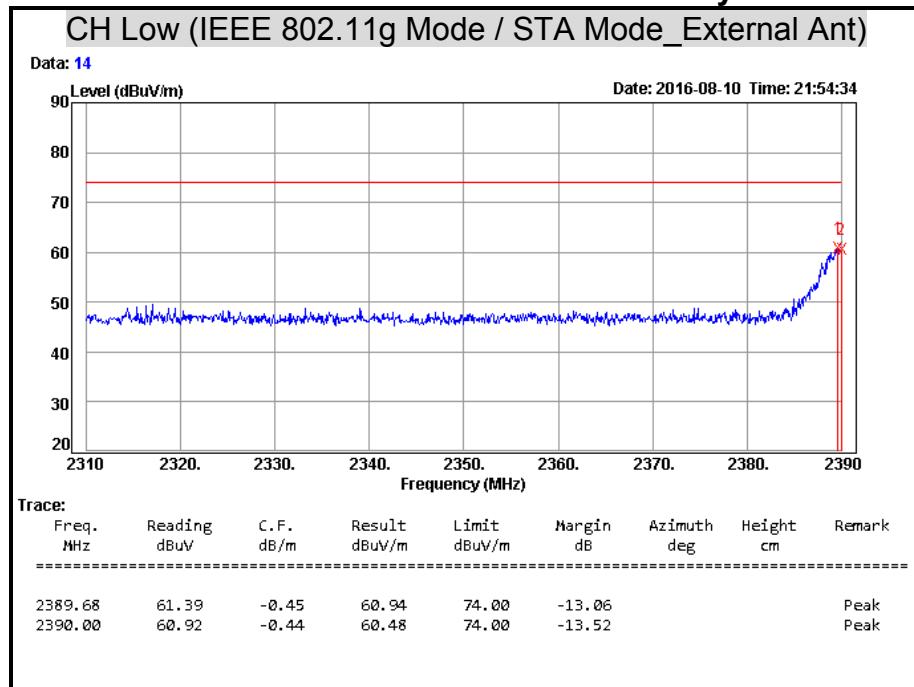
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Horizontal



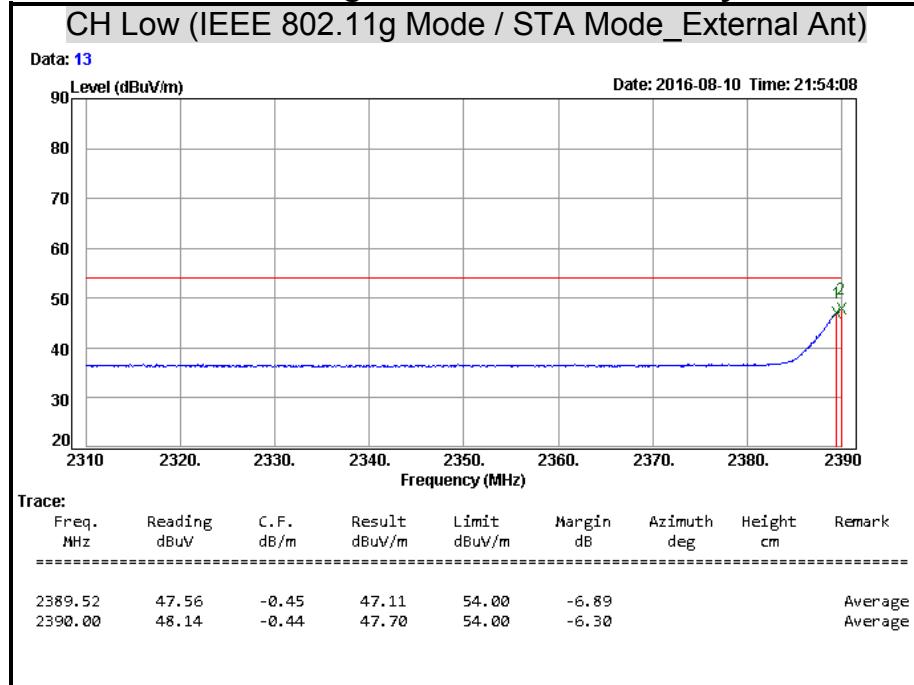
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

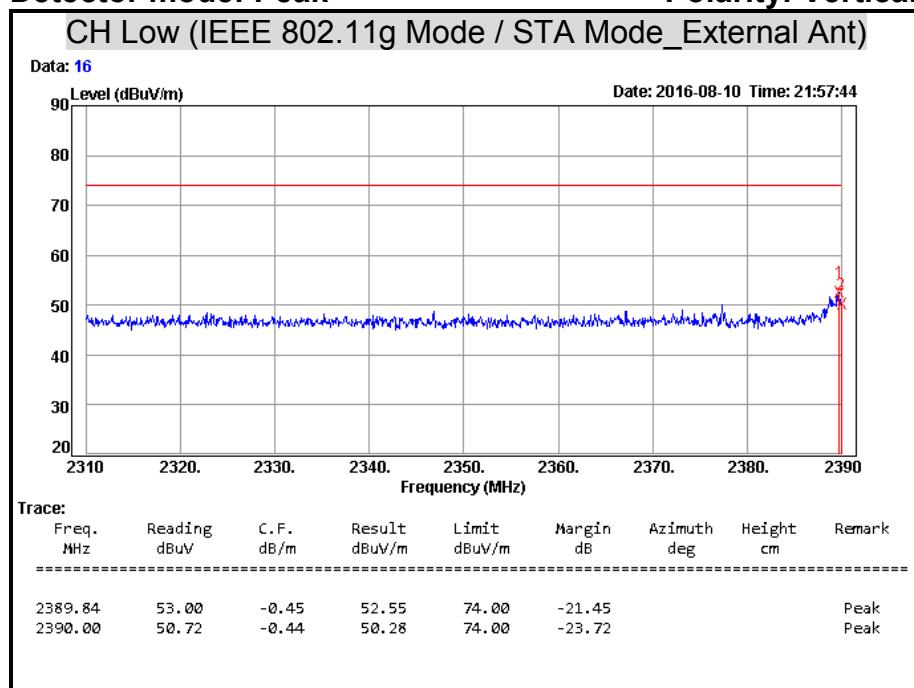
Polarity: Horizontal



Remark: Result = Reading + Correction Factor

Margin = Result - Limit

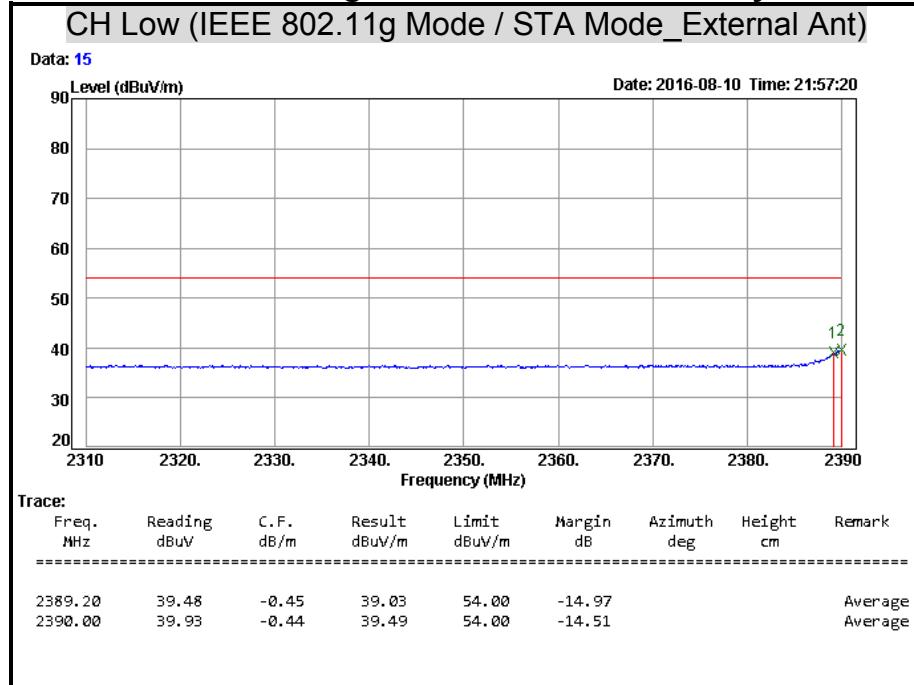
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

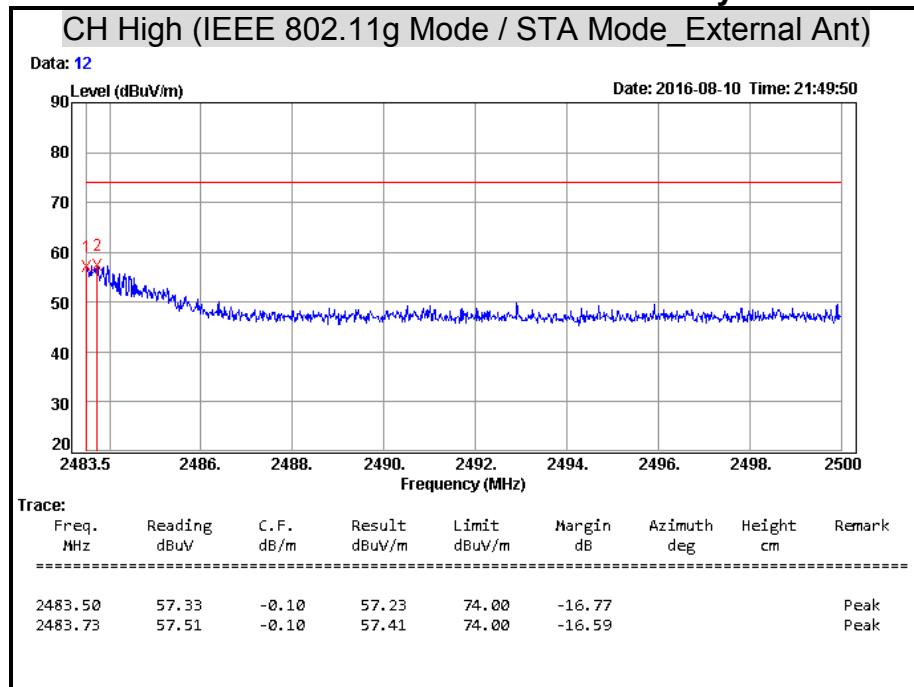
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Horizontal



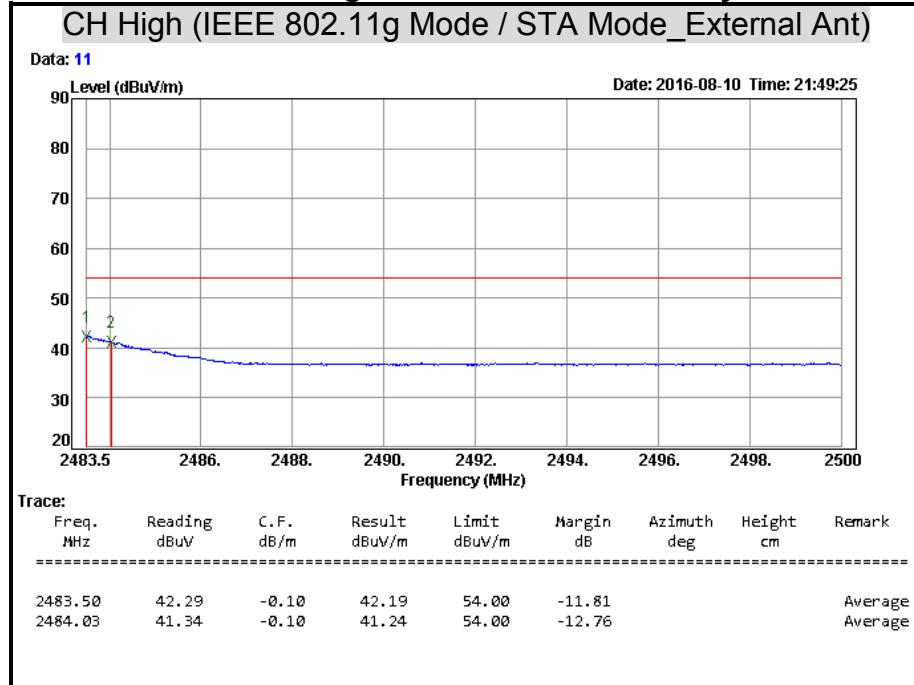
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

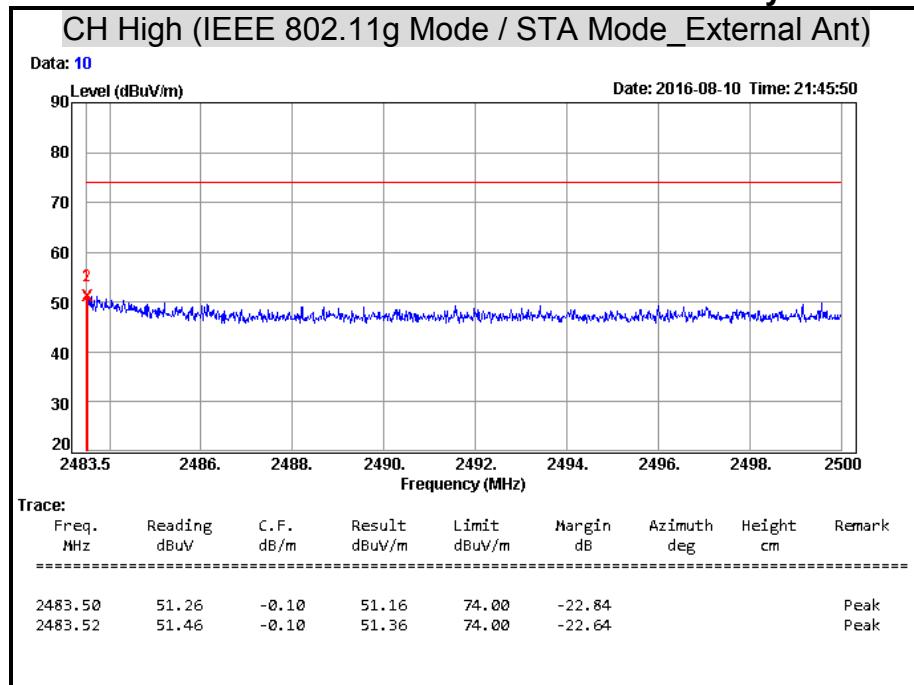
Polarity: Horizontal



Remark: Result = Reading + Correction Factor

Margin = Result - Limit

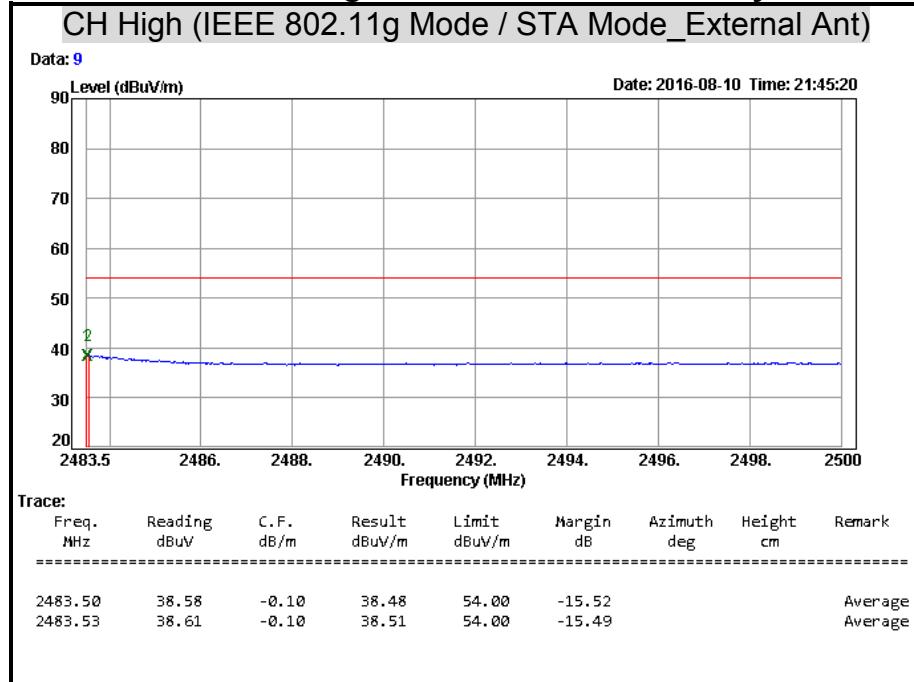
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result – Limit

Remark Peak = Result(PK) – Limit(PK)

Detector mode: Average**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

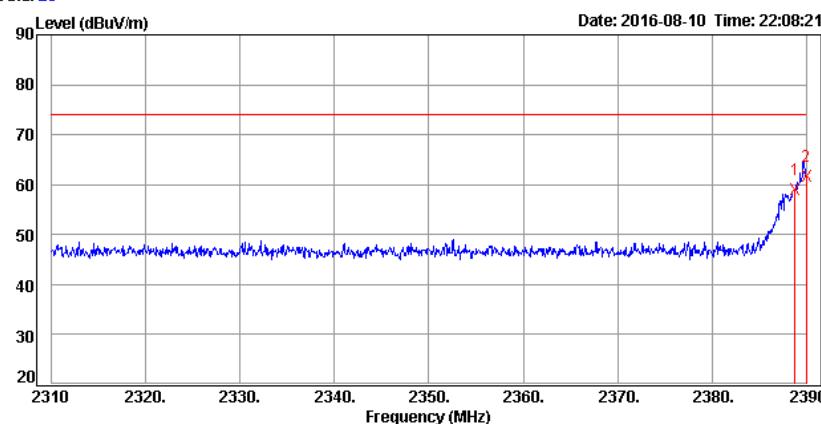
Margin = Result – Limit

Remark AVG = Result(AV) – Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 20



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
2388.80	59.49	-0.45	59.04	74.00	-14.96			Peak
2390.00	62.19	-0.44	61.75	74.00	-12.25			Peak

Remark: Result = Reading + Correction Factor

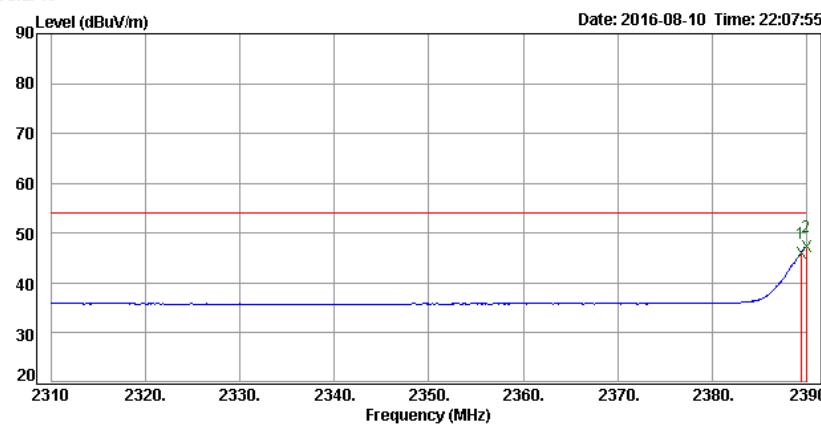
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 19



Trace:

Freq. MHz	Reading dB _{UV}	C.F. dB/m	Result dB _{UV} /m	Limit dB _{UV} /m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
2389.44	46.41	-0.45	45.96	54.00	-8.04			Average
2390.00	47.70	-0.44	47.26	54.00	-6.74			Average

Remark: Result = Reading + Correction Factor

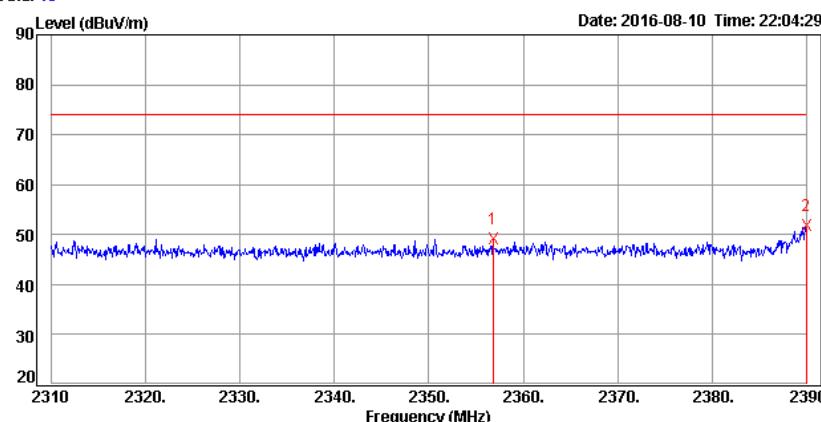
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 18

**Remark:** Result = Reading + Correction Factor

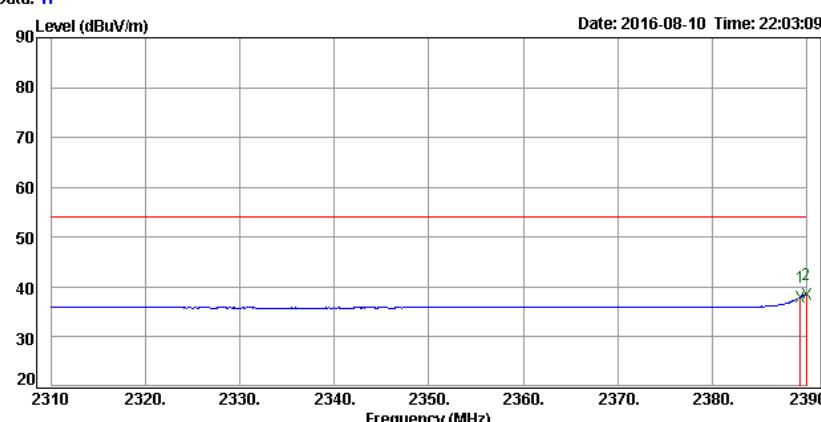
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 17

**Remark:** Result = Reading + Correction Factor

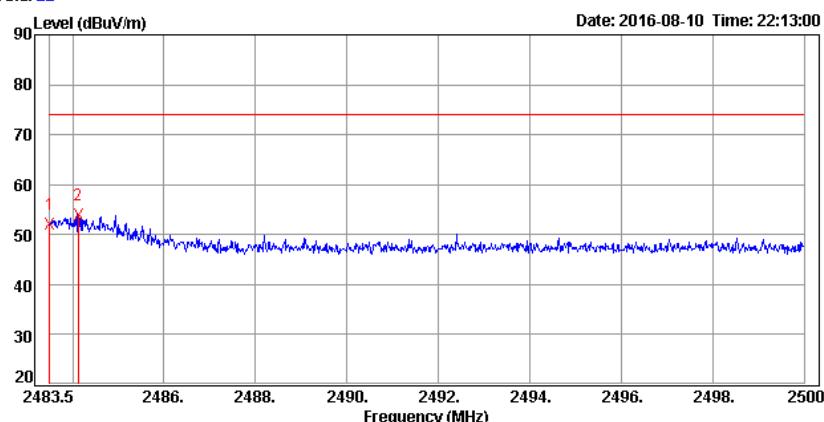
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 22

**Remark:** Result = Reading + Correction Factor

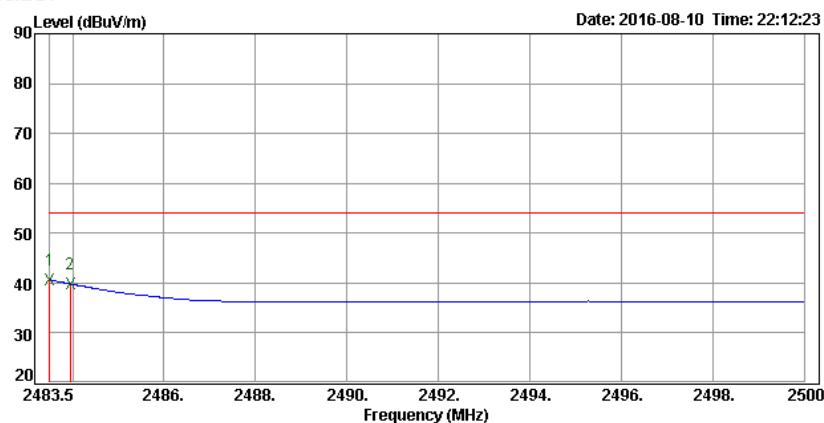
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 21

**Remark:** Result = Reading + Correction Factor

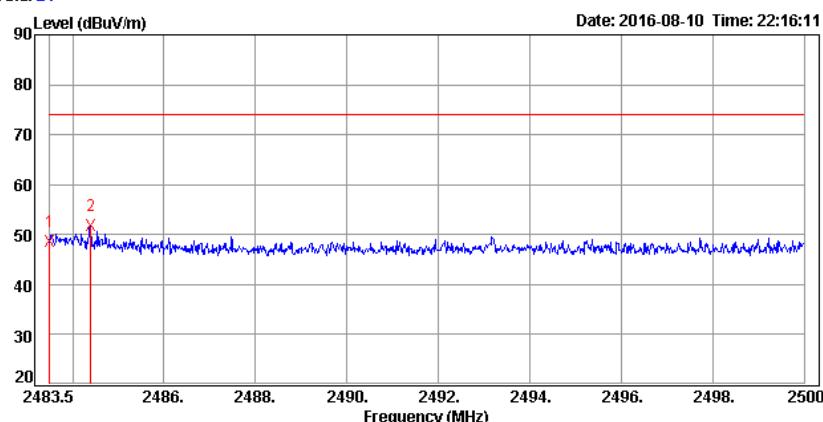
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 24

**Remark:** Result = Reading + Correction Factor

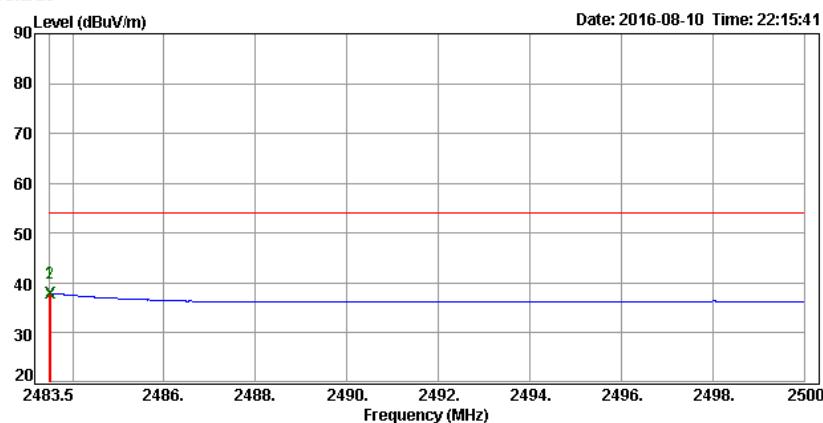
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_External Ant)

Data: 23

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

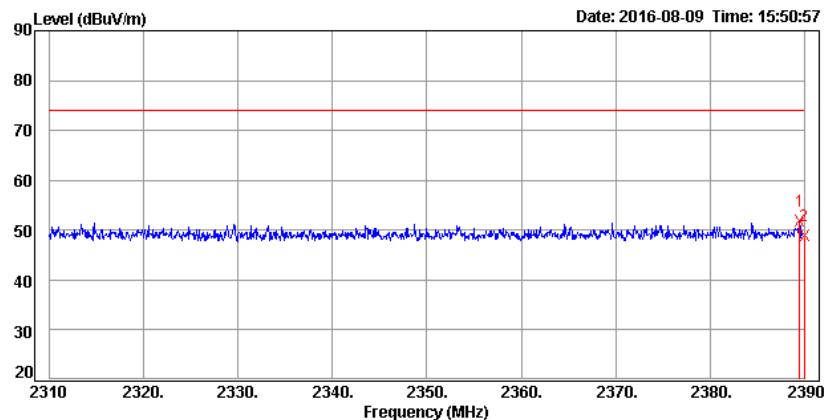
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Horizontal

CH Low (IEEE 802.11b Mode / STA Mode_Internal Ant)

Data: 10



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2389.52	52.16	-0.45	51.71	74.00	-22.29			Peak
2390.00	49.24	-0.44	48.80	74.00	-25.20			Peak

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

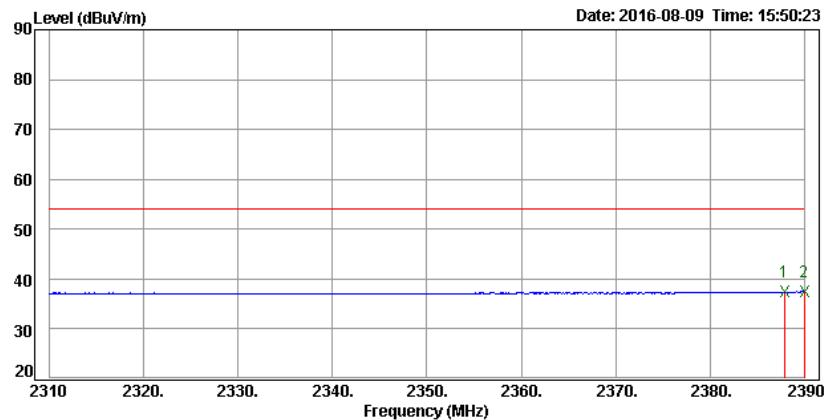
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

Polarity: Horizontal

CH Low (IEEE 802.11b Mode / STA Mode_Internal Ant)

Data: 9



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2387.92	37.84	-0.45	37.39	54.00	-16.61			Average
2390.00	37.90	-0.44	37.46	54.00	-16.54			Average

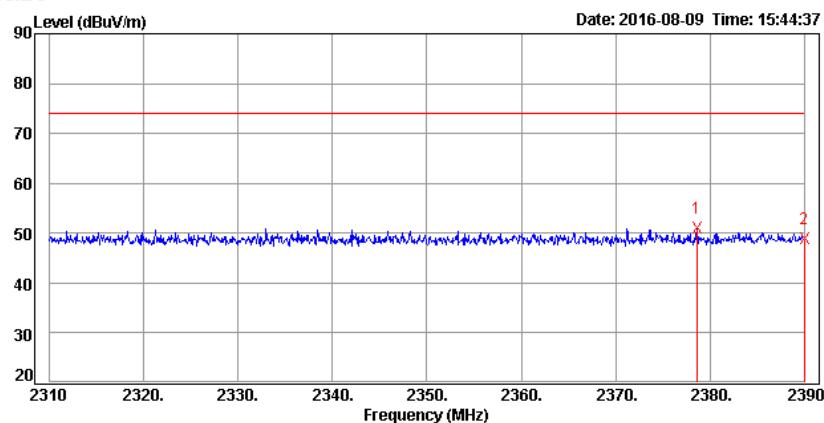
Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical****CH Low (IEEE 802.11b Mode / STA Mode_Internal Ant)**

Data: 8

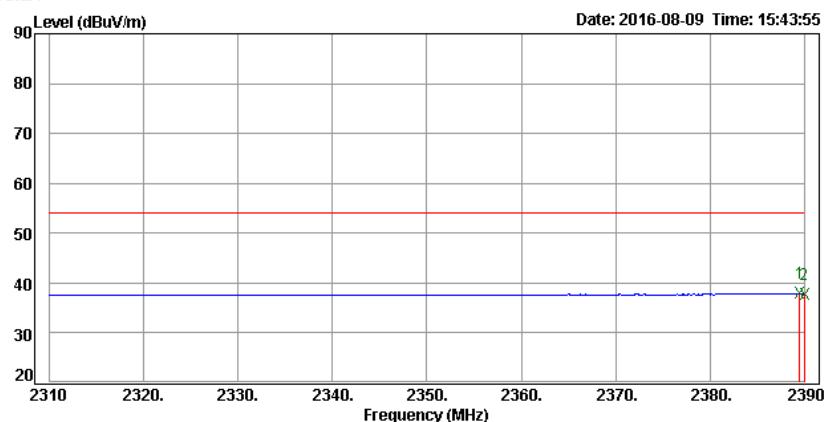
**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

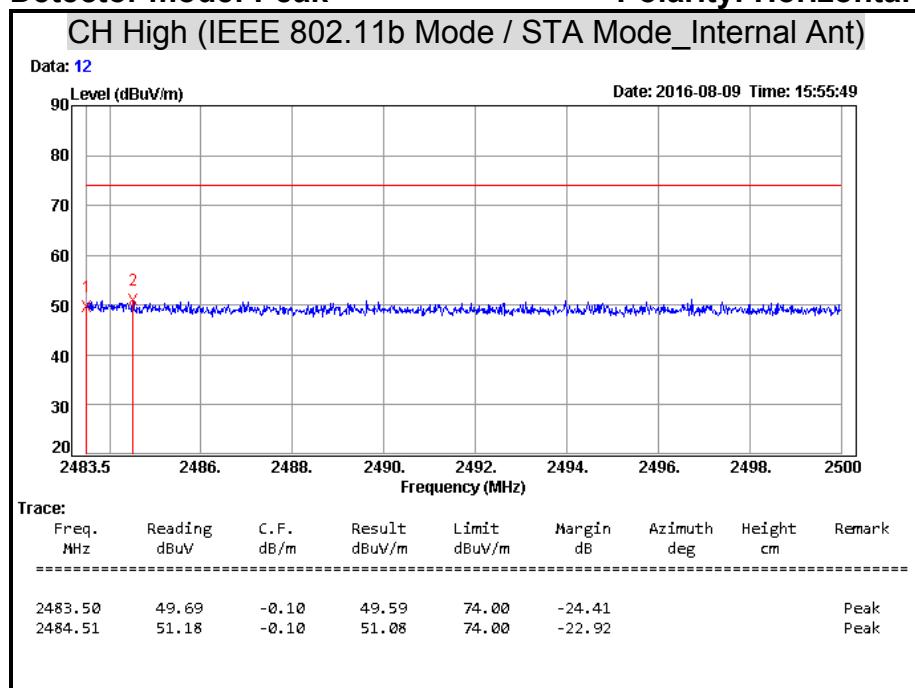
Detector mode: Average**Polarity: Vertical****CH Low (IEEE 802.11b Mode / STA Mode_Internal Ant)**

Data: 7

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

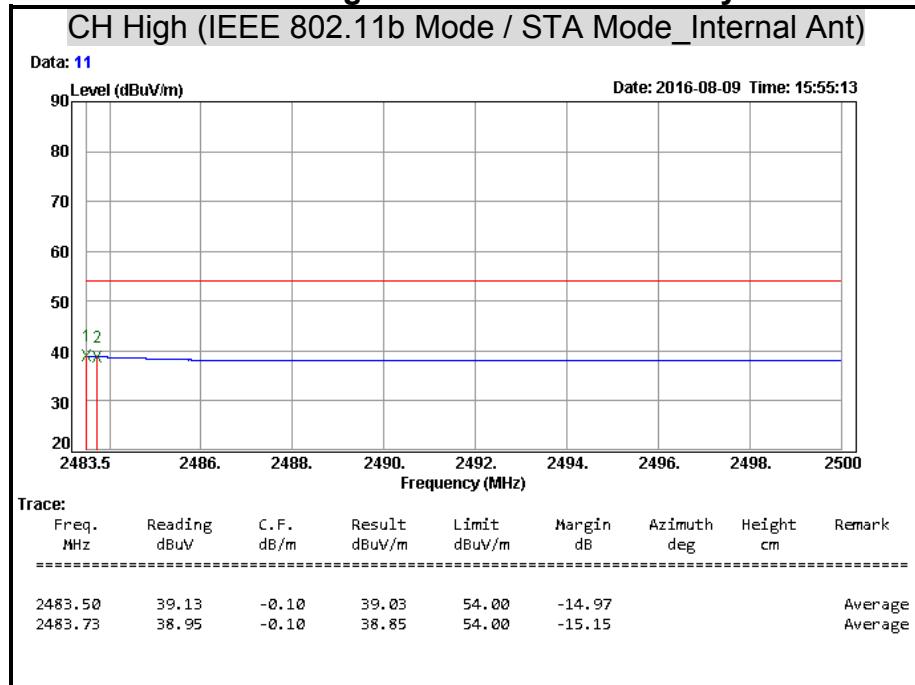
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result – Limit

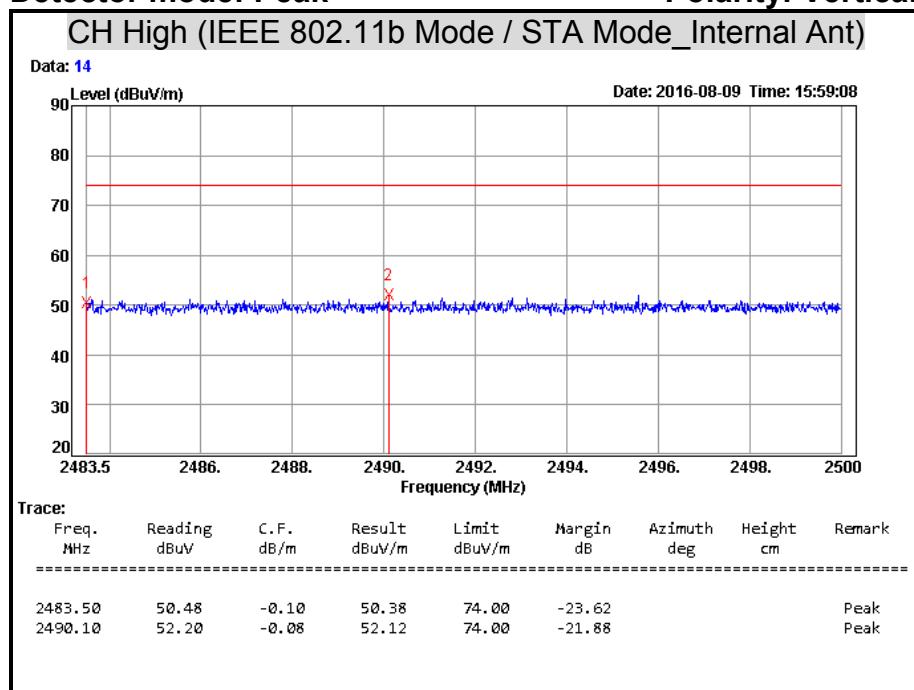
Remark Peak = Result(PK) – Limit(PK)

Detector mode: Average**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result – Limit

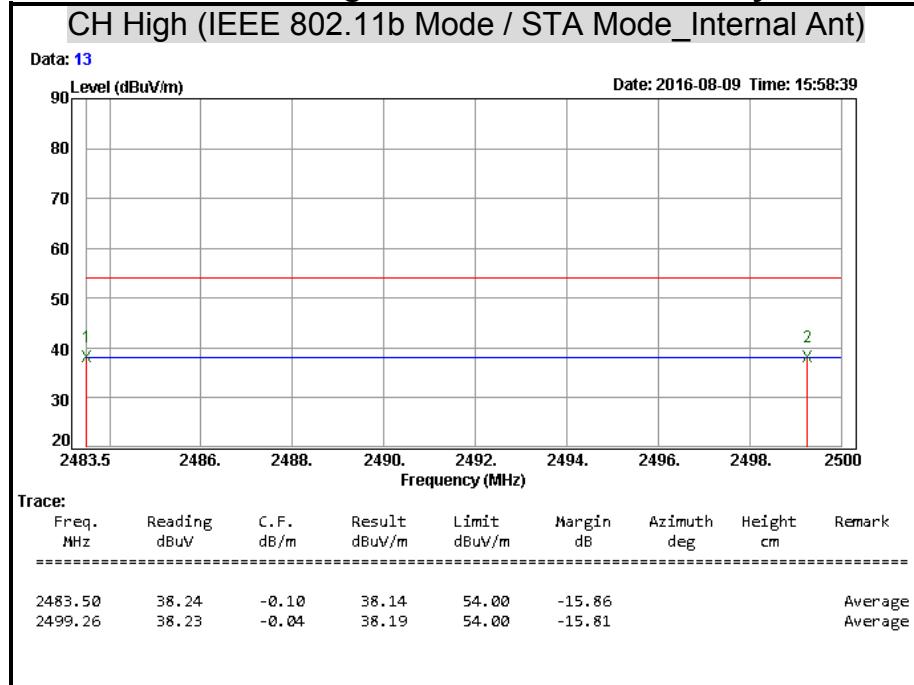
Remark AVG = Result(AV) – Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

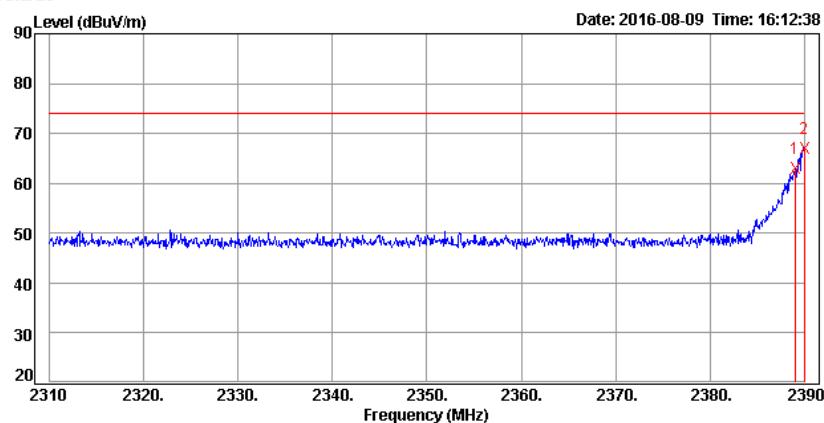
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak

Polarity: Horizontal

CH Low (IEEE 802.11g Mode / STA Mode_Internal Ant)

Data: 20

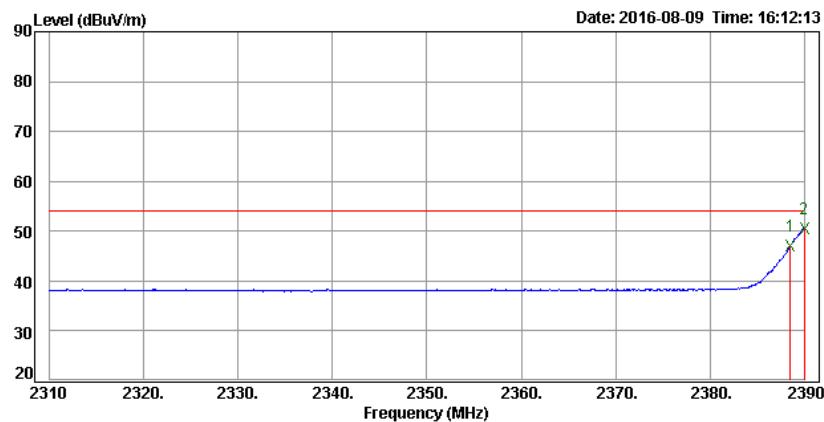
*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark Peak = Result(PK) - Limit(PK)*

Detector mode: Average

Polarity: Horizontal

CH Low (IEEE 802.11g Mode / STA Mode_Internal Ant)

Data: 19

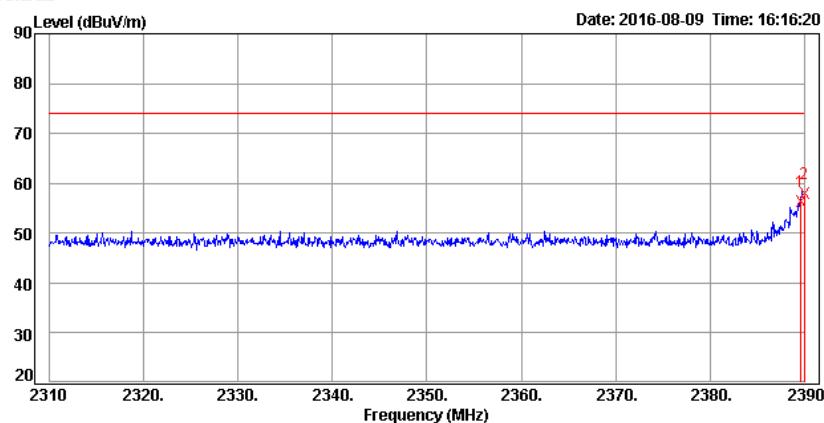
*Remark: Result = Reading + Correction Factor**Margin = Result - Limit**Remark AVG = Result(AV) - Limit(AV)*

Detector mode: Peak

Polarity: Vertical

CH Low (IEEE 802.11g Mode / STA Mode_Internal Ant)

Data: 22

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

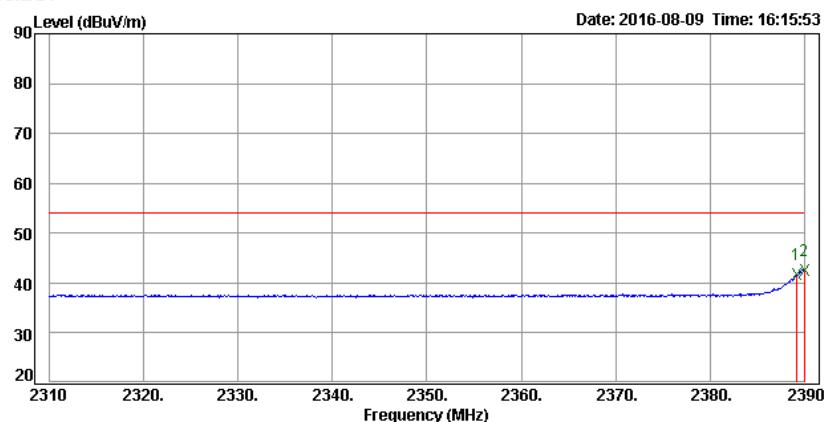
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average

Polarity: Vertical

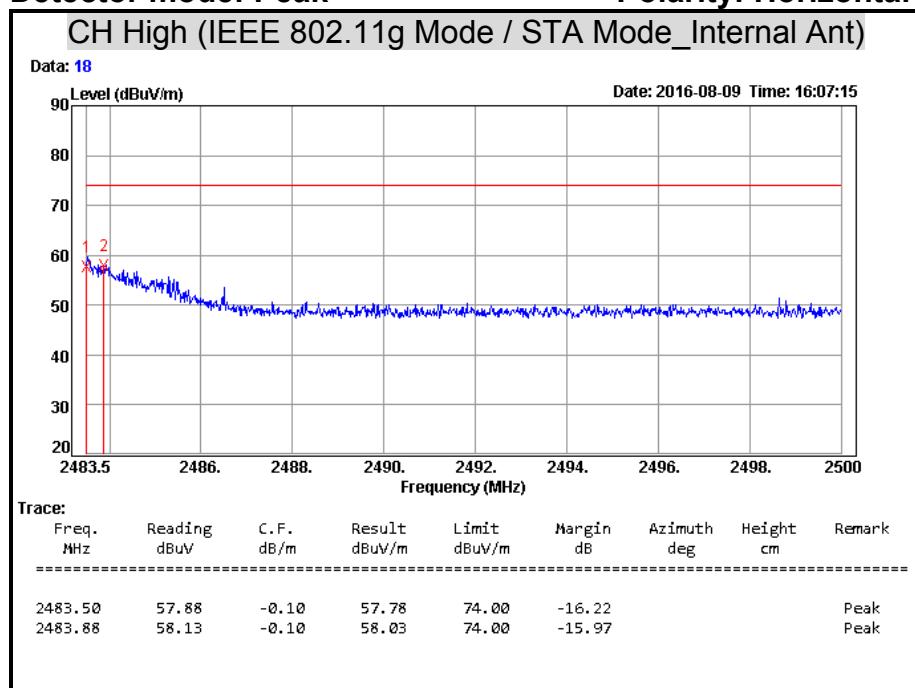
CH Low (IEEE 802.11g Mode / STA Mode_Internal Ant)

Data: 21

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

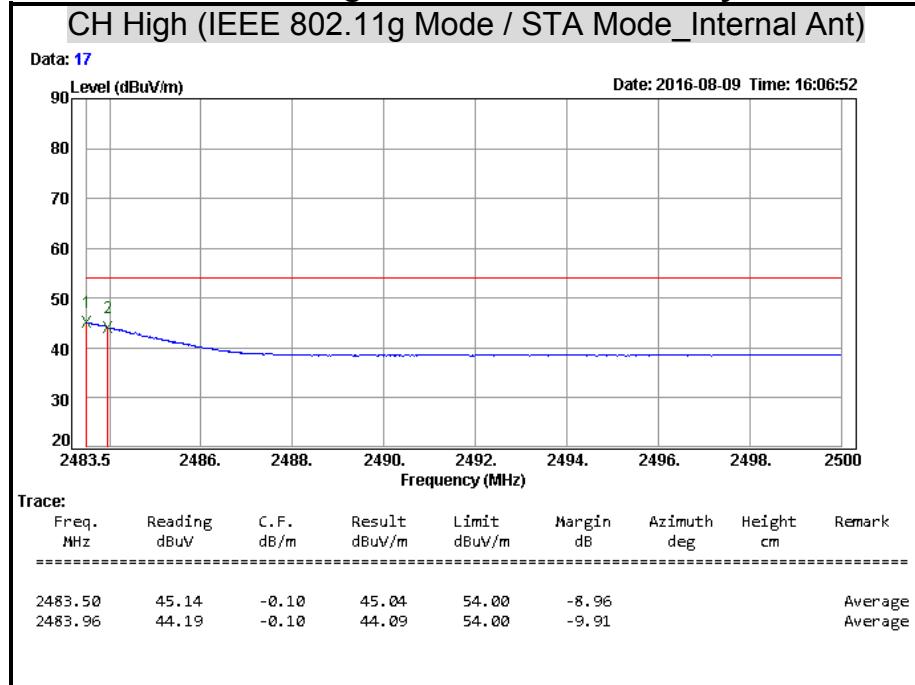
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

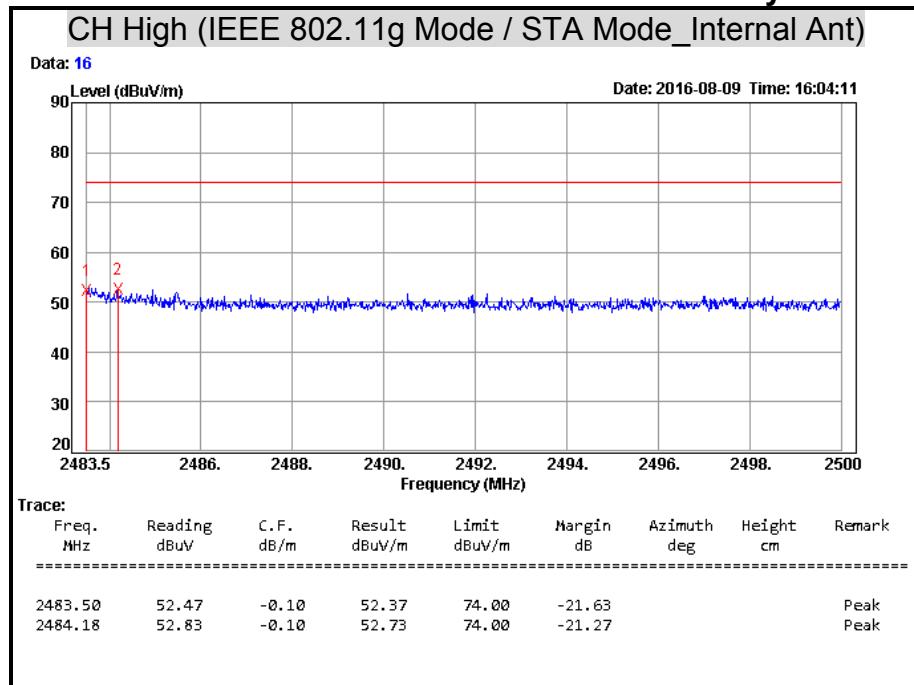
Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

Remark: Result = Reading + Correction Factor

Margin = Result - Limit

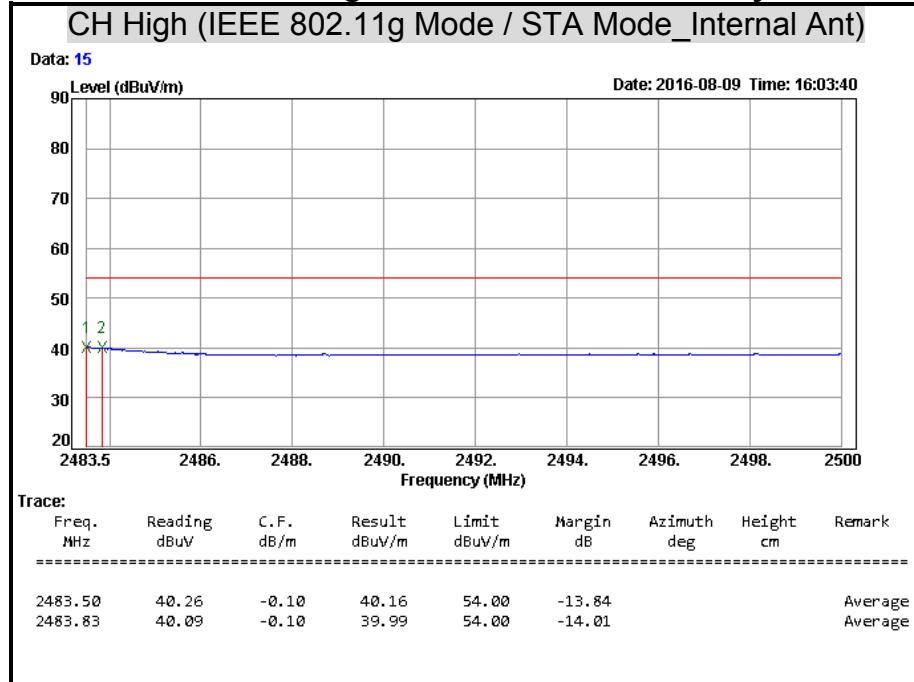
Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

Margin = Result – Limit

Remark Peak = Result(PK) – Limit(PK)

Detector mode: Average**Polarity: Vertical**

Remark: Result = Reading + Correction Factor

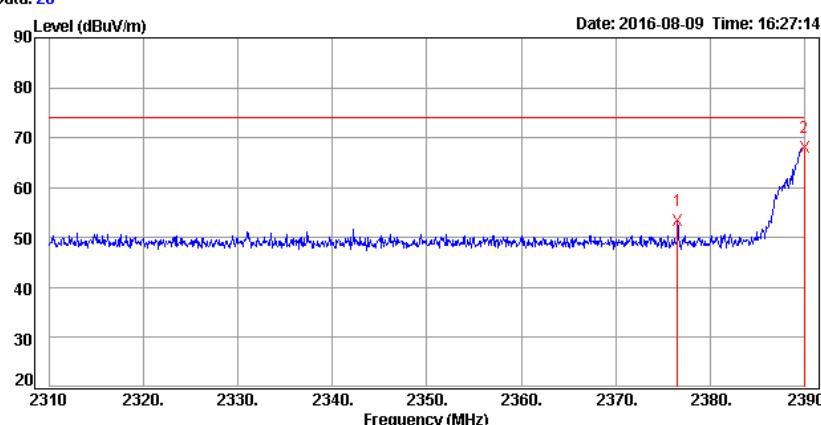
Margin = Result – Limit

Remark AVG = Result(AV) – Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 26

**Remark:** Result = Reading + Correction Factor

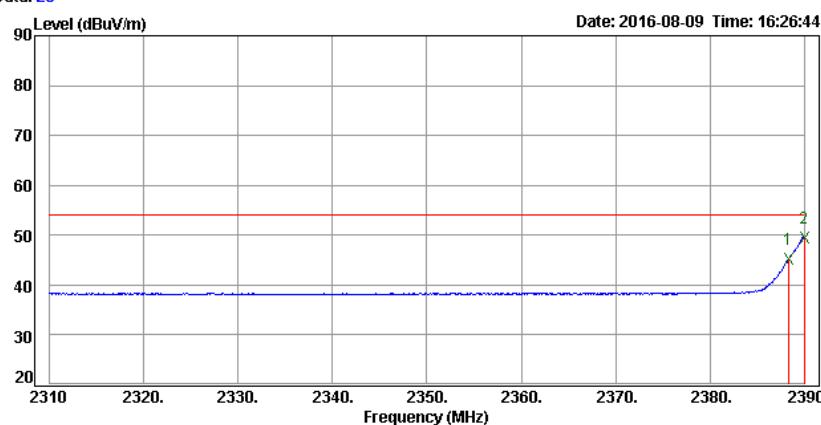
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 25

**Remark:** Result = Reading + Correction Factor

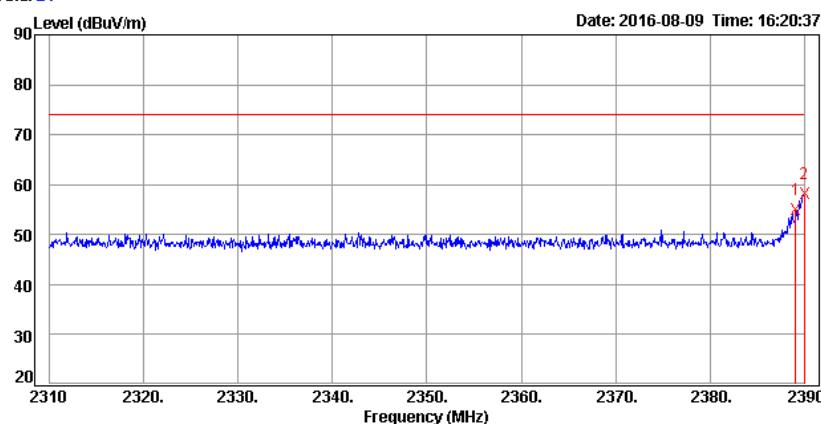
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 24

**Remark:** Result = Reading + Correction Factor

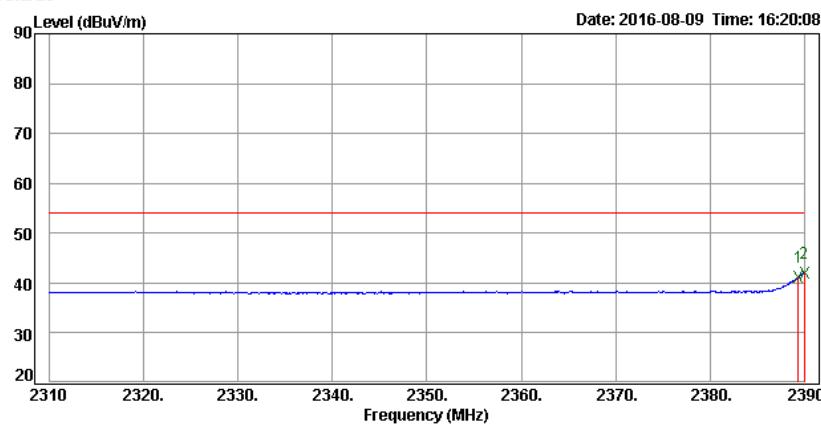
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

CH Low (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 23

**Remark:** Result = Reading + Correction Factor

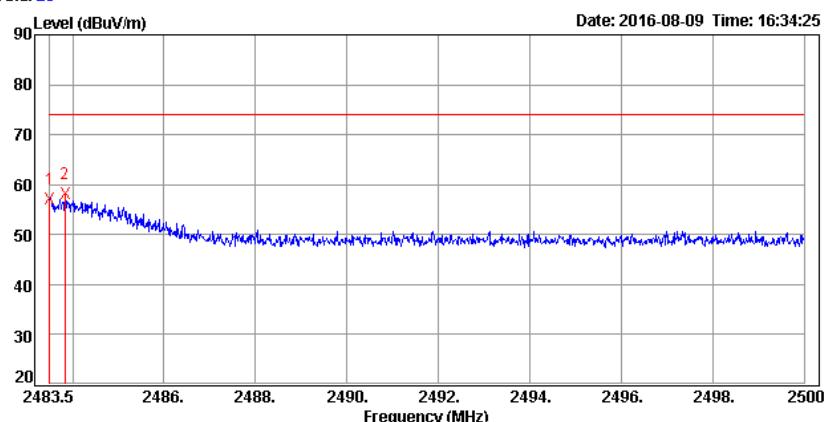
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 28



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
2483.50	57.19	-0.10	57.09	74.00	-16.91			Peak
2483.83	58.31	-0.10	58.21	74.00	-15.79			Peak

Remark: Result = Reading + Correction Factor

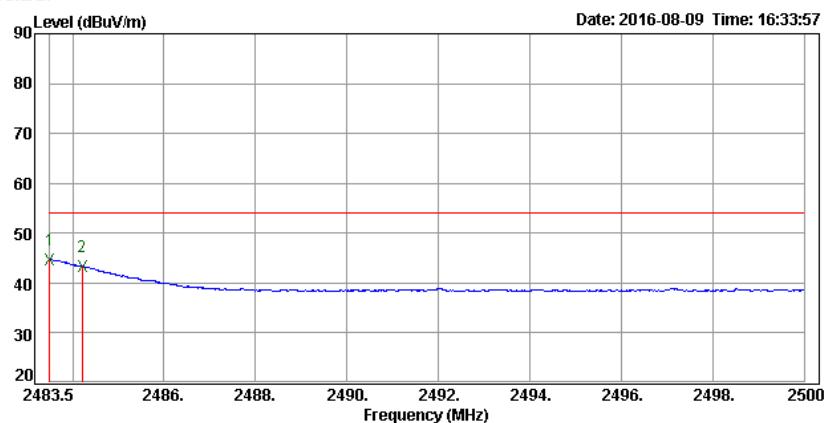
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Horizontal**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 27



Trace:

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
2483.50	44.74	-0.10	44.64	54.00	-9.36			Average
2484.21	43.49	-0.10	43.39	54.00	-10.61			Average

Remark: Result = Reading + Correction Factor

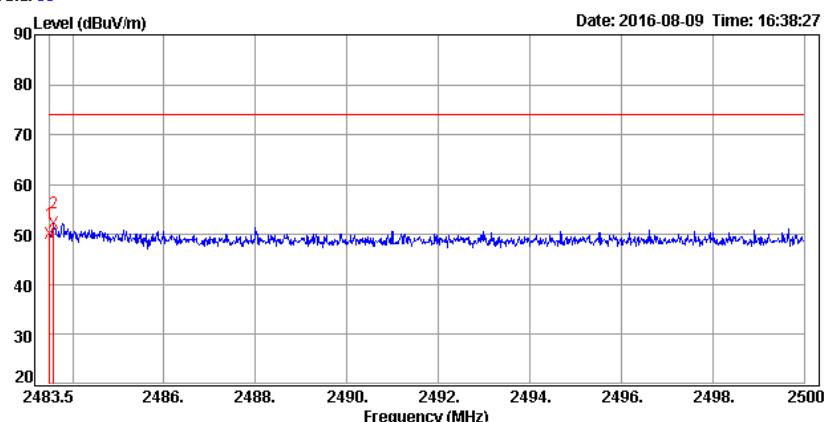
Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

Detector mode: Peak**Polarity: Vertical**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 30

**Remark:** Result = Reading + Correction Factor

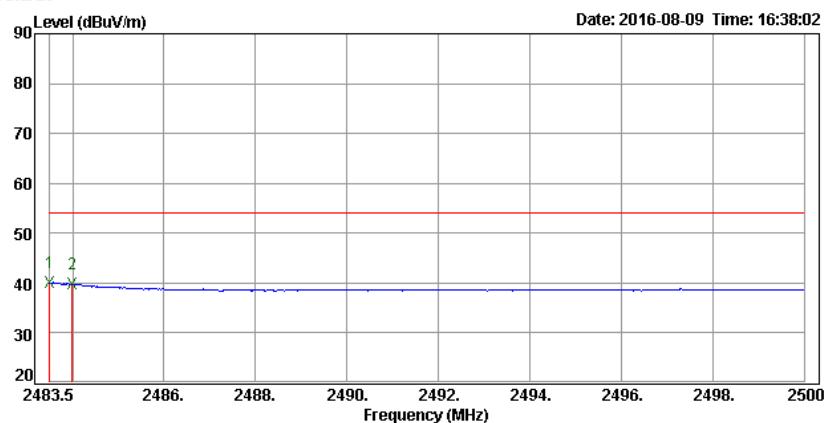
Margin = Result - Limit

Remark Peak = Result(PK) - Limit(PK)

Detector mode: Average**Polarity: Vertical**

CH High (IEEE 802.11gn HT20 MCS0 Mode / STA Mode_Internal Ant)

Data: 29

**Remark:** Result = Reading + Correction Factor

Margin = Result - Limit

Remark AVG = Result(AV) - Limit(AV)

7.8 CONDUCTED EMISSION

LIMITS

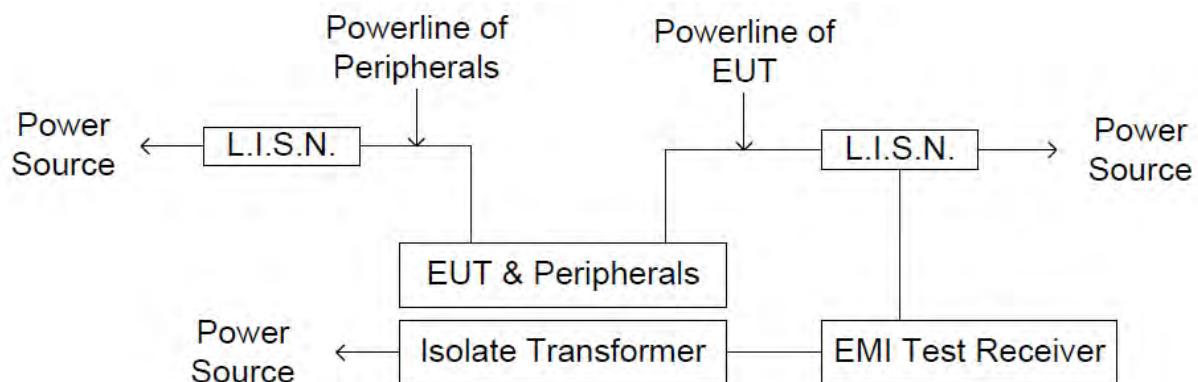
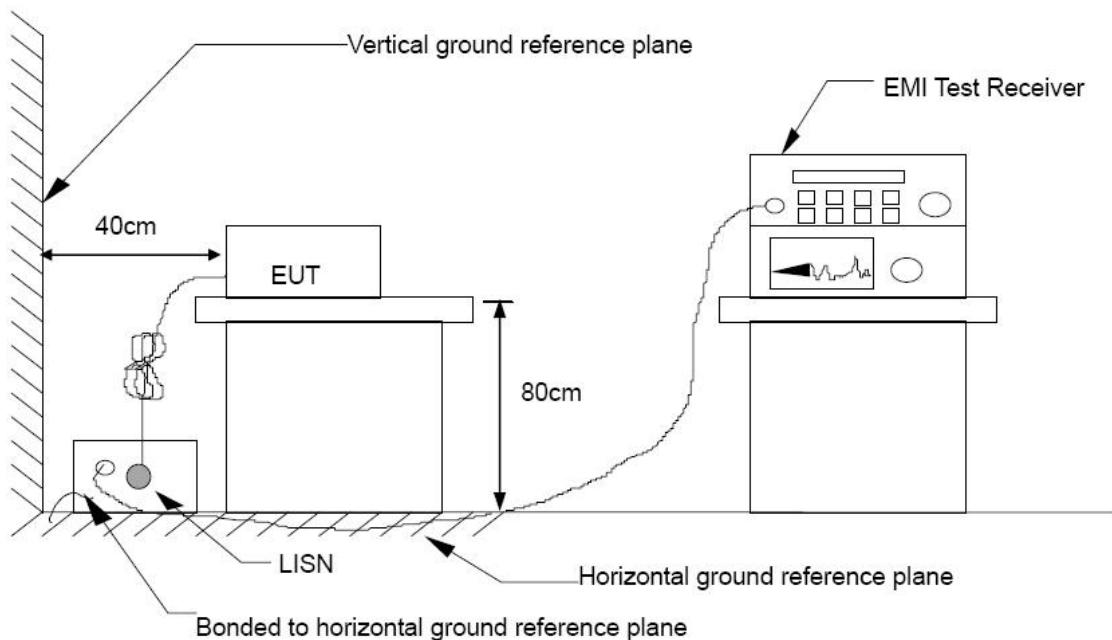
§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	Schwarzbeck	NSLK 8127	8127465	07/28/2017
L.I.S.N	Schwarzbeck	NSLK 8127	8127473	03/10/2017
EMI Test Receiver	Rohde & Schwarz	ESHS 30	838550/003	10/31/2016
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100111	06/27/2017
Test S/W		E3.815206a		

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.10:2013.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.

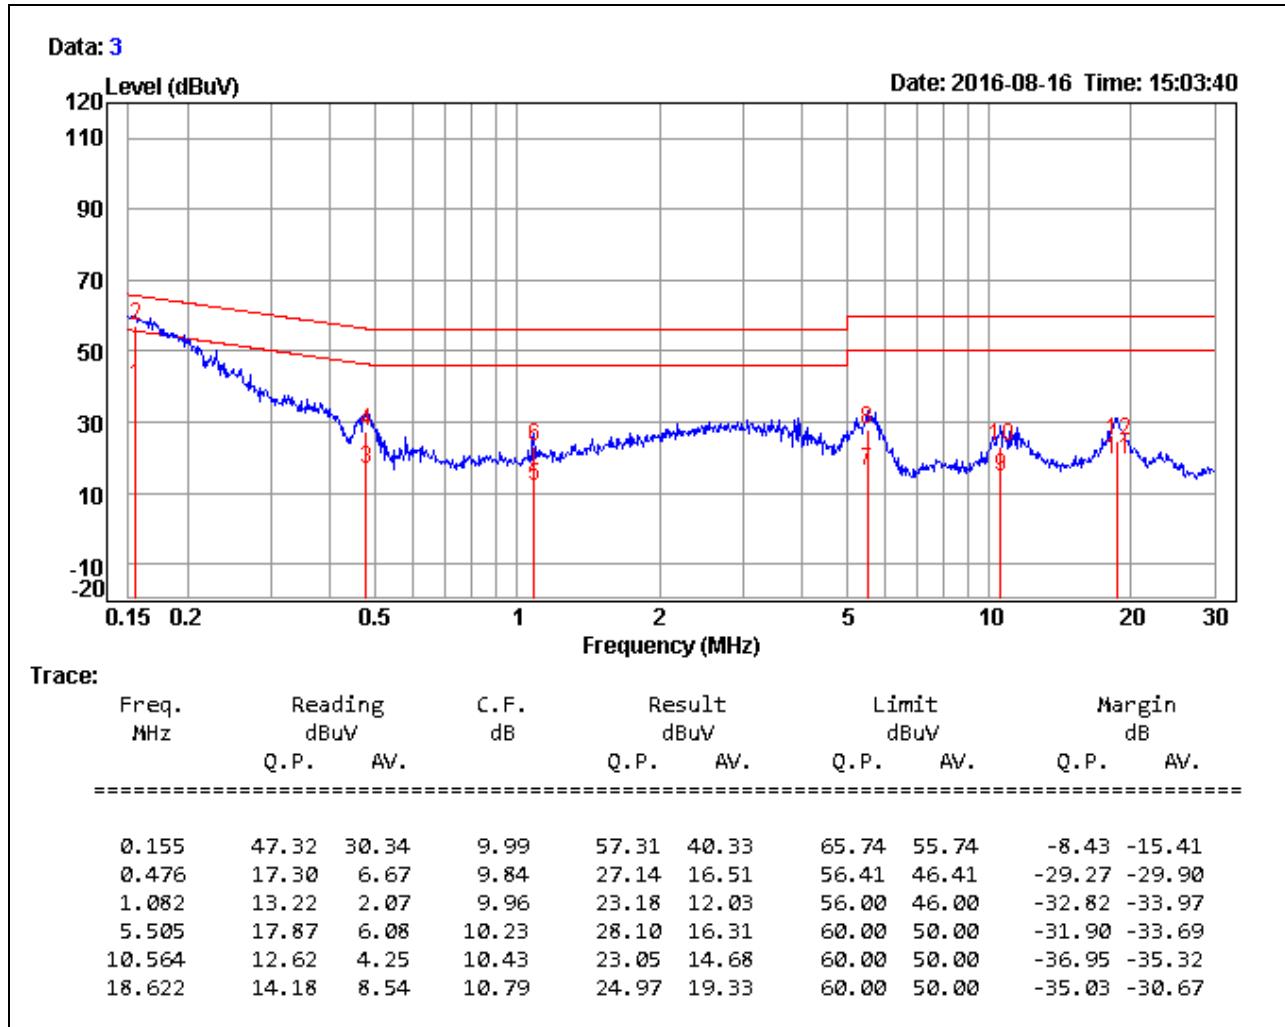
The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

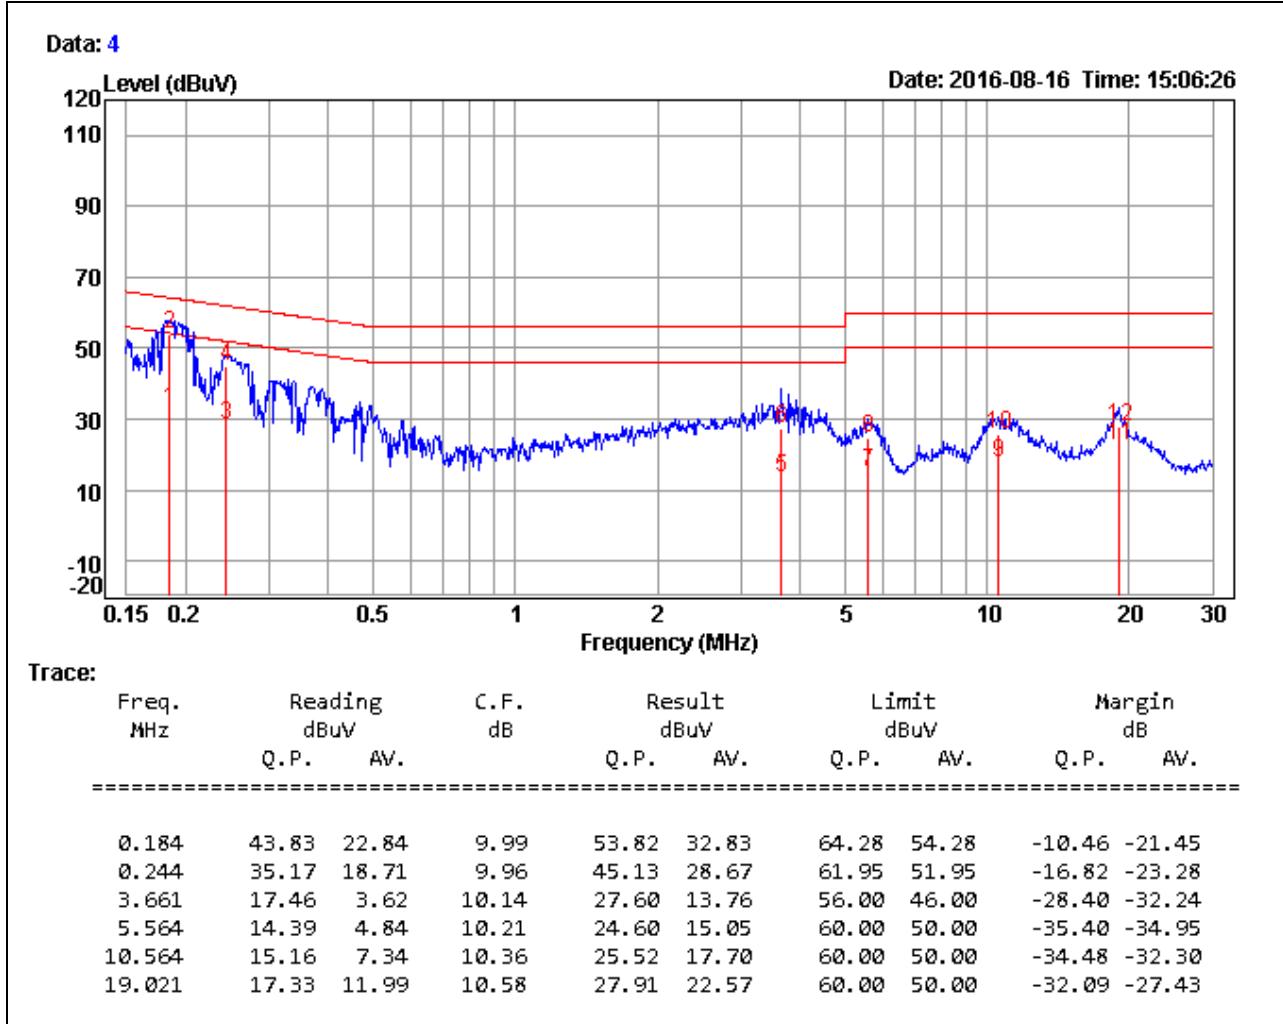
TEST RESULTS

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 1	Temp. & Humidity	25°C, 46%

LINE**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Result level = Reading Value + Correction factor
3. Margin value = Result level – Limit value

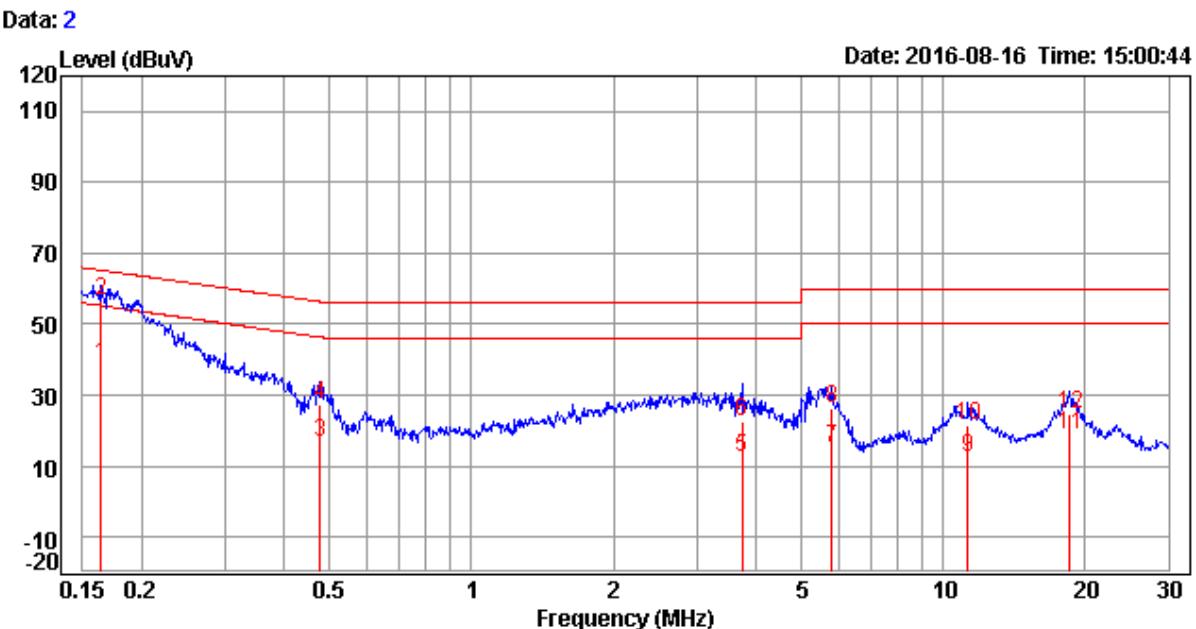
Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 1	Temp. & Humidity	25°C, 46%

NEUTRAL**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Result level = Reading Value + Correction factor
3. Margin value = Result level – Limit value

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 2	Temp. & Humidity	25°C, 46%

LINE



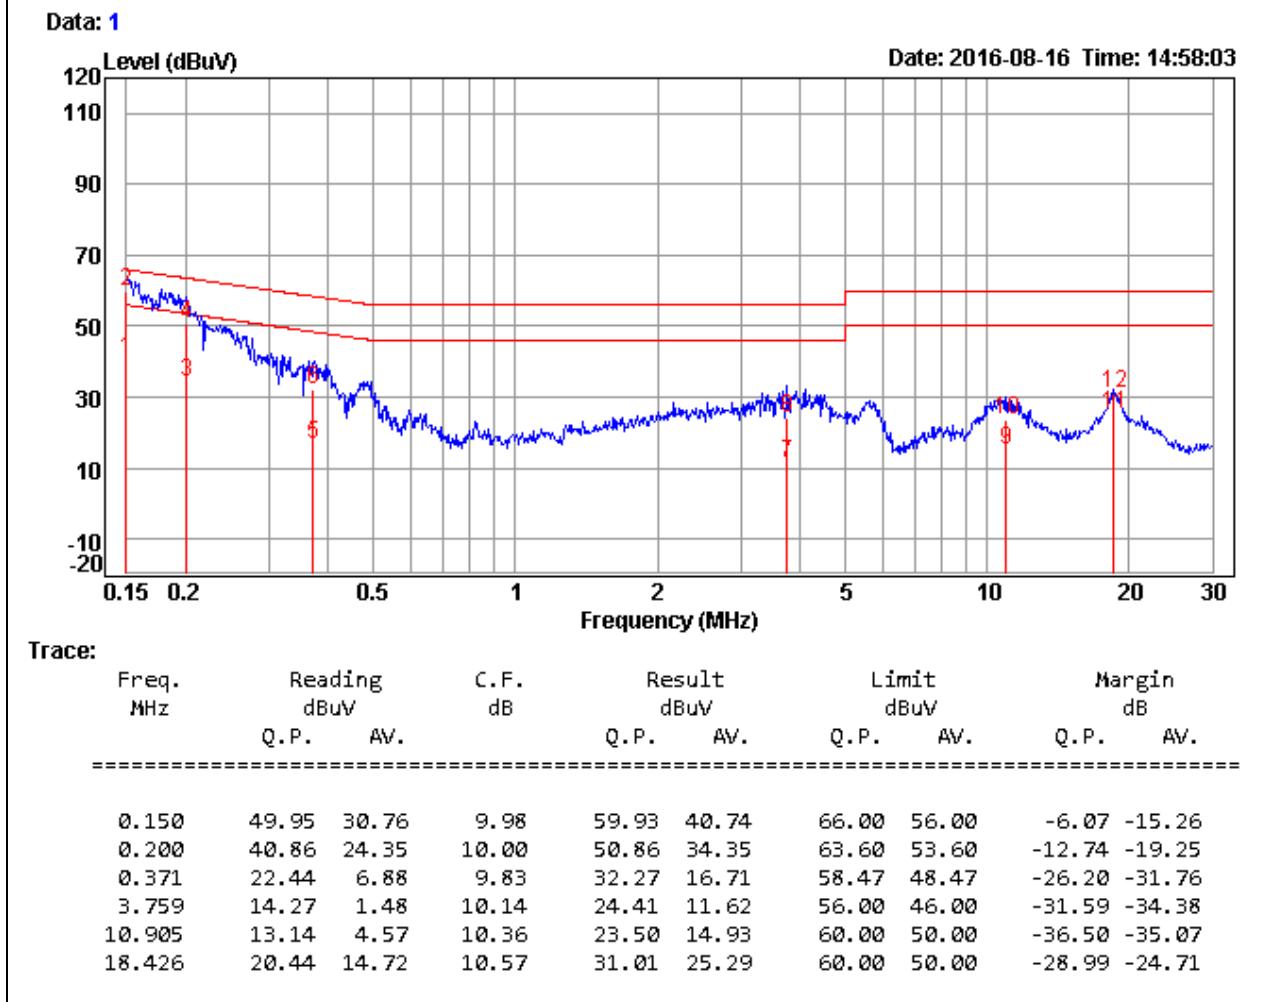
Trace:

Freq. MHz	Reading		C.F. dB	Result		Limit		Margin	
	dBuV	Q.P.		dBuV	Q.P.	dBuV	Q.P.	dBuV	Q.P.
	AV.			AV.		AV.		AV.	
<hr/>									
0.163	46.88	28.40	9.98	56.86	38.38	65.30	55.30	-8.44	-16.92
0.479	17.38	6.88	9.84	27.22	16.72	56.36	46.36	-29.14	-29.64
3.740	12.41	2.46	10.15	22.56	12.61	56.00	46.00	-33.44	-33.39
5.774	15.84	4.93	10.24	26.08	15.17	60.00	50.00	-33.92	-34.83
11.257	11.30	2.14	10.46	21.76	12.60	60.00	50.00	-38.24	-37.40
18.426	13.98	8.01	10.78	24.76	18.79	60.00	50.00	-35.24	-31.21

Remark:

1. Correction Factor = *Insertion loss + Cable loss*
2. Result level = *Reading Value + Correction factor*
3. Margin value = *Result level – Limit value*

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 2	Temp. & Humidity	25°C, 46%

NEUTRAL**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Result level = Reading Value + Correction factor
3. Margin value = Result level – Limit value

8. APPENDIX I CO-LOCATION

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 1	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1595.00	50.38	-11.39	38.99	74.00	-35.01	355	100	Peak
1799.00	48.02	-10.94	37.08	74.00	-36.92	143	100	Peak
3584.00	48.59	-7.18	41.41	74.00	-32.59	59	100	Peak
4927.00	50.19	-2.81	47.38	74.00	-26.62	236	100	Peak
6933.00	45.08	2.80	47.88	74.00	-26.12	2	100	Peak
8701.00	42.87	5.31	48.18	74.00	-25.82	295	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
=====								
1374.00	48.76	-11.99	36.77	74.00	-37.23	60	200	Peak
1595.00	54.85	-11.39	43.46	74.00	-30.54	102	100	Peak
1986.00	51.68	-10.53	41.15	74.00	-32.85	189	100	Peak
3584.00	51.71	-7.18	44.53	74.00	-29.47	22	200	Peak
4927.00	51.14	-2.81	48.33	74.00	-25.67	197	100	Peak
7375.00	45.05	3.94	48.99	74.00	-25.01	197	100	Peak

Remark:

1. Average test would be performed if the peak result were greater than the average limit.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)

Product Name	WHITE DRIVE BOX	Test By	Crystal Wu
Test Model	TB4001	Test Date	2016/08/16
Test Mode	Mode 2	Temp. & Humidity	28°C, 52%

966Chamber_C at 3Meter / Horizontal

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
1374.00	48.23	-11.99	36.24	74.00	-37.76	152	200	Peak
1595.00	49.36	-11.39	37.97	74.00	-36.03	43	200	Peak
3584.00	49.30	-7.18	42.12	74.00	-31.88	246	100	Peak
4927.00	48.62	-2.81	45.81	74.00	-28.19	240	200	Peak
7392.00	46.15	3.99	50.14	74.00	-23.86	78	100	Peak
8820.00	42.64	5.25	47.89	74.00	-26.11	3	100	Peak

966Chamber_C at 3Meter / Vertical

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
<hr/>								
1595.00	53.41	-11.39	42.02	74.00	-31.98	358	200	Peak
1782.00	52.07	-10.98	41.09	74.00	-32.91	354	200	Peak
1986.00	52.09	-10.53	41.56	74.00	-32.44	186	100	Peak
3584.00	52.51	-7.18	45.33	74.00	-28.67	308	100	Peak
4927.00	54.62	-2.81	51.81	74.00	-22.19	66	100	Peak
7392.00	45.89	3.99	49.88	74.00	-24.12	175	100	Peak

Remark:

1. Average test would be performed if the peak result were greater than the average limit.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(PK)
Remark AVG = Result(AV) - Limit(AV)