


1. ALL MATERIALS, FINISHES AND PROCESS MUST COMPLY WITH ROHS DIRECTIVE
2. LABEL COLOR SHALL MEET CISCO REQUEST, CISCO OSLO SNOW FOR BACKGROUND COLOR AND PANTONE COOL GREY 3 FOR TEXTS AND LINES COLOR
3. TEXT FONT SHALL BE CISCOSANSTT REGULAR
4. LABEL MATERIAL:
 - (a) SURFACE MATERIAL: 50# EMBOSSING WHITE MYLAR HTYL50(EB)
 - (b) SURFACE GLOSSINESS: MATTE LIKE MT-11510
 - (c) SURFACE MATERIAL COLOR: CISCO OSLO SNOW
 - (d) PRINTING TEXT COLOR: PANTONE COOL GREY 3
 - (e) ADHESIVE: F07D
 - (f) ADHESIVE THICKNESS: 0.033+/-0.003 MM
 - (g) ADHESIVE TO STELL(180 DEGREE ADHESION): 1.20+/-0.35 KG/25MM
 - (h) INITIAL TACK: 1.20+/-0.4 KG/25MM
 - (i) RELEASE POWER(90 DEGREE): 26.00+/-10 G/25MM
 - (j) HOLDING POWER: 10.00+/-6 HR/KG/25MM²

VER.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
01			2012/05/30	First Release	Sally Liao
02			2012/07/13	Add P/N, change label material and cutting line	Sally Liao
03			2013/10/17	Keep marks for the countries related to tier 1	Sally Liao
04			2013/10/30	Update certificate NO. for the country related to tier 1	Sally Liao



MATERIAL (SPEC.)										SCALE 1/1		FOXCONN HON HAI PRECISION IND. CO., LTD.			
SEE NOTES										SHEET 1/1					
FINISH										SHEET 1/1		PART NAME IDEFIX Safety Label			
SEE NOTES															
Select								V		UNIT	1				
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	mm					
0~6	0.05	0.05	0.10					0.20			SIZE				
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20							
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25			A4				
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30							
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50							
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80							
DRAFT TOLERANCE ± 0.2*										CRITICAL DIM. MARK		CUSTOMER MODEL IDEFIX CUSTOMER PART NO. N/A DESIGNED Sally Liao APPROVED Ken Hung			

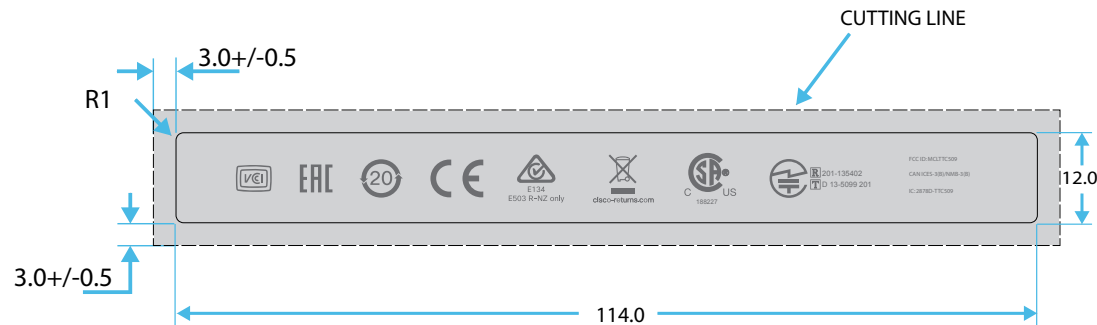