



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

BLUETOOTH MODULE 4.0 + EDR / LE

MODEL NUMBER: WIN-B2

FCC ID: MCLWINB2

IC: 2878D-WINB2

REPORT NUMBER: 11J13630-1

ISSUE DATE: MARCH 2, 2011

Prepared for

**HON HAI PRECISION IND. CO., LTD.
5F-1, 5 HSIN-AN ROAD
HSINCHU SCIENCE-BASED INDUSTRIAL PARK
TAIWAN, R.O.C.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	03/02/2011	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.4. SOFTWARE AND FIRMWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT.....	10
7. ANTENNA PORT TEST RESULTS.....	11
7.1. BASIC DATA RATE GFSK MODULATION.....	11
7.1.1. 20 dB AND 99% BANDWIDTH.....	11
7.1.2. HOPPING FREQUENCY SEPARATION.....	18
7.1.3. NUMBER OF HOPPING CHANNELS.....	20
7.1.4. AVERAGE TIME OF OCCUPANCY.....	25
7.1.5. OUTPUT POWER.....	29
7.1.6. AVERAGE POWER.....	33
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	34
7.2. ENHANCED DATA RATE 8PSK MODULATION.....	43
7.2.1. 20 dB AND 99% BANDWIDTH.....	43
7.2.2. HOPPING FREQUENCY SEPARATION.....	50
7.2.3. NUMBER OF HOPPING CHANNELS.....	52
7.2.4. AVERAGE TIME OF OCCUPANCY.....	57
7.2.5. OUTPUT POWER.....	61
7.2.6. AVERAGE POWER.....	65
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	66
7.3. LE GFSK MODE.....	75
7.3.1. 20 dB AND 99% BANDWIDTH.....	75
7.3.2. HOPPING FREQUENCY SEPARATION.....	82
7.3.3. NUMBER OF HOPPING CHANNELS.....	84
7.3.4. AVERAGE TIME OF OCCUPANCY.....	89
7.3.5. OUTPUT POWER.....	92
7.3.6. AVERAGE POWER.....	96

7.3.7.	CONDUCTED SPURIOUS EMISSIONS.....	97
8.	RADIATED TEST RESULTS.....	106
8.1.	LIMITS AND PROCEDURE	106
8.2.	TRANSMITTER ABOVE 1 GHz	107
8.2.1.	BASIC DATA RATE GFSK MODULATION	107
8.2.2.	ENHANCED DATA RATE 8PSK MODULATION	116
8.2.3.	LE GFSK MODE	125
8.3.	RECEIVER ABOVE 1 GHz.....	134
8.4.	WORST-CASE BELOW 1 GHz.....	135
9.	AC POWER LINE CONDUCTED EMISSIONS.....	137
10.	MAXIMUM PERMISSIBLE EXPOSURE	141
11.	SETUP PHOTOS.....	144

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HON HAI PRECISION IND. CO., LTD.
5F-1, 5 HSIN ROAD
HSINCHU SCIENCE-BASED INDUSTRIAL PARK
TAIWAN, R.O.C.

EUT DESCRIPTION: BLUETOOTH MODULE 4.0 +EDR/LE

MODEL: WIN-B2

SERIAL NUMBER: D66BF7EFD0AE, D66BF7EFD0AB, A4C0E12724C4,
A4C0E1272470.

DATE TESTED: FEBRUARY 09-14 to March 01, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



THU CHAN
ENGINEERING MANAGERT
UL CCS

VAHAN PILIBOSIAN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth 4.0 + EDR/LE Module.

The radio module is manufactured by Hon Hai Precision.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	1.54	1.43
2402 - 2480	Enhanced 8PSK	4.46	2.79
2402 - 2480	LE GFSK	-0.92	0.81

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of 2.91 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BT usb driver, v5.1.0.1400.

The test utility software used during testing was Bluetool_MI_1.3.5.5.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

All final tests in the GFSK mode were made at 1 Mb/s.

All final tests in the 8PSK mode were made at 3 Mb/s.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

The EUT was investigated in three different positions, X, Y, & Z and turned out the X was worst-position. This worst position will be set for all radiated emissions testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP Compag	Presario	CNF7458G3Q	DoC
AC Adapter	HP Compag	DC359A	F3-07091411250E	N/A
Conversion Board	Marko	96.9922	5	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.8m	N/A
2	DC	1	DC	Unshielded	1.8m	N/A
3	USB	1	USB	Shielded	1.0m	N/A

TEST SETUP

The EUT is connected to a host laptop computer via conversion board with USB cable during the test. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

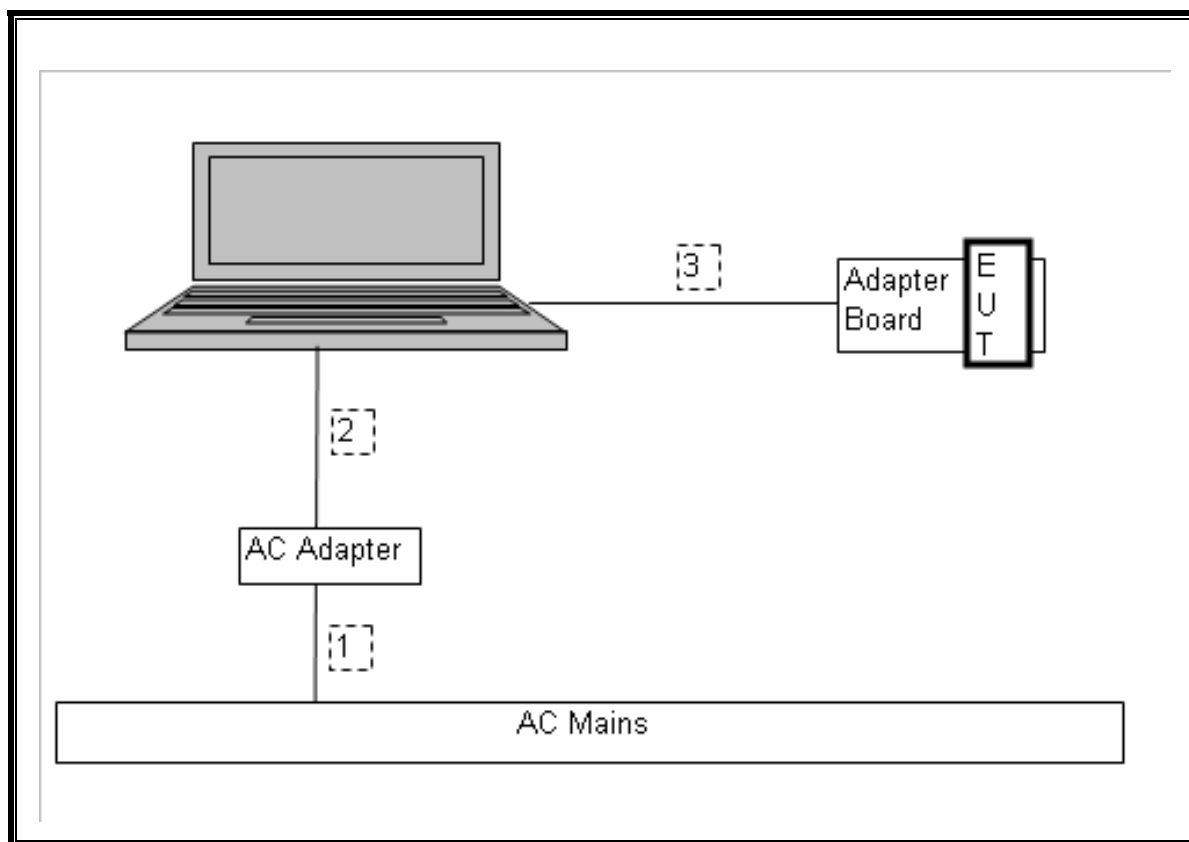

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/11
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/29/11
Preamplifier, 26.5 MHz	Agilent / HP	8449B	C01063	07/14/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/12/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/27/12
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02684	CNR
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	05/05/11
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/11
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/04/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/11
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	940.973	850.5973
Middle	2441	938.424	909.0983
High	2480	942.354	891.4827


20 dB BANDWIDTH

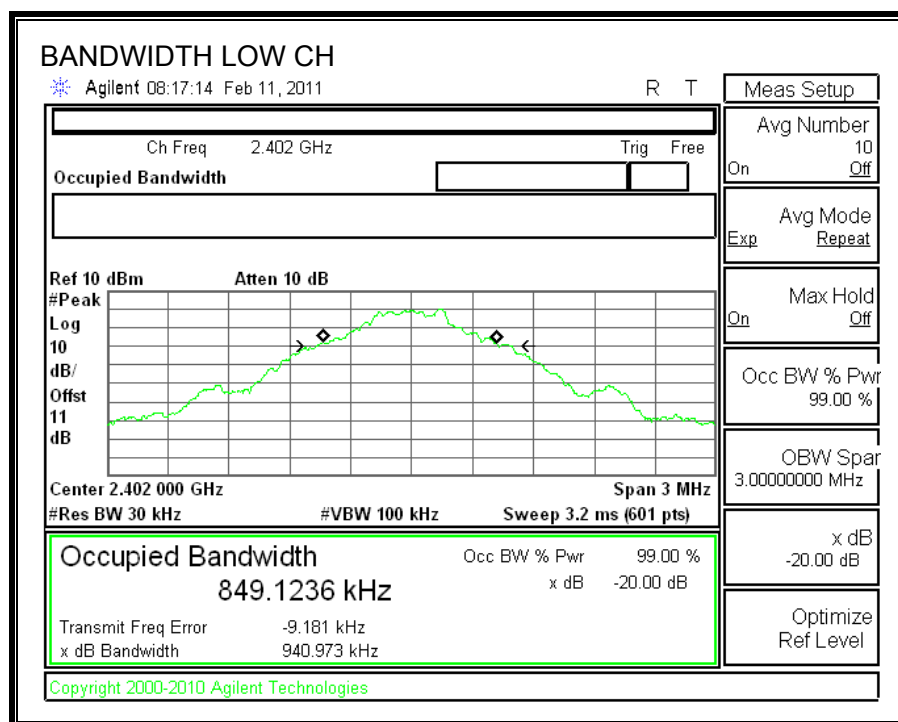

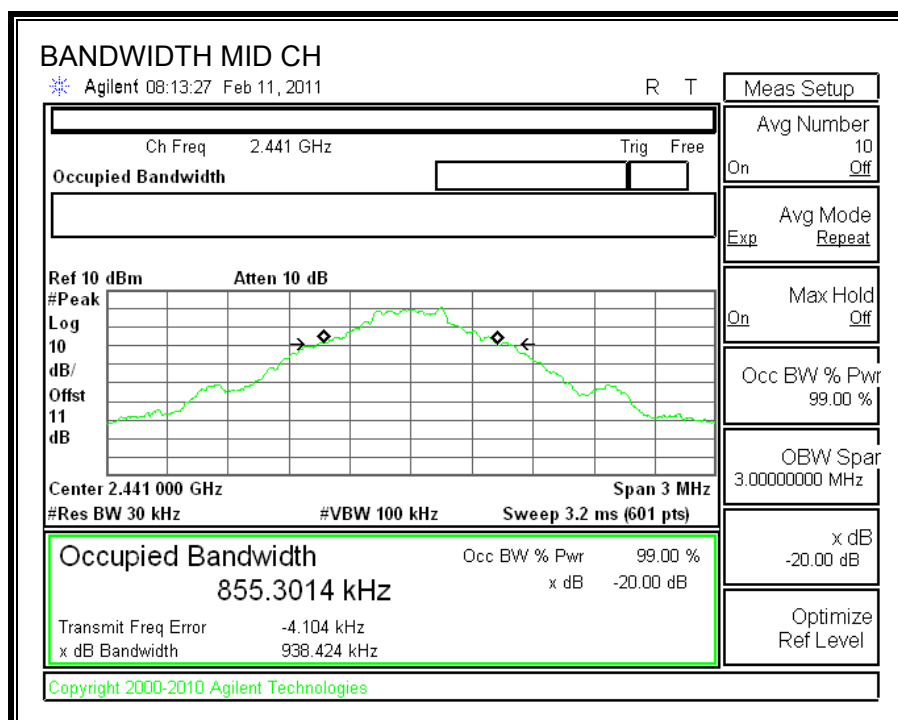

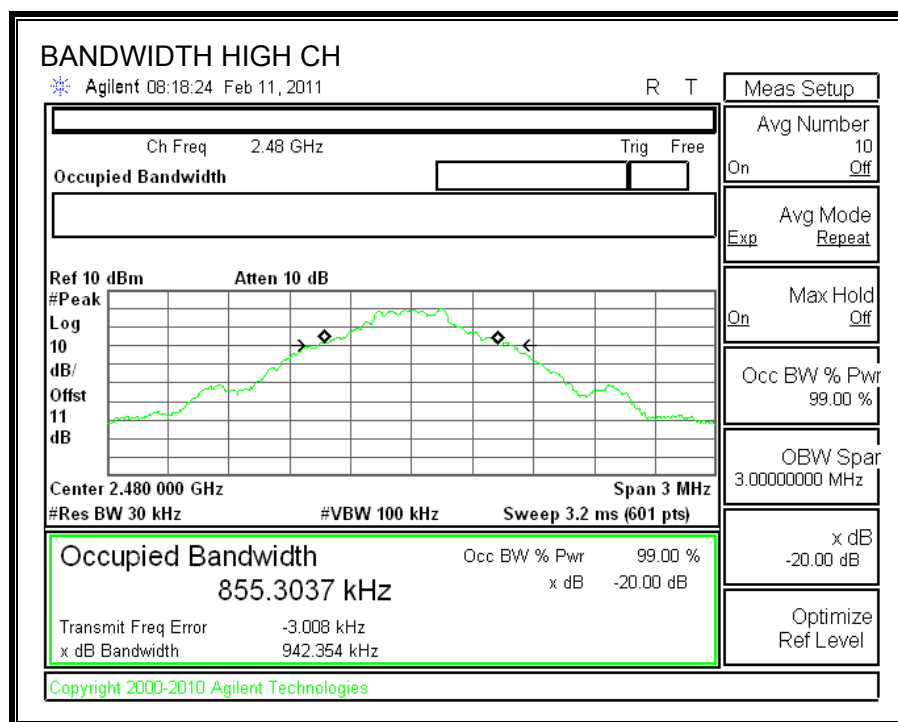

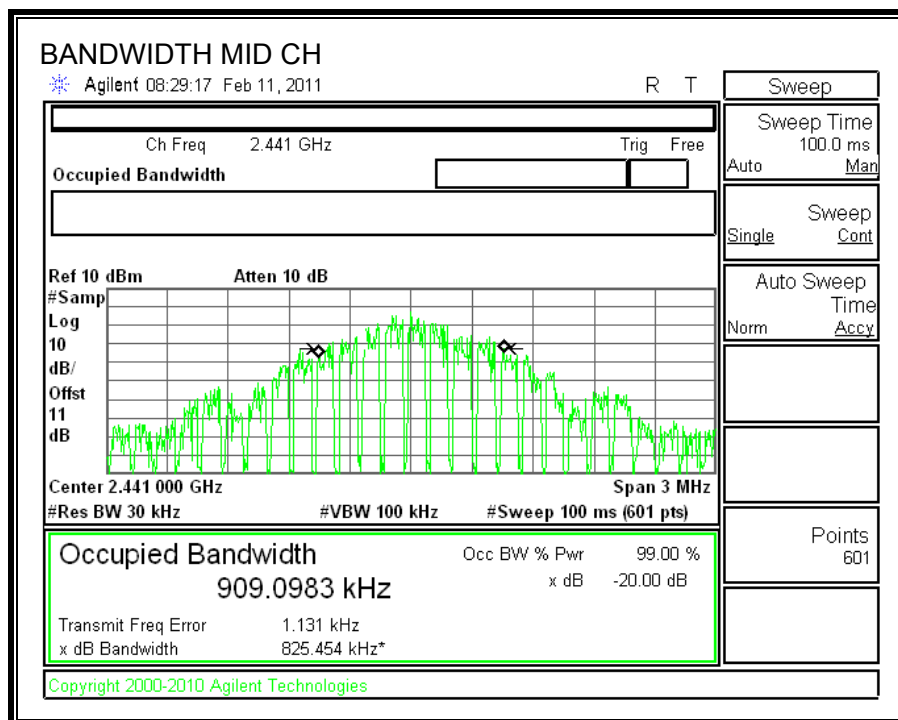

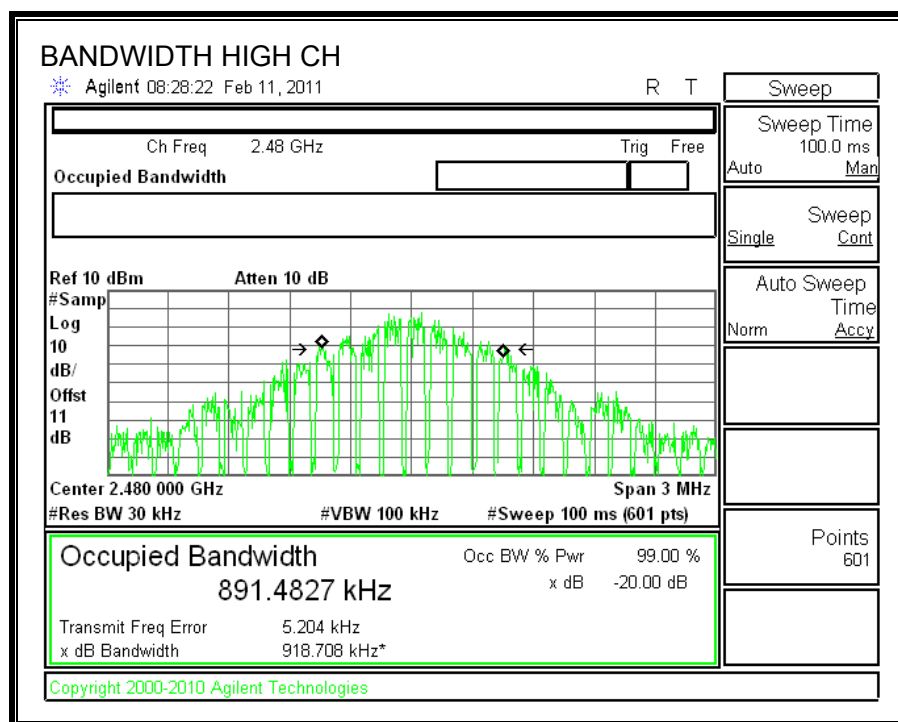

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

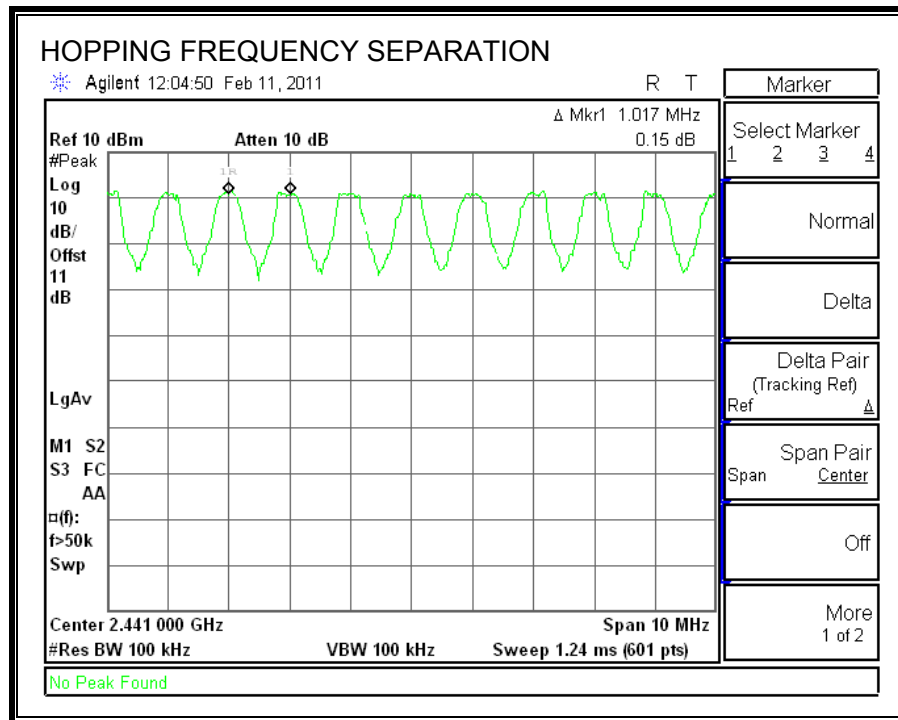

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

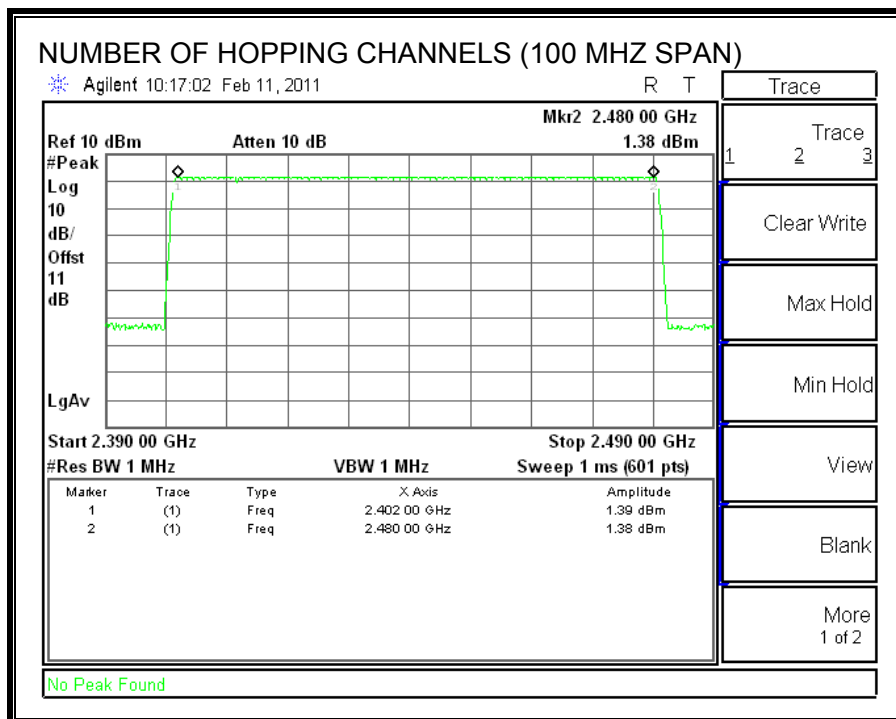

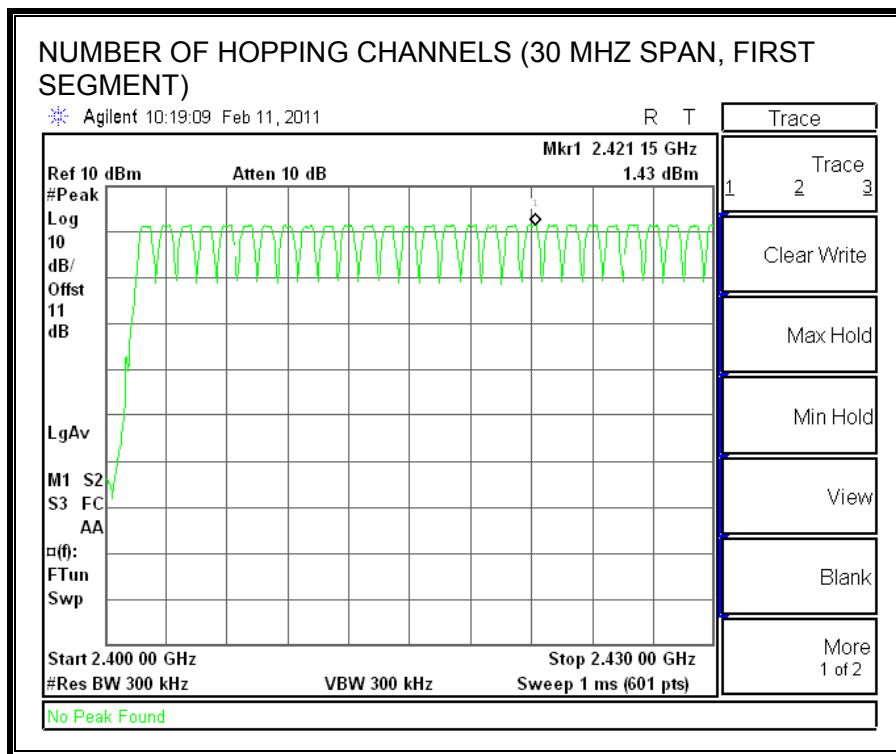

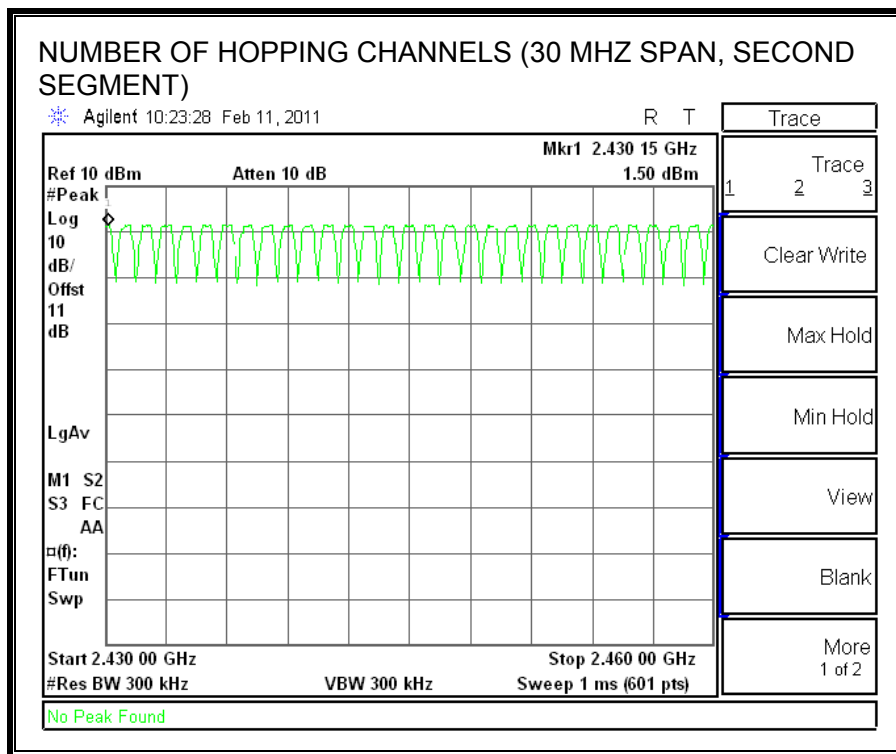

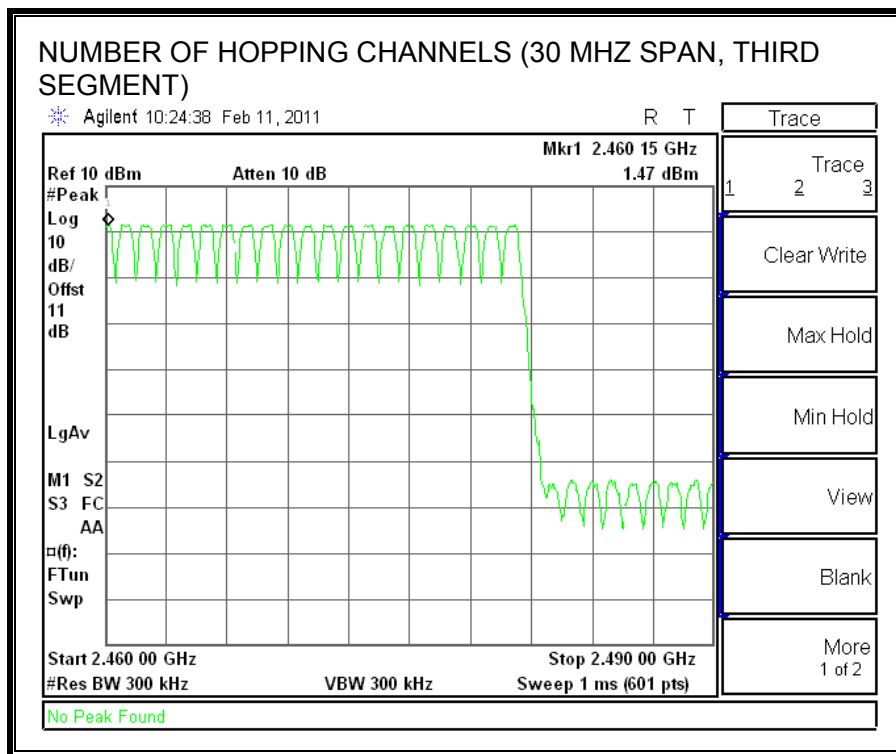

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.


RESULTS

GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.395	32	0.126	0.4	-0.274
DH3	1.657	17	0.282	0.4	-0.118
DH5	2.9	10	0.290	0.4	-0.110

DH1

PULSE WIDTH

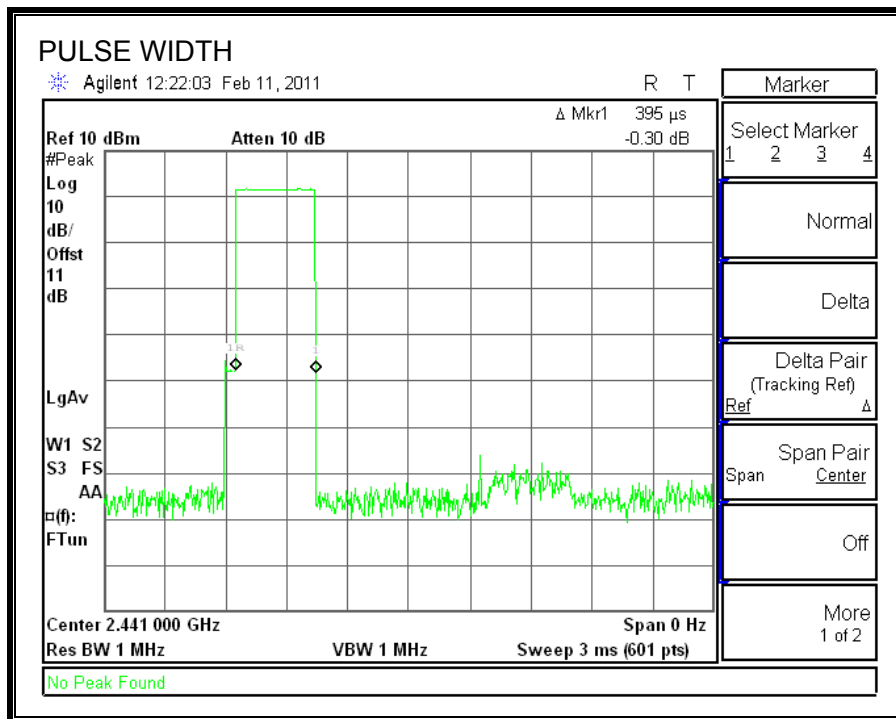


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

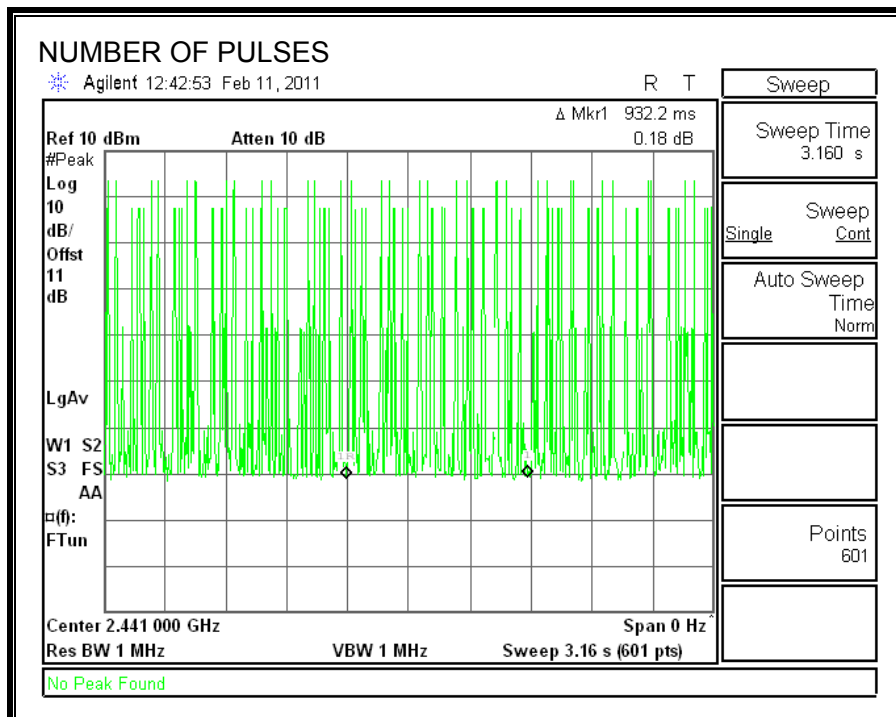


DH3

PULSE WIDTH

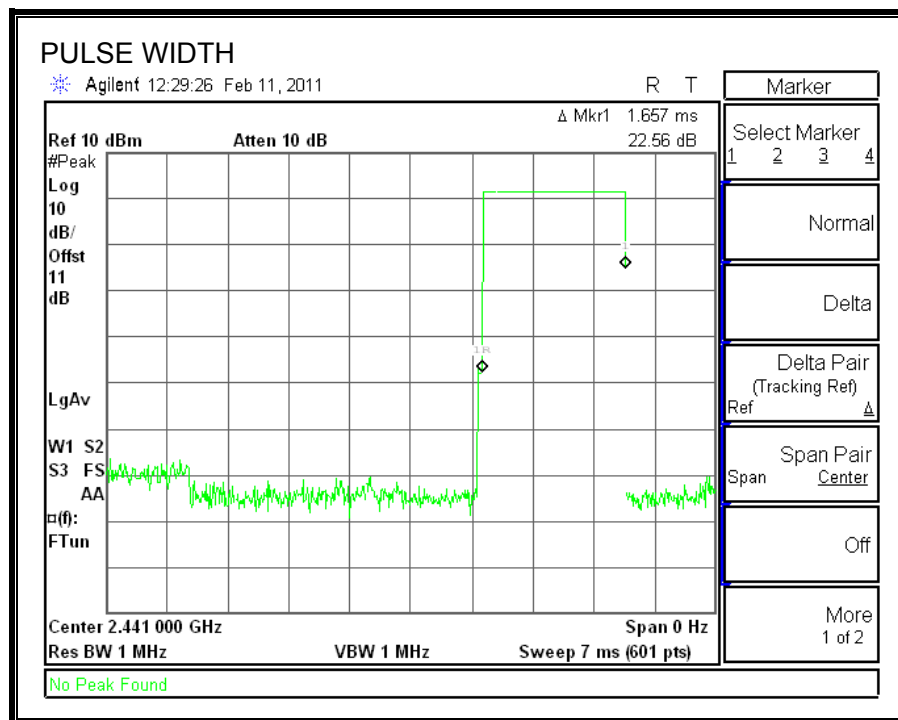


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

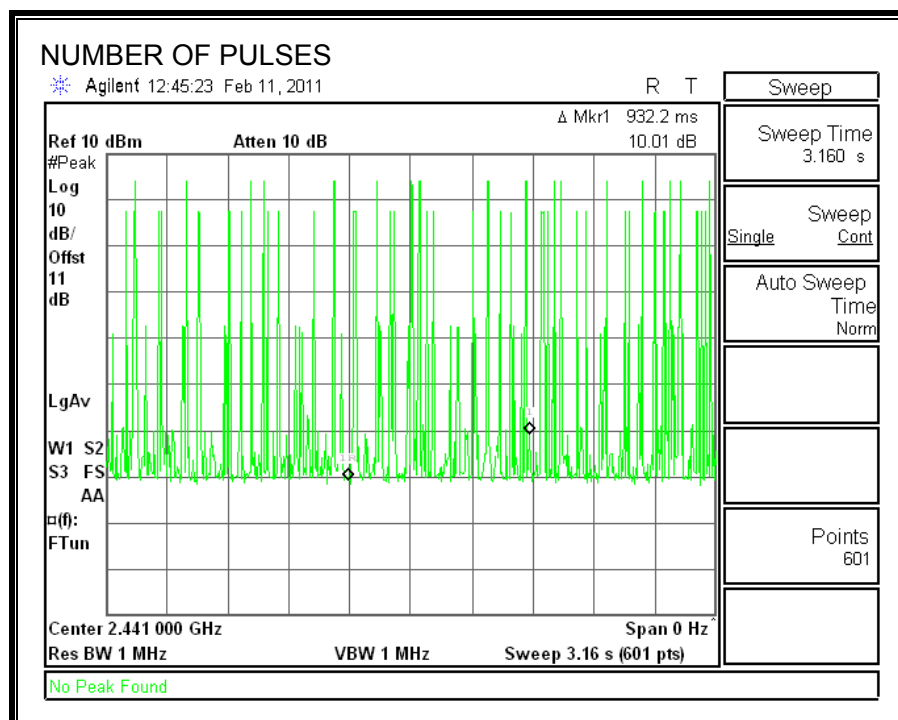


DH5

PULSE WIDTH

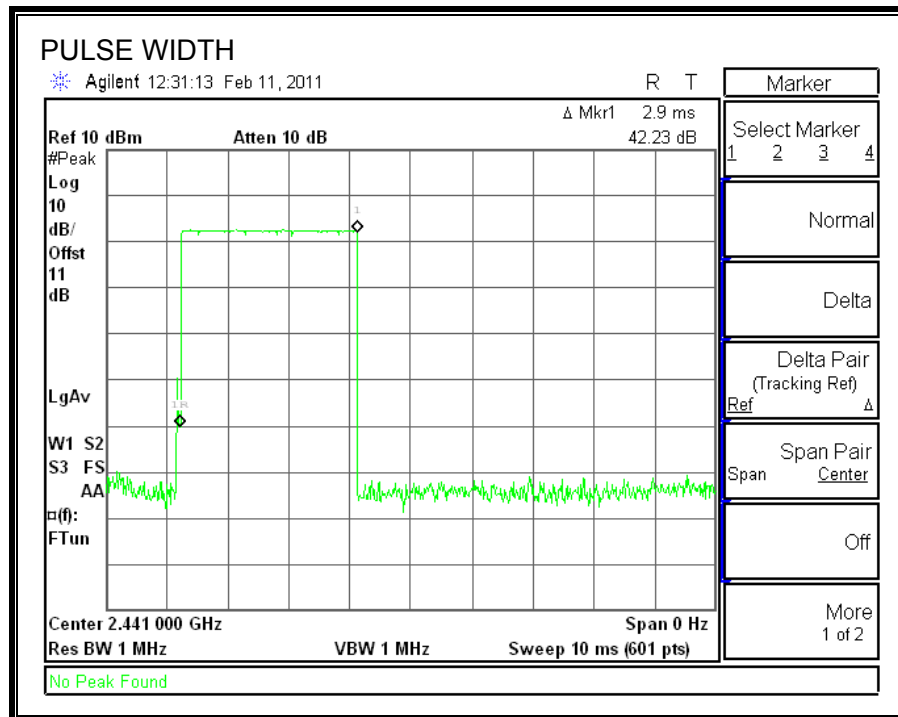

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

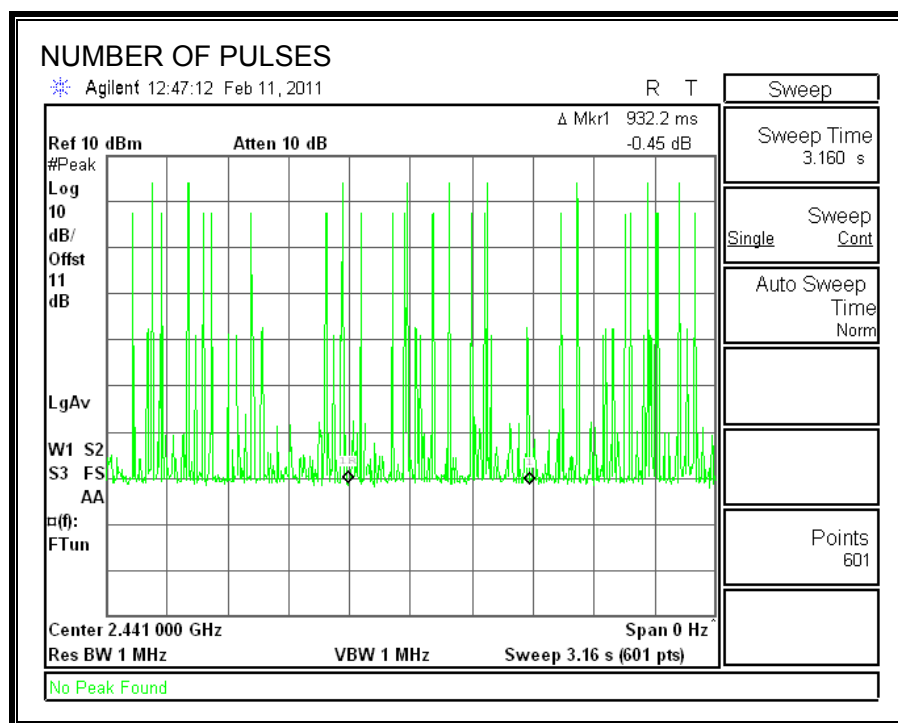

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	1.40	30	-28.60
Middle	2441	1.54	30	-28.46
High	2480	1.39	30	-28.61

OUTPUT POWER

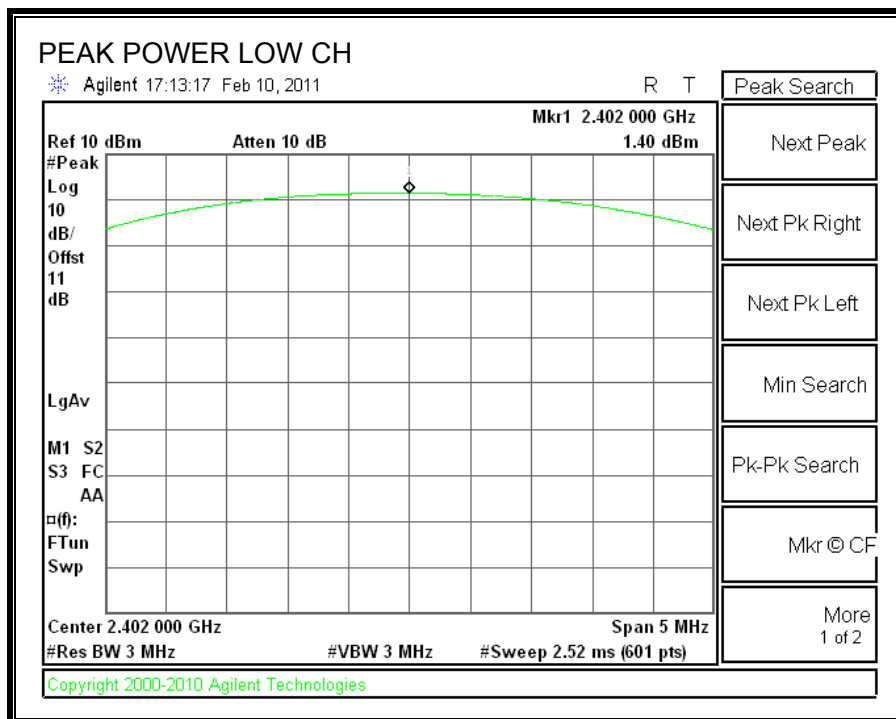

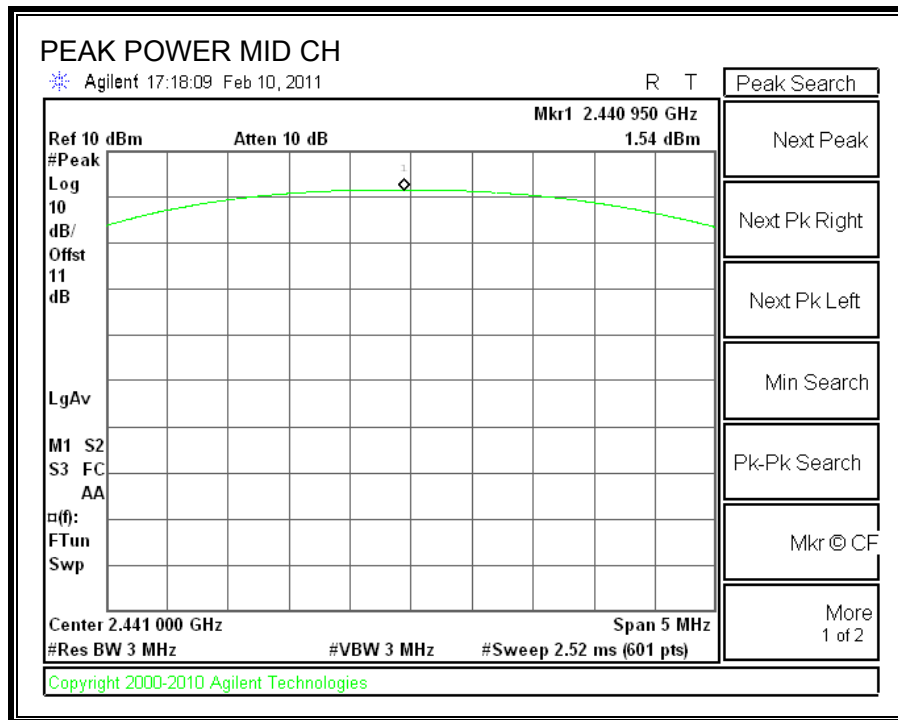

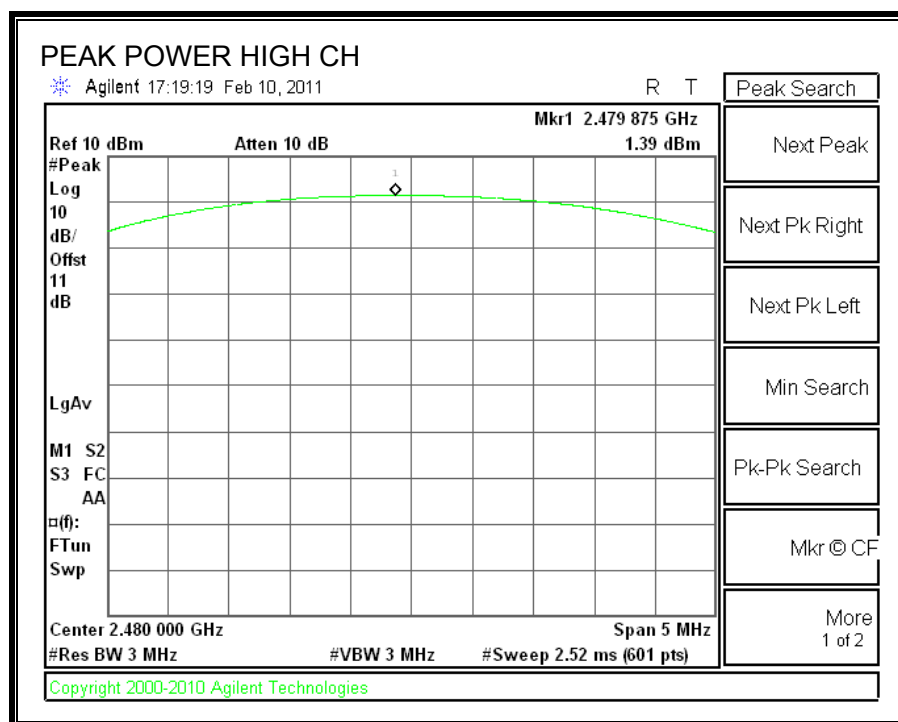

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	1.29
Middle	2441	1.47
High	2480	1.31

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

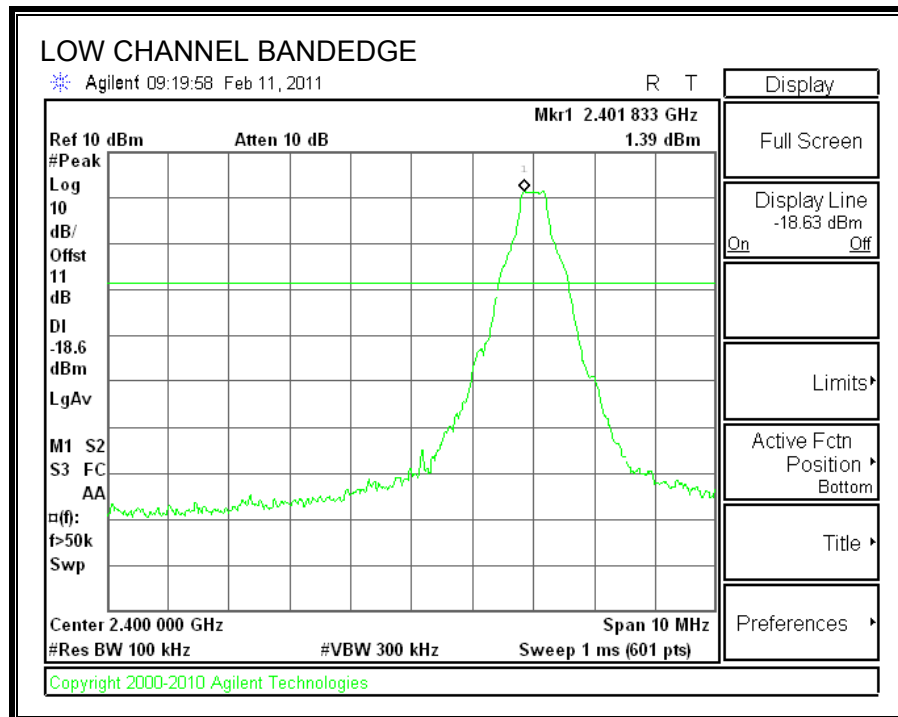

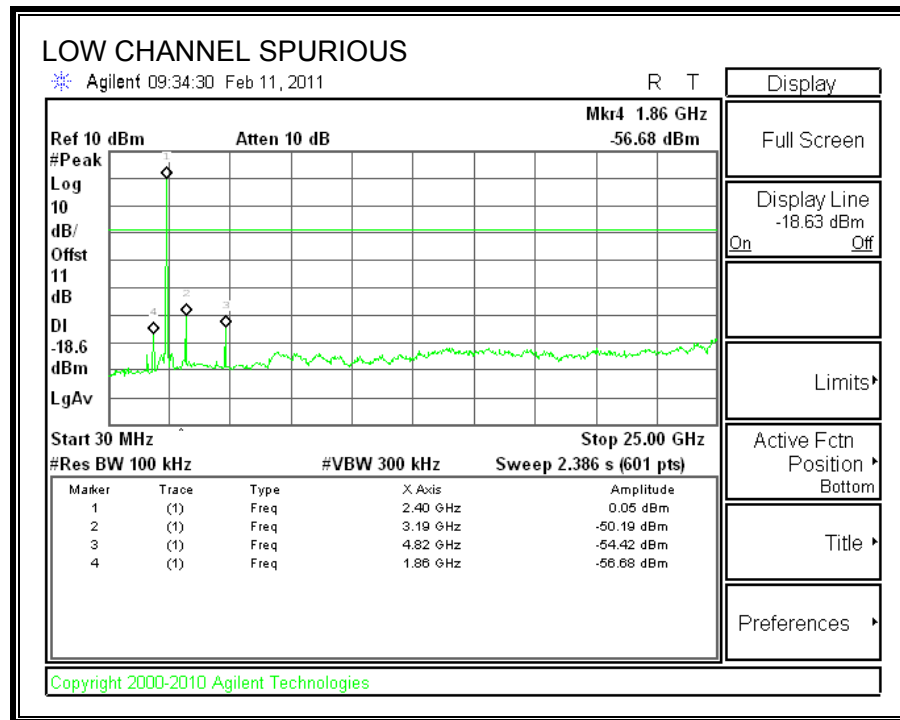



SPURIOUS EMISSIONS, MID CHANNEL

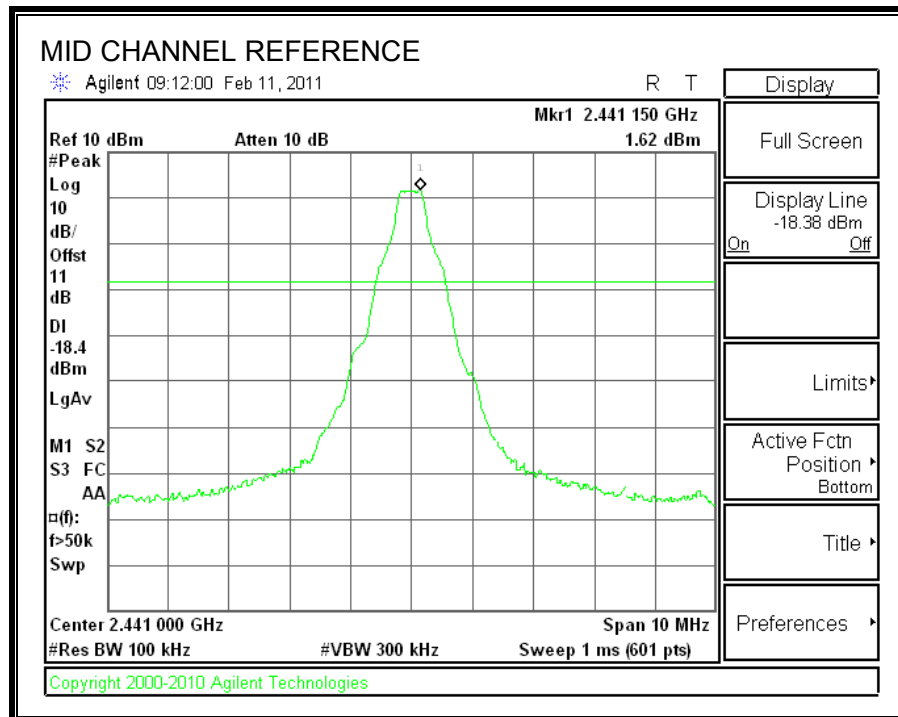

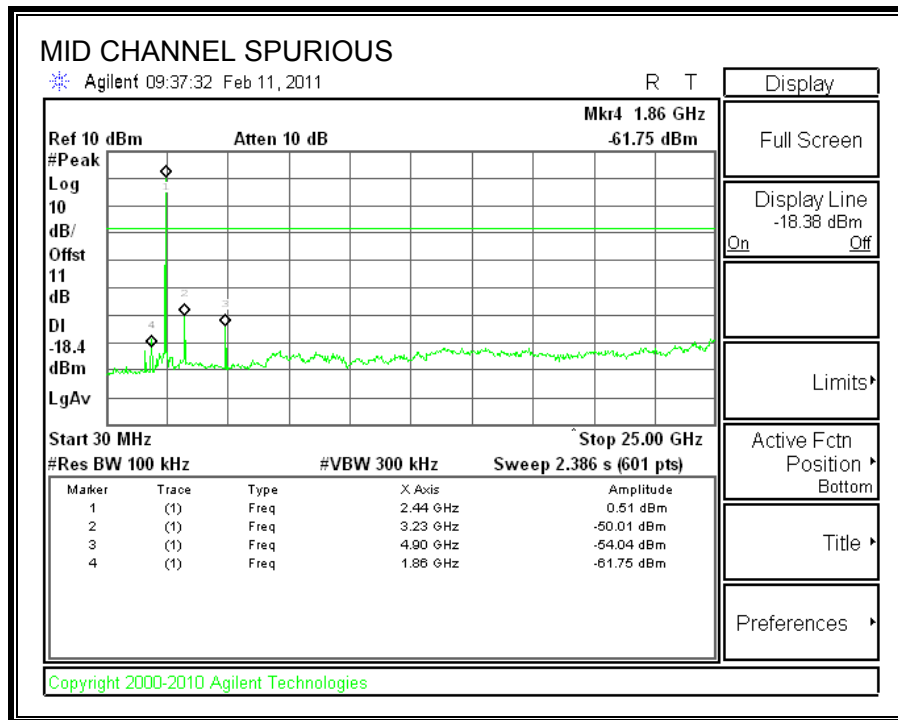



SPURIOUS EMISSIONS, HIGH CHANNEL

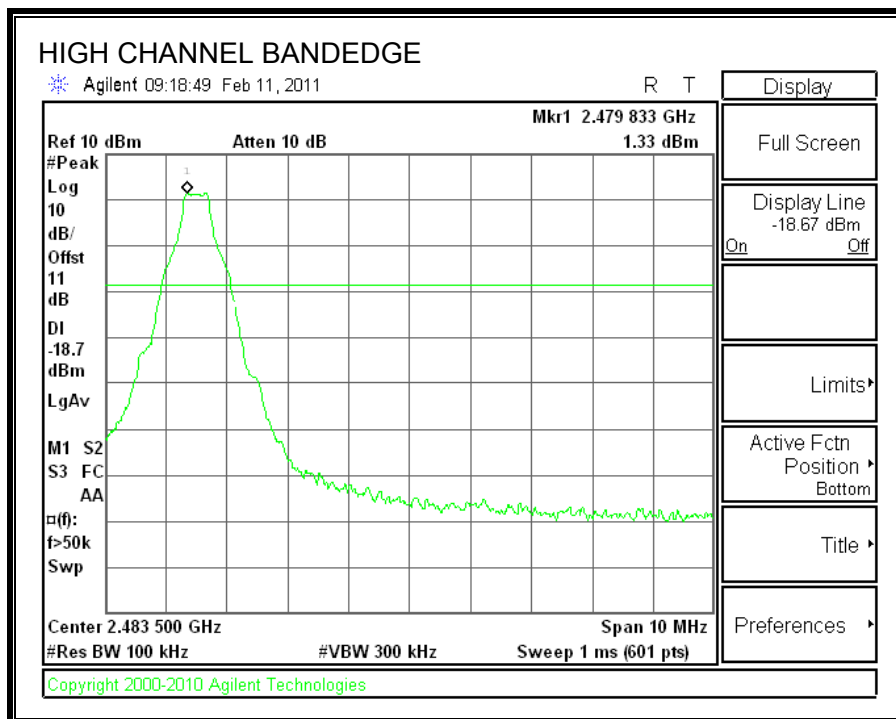

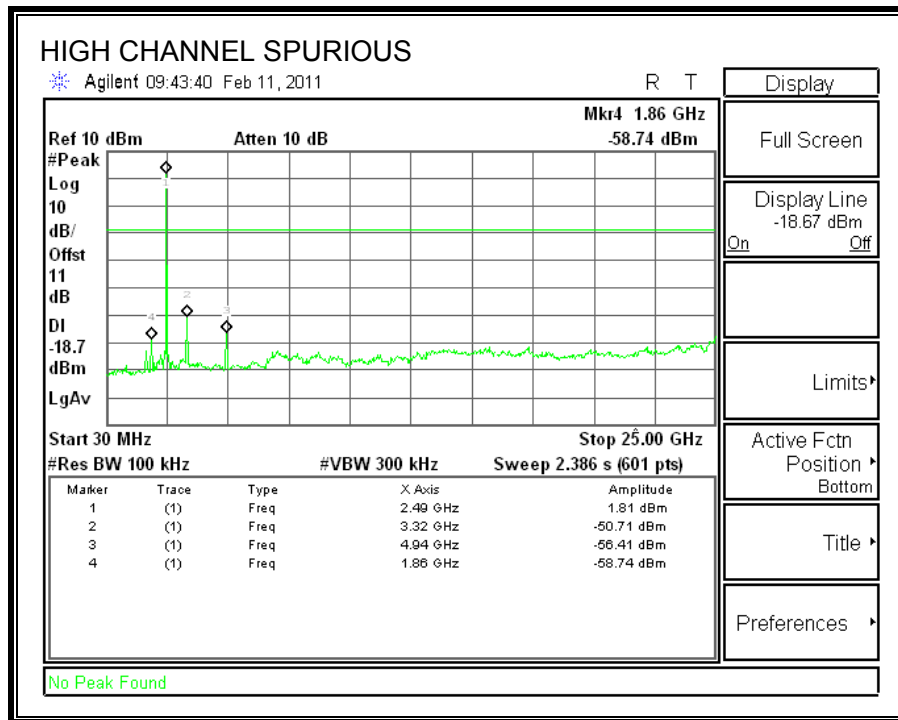

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

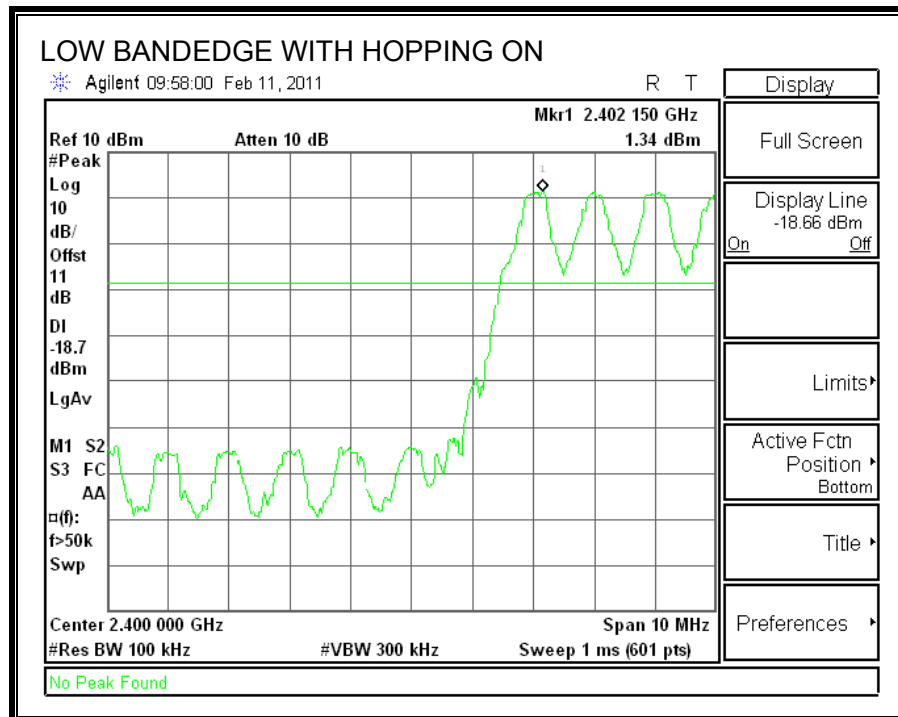

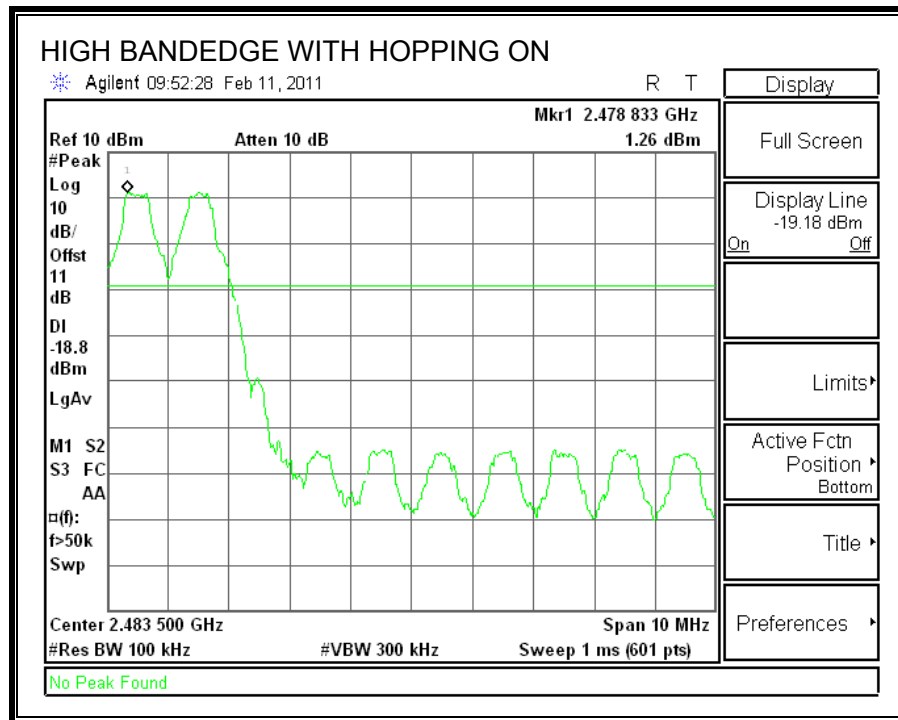

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.304	1.1489
Middle	2441	1.304	1.1724
High	2480	1.304	1.1954


20 dB BANDWIDTH

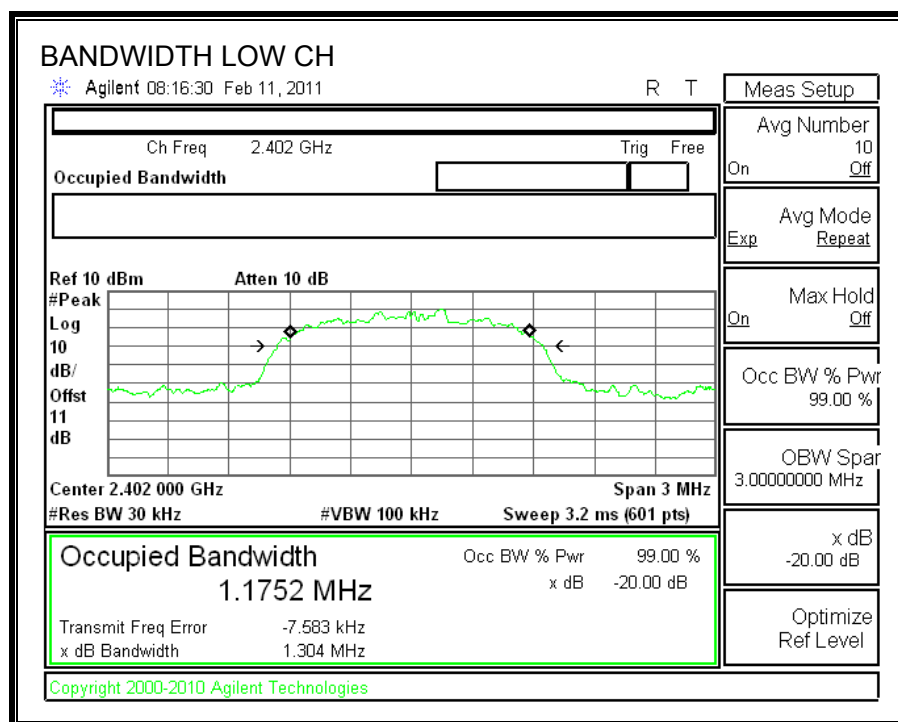


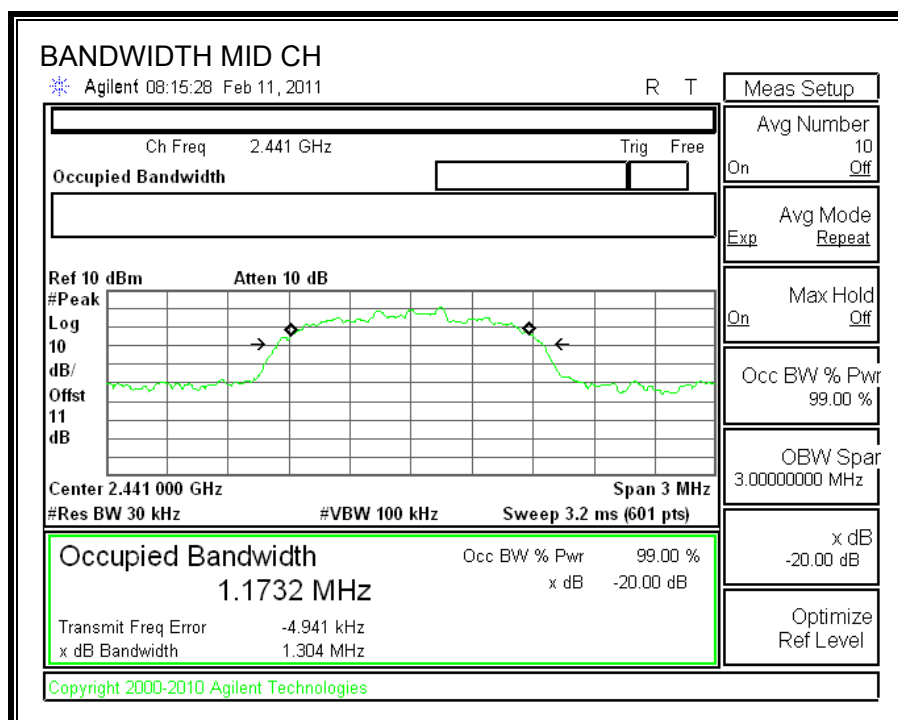


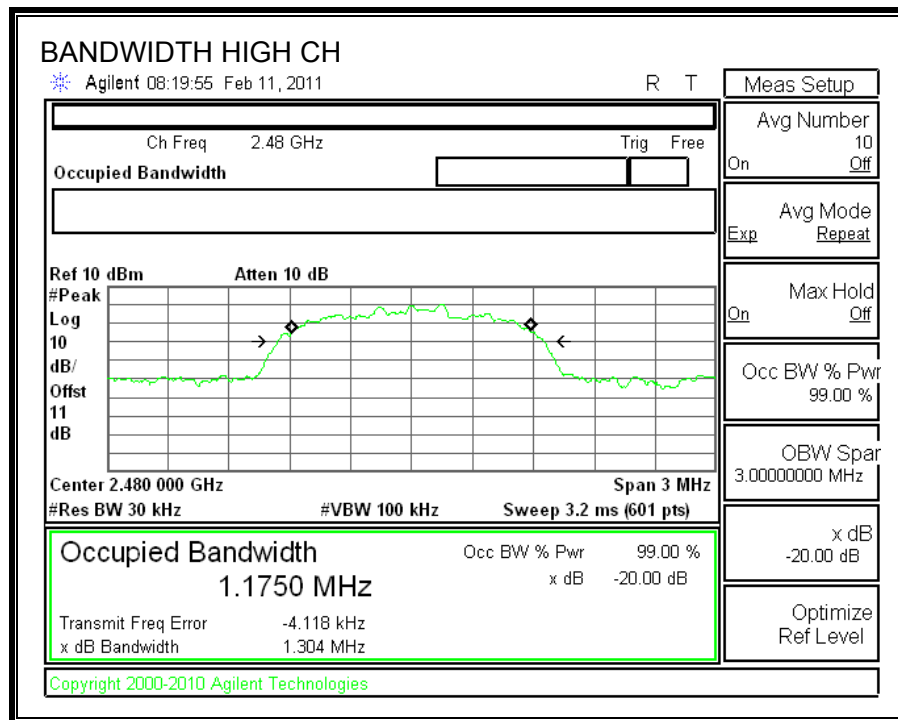

99% BANDWIDTH

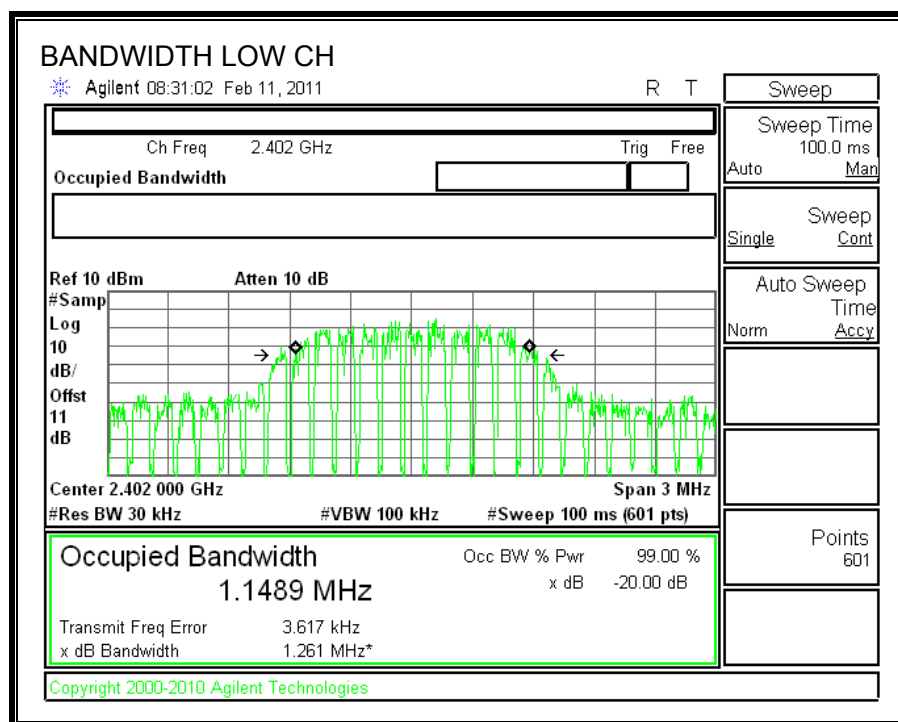

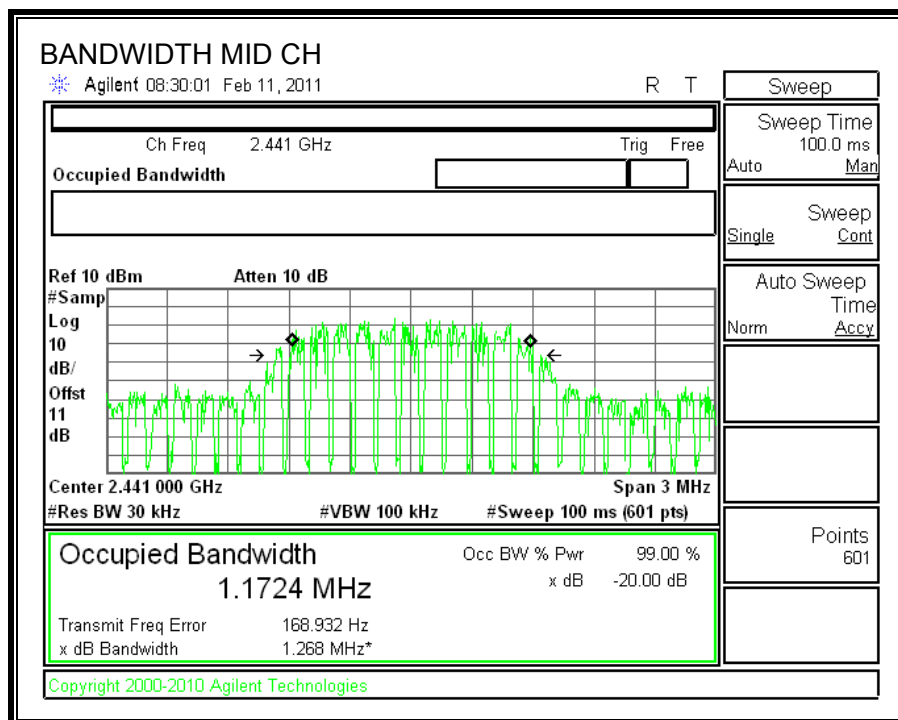

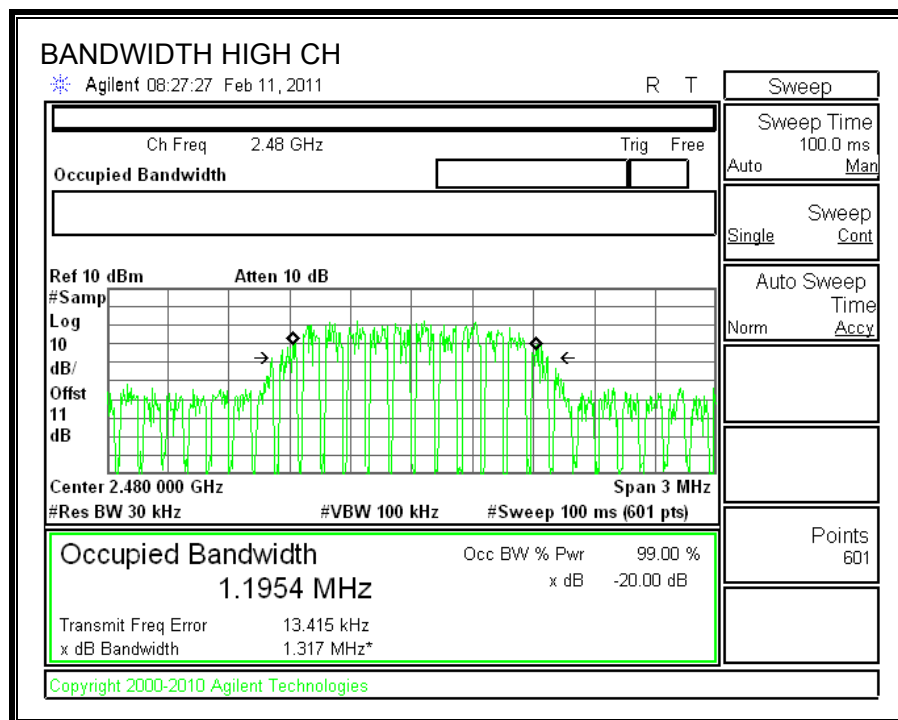

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

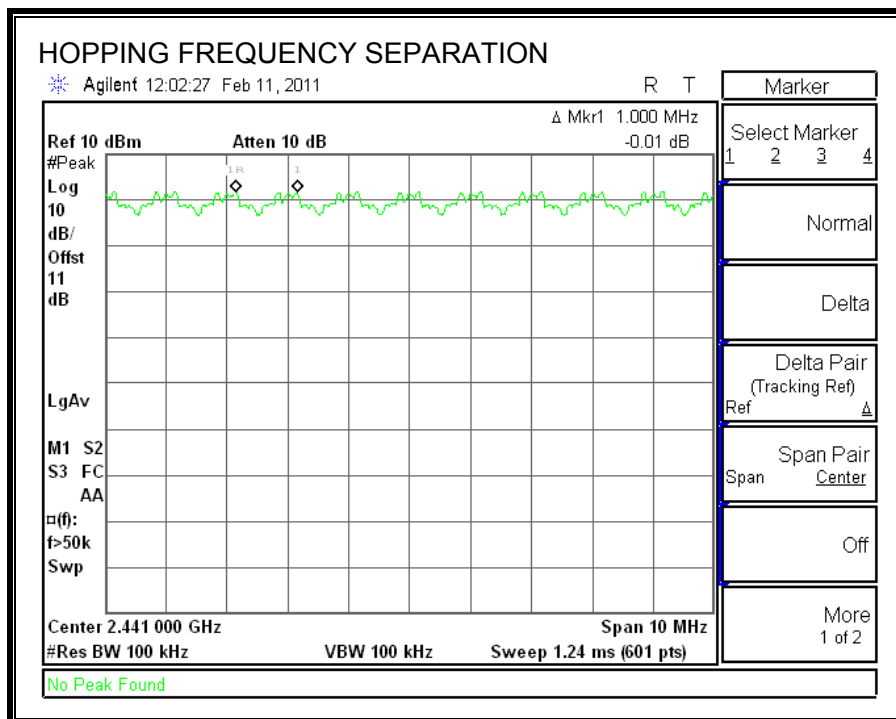

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

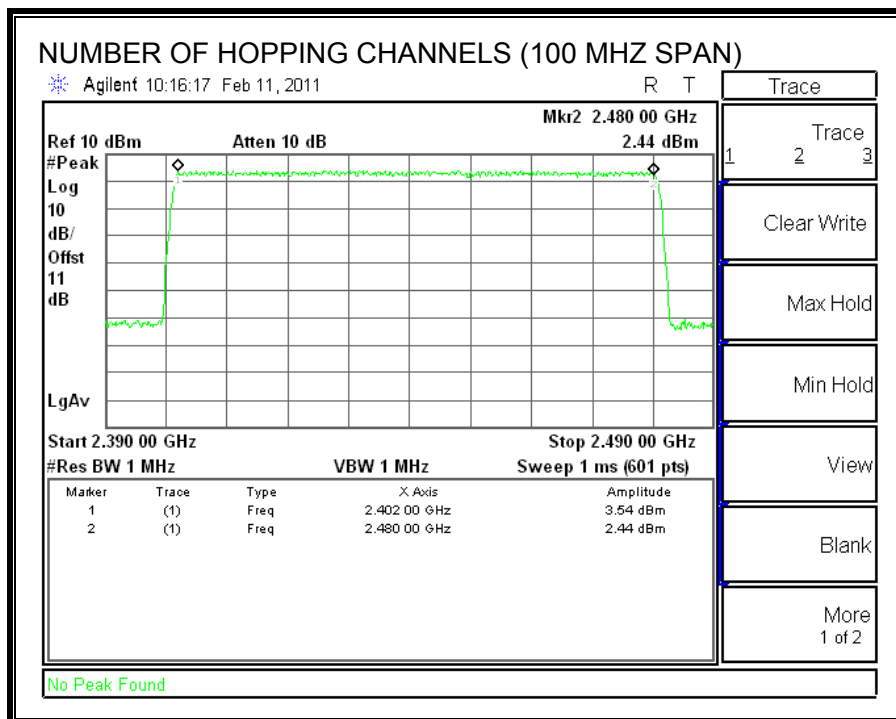

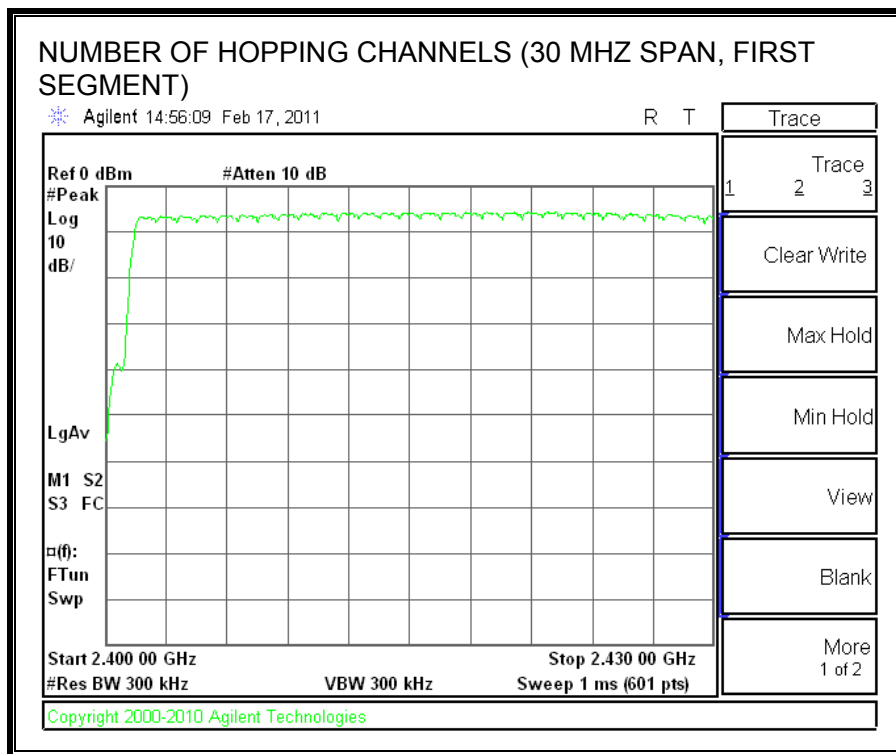

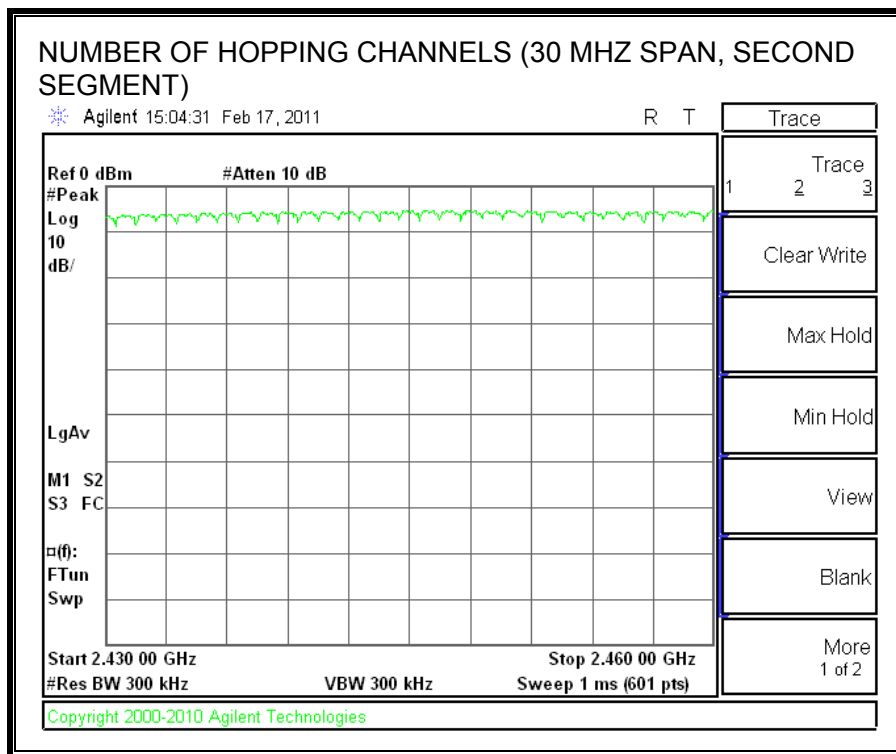

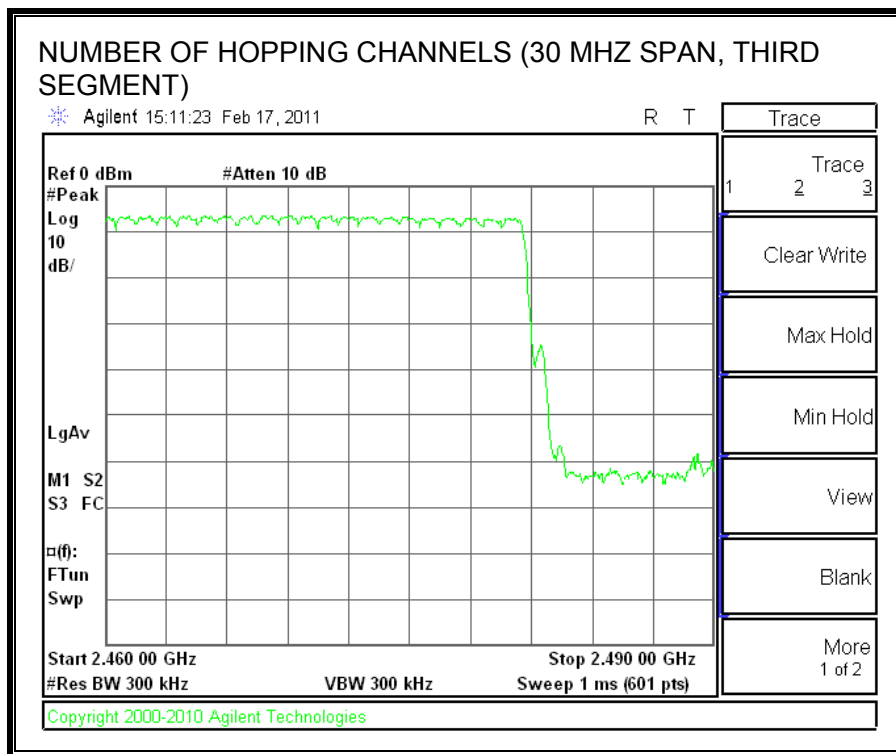

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.


RESULTS

8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.4	30	0.120	0.4	-0.280
DH3	1.668	17	0.284	0.4	-0.116
DH5	2.95	12	0.354	0.4	-0.046

DH1

PULSE WIDTH

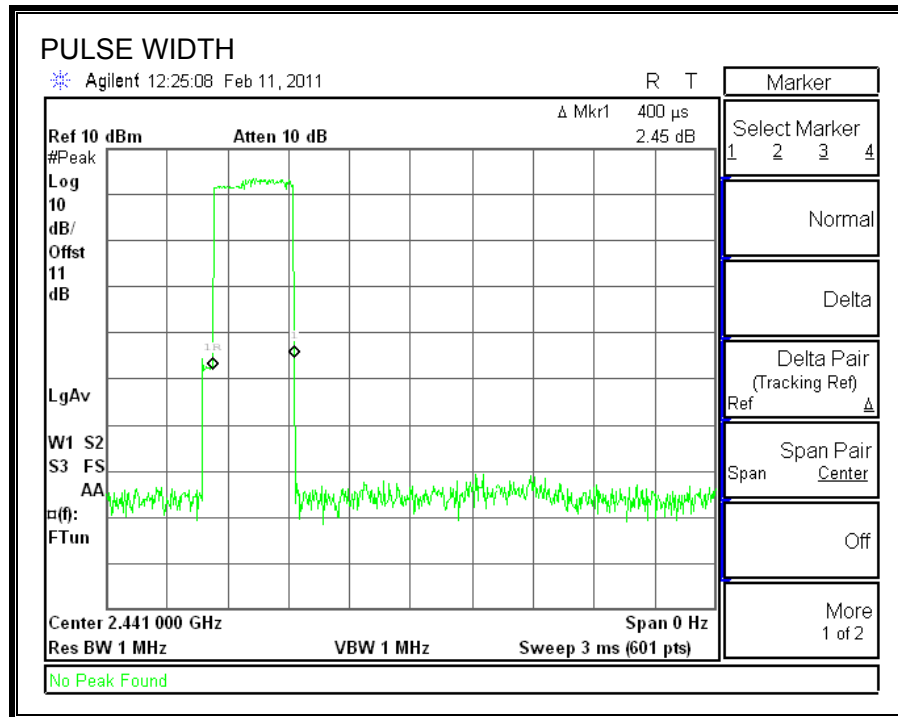


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

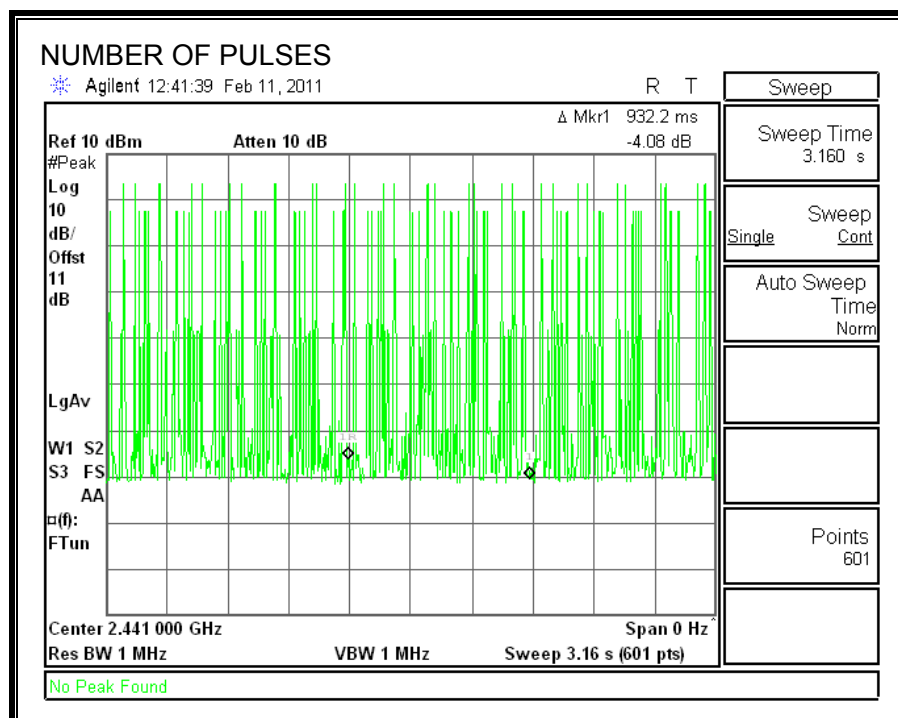


DH3

PULSE WIDTH

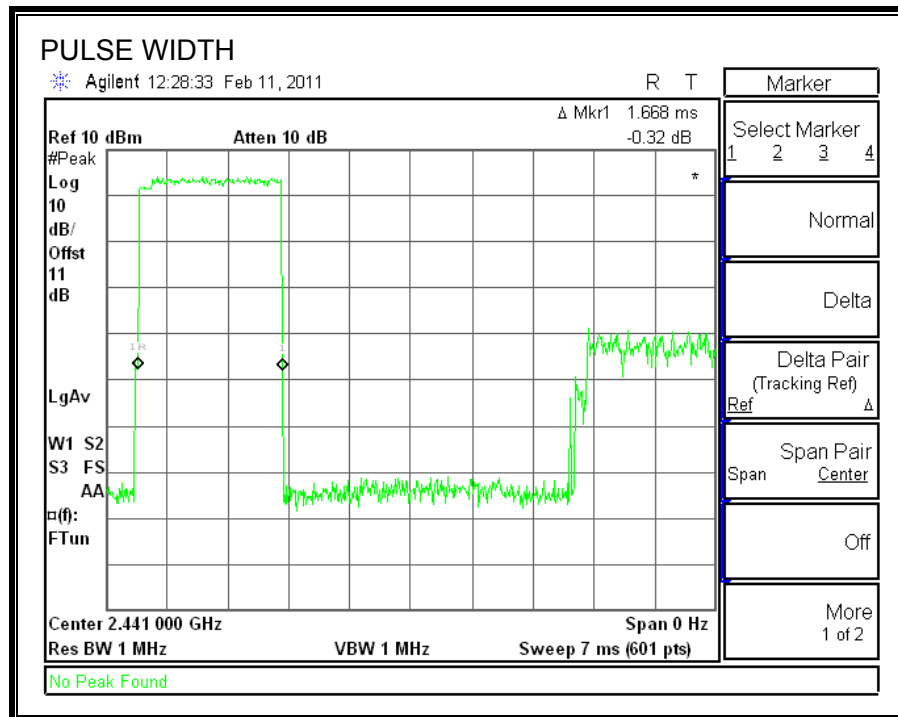


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

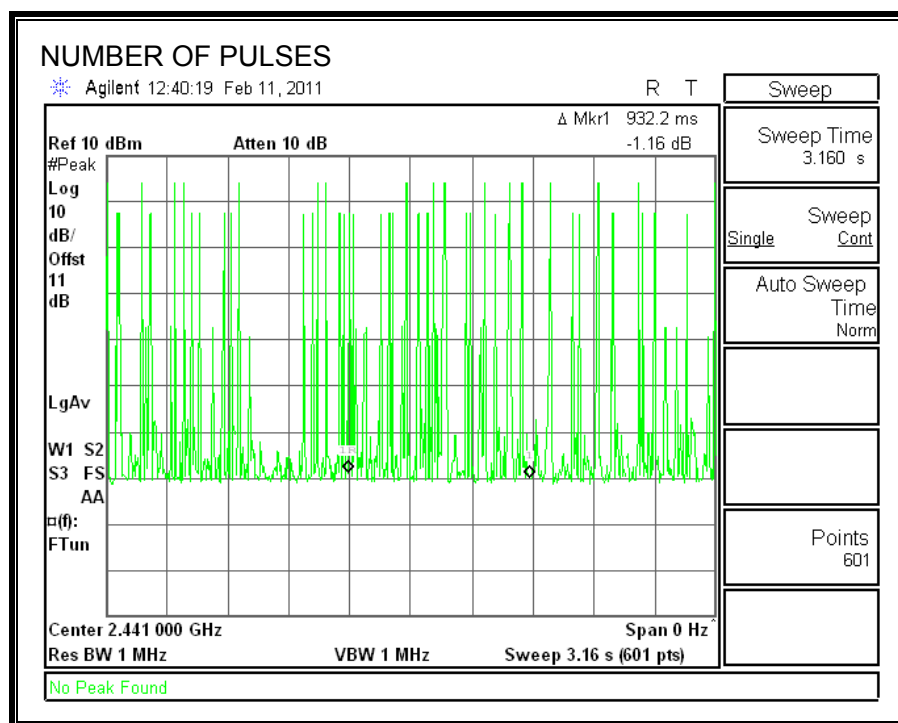


DH5

PULSE WIDTH

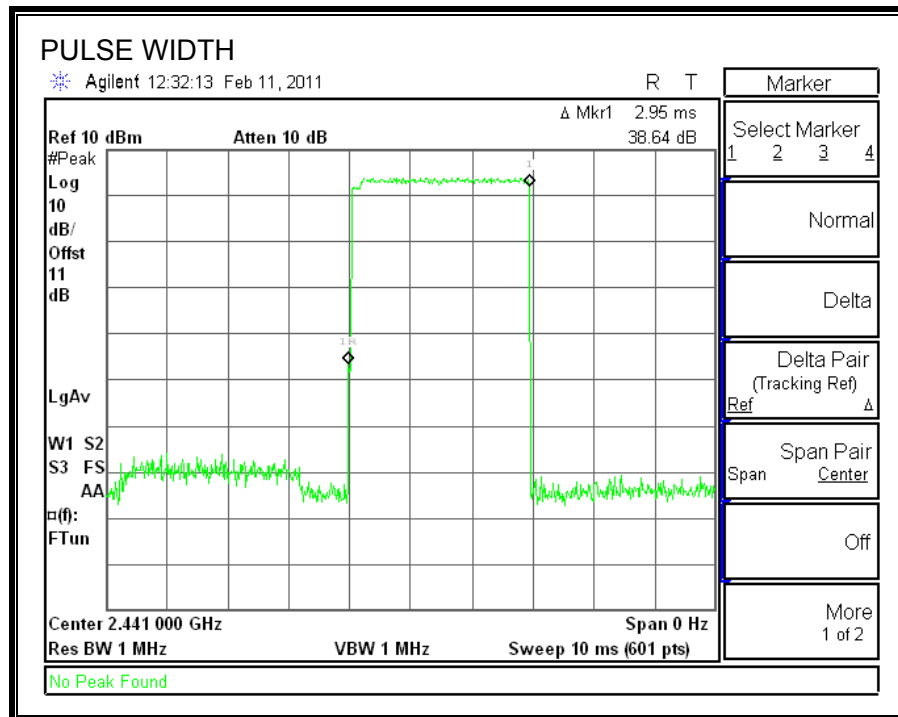

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

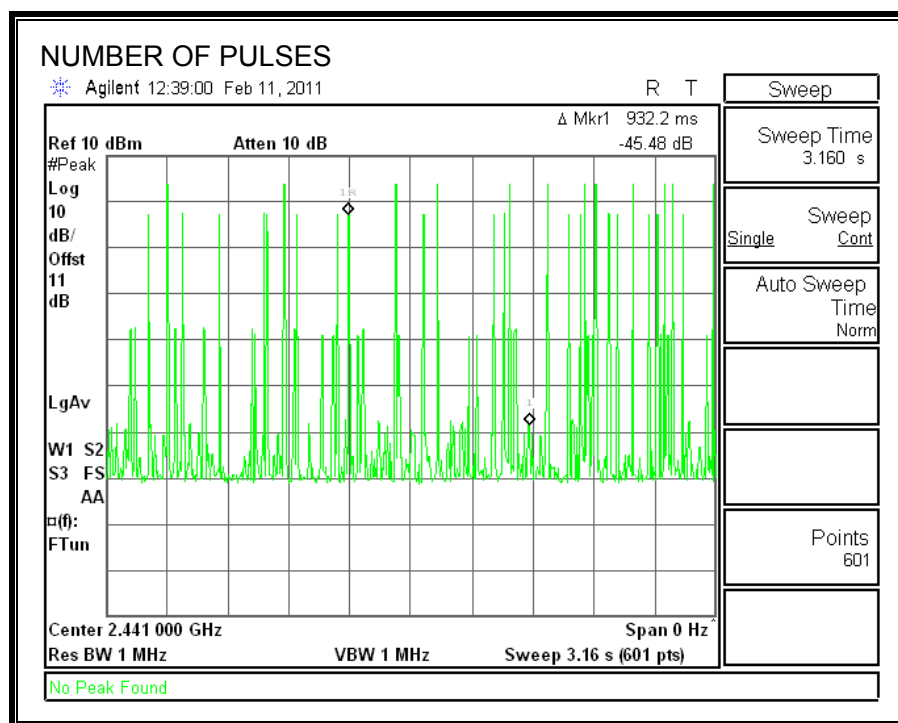

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.46	21	-16.51
Middle	2441	4.45	21	-16.52
High	2480	4.19	21	-16.78

OUTPUT POWER

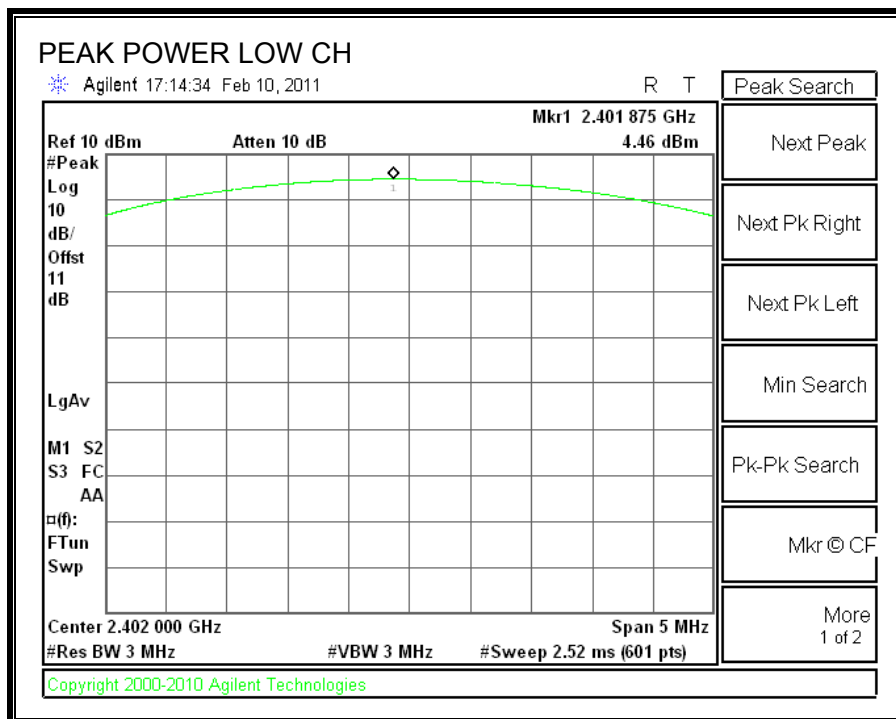

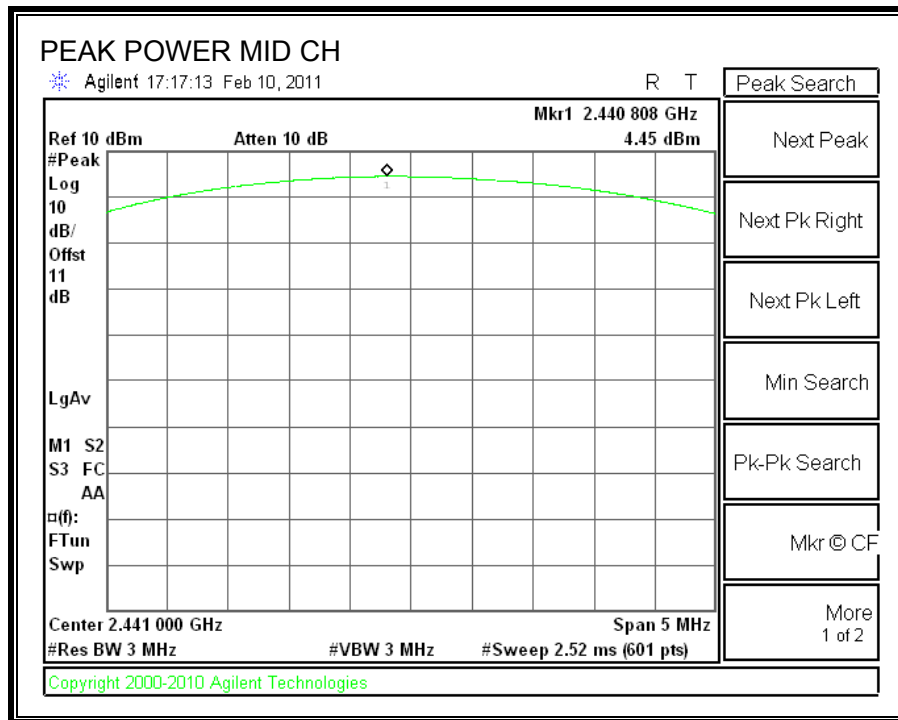

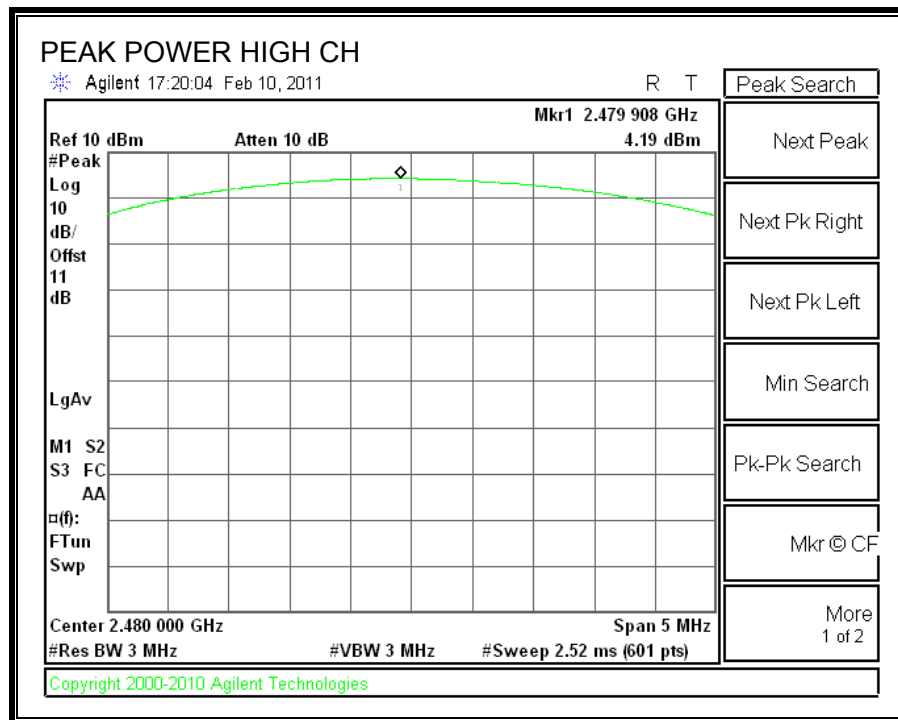

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	1.75
Middle	2441	1.89
High	2480	1.69

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

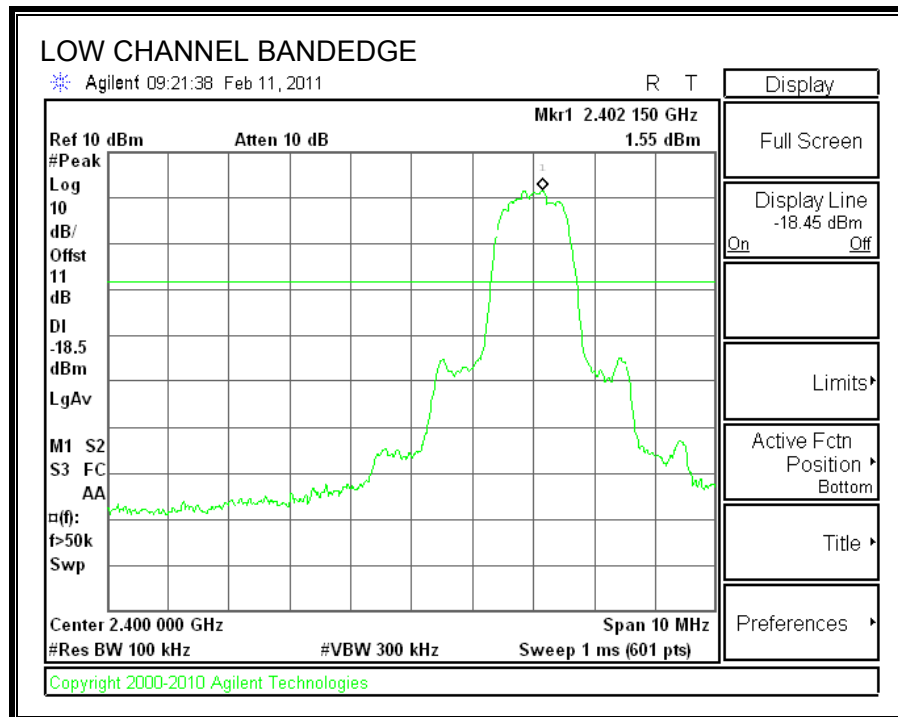

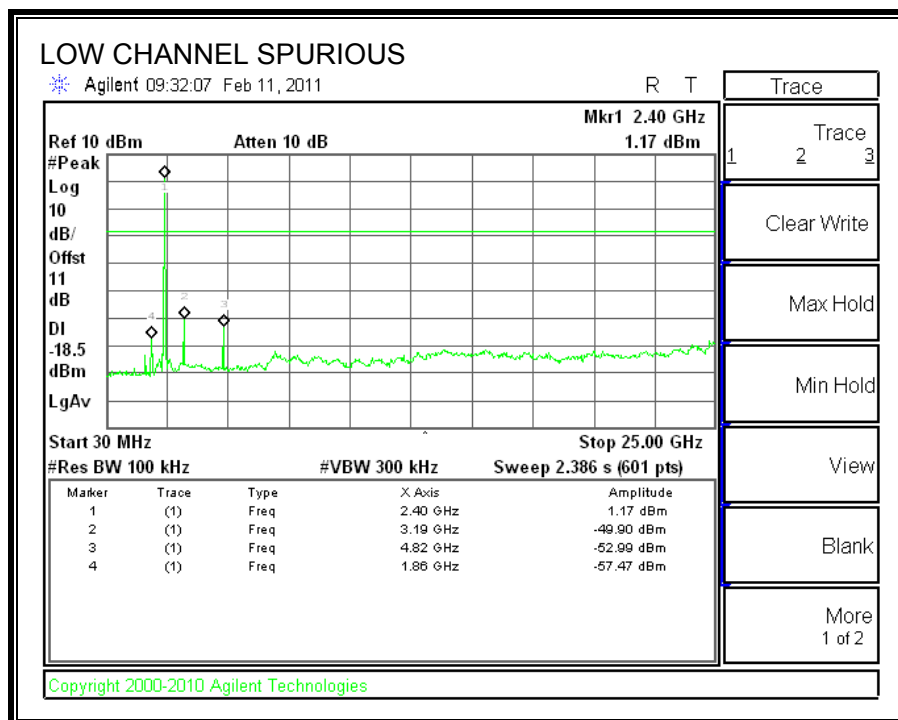



SPURIOUS EMISSIONS, MID CHANNEL

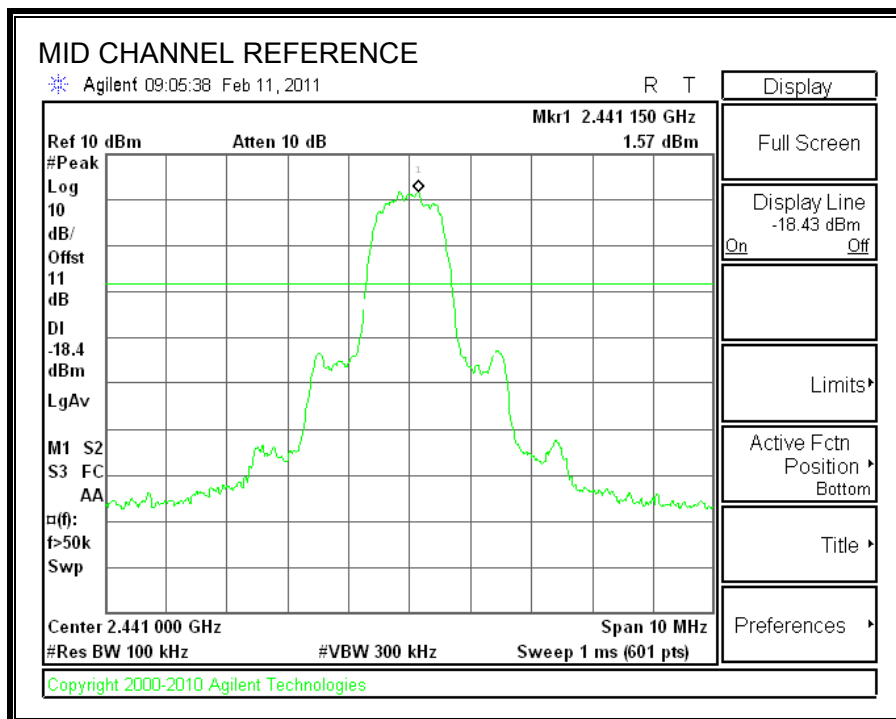

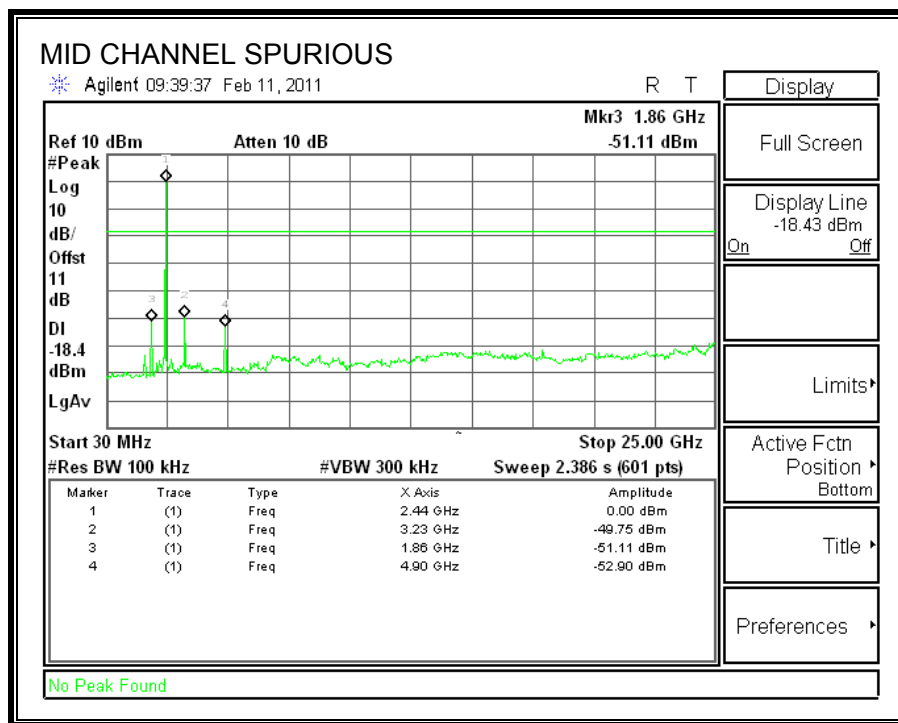



SPURIOUS EMISSIONS, HIGH CHANNEL

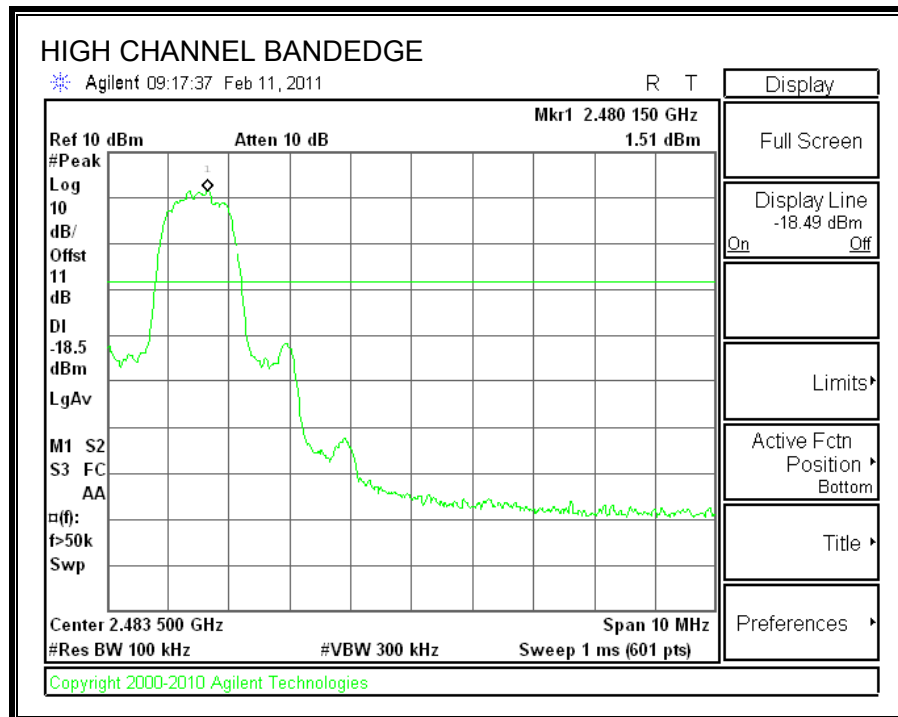

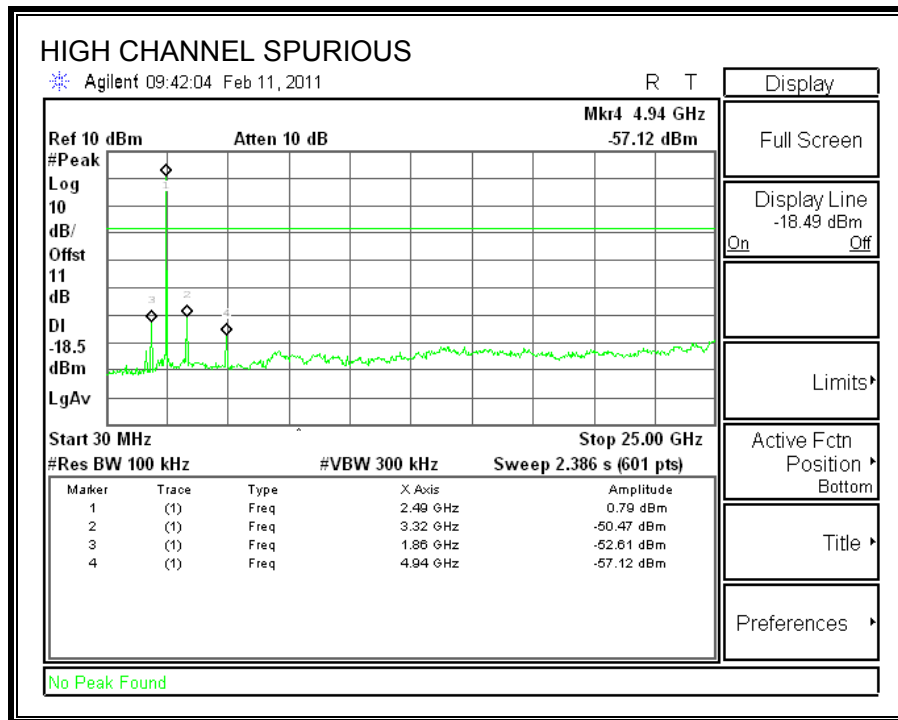

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

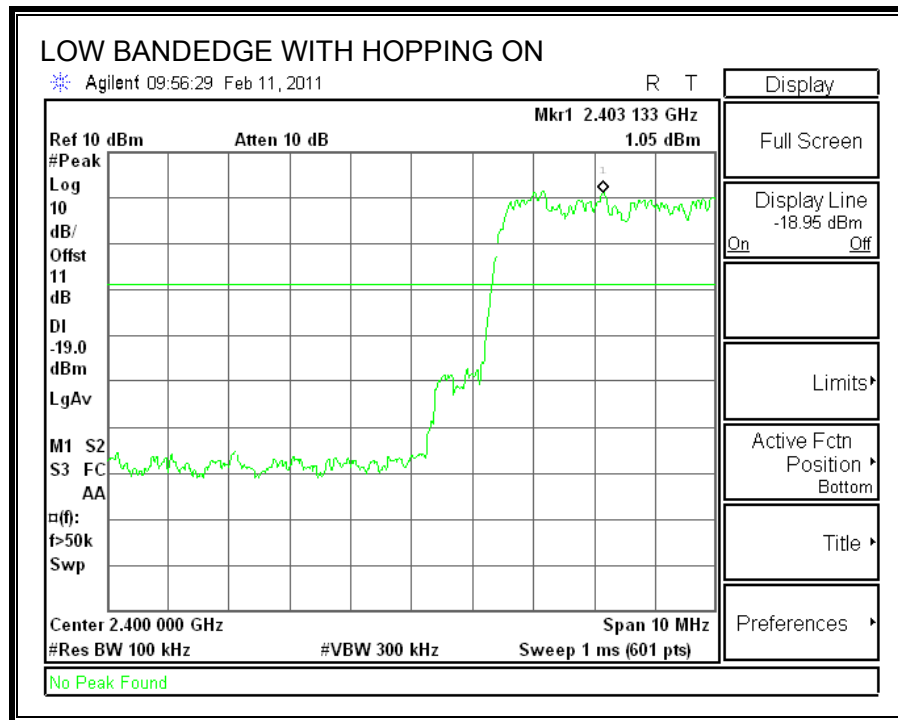

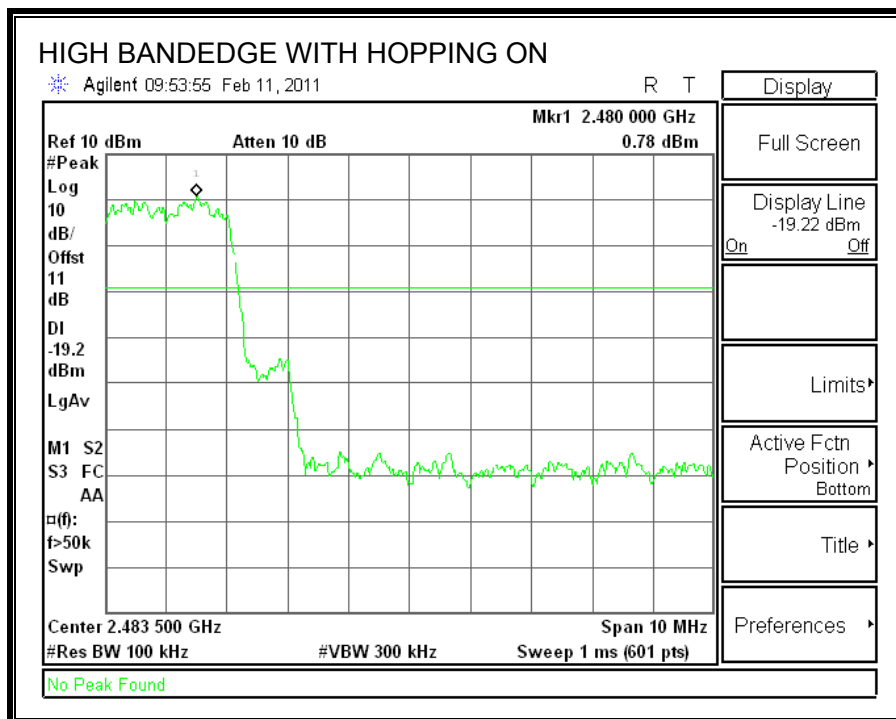

7.3. LE GFSK MODE

7.3.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (kHz)
Low	2402	1.099	954.0432
Middle	2440	1.093	989.3745
High	2480	1.092	931.183


20 dB BANDWIDTH

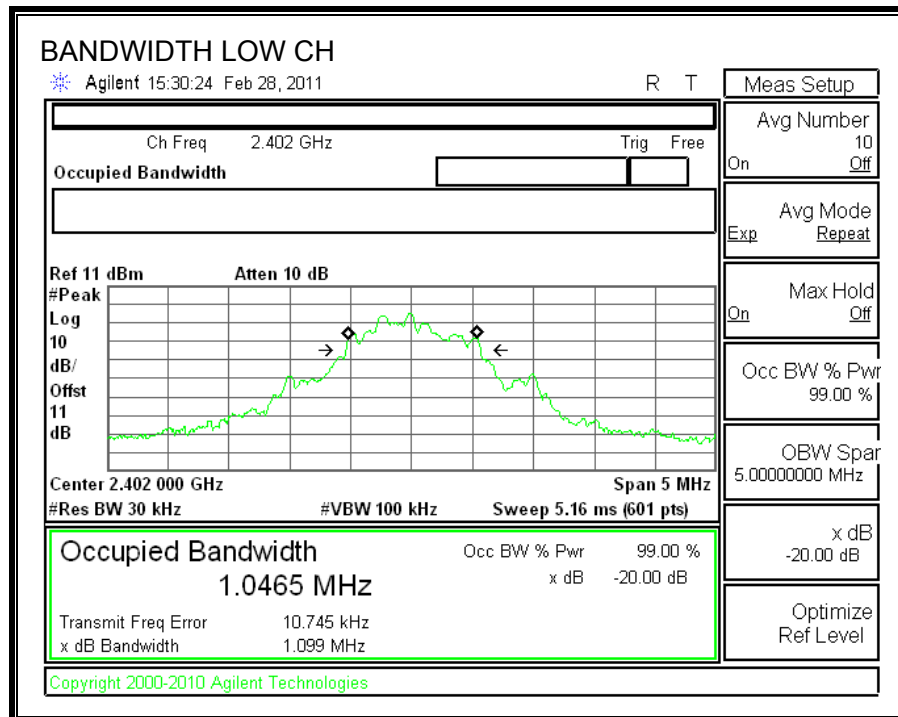


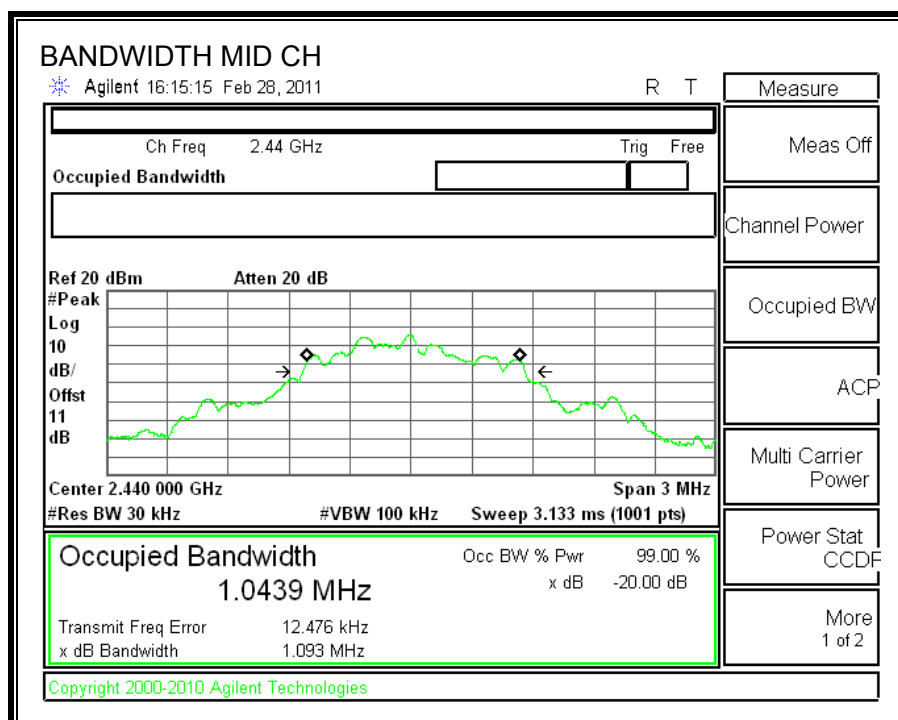

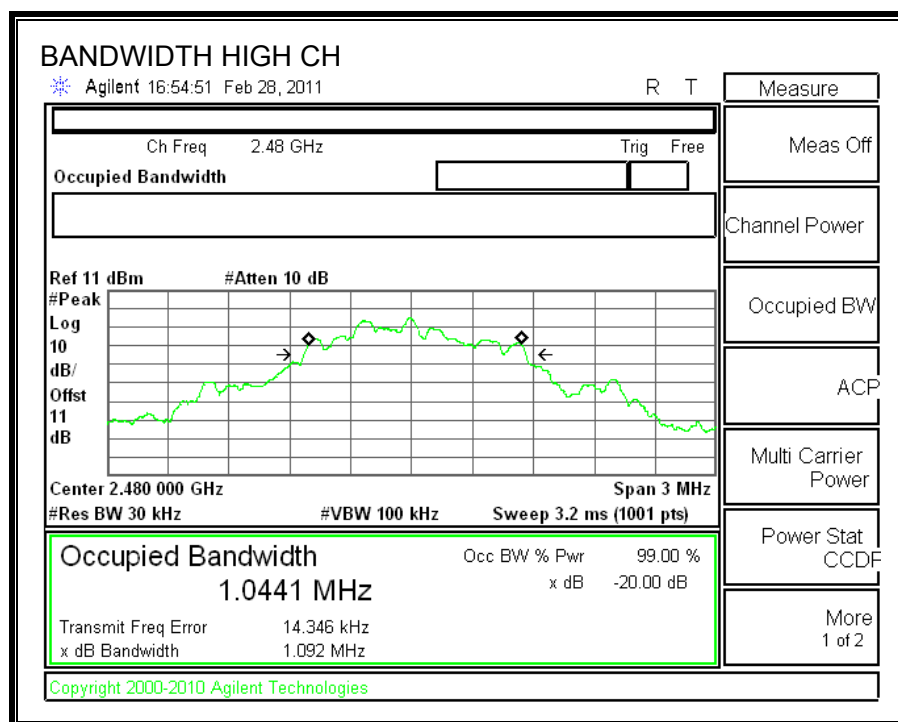

99% BANDWIDTH

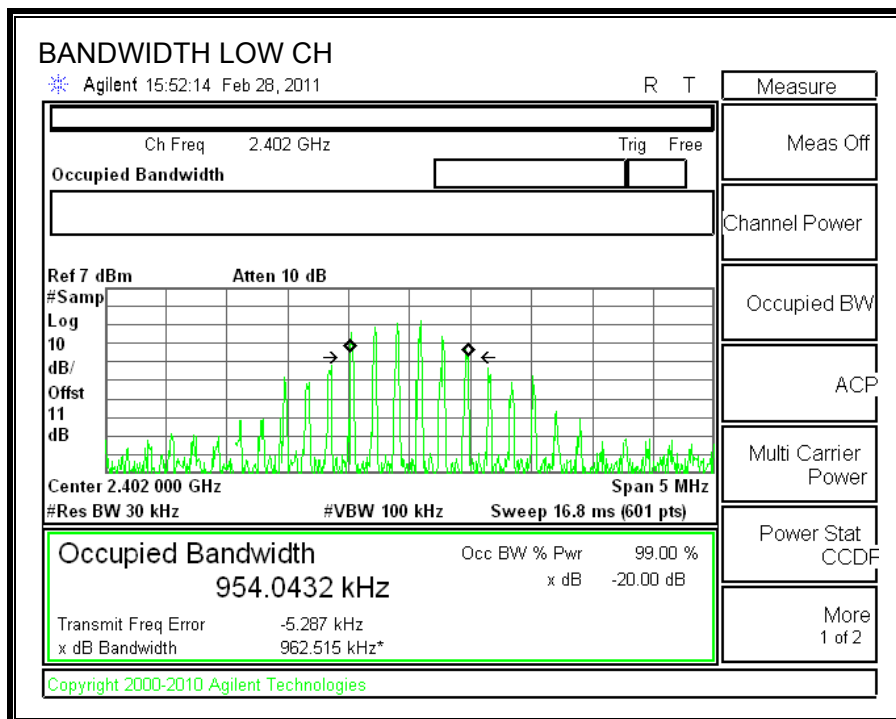

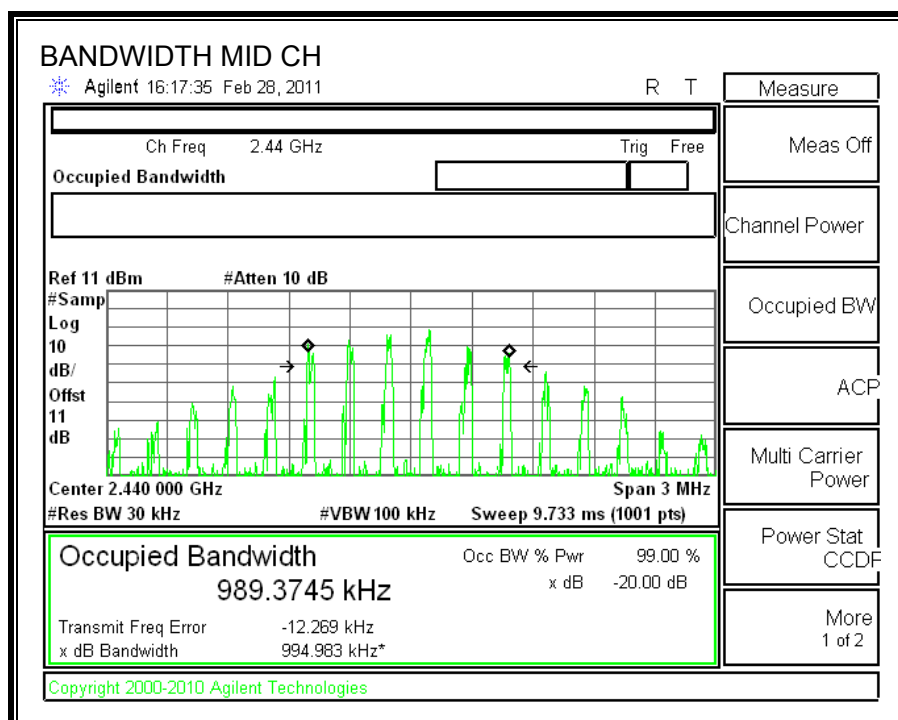



7.3.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

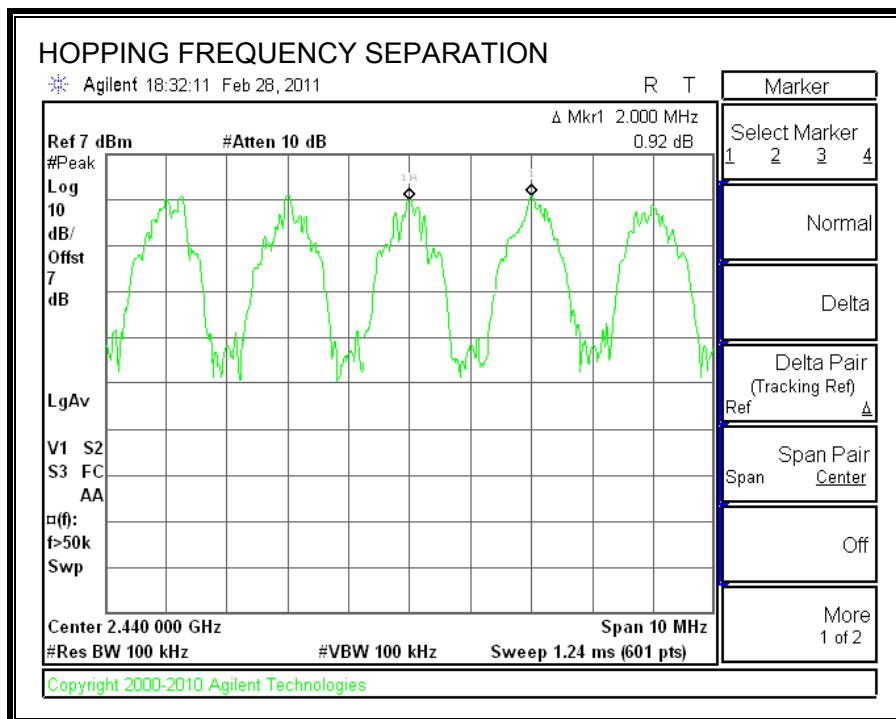

7.3.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


40 Channels observed, missing three channels at 2402, 2426 and 2480MHz for advertising.

NUMBER OF HOPPING CHANNELS

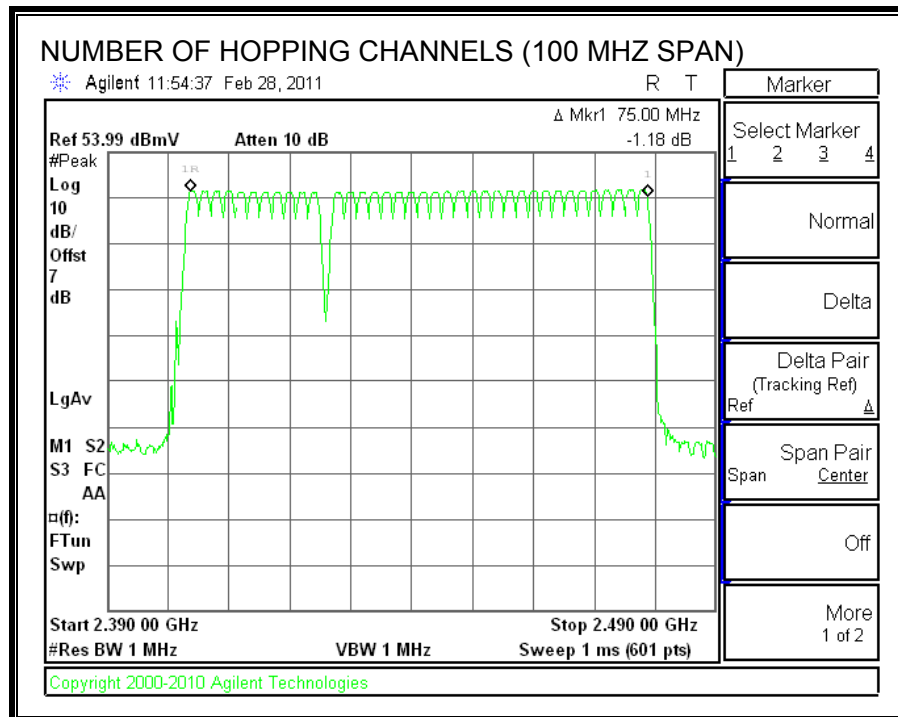

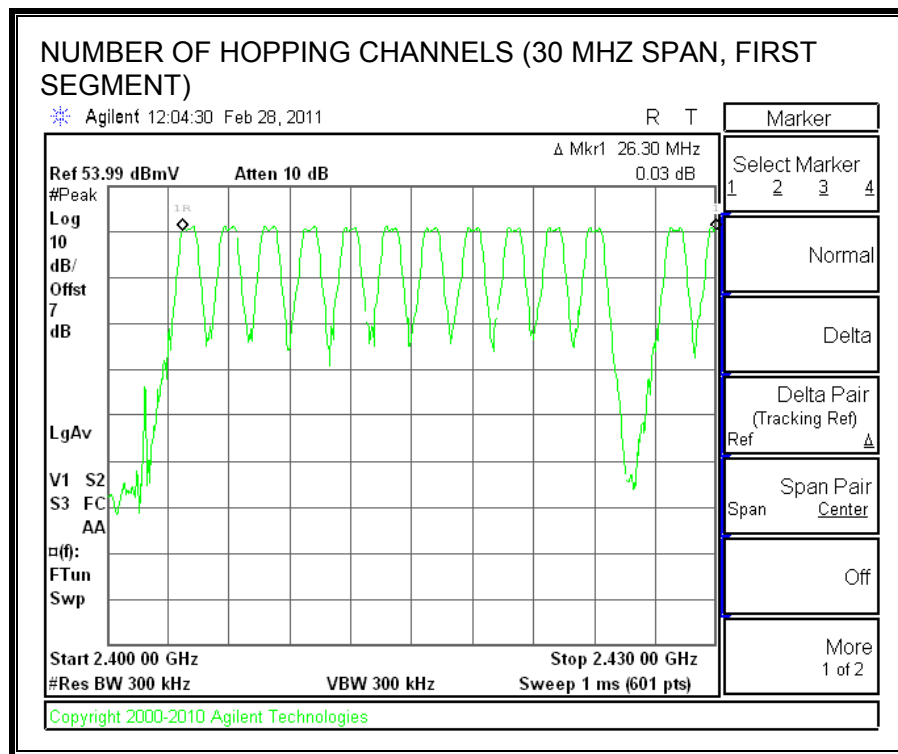

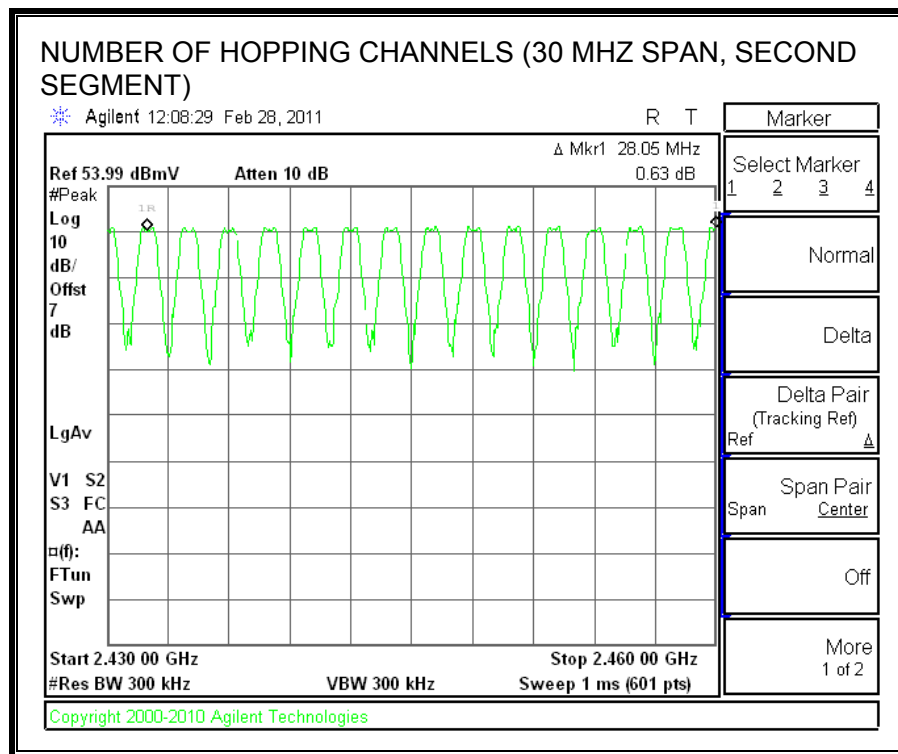

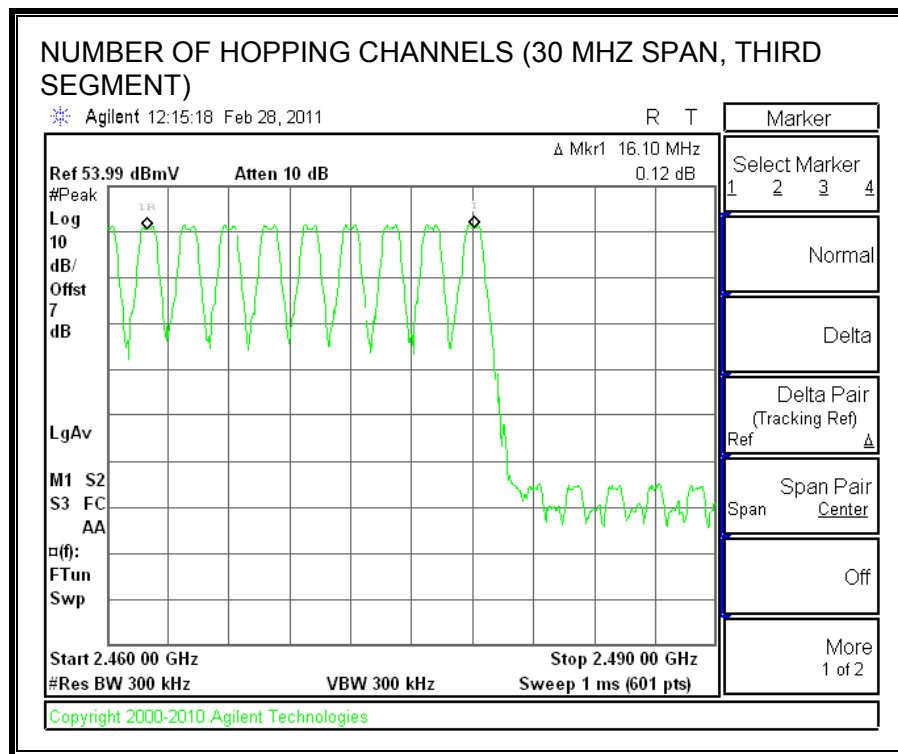

7.3.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.6 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 1.6 second period (39 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 1.6 \text{ s}) * \text{pulse width}$.


RESULTS

Time Of Occupancy = 6 pulses * 2.6407-(0.1241 *7) msec = 2.0036 msec


LE Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 1.6 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
LE Mode	1.772	6	0.106	0.4	0.294


PULSE WIDTH (On + Off Time)

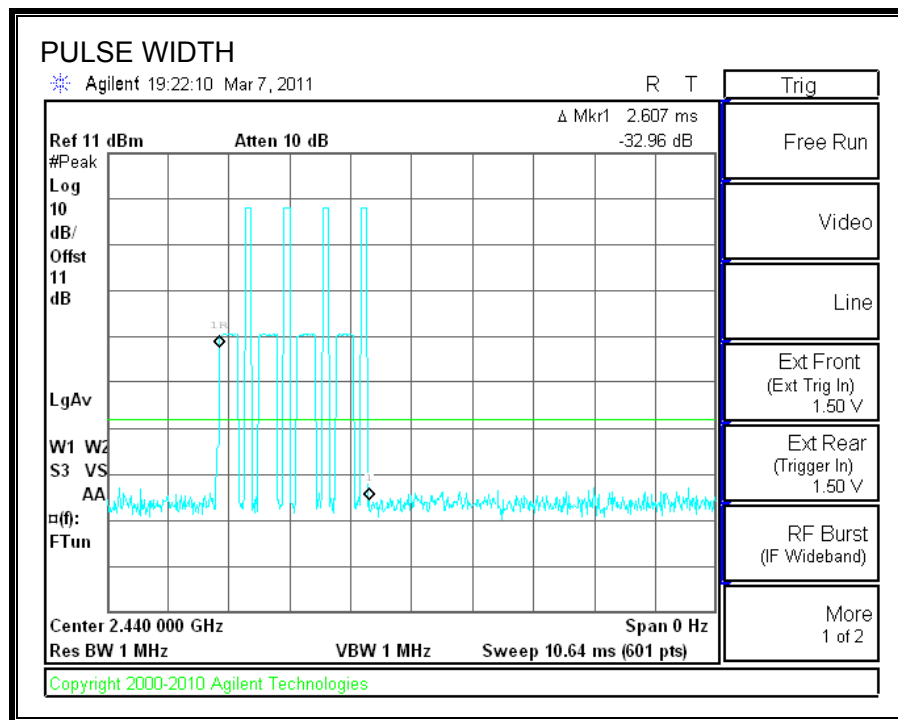

OFF TIME

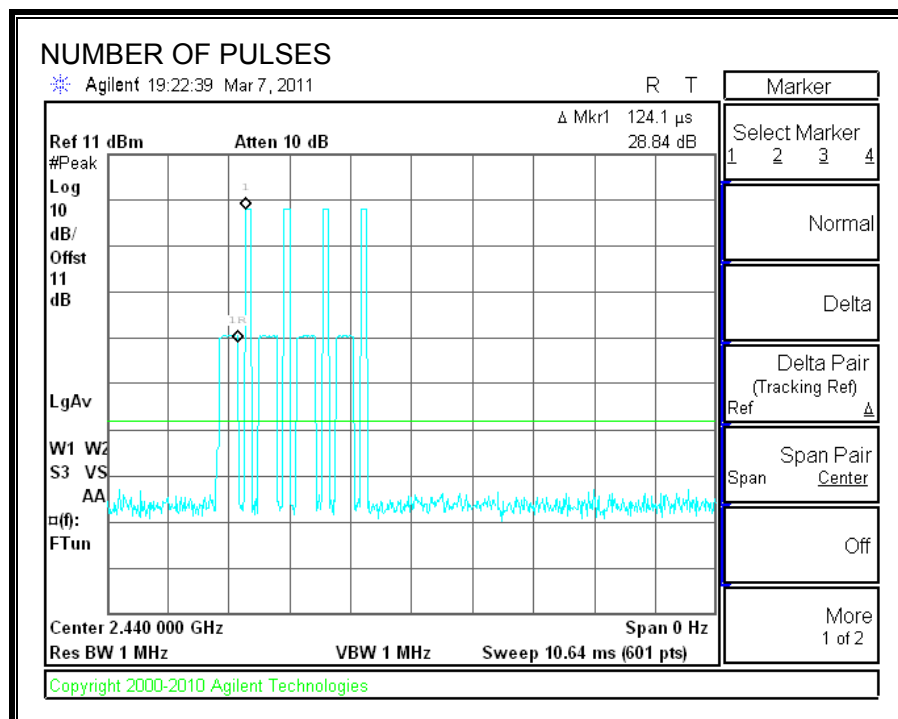

NUMBER OF PULSES IN 1.6 SECOND OBSERVATION PERIOD

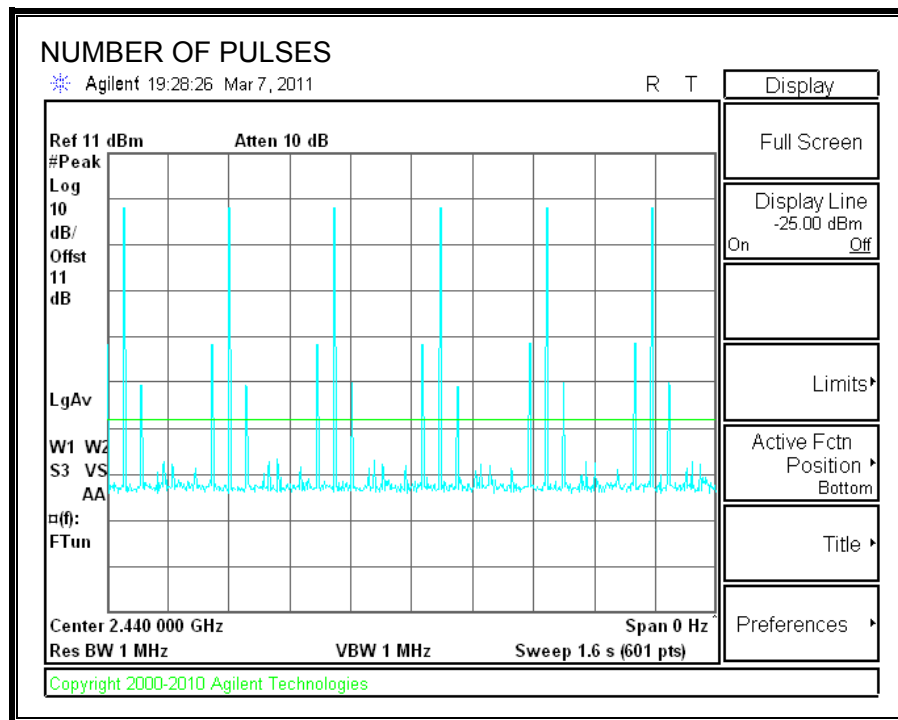

7.3.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-0.92	30	-30.92
Middle	2440	-1.06	30	-31.06
High	2480	-1.12	30	-31.12

OUTPUT POWER

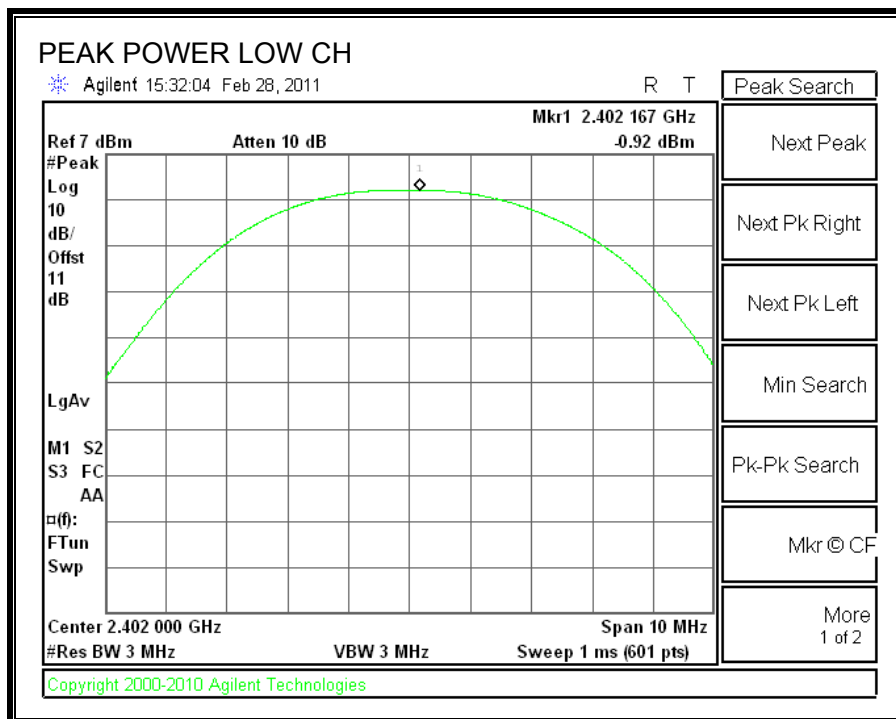

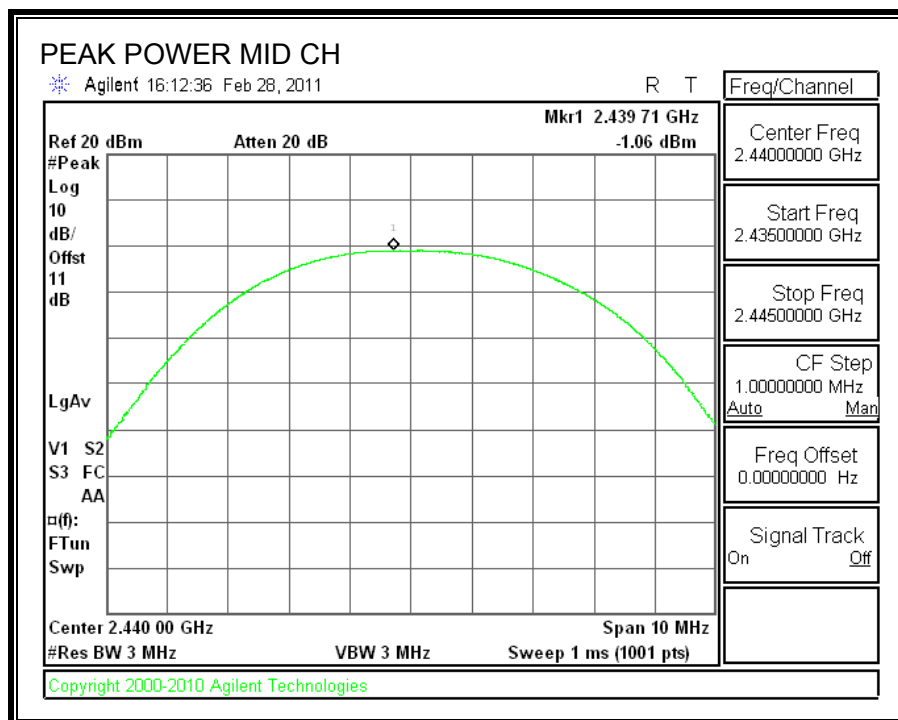

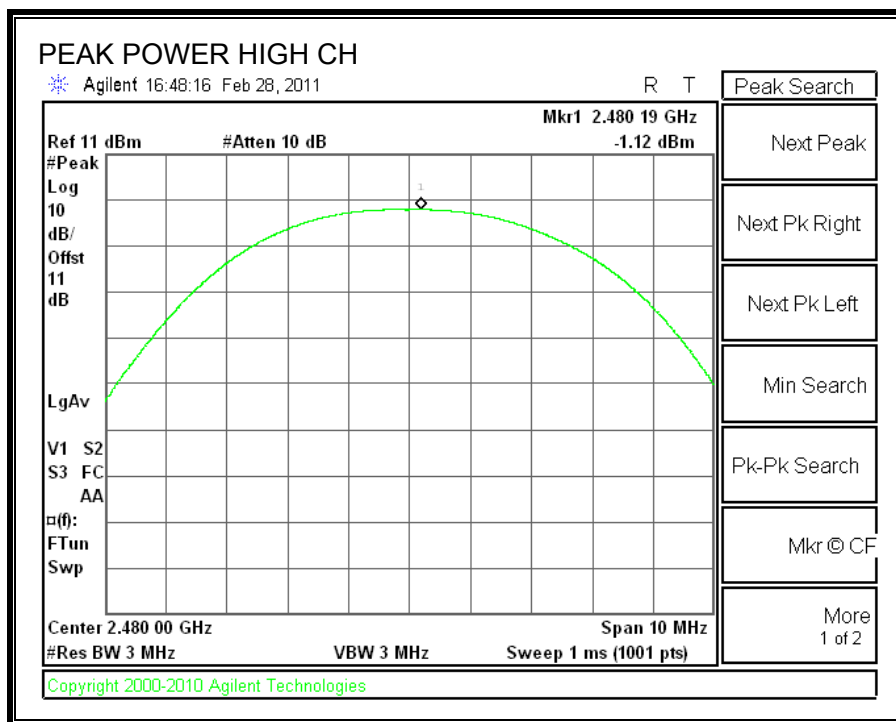

7.3.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-1.72
Middle	2440	-1.47
High	2480	-1.54

7.3.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

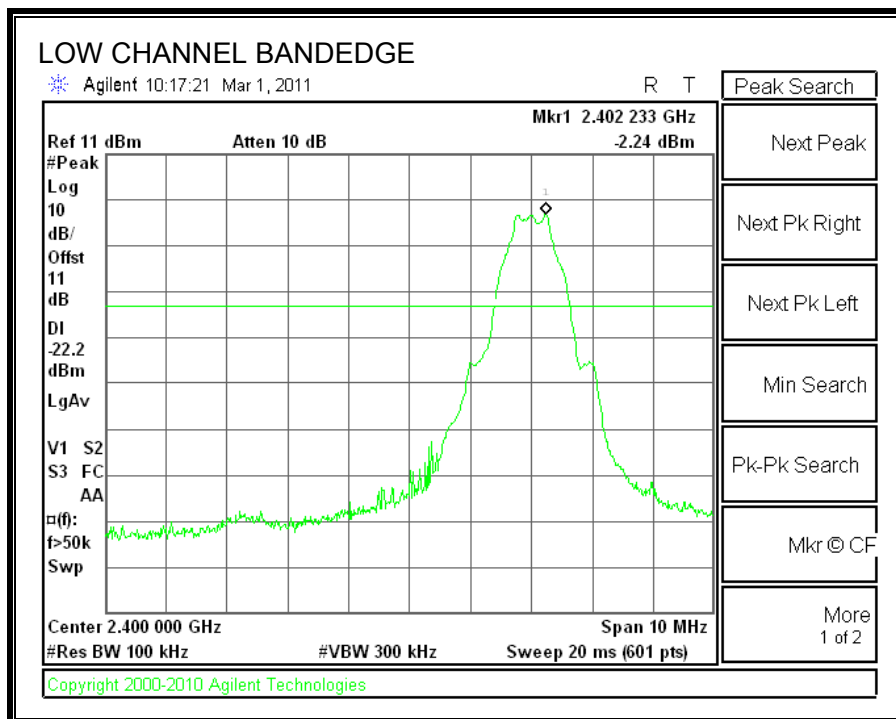

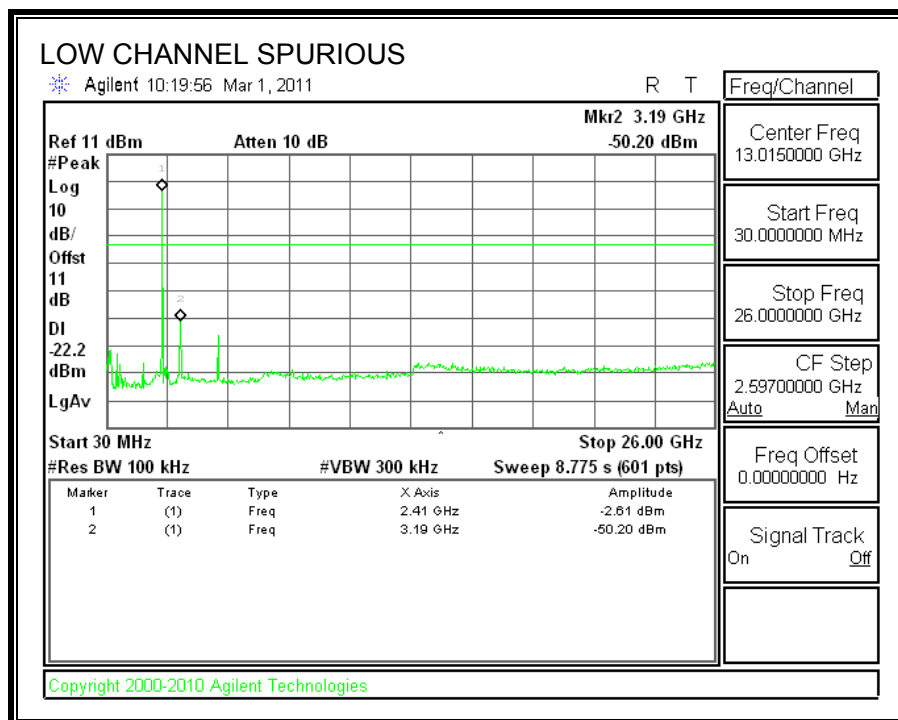



SPURIOUS EMISSIONS, MID CHANNEL

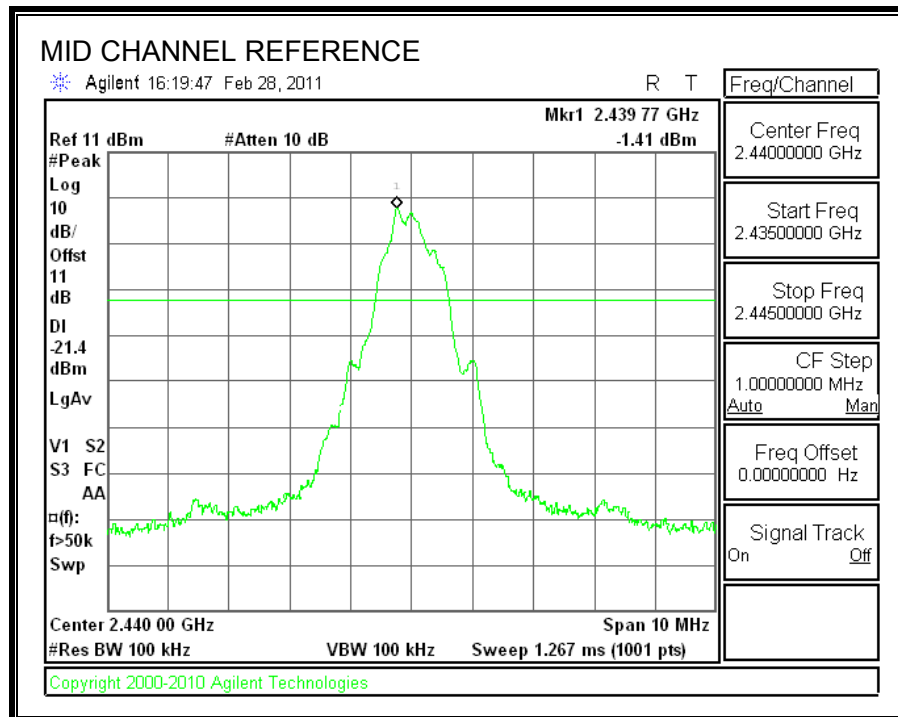

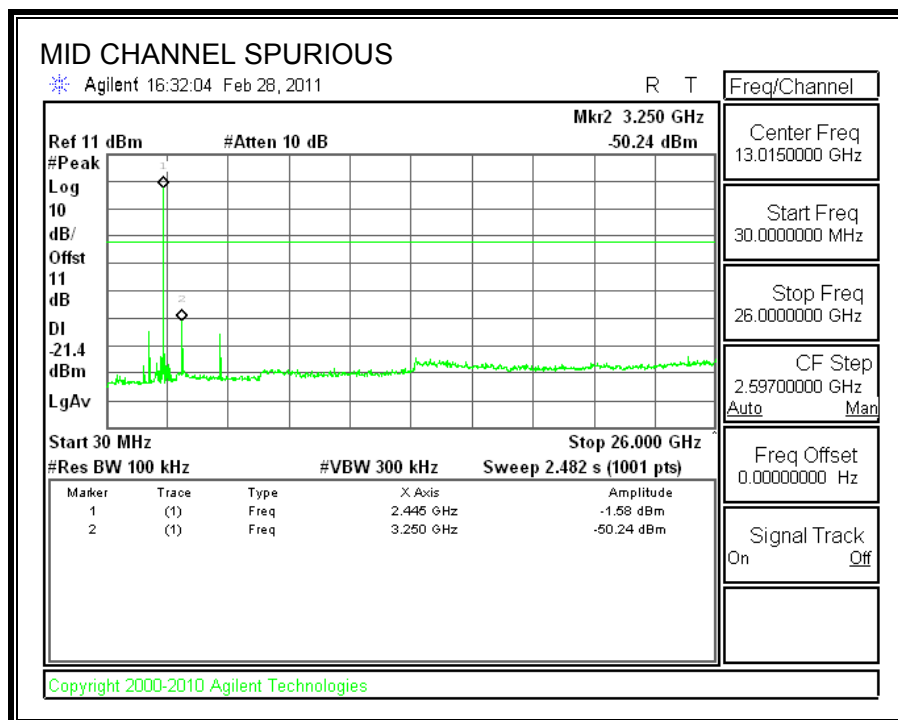



SPURIOUS EMISSIONS, HIGH CHANNEL

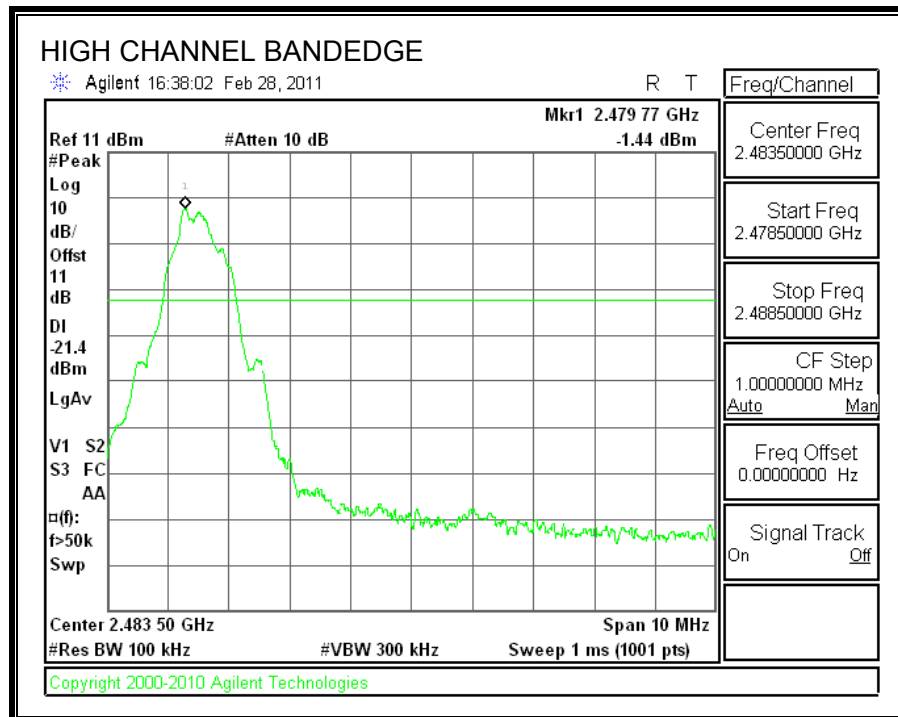

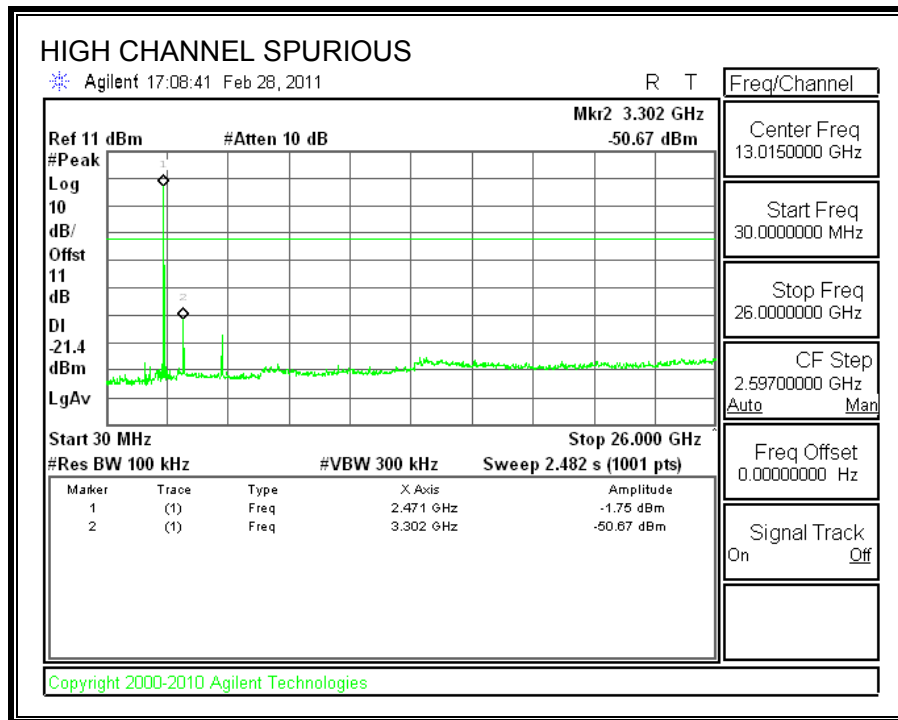

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

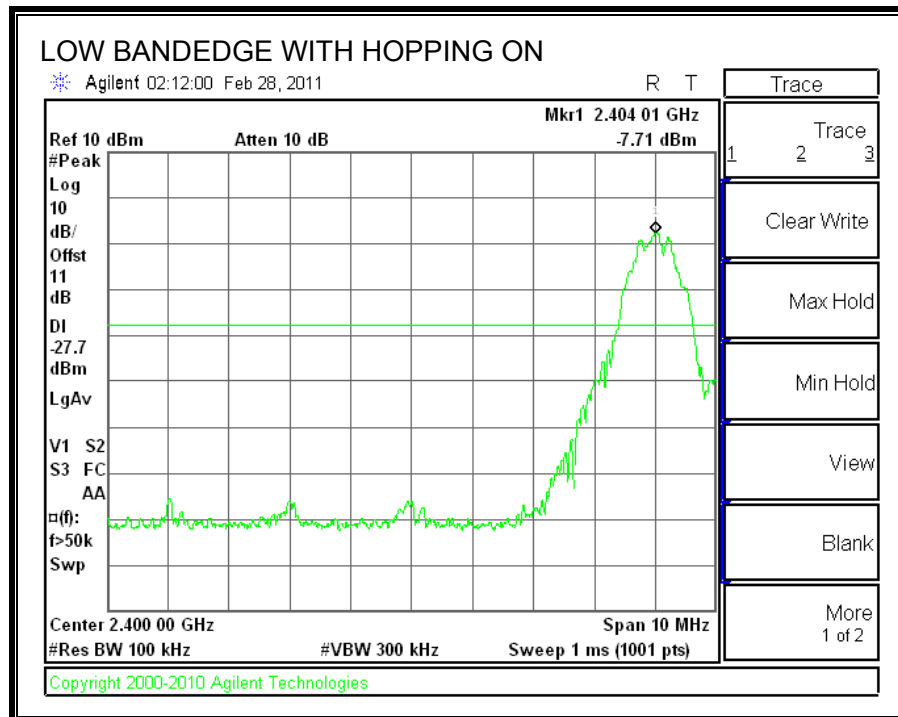

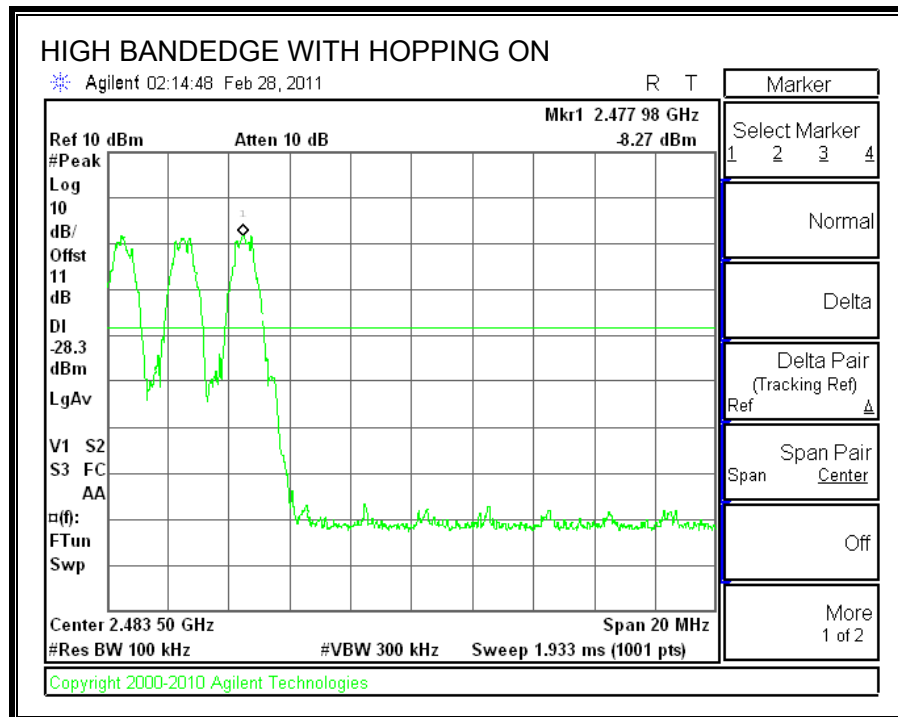

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

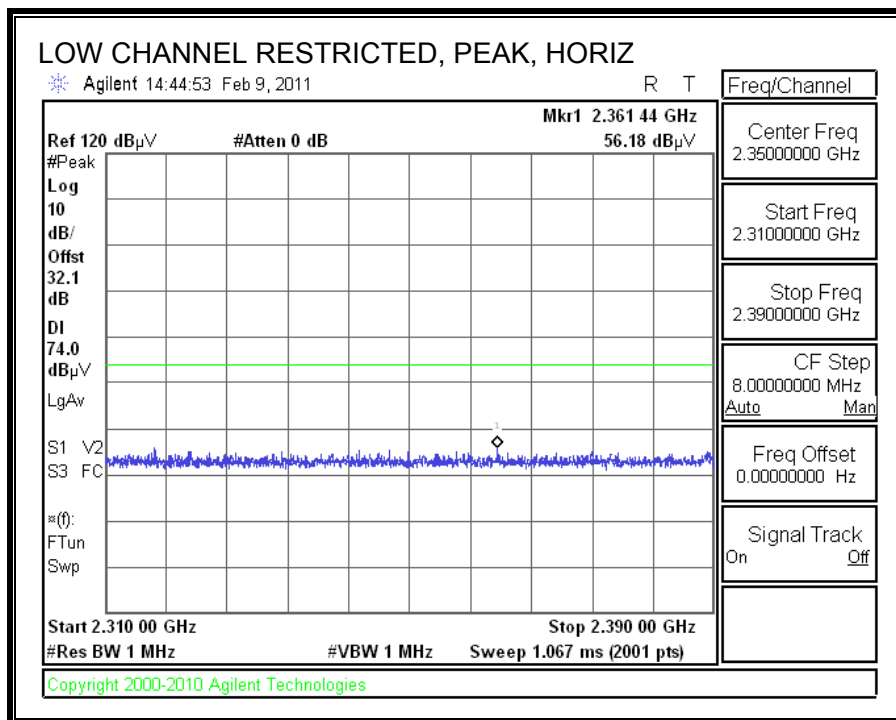

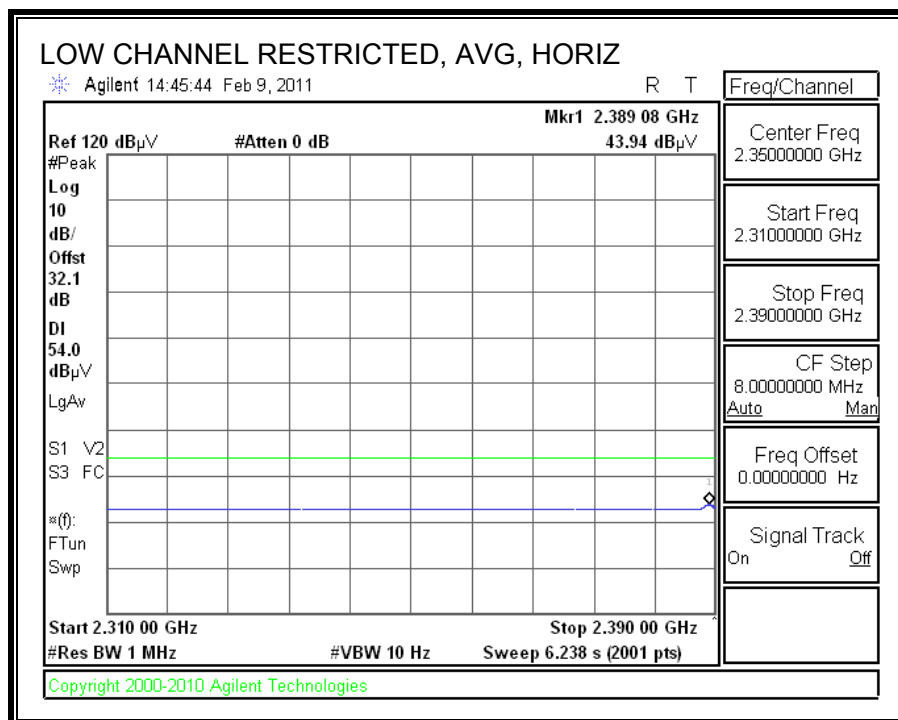



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

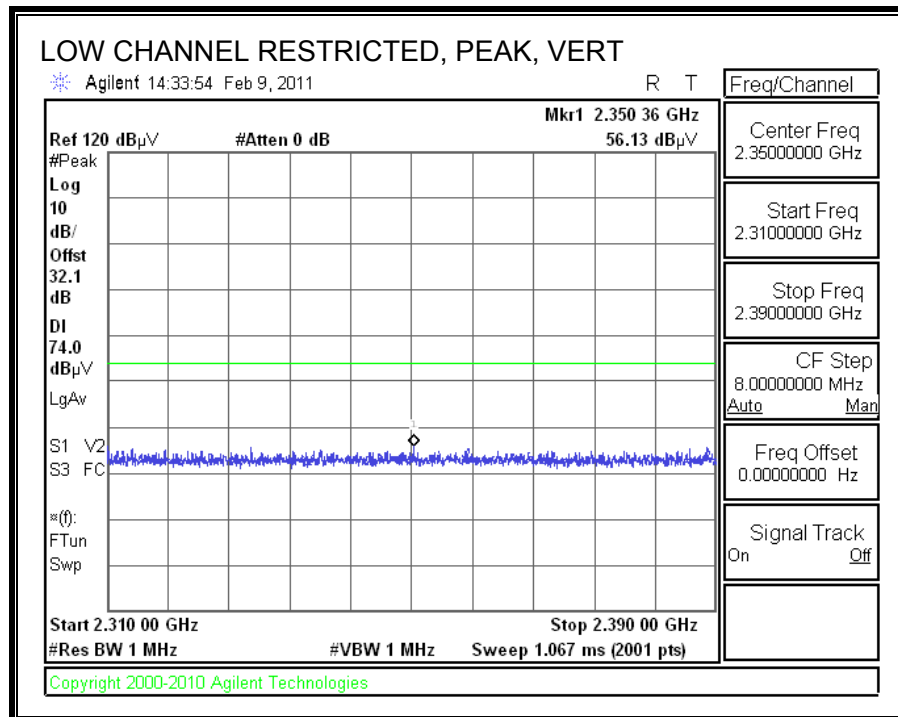

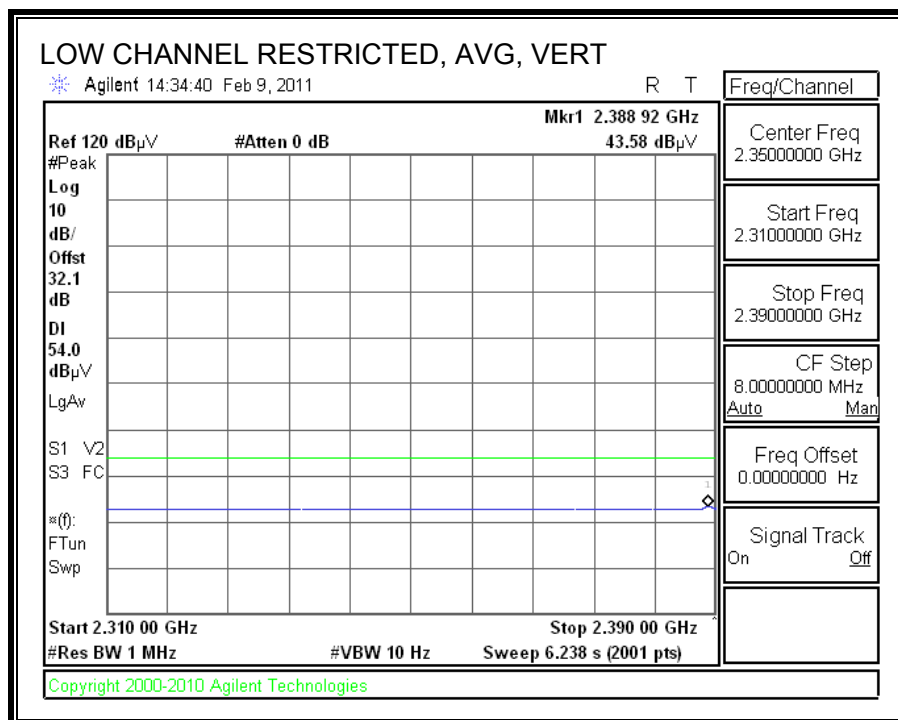



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

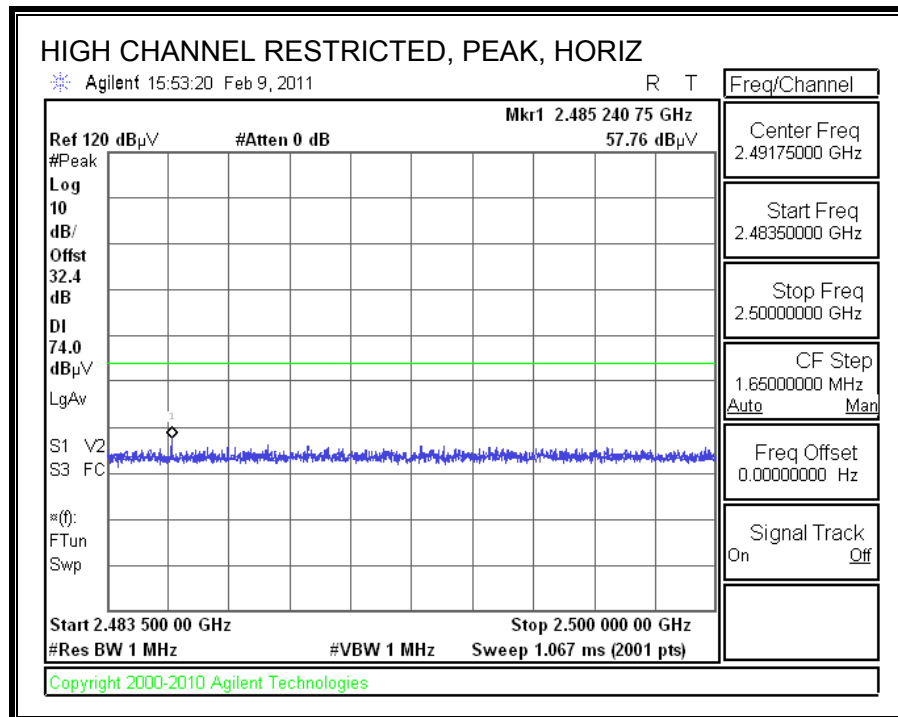

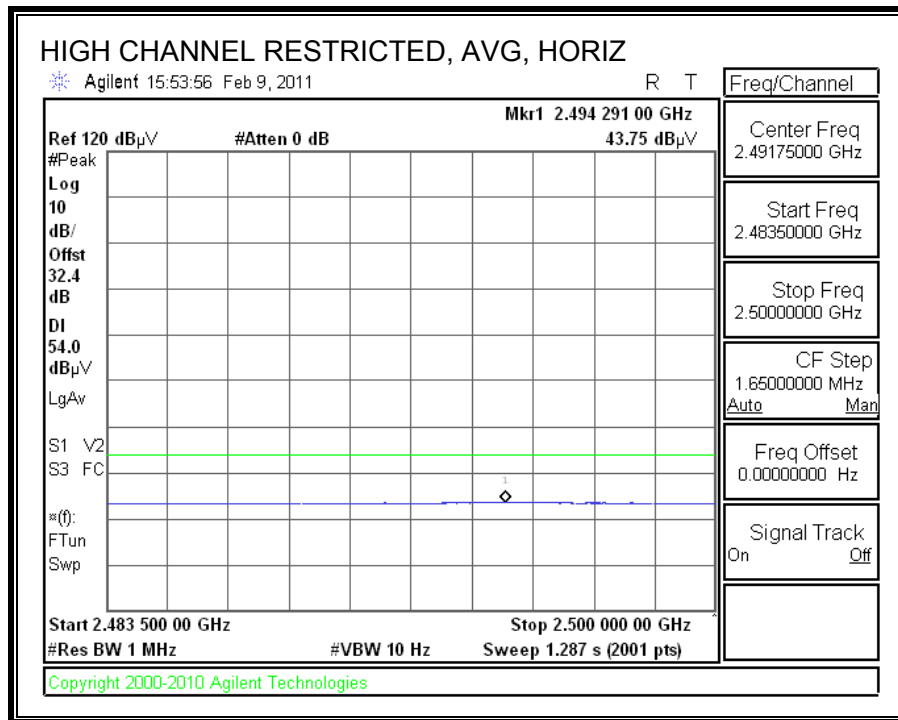

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

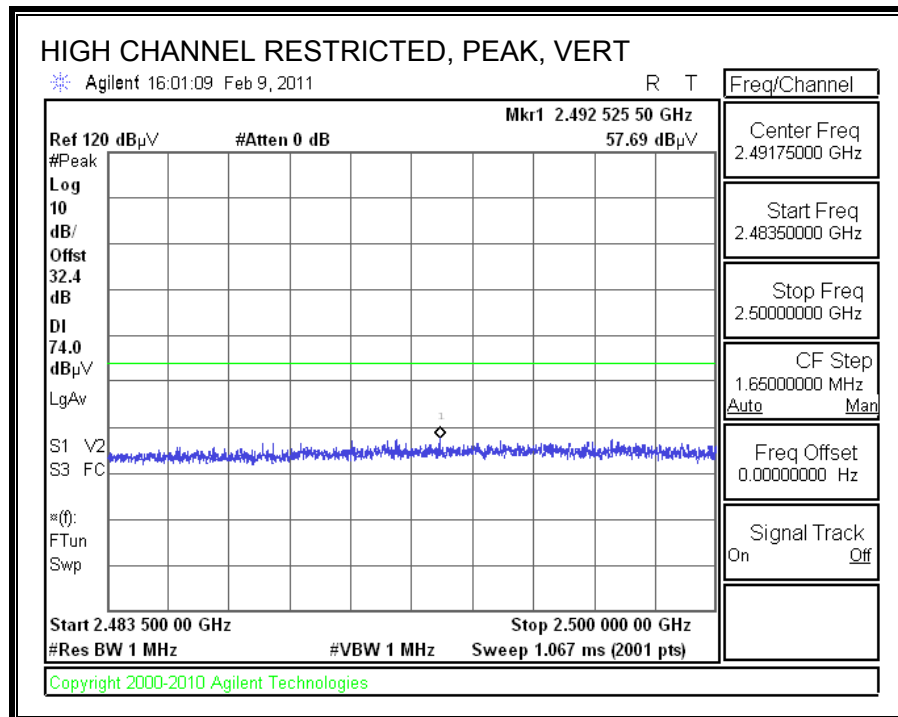

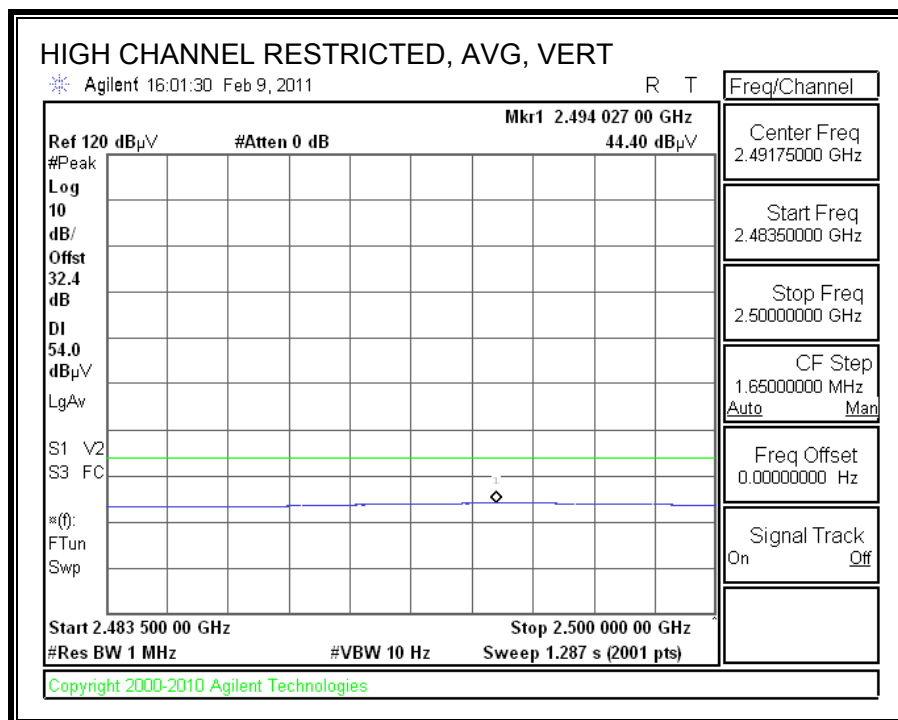



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Hon Hai Project #: 11J13630 Date: 02/10/11 Test Engineer: Doug Anderson Configuration: EUT and USB Converter Connected to Support PC Mode: Continuous Transmit / GFSK Modulation															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T59; S/N: 3245 @3m		T145 Agilent 3008A0054						FCC 15.205							
Hi Frequency Cables															
3' cable 22807700		12' cable 22807600		20' cable 22807500		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					
3' cable 22807700		12' cable 22807600		20' cable 22807500				R_001							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<u>Low Channel (2402 MHz) / Vertical:</u>															
4.804	3.0	39.5	26.3	32.8	5.8	-34.8	0.0	0.0	43.2	30.0	74	54	-30.8	-24.0	V
<u>Low Channel (2402 MHz) / Horizontal:</u>															
4.804	3.0	39.0	25.3	32.8	5.8	-34.8	0.0	0.0	42.7	29.0	74	54	-31.3	-25.0	H, Noise Floor
<u>Mid Channel (2441 MHz) / Vertical:</u>															
4.882	3.0	39.0	25.6	32.8	5.8	-34.9	0.0	0.0	42.8	29.4	74	54	-31.2	-24.6	V
<u>Mid Channel (2441 MHz) / Horizontal:</u>															
4.882	3.0	38.7	25.4	32.8	5.8	-34.9	0.0	0.0	42.5	29.2	74	54	-31.5	-24.8	H, Noise Floor
<u>High Channel (2480 MHz) / Vertical:</u>															
4.960	3.0	38.1	25.0	32.9	5.9	-34.9	0.0	0.0	42.0	28.9	74	54	-32.0	-25.1	V, Noise Floor
<u>High Channel (2480 MHz) / Horizontal:</u>															
4.960	3.0	37.6	24.6	32.9	5.9	-34.9	0.0	0.0	41.5	28.5	74	54	-32.5	-25.5	H, Noise Floor
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


8.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

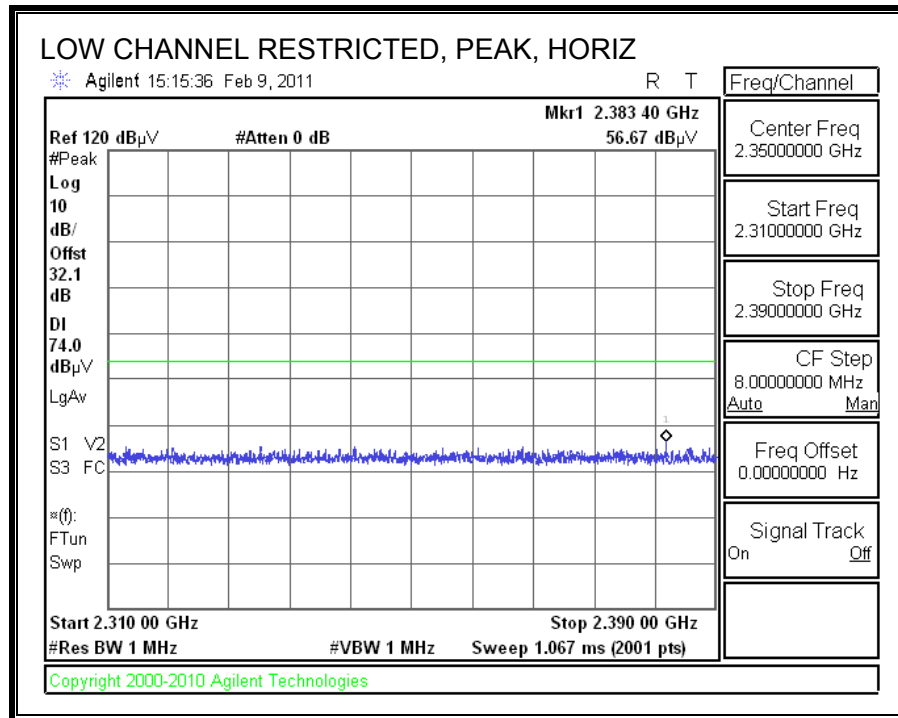

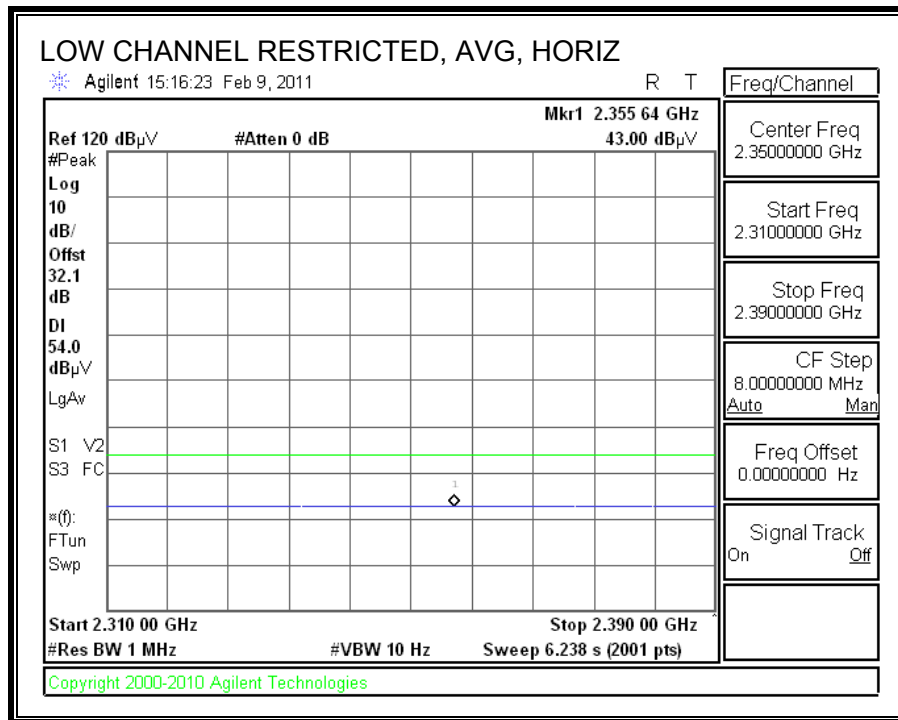



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

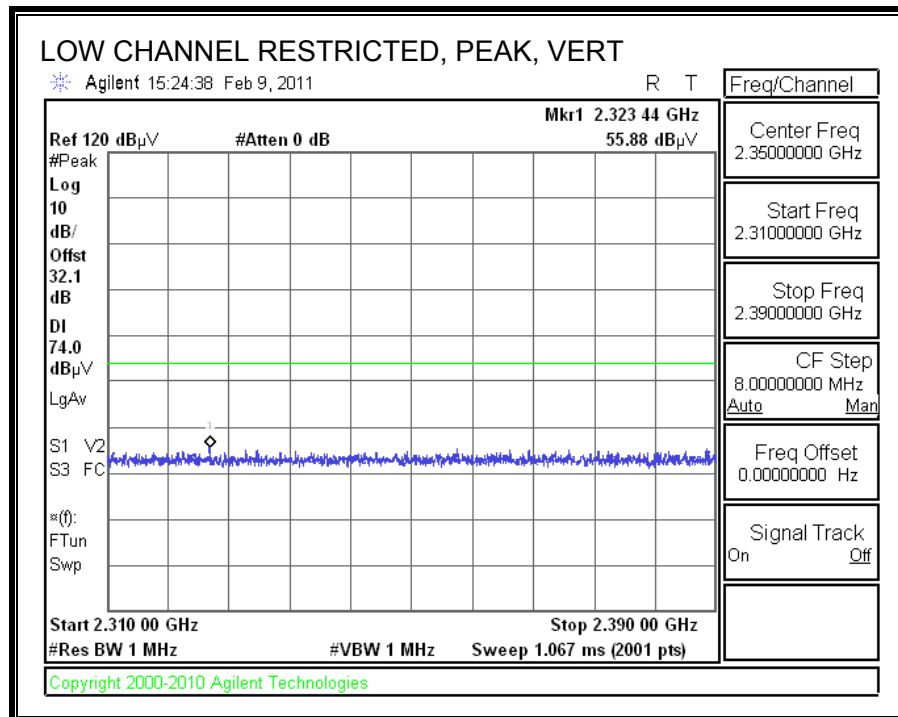

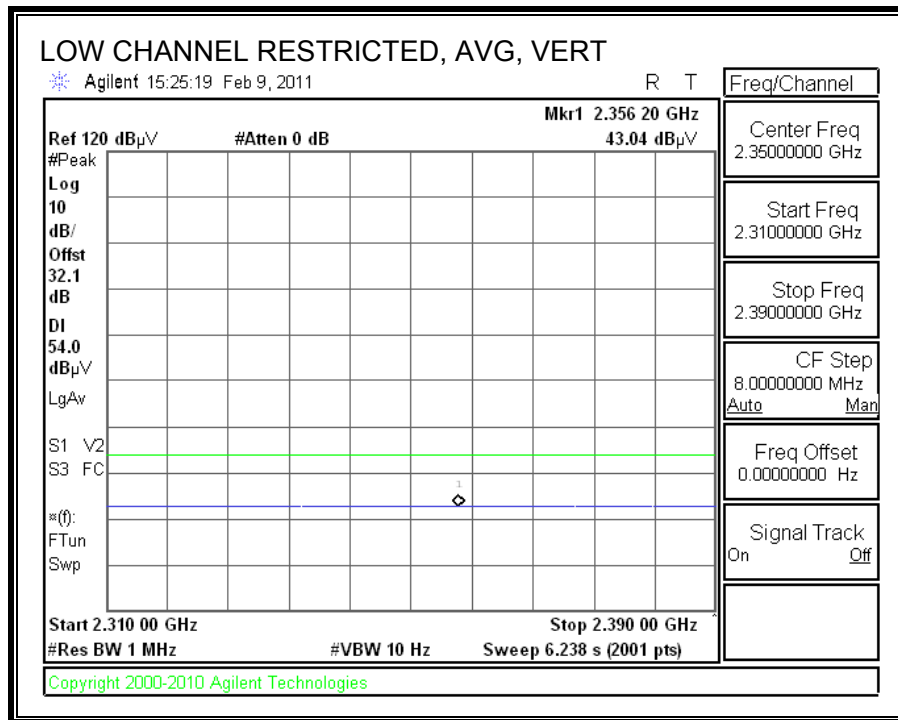



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

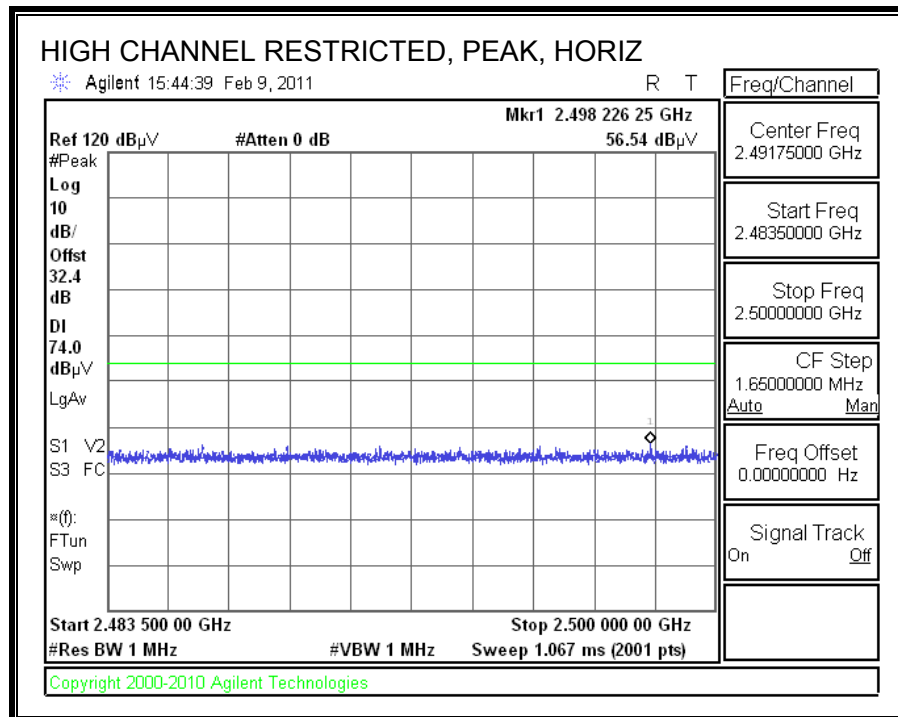

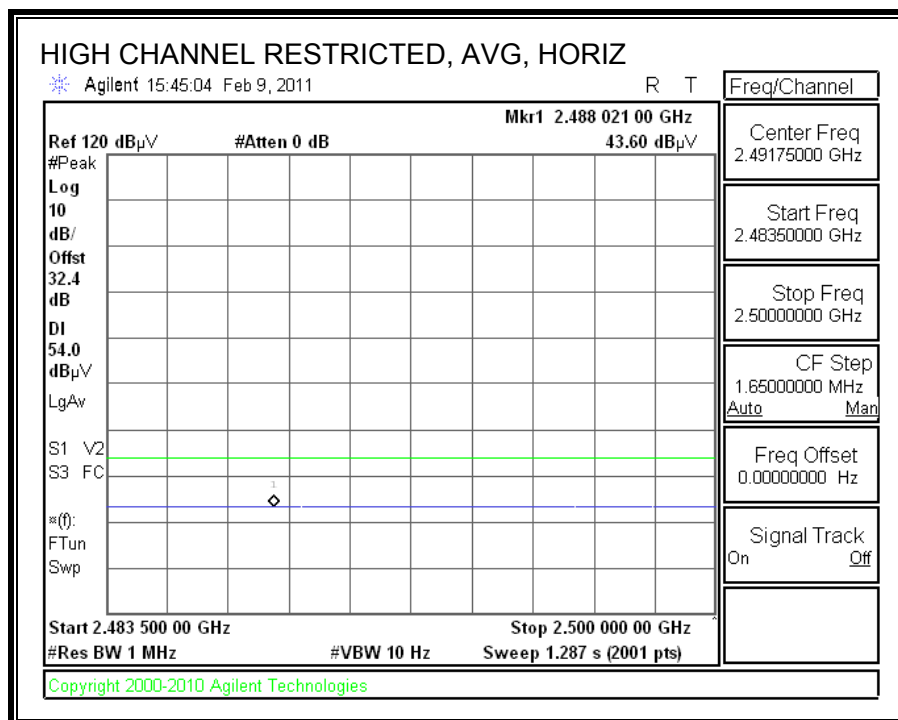

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

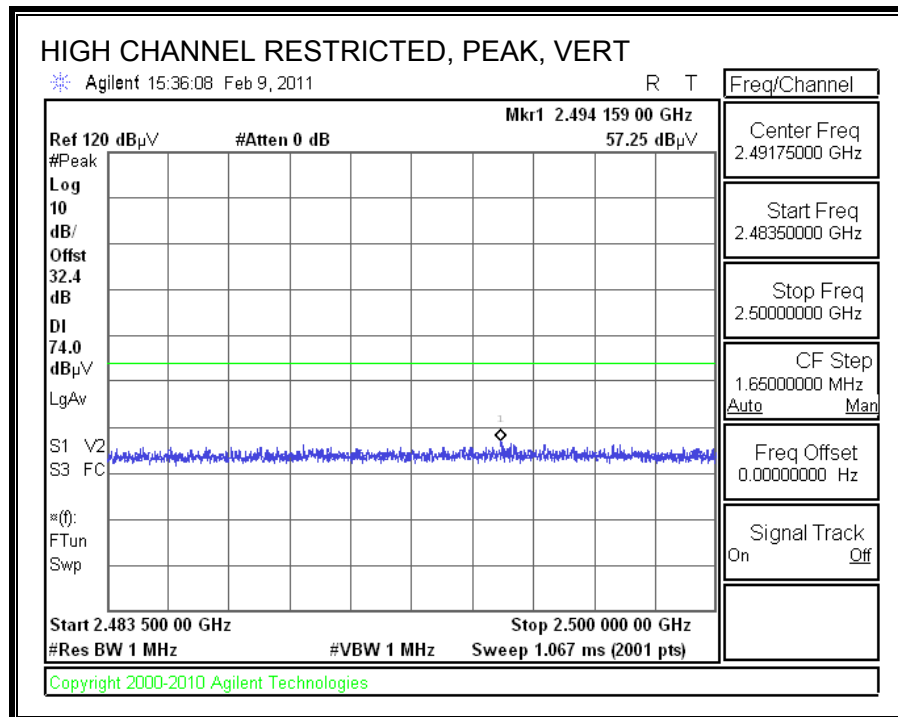

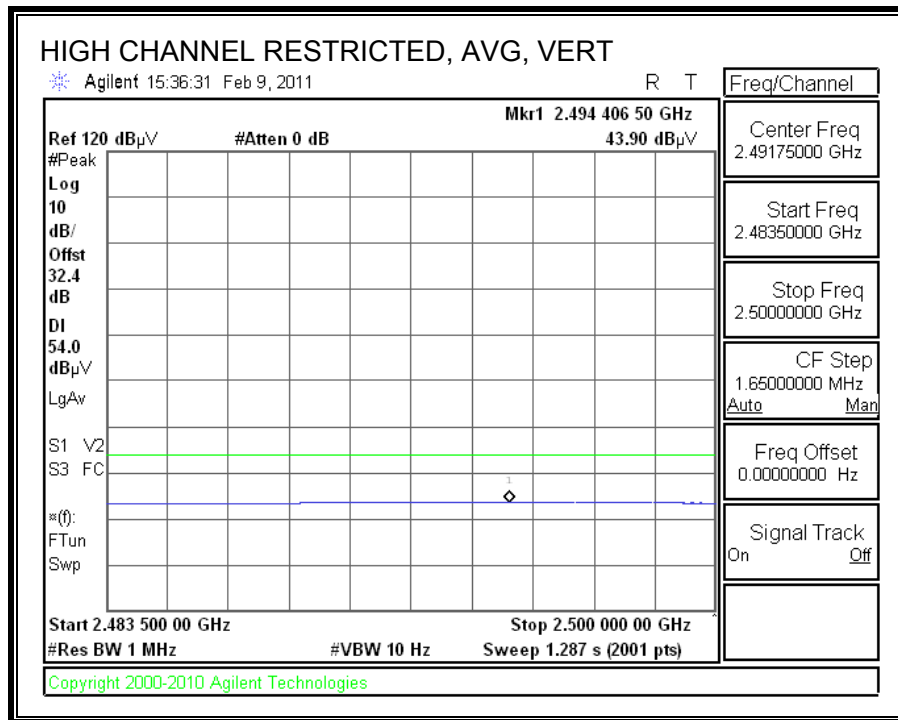



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company: Hon Hai Project #: 11J13630 Date: 02/10/11 Test Engineer: Doug Anderson Configuration: EUT and USB Converter Connected to Support PC Mode: Continuous Transmit / 8PSK Modulation																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T59; S/N: 3245 @3m			T145 Agilent 3008A005t									FCC 15.205				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Channel (2402 MHz) / Vertical:																
4.804	3.0	39.8	26.2	32.8	5.8	-34.8	0.0	0.0	43.5	29.9	74	54	-30.5	-24.1	V	
Low Channel (2402 MHz) / Horizontal:																
4.804	3.0	38.8	25.2	32.8	5.8	-34.8	0.0	0.0	42.5	28.9	74	54	-31.5	-25.1	H, Noise Floor	
Mid Channel (2441 MHz) / Vertical:																
4.882	3.0	39.3	25.2	32.8	5.8	-34.9	0.0	0.0	43.1	29.0	74	54	-30.9	-25.0	V	
Mid Channel (2441 MHz) / Horizontal:																
4.882	3.0	38.5	24.9	32.8	5.8	-34.9	0.0	0.0	42.3	28.7	74	54	-31.7	-25.3	H, Noise Floor	
High Channel (2480 MHz) / Vertical:																
4.960	3.0	38.2	24.9	32.9	5.9	-34.9	0.0	0.0	42.1	28.8	74	54	-31.9	-25.2	V, Noise Floor	
High Channel (2480 MHz) / Horizontal:																
4.960	3.0	38.1	24.6	32.9	5.9	-34.9	0.0	0.0	42.0	28.6	74	54	-32.0	-25.4	H, Noise Floor	
Rev. 07.22.09																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											


8.2.3. LE GFSK MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

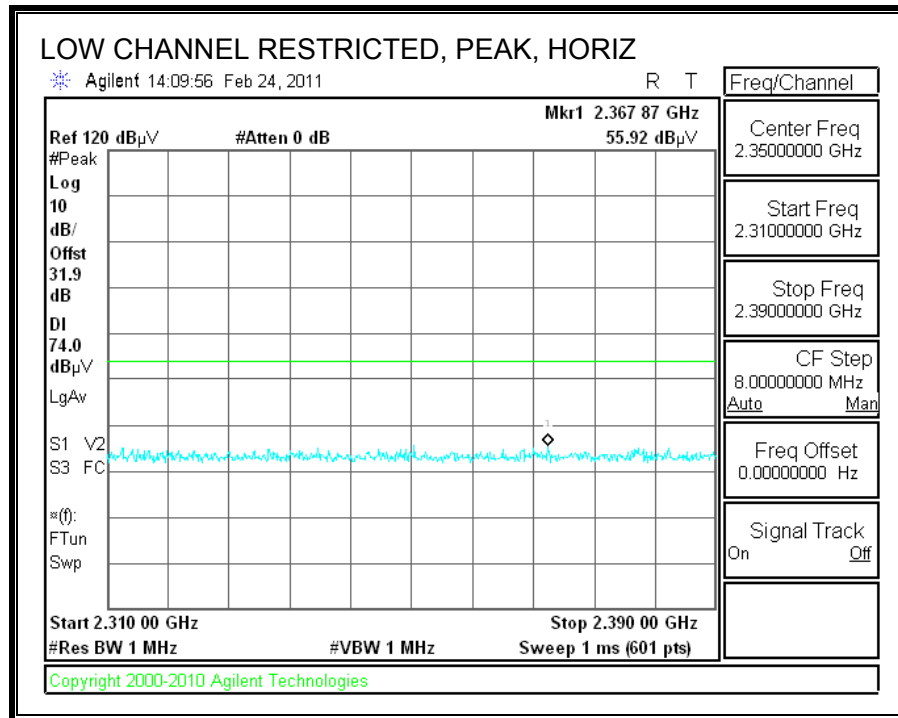

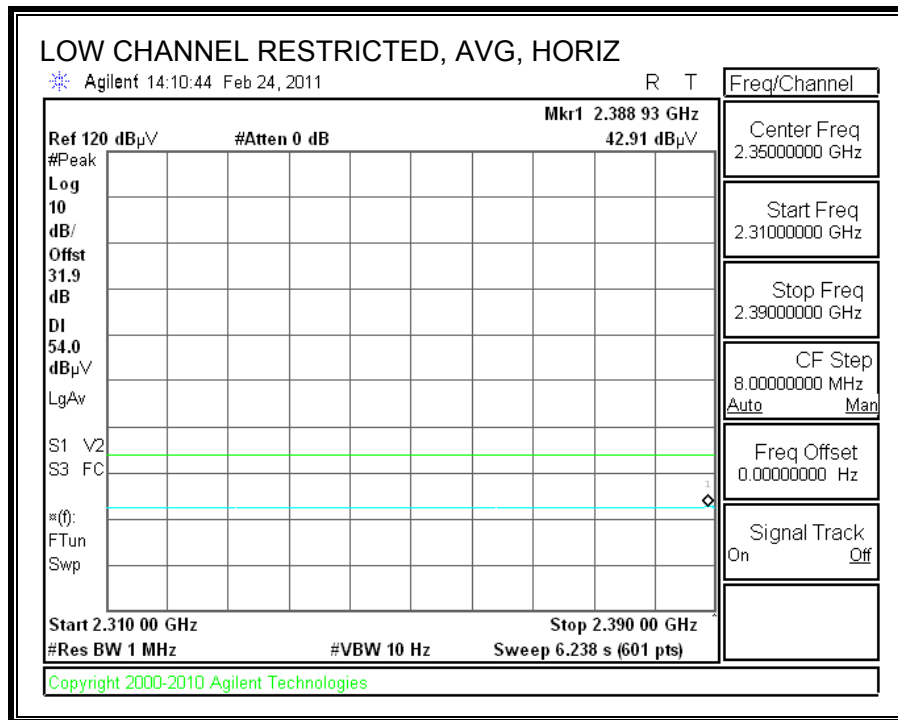



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

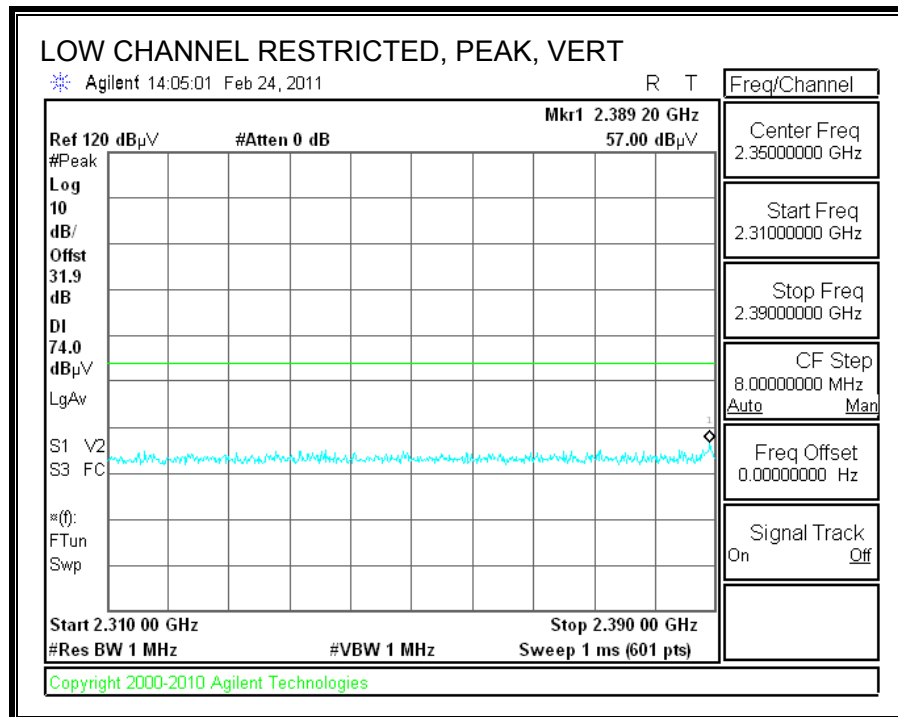

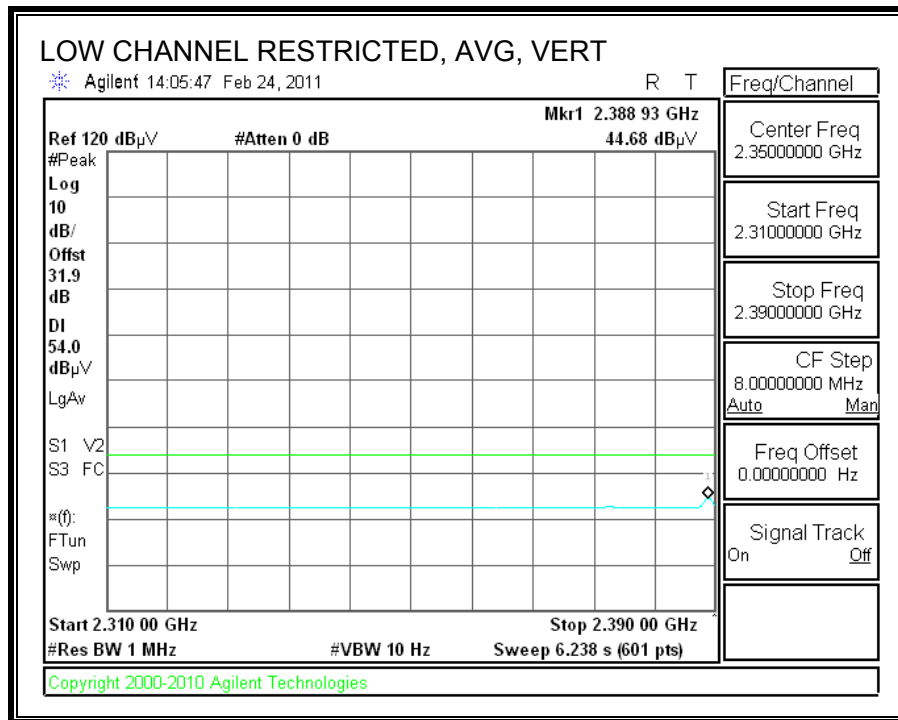



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

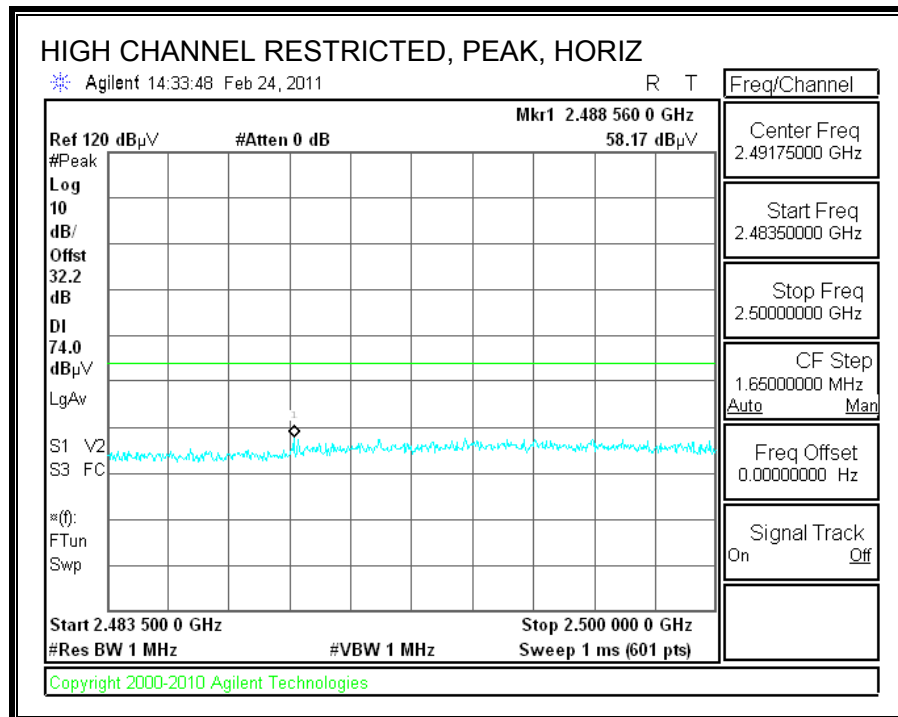

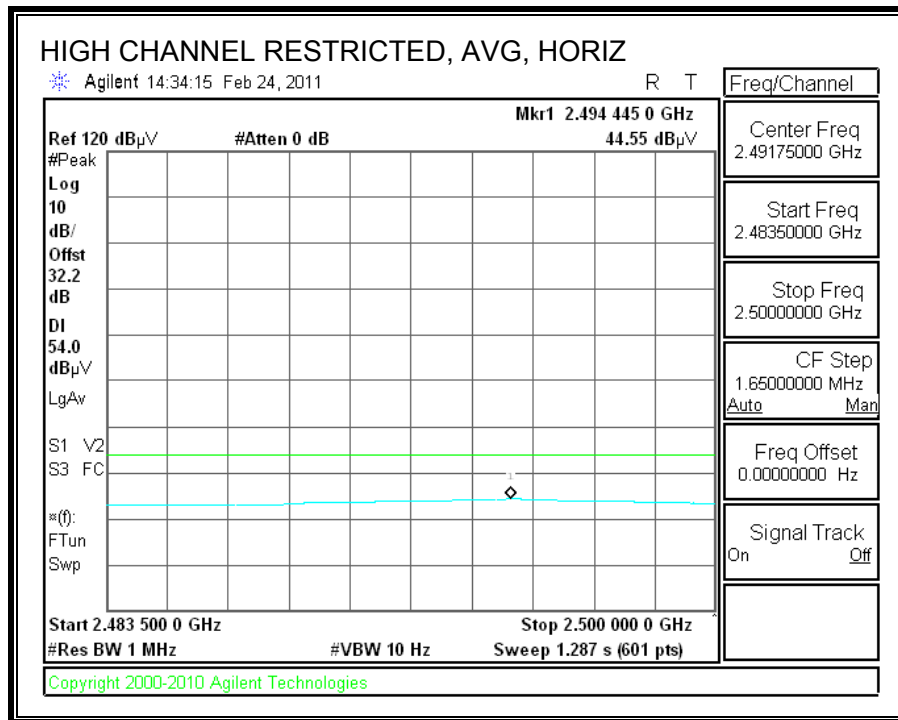

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

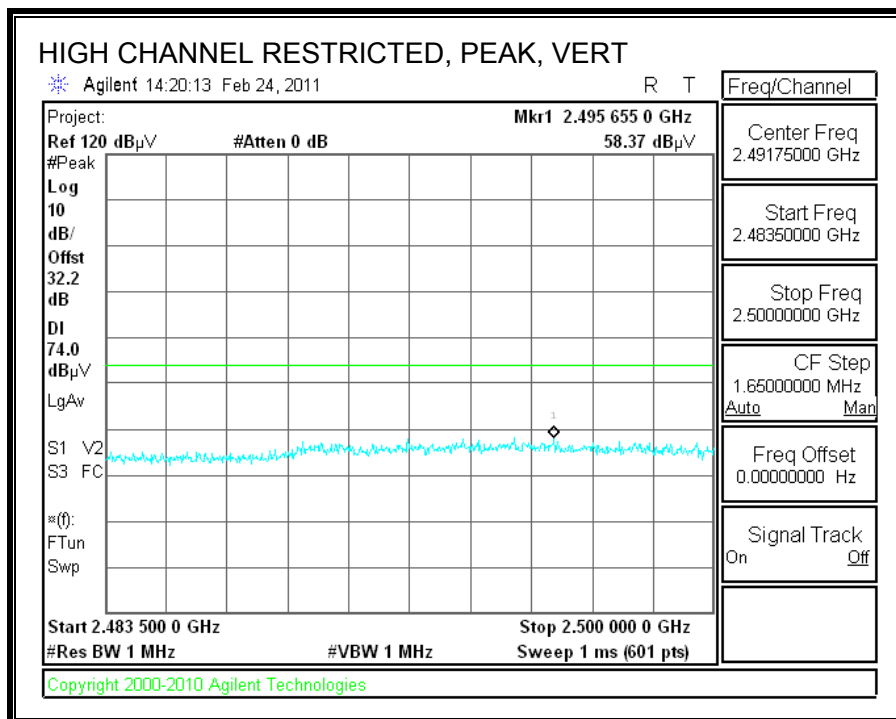

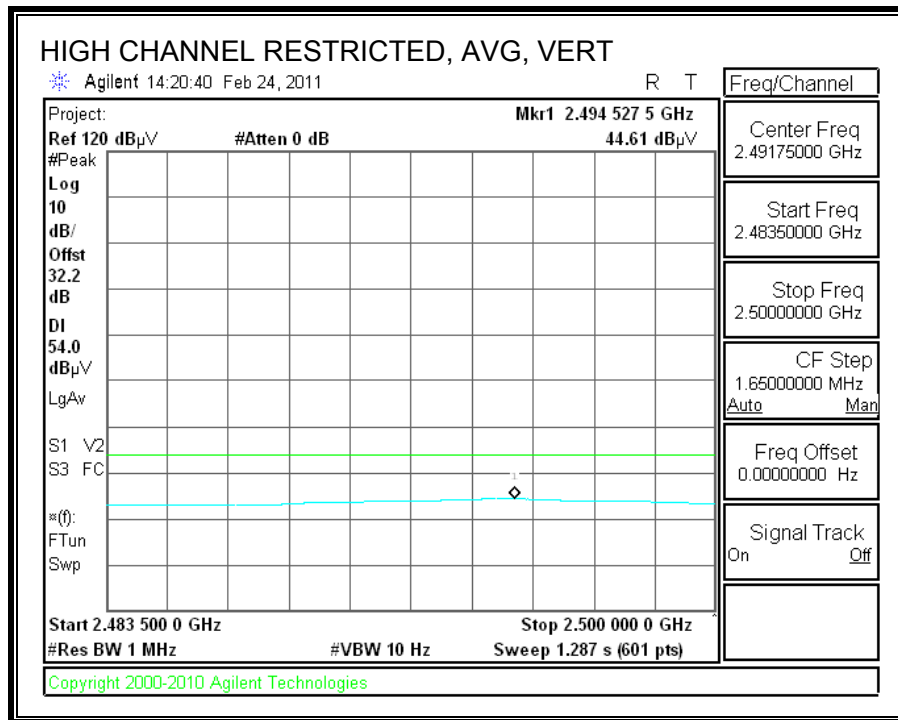

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company:		HON HAI														
Project #:		11J13630														
Date:		2/24/11														
Test Engineer:		Thanh Nguyen														
Configuration:		EUT and the remote support Laptop														
Mode:		TX LE GFSK														
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T60; S/N: 2238 @3m			T145 Agilent 3008A0056									FCC 15.209				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz	
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Ch																
1.300	3.0	54.9	34.2	25.5	2.7	-35.9	0.0	0.0	47.2	26.5	74	54	-26.8	-27.5	V	
2.413	3.0	51.4	37.9	28.1	3.9	-35.1	0.0	0.0	48.2	34.7	74	54	-25.8	-19.3	V	
3.320	3.0	53.7	37.9	30.4	4.6	-35.1	0.0	0.0	53.7	37.8	74	54	-20.3	-16.2	V	
4.031	3.0	48.6	35.3	32.1	5.2	-34.7	0.0	0.0	51.1	37.8	74	54	-22.9	-16.2	V	
1.205	3.0	51.4	38.3	25.2	2.6	-36.0	0.0	0.0	43.1	30.1	74	54	-30.9	-23.9	H	
1.515	3.0	50.3	37.7	26.2	3.0	-35.8	0.0	0.0	43.7	31.1	74	54	-30.3	-22.9	H	
3.312	3.0	50.2	36.1	30.4	4.6	-35.1	0.0	0.0	50.2	36.1	74	54	-23.8	-17.9	H	
Mid Ch																
1.250	3.0	54.3	34.7	25.3	2.7	-36.0	0.0	0.0	46.3	26.7	74	54	-27.7	-27.3	V	
1.767	3.0	51.2	38.3	27.0	3.2	-35.6	0.0	0.0	45.9	33.0	74	54	-28.1	-21.0	V	
3.308	3.0	53.2	37.6	30.4	4.6	-35.1	0.0	0.0	53.1	37.5	74	54	-20.9	-16.5	V	
4.817	3.0	48.4	33.3	32.7	5.8	-34.8	0.0	0.0	52.0	36.9	74	54	-22.0	-17.1	V	
1.000	3.0	52.6	35.7	24.5	2.4	-36.2	0.0	0.0	43.3	26.4	74	54	-30.7	-27.6	H	
3.315	3.0	48.6	35.3	30.4	4.6	-35.1	0.0	0.0	48.5	35.2	74	54	-25.5	-18.8	H	
High Ch																
1.010	3.0	55.0	35.7	24.5	2.4	-36.1	0.0	0.0	45.7	26.4	74	54	-28.3	-27.6	V	
1.295	3.0	58.9	37.0	25.5	2.7	-35.9	0.0	0.0	51.1	29.2	74	54	-22.9	-24.8	V	
1.510	3.0	49.7	36.7	26.2	3.0	-35.8	0.0	0.0	43.1	30.0	74	54	-30.9	-24.0	V	
3.095	3.0	47.2	30.2	29.9	4.4	-35.2	0.0	0.0	46.4	29.4	74	54	-27.6	-24.6	V	
3.205	3.0	47.5	31.3	30.2	4.5	-35.1	0.0	0.0	47.0	30.8	74	54	-27.0	-23.2	V	
4.030	3.0	44.0	30.2	32.1	5.2	-34.7	0.0	0.0	46.5	32.7	74	54	-27.5	-21.3	V	
1.667	3.0	48.7	35.3	26.7	3.1	-35.6	0.0	0.0	42.9	29.4	74	54	-31.1	-24.6	H	
Rev. 07.22.09																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company: Hon Hai															
Project #: 11J13630															
Date: 02/10/11															
Test Engineer: Vahan Pilibosian															
Configuration: EUT and USB Converter Connected to Support PC															
Mode: RX / 8PSK Modulation															
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T59; S/N: 3245 @3m		T145 Agilent 3008A0050						FCC Class B							
Hi Frequency Cables															
3' cable 22807700		12' cable 22807600		20' cable 22807500		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					
3' cable 22807700		12' cable 22807600		20' cable 22807500				R_001							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid Channel (2441 MHz)/ Vertical:															
3.257	3.0	51.3	49.1	30.6	4.6	-35.1	0.0	0.0	51.3	49.1	74	54	-22.7	-4.9	V
3.317	3.0	52.5	35.7	30.7	4.6	-35.1	0.0	0.0	52.7	35.9	74	54	-21.3	-18.1	V
1.161	3.0	55.5	30.9	24.5	2.6	-36.0	0.0	0.0	46.5	21.9	74	54	-27.5	-32.1	V
1.205	3.0	50.4	35.9	24.7	2.6	-36.0	0.0	0.0	41.7	27.2	74	54	-32.3	-26.8	V
1.760	3.0	46.9	28.0	26.7	3.2	-35.6	0.0	0.0	41.2	22.4	74	54	-32.8	-31.6	V
1.607	3.0	52.6	32.7	26.2	3.1	-35.7	0.0	0.0	46.2	26.2	74	54	-27.8	-27.8	V
4.016	3.0	46.1	29.0	32.1	5.2	-34.7	0.0	0.0	48.6	31.6	74	54	-25.4	-22.4	V
Mid Channel (2441 MHz)/ Horizontal:															
3.257	3.0	49.6	46.7	30.6	4.6	-35.1	0.0	0.0	49.6	46.7	74	54	-24.4	-7.3	H
1.208	3.0	49.0	32.5	24.7	2.6	-36.0	0.0	0.0	40.3	23.8	74	54	-33.7	-30.2	H
3.314	3.0	49.7	33.9	30.7	4.6	-35.1	0.0	0.0	49.9	34.1	74	54	-24.1	-19.9	H
1.609	3.0	49.0	32.7	26.2	3.1	-35.7	0.0	0.0	42.5	26.2	74	54	-31.5	-27.8	H
4.015	3.0	40.4	25.9	32.1	5.2	-34.7	0.0	0.0	43.0	28.5	74	54	-31.0	-25.5	H
1.500	3.0	44.9	32.8	25.8	2.9	-35.8	0.0	0.0	37.8	25.7	74	54	-36.2	-28.3	H
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Vahan Pilibosian

Date: 02/10/2011

Project #: 11J1360

Company: Hon Hoi

Test Target: EUT and USB Covnerter Connected to Support PC

Mode Oper: TX_Worst Case

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
31.56	3.0	35.1	19.6	0.5	29.7	0.0	0.0	25.5	40.0	-14.5	H	P	
52.681	3.0	51.1	7.9	0.6	29.6	0.0	0.0	30.1	40.0	-9.9	H	P	
226.448	3.0	51.5	11.9	1.4	28.8	0.0	0.0	35.9	46.0	-10.1	H	P	
301.331	3.0	49.6	13.3	1.6	28.8	0.0	0.0	35.7	46.0	-10.3	H	P	
323.172	3.0	47.7	13.7	1.7	28.9	0.0	0.0	34.1	46.0	-11.9	H	P	
345.373	3.0	48.5	14.1	1.7	29.0	0.0	0.0	35.2	46.0	-10.8	H	P	
602.664	3.0	41.4	18.3	2.4	29.6	0.0	0.0	32.4	46.0	-13.6	H	P	
803.072	3.0	41.9	21.0	2.8	29.1	0.0	0.0	36.6	46.0	-9.4	H	P	
904.956	3.0	36.7	21.6	3.0	28.6	0.0	0.0	32.8	46.0	-13.3	H	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Vahan Pilibosian
Date: 02/10/2011
Project #: 11J1360
Company: Hon Hoi
Test Target: EUT and USB Converter Connected to Support PC
Mode Oper: TX_Worst Case

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
225.968	3.0	50.3	11.9	1.4	28.8	0.0	0.0	34.8	46.0	-11.2	V	P	
301.571	3.0	46.9	13.3	1.6	28.8	0.0	0.0	33.1	46.0	-13.0	V	P	
803.072	3.0	41.4	21.0	2.8	29.1	0.0	0.0	36.1	46.0	-9.9	V	P	
903.996	3.0	38.9	21.6	3.0	28.6	0.0	0.0	34.9	46.0	-11.1	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	FCC B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.20	54.28	--	30.38	0.00	63.53	53.53	-9.25	-23.15	L1
14.29	50.54	--	38.54	0.00	60.00	50.00	-9.46	-11.46	L1
24.01	44.73	--	24.97	0.00	60.00	50.00	-15.27	-25.03	L1
0.20	51.66	--	31.36	0.00	63.53	53.53	-11.87	-22.17	L2
14.29	48.05	--	37.48	0.00	60.00	50.00	-11.95	-12.52	L2
24.01	43.34	--	33.79	0.00	60.00	50.00	-16.66	-16.21	L2
6 Worst Data									

LINE 1 RESULTS

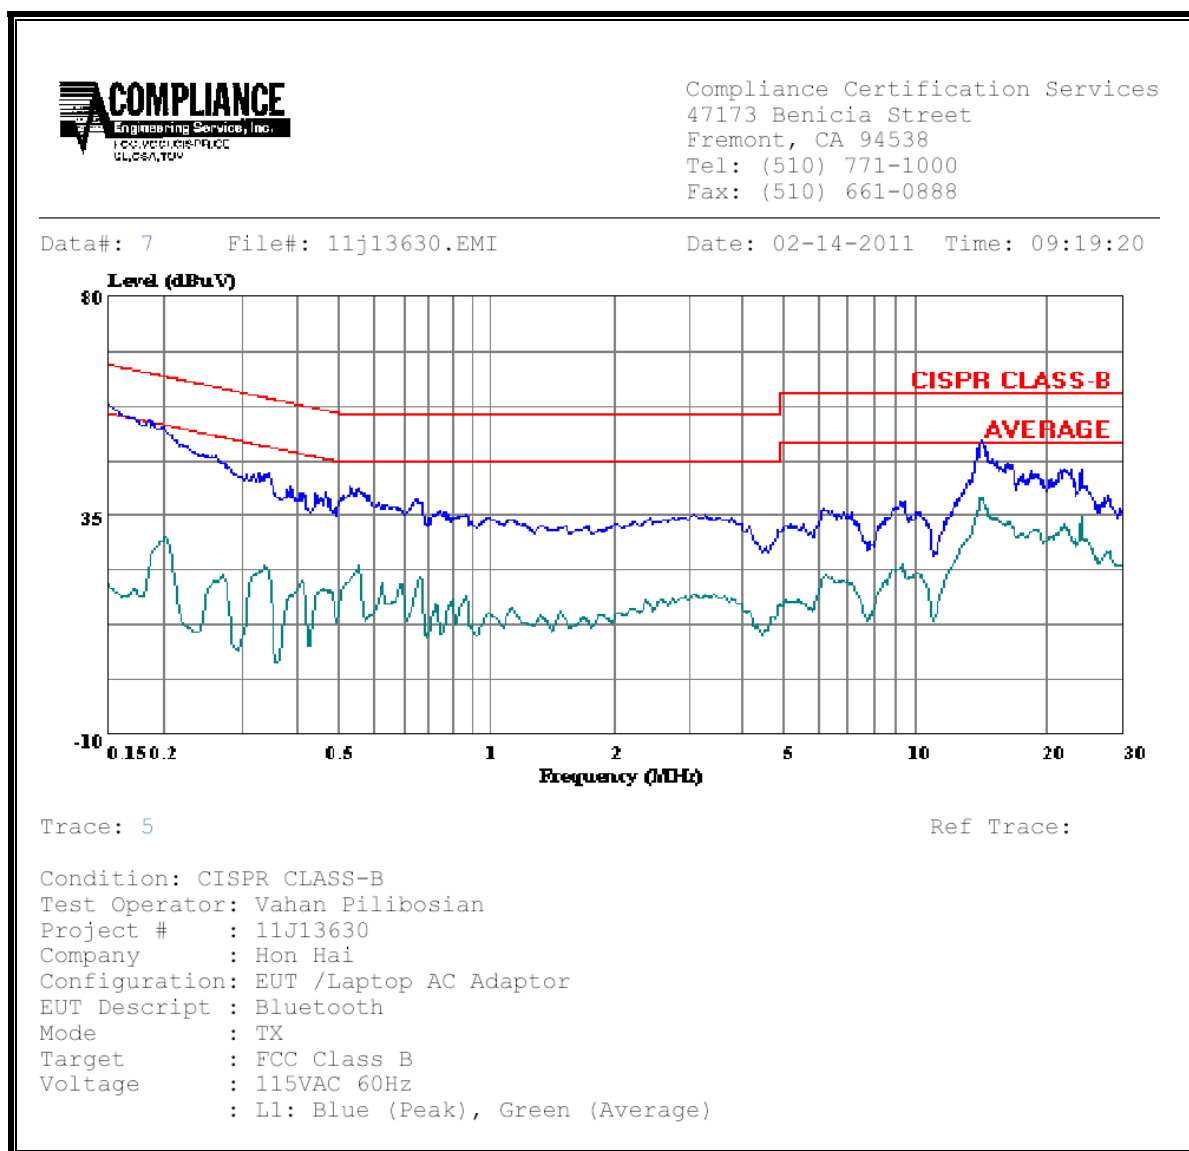

LINE 2 RESULTS

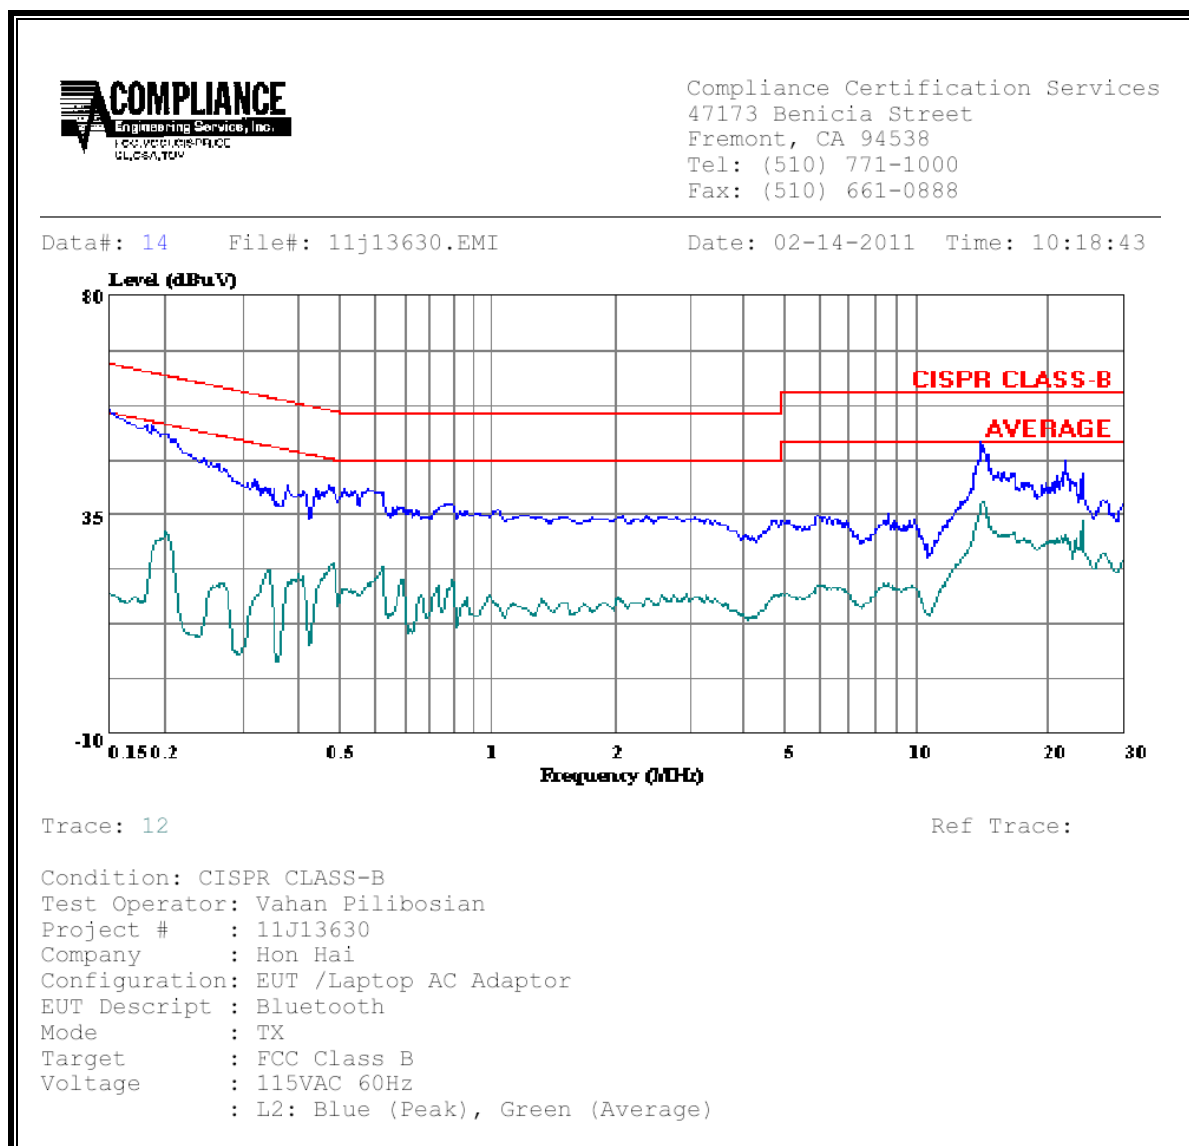

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classified As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	$280/f$	$2.19/f$		6
10–30	28	$2.19/f$		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, f , is in MHz.
 2. A power density of 10 W/m^2 is equivalent to 1 mW/cm^2 .
 3. A magnetic field strength of 1 A/m corresponds to $1.257\text{ microtesla } (\mu\text{T})$ or $12.57\text{ milligauss (mG)}$.

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	Bluetooth	0.20	4.46	2.91	0.01	0.001