



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT  
FOR  
BLUETOOTH MODULE 4.0 +EDR/LE**

**MODEL NUMBER: WIN-B3**

**FCC ID: MCLWINB3  
IC: 2878D- WINB3**

**REPORT NUMBER: 11J13631-1**

**ISSUE DATE: MARCH 02, 2011**

*Prepared for*  
**HON HAI PRECISION IND. CO., LTD.**  
**5F-1, 5 HSIN-AN ROAD**  
**HSINCHU SCIENCE-BASED INDUSTRIAL PARK**  
**TAIWAN, R.O.C.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**

**NVLAP®**

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	03/02/2011	Initial Issue	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
5.1. <i>SOFTWARE AND FIRMWARE .....</i>	<i>7</i>
5.2. <i>WORST-CASE CONFIGURATIONS AND MODE.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. ANTENNA PORT TEST RESULTS.....</b>	<b>11</b>
7.1. <i>BASIC DATA RATE GFSK MODULATION .....</i>	<i>11</i>
7.1.1. <i>20 dB BANDWIDTH.....</i>	<i>11</i>
7.1.2. <i>HOPPING FREQUENCY SEPARATION.....</i>	<i>16</i>
7.1.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>18</i>
7.1.4. <i>AVERAGE TIME OF OCCUPANCY .....</i>	<i>21</i>
7.1.5. <i>OUTPUT POWER.....</i>	<i>25</i>
7.1.6. <i>AVERAGE POWER .....</i>	<i>28</i>
7.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>29</i>
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>34</i>
7.2.1. <i>20 dB AND 99% BANDWIDTH.....</i>	<i>34</i>
7.2.2. <i>HOPPING FREQUENCY SEPARATION.....</i>	<i>39</i>
7.2.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>41</i>
7.2.4. <i>AVERAGE TIME OF OCCUPANCY .....</i>	<i>44</i>
7.2.5. <i>OUTPUT POWER.....</i>	<i>48</i>
7.2.6. <i>AVERAGE POWER .....</i>	<i>51</i>
7.2.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>52</i>
7.3. <i>LE GFSK MODULATION .....</i>	<i>57</i>
7.3.1. <i>20 dB AND 99% BANDWIDTH.....</i>	<i>57</i>
7.3.2. <i>HOPPING FREQUENCY SEPARATION.....</i>	<i>62</i>
7.3.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>64</i>
7.3.4. <i>AVERAGE TIME OF OCCUPANCY .....</i>	<i>67</i>
7.3.5. <i>OUTPUT POWER.....</i>	<i>70</i>
7.3.6. <i>AVERAGE POWER .....</i>	<i>73</i>

---

7.3.7. CONDUCTED SPURIOUS EMISSIONS.....	74
<b>8. RADIATED TEST RESULTS.....</b>	<b>79</b>
8.1. LIMITS AND PROCEDURE .....	79
8.2. TRANSMITTER ABOVE 1 GHz .....	80
8.2.1. BASIC DATA RATE GFSK MODULATION .....	80
8.2.2. ENHANCED DATA RATE 8PSK MODULATION .....	85
8.2.1. LOW ENERGY LE GFSK MODULATION.....	90
8.3. RECEIVER ABOVE 1 GHz.....	95
8.3.1. RECEIVER ABOVE 1 GHz.....	95
8.4. WORST-CASE BELOW 1 GHz.....	96
<b>9. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>99</b>
<b>10. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>103</b>
<b>11. SETUP PHOTOS.....</b>	<b>106</b>

## 1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HON HAI PRECISION IND. CO., LTD.  
5F-1, 5 HSIN-AN ROAD  
HSINCHU SCIENCE-BASED INDUSTRIAL PARK  
TAIWAN, R.O.C.

EUT DESCRIPTION: BLUETOOTH MODULE 4.0 +EDR/LE

MODEL: WIN-B3

SERIAL NUMBER: D86BF7EFD0C6

DATE TESTED: FEBRUARY 15-16, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



Tested By:



---

THU CHAN  
ENGINEERING MANAGER  
UL CCS

---

DAVID GARCIA  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth 4.0 + EDR/LE Module.

The radio module is manufactured by Hon Hai Precision.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.33	1.71
2402 - 2480	Enhanced 8PSK	5.16	3.28
2402 - 2480	LE	2.37	1.73

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an antenna with a maximum gain of 2.91dBi.

### 5.1. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BT usb driver, v5.6.0.5301.

The test utility software used during testing was Bluetool, v1.3.5.5.

### 5.2. WORST-CASE CONFIGURATIONS AND MODE

The worst-case data rate for each mode is determined to be as follows, based on preliminary tests of the chipset utilized in this radio.

All final tests in the GFSK mode were made at 1 Mb/s.

All final tests in the 8PSK mode were made at 3 Mb/s.

All final tests in the LE mode were made at 1 Mb/s.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

The EUT was investigated in three different positions, X, Y, & Z and turned out the Y was worst-position. This worst position will be set for all radiated emissions testing.

### 5.3. DESCRIPTION OF TEST SETUP

#### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Lenovo	T61	L3-A1589	DoC
AC Adapter	Lenovo	PA-1650-171	11S92P1160Z1ZBGH74LH2M	N/A
Conversion Board	Marko	96-9922	2	N/A


#### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.0m	N/A
2	DC	1	DC	Unshielded	1.8m	N/A
3	USB	1	USB	Shielded	1.0m	N/A

#### TEST SETUP

The EUT is connected to a host laptop computer via conversion board with USB cable during the test. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

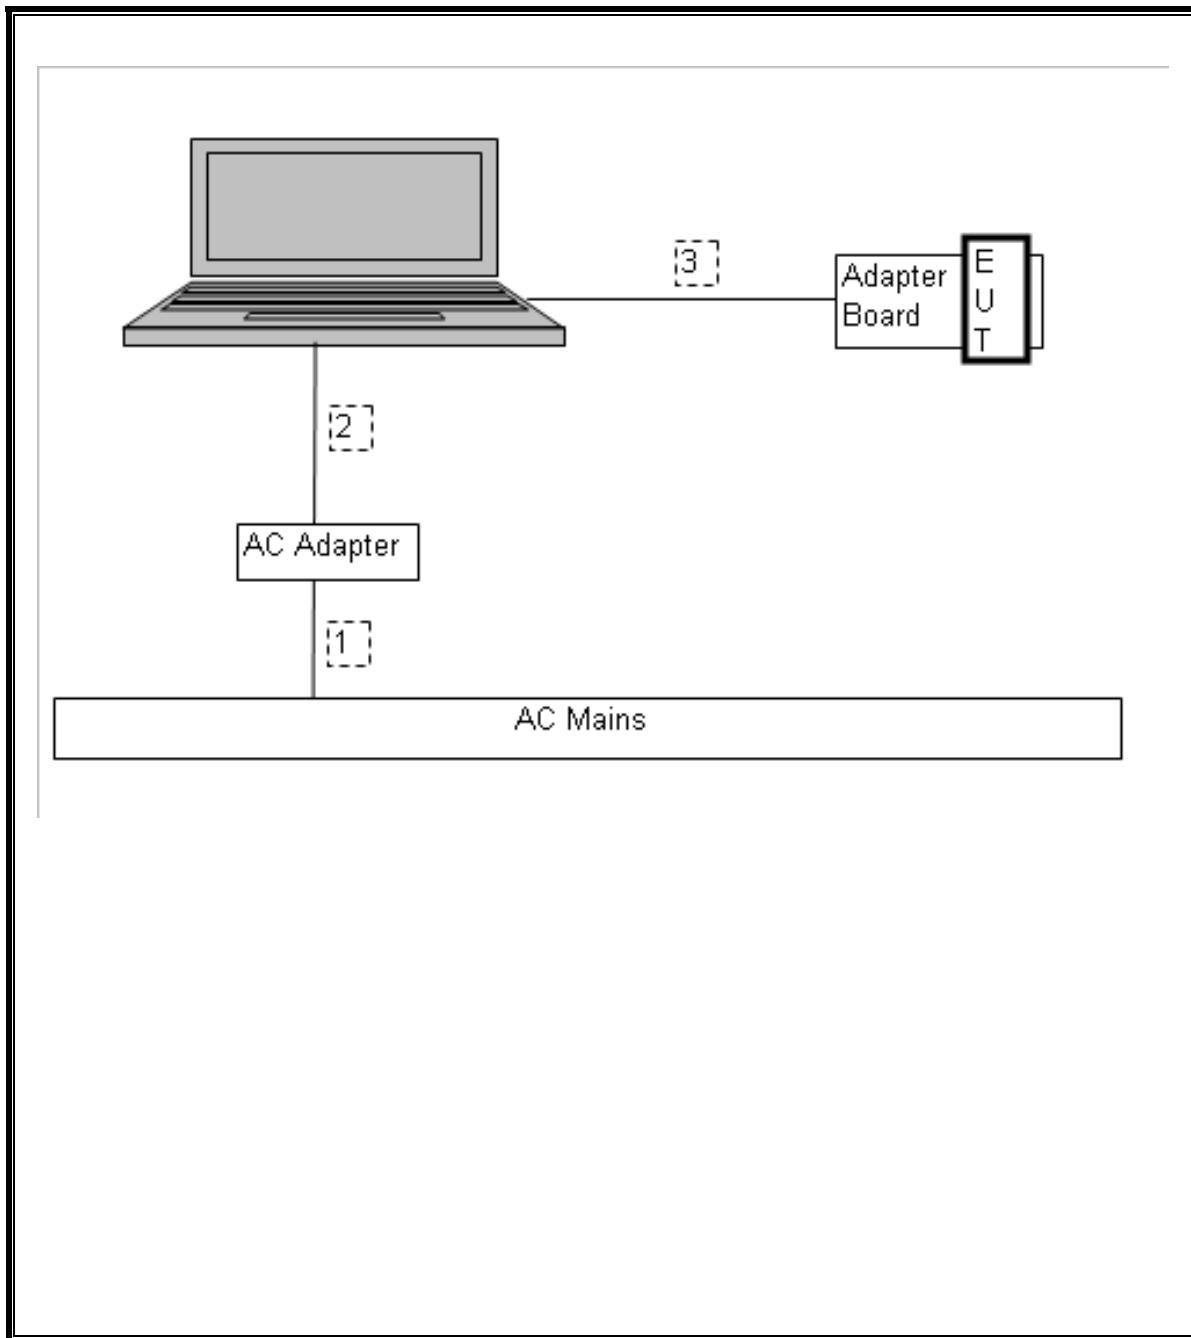

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	08/10/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/14/11
Antenna, BiLog, 2 GHz	Sundt Sciences	JB1	C01171	07/12/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	01/27/12
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/11
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	09/03/11
Power Meter	Agilent / HP	438A	C01068	06/16/11
Power Sensor, 18 GHz	Agilent / HP	8481A	N02782	07/28/11

## 7. ANTENNA PORT TEST RESULTS

### 7.1. BASIC DATA RATE GFSK MODULATION

#### 7.1.1. 20 dB BANDWIDTH

##### LIMIT

None; for reporting purposes only.



##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

##### RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	831.221	872.2131
Middle	2441	865.009	825.6685
High	2480	917.369	814.7423


## 20 dB BANDWIDTH

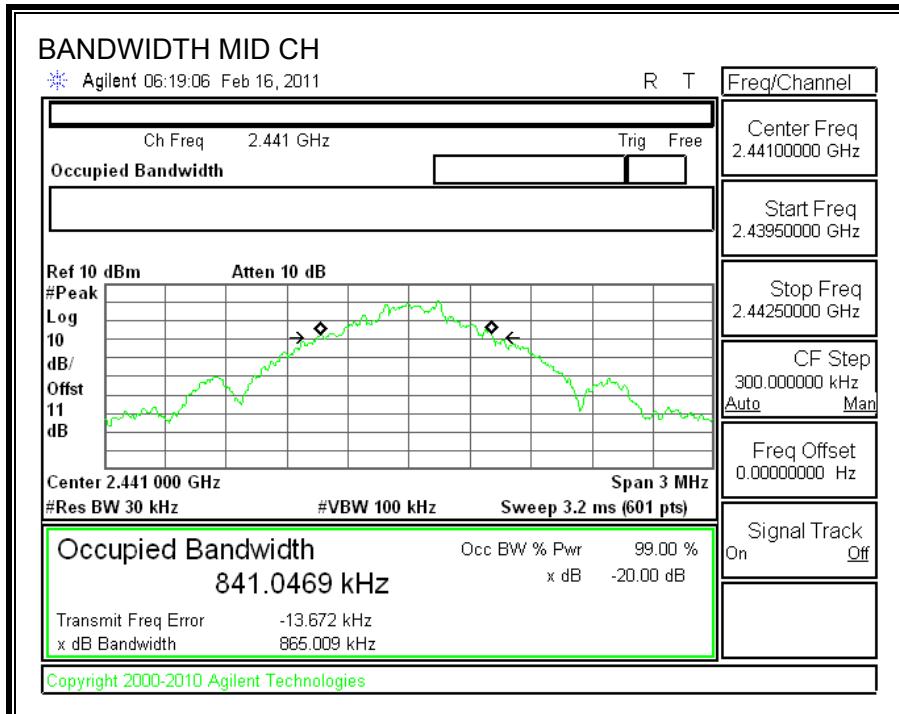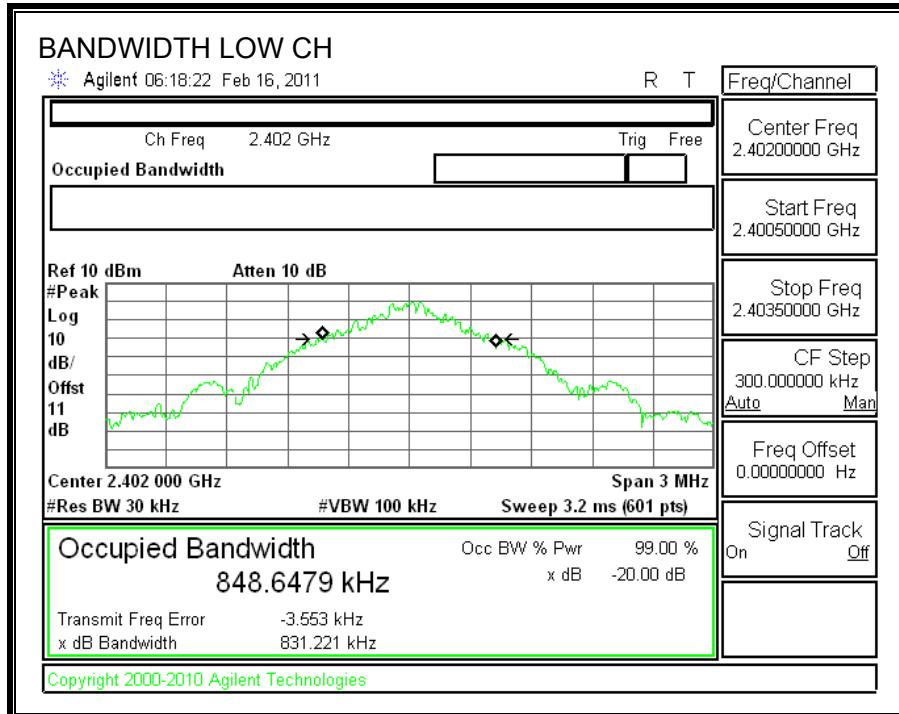

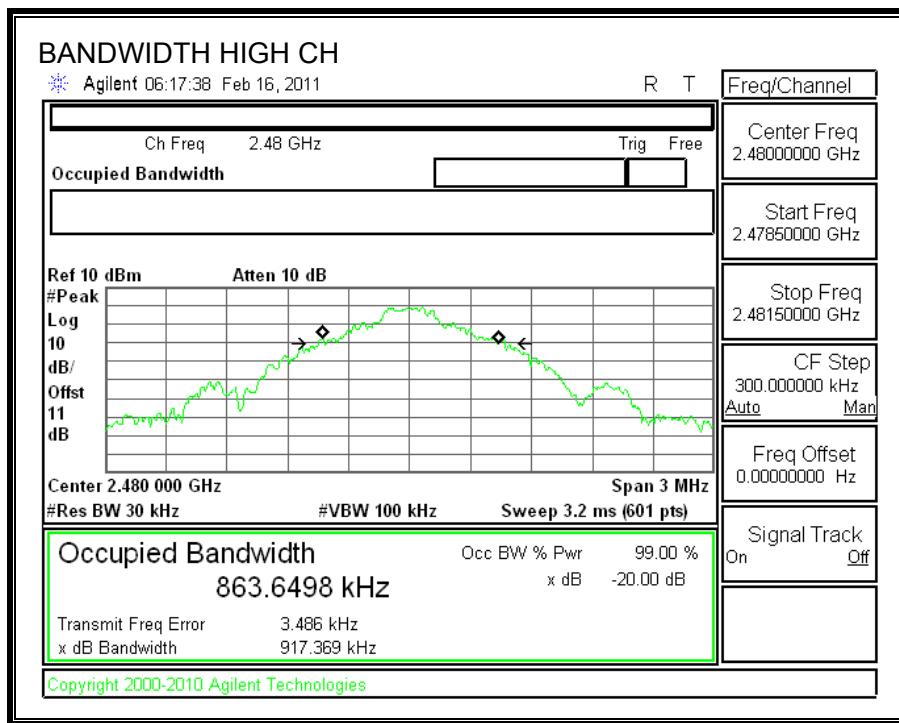

**99% BANDWIDTH**

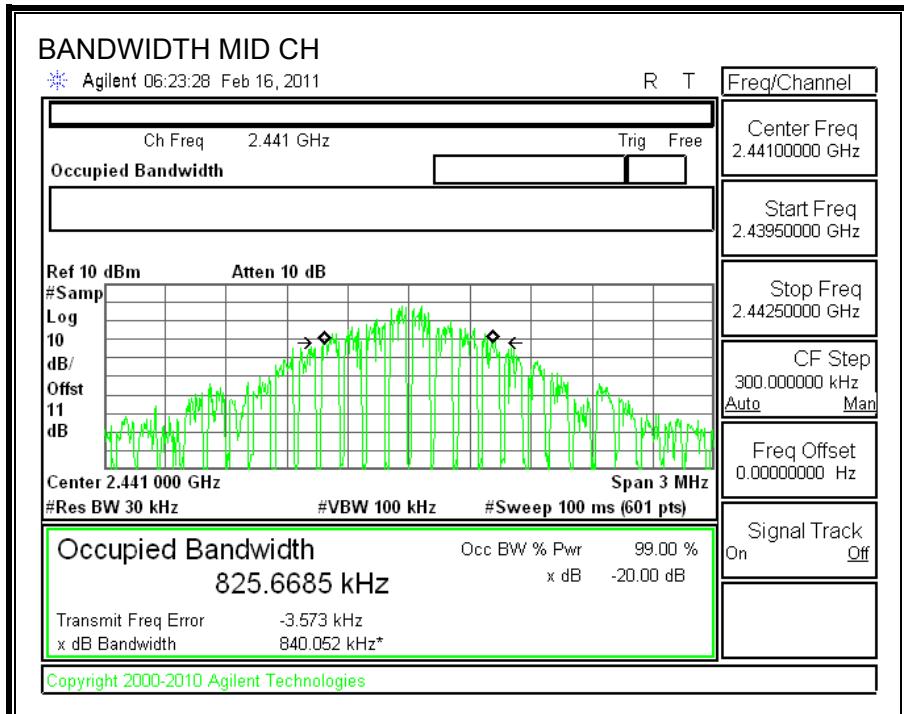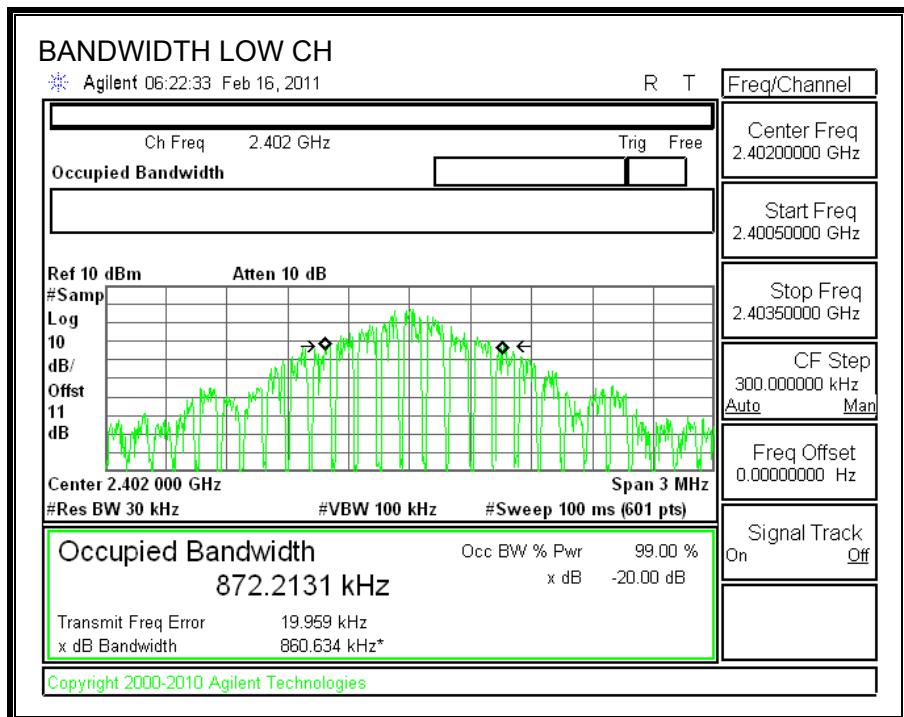

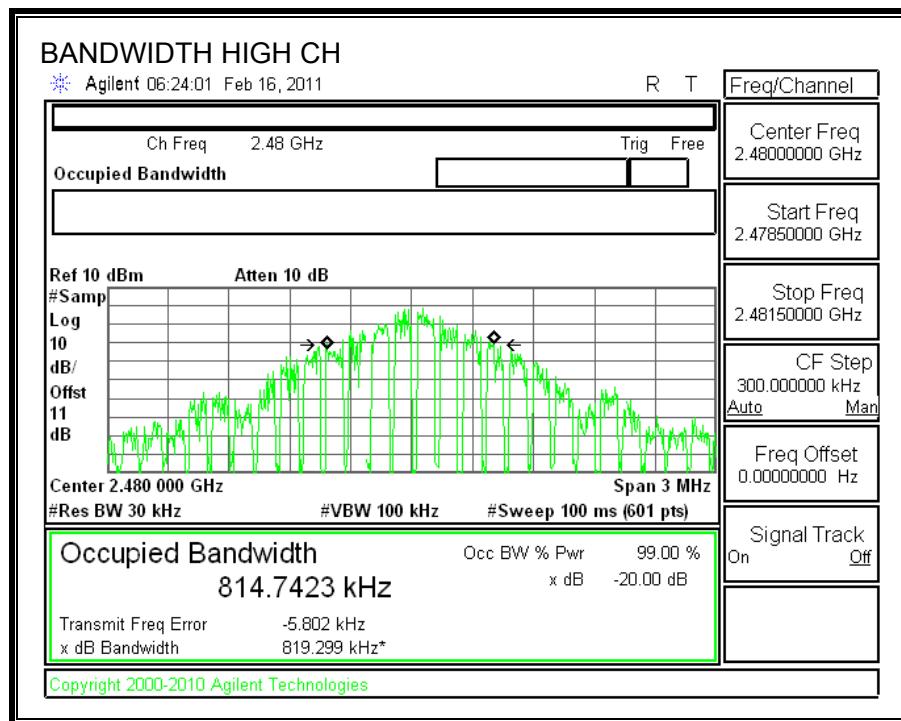

### 7.1.2. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

## HOPPING FREQUENCY SEPARATION

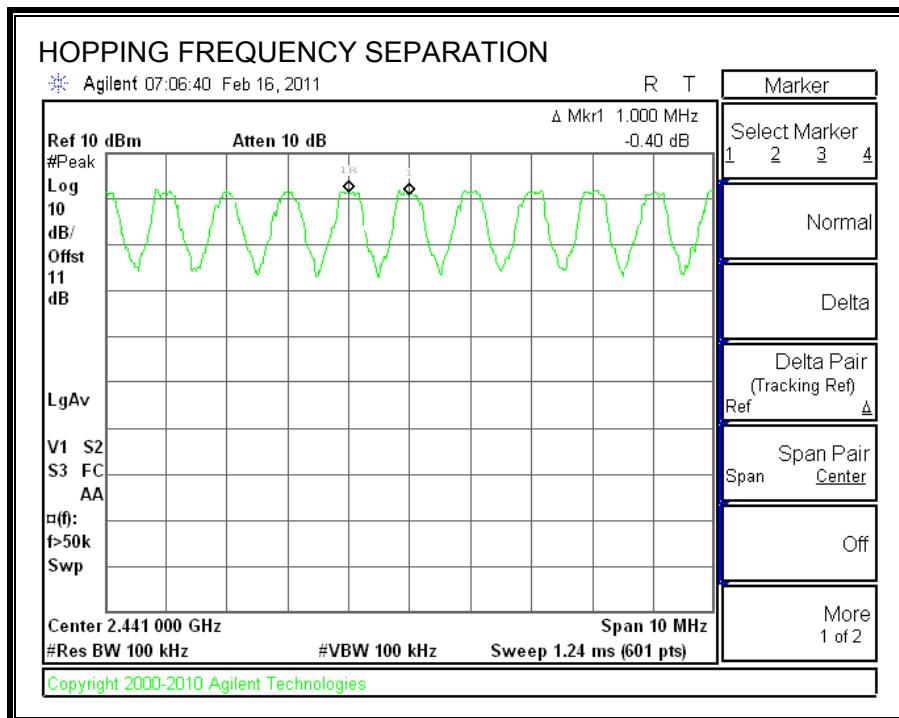

### 7.1.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

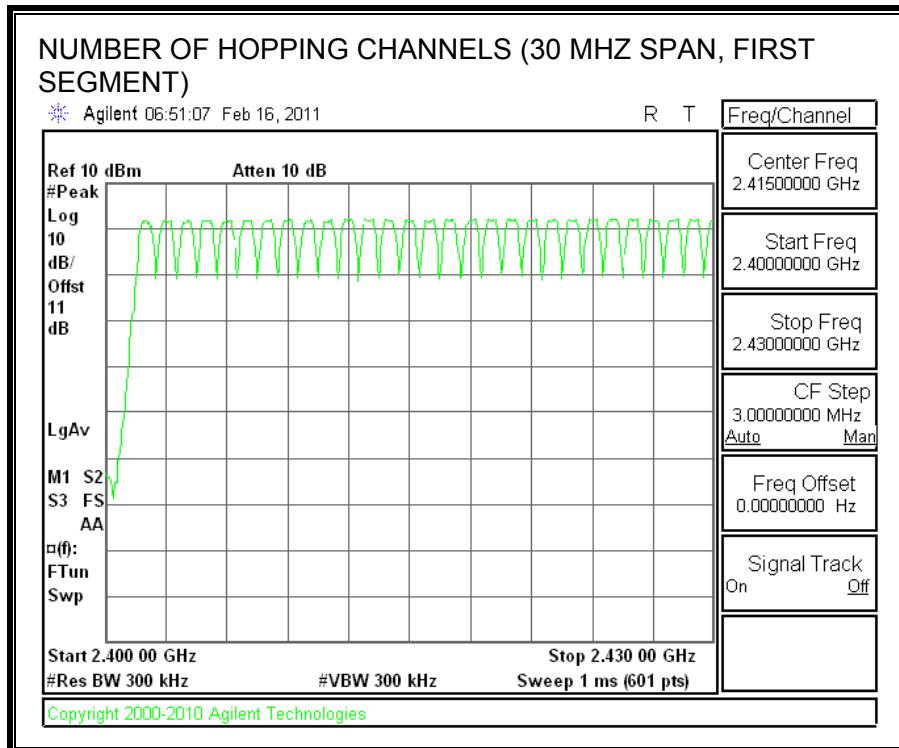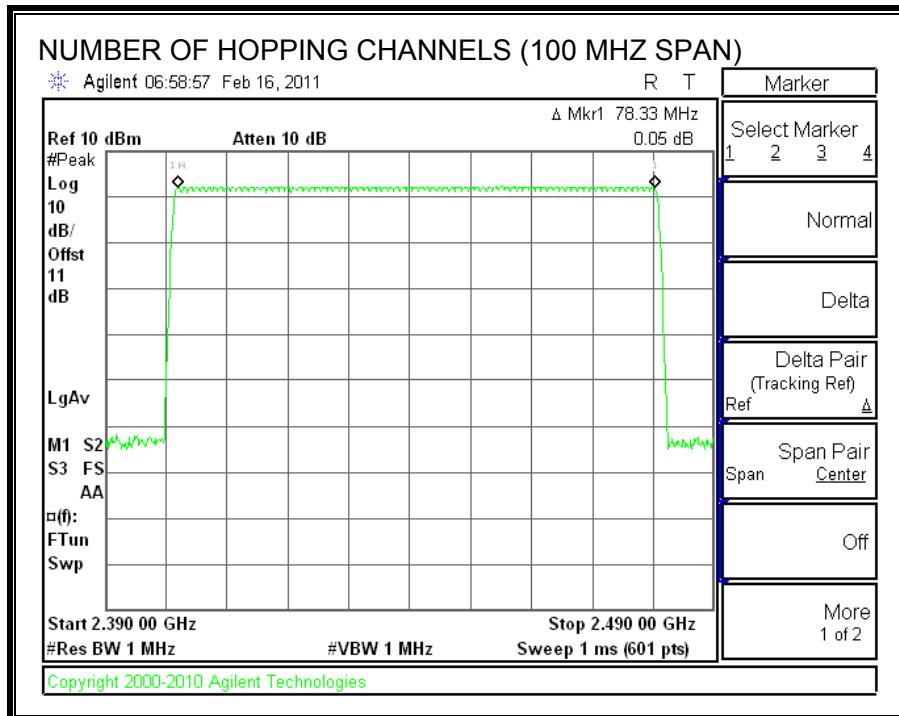

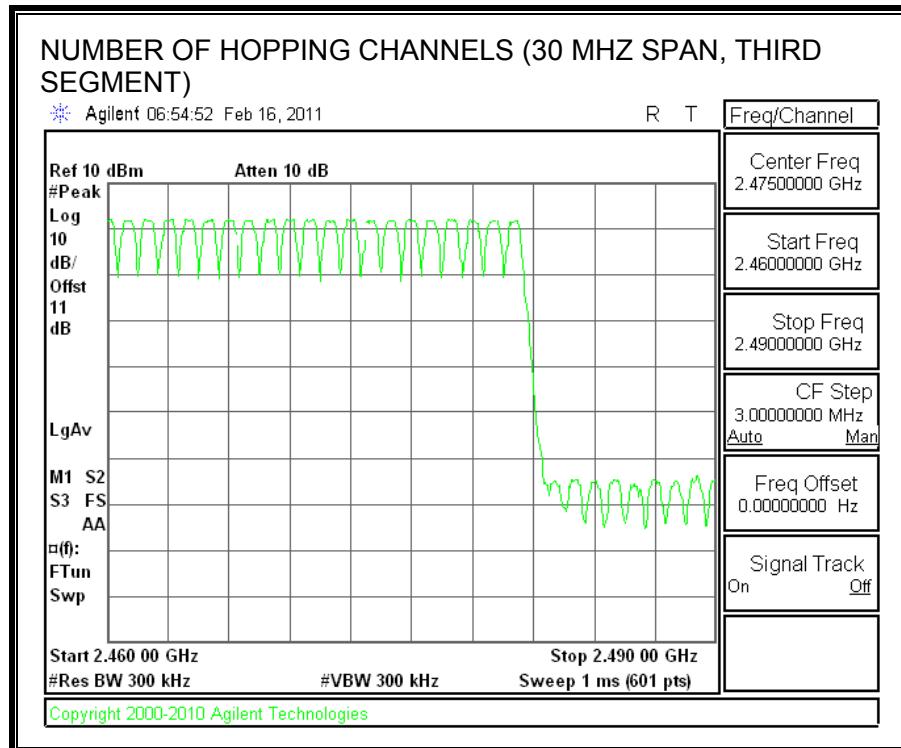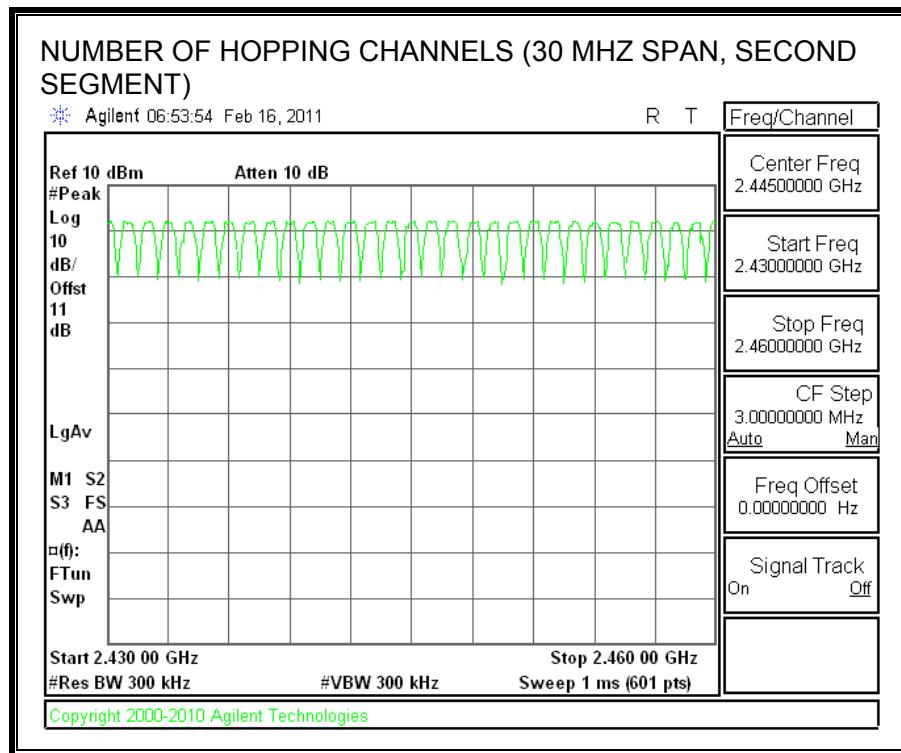

#### 7.1.4. AVERAGE TIME OF OCCUPANCY

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .


##### RESULTS

###### GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.4367	29	0.127	0.4	0.273
DH3	1.633	15	0.245	0.4	0.155
DH5	2.883	8	0.231	0.4	0.169

## DH1

### PULSE WIDTH

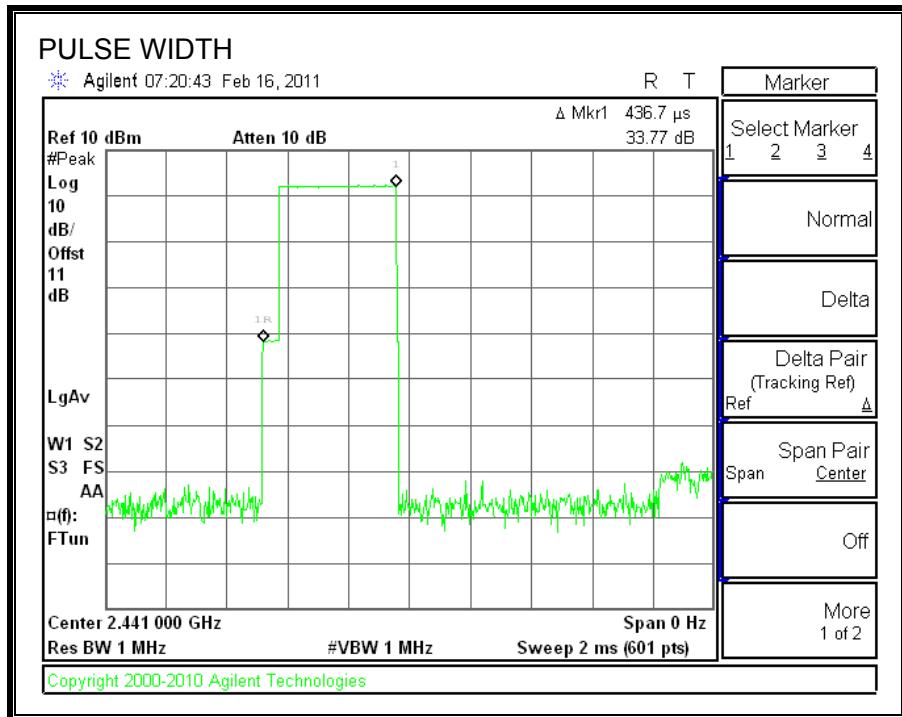


### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

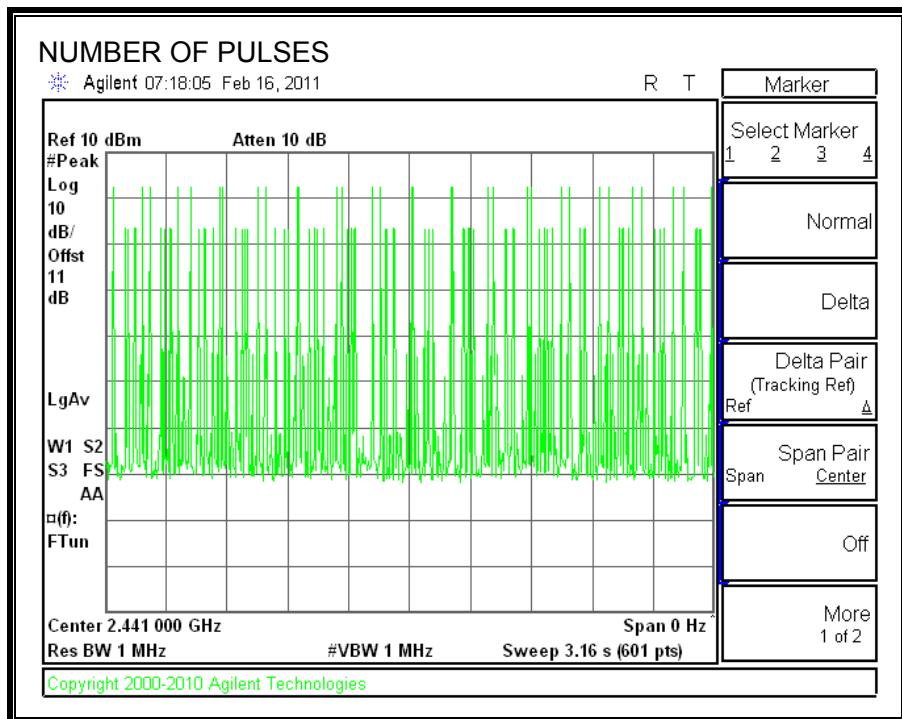


## DH3

### PULSE WIDTH

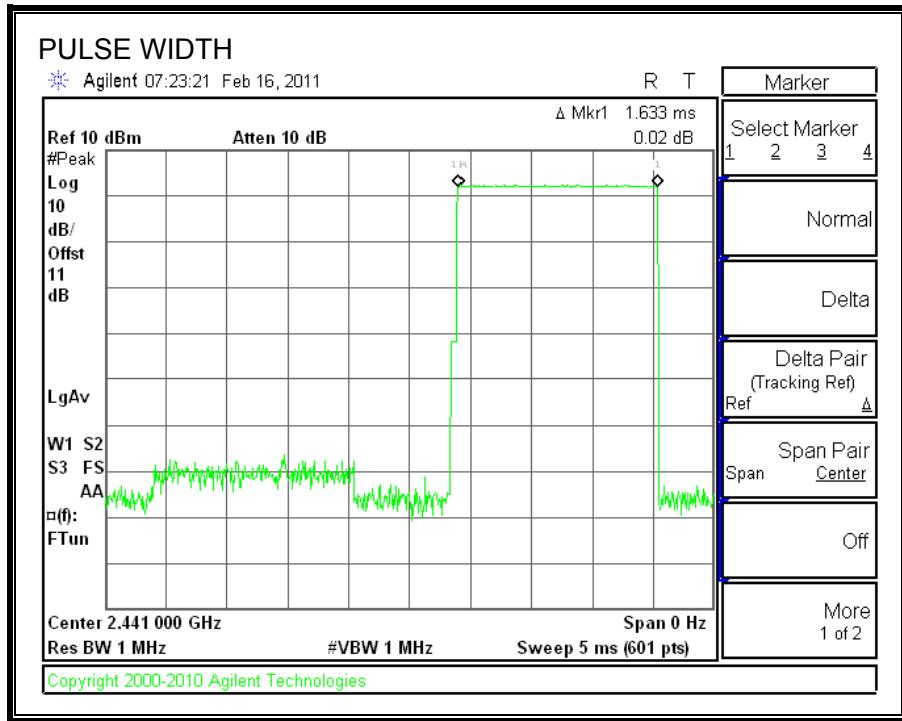


### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

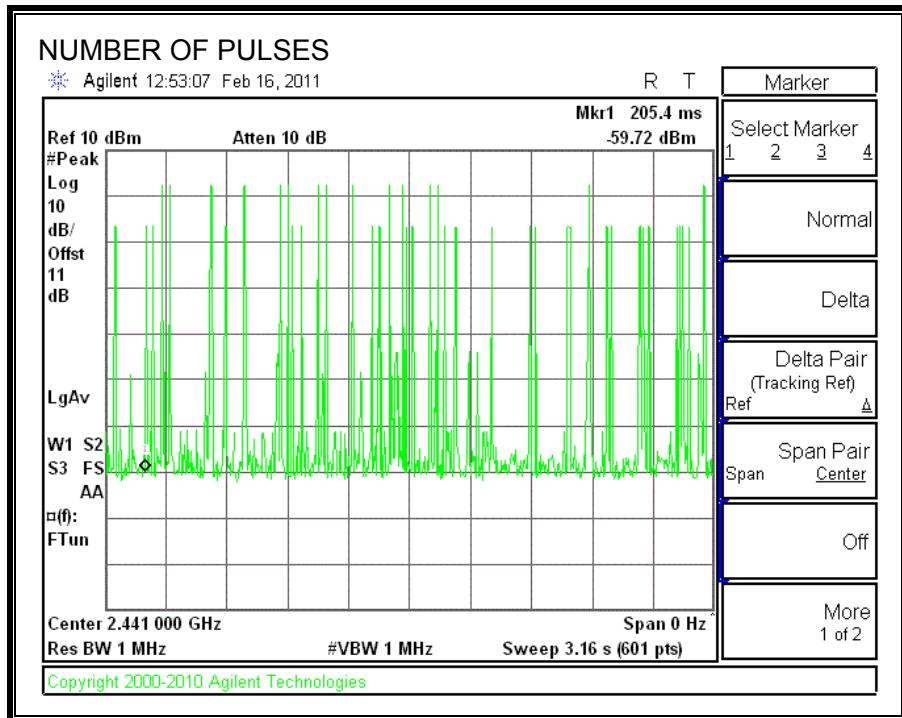


## DH5

### PULSE WIDTH

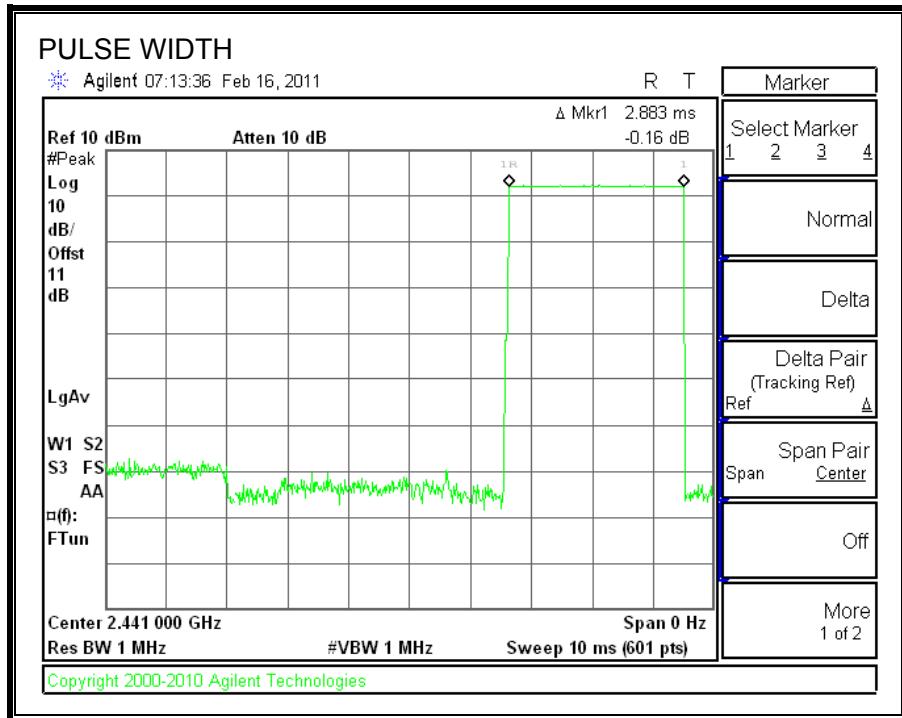

### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

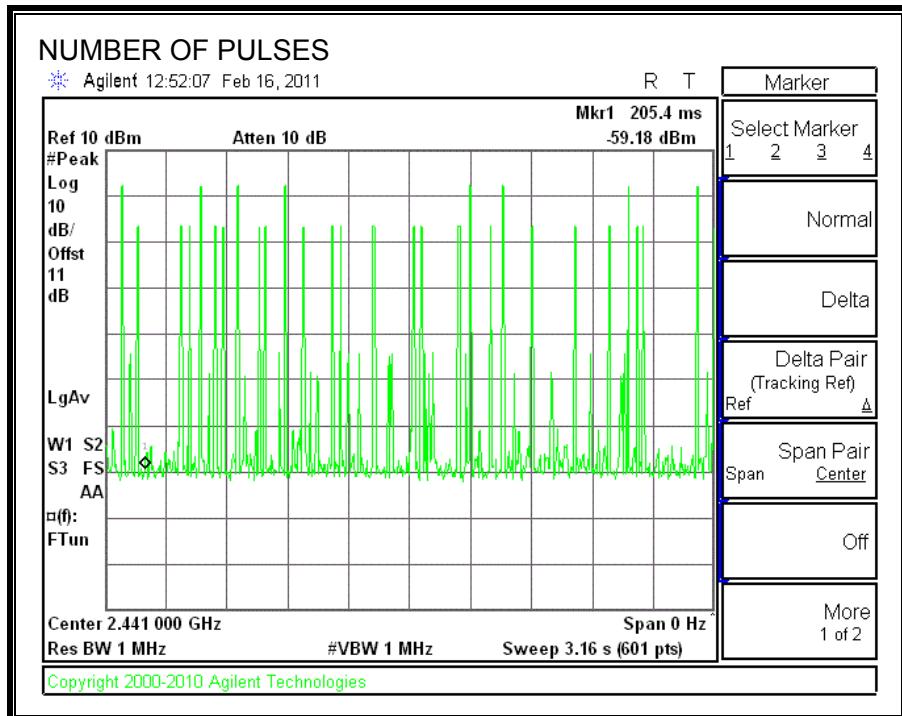

### 7.1.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.15	30	-27.85
Middle	2441	2.33	30	-27.67
High	2480	2.15	30	-27.85

## OUTPUT POWER

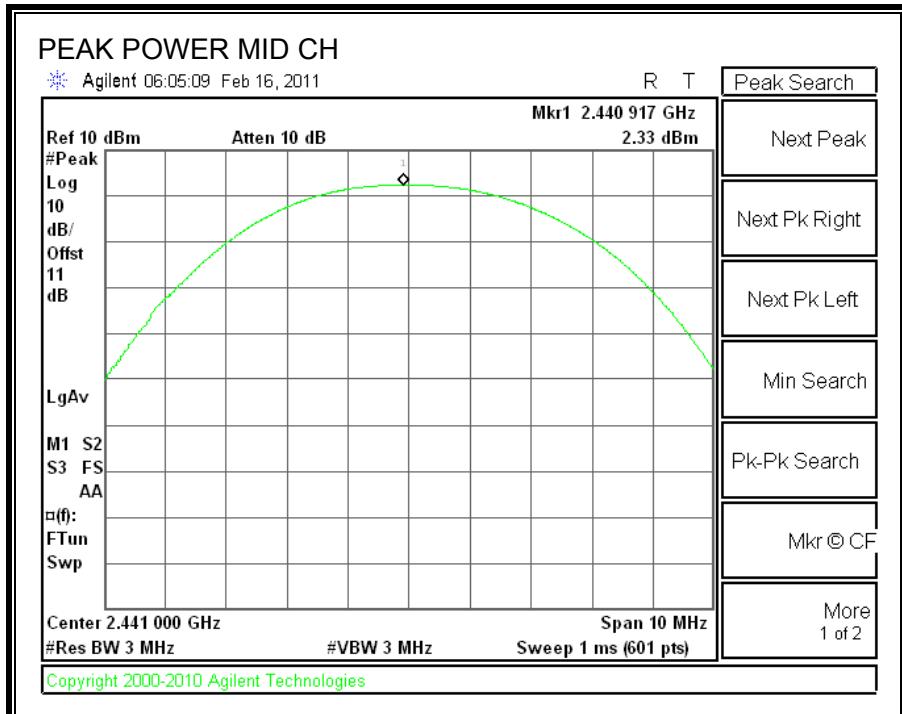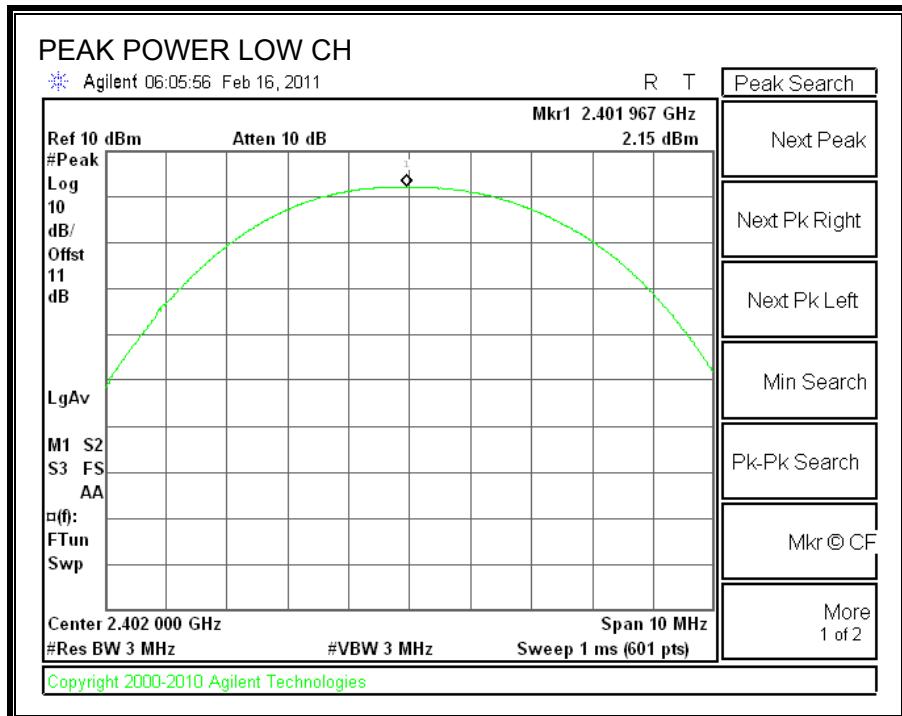

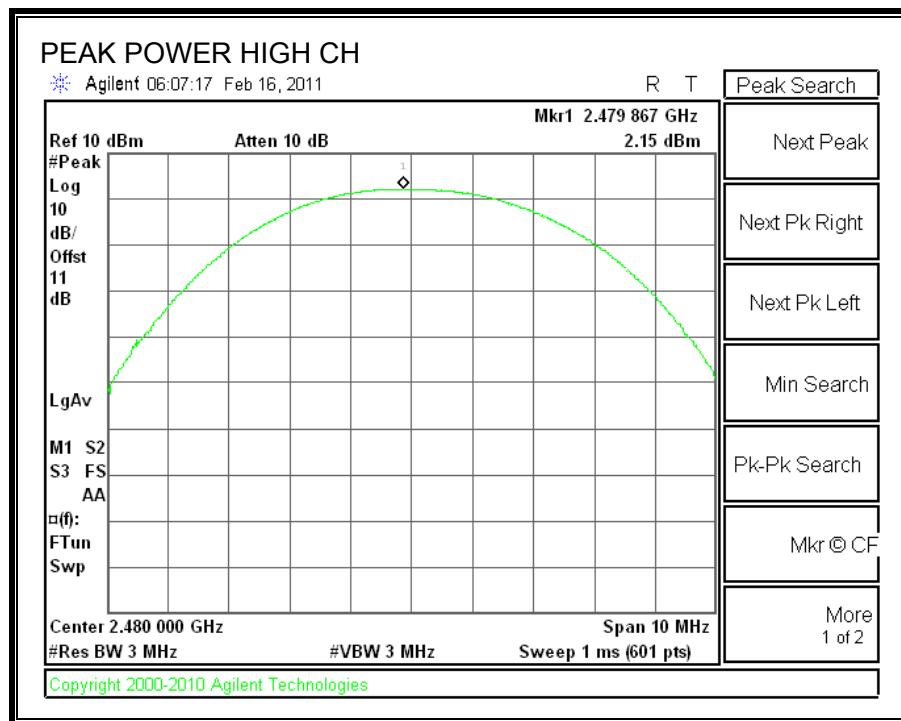

### 7.1.6. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.33
Middle	2441	0.56
High	2480	0.42

### 7.1.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

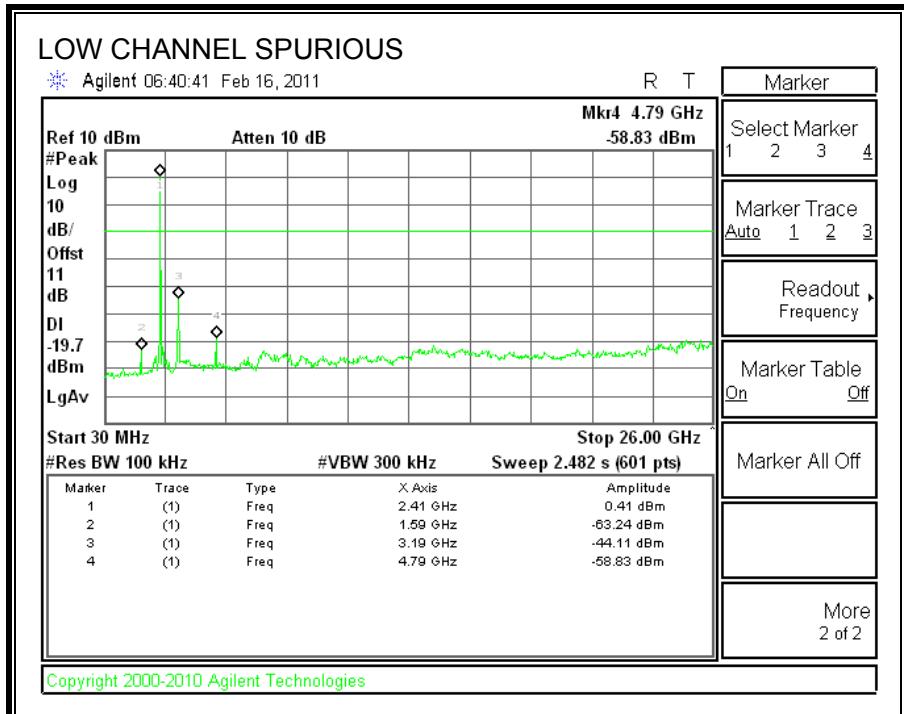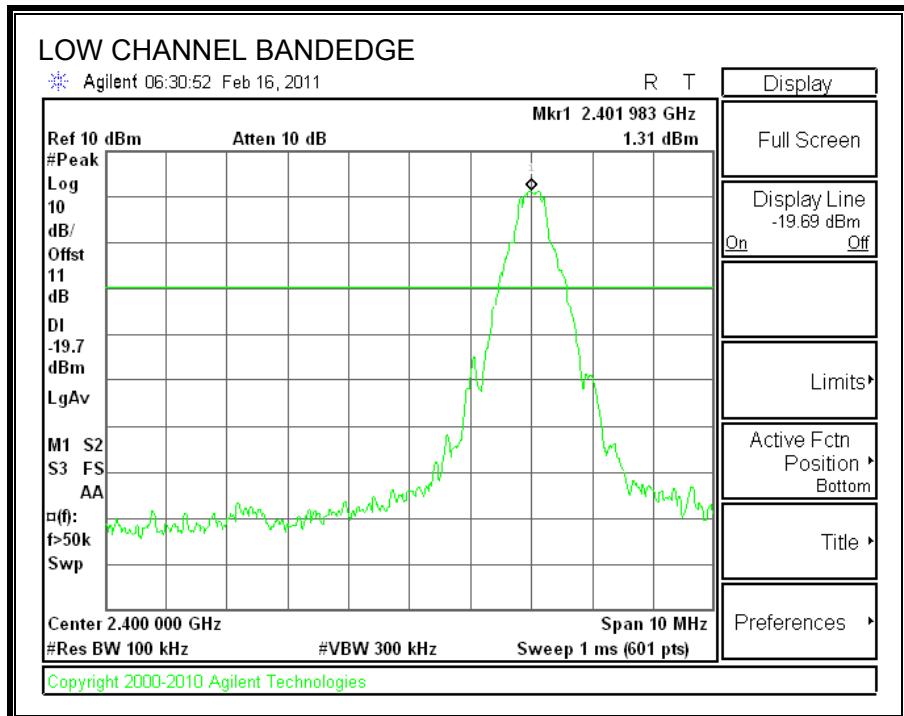



**SPURIOUS EMISSIONS, MID CHANNEL**

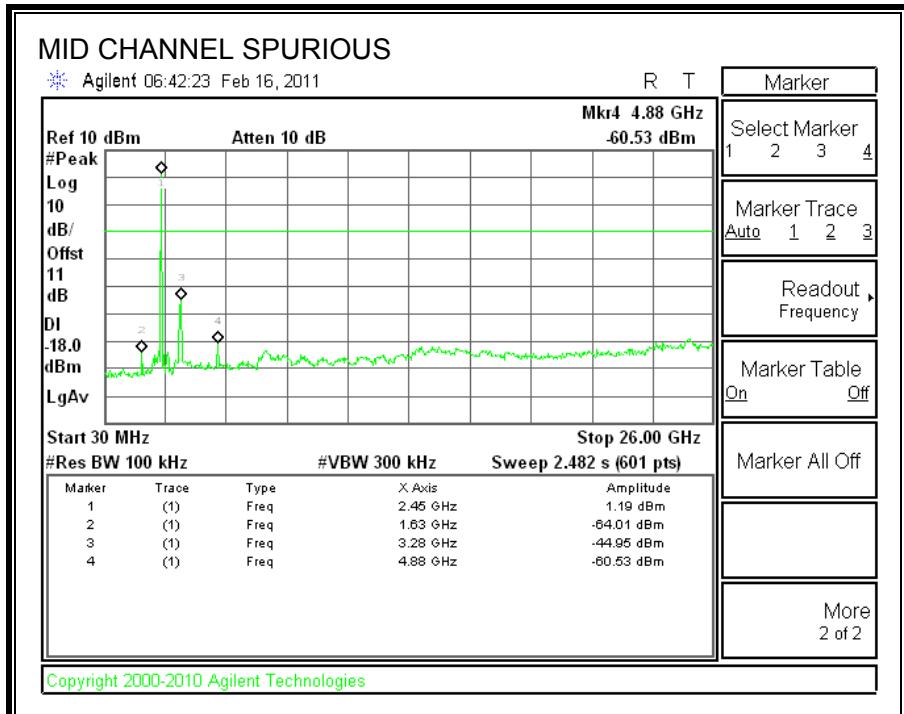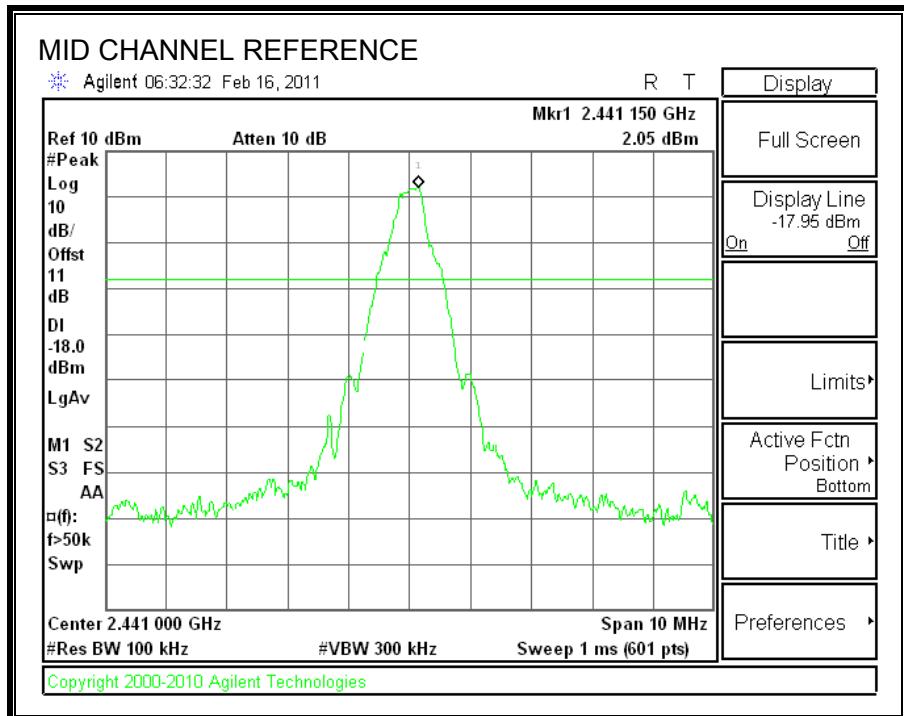

**SPURIOUS EMISSIONS, HIGH CHANNEL**

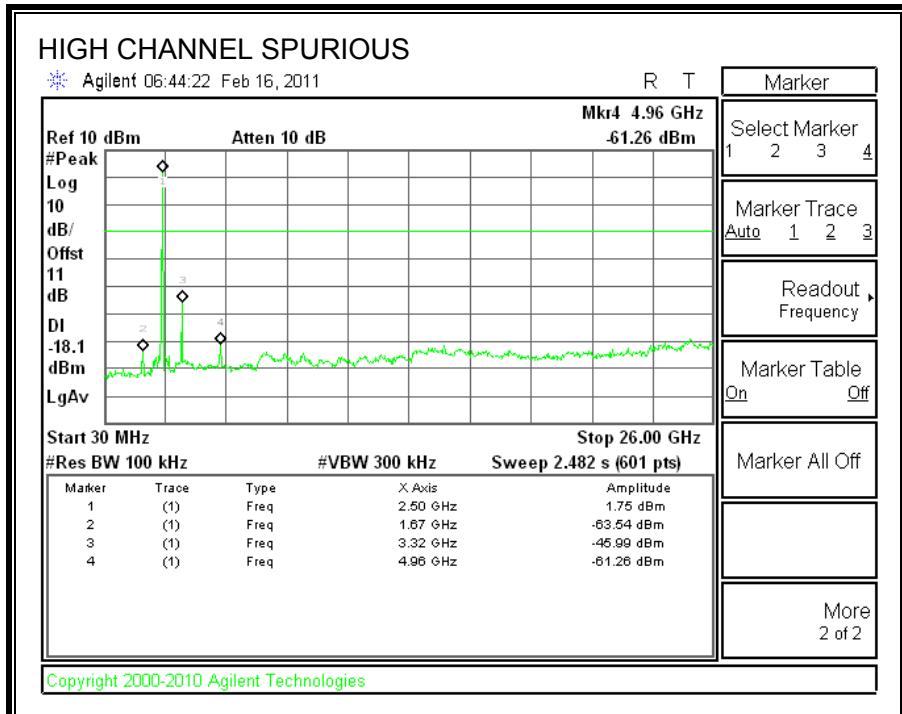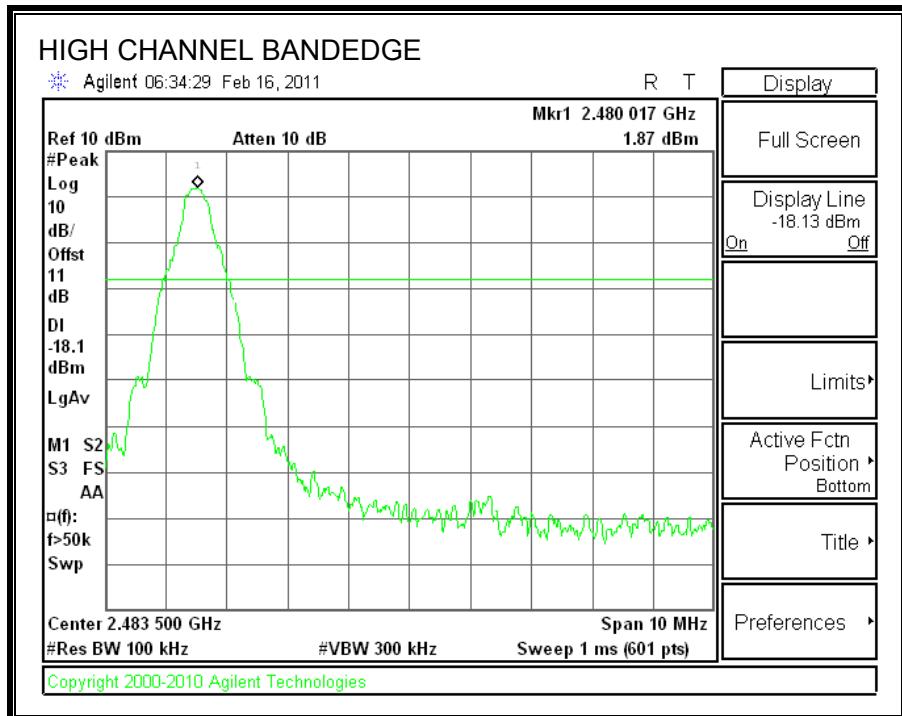

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

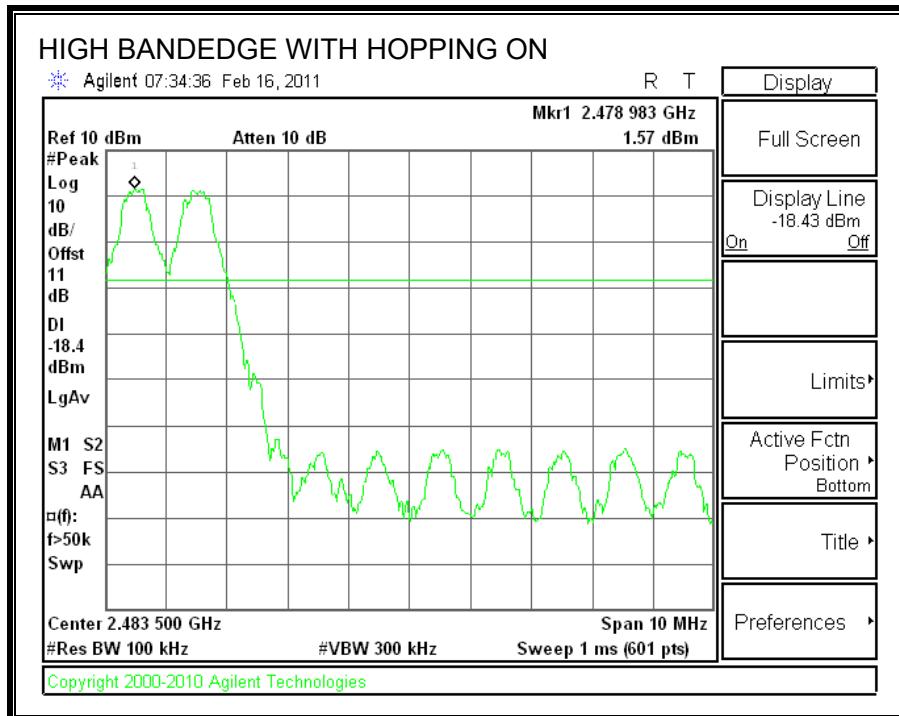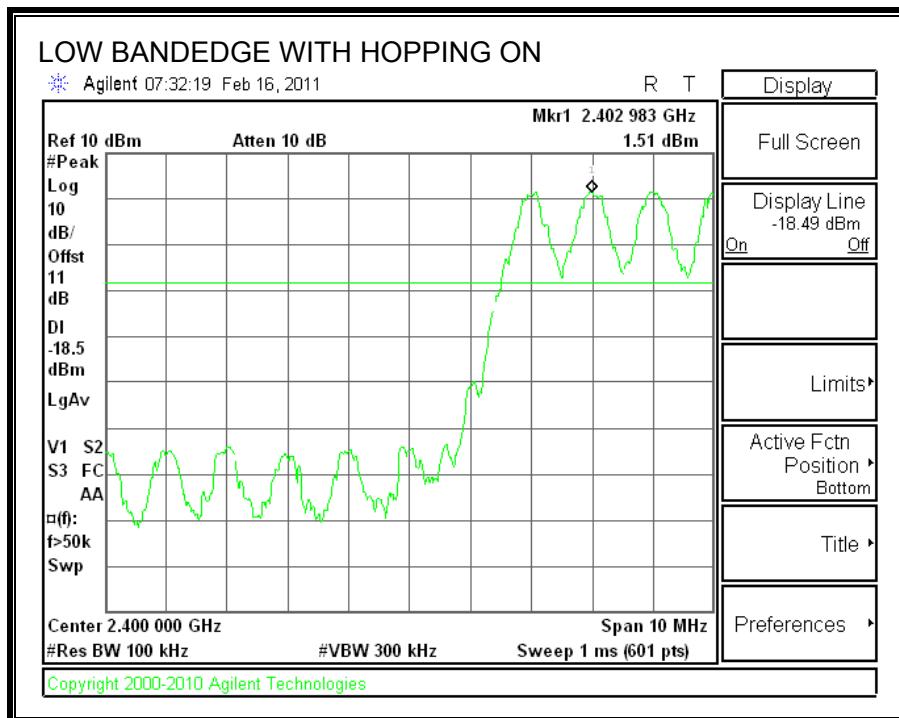

## 7.2. ENHANCED DATA RATE 8PSK MODULATION

### 7.2.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1329	1195.6
Middle	2441	1285	1176.7
High	2480	1261	1206.8


## 20 dB BANDWIDTH

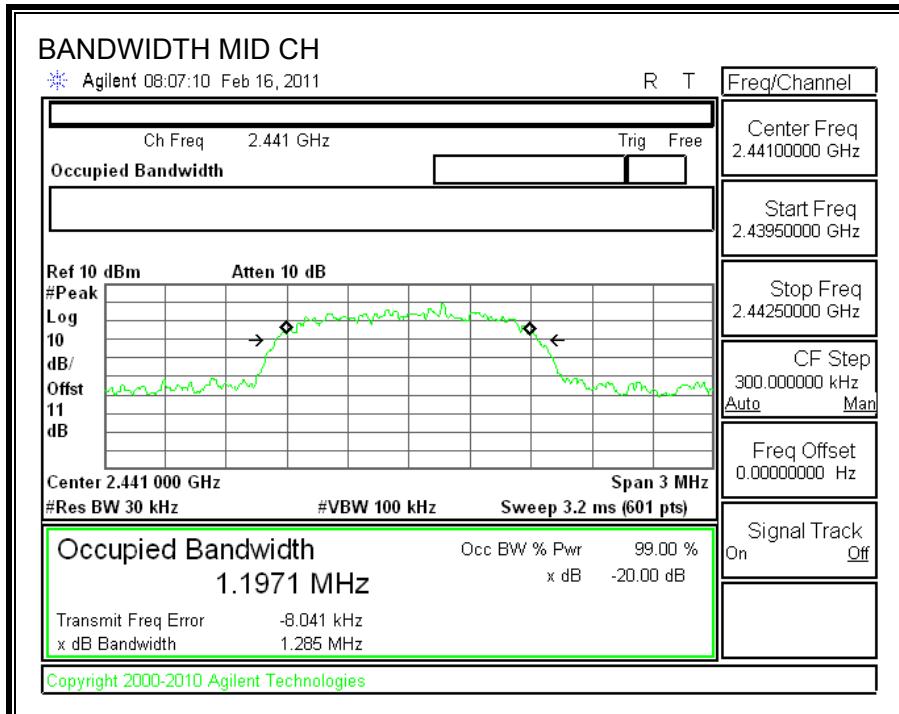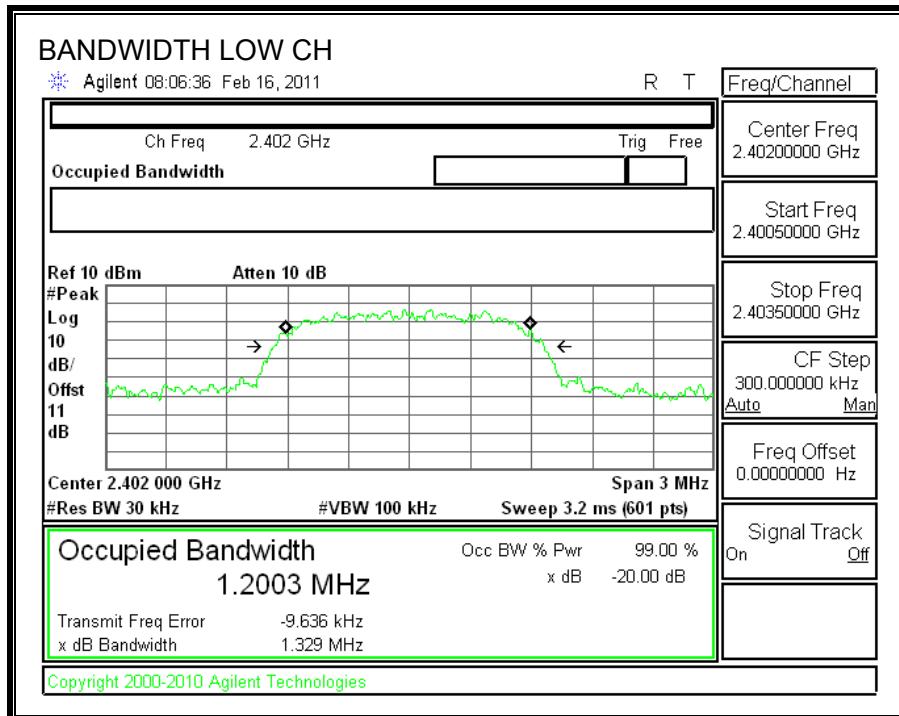

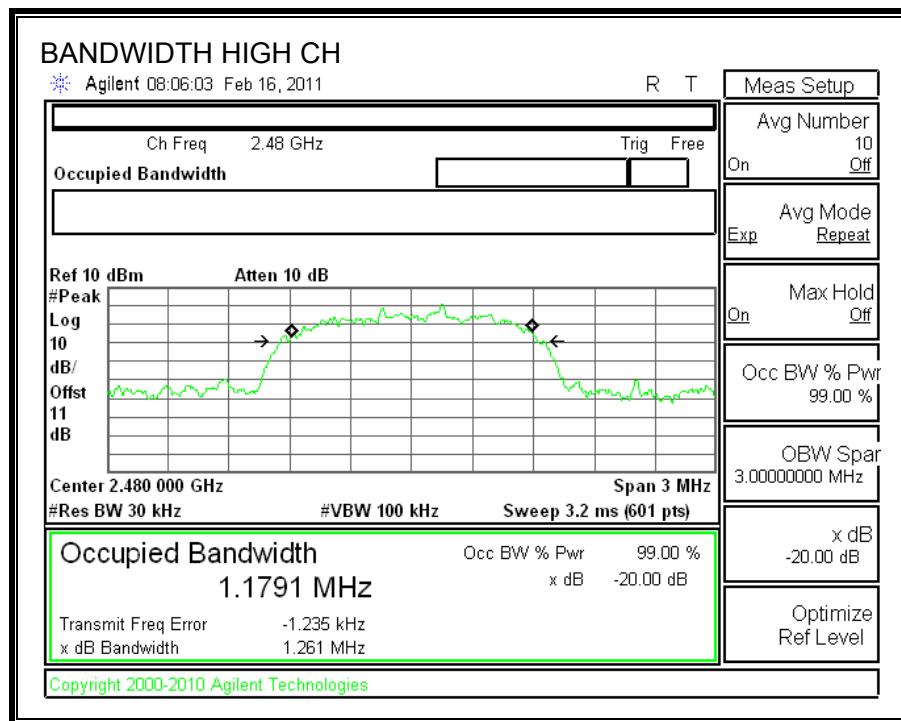

**99% BANDWIDTH**

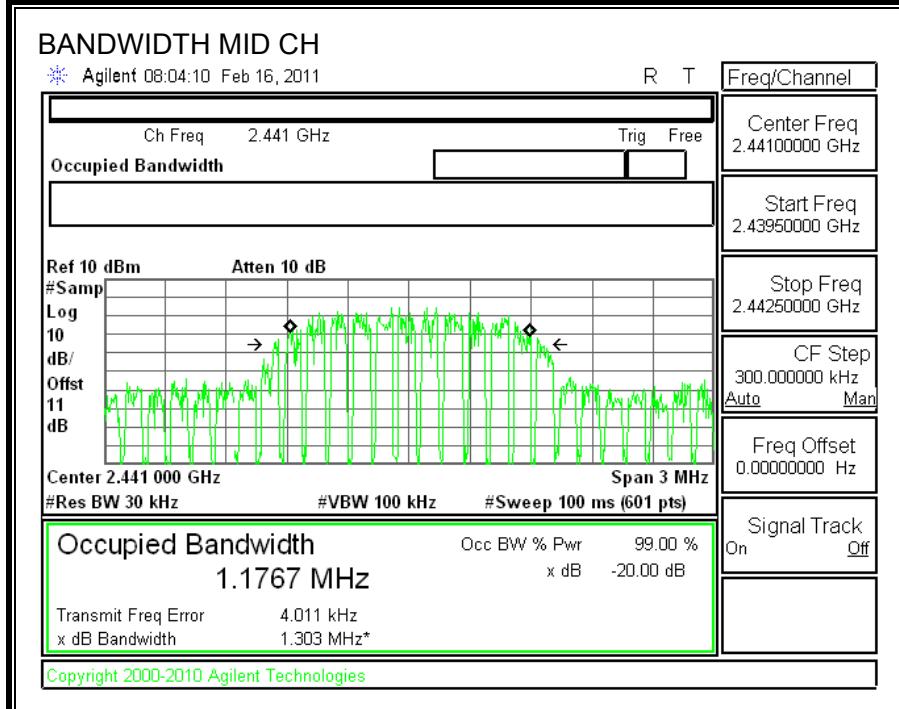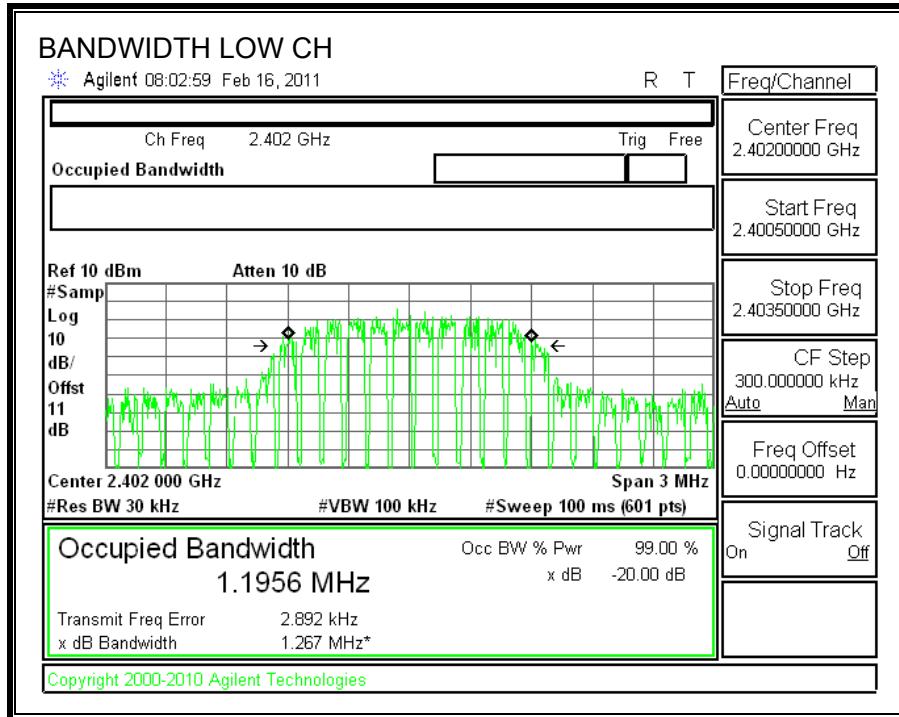

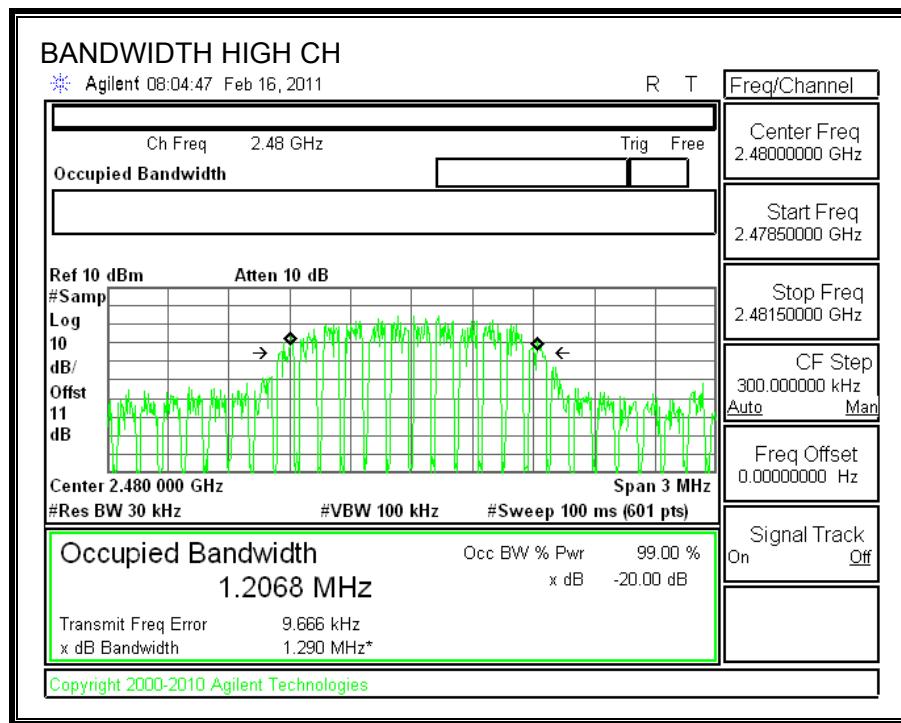

### 7.2.2. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

## HOPPING FREQUENCY SEPARATION

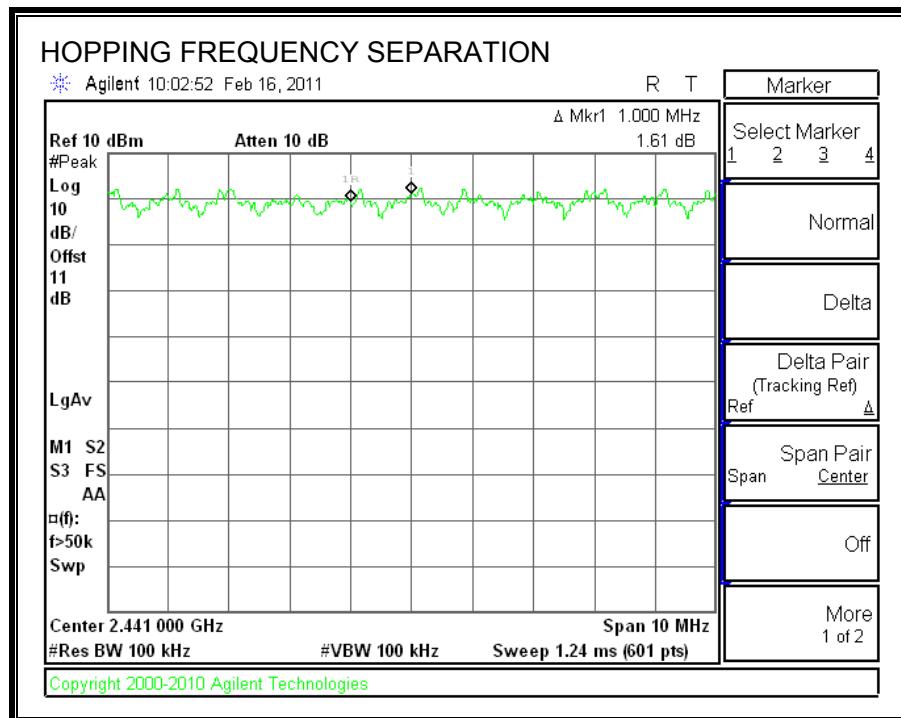

### 7.2.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

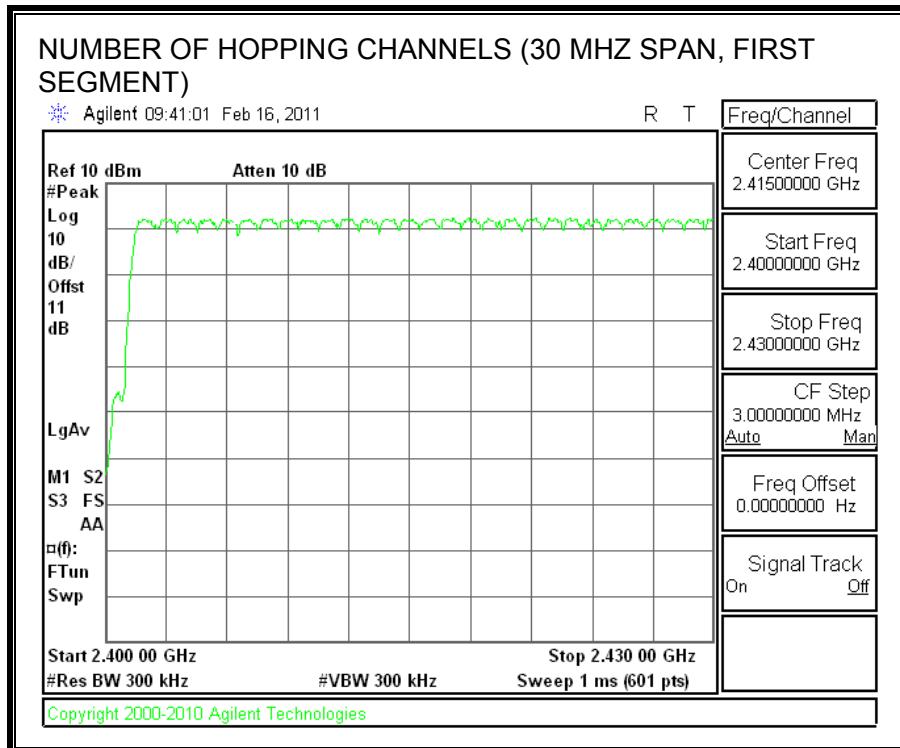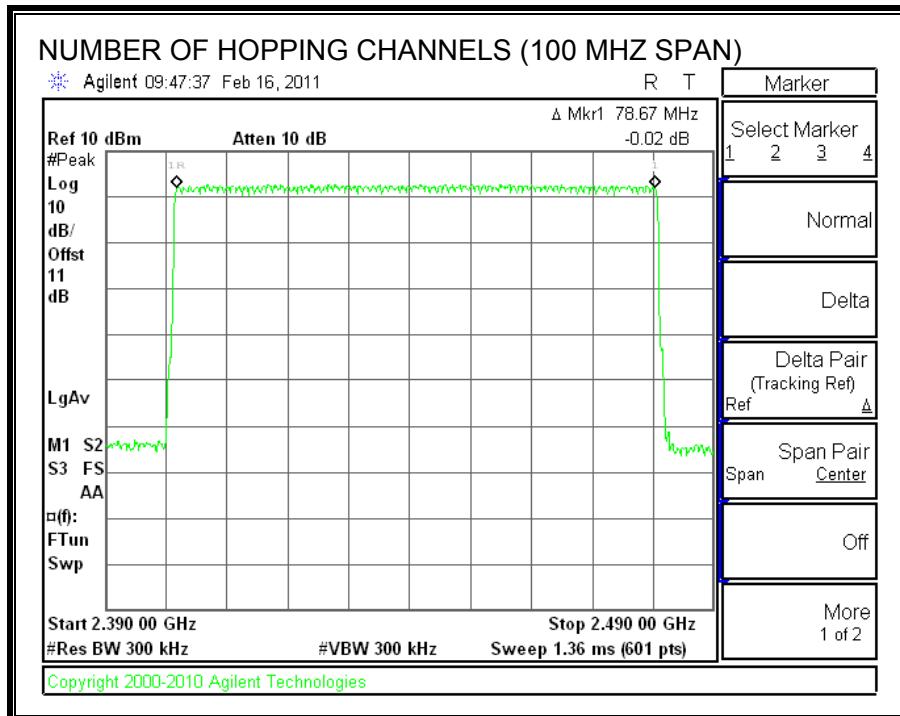

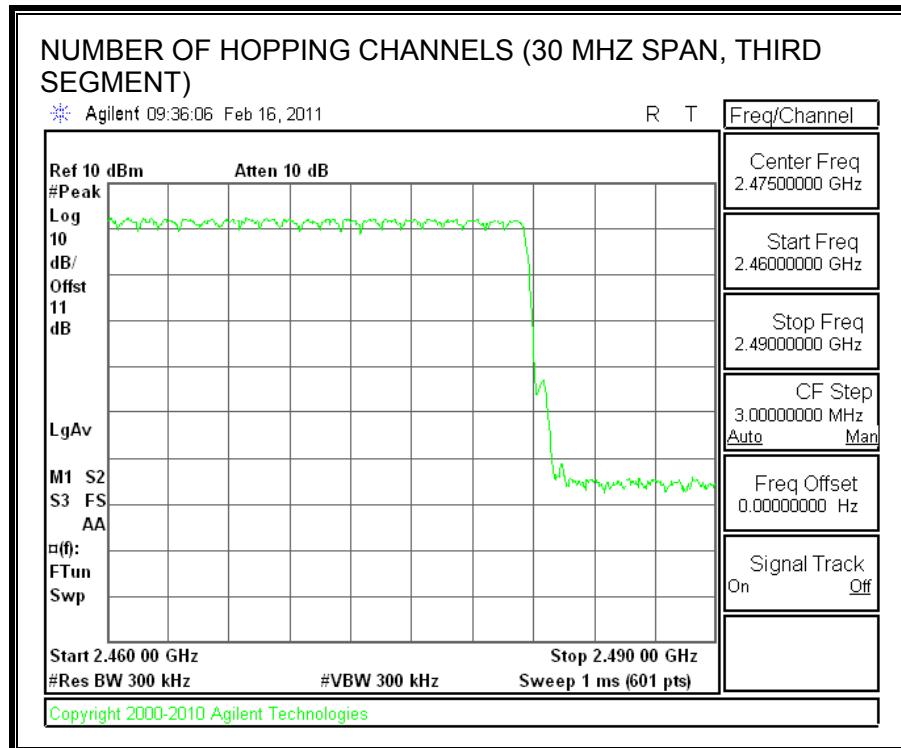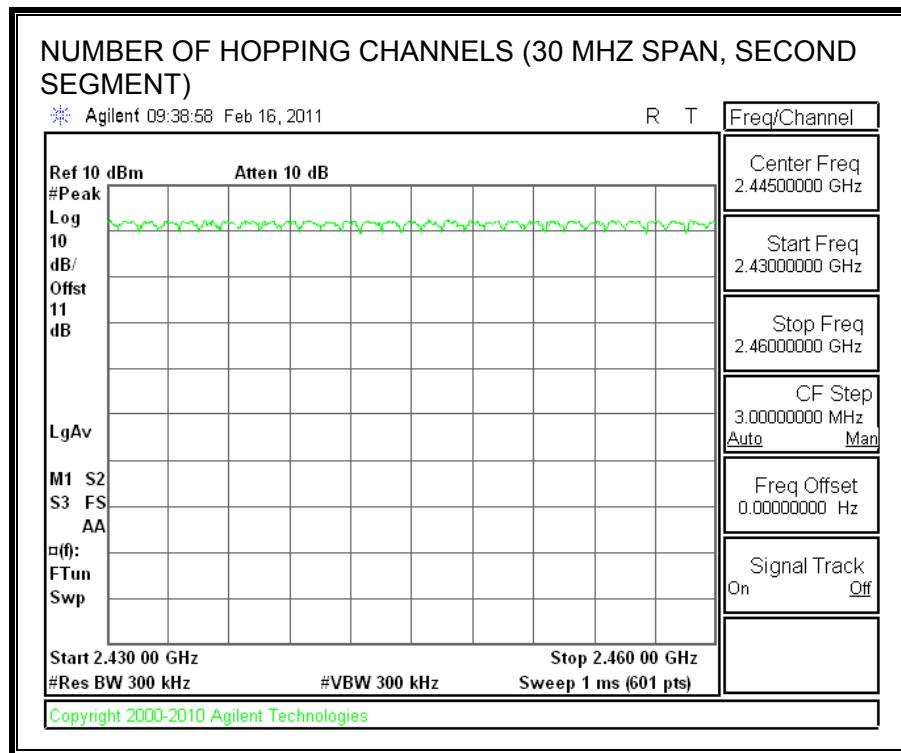

### 7.2.4. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .


#### RESULTS

##### 8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.4571	31	0.142	0.4	0.258
DH3	1.708	15	0.256	0.4	0.144
DH5	2.9	11	0.319	0.4	0.081

## DH1

### PULSE WIDTH

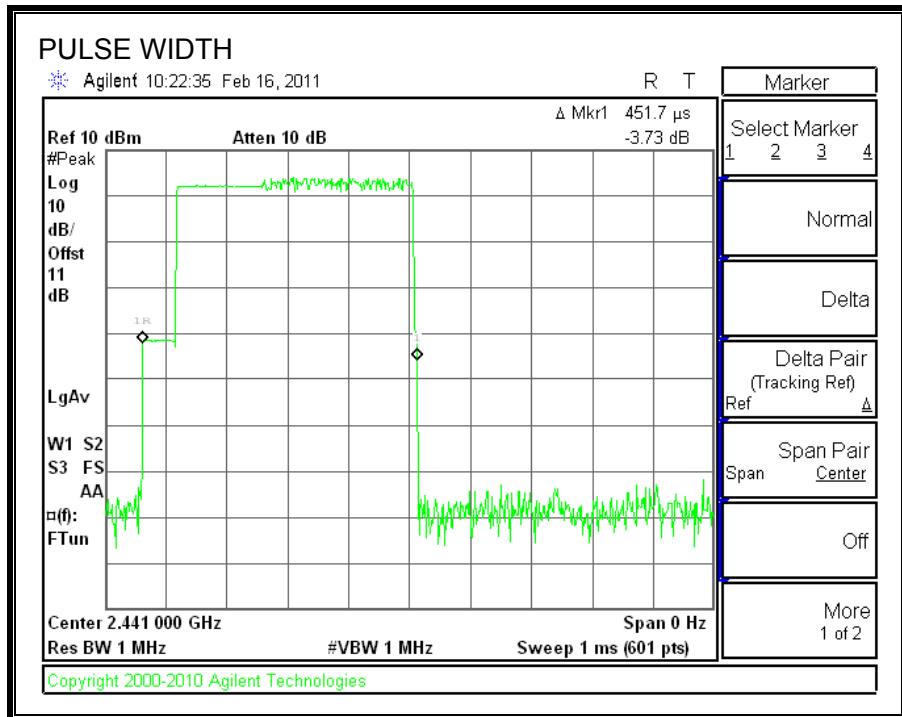


### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

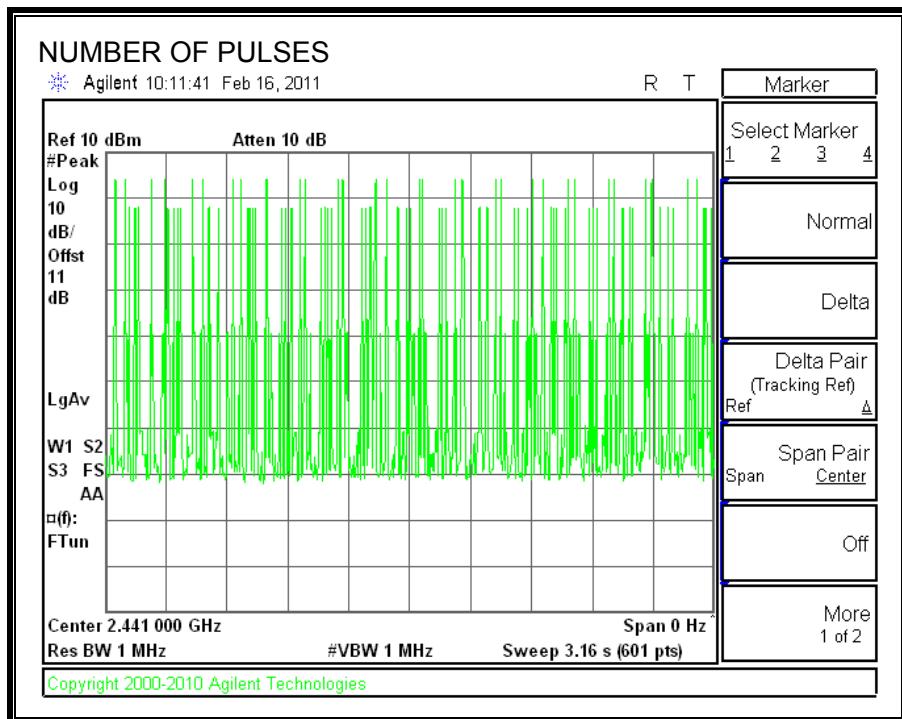


## DH3

### PULSE WIDTH

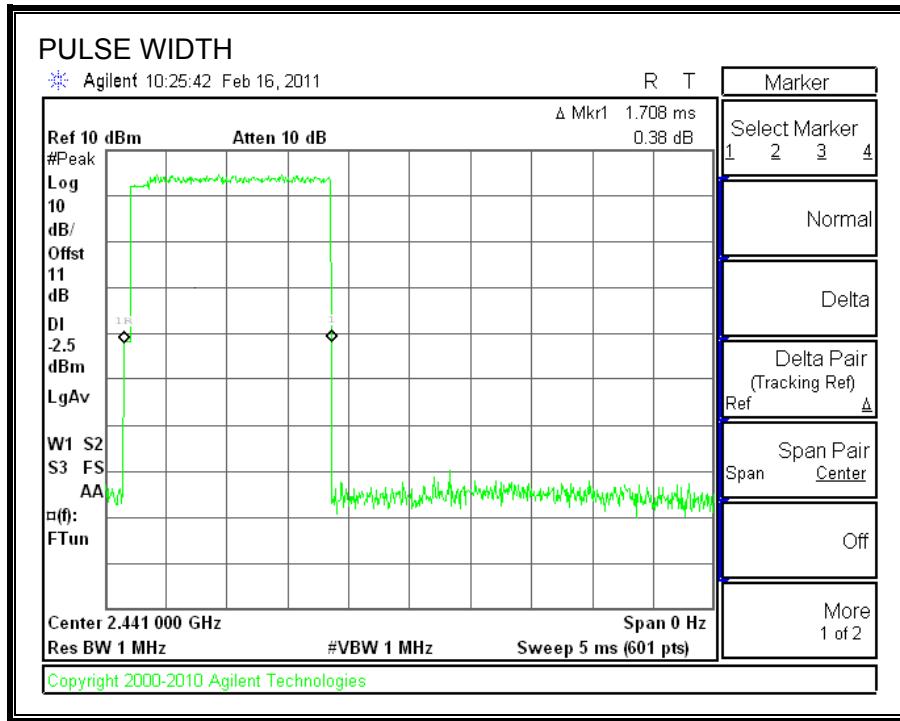


### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

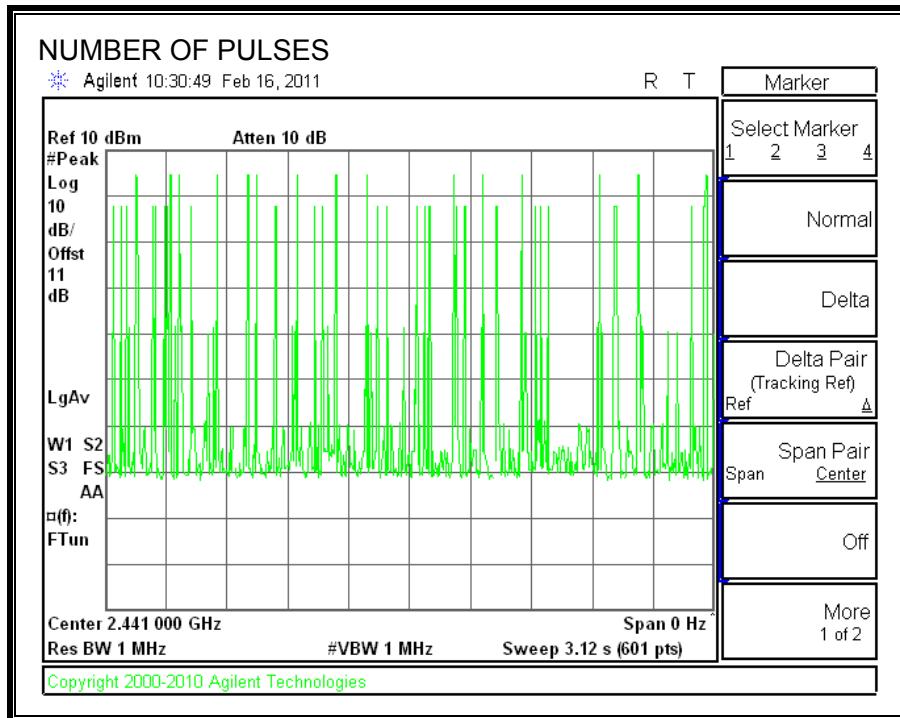


**DH5**

**PULSE WIDTH**

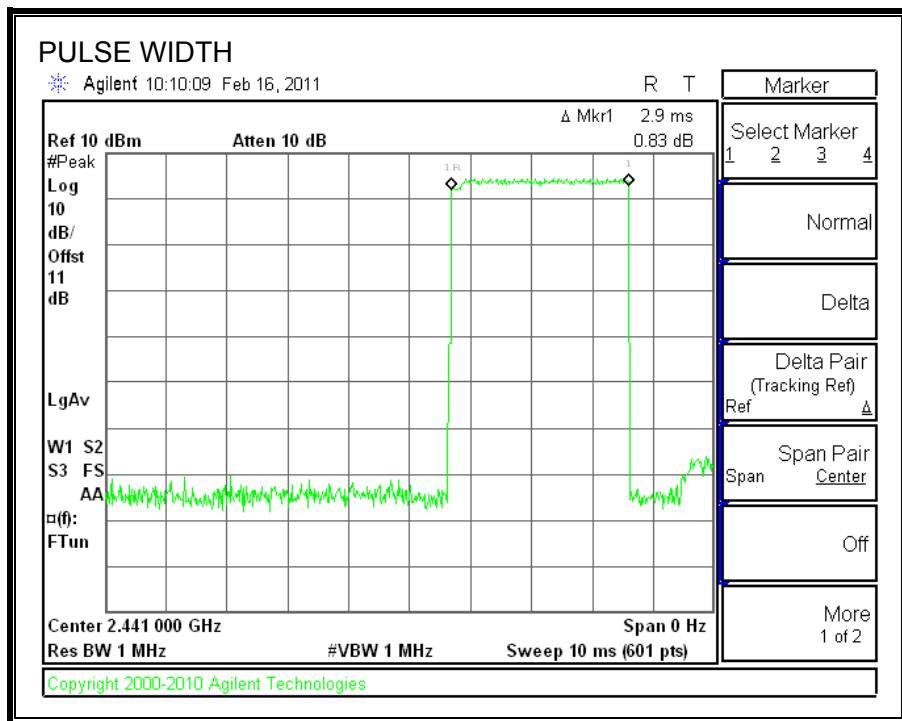

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

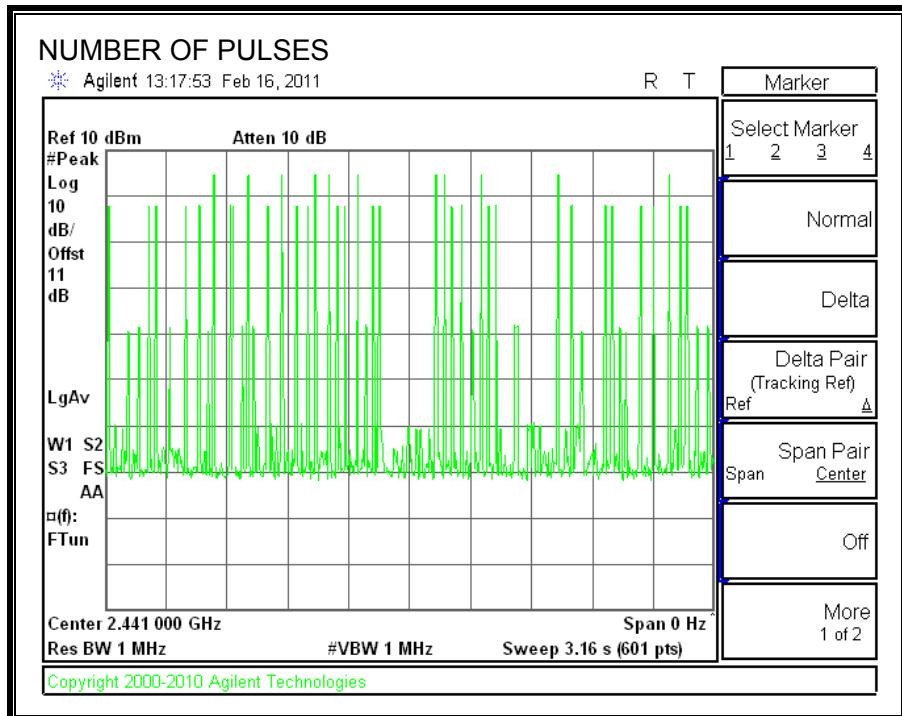

### 7.2.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	5.16	21	-15.81
Middle	2441	5.07	21	-15.90
High	2480	5.05	21	-15.92

## OUTPUT POWER

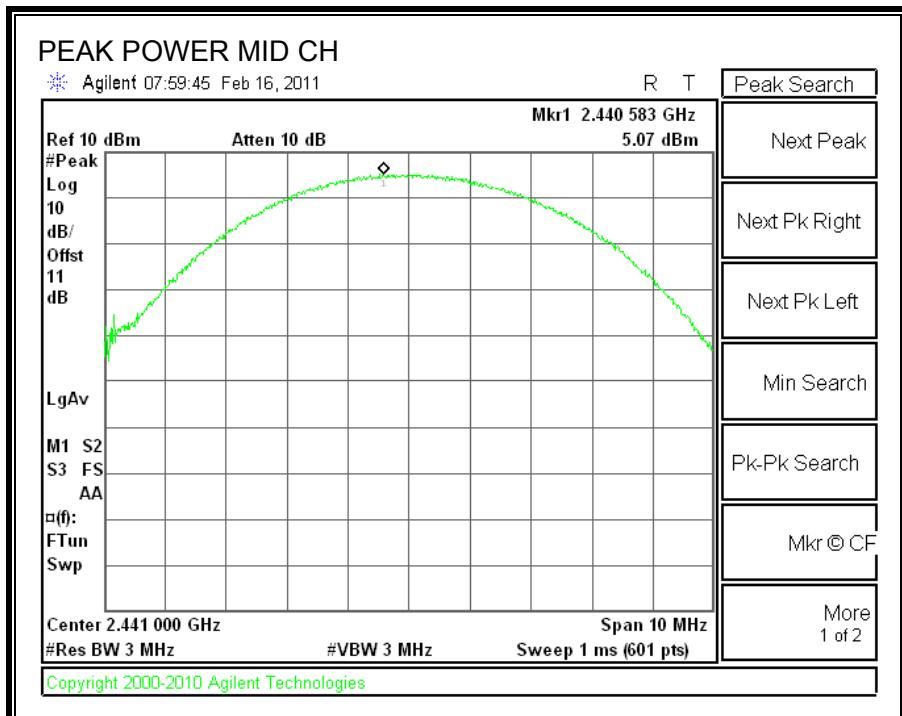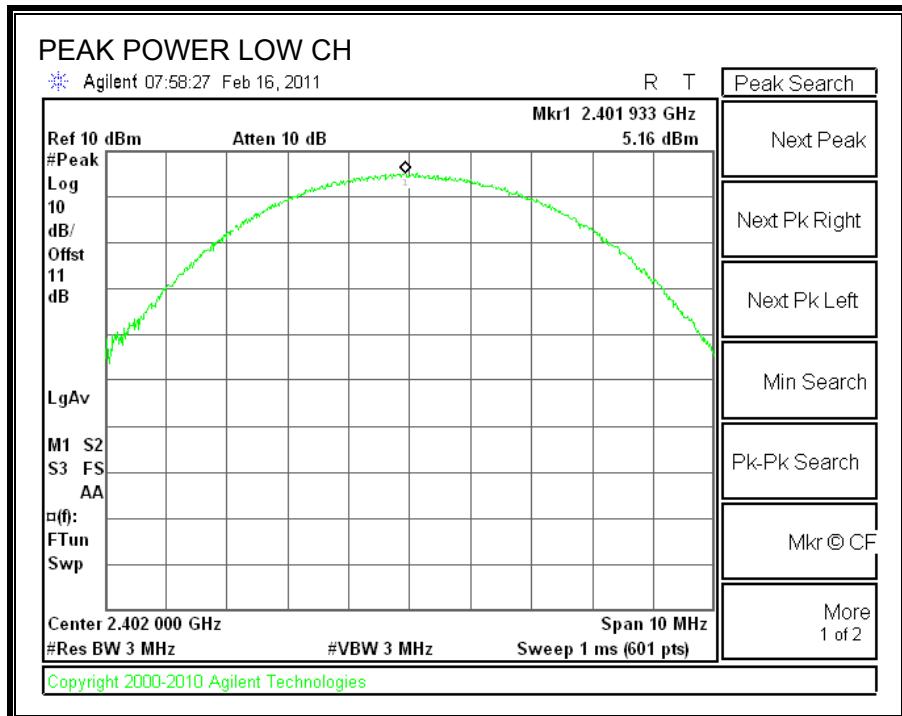

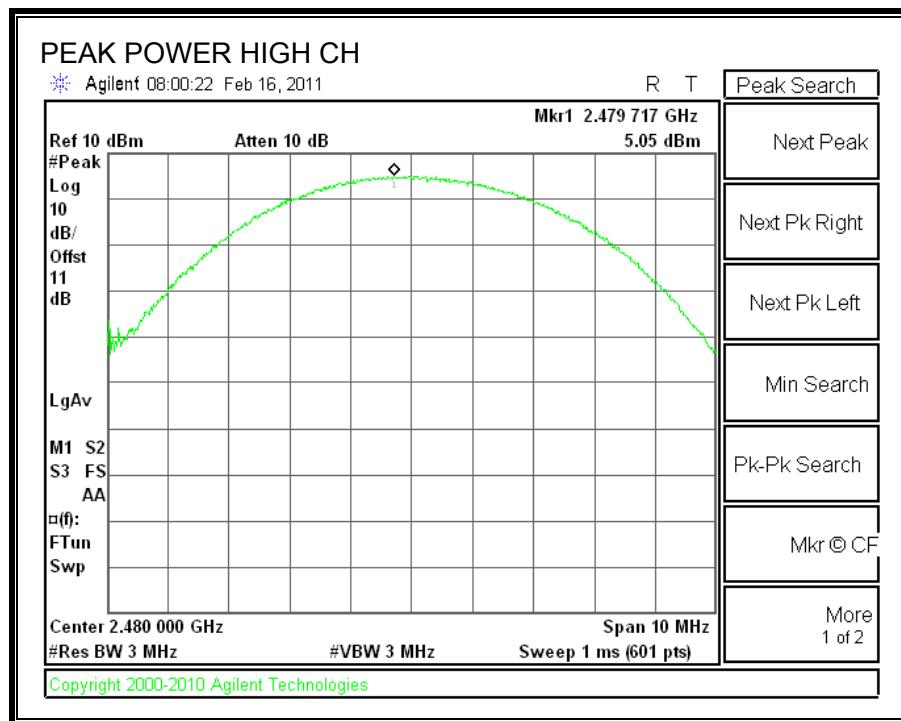

### 7.2.6. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	0.61
Middle	2441	0.75
High	2480	0.63

### 7.2.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

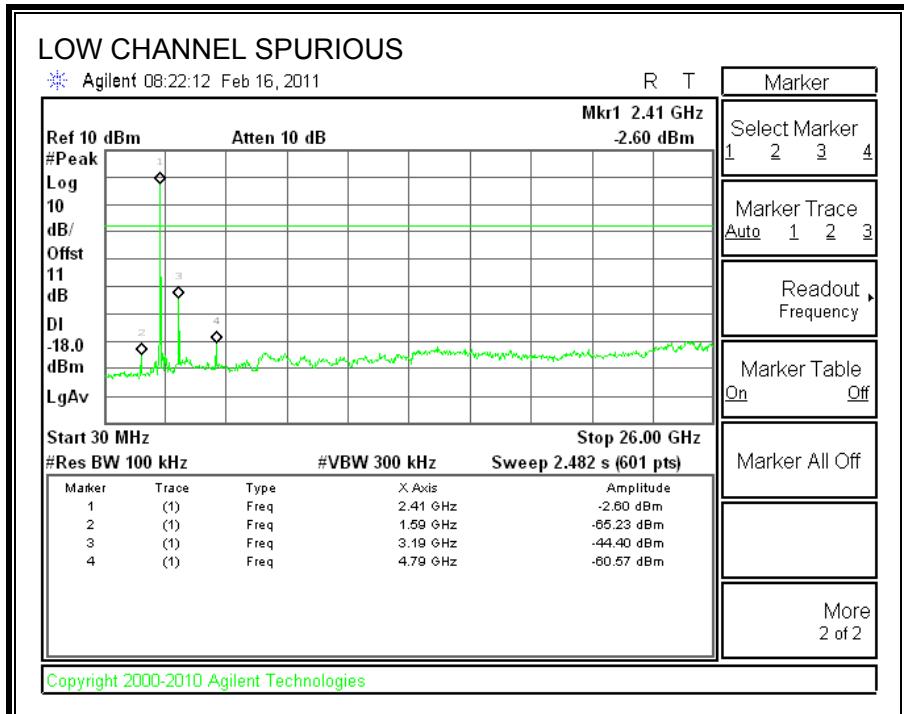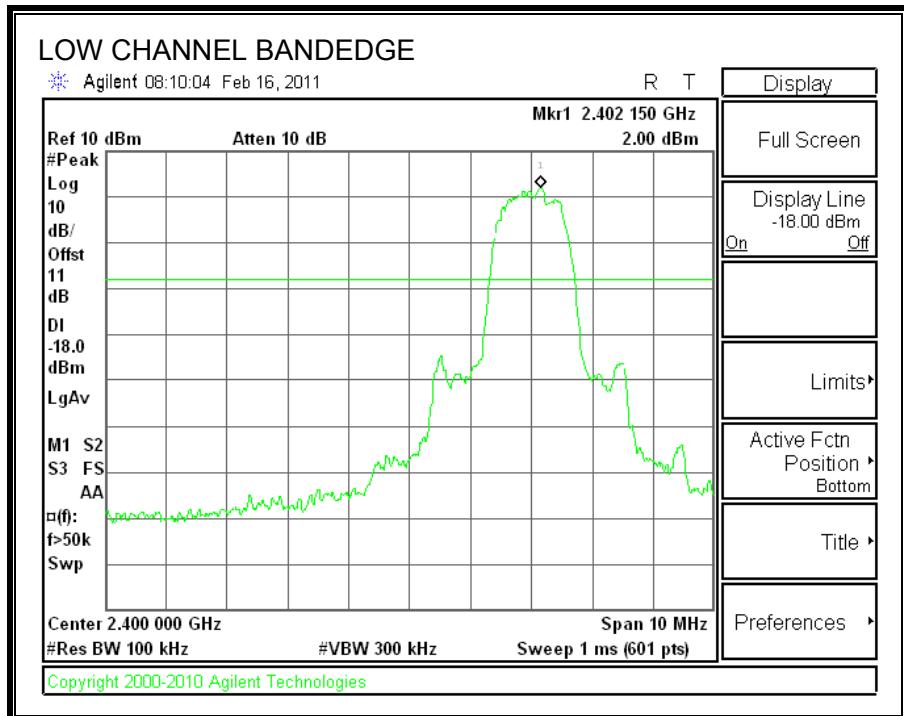



**SPURIOUS EMISSIONS, MID CHANNEL**

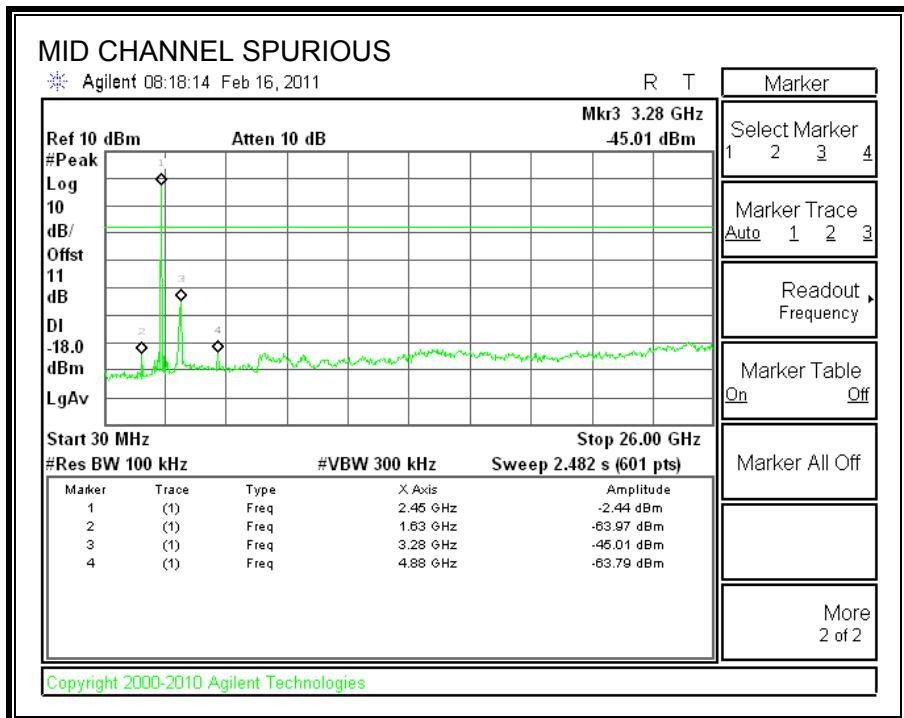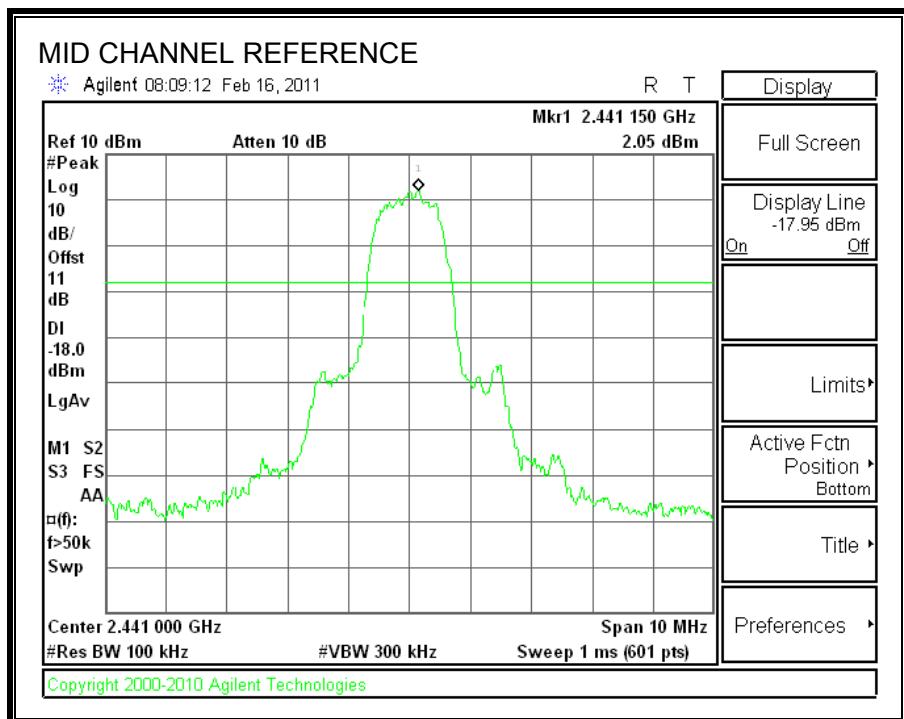

**SPURIOUS EMISSIONS, HIGH CHANNEL**

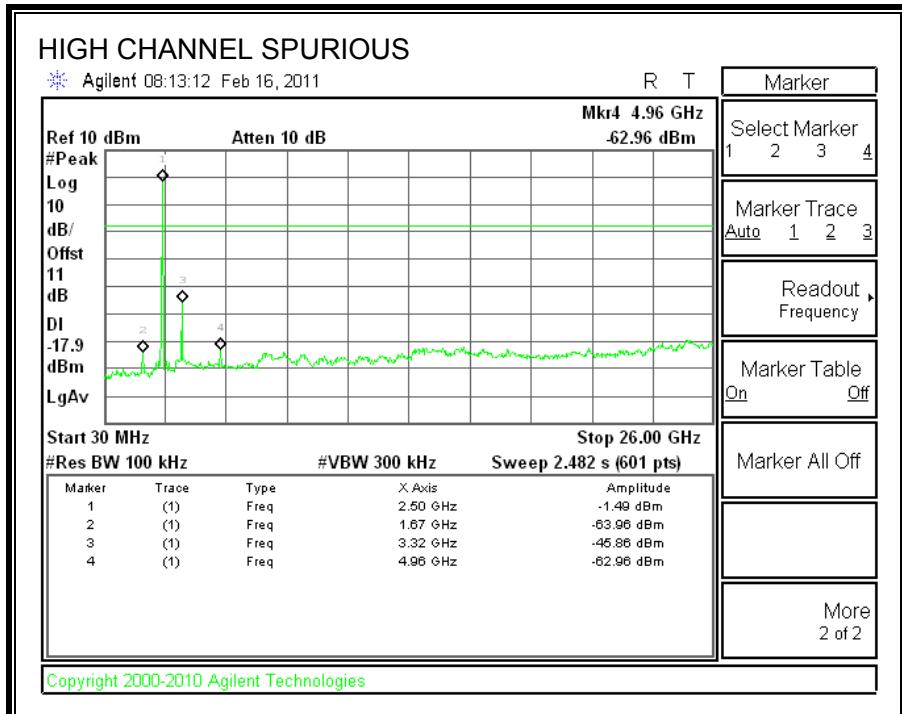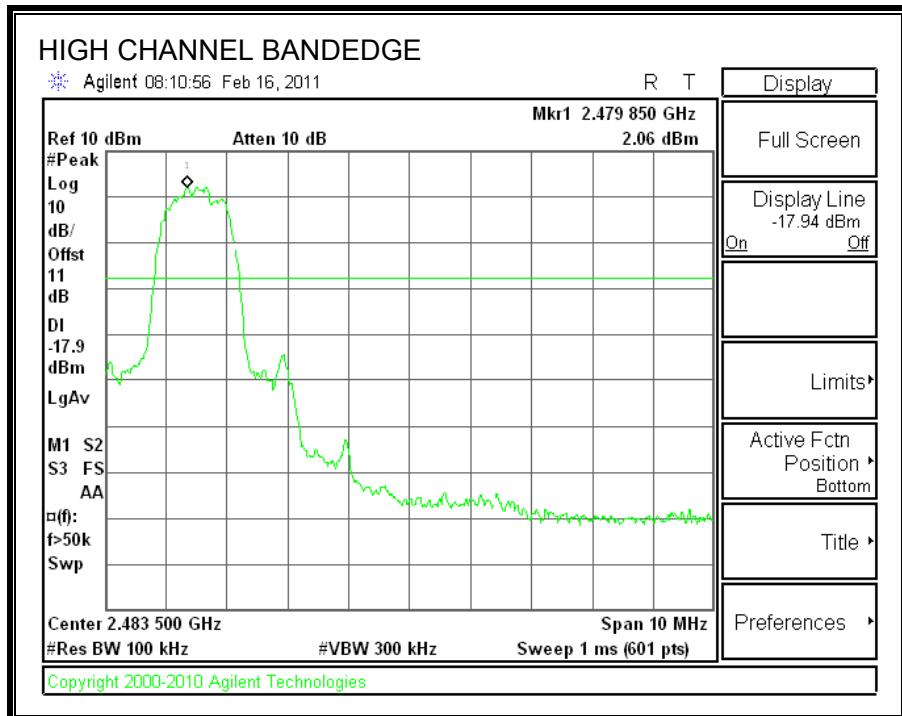

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

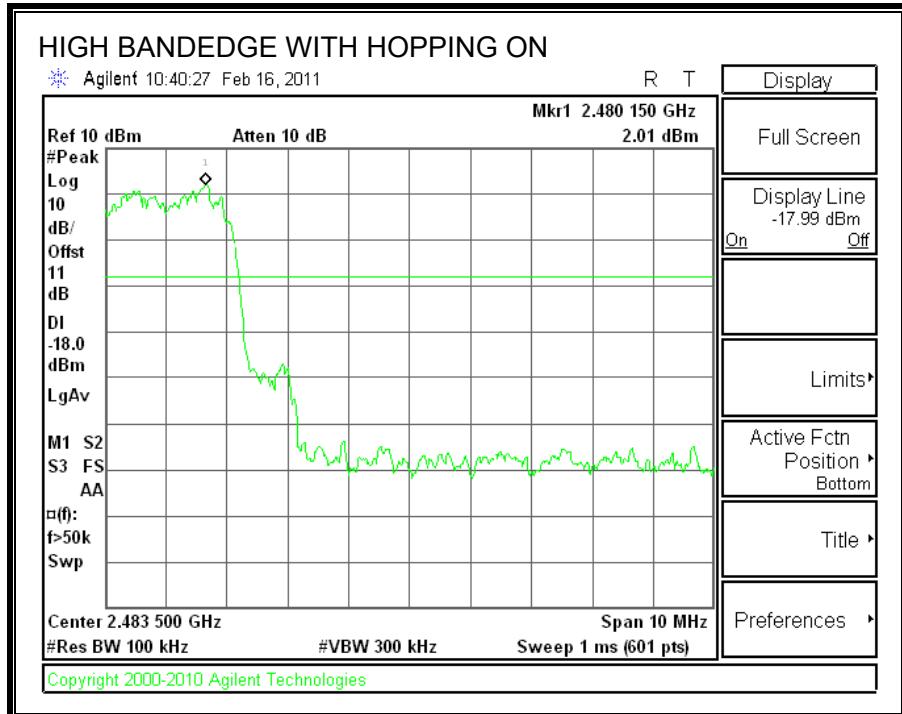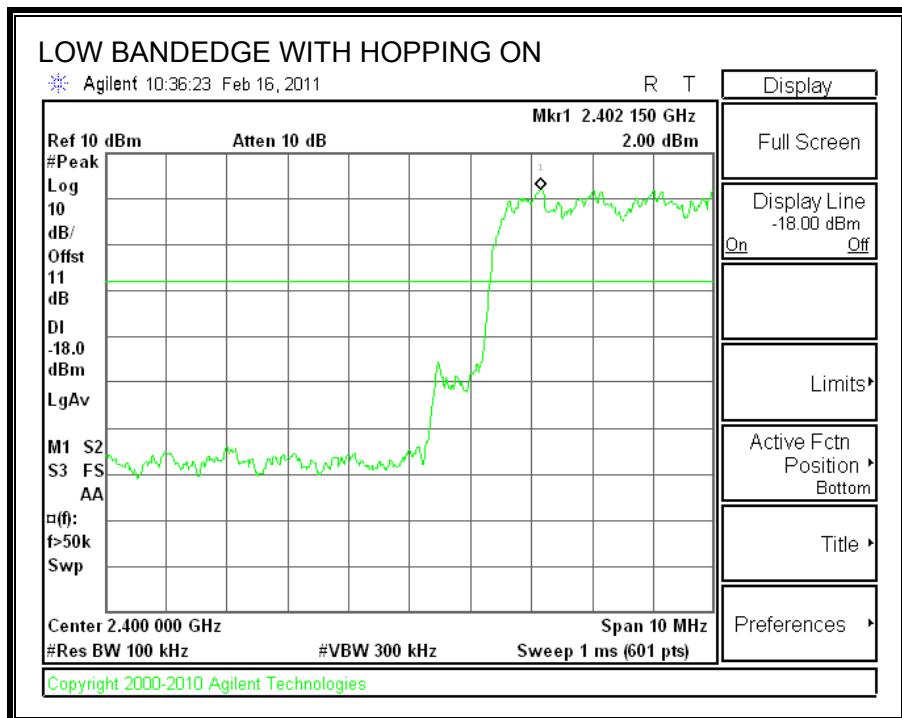

### 7.3. LE GFSK MODULATION

#### 7.3.1. 20 dB AND 99% BANDWIDTH

##### LIMIT

None; for reporting purposes only.



##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

##### RESULTS



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.115	1.027
Middle	2440	1.115	1.038
High	2480	1.113	1.035


## 20 dB BANDWIDTH

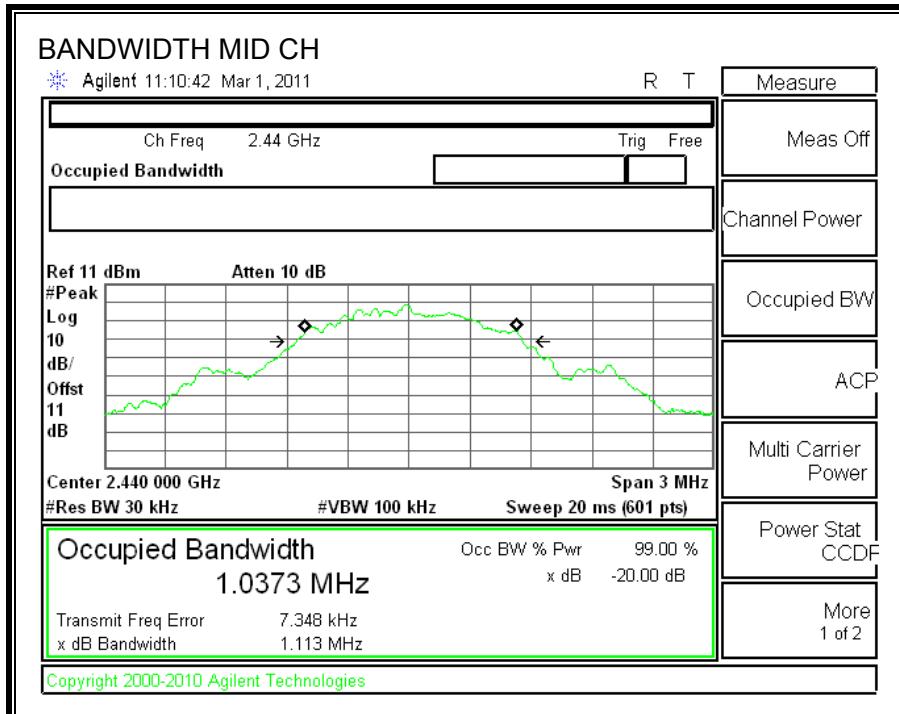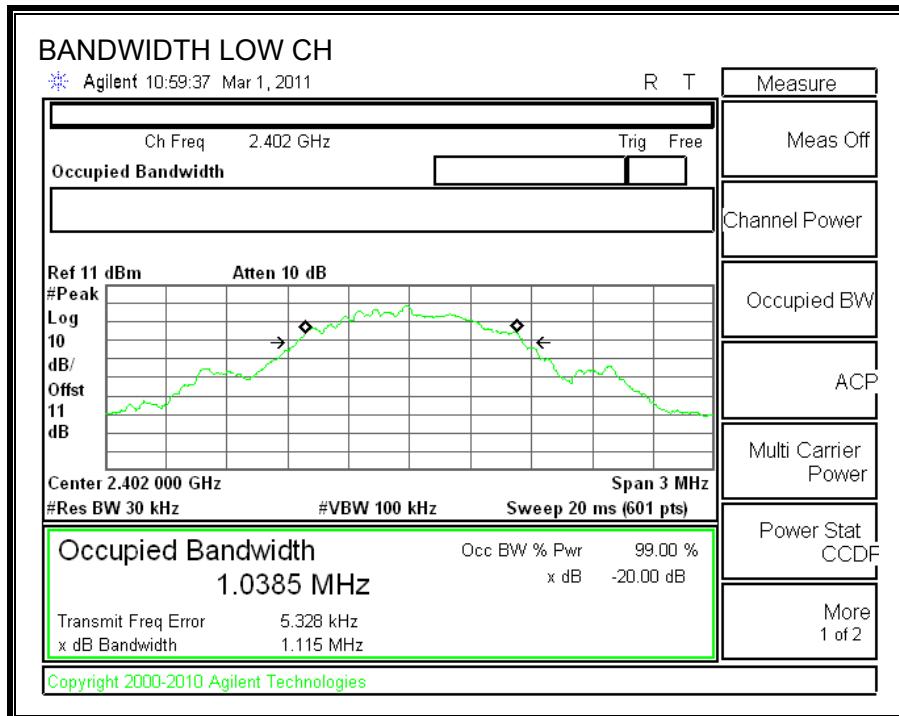

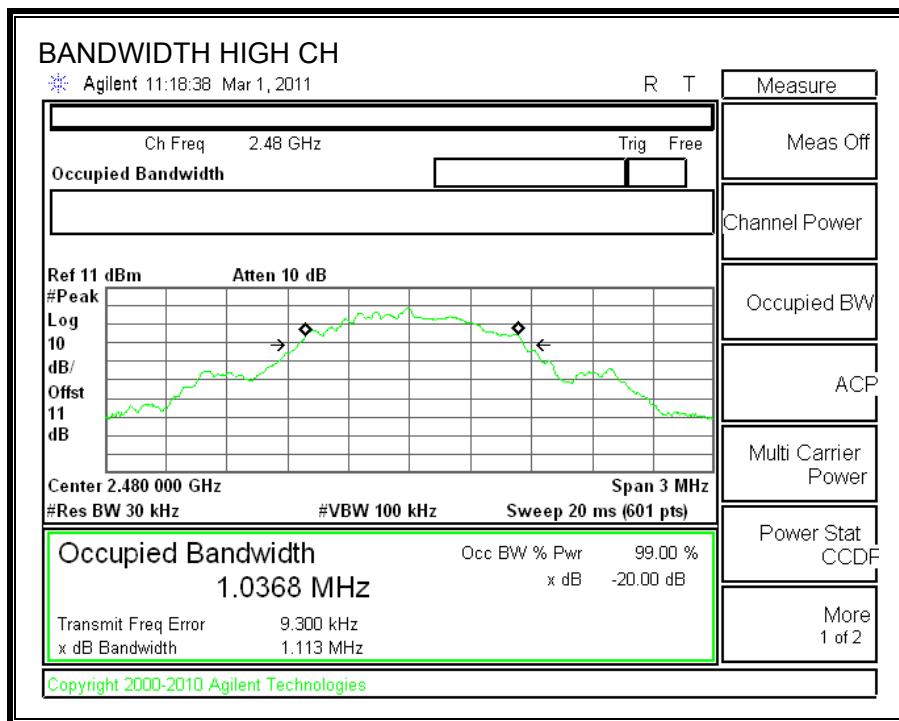

**99% BANDWIDTH**

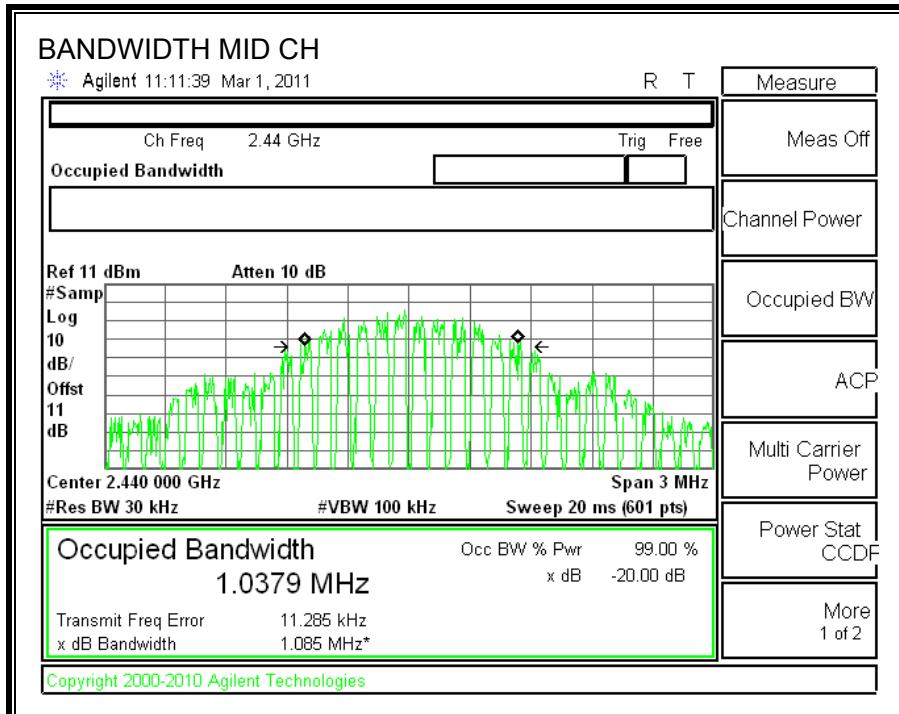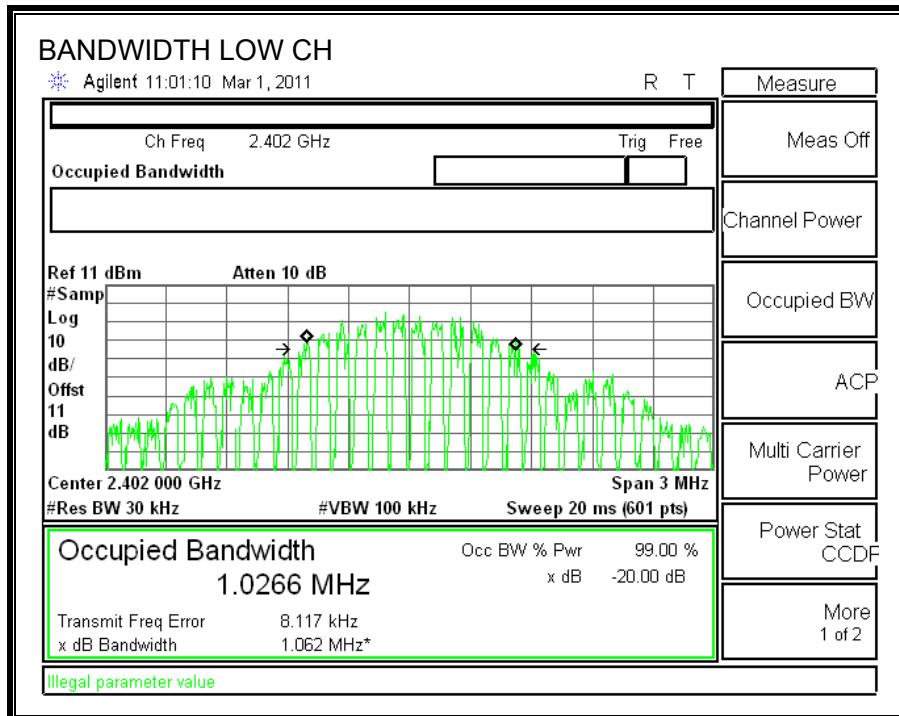

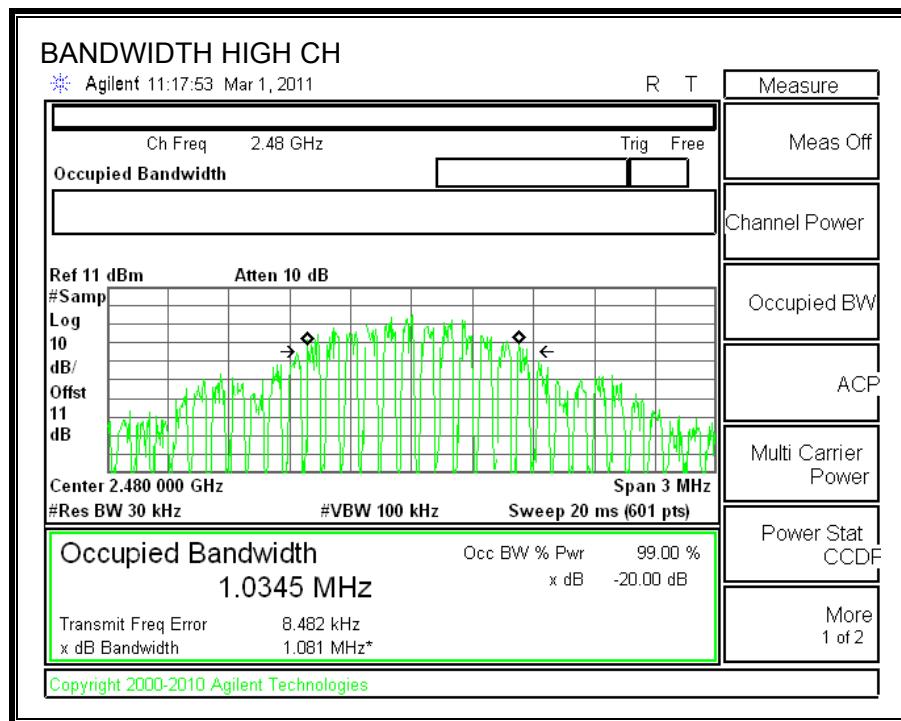

### 7.3.2. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

## HOPPING FREQUENCY SEPARATION

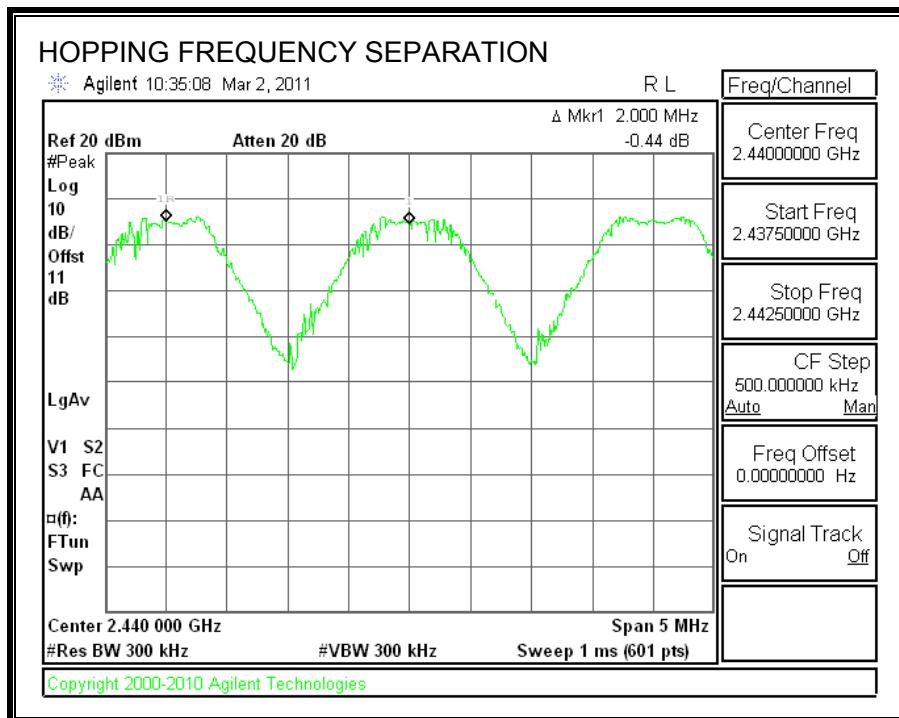

### 7.3.3. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### RESULTS

40 Channels observed, missing three channels at 2402, 2426 and 2480MHz for advertising.

**NUMBER OF HOPPING CHANNELS**

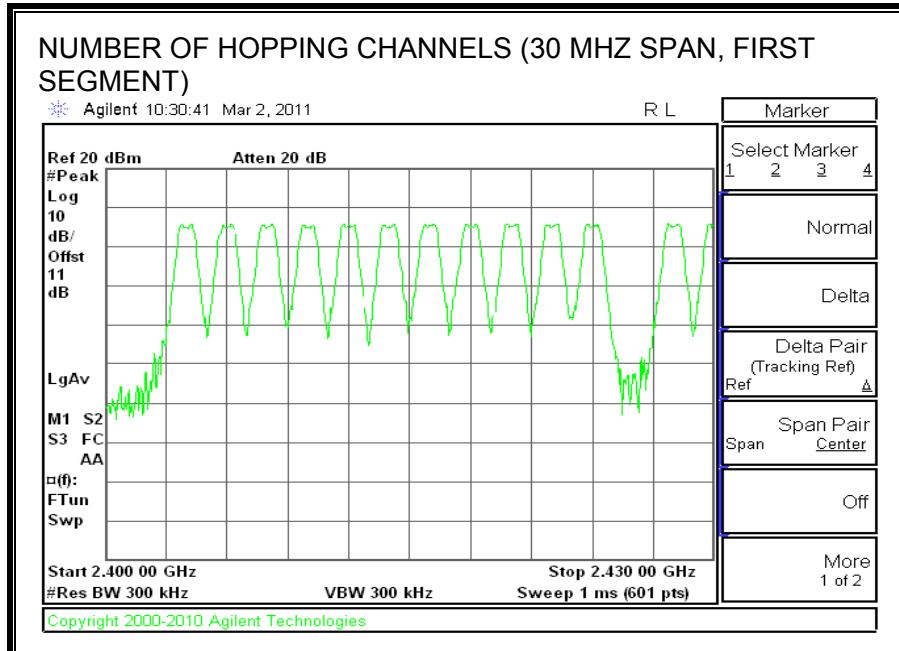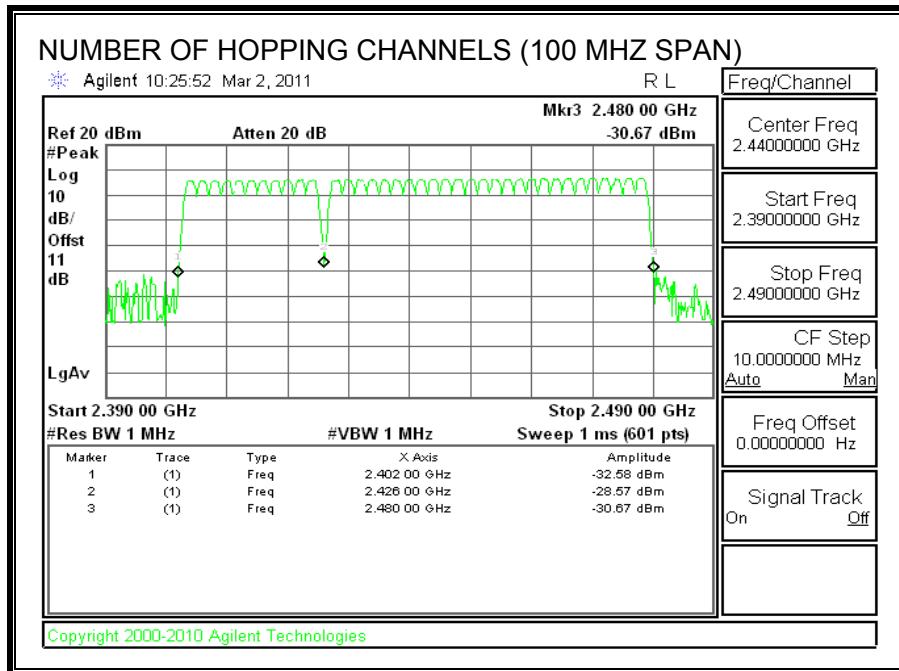

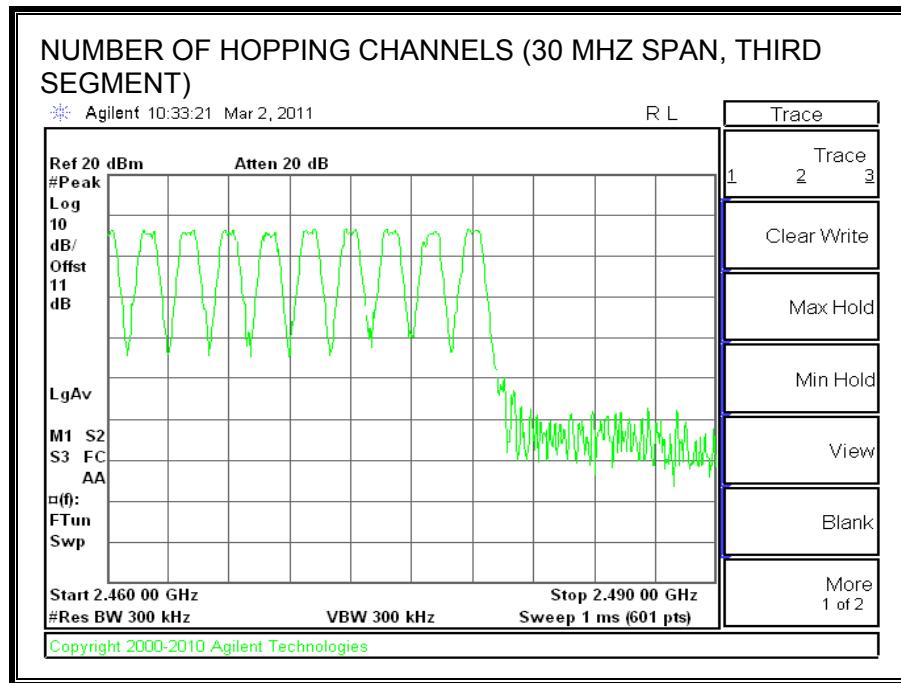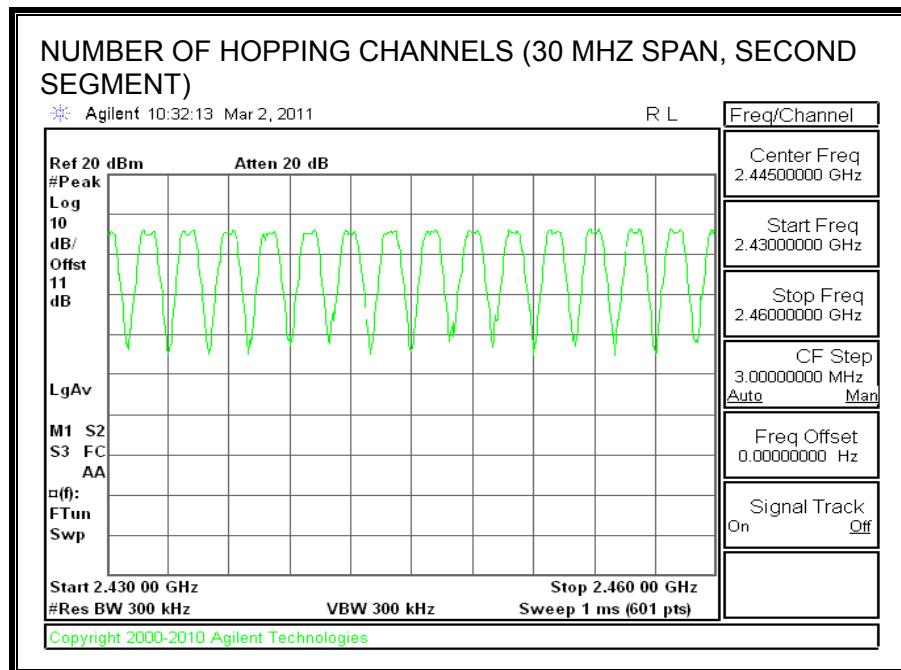

### 7.3.4. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.6 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 1.6 second period (39 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 1.6 \text{ s}) * \text{pulse width}$ .


#### RESULTS

Time Of Occupancy = 7 pulses \* 2.642-(1.59 \*4) msec = 2.0036 msec


LE Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 1.6 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
LE Mode	2.0036	7	0.140	0.4	0.260


PULSE WIDTH (On Time)

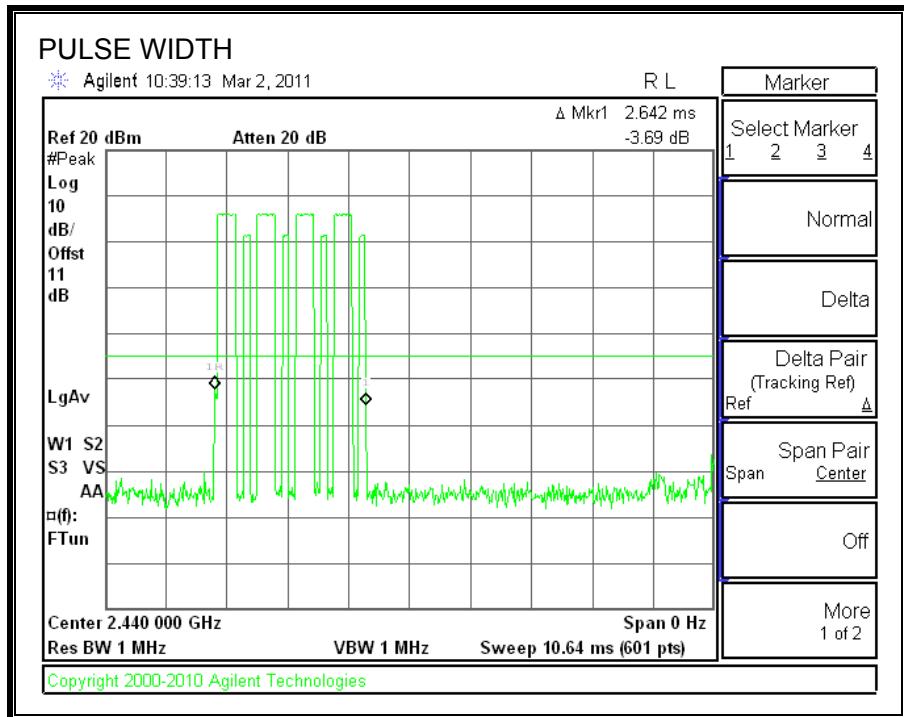

OFF TIME

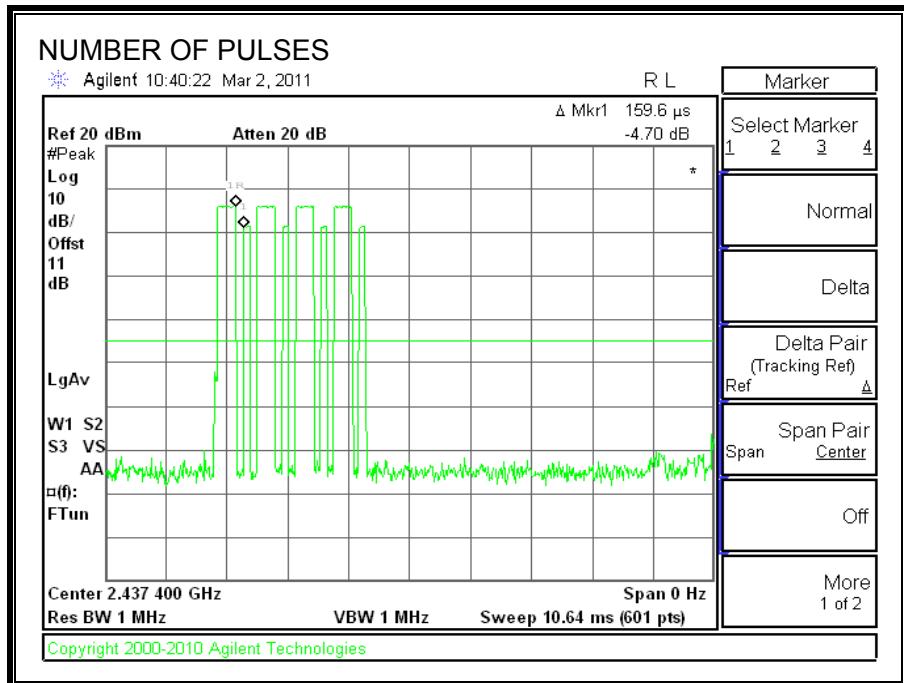

**NUMBER OF PULSES IN 1.6 SECOND OBSERVATION PERIOD**

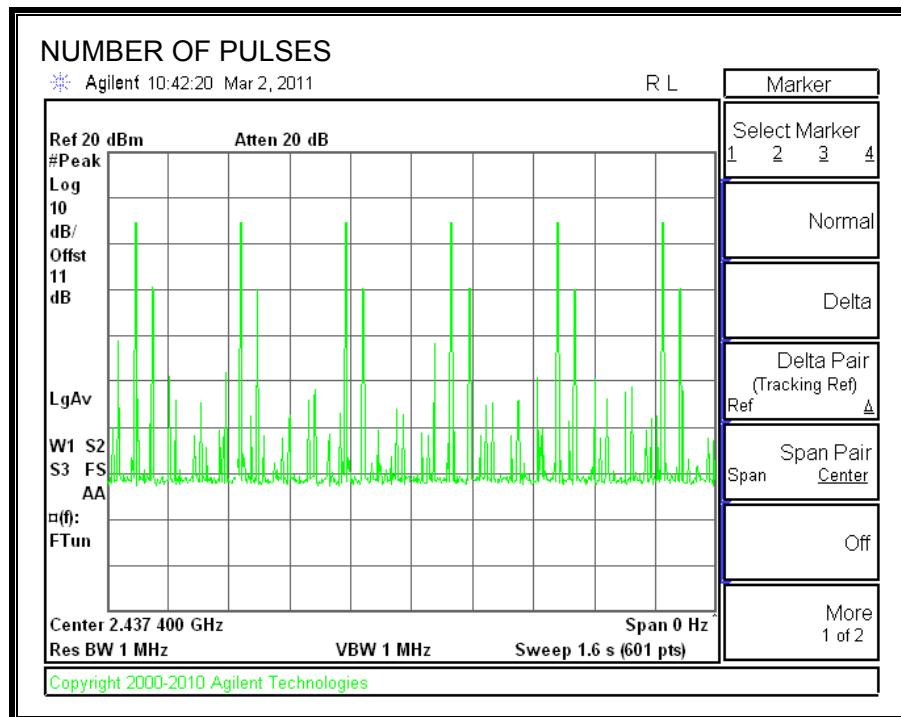

### 7.3.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.30	30	-27.70
Middle	2440	2.37	30	-27.63
High	2480	2.33	30	-27.67

## OUTPUT POWER

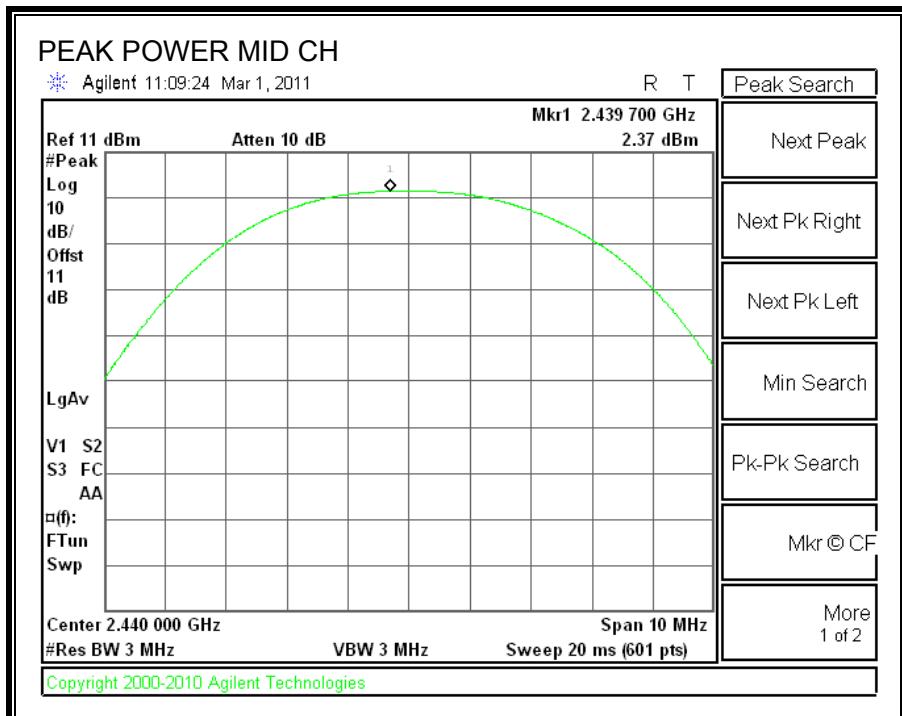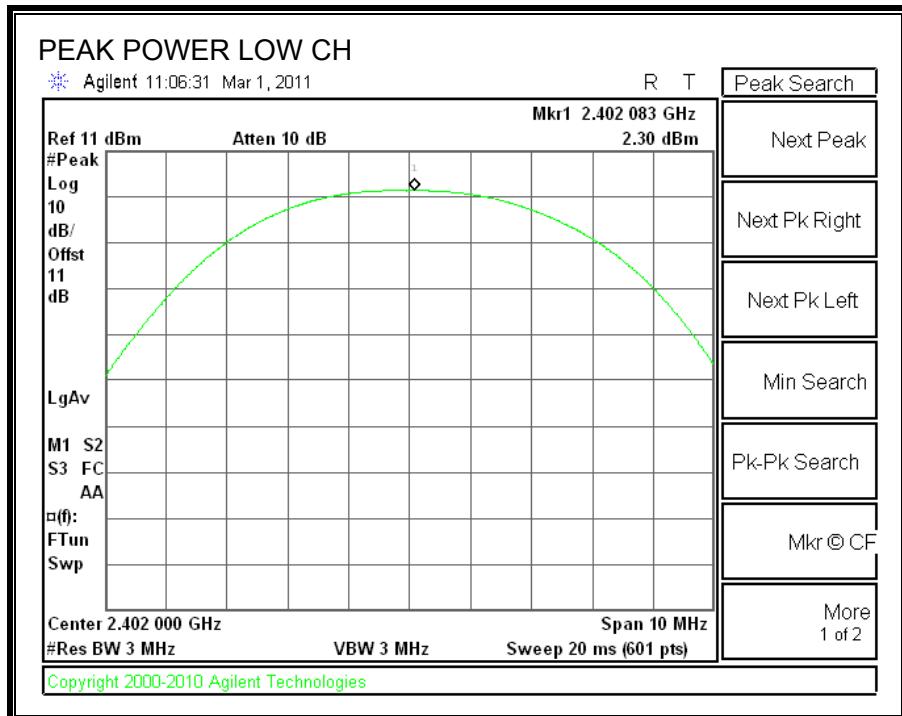

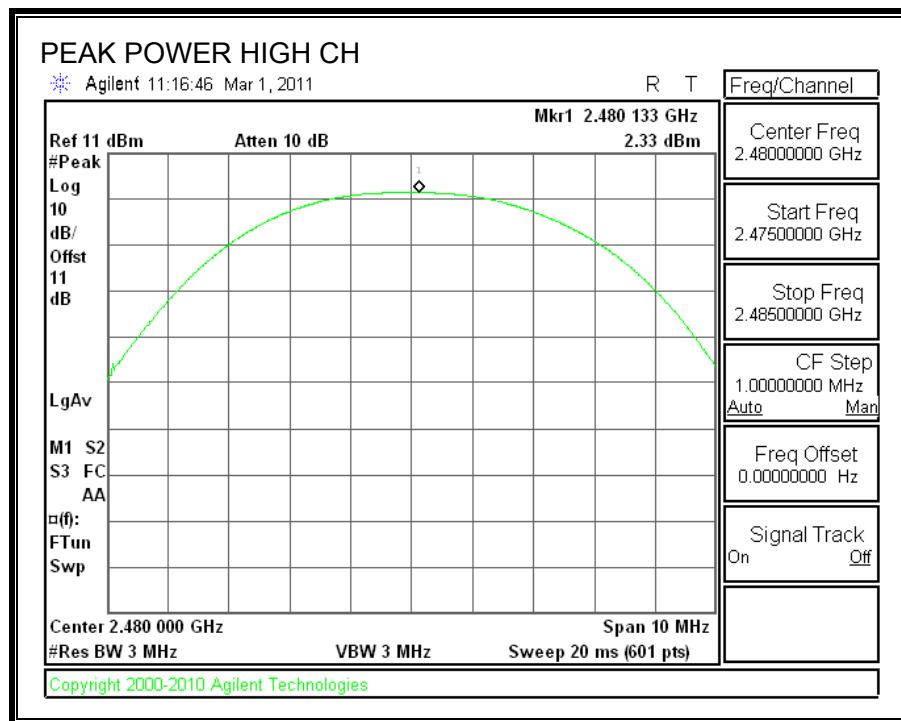

### 7.3.6. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.15
Middle	2440	2.25
High	2480	2.18

### 7.3.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



**SPURIOUS EMISSIONS, LOW CHANNEL**

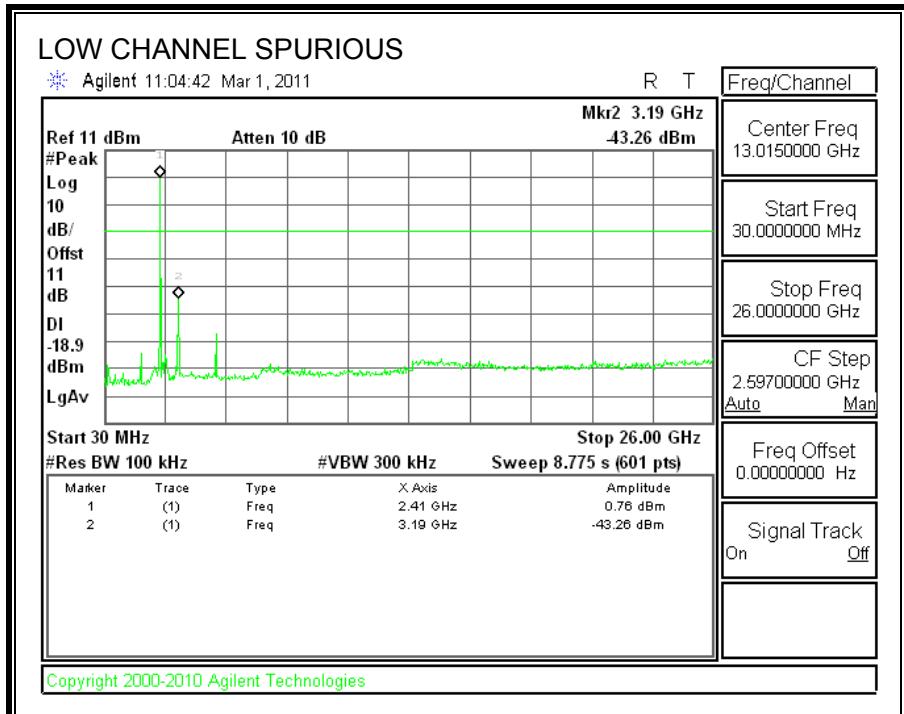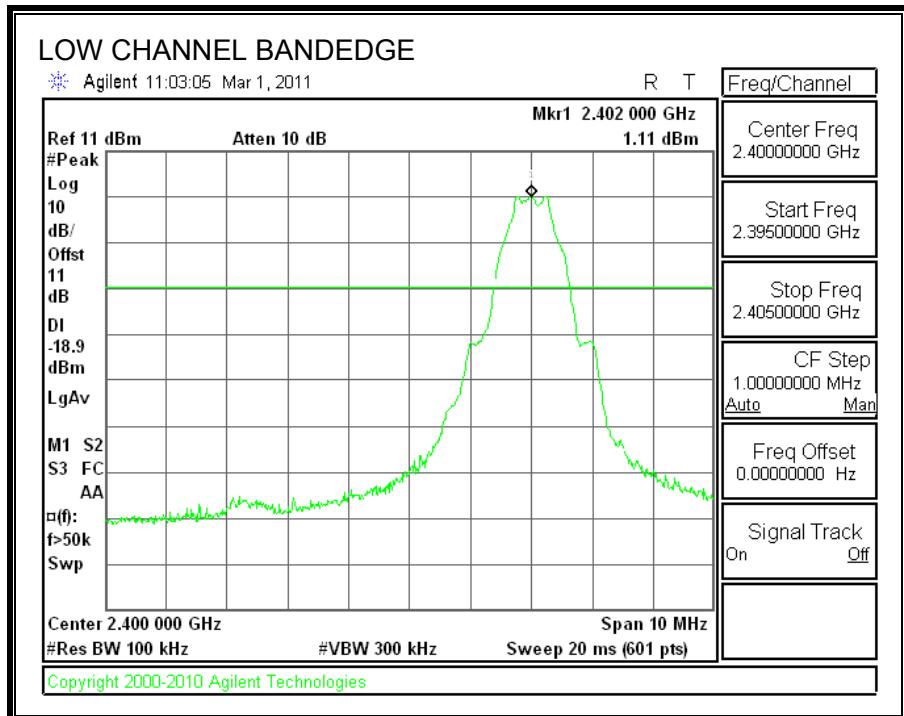



**SPURIOUS EMISSIONS, MID CHANNEL**

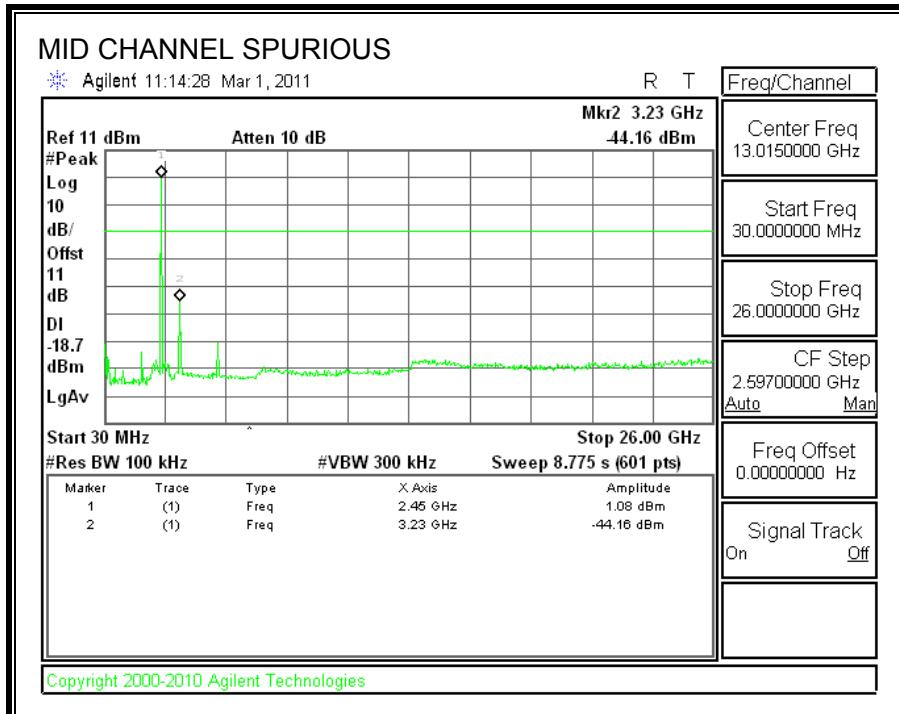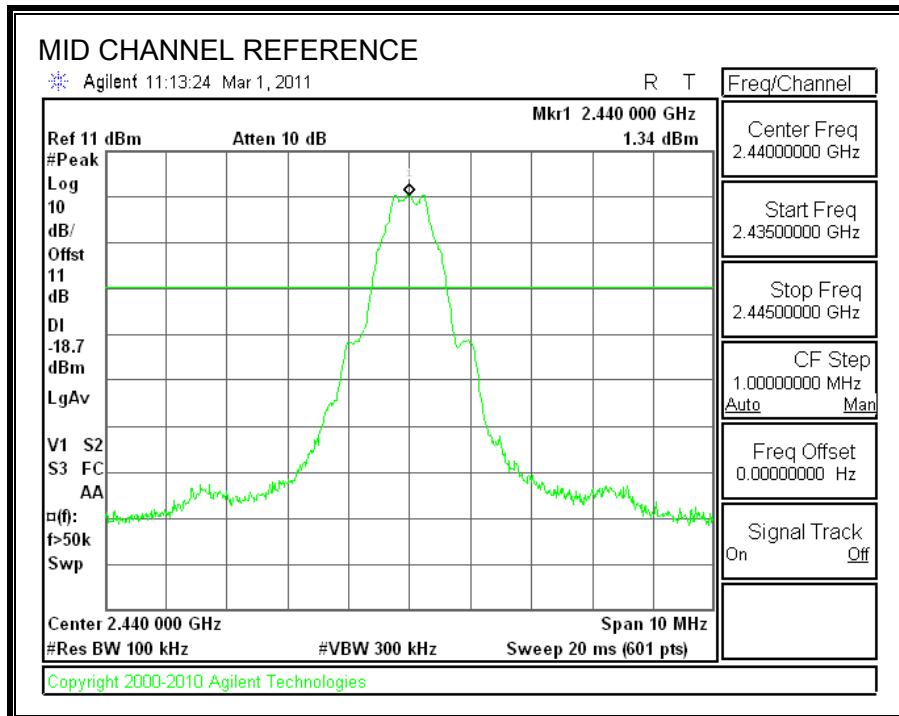

**SPURIOUS EMISSIONS, HIGH CHANNEL**

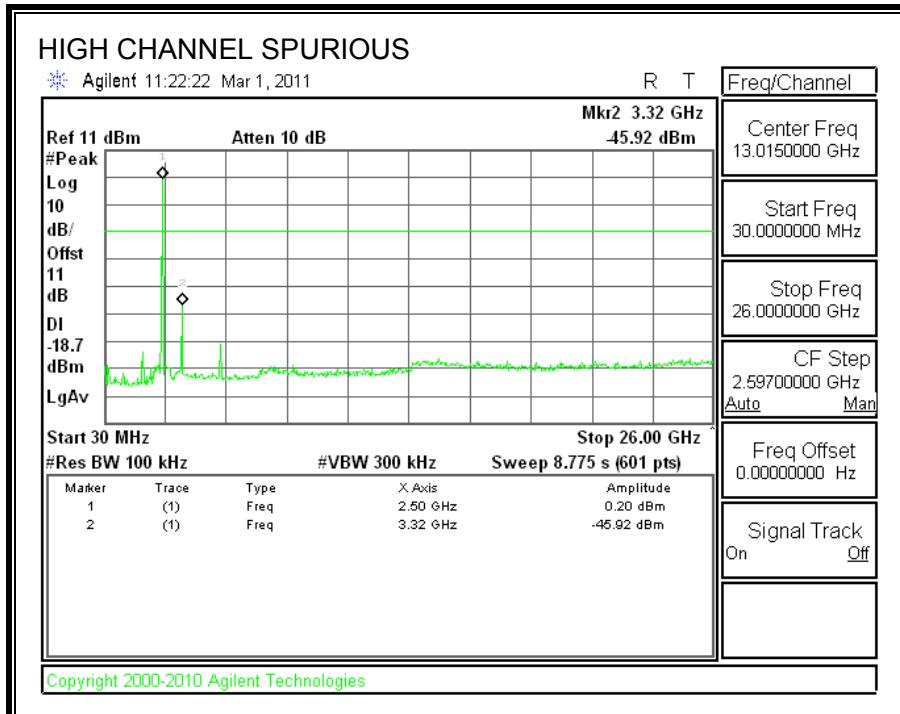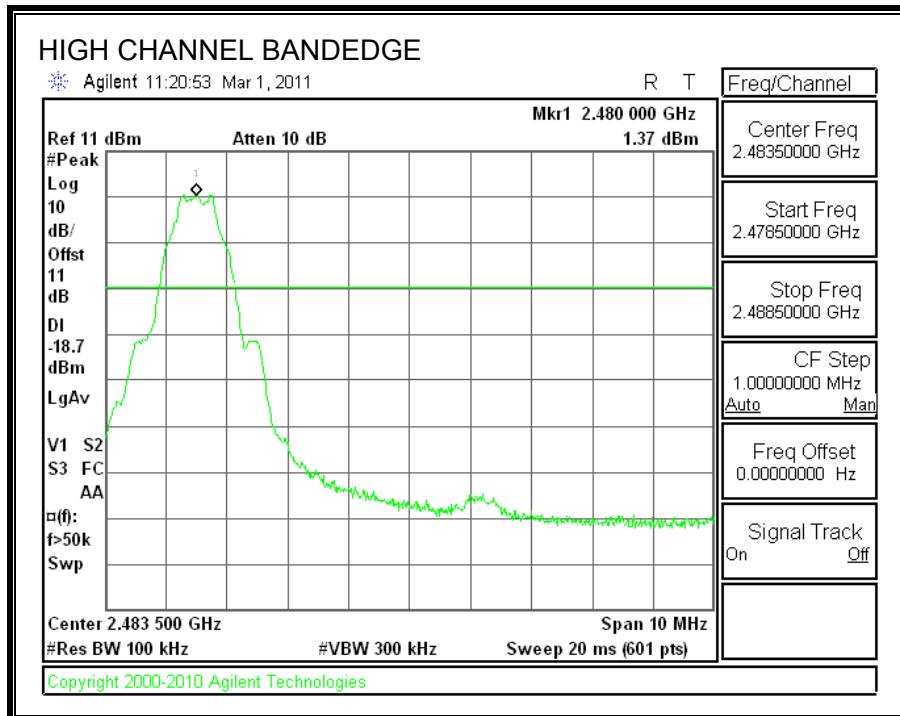

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

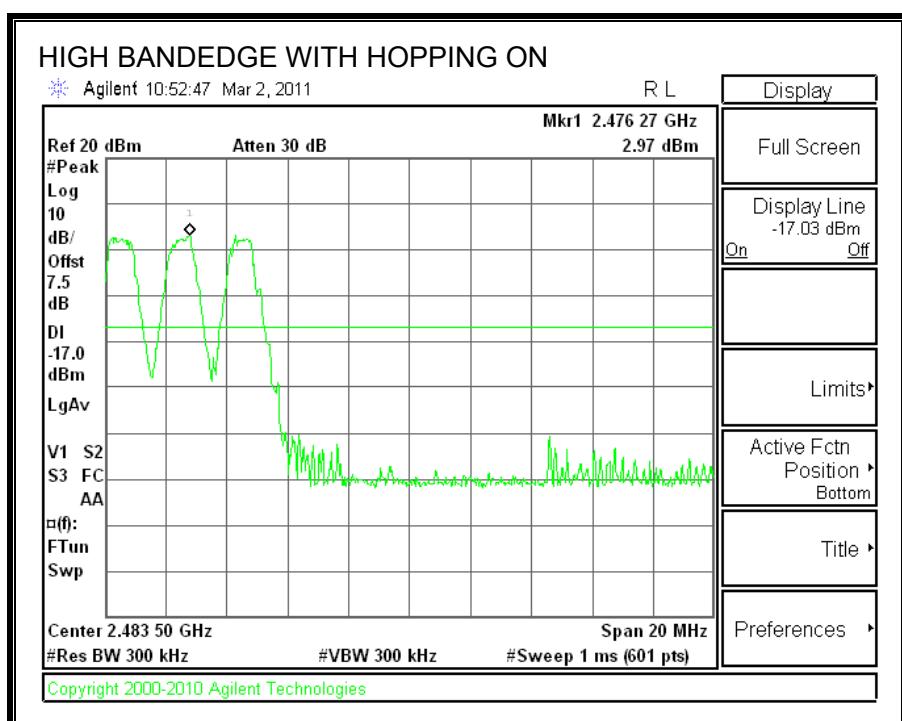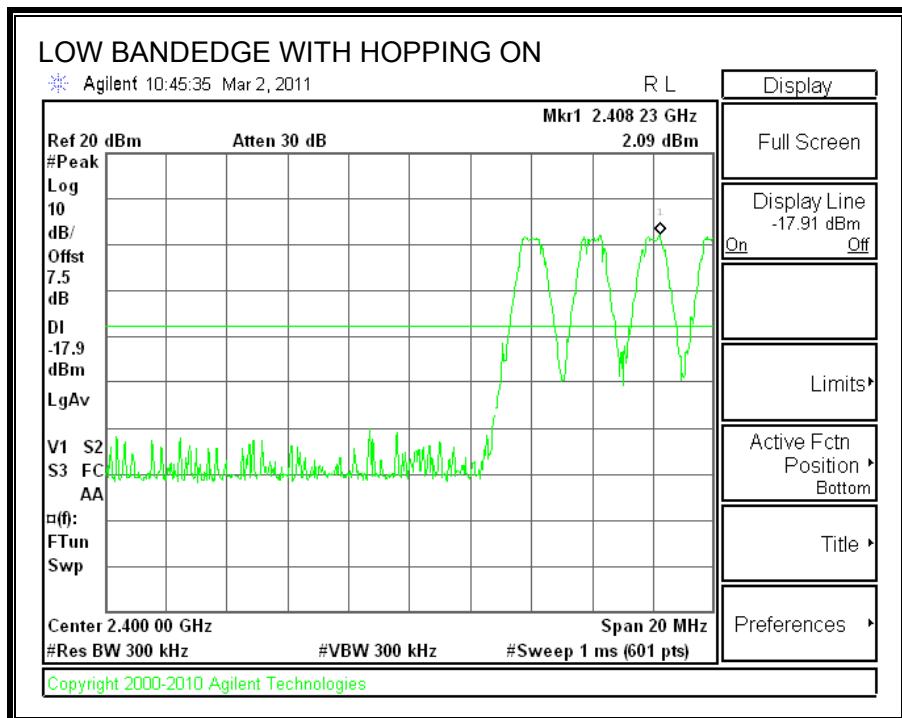

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. BASIC DATA RATE GFSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

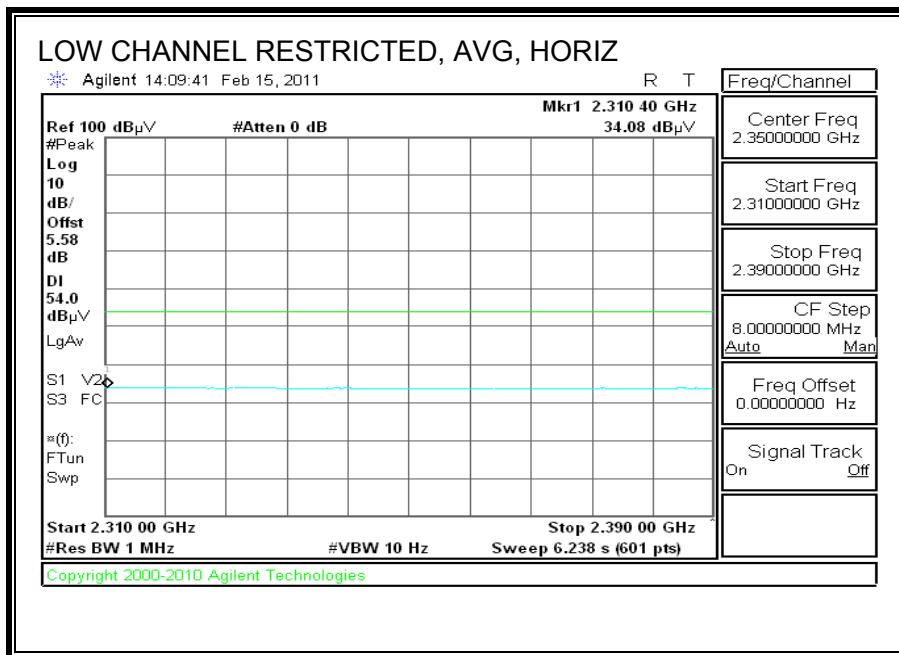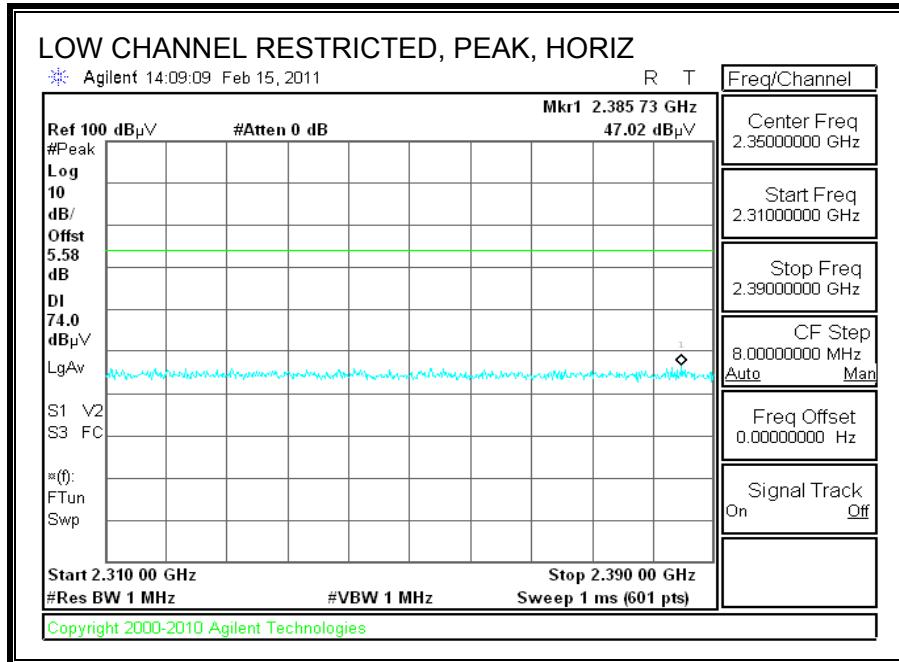



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

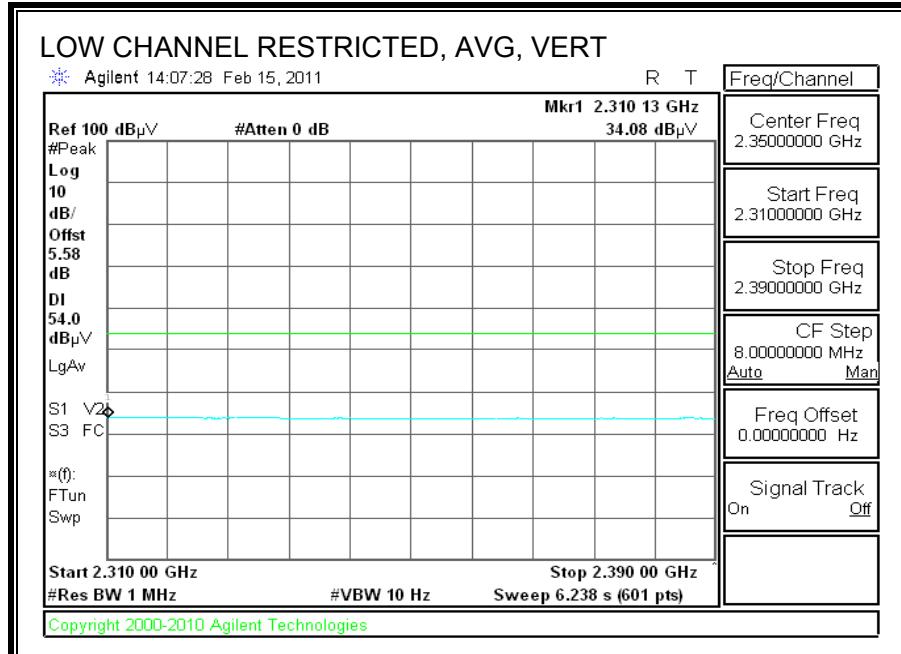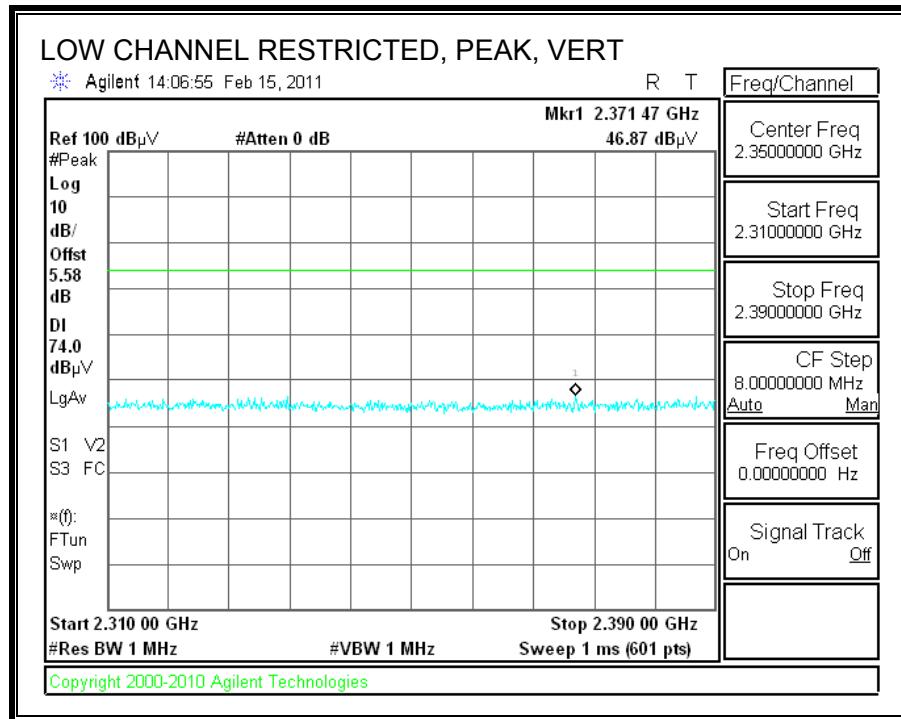

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

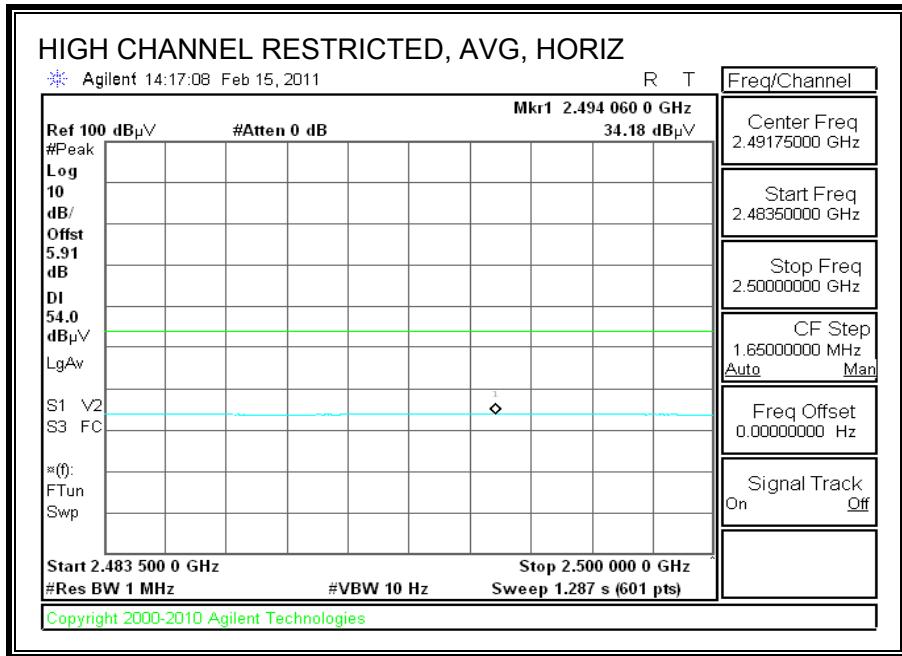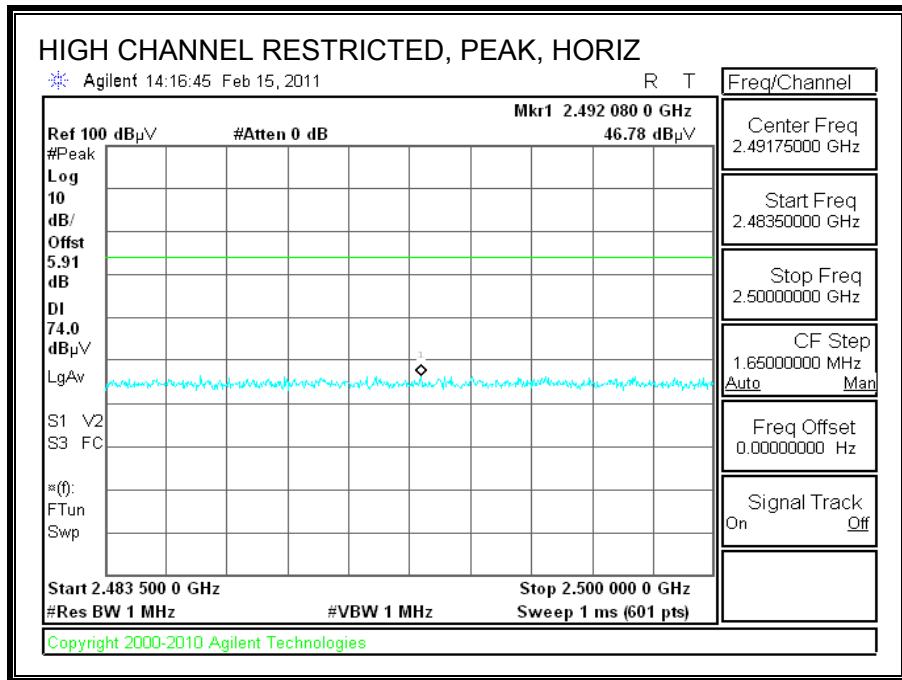

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

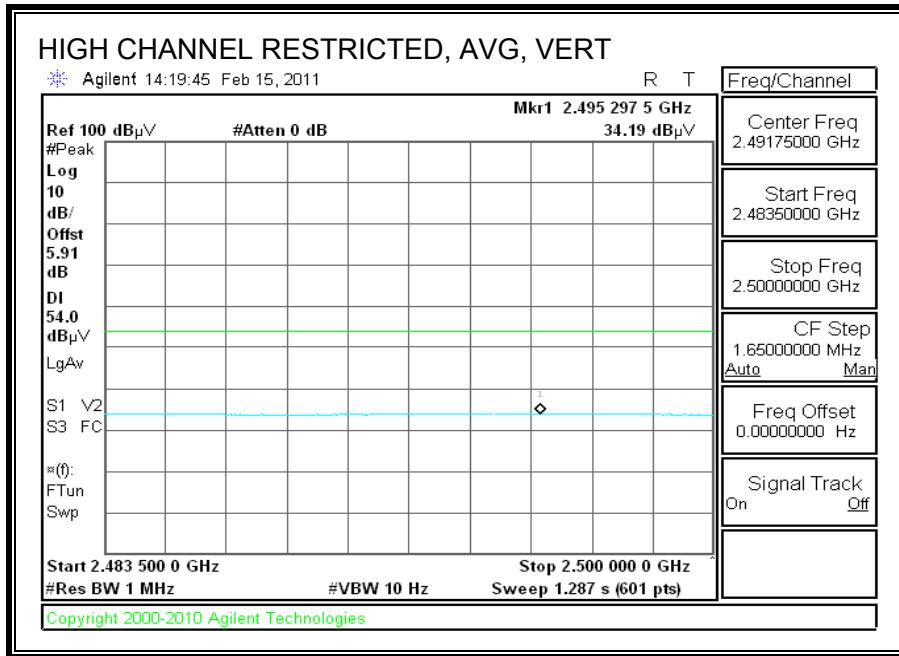
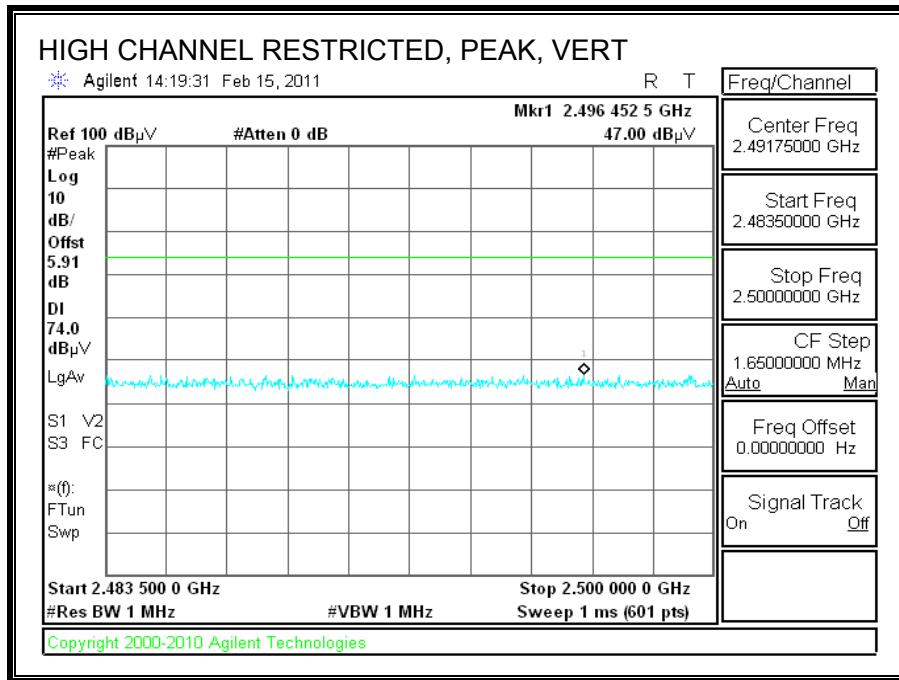


## HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber													
Test Engr:	David Garcia												
Date:	02/15/11												
Project #:	11J13631												
Company:	Hon Hai												
Test Target:	FCC 15.205												
Mode Oper:	Tx, GFSK Mode												
<i>f</i>	Measurement Frequency	Amp	Preamp Gain										Average Field Strength Limit
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters									Peak Field Strength Limit
Read	Analyzer Reading	Avg		Average Field Strength @ 3 m									Margin vs. Average Limit
AF	Antenna Factor	Peak		Calculated Peak Field Strength									Margin vs. Peak Limit
CL	Cable Loss	HPF		High Pass Filter									
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
<b>LOW CHANNEL, 2402 MHz</b>													
4.804	3.0	36.3	32.7	5.8	-34.8	0.0	10.0	49.9	74.0	-24.1	H	P	
4.804	3.0	24.1	32.7	5.8	-34.8	0.0	10.0	37.7	54.0	-16.3	H	A	
4.804	3.0	37.8	32.7	5.8	-34.8	0.0	10.0	51.4	74.0	-22.6	V	P	
4.804	3.0	25.9	32.7	5.8	-34.8	0.0	10.0	39.5	54.0	-14.5	V	A	
<b>MID CHANNEL, 2441 MHz</b>													
4.882	3.0	36.5	32.7	5.8	-34.8	0.0	10.0	50.2	74.0	-23.8	H	P	
4.882	3.0	24.4	32.7	5.8	-34.8	0.0	10.0	38.1	54.0	-15.9	H	A	
7.323	3.0	35.5	35.5	7.3	-34.1	0.0	10.0	54.1	74.0	-19.9	H	P	
7.323	3.0	23.1	35.5	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.882	3.0	35.9	32.7	5.8	-34.8	0.0	10.0	49.6	74.0	-24.4	V	P	
4.882	3.0	23.7	32.7	5.8	-34.8	0.0	10.0	37.5	54.0	-16.5	V	A	
7.323	3.0	35.5	35.5	7.3	-34.1	0.0	10.0	54.2	74.0	-19.8	V	P	
7.323	3.0	23.2	35.5	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	V	A	
<b>HIGH CHANNEL, 2480 MHz</b>													
4.960	3.0	36.5	32.8	5.9	-34.8	0.0	10.0	50.4	74.0	-23.6	H	P	
4.960	3.0	23.9	32.8	5.9	-34.8	0.0	10.0	37.8	54.0	-16.2	H	A	
7.440	3.0	35.1	35.6	7.3	-34.1	0.0	10.0	54.0	74.0	-20.0	H	P	
7.440	3.0	23.0	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.960	3.0	36.5	32.8	5.9	-34.8	0.0	10.0	50.4	74.0	-23.6	V	P	
4.960	3.0	24.0	32.8	5.9	-34.8	0.0	10.0	37.8	54.0	-16.2	V	A	
7.440	3.0	36.7	35.6	7.3	-34.1	0.0	10.0	55.6	74.0	-18.4	V	P	
7.440	3.0	23.0	35.6	7.3	-34.1	0.0	10.0	41.9	54.0	-12.1	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

### 8.2.2. ENHANCED DATA RATE 8PSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

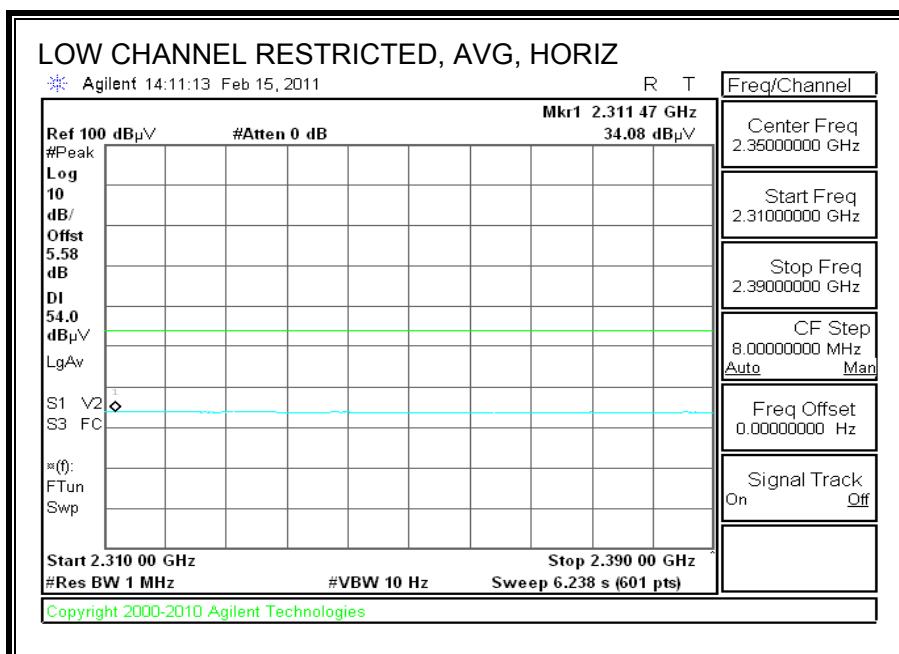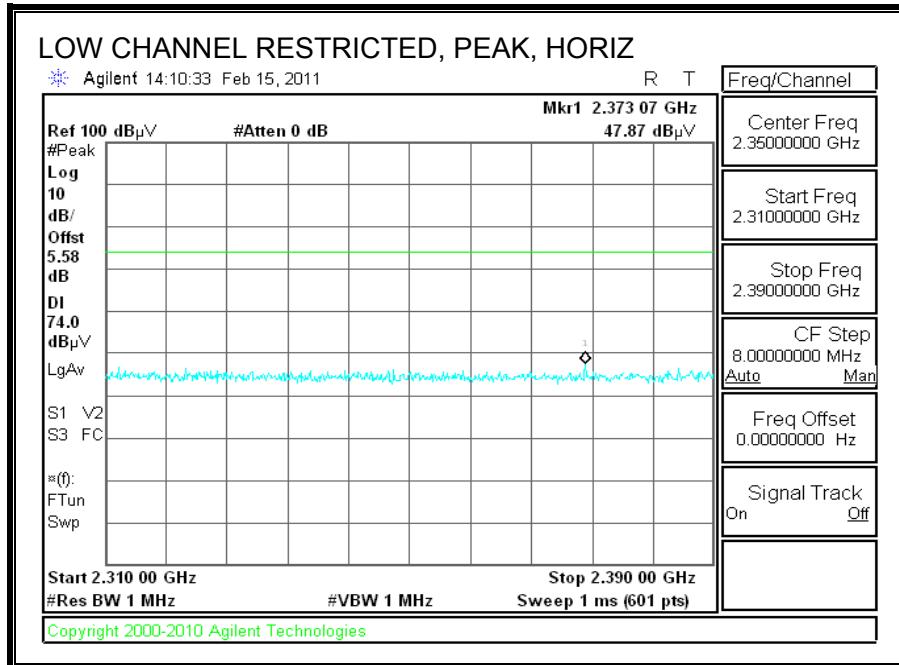



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

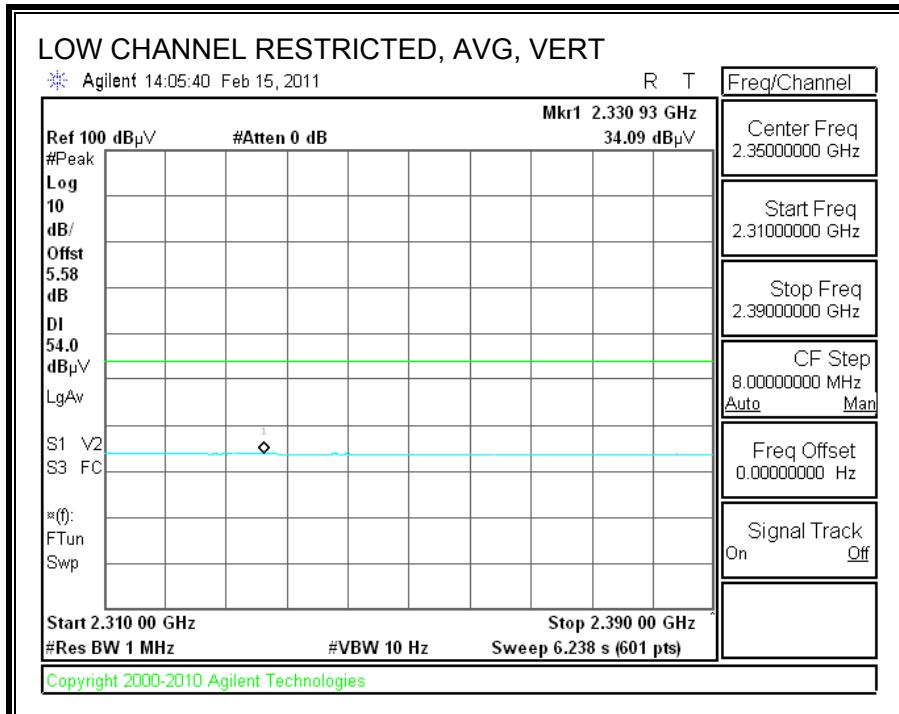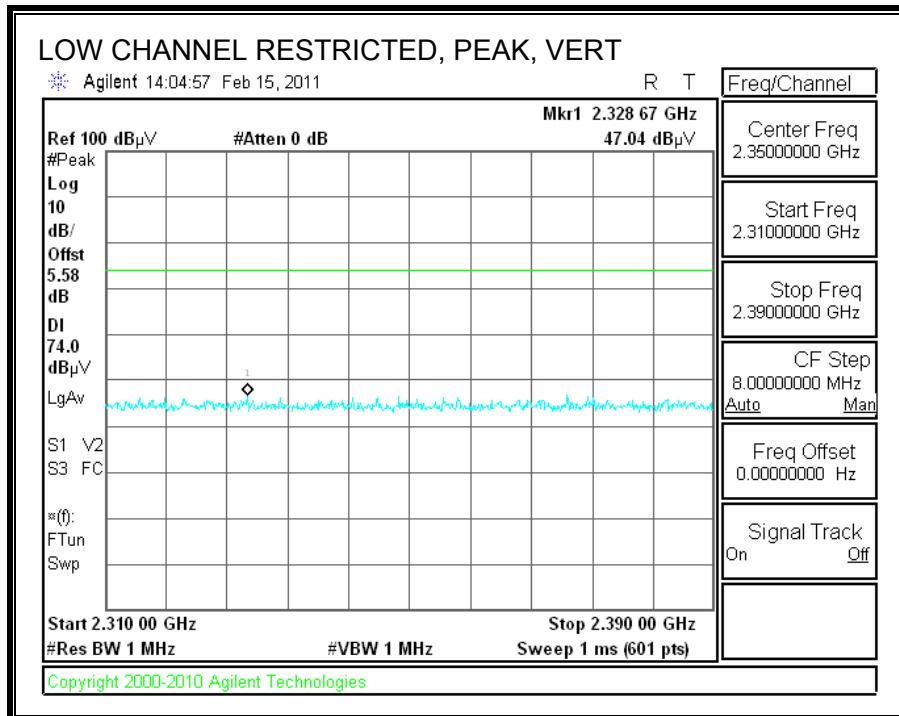

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

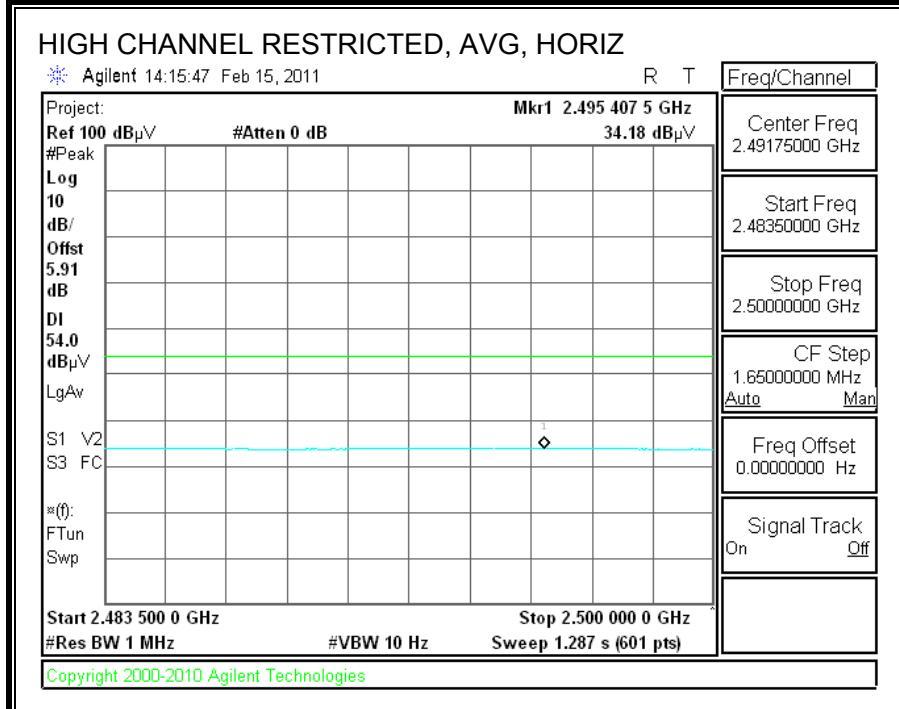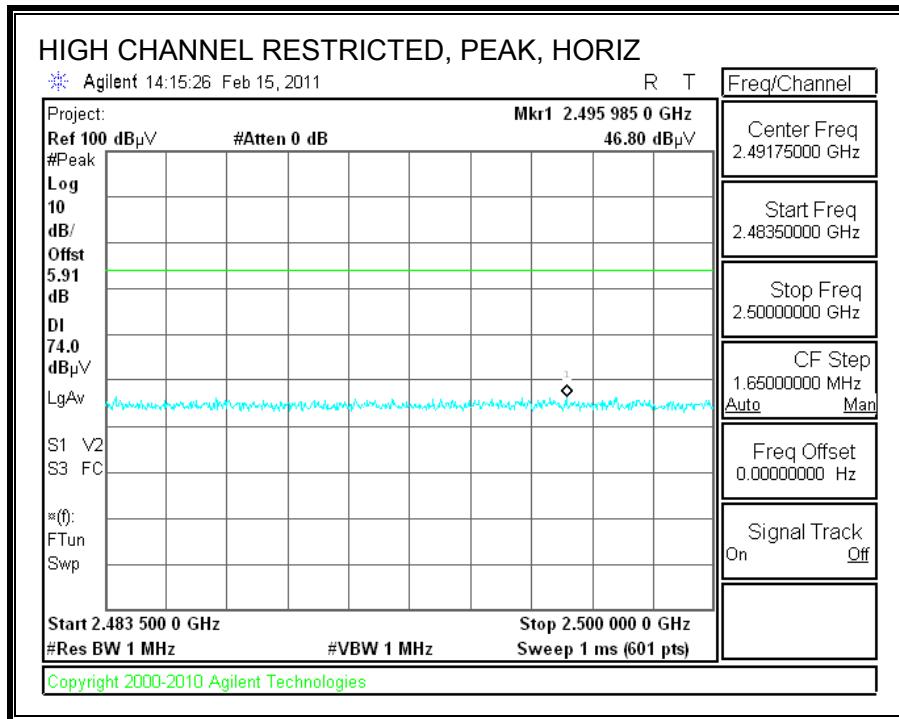

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

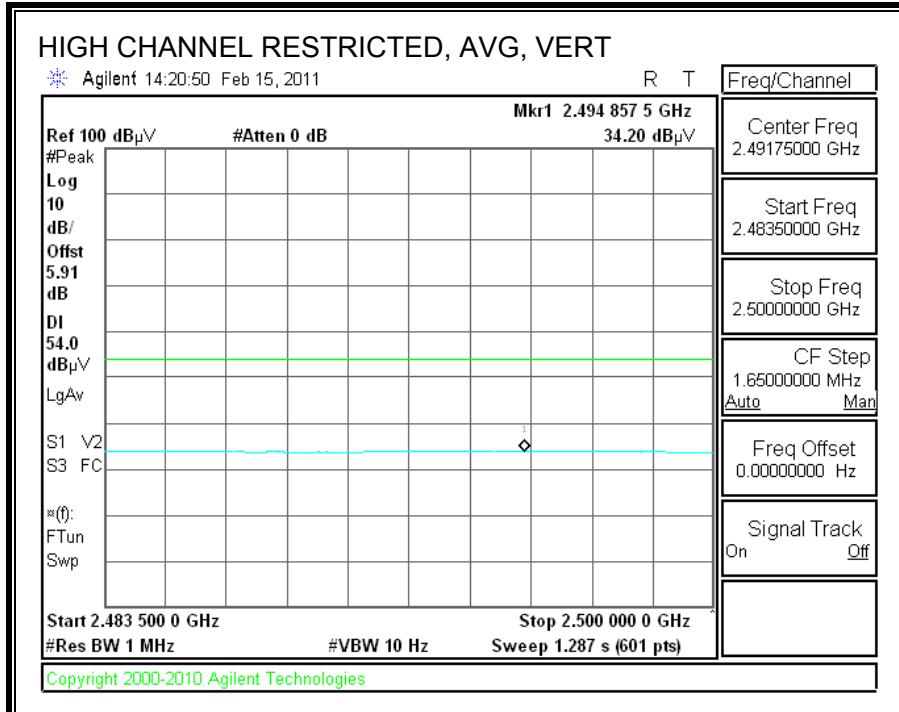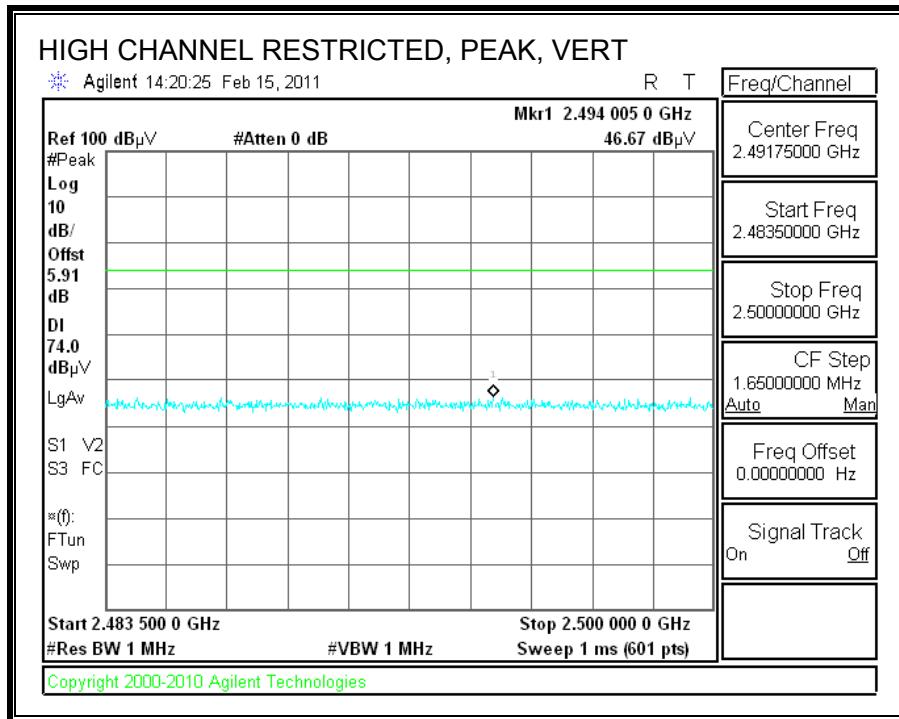

## HARMONICS AND SPURIOUS EMISSIONS

### **High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber**

Test Engr: David Garcia  
Date: 02/15/11  
Project #: 11J13631  
Company: Hon Hai  
Test Target: FCC 15.205  
Mode Oper: Tx, 8PSK Mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	



f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
<b>LOW CHANNEL, 2402 MHz</b>													
4.804	3.0	36.8	32.7	5.8	-34.8	0.0	10.0	50.4	74.0	-23.6	H	P	
4.804	3.0	28.9	32.7	5.8	-34.8	0.0	10.0	42.5	54.0	-11.5	H	A	
4.804	3.0	36.8	32.7	5.8	-34.8	0.0	10.0	50.4	74.0	-23.6	V	P	
4.804	3.0	26.3	32.7	5.8	-34.8	0.0	10.0	39.9	54.0	-14.1	V	A	
<b>MID CHANNEL, 2441 MHz</b>													
4.882	3.0	36.2	32.7	5.8	-34.8	0.0	10.0	49.9	74.0	-24.1	H	P	
4.882	3.0	23.9	32.7	5.8	-34.8	0.0	10.0	37.7	54.0	-16.3	H	A	
7.323	3.0	36.3	35.5	7.3	-34.1	0.0	10.0	54.9	74.0	-19.1	H	P	
7.323	3.0	23.0	35.5	7.3	-34.1	0.0	10.0	41.7	54.0	-12.3	H	A	
4.882	3.0	37.2	32.7	5.8	-34.8	0.0	10.0	51.0	74.0	-23.0	V	P	
4.882	3.0	24.3	32.7	5.8	-34.8	0.0	10.0	38.1	54.0	-15.9	V	A	
7.323	3.0	36.0	35.5	7.3	-34.1	0.0	10.0	54.7	74.0	-19.3	V	P	
7.323	3.0	23.1	35.5	7.3	-34.1	0.0	10.0	41.7	54.0	-12.3	V	A	
<b>HIGH CHANNEL, 2480 MHz</b>													
4.960	3.0	36.6	32.8	5.9	-34.8	0.0	10.0	50.5	74.0	-23.5	H	P	
4.960	3.0	23.7	32.8	5.9	-34.8	0.0	10.0	37.6	54.0	-16.4	H	A	
7.440	3.0	35.7	35.6	7.3	-34.1	0.0	10.0	54.5	74.0	-19.5	H	P	
7.440	3.0	22.9	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	H	A	
4.960	3.0	36.4	32.8	5.9	-34.8	0.0	10.0	50.2	74.0	-23.8	V	P	
4.960	3.0	23.8	32.8	5.9	-34.8	0.0	10.0	37.6	54.0	-16.4	V	A	
7.440	3.0	35.5	35.6	7.3	-34.1	0.0	10.0	54.4	74.0	-19.6	V	P	
7.440	3.0	22.9	35.6	7.3	-34.1	0.0	10.0	41.8	54.0	-12.2	V	A	

Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

### 8.2.1. LOW ENERGY LE GFSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

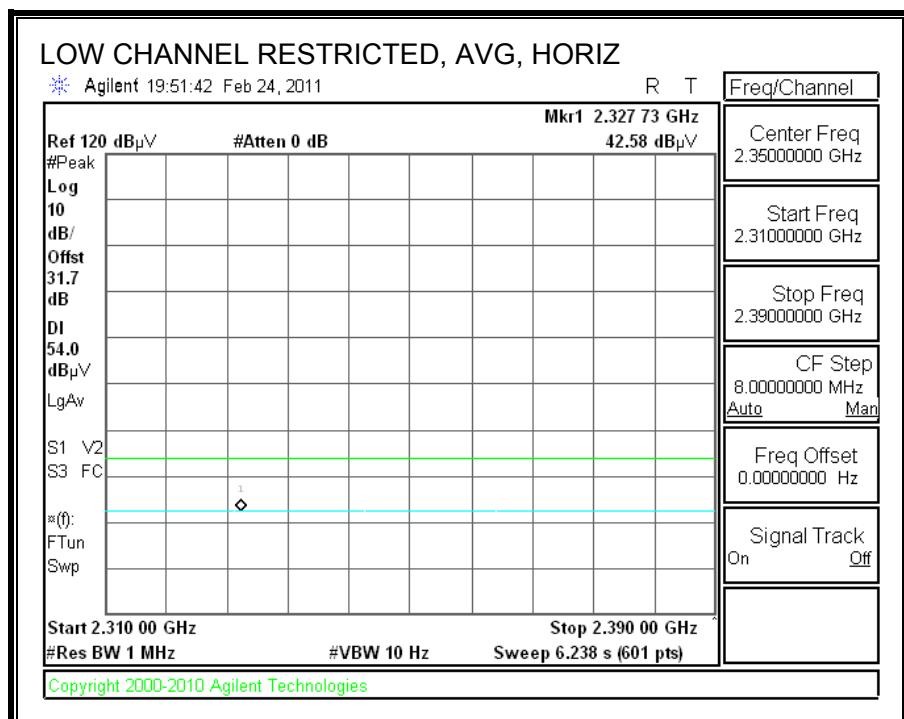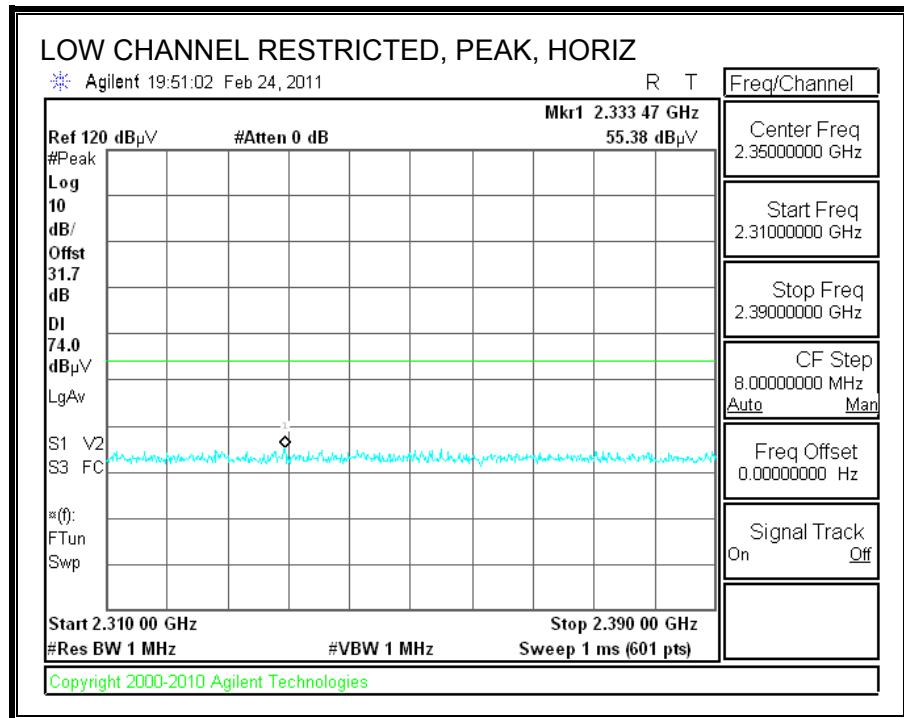



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

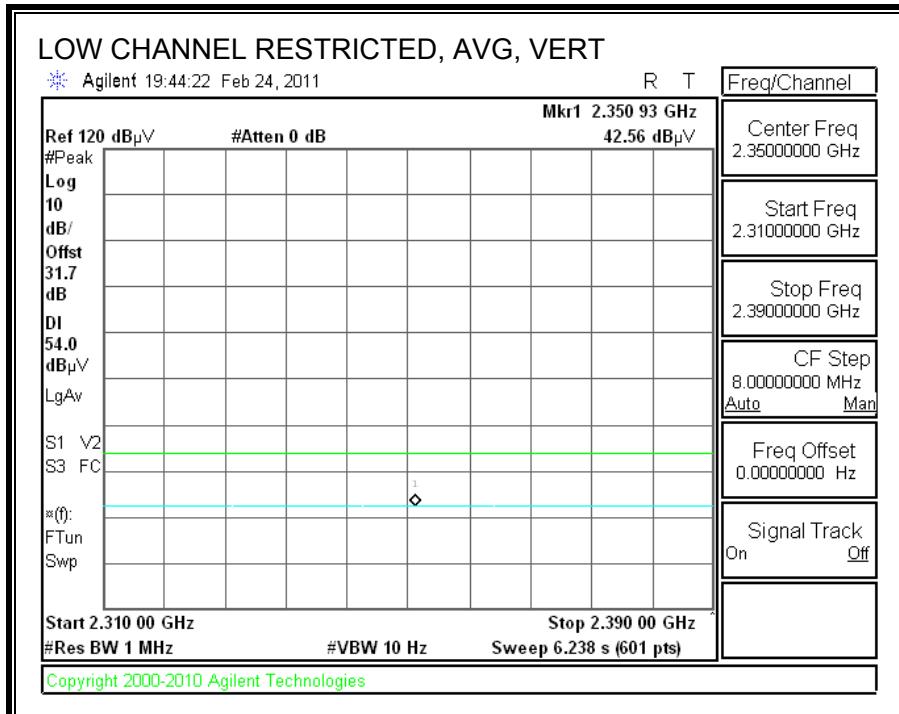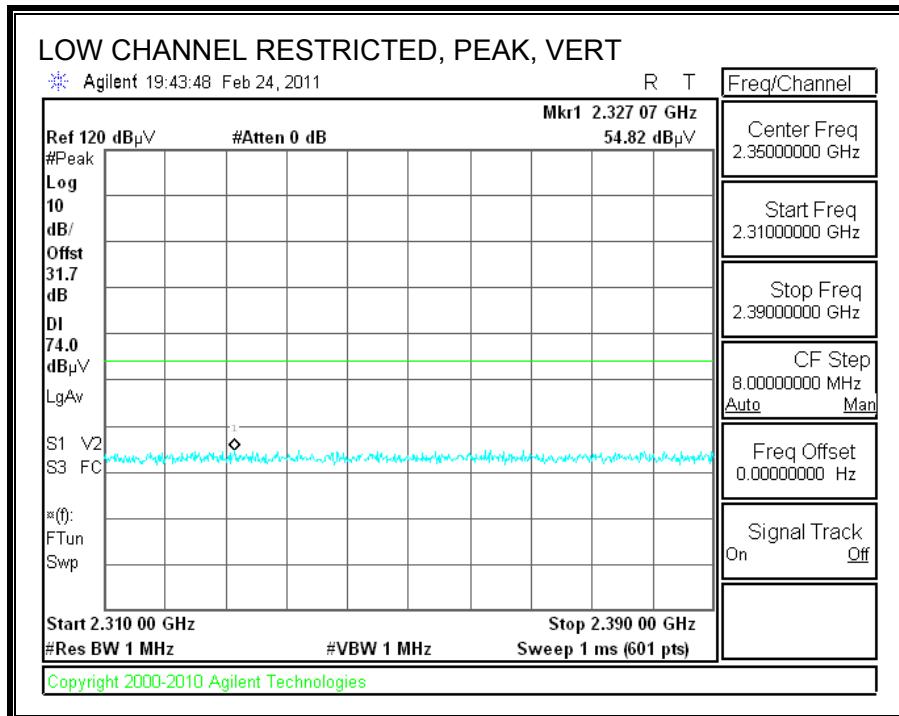

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

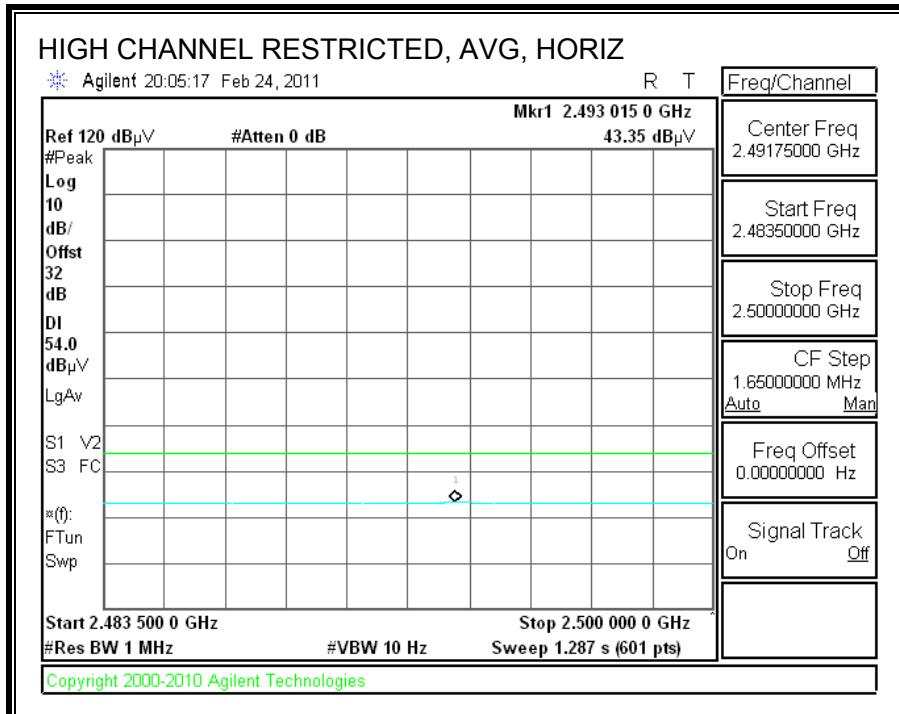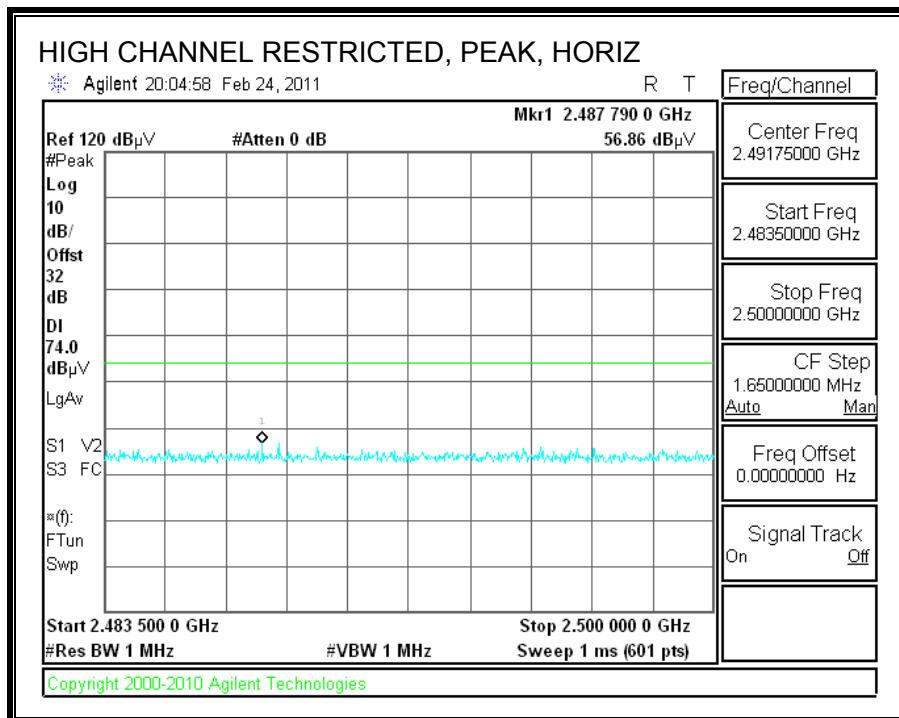

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

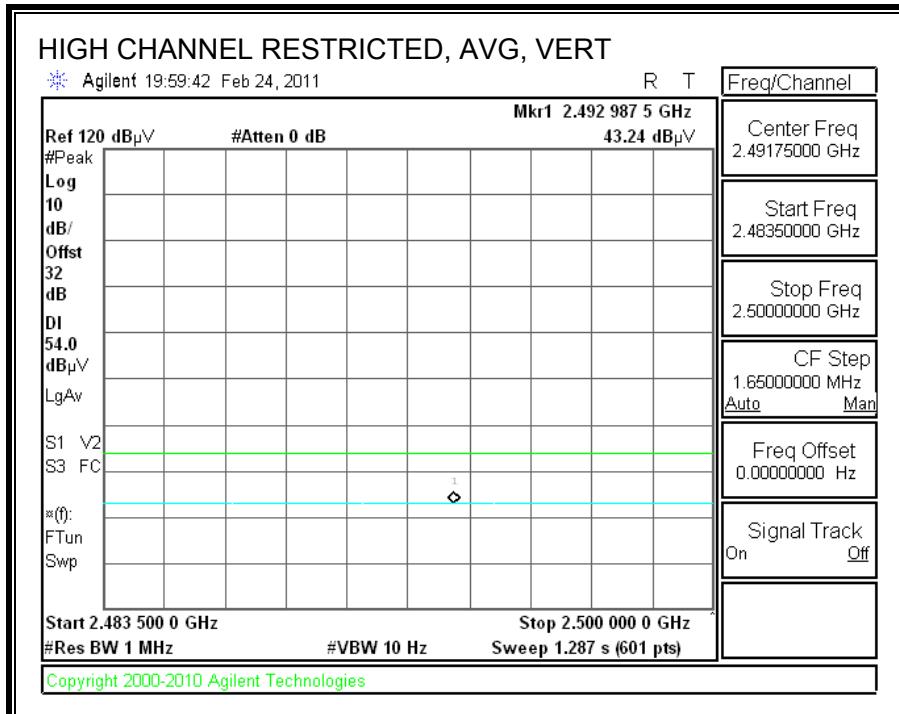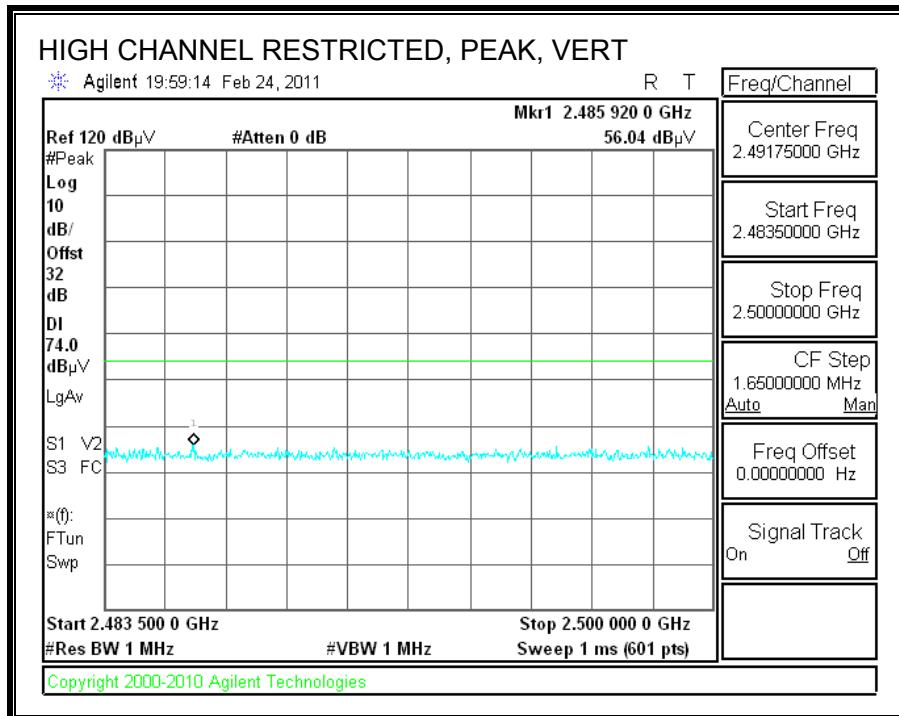

## HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	Hon Hai														
Project #:	11J13631														
Date:	2/25/2011														
Test Engineer:	Thanh Nguyen														
Configuration:	EUT and remote support Laptop														
Mode:	Transmit LE mode														
<u>Test Equipment:</u>															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T144 Miteq 3008A00931						FCC 15.209							
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF		Reject Filter		Peak Measurements		
3' cable 22807700			12' cable 22807600			20' cable 22807500					R_001		RBW=VBW=1MHz		
Average Measurements															
RBW=1MHz; VBW=10Hz															
<b>f</b> GHz	<b>Dist</b> (m)	<b>Read Pk</b> dBuV	<b>Read Avg.</b> dBuV	<b>AF</b> dB/m	<b>CL</b> dB	<b>Amp</b> dB	<b>D Corr</b> dB	<b>Fltr</b> dB	<b>Peak</b> dBuV/m	<b>Avg</b> dBuV/m	<b>Pk Lim</b> dBuV/m	<b>Avg Lim</b> dBuV/m	<b>Pk Mar</b> dB	<b>Avg Mar</b> dB	<b>Notes</b> (V/H)
Low Ch															
1.492	3.0	46.7	33.3	25.5	2.9	-38.8	0.0	0.0	36.4	22.9	74	54	-37.6	-31.1	V
3.200	3.0	43.7	34.2	30.5	4.5	-37.2	0.0	0.0	41.4	32.0	74	54	-32.6	-22.0	V
1.000	3.0	61.4	38.7	23.9	2.4	-39.5	0.0	0.0	48.1	25.4	74	54	-25.9	-28.6	H
3.200	3.0	43.1	34.1	30.5	4.5	-37.2	0.0	0.0	40.8	31.9	74	54	-33.2	-22.1	H
Mid Ch															
1.000	3.0	62.7	40.4	23.9	2.4	-39.5	0.0	0.0	49.4	27.1	74	54	-24.6	-26.9	V
3.262	3.0	46.2	38.4	30.6	4.6	-37.2	0.0	0.0	44.2	36.4	74	54	-29.8	-17.6	V
2.725	3.0	43.4	34.7	29.2	4.1	-37.4	0.0	0.0	39.2	30.5	74	54	-34.8	-23.5	H
High Ch															
1.000	3.0	64.2	41.3	23.9	2.4	-39.5	0.0	0.0	50.9	28.1	74	54	-23.1	-25.9	V
3.308	3.0	44.9	37.6	30.7	4.6	-37.1	0.0	0.0	43.1	35.7	74	54	-30.9	-18.3	V
2.425	3.0	42.5	33.7	28.3	3.9	-37.5	0.0	0.0	37.2	28.3	74	54	-36.8	-25.7	H
No harmonics and other spurious emissions were found above noise floor.															
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										


## 8.3. RECEIVER ABOVE 1 GHz

### 8.3.1. RECEIVER ABOVE 1 GHz


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																				
<p>Company: Hon Hai Project #: 11J13631 Date: 1/15/2011 Test Engineer: David Garcia Configuration: Y position worst case Mode: Rx mode</p> <p><b>Test Equipment:</b></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="3">Horn &gt; 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60: S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="3"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="6">Hi Frequency Cables</td> <td></td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="2">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td></td> <td colspan="2">Average Measurements RBW=1MHz; VBW=10Hz</td> </tr> </table> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pl dBuV</th> <th>Read Avg. dBuV</th> <th>AF CL</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr><td>1.000</td><td>3.0</td><td>51.1</td><td>34.1</td><td>24.5</td><td>2.4</td><td>-38.3</td><td>0.0</td><td>0.0</td><td>39.7</td><td>22.7</td><td>74</td><td>54</td><td>-34.3</td><td>-31.3</td></tr> <tr><td>1.011</td><td>3.0</td><td>49.2</td><td>32.3</td><td>24.5</td><td>2.4</td><td>-38.2</td><td>0.0</td><td>0.0</td><td>37.8</td><td>20.9</td><td>74</td><td>54</td><td>-36.2</td><td>-33.1</td></tr> <tr><td>1.421</td><td>3.0</td><td>45.8</td><td>32.4</td><td>25.9</td><td>2.9</td><td>-37.7</td><td>0.0</td><td>0.0</td><td>36.8</td><td>23.4</td><td>74</td><td>54</td><td>-37.2</td><td>-30.6</td></tr> <tr><td>1.662</td><td>3.0</td><td>46.6</td><td>31.9</td><td>26.7</td><td>3.1</td><td>-37.3</td><td>0.0</td><td>0.0</td><td>39.0</td><td>24.3</td><td>74</td><td>54</td><td>-35.0</td><td>-29.7</td></tr> <tr><td>2.337</td><td>3.0</td><td>42.0</td><td>32.5</td><td>28.0</td><td>3.8</td><td>-36.4</td><td>0.0</td><td>0.0</td><td>37.4</td><td>27.9</td><td>74</td><td>54</td><td>-36.6</td><td>-26.1</td></tr> <tr><td>3.653</td><td>3.0</td><td>40.0</td><td>31.5</td><td>31.2</td><td>4.9</td><td>-35.3</td><td>0.0</td><td>0.0</td><td>40.8</td><td>32.3</td><td>74</td><td>54</td><td>-33.2</td><td>-21.7</td></tr> <tr><td>1.000</td><td>3.0</td><td>57.0</td><td>34.5</td><td>24.5</td><td>2.4</td><td>-38.3</td><td>0.0</td><td>0.0</td><td>45.6</td><td>23.1</td><td>74</td><td>54</td><td>-28.4</td><td>-30.9</td></tr> <tr><td>1.020</td><td>3.0</td><td>48.8</td><td>32.1</td><td>24.5</td><td>2.4</td><td>-38.2</td><td>0.0</td><td>0.0</td><td>37.5</td><td>20.8</td><td>74</td><td>54</td><td>-36.5</td><td>-33.2</td></tr> <tr><td>1.141</td><td>3.0</td><td>47.1</td><td>31.8</td><td>24.9</td><td>2.5</td><td>-38.1</td><td>0.0</td><td>0.0</td><td>36.5</td><td>21.2</td><td>74</td><td>54</td><td>-37.5</td><td>-32.8</td></tr> <tr><td>1.663</td><td>3.0</td><td>50.2</td><td>32.0</td><td>26.7</td><td>3.1</td><td>-37.3</td><td>0.0</td><td>0.0</td><td>42.7</td><td>24.5</td><td>74</td><td>54</td><td>-31.3</td><td>-29.5</td></tr> <tr><td>2.339</td><td>3.0</td><td>39.0</td><td>31.7</td><td>28.0</td><td>3.8</td><td>-36.4</td><td>0.0</td><td>0.0</td><td>34.4</td><td>27.1</td><td>74</td><td>54</td><td>-39.6</td><td>-26.9</td></tr> <tr><td>3.658</td><td>3.0</td><td>39.5</td><td>31.5</td><td>31.2</td><td>4.9</td><td>-35.3</td><td>0.0</td><td>0.0</td><td>40.3</td><td>32.3</td><td>74</td><td>54</td><td>-33.7</td><td>-21.7</td></tr> </tbody> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit	T60: S/N: 2238 @3m	T34 HP 8449B					FCC 15.209	Hi Frequency Cables							3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz		3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz; VBW=10Hz		f GHz	Dist (m)	Read Pl dBuV	Read Avg. dBuV	AF CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	1.000	3.0	51.1	34.1	24.5	2.4	-38.3	0.0	0.0	39.7	22.7	74	54	-34.3	-31.3	1.011	3.0	49.2	32.3	24.5	2.4	-38.2	0.0	0.0	37.8	20.9	74	54	-36.2	-33.1	1.421	3.0	45.8	32.4	25.9	2.9	-37.7	0.0	0.0	36.8	23.4	74	54	-37.2	-30.6	1.662	3.0	46.6	31.9	26.7	3.1	-37.3	0.0	0.0	39.0	24.3	74	54	-35.0	-29.7	2.337	3.0	42.0	32.5	28.0	3.8	-36.4	0.0	0.0	37.4	27.9	74	54	-36.6	-26.1	3.653	3.0	40.0	31.5	31.2	4.9	-35.3	0.0	0.0	40.8	32.3	74	54	-33.2	-21.7	1.000	3.0	57.0	34.5	24.5	2.4	-38.3	0.0	0.0	45.6	23.1	74	54	-28.4	-30.9	1.020	3.0	48.8	32.1	24.5	2.4	-38.2	0.0	0.0	37.5	20.8	74	54	-36.5	-33.2	1.141	3.0	47.1	31.8	24.9	2.5	-38.1	0.0	0.0	36.5	21.2	74	54	-37.5	-32.8	1.663	3.0	50.2	32.0	26.7	3.1	-37.3	0.0	0.0	42.7	24.5	74	54	-31.3	-29.5	2.339	3.0	39.0	31.7	28.0	3.8	-36.4	0.0	0.0	34.4	27.1	74	54	-39.6	-26.9	3.658	3.0	39.5	31.5	31.2	4.9	-35.3	0.0	0.0	40.3	32.3	74	54	-33.7	-21.7
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit																																																																																																																																																																																																																																														
T60: S/N: 2238 @3m	T34 HP 8449B					FCC 15.209																																																																																																																																																																																																																																														
Hi Frequency Cables																																																																																																																																																																																																																																																				
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																															
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz; VBW=10Hz																																																																																																																																																																																																																																															
f GHz	Dist (m)	Read Pl dBuV	Read Avg. dBuV	AF CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																						
1.000	3.0	51.1	34.1	24.5	2.4	-38.3	0.0	0.0	39.7	22.7	74	54	-34.3	-31.3																																																																																																																																																																																																																																						
1.011	3.0	49.2	32.3	24.5	2.4	-38.2	0.0	0.0	37.8	20.9	74	54	-36.2	-33.1																																																																																																																																																																																																																																						
1.421	3.0	45.8	32.4	25.9	2.9	-37.7	0.0	0.0	36.8	23.4	74	54	-37.2	-30.6																																																																																																																																																																																																																																						
1.662	3.0	46.6	31.9	26.7	3.1	-37.3	0.0	0.0	39.0	24.3	74	54	-35.0	-29.7																																																																																																																																																																																																																																						
2.337	3.0	42.0	32.5	28.0	3.8	-36.4	0.0	0.0	37.4	27.9	74	54	-36.6	-26.1																																																																																																																																																																																																																																						
3.653	3.0	40.0	31.5	31.2	4.9	-35.3	0.0	0.0	40.8	32.3	74	54	-33.2	-21.7																																																																																																																																																																																																																																						
1.000	3.0	57.0	34.5	24.5	2.4	-38.3	0.0	0.0	45.6	23.1	74	54	-28.4	-30.9																																																																																																																																																																																																																																						
1.020	3.0	48.8	32.1	24.5	2.4	-38.2	0.0	0.0	37.5	20.8	74	54	-36.5	-33.2																																																																																																																																																																																																																																						
1.141	3.0	47.1	31.8	24.9	2.5	-38.1	0.0	0.0	36.5	21.2	74	54	-37.5	-32.8																																																																																																																																																																																																																																						
1.663	3.0	50.2	32.0	26.7	3.1	-37.3	0.0	0.0	42.7	24.5	74	54	-31.3	-29.5																																																																																																																																																																																																																																						
2.339	3.0	39.0	31.7	28.0	3.8	-36.4	0.0	0.0	34.4	27.1	74	54	-39.6	-26.9																																																																																																																																																																																																																																						
3.658	3.0	39.5	31.5	31.2	4.9	-35.3	0.0	0.0	40.3	32.3	74	54	-33.7	-21.7																																																																																																																																																																																																																																						
Rev. 07.22.09																																																																																																																																																																																																																																																				
<table> <tr> <td>f</td><td>Measurement Frequency</td> <td>Amp</td><td>Preamp Gain</td> <td colspan="4"></td> <td>Avg Lim</td><td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td><td>Distance to Antenna</td> <td>D Corr</td><td>Distance Correct to 3 meters</td> <td colspan="4"></td> <td>Pk Lim</td><td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td><td>Analyzer Reading</td> <td>Avg</td><td>Average Field Strength @ 3 m</td> <td colspan="4"></td> <td>Avg Mar</td><td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td><td>Antenna Factor</td> <td>Peak</td><td>Calculated Peak Field Strength</td> <td colspan="4"></td> <td>Pk Mar</td><td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td><td>Cable Loss</td> <td>HPF</td><td>High Pass Filter</td> <td colspan="4"></td> <td></td><td></td> </tr> </table>								f	Measurement Frequency	Amp	Preamp Gain					Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																	
f	Measurement Frequency	Amp	Preamp Gain					Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																											
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																											
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																											
AF	Antenna Factor	Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																											
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																	

## 8.4. WORST-CASE BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

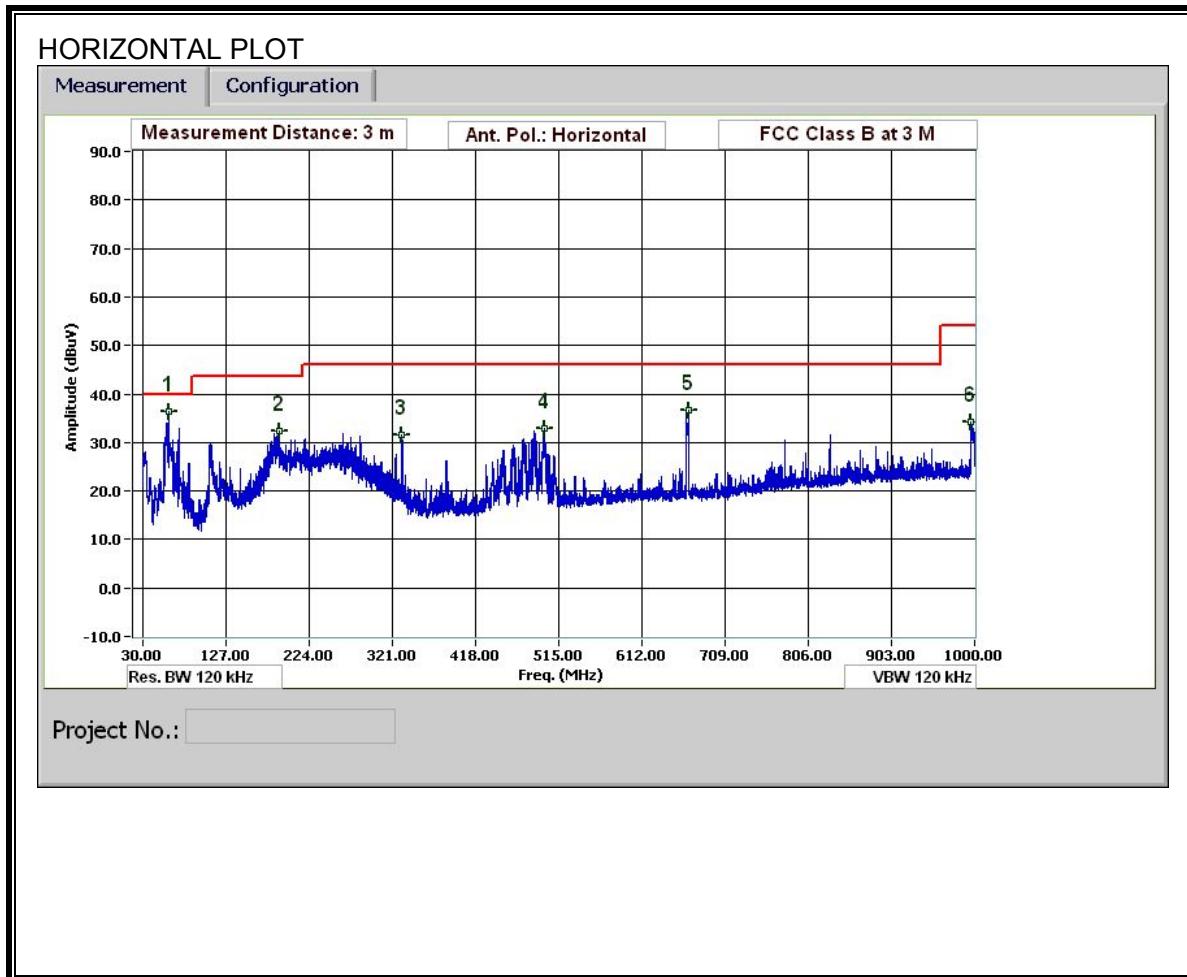

## **SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

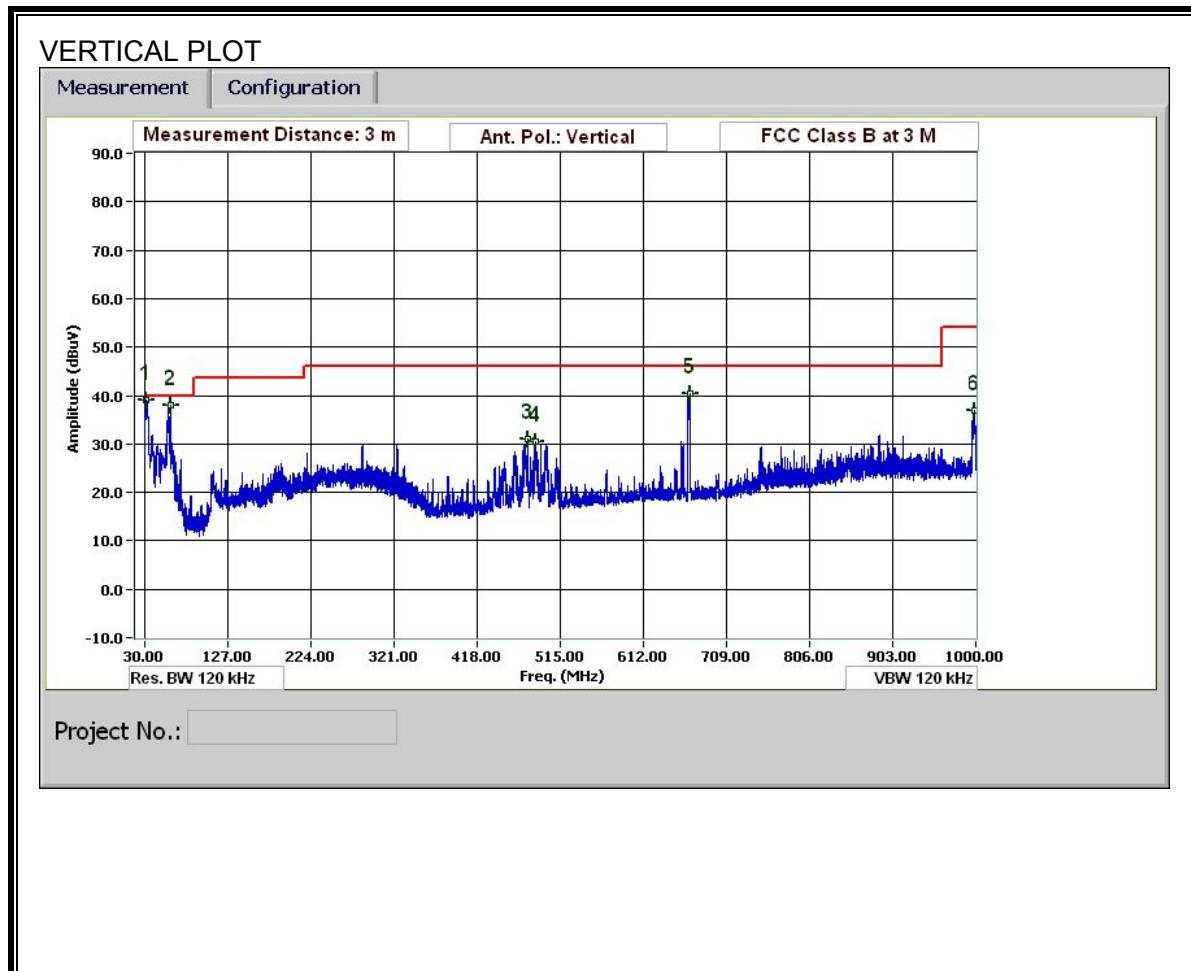

## HORIZONTAL AND VERTICAL DATA

**30-1000MHz Frequency Measurement**  
**Compliance Certification Services, Fremont 5m Chamber**

Test Engr: David Garcia  
Date: 02/15/11  
Project #: 11J13631  
Company: Hon Hai  
Test Target: FCC 15.205  
Mode Oper: Tx, Worst case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit  
Dist Distance to Antenna D Corr Distance Correct to 3 meters  
Read Analyzer Reading Filter Filter Insert Loss  
AF Antenna Factor Corr. Calculated Field Strength  
CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
60.001	3.0	56.1	7.9	0.7	28.3	0.0	0.0	36.3	40.0	-3.7	H	P	
188.527	3.0	47.4	11.2	1.1	27.4	0.0	0.0	32.3	43.5	-11.2	H	P	
331.932	3.0	43.5	14.0	1.6	27.6	0.0	0.0	31.5	46.0	-14.5	H	P	
498.019	3.0	42.7	16.8	2.0	28.6	0.0	0.0	32.9	46.0	-13.1	H	P	
666.146	3.0	44.0	18.8	2.3	28.5	0.0	0.0	36.5	46.0	-9.5	H	P	
995.800	3.0	36.2	22.7	2.9	27.6	0.0	0.0	34.2	54.0	-19.8	H	P	
32.040	3.0	48.0	19.0	0.5	28.4	0.0	0.0	39.1	40.0	-0.9	V	P	
32.040	3.0	43.6	19.0	0.5	28.4	0.0	0.0	34.7	40.0	-5.3	V	QP	
59.881	3.0	57.7	7.9	0.7	28.3	0.0	0.0	38.0	40.0	-2.0	V	P	
59.881	3.0	53.8	7.9	0.7	28.3	0.0	0.0	34.1	40.0	-5.9	V	QP	
476.778	3.0	41.1	16.4	1.9	28.5	0.0	0.0	31.0	46.0	-15.0	V	P	
486.739	3.0	40.4	16.6	1.9	28.6	0.0	0.0	30.4	46.0	-15.6	V	P	
666.146	3.0	47.7	18.8	2.3	28.5	0.0	0.0	40.3	46.0	-5.7	V	P	
999.160	3.0	38.8	22.7	2.9	27.6	0.0	0.0	36.8	54.0	-17.2	V	P	

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS


**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP	AV	
0.19	60.50	--	40.33	0.00	64.21	54.21	-3.71	-13.88	L1
0.28	51.90	--	33.37	0.00	60.85	50.85	-8.95	-17.48	L1
13.91	46.27	--	32.31	0.00	60.00	50.00	-13.73	-17.69	L1
0.19	54.63	--	37.20	0.00	64.12	54.12	-9.49	-16.92	L2
0.39	48.53	--	33.48	0.00	58.04	48.04	-9.51	-14.56	L2
14.44	47.36	--	34.23	0.00	60.00	50.00	-12.64	-15.77	L2
6 Worst Data									

**LINE 1 RESULTS**

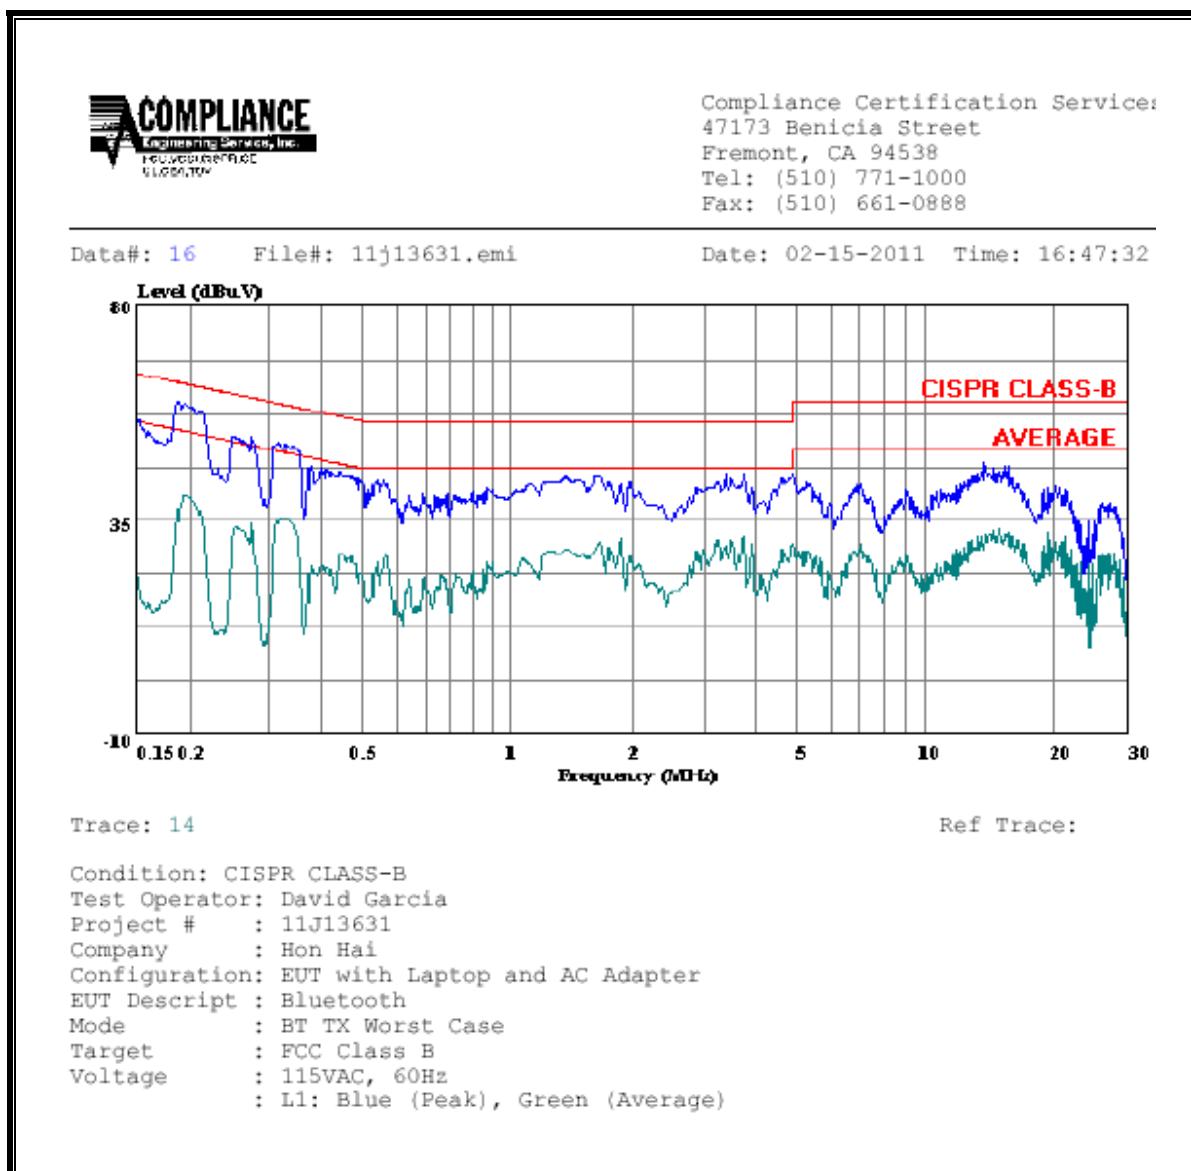

**LINE 2 RESULTS**

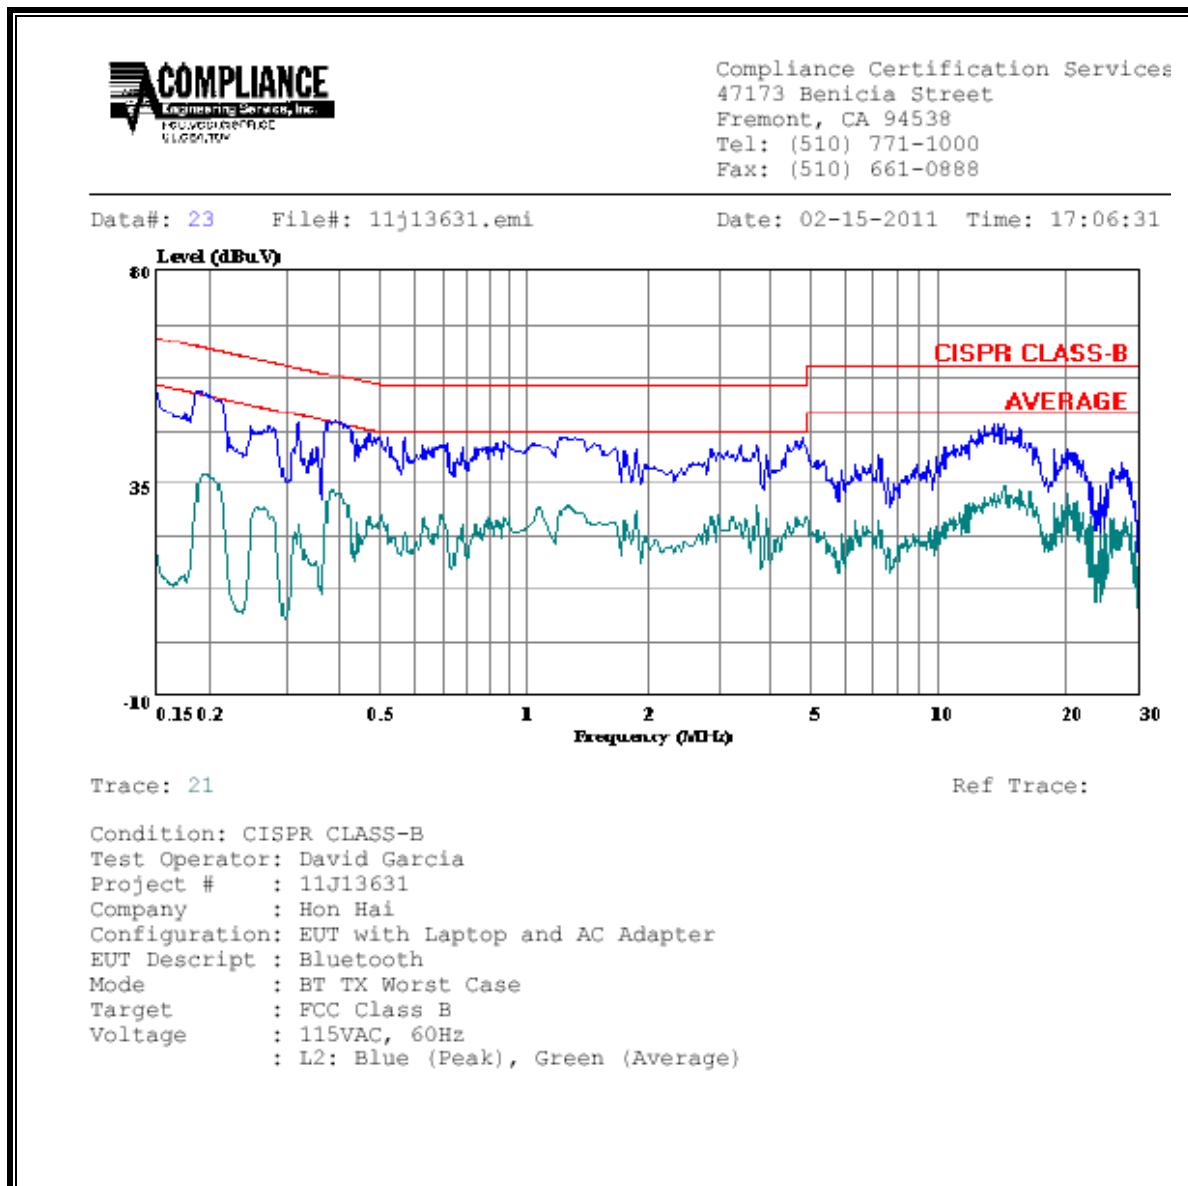

## 10. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5**  
**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	$280/f$	$2.19/f$		6
10–30	28	$2.19/f$		6
30–300	28	0.073	$2^*$	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

\* Power density limit is applicable at frequencies greater than 100 MHz.

**Notes:** 1. Frequency,  $f$ , is in MHz.  
2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.  
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla ( $\mu$ T) or 12.57 milligauss (mG).

## EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m<sup>2</sup> is converted to units of mWc/m<sup>2</sup> by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m<sup>2</sup>

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power \* Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

## LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

## RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m <sup>2</sup> )	FCC Power Density (mW/cm <sup>2</sup> )
2.4 GHz	Bluetooth	0.20	5.16	2.91	0.01	0.001