


# ENGINEERING TEST REPORT



**XTend**  
**Model: XT09B**  
**FCC ID: MCQ-9XTENDB**

*Applicant:*

**Digi International Inc.**  
**11001 Bren Road East**  
**Minnetonka, MN 55343**

*In Accordance With*

**Federal Communications Commission (FCC)**  
**Part 15, Subpart C, Section 15.247 Frequency Hopping Spread Spectrum (FHSS)**  
**Operating within 902-928 MHz Band**

**UltraTech's File No.: DIGI-073\_FCC C2PC**

This Test report is Issued under the Authority of  
Tri M. Luu, BASc  
Vice President of Engineering  
UltraTech Group of Labs

Date: January 14, 2013

Report Prepared by: Dharmajit Solanki

Tested by: Mr. Hung Trinh

Issued Date: January 14, 2013

Test Dates: Dec 27, 2012 – Jan 07, 2013

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)

FCC



91038

1309



46390-2049



NvLap Lab Code 200093-0



SL2-IN-E-1119R



CA2049

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION .....</b>	<b>1</b>
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S) .....	1
1.3. NORMATIVE REFERENCES .....	1
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT .....</b>	<b>2</b>
2.1. CLIENT INFORMATION .....	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS .....	3
2.4. ASSOCIATED ANTENNA DESCRIPTIONS.....	3
2.5. LIST OF EUT'S PORTS.....	3
2.6. ANCILLARY EQUIPMENT .....	4
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>	<b>5</b>
3.1. CLIMATE TEST CONDITIONS .....	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS .....	5
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
4.1. LOCATION OF TESTS.....	6
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....	6
<b>EXHIBIT 5. TEST DATA.....</b>	<b>7</b>
5.1. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS .....	7
5.2. PEAK OUTPUT POWER & EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) [§ 15.247(B)] .....	8
5.3. RF EXPOSURE REQUIREMENTS [§§ 15.247(B)(5), 1.1310 & 2.1091] .....	16
5.4. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(D), 15.209 & 15.205] .....	18
<b>EXHIBIT 6. TEST EQUIPMENT LIST .....</b>	<b>26</b>
<b>EXHIBIT 7. MEASUREMENT UNCERTAINTY.....</b>	<b>27</b>
7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	27
7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	27

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.247
<b>Title:</b>	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15 – Radio Frequency Devices
<b>Purpose of Test:</b>	C2PC Acceptance Application for Frequency Hopping Spread Spectrum Transceiver Operating within the Frequency Band 902-928 MHz.
<b>Test Procedures:</b>	ANSI C63.4 ANSI C63.10 FCC Public Notice DA 00-705
<b>Environmental Classification:</b>	<input checked="" type="checkbox"/> Commercial, industrial or business environment <input checked="" type="checkbox"/> Residential environment

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2011	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.4	2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
FCC ET Docket No. 99-231	2002	Amendment to FCC Part 15 of the Commission's Rules Regarding to Spread Spectrum Devices

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	Digi International Inc.
<b>Address:</b>	11001 Bren Road East Minnetonka, MN 55343 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: <a href="mailto:paul.dahl@digi.com">paul.dahl@digi.com</a>

MANUFACTURER	
<b>Name:</b>	Digi International Inc.
<b>Address:</b>	11001 Bren Road East Minnetonka, MN 55343 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: <a href="mailto:paul.dahl@digi.com">paul.dahl@digi.com</a>

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	Digi International Inc
<b>Product Name:</b>	XTend
<b>Model Name or Number:</b>	XT09B
<b>Serial Number:</b>	Test Sample
<b>Type of Equipment:</b>	Spread Spectrum Transmitter
<b>Input Power Supply Type:</b>	External Regulated DC Sources
<b>Primary User Functions of EUT:</b>	Long range drop-in wireless solution for embedded systems in 902-928MHz band

### 2.3. EUT'S TECHNICAL SPECIFICATIONS

Transmitter	
<b>Equipment Type:</b>	<ul style="list-style-type: none"><li>▪ Mobile</li><li>▪ Base Station (fixed use)</li></ul>
<b>Intended Operating Environment:</b>	<ul style="list-style-type: none"><li>▪ Commercial, industrial or business environment</li><li>▪ Residential environment</li></ul>
<b>Power Supply Requirement:</b>	2.8V to 5.5V DC
<b>RF Output Power Rating:</b>	0.001 to 1 W
<b>Operating Frequency Range:</b>	902.9- 927.1 MHz
<b>RF Output Impedance:</b>	50 Ohm
<b>Duty Cycle:</b>	Continuous
<b>Modulation Type:</b>	FSK, GFSK
<b>Antenna Connector Type:</b>	RPSMA or MMCX

### 2.4. ASSOCIATED ANTENNA DESCRIPTIONS

Antenna Type	Maximum Gain (dBi)
Disc Patch (New addition)	0.0
Monopole antenna	2.1
Multi-path antenna	3.0
Omni-directional antenna	8.1
Yagi antenna	15.1

The new antenna Disc Patch type with 0dBi gain was used for testing. Refer to user manual for antennas list information.

### 2.5. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF IN/OUT Port	1	RPSMA/MMCX	Shielded
2	DC Supply & I/O Port	1	Pin Header	No cable, direct connection

## 2.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Test Jig Cable
Brand name:	Digi International Inc.
Model Name or Number:	N/A
Serial Number:	N/A
Connected to EUT's Port:	Module pin signals

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C to 23°C
Humidity:	45 to 55%
Pressure:	102 kPa
Power Input Source:	5.5 VDC

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

<b>Operating Modes:</b>	<ul style="list-style-type: none"><li>Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements.</li><li>The EUT operates in normal Frequency Hopping mode for occupancy duration, and frequency separation.</li></ul>
<b>Special Test Software:</b>	Special software provided by the Applicant to operate the EUT at each channel frequency continuously and in the range of typical modes of operation.
<b>Special Hardware Used:</b>	Test Jig
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as non-integral antenna equipment as described with the test results.

<b>Transmitter Test Signals</b>	
<b>Frequency Band(s):</b>	902.9-927.1 MHz
<b>Frequency(ies) Tested:</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	902.9, 915.2 and 927.1 MHz
<b>RF Power Output:</b> (measured maximum output power at antenna terminals)	1 W (conducted)
<b>Normal Test Modulation:</b>	FSK, GFSK
<b>Modulating Signal Source:</b>	Internal

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	Yes
15.207(a)	Power Line Conducted Emissions Measurements	N/P*
15.247(a)(1)	Provisions for Frequency Hopping Systems	N/P*
15.247(b)	Peak Output Power	Yes
15.247(d)	Band-Edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(d), 15.209 & 15.205	Transmitter Spurious Radiated Emissions	Yes
15.247(i), 1.1307, 1.1310, 2.1091	RF Exposure	Yes

\* Note: Refer to original test report for compliance details. The addition of new antenna type doesn't affect their results.

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

## EXHIBIT 5. TEST DATA

### 5.1. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	Manufacturer's Clarification
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"><li>➤ The application (or intended use) of the EUT</li><li>➤ The installation requirements of the EUT</li><li>➤ The method by which the EUT will be marketed</li></ul>	Employs unique antenna connectors: Reverse Polarity SMA or MMCX
15.204	<p>Provided the information for every antenna proposed for use with the EUT:</p> <ul style="list-style-type: none"><li>➤ type (e.g. Yagi, patch, grid, dish, etc...),</li><li>➤ manufacturer and model number</li><li>➤ gain with reference to an isotropic radiator</li></ul>	See list in User Manual.

## 5.2. PEAK OUTPUT POWER & EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) [§ 15.247(b)]

### 5.2.1. Limit


**§15.247(b)(2)** For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

**§15.247(b)(4)** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2.2. Method of Measurements

FCC Public Notice DA 00-705 and ANSI C63.10-2009

### 5.2.3. Test Arrangement

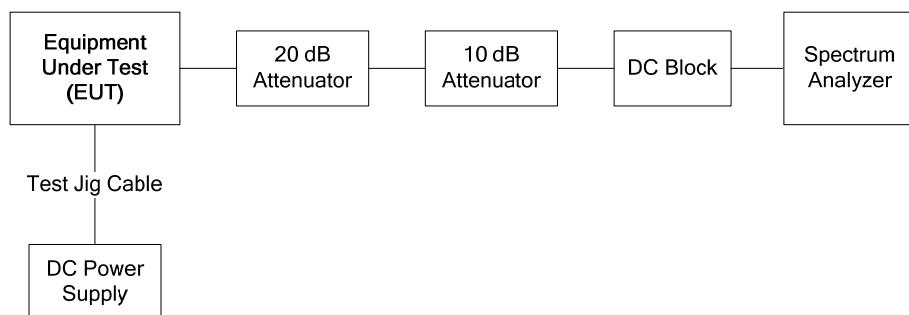

#### 5.2.4. Test Data


Operation Mode	Frequency (MHz)	Peak Output Power at Antenna Terminal (dBm)	Calculated EIRP (dBm)	Peak Output Power Limit (dBm)	EIRP Limit (dBm)
FSK 10 kbps High power setting (30 dBm, 1 W)	902.9	29.27	See Notes below	30	36
	915.2	29.80	See Notes below	30	36
	927.1	29.93	See Notes below	30	36
GFSK 125 kbps High power setting (30 dBm, 1 W)	902.9	29.15	See Notes below	30	36
	915.2	29.80	See Notes below	30	36
	927.1	29.99	See Notes below	30	36

Notes:


1. The EIRP shall be calculated based on the transmitter antenna gain ( $G_{dB_i}$ ), cable loss ( $CL_{dB}$ ) and peak output power at antenna terminal ( $P_{dBm}$ ). Calculated EIRP =  $P_{dBm} + G_{dB_i} - CL_{dB}$
2. EIRP shall not exceed 36 dBm limit (Power Setting = 36 dBm -  $G_{dB_i} + CL_{dB}$ ).

See the following plots for details.


Plot 5.2.4.1. Peak Output Power, 902.9 MHz, FSK 10 kbps, High Power Setting

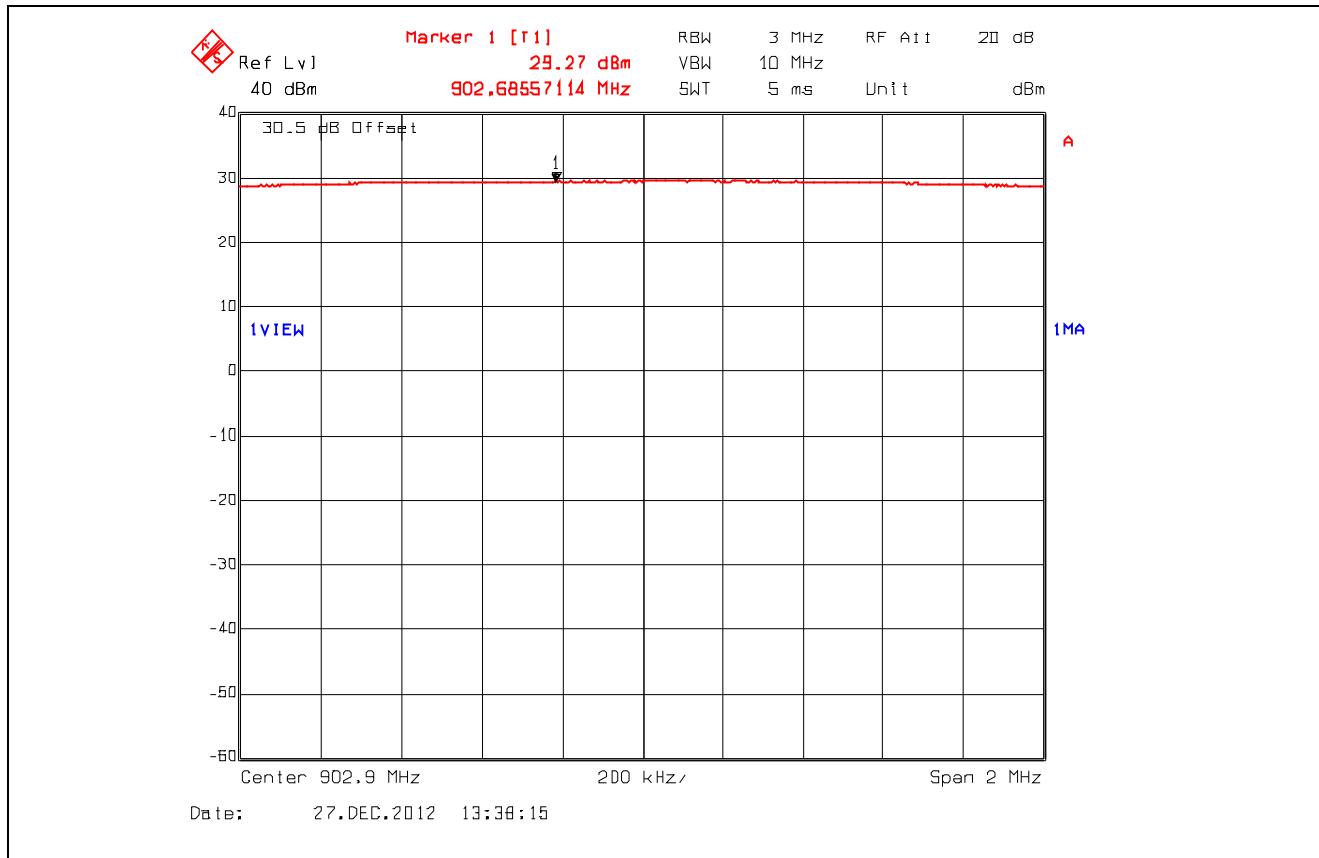


Plot 5.2.4.2. Peak Output Power, 915.2 MHz, FSK 10 kbps, High Power Setting

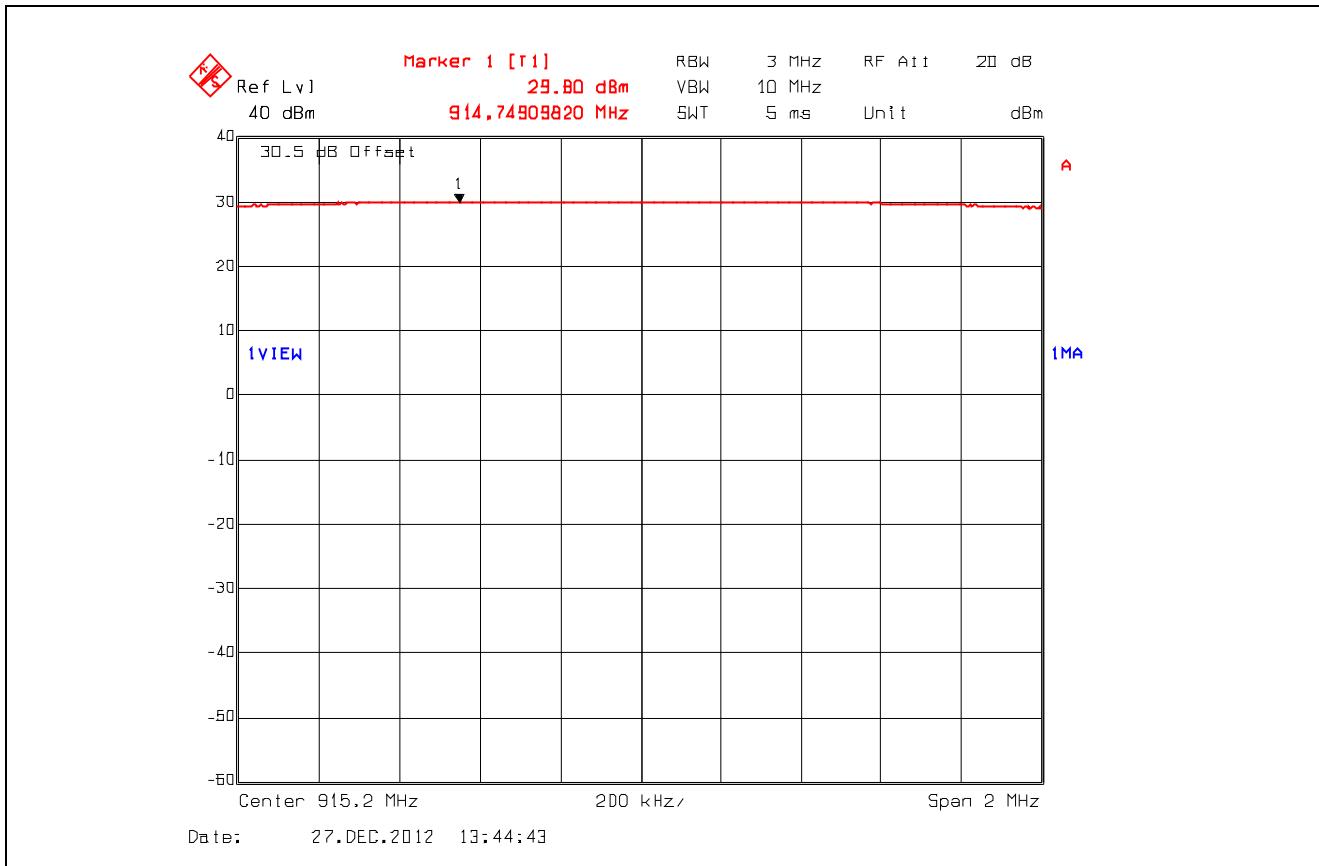


Plot 5.2.4.3. Peak Output Power, 927.1 MHz, FSK 10 kbps, High Power Setting

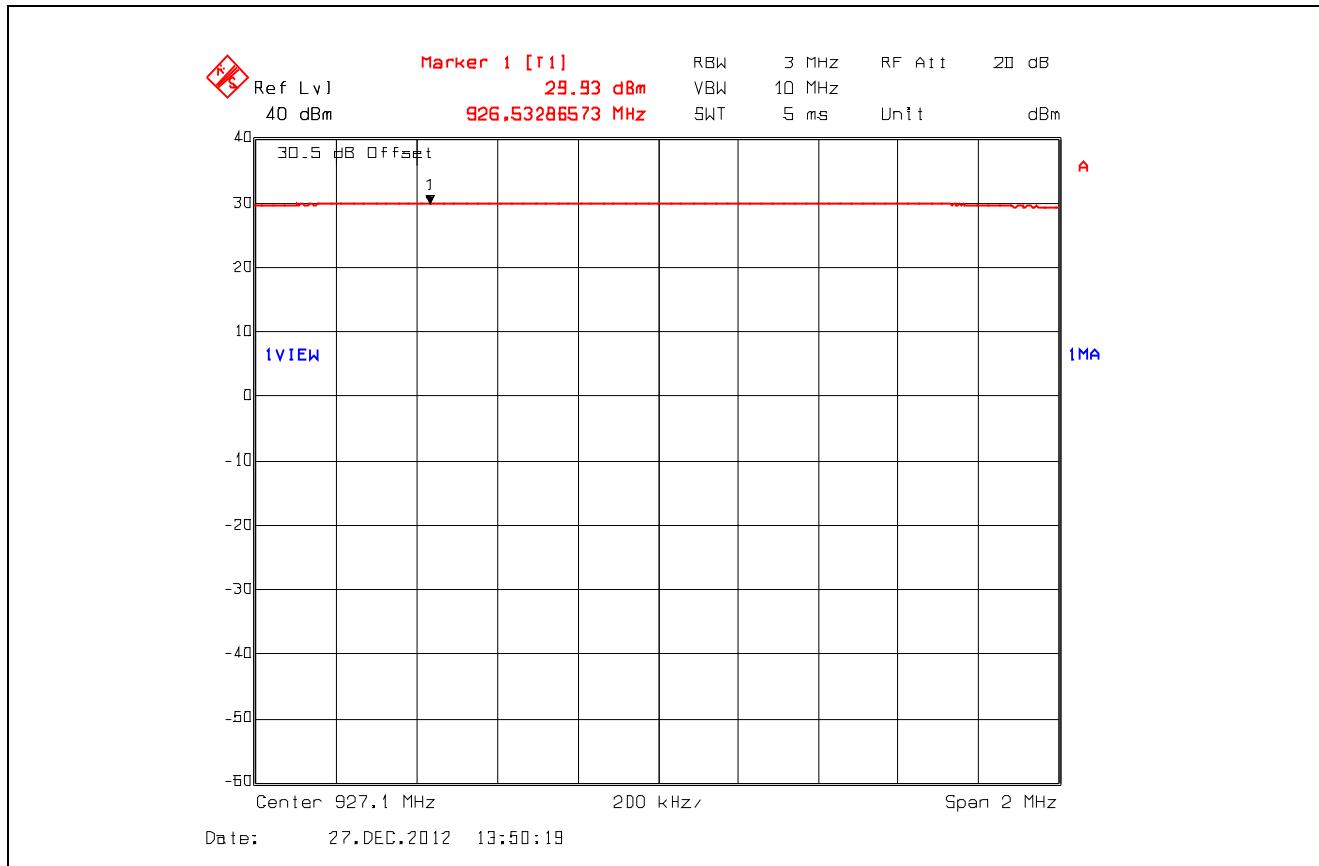


**Plot 5.2.4.4.** Peak Output Power, 902.9 MHz, GFSK 125 kbps, High Power Setting

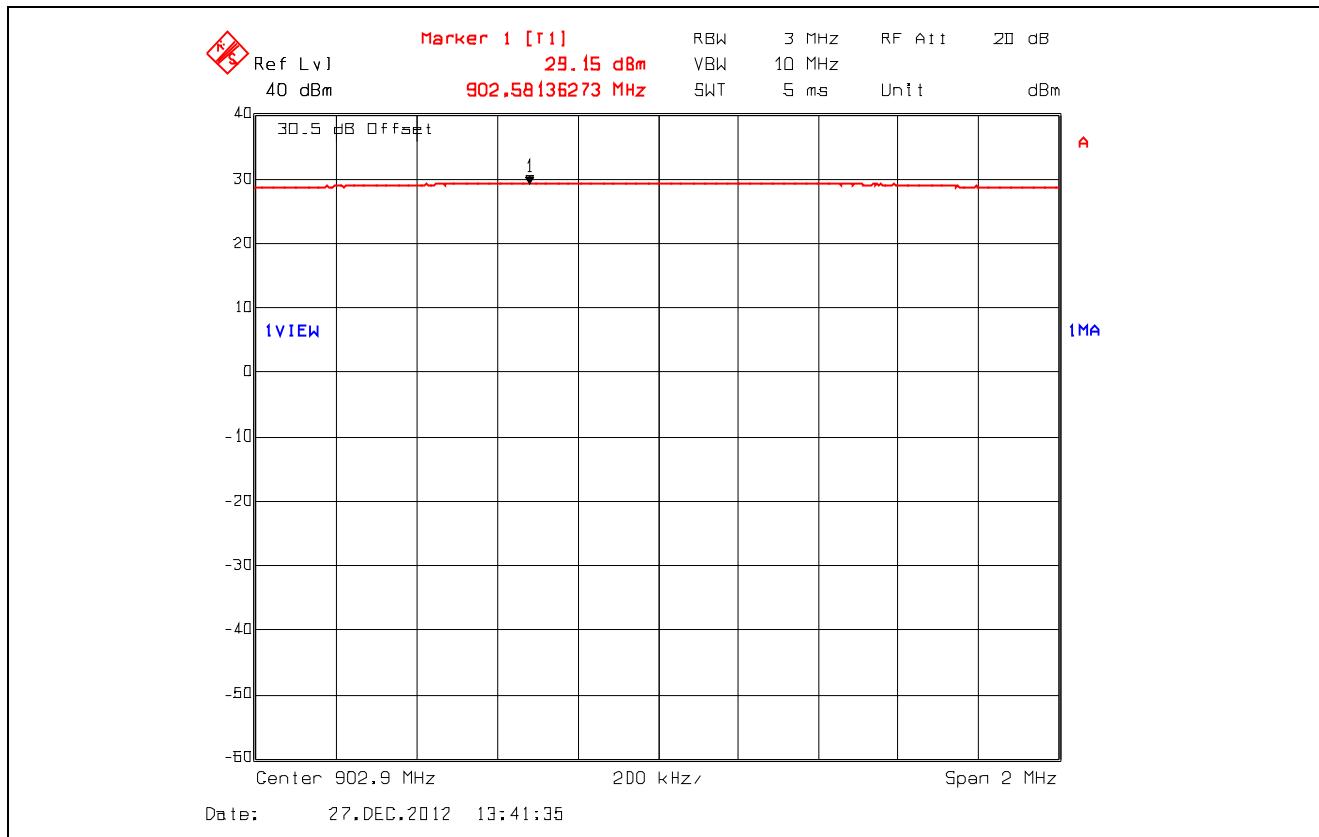

**Plot 5.2.4.5.** Peak Output Power, 915.2 MHz, GFSK 125 kbps, High Power Setting

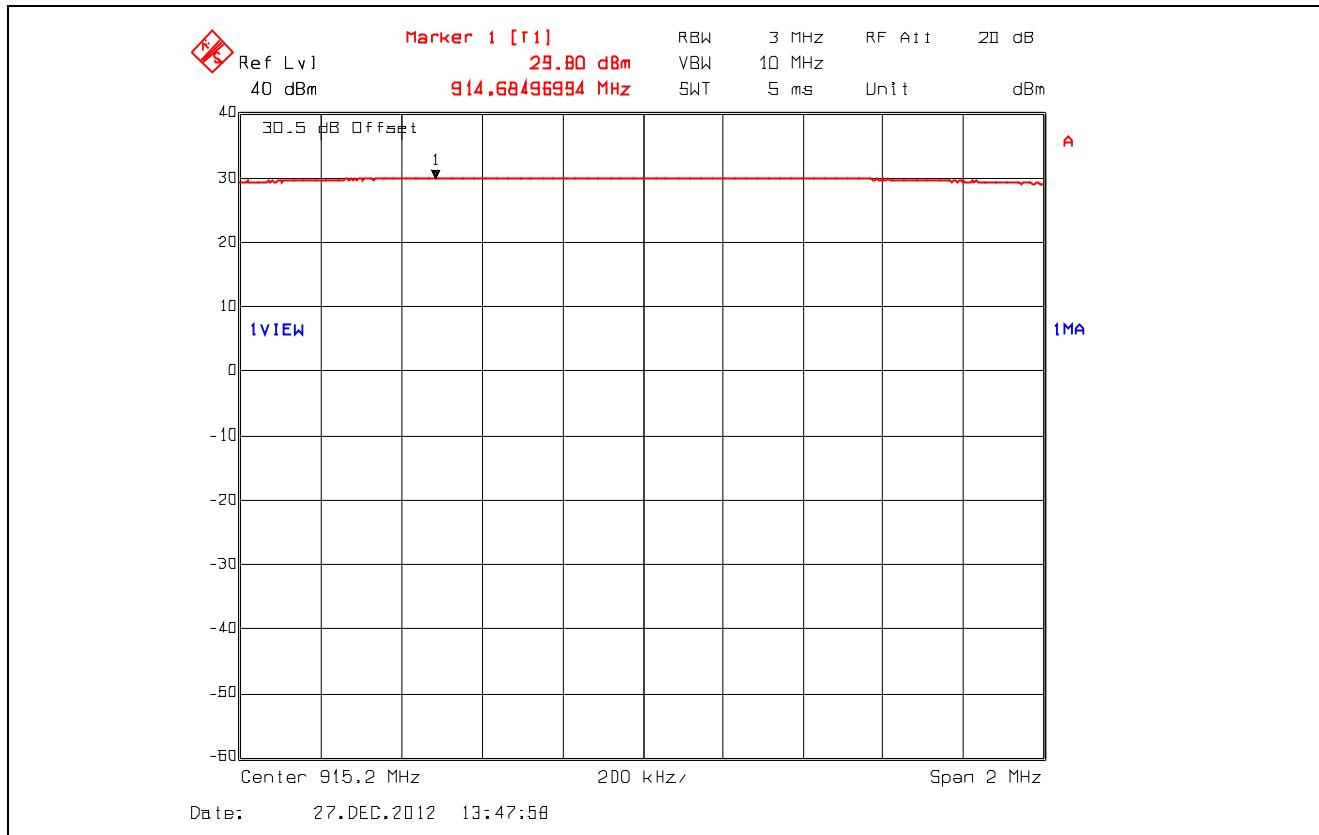

**Plot 5.2.4.6.** Peak Output Power, 927.1 MHz, GFSK 125 kbps, High Power Setting

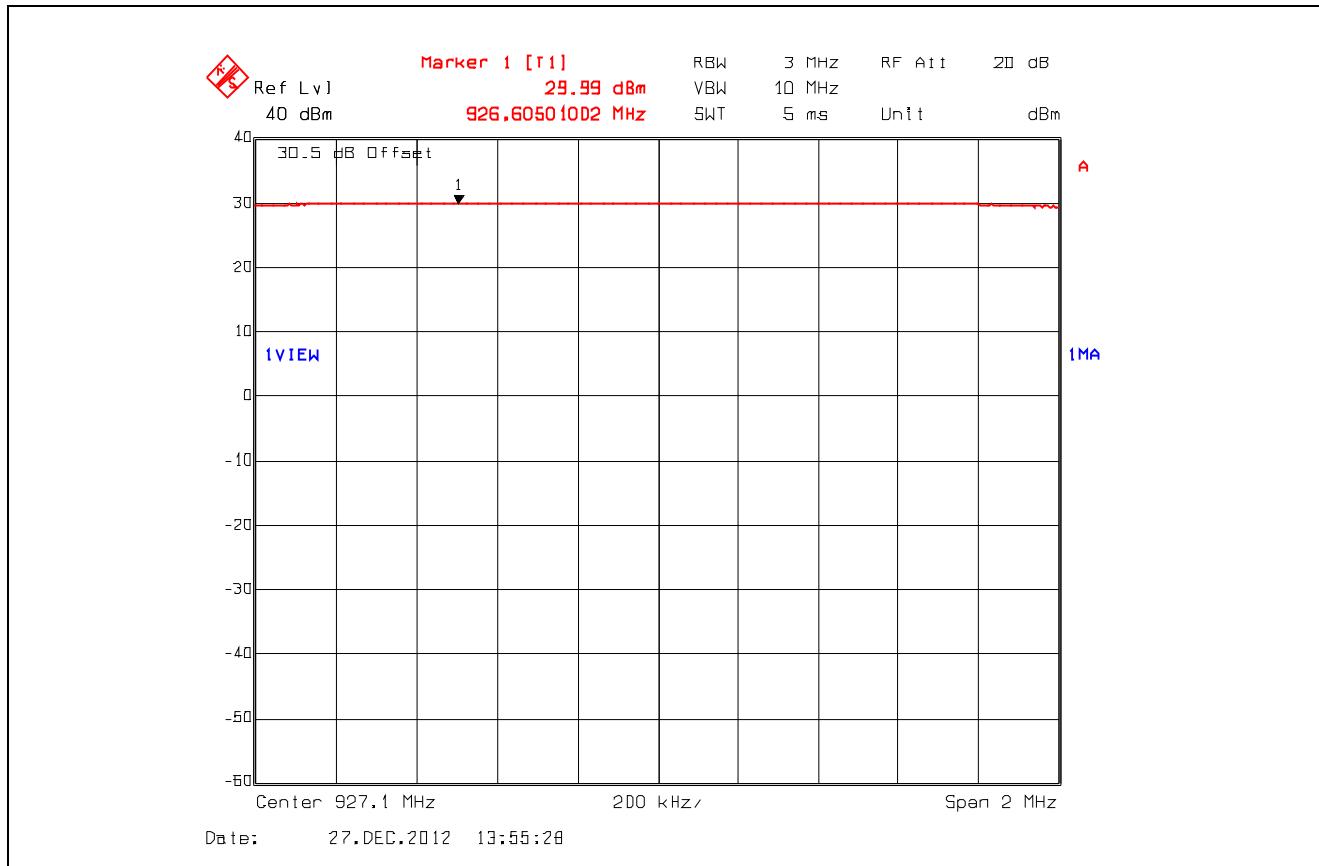

### 5.3. RF EXPOSURE REQUIREMENTS [§§ 15.247(b)(5), 1.1310 & 2.1091]

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation.

#### FCC 47 CFR § 1.1310:

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

#### 5.3.1. Method of Measurements

Refer to Sections 1.1310, 2.1091.

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

**Calculation Method of RF Safety Distance:**

$$S = \frac{P \cdot G}{4 \cdot \pi \cdot r^2} = \frac{EIRP}{4 \cdot \pi \cdot r^2}$$

Where:  
 P: power input to the antenna in mW  
 EIRP: Equivalent (effective) isotropic radiated power  
 S: power density mW/cm<sup>2</sup>  
 G: numeric gain of antenna relative to isotropic radiator  
 r: distance to centre of radiation in cm

**5.3.2. RF Evaluation**

<b>Evaluation of RF Exposure Compliance Requirements</b>	
<b>RF Exposure Requirements</b>	<b>Compliance with FCC Rules</b>
Minimum calculated separation distance between antenna and persons required: <b>23 cm (see note)</b>	Manufacturer' instruction for separation distance between antenna and persons required: <b>30 cm.</b>
Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement.	Antenna installation and device operating instructions shall be provided to installers to maintain and ensure compliance with RF exposure requirements.
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits.	Refer to User's Manual for RF Exposure Information.
Any other RF exposure related issues that may affect MPE compliance	None.

NOTE: The minimum separation distance between the antenna and bodies of users are calculated using the following formula:

RF Exposure Distance Limits

$$r = \sqrt{\frac{P \cdot G}{4 \cdot \pi \cdot S}} = \sqrt{\frac{EIRP}{4 \cdot \pi \cdot S}}$$

$$S = 902.9/1500 \text{ mW/cm}^2 = 0.602 \text{ mW/cm}^2$$

$$\text{EIRP} = 36 \text{ dBm} = 10^{36/10} \text{ mW} = 3981 \text{ mW (Worst Case)}$$

$$(\text{Minimum Safe Distance, } r) = \sqrt{\frac{EIRP}{4 \cdot \pi \cdot S}} = \sqrt{\frac{3981}{4 \cdot \pi \cdot (0.602)}} \approx 23cm$$

## 5.4. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205]

### 5.4.1. Limit

§ 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### § 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
1.0495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(2)
13.36–13.41			

1 Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

2 Above 38.6

### § 15.209(a) Radiated Emission Limits; General Requirements

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: DIGI-073\_FCC C2PC

January 14, 2013

#### 5.4.2. Method of Measurements

ANSI C63.10-2009

#### 5.4.3. Test Arrangement

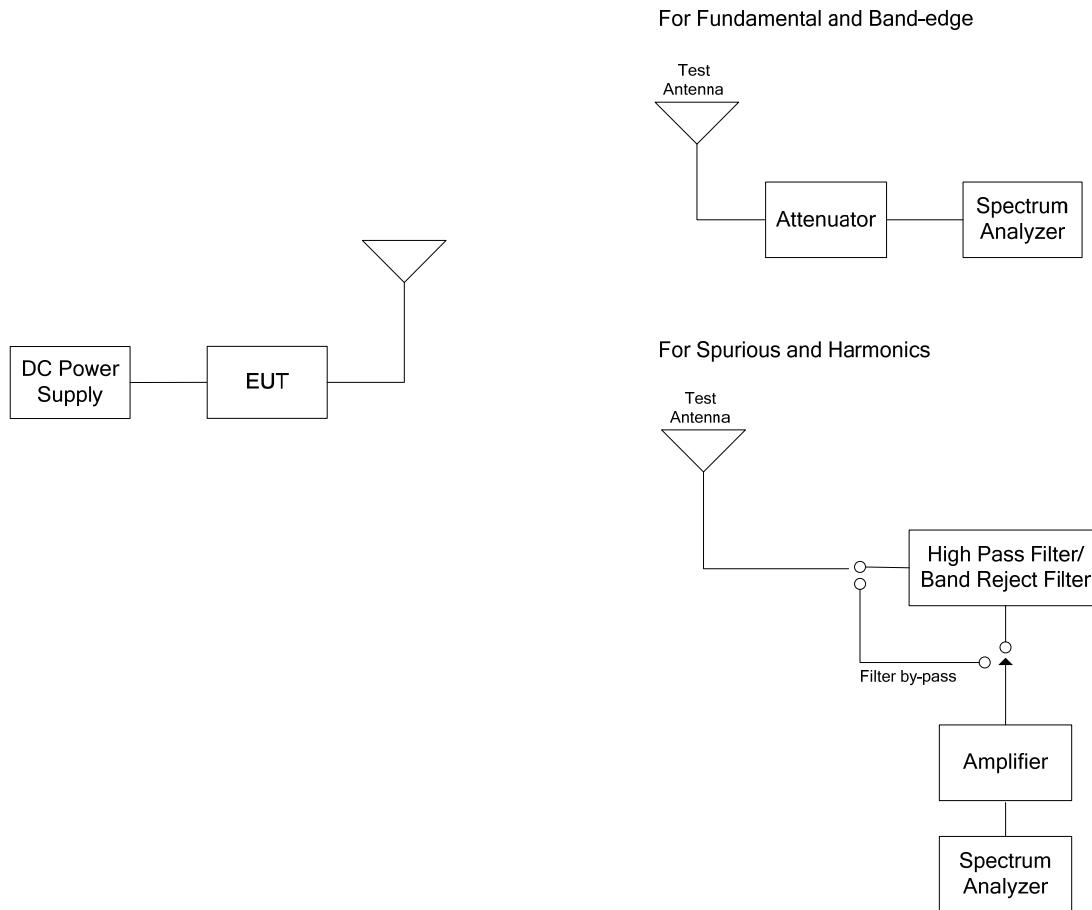

#### 5.4.4. Test Data

##### Remark(s):

- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT shall be tested in three orthogonal positions.
- Exploratory tests were performed to determine final test configuration, the following test results at the highest data rate (125kbps, GFSK modulation) represent the worst-case.

##### 5.4.4.1. EUT with 0 dBi Disc Patch Antenna, 0.5 dB Assembly Cable Loss at 1 W Output Power

###### 5.4.4.1.1. Spurious RF Radiated Emissions Test Results

Fundamental Frequency: 902.9 MHz							
Frequency Test Range: 30 MHz – 10 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
902.9	127.19	--	V	--	--	--	--
902.9	129.58	--	H	--	--	--	--
2708.7	44.26	34.35	V	54.0	109.6	-19.6	Pass*
2708.7	47.10	39.22	H	54.0	109.6	-14.8	Pass*
3611.6	47.36	41.25	V	54.0	109.6	-12.7	Pass*
3611.6	51.42	46.08	H	54.0	109.6	-7.9	Pass*
4514.5	51.41	45.71	V	54.0	109.6	-8.3	Pass*
4514.5	50.42	42.53	H	54.0	109.6	-11.5	Pass*
5417.4	56.24	50.82	V	54.0	109.6	-3.2	Pass*
5417.4	56.18	50.41	H	54.0	109.6	-3.6	Pass*

All other spurious emissions and harmonics are more than 20 dB below the applicable limit.

\* Emission within the restricted frequency bands.

Fundamental Frequency: 915.2 MHz Frequency Test Range: 30 MHz – 10 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
915.2	126.89	--	V	--	--	--	--
915.2	126.38	--	H	--	--	--	--
3660.8	50.36	42.87	V	54.00	106.9	-11.1	Pass*
3660.8	52.14	46.35	H	54.00	106.9	-7.6	Pass*
4576.0	52.57	48.81	V	54.00	106.9	-5.2	Pass*
4576.0	51.76	45.32	H	54.00	106.9	-8.7	Pass*
7321.6	59.53	52.22	V	54.00	106.9	-1.8	Pass*
7321.6	57.00	48.74	H	54.00	106.9	-5.3	Pass*

All other spurious emissions and harmonics are more than 20 dB below the applicable limit.

\* Emission within the restricted frequency bands.


Fundamental Frequency: 927.1 MHz Frequency Test Range: 30 MHz – 10 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
927.1	126.74	--	V	--	--	--	--
927.1	128.35	--	H	--	--	--	--
2781.3	45.32	36.36	V	54.0	108.4	-17.4	Pass*
3708.4	48.21	38.88	V	54.0	108.4	-15.1	Pass*
3708.4	48.52	39.53	H	54.0	108.4	-14.5	Pass*
4635.5	55.00	49.98	V	54.0	108.4	-4.0	Pass*
4635.5	53.48	48.14	H	54.0	108.4	-5.9	Pass*
7416.8	58.86	51.25	V	54.0	108.4	-2.7	Pass*
7416.8	57.72	50.69	H	54.0	108.4	-3.3	Pass*

All other spurious emissions and harmonics are more than 20 dB below the applicable limit.


\* Emission within the restricted frequency bands.

#### 5.4.4.1.2. Band-Edge RF Radiated Emissions Test Results


Plot 5.4.4.1.2.1. Radiated Band-Edge, Low End of Frequency Band, Single Frequency Mode, High Power, Horizontal

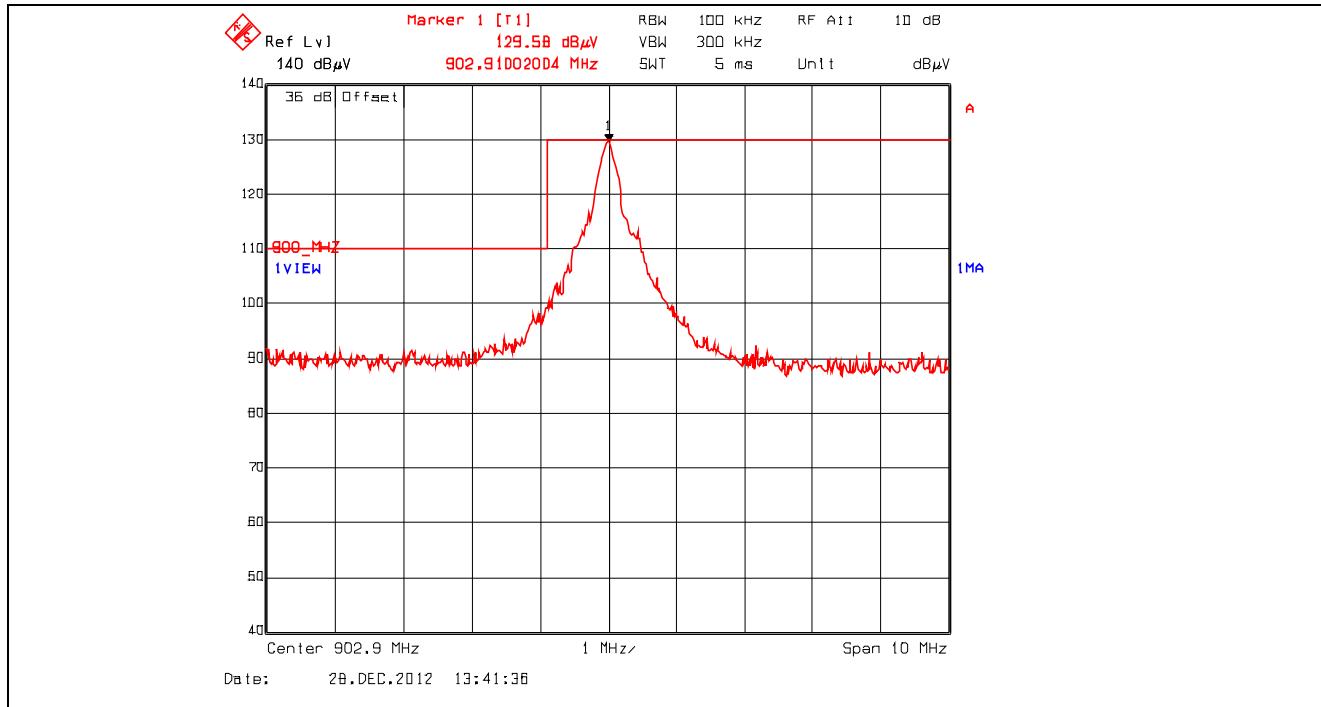


Plot 5.4.4.1.2.2. Radiated Band-Edge, Low End of Frequency Band, Pseudorandom Hopping Mode, High Power, Horizontal

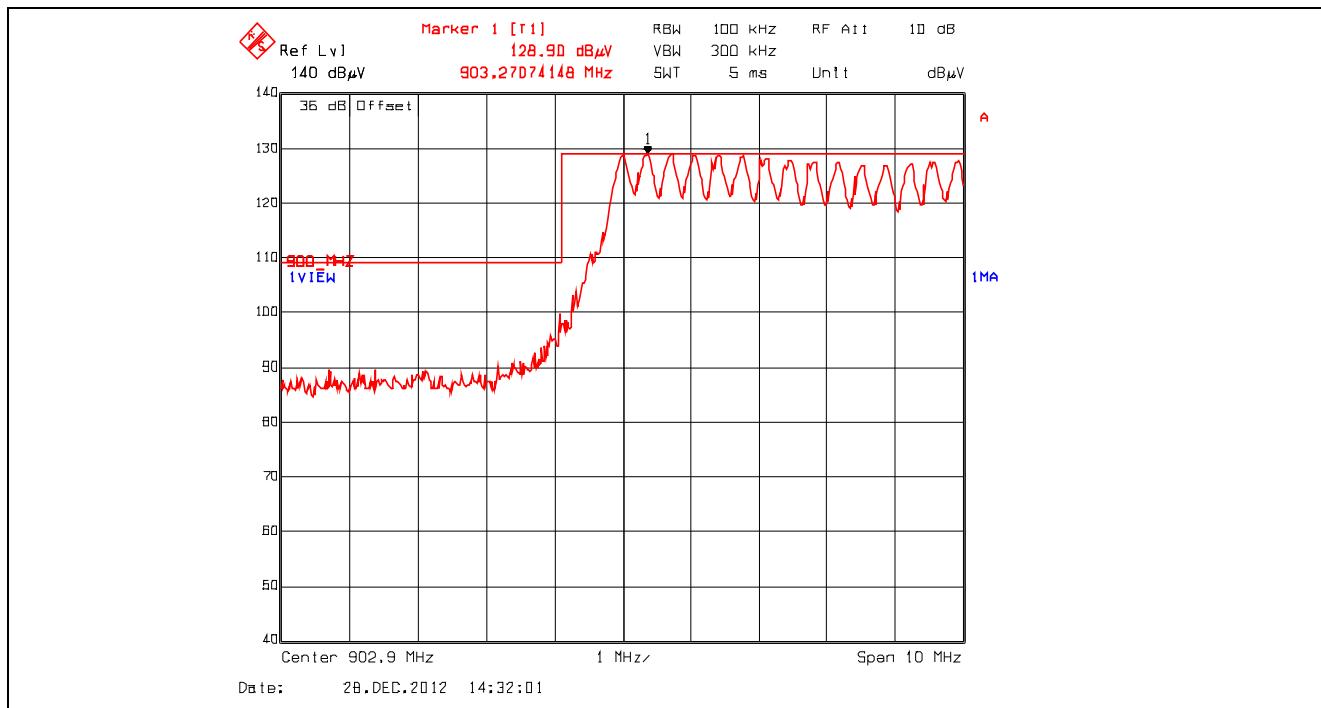


Plot 5.4.4.1.2.3. Radiated Band-Edge, Low End of Frequency Band, Single Frequency Mode, High Power, Vertical

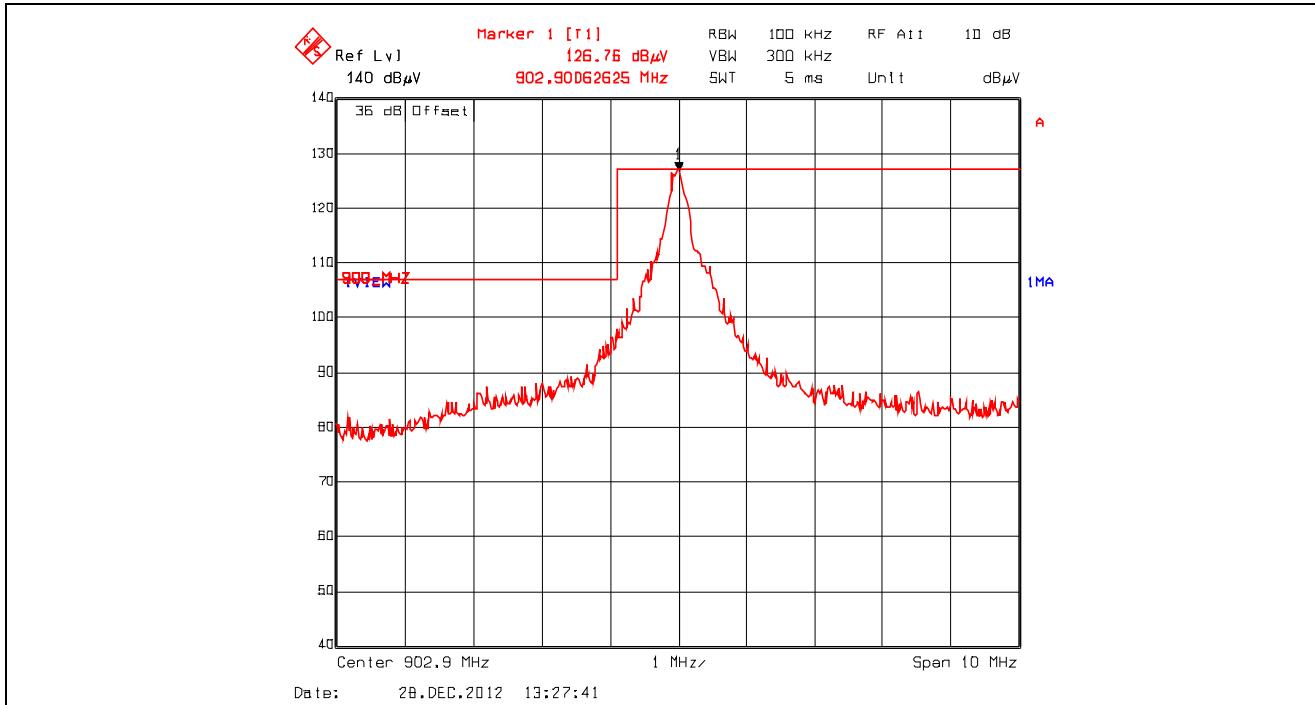


Plot 5.4.4.1.2.4. Radiated Band-Edge , Low End of Frequency Band, Pseudorandom Hopping Mode, High Power, Vertical

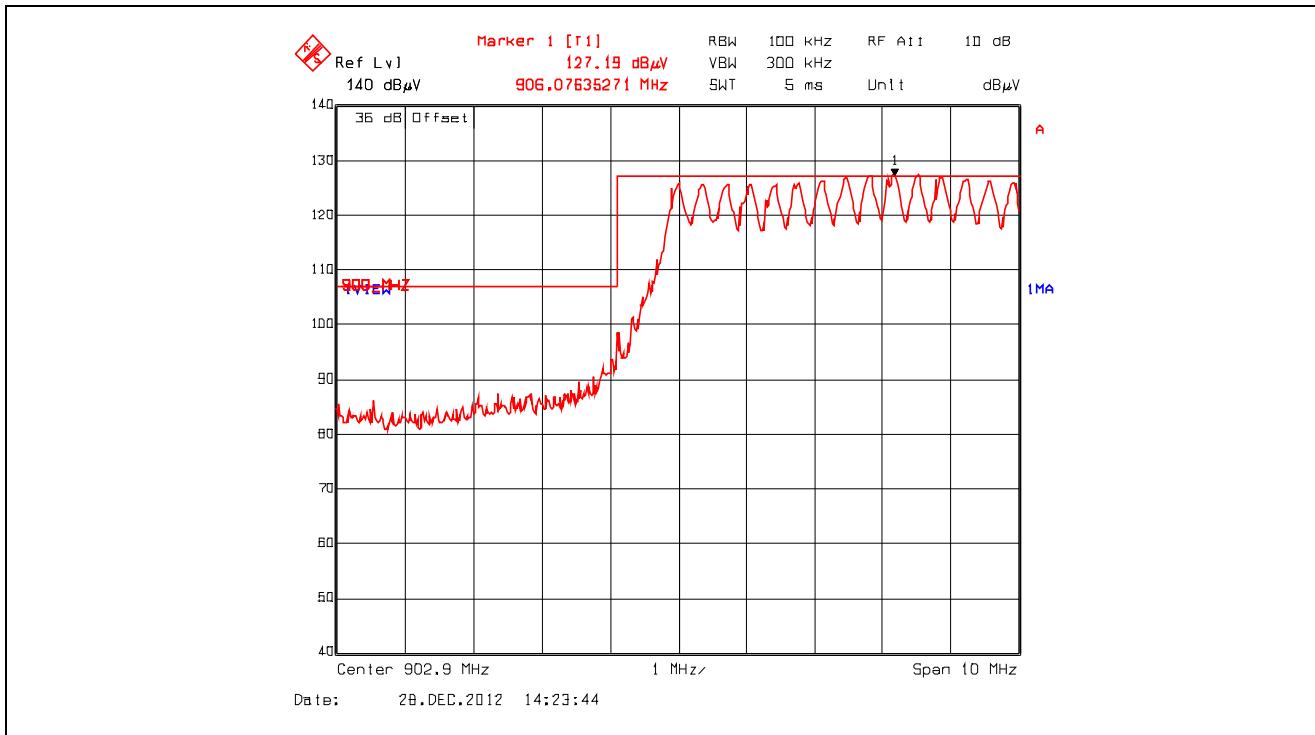


**Plot 5.4.4.1.2.5.** Radiated Band-Edge, High End of Frequency Band, Single Frequency Mode, High Power, Horizontal

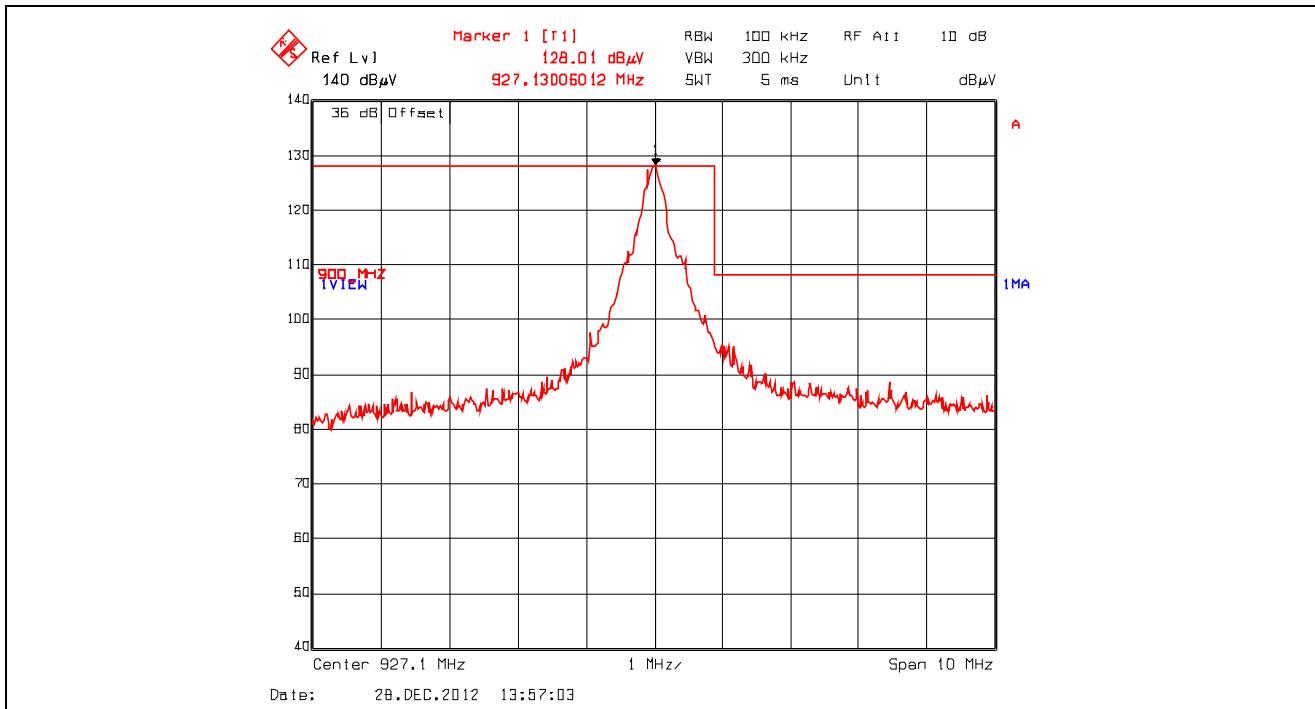


**Plot 5.4.4.1.2.6.** Radiated Band-Edge, High End of Frequency Band, Pseudorandom Hopping Mode, High Power, Horizontal

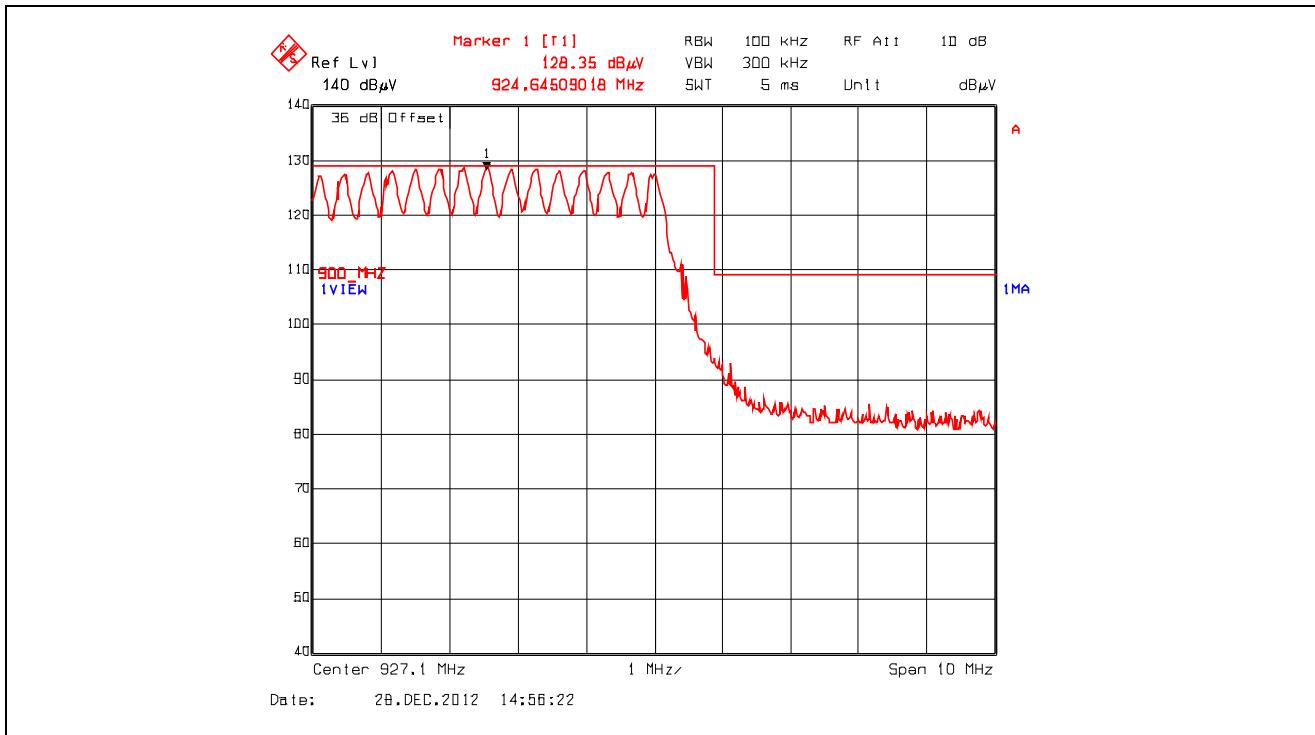

**Plot 5.4.4.1.2.7.** Radiated Band-Edge, High End of Frequency Band, Single Frequency Mode, High Power, Vertical

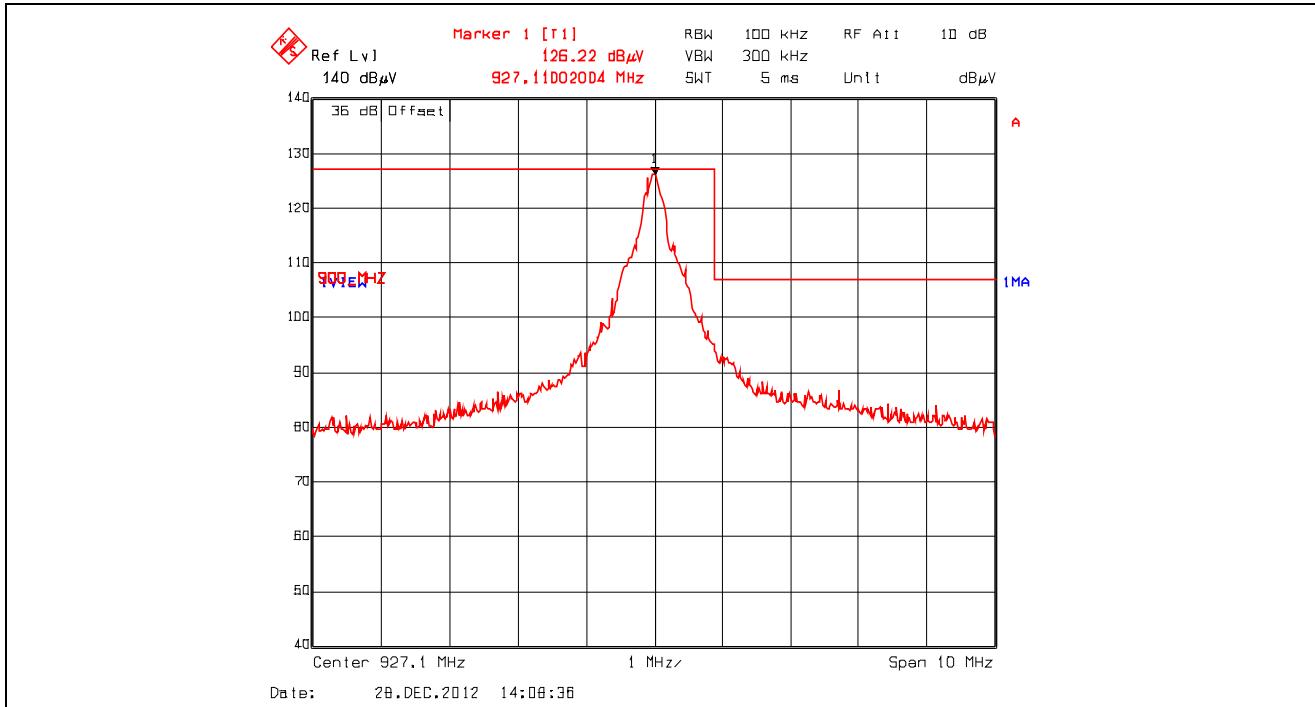

**Plot 5.4.4.1.2.8.** Radiated Band-Edge, High End of Frequency Band, Pseudorandom Hopping Mode, High Power, Vertical

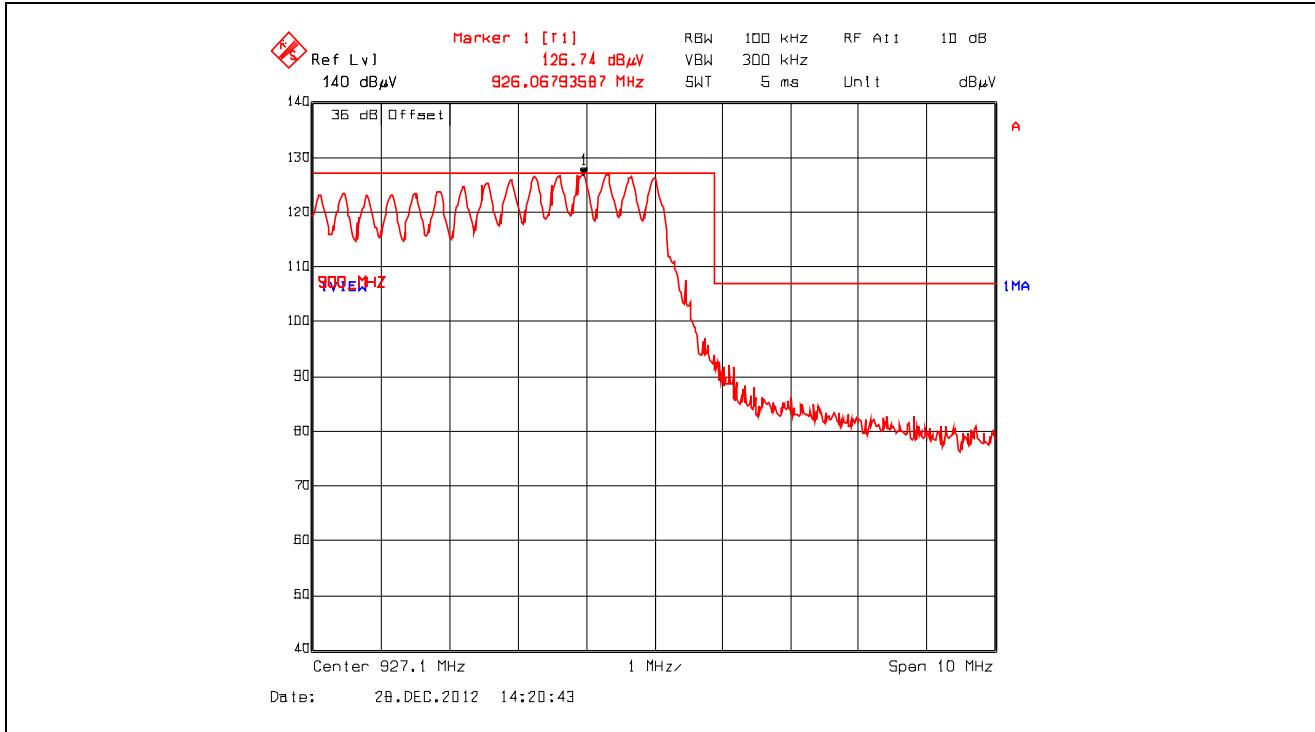

## EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20Hz-40 GHz	02 Nov 2013
Attenuator	Pasternack	7024-20	-	DC-26.5 GHz	Cal on use
Attenuator	Pasternack	7024-10	-	DC-26.5 GHz	Cal on use
DC Block	Hewlett Packard	11742A	12460	0.045-26.5 GHz	Cal on use
DC Power Supply	Tenma	72-7295	490300270	1 – 40 Vdc	Cal on use
High Pass Filter	K & L	11SH10-1500/T8000	2	Cut off 900 MHz	Cal. on use
Log Periodic Antenna	ETS Lundgren	93148	1101	200-2000 MHz	20 Mar 2013
Attenuator	Pasternack	PE7024-10	4	DC-26.5 GHz	Cal on use
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	19 Mar 2013
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	6 Aug 2013
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	16 Mar 2013
High Pass Filter	K & L	11SH10-1500/T8000	2	Cut off 900 MHz	Cal on use
Horn Antenna	Emco	3155	6570	1 – 18 GHz	2 Apr 2013
Biconi-Log Antenna	ETS Lundgren	3142B	1575	26 – 3000 MHz	4 May 2013
Band Reject Filter	Micro-Tronics	BRC50722	001	Cut off 902-928 MHz	Cal on use

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

### 7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

	Line Conducted Emission Measurement Uncertainty (150 kHz – 30 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 1.57$	$\pm 1.8$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 3.14$	$\pm 3.6$

### 7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 2.15$	$\pm 2.6$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 4.30$	$\pm 5.2$

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 2.39$	$\pm 2.6$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 4.78$	$\pm 5.2$

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 1.87$	Under consideration
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 3.75$	Under consideration