



REGULATORY COMPLIANCE TEST REPORT

**FCC Part 15 Subpart C 15.247 (DTS),
ISED RSS-247 Issue 2**

Report No.: DIGI93-U4 Rev A

Company: Digi International

Model Name: XBee-PRO S2C

REGULATORY COMPLIANCE TEST REPORT

Company Name: Digi International

Model Name: XBee-PRO S2C

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS) & IC RSS-247 Issue 2

Test Report Serial No.: DIGI93-U4 Rev A

This report supersedes: NONE

Applicant: Digi International
9350 Excelsior Blvd
Hopkins, Minnesota 55343
USA

Issue Date: 3rd December 2021

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	13
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Conducted RF	16
7.2. Radiated Emissions	18
8. MEASUREMENT AND PRESENTATION OF TEST DATA	20
9. TEST RESULTS	21
9.1. 6 dB & 99% Bandwidth	21
9.2. Conducted Output Power	23
9.3. Power Spectral Density	26
9.4. Emissions	28
9.4.1. <i>Conducted Emissions</i>	28
9.4.1.1. Conducted Spurious Emissions	28
9.4.1.2. Conducted Band-Edge Emissions	30
9.4.2. <i>Radiated Emissions</i>	33
9.4.2.1. TX Spurious & Restricted Band Emissions	33
9.4.2.2. TX Spurious Emissions 1-18 GHz	35
9.4.2.2.1. <i>Antenna A24-HASM-450</i>	35
9.4.2.2.2. <i>Antenna HG2415U</i>	39
9.4.2.2.3. <i>Antenna STKA-YA24-18SM</i>	42
9.4.2.2.4. <i>Antenna PAT2419</i>	47
9.4.2.3. Restricted Edge & Band-Edge Emissions	54
9.4.2.3.1. <i>Antenna STKA-YA24-18SM</i>	54
9.4.2.3.2. <i>Antenna HG2415U</i>	57
9.4.2.3.3. <i>Antenna A24-HASM-450</i>	60
9.4.2.3.4. <i>Antenna PAT2419</i>	63
A. APPENDIX - GRAPHICAL IMAGES	66
A.1. 6 dB & 99% Bandwidth	67
A.2. Power Spectral Density	71
A.3. Emissions	79
A.3.1. <i>Conducted Emissions</i>	79
A.3.1.1. Conducted Spurious Emissions	79
A.3.1.2. Conducted Band-Edge Emissions	83

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 24th day of February 2020.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.01
Valid to February 28, 2022
Revised November 16, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.



1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI			
Europe	European Commission	NB	EU MRA 2	A-0012 NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	16 November 2021	Draft for client comment
Draft 2	30 November 2021	Fixed channel typo in Radiated Spurious Emissions Plot. Added Hardware/Software/Firmware version lines to section 5.1.
Rev A	3 rd December 2021	Initial release

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Digi International 9350 Excelsior Blvd Hopkins Minnesota 55343 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: PS2C5	Telephone: +1 925 462 0304
Equipment Type: 802.15.4 Control (ZigBee) and Point to Point	Fax: +1 925 462 0306
S/N's: 13-01, 02-06	
Test Date(s): 10 th November 2021, 3 rd December 2021	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247, ISED RSS-247 Issue 2	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.



4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01, D02, D03	D01 Oct 2013, D02 Oct 2011, D03 Oct 2020	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band. 662911 D01 Multiple Transmitter Output v02r01, 662911 D02 MIMO with Cross Polarized Antenna v01, 662911 D03 MIMO Antenna Gain Measurement v01, OET 13TR1003 Directional Gain of 802 11 MIMO with CDD 04 05 2013
II	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
III	A2LA	5th Oct 2020	R105 - Requirement's When Making Reference to A2LA Accreditation Status
IV	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VII	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
IX	M 3003	EDITION 4 Oct 2019	Expression of Uncertainty and Confidence in Measurements
X	RSS-247 Issue 2	Feb 2017	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XI	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XII	FCC 47 CFR Part 2.1033	May 2021	FCC requirements and rules regarding photographs and test setup diagrams.
XIII	KDB 789033 D02 V02r01	Dec 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Digi International XBee-PRO S2C to FCC CFR 47 Part 15 Subpart C 15.247 and ISED RSS-247.
Applicant:	Digi International 9350 Excelsior Blvd Hopkins Minnesota 55343 USA
Manufacturer:	Digi International
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	DIGI93-U4
Date EUT received:	1 st November 2021
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 ISED RSS-247
Dates of test (from - to):	10 th November 2021, 03 rd December 2021
No of Units Tested:	2
Product Family Name:	XBee
Model(s):	PS2C5
Technology:	802.15.4 (Zigbee)
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	QPSK
Declared Nominal Output Power (dBm):	+18 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	3.3VDC – 0.13A
Operating Temperature Range:	-40°C - 85°C
ITU Emission Designator:	2M5G1D
Equipment Dimensions:	0.866 / 0.12 / 1.33 in
Weight:	0.00625 lbs
Hardware Version:	Prototype Hardware
Software Version:	Not Applicable
Firmware Version:	3014

5.2. Scope Of Test Program

Digi International PS2C5

The scope of the test program was to test the Digi International PS2C5, XBee-PRO S2C 802.15 ZigBee configuration in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

ISED RSS-247 Issue 2

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	XBee Module	Digi International	XBee-PRO S2C	13-01
EUT	XBee Module	Digi International	XBee-PRO S2C	02-06
Support	XBee Development Board	Digi International	DEV	--
Support	Laptop	Lenovo	ThinkPad	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Cable Loss (dB)*	Frequency Band (MHz)
external	Digi International	A24-HASM-450	Dipole	2.1	-	360	-	0.0	2400 - 2483.5
external	HyperLink Technologies, Inc	HG2415U	OMNI	15.0	-	360	-	5.0	2400 - 2483.5
external	ItElite	PAT2419	Panel	19.0	-	360	-	13.0	2400 - 2483.5
external	TECHTOO	STKA-YA24-18SM	Yagi	15.0	-	360	-	10.0	2400 - 2483.5

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

*NOTE: Cable losses are a mandatory requirement during installation per the manufacturer

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Screened	Conn Type	Data Type	Bit Rate
Pin Header	<3m	1	No	Pin header	Digital	N/A
RF		1	Yes	U.FL	Digital	0.250 Mbit/s

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)			
		Low	Mid	High	Additional
2400 - 2483.5 MHz					
QPSK	0.250	2,405.00	2,440.00	2,475.00	2,480.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. The manufacturer requires a minimum loss for each antenna upon installation as indicated in section 5.4 to ensure compliance.

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE


6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
6 dB & 99% Bandwidth	Complies	View Data
Conducted Output Power	Complies	View Data
Power Spectral Density	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) Restricted Edge & Band-Edge Emissions	Complies	View Data

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted RF

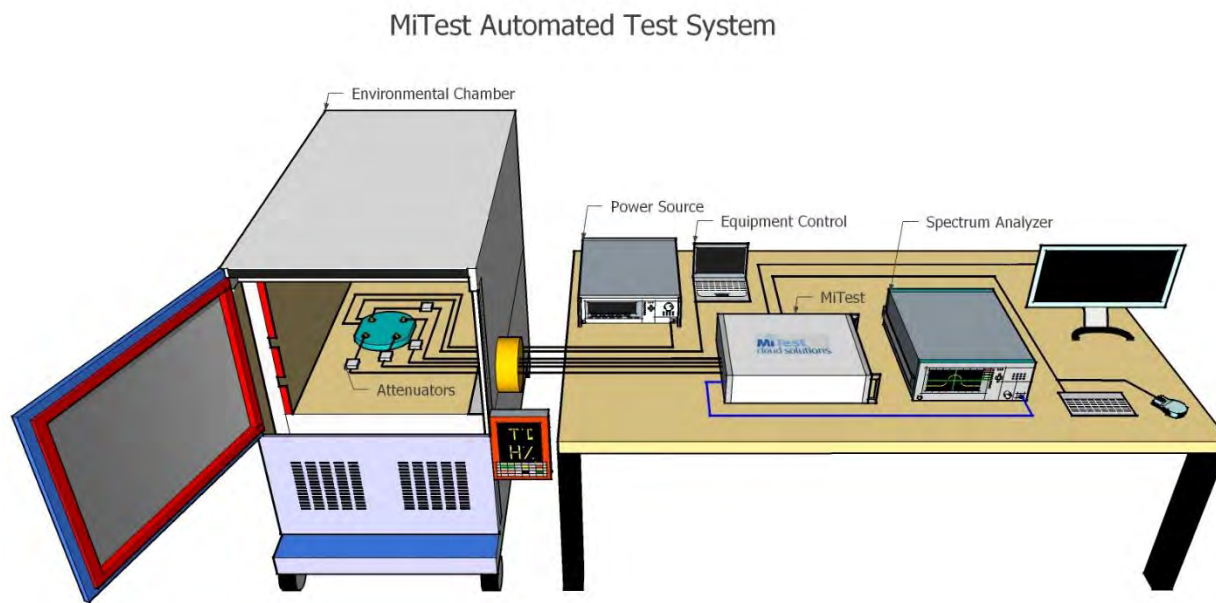


A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	30 Oct 2022
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
440	USB Wideband Power Sensor	Boonton	55006	9178	8 Oct 2022
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2023
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2021
515	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	515	7 Apr 2022
517	USB Wideband Power Sensor	Boonton	RTP5006	10510	8 Oct 2022
74	Environmental Chamber Chamber 3	Tenney	TTC	12808-1	Not Required
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	7 Apr 2022
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	7 Apr 2022
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	7 Apr 2022
RF#2 SMA#4	EUT to Mitest box port 4	Flexco	SMA Cable port4	None	7 Apr 2022
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	7 Apr 2022


7.2. Radiated Emissions

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

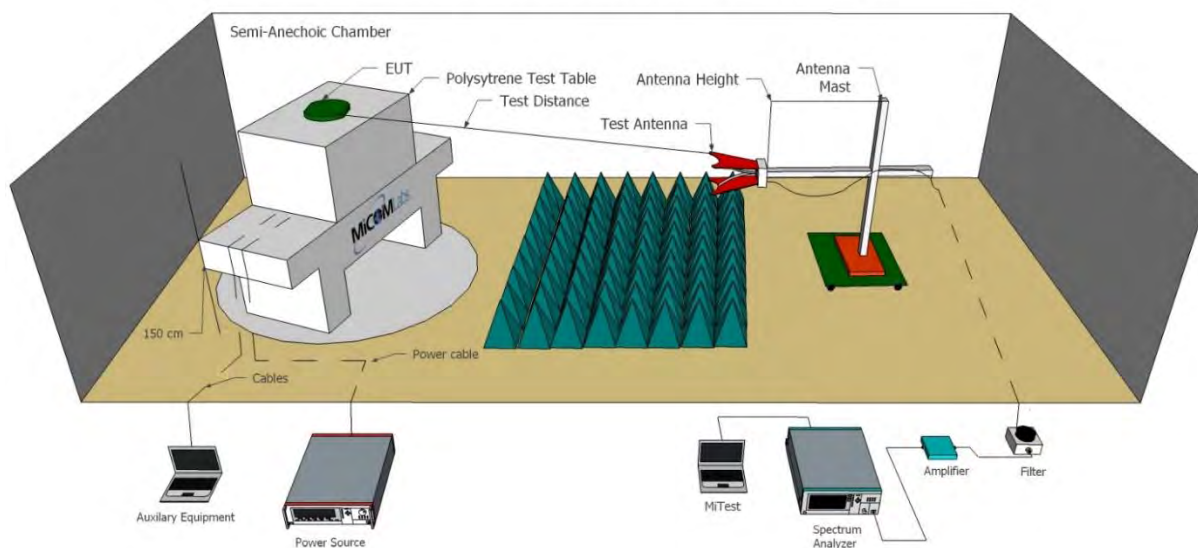

Radiated Emissions Below 1GHz Test Setup

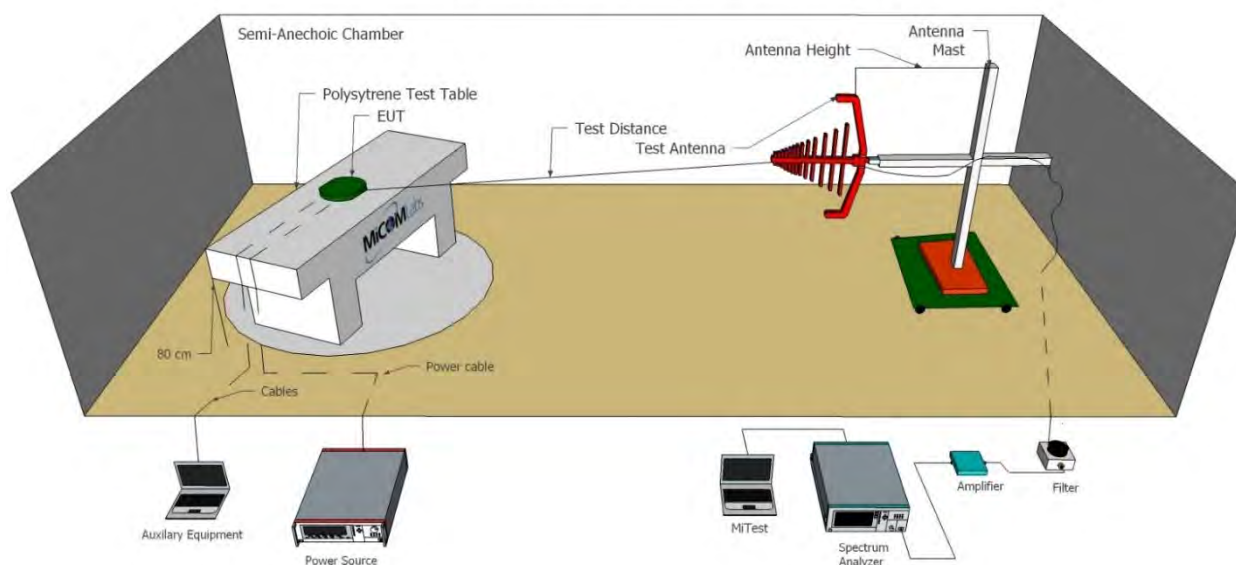

Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Dec 2021
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	6 Oct 2022
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2022
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2022
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2022
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	27 Oct 2022
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2022
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	6 Oct 2022
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	23 Jun 2022
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	23 Jun 2022
510	Barometer/Thermometer	Control Company	68000-49	170871375	20 Dec 2021
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	23 Jun 2022
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	24 Dec 2021

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document. Limits for 6 dB and 99% Bandwidth (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.			

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	QPSK	Duty Cycle (%):	99
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	QPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)	
	Port(s)				Highest	Lowest
MHz	a	b	c	d		
2405.0	1.575	--	--	--	1.575	1.575
2440.0	1.583	--	--	--	1.583	1.583
2475.0	1.583	--	--	--	1.583	1.583
2480.0	1.567	--	--	--	1.567	1.567

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)
	Port(s)				
MHz	a	b	c	d	
2405.0	2.415	--	--	--	2.415
2440.0	2.399	--	--	--	2.399
2475.0	2.412	--	--	--	2.412
2480.0	2.396	--	--	--	2.396

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (b) & (c)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement
 In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10^{\log_{10}} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5

MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

Equipment Configuration for Average Output Power

Variant:	QPSK	Duty Cycle (%):	99.0
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	2.10
Modulation:	QPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2405.0	16.95	--	--	--	16.95	30.00	-13.05	
2440.0	15.87	--	--	--	15.87	30.00	-14.13	
2475.0	15.58	--	--	--	15.58	30.00	-14.42	
2480.0	4.07 ¹	--	--	--	4.07	30.00	-25.93	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

NOTE¹: Power reduction was required due to restricted band-edge @ 2483.5 MHz. Power setting of 3 was used for all 2480 MHz measurements in this document

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (â) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log (1/x)$ dBm

$A = \text{Total Power Spectral Density } [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Equipment Configuration for Power Spectral Density - Average

Variant:	QPSK	Duty Cycle (%):	99.0
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	2.10
Modulation:	QPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2405.0	-6.049	---	---	---	-6.005	8.0	-14.0
2440.0	-5.992	---	---	---	-5.948	8.0	-13.9
2475.0	-5.623	---	---	---	-5.579	8.0	-13.6
2480.0	-18.747	---	---	---	-18.703	8.0	-26.7

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

9.4. Emissions

9.4.1. Conducted Emissions

9.4.1.1. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	QPSK	Duty Cycle (%):	99
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	QPSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2405.0	30.0 - 26000.0	-56.418	-39.02	--	--	--	--	--	--
2440.0	30.0 - 26000.0	-55.874	-40.42	--	--	--	--	--	--
2475.0	30.0 - 26000.0	-55.986	-41.60	--	--	--	--	--	--
2480.0	30.0 - 26000.0	-62.554	-52.26	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	QPSK	Duty Cycle (%):	99.0
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	QPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2405.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-34.54	-23.60	2401.80	-	-	-1.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	QPSK	Duty Cycle (%):	99.0
Data Rate:	250.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	QPSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	JK
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2475.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	-56.10	-25.52	2477.30	-	-	-6.200

Channel Frequency:	2480.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	-52.85	-36.88	2482.20	-	-	-1.300

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2. Radiated Emissions

9.4.2.1. TX Spurious & Restricted Band Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
Standard:	FCC CFR 47 Part 15 Subpart C 15.247 (DTS)	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Orientation testing of the EUT was performed and the EUT standing upright was determined to be the worst case for Spurious and Band Edge emissions with the integral antennas attached.

Limits for Restricted Bands

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Average Measurements were performed following ANSI C63.10 section 11.12.2.5.2 Trace averaging across on and off times of the EUT transmissions followed by a duty cycle correction.

RMS detector used, DCCF of $10\log(1/D)$ where D is the Duty Cycle.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \log(\text{level (mV/m)})$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.2. TX Spurious Emissions 1-18 GHz

9.4.2.2.1. Antenna A24-HASM-450


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

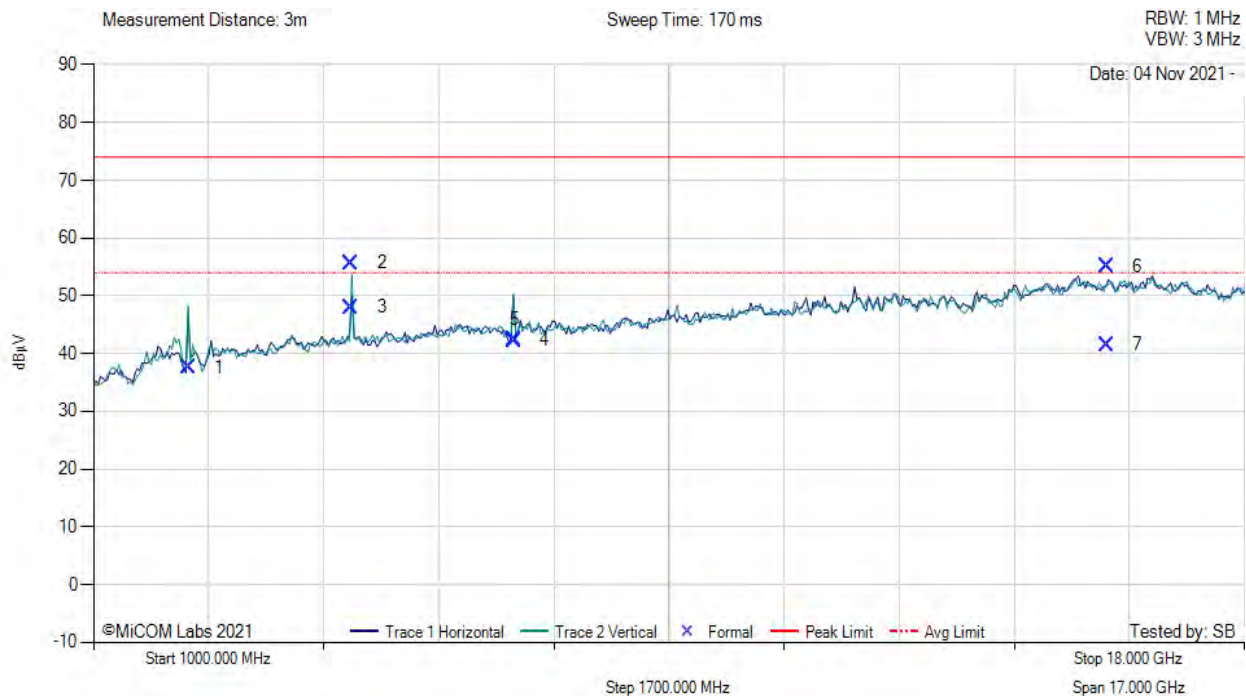

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2405.33	48.24	2.01	-12.60	37.65	Peak (NRB)	Vertical	150	0	--	--	Pass
2	4811.19	65.27	2.85	-12.43	55.69	Max Peak	Vertical	148	13	74.0	-18.3	Pass
3	4811.19	57.58	2.85	-12.43	48.00	Max Avg	Vertical	148	13	54.0	-6.0	Pass
4	7213.64	46.85	3.55	-8.01	42.39	Peak (NRB)	Vertical	150	0	--	--	Pass
5	7213.64	46.74	3.55	-8.01	42.28	Peak (NRB)	Vertical	150	0	--	--	Pass
6	15971.25	51.82	5.56	-2.24	55.14	Max Peak	Horizontal	148	202	74.0	-18.9	Pass
7	15971.25	38.21	5.56	-2.24	41.53	Max Avg	Horizontal	148	202	54.0	-12.5	Pass

Test Notes: Antenna A24-HASM-450


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2440.00 MHz, Power Setting: 0, Duty Cycle (%): 99

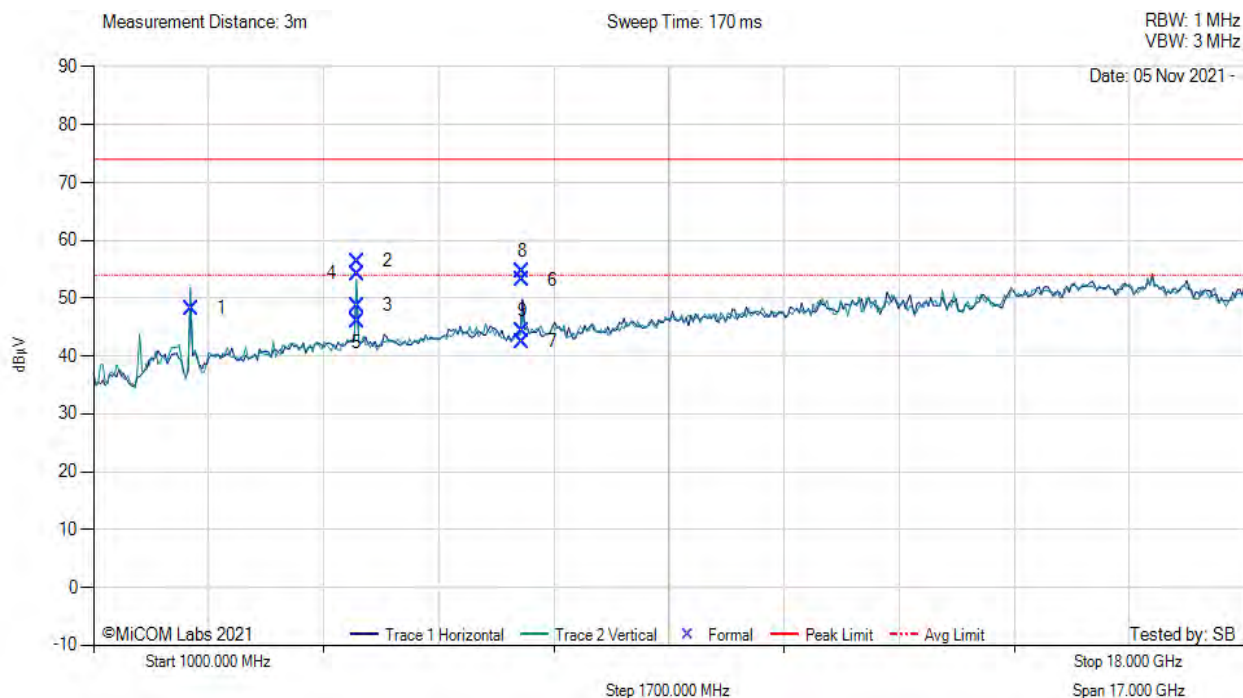

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2445.91	58.40	2.01	-12.18	48.23	Fundamental	Vertical	150	0	--	--	
2	4881.17	66.21	2.83	-12.62	56.42	Max Peak	Vertical	148	22	74.0	-17.6	Pass
3	4881.17	58.48	2.83	-12.62	48.69	Max Avg	Vertical	148	22	54.0	-5.3	Pass
4	4881.17	64.01	2.83	-12.62	54.22	Max Peak	Horizontal	148	296	74.0	-19.8	Pass
5	4881.17	55.70	2.83	-12.62	45.91	Max Avg	Horizontal	148	296	54.0	-8.1	Pass
6	7333.57	57.68	3.57	-8.09	53.16	Max Peak	Vertical	148	332	74.0	-20.8	Pass
7	7333.57	47.06	3.57	-8.09	42.54	Max Avg	Vertical	148	332	54.0	-11.5	Pass
8	7333.57	59.17	3.57	-8.09	54.65	Max Peak	Horizontal	148	330	74.0	-19.4	Pass
9	7333.57	48.85	3.57	-8.09	44.33	Max Avg	Horizontal	148	330	54.0	-9.7	Pass

Test Notes: Antenna - A24-HASM-450


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

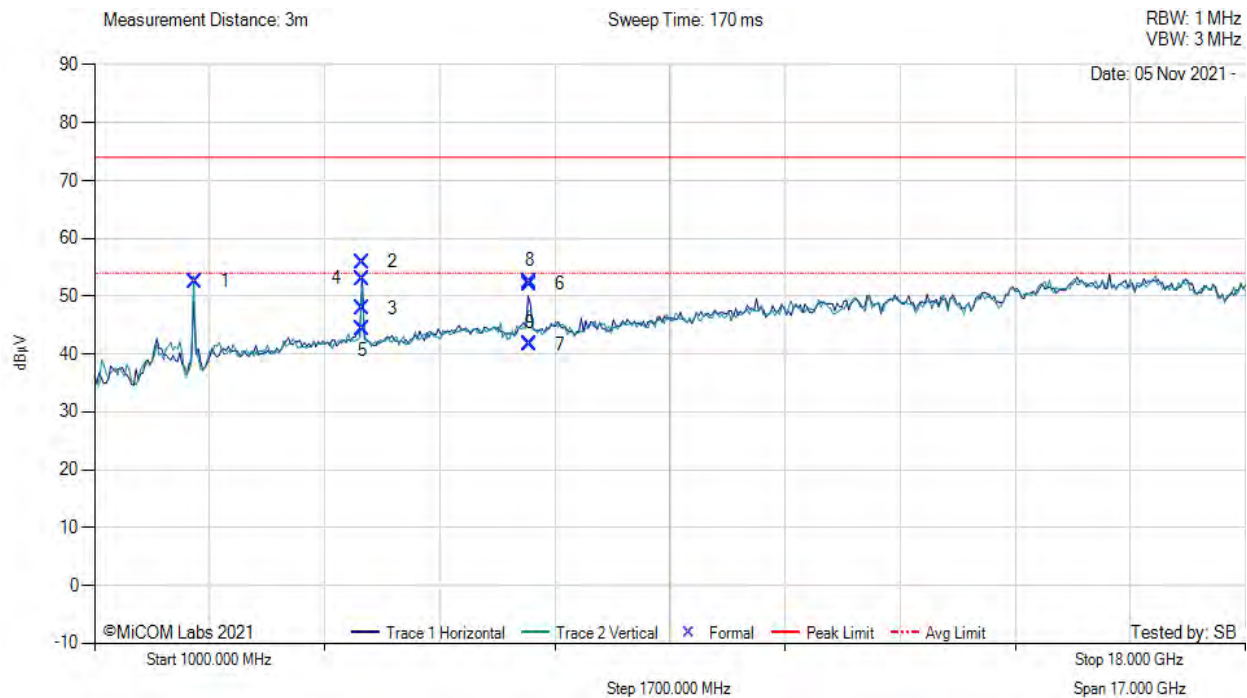

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2475.82	62.83	2.07	-12.35	52.55	Peak (NRB)	Vertical	150	0	--	--	Pass
2	4951.43	65.46	2.89	-12.44	55.91	Max Peak	Horizontal	148	35	74.0	-18.1	Pass
3	4951.43	57.39	2.89	-12.44	47.84	Max Avg	Horizontal	148	35	54.0	-6.2	Pass
4	4951.43	62.56	2.89	-12.44	53.01	Max Peak	Vertical	148	261	74.0	-21.0	Pass
5	4951.43	53.85	2.89	-12.44	44.30	Max Avg	Vertical	148	261	54.0	-9.7	Pass
6	7423.35	56.38	3.70	-7.99	52.09	Max Peak	Vertical	148	331	74.0	-21.9	Pass
7	7423.35	45.92	3.70	-7.99	41.63	Max Avg	Vertical	148	331	54.0	-12.4	Pass
8	7423.35	56.86	3.70	-7.99	52.57	Max Peak	Vertical	148	332	74.0	-21.4	Pass
9	7423.35	46.08	3.70	-7.99	41.79	Max Avg	Vertical	148	332	54.0	-12.2	Pass

Test Notes: Antenna - A24-HASM-450


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

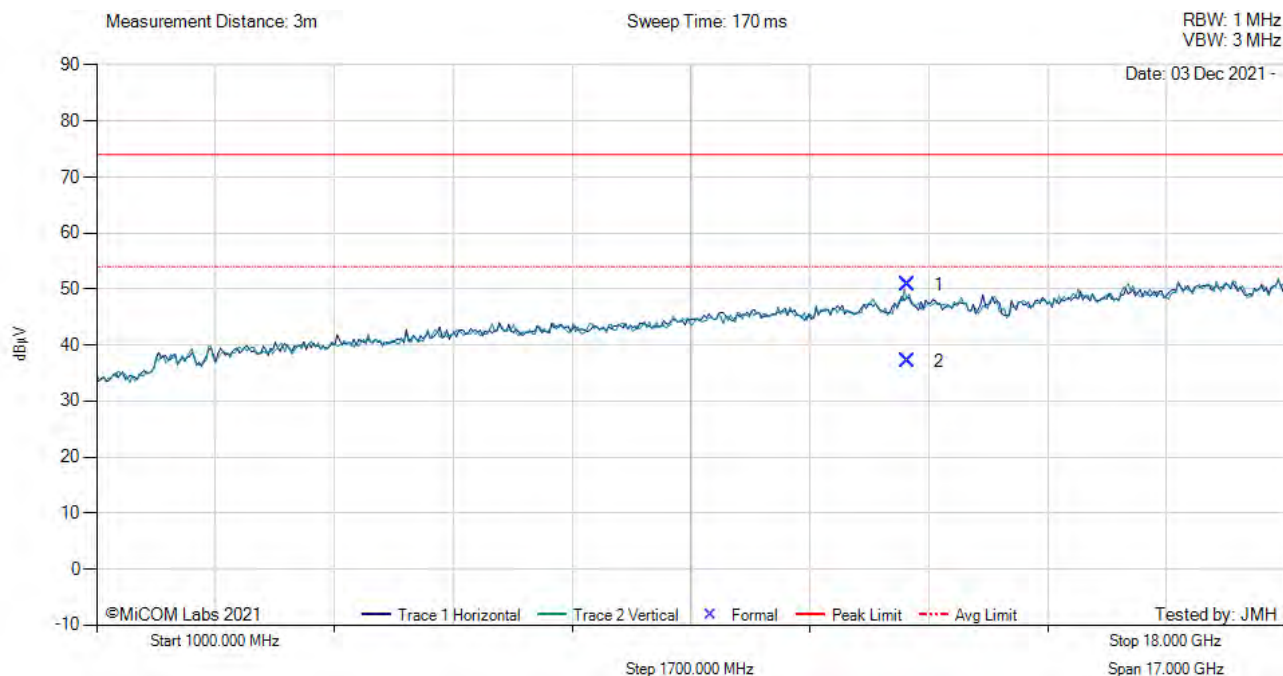

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	12598.72	51.82	5.30	-6.37	50.75	Max Peak	Vertical	108	301	74.0	-23.3	Pass
2	4951.43	38.14	5.30	-6.37	37.07	Max Avg	Vertical	108	301	54.0	-16.9	Pass

Test Notes: Antenna - A24-HASM-450

9.4.2.2.2. Antenna HG2415U


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

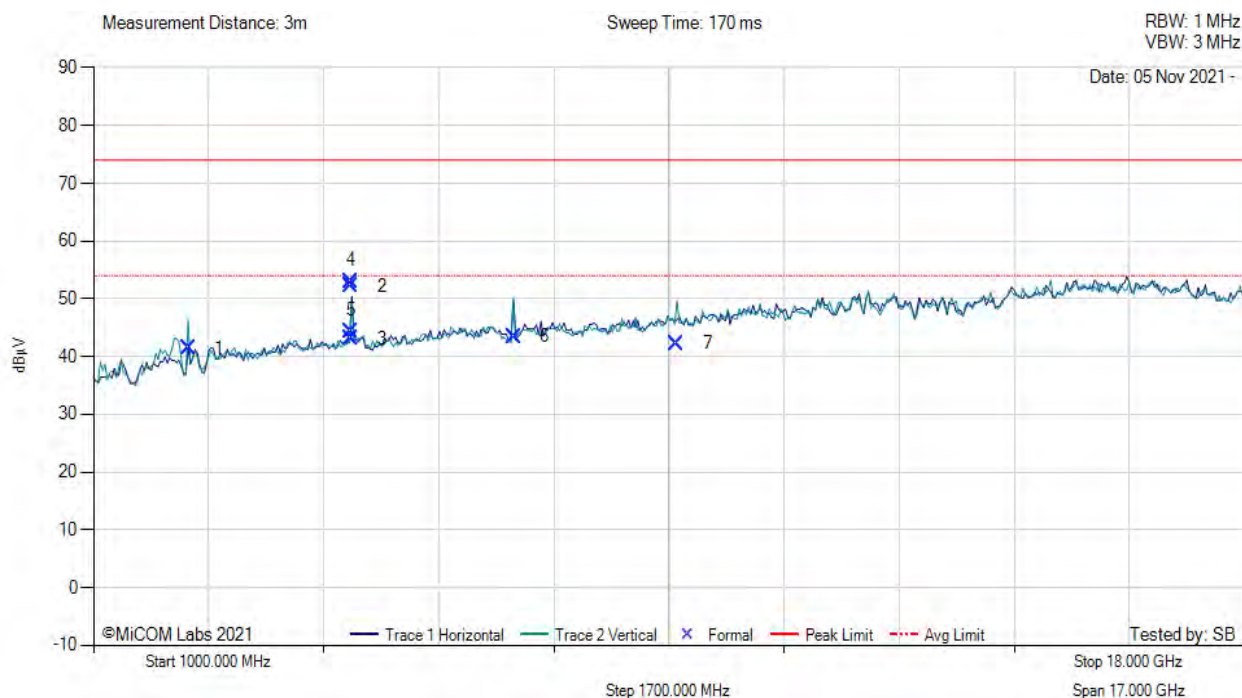

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2405.11	52.03	2.01	-12.61	41.43	Fundamental	Vertical	150	0	--	--	
2	4808.80	61.85	2.85	-12.43	52.27	Max Peak	Vertical	148	15	74.0	-21.7	Pass
3	4808.80	52.74	2.85	-12.43	43.16	Max Avg	Vertical	148	15	54.0	-10.8	Pass
4	4808.80	62.62	2.85	-12.43	53.04	Max Peak	Horizontal	148	258	74.0	-21.0	Pass
5	4808.80	54.01	2.85	-12.43	44.43	Max Avg	Horizontal	148	258	54.0	-9.6	Pass
6	7213.97	47.90	3.55	-8.01	43.44	Peak (NRB)	Vertical	150	0	--	--	Pass
7	9617.95	44.85	4.11	-6.69	42.27	Peak (NRB)	Vertical	150	0	--	--	Pass

Test Notes: Antenna - HG2415U


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2440.00 MHz, Power Setting: 18, Duty Cycle (%): 99

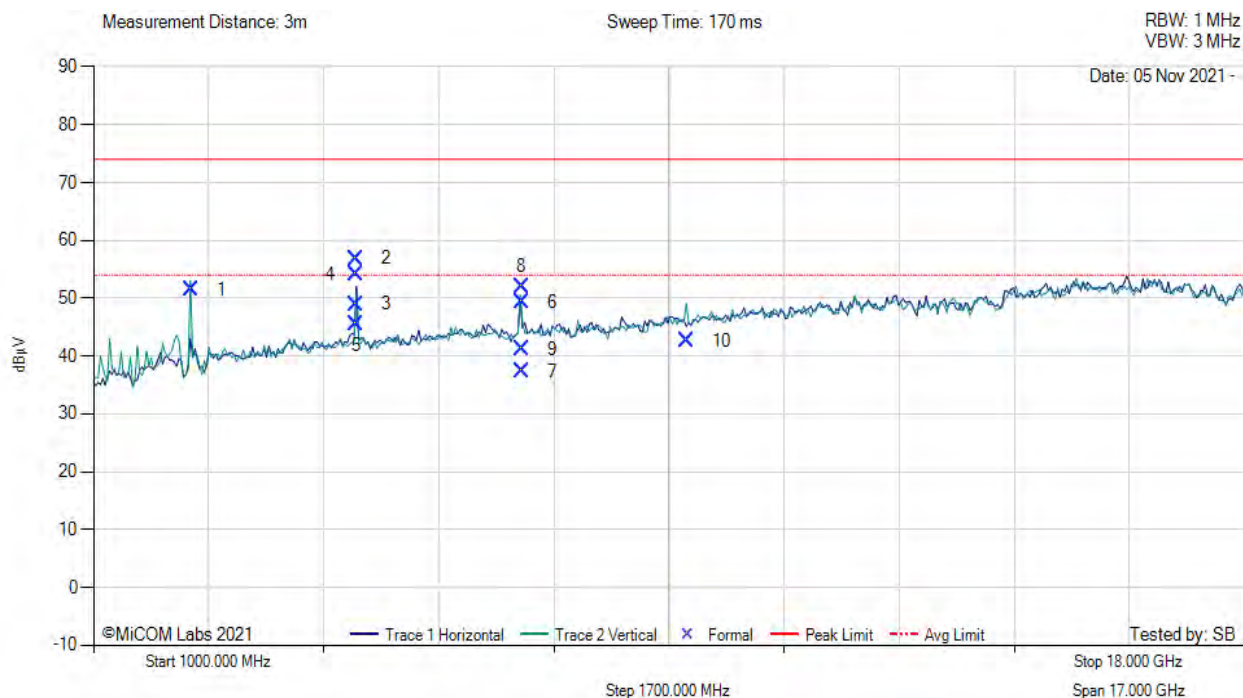

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2439.94	61.63	2.01	-12.21	51.43	Peak (NRB)	Vertical	150	0	--	--	Pass
2	4881.14	66.53	2.87	-12.55	56.85	Max Peak	Horizontal	148	302	74.0	-17.2	Pass
3	4881.14	58.62	2.87	-12.55	48.94	Max Avg	Horizontal	148	302	54.0	-5.1	Pass
4	4881.14	63.80	2.87	-12.55	54.12	Max Peak	Vertical	148	98	74.0	-19.9	Pass
5	4881.14	55.23	2.87	-12.55	45.55	Max Avg	Vertical	148	98	54.0	-8.5	Pass
6	7322.34	53.62	3.58	-7.87	49.33	Max Peak	Horizontal	148	147	74.0	-24.7	Pass
7	7322.34	41.67	3.58	-7.87	37.38	Max Avg	Horizontal	148	147	54.0	-16.6	Pass
8	7322.34	56.31	3.58	-7.87	52.02	Max Peak	Vertical	148	335	74.0	-22.0	Pass
9	7322.34	45.42	3.58	-7.87	41.13	Max Avg	Vertical	148	335	54.0	-12.9	Pass
10	9762.39	44.80	4.19	-6.31	42.68	Peak (NRB)	Vertical	150	28	--	--	Pass

Test Notes: Antenna - HG2415U


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

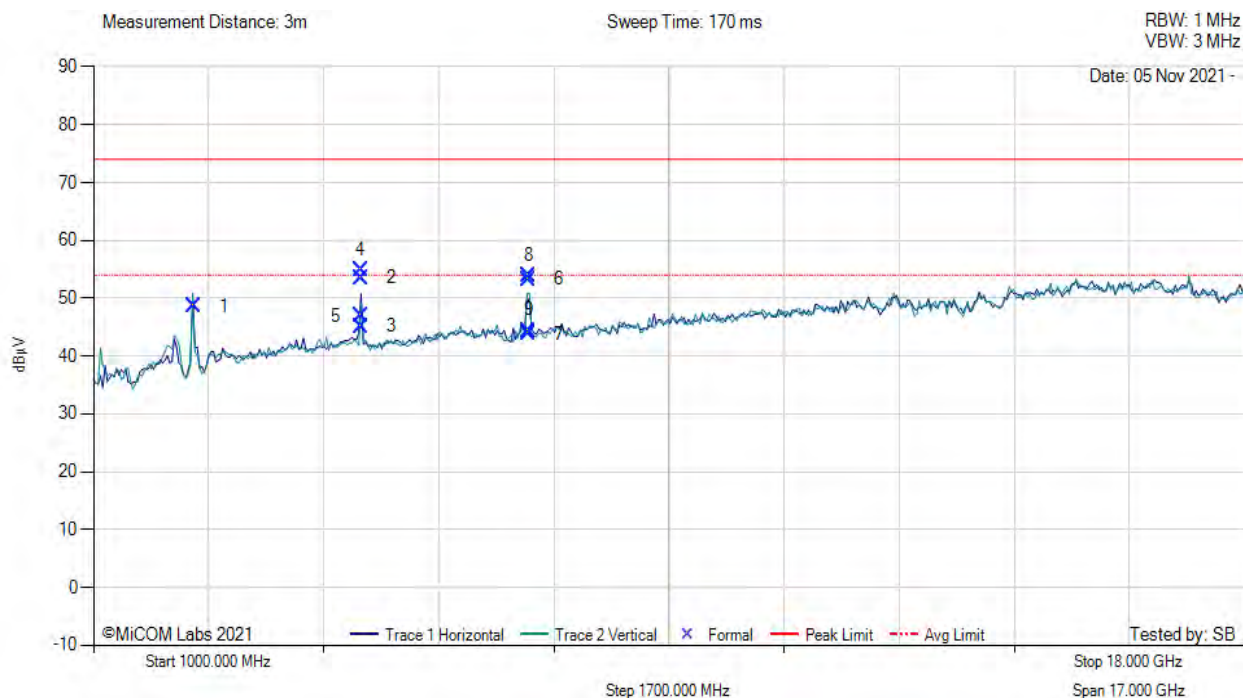

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2474.68	58.88	2.07	-12.36	48.59	Peak (NRB)	Vertical	150	0	--	--	Pass
2	4951.23	63.10	2.89	-12.44	53.55	Max Peak	Vertical	148	98	74.0	-20.5	Pass
3	4951.23	54.72	2.89	-12.44	45.17	Max Avg	Vertical	148	98	54.0	-8.8	Pass
4	4951.23	64.44	2.89	-12.44	54.89	Max Peak	Horizontal	148	308	74.0	-19.1	Pass
5	4951.23	56.51	2.89	-12.44	46.96	Max Avg	Horizontal	148	308	54.0	-7.0	Pass
6	7426.98	57.56	3.66	-7.93	53.29	Max Peak	Vertical	148	264	74.0	-20.7	Pass
7	7426.98	48.08	3.66	-7.93	43.81	Max Avg	Vertical	148	264	54.0	-10.2	Pass
8	7426.98	58.18	3.66	-7.93	53.91	Max Peak	Horizontal	148	330	74.0	-20.1	Pass
9	7426.98	48.71	3.66	-7.93	44.44	Max Avg	Horizontal	148	330	54.0	-9.6	Pass

Test Notes: Antenna - HG2415U


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

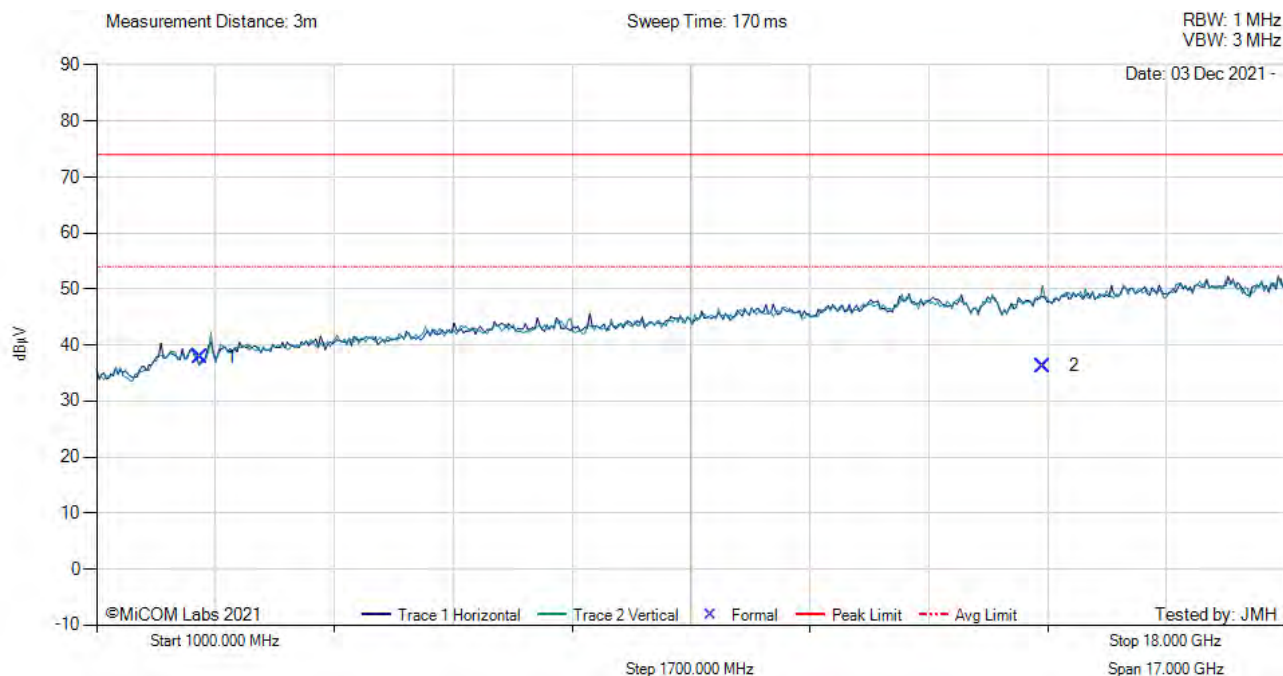

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2480.24	47.70	1.98	-11.88	37.80	Fundamental	Vertical	200	2	--	--	Pass
2	14529.61	36.86	5.49	-6.08	36.27	Max Avg	Vertical	124	85	54.0	-17.7	Pass

Test Notes: Antenna - HG2415U

9.4.2.2.3. Antenna STKA-YA24-18SM


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

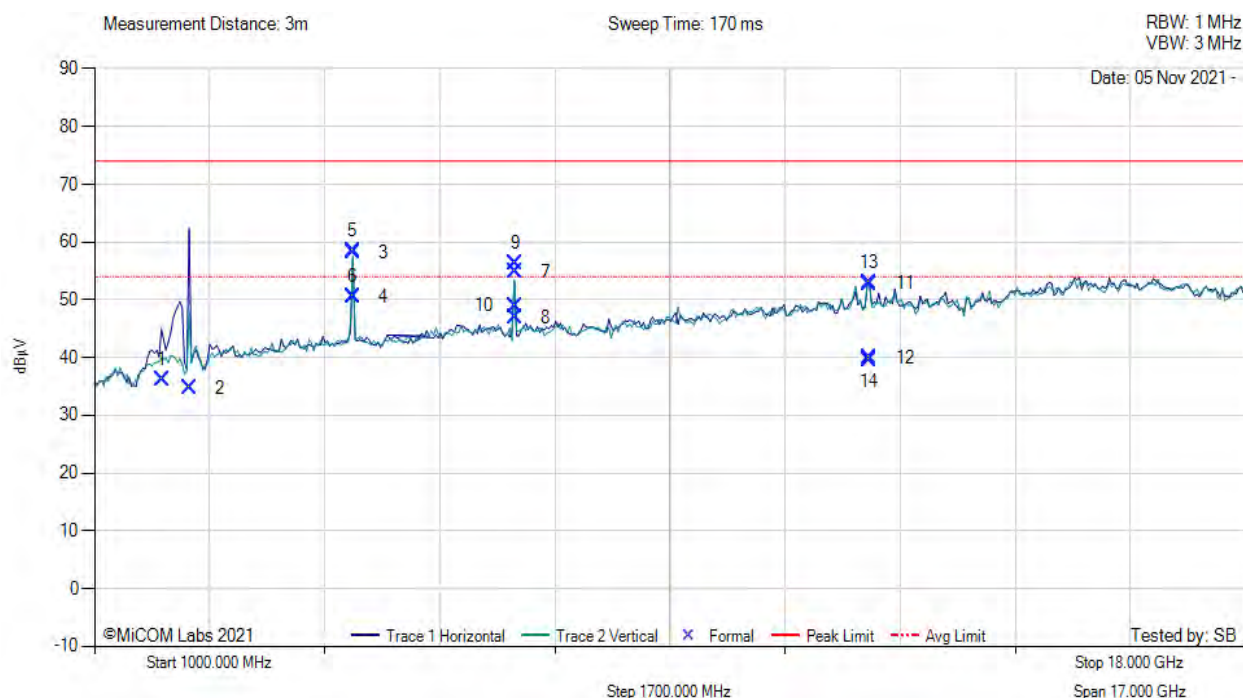

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1996.62	47.58	1.83	-13.22	36.19	Peak (NRB)	Horizontal	158	56	--	--	Pass
2	2404.58	45.30	2.01	-12.61	34.70	Fundamental	Horizontal	158	56	--	--	
3	4811.43	67.84	2.85	-12.43	58.26	Max Peak	Vertical	136	30	74.0	-15.7	Pass
4	4811.43	60.18	2.85	-12.43	50.60	Max Avg	Vertical	136	30	54.0	-3.4	Pass
5	4811.43	67.96	2.85	-12.43	58.38	Max Peak	Horizontal	98	214	74.0	-15.6	Pass
6	4811.43	60.05	2.85	-12.43	50.47	Max Avg	Horizontal	98	214	54.0	-3.5	Pass
7	7214.11	59.34	3.56	-8.02	54.88	Max Peak	Vertical	157	289	74.0	-19.1	Pass

8	7214.11	51.46	3.56	-8.02	47.00	Max Avg	Vertical	157	289	54.0	-7.0	Pass
9	7214.11	60.68	3.56	-8.02	56.22	Max Peak	Horizontal	136	334	74.0	-17.8	Pass
10	7214.11	53.45	3.56	-8.02	48.99	Max Avg	Horizontal	136	334	54.0	-5.0	Pass
11	12452.05	54.67	4.85	-6.71	52.81	Max Peak	Vertical	189	354	74.0	-21.2	Pass
12	12452.05	41.78	4.85	-6.71	39.92	Max Avg	Vertical	189	354	54.0	-14.1	Pass
13	12452.05	54.81	4.85	-6.71	52.95	Max Peak	Horizontal	129	310	74.0	-21.1	Pass
14	12452.05	41.39	4.85	-6.71	39.53	Max Avg	Horizontal	129	310	54.0	-14.5	Pass


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2440.00 MHz, Power Setting: 18, Duty Cycle (%): 99

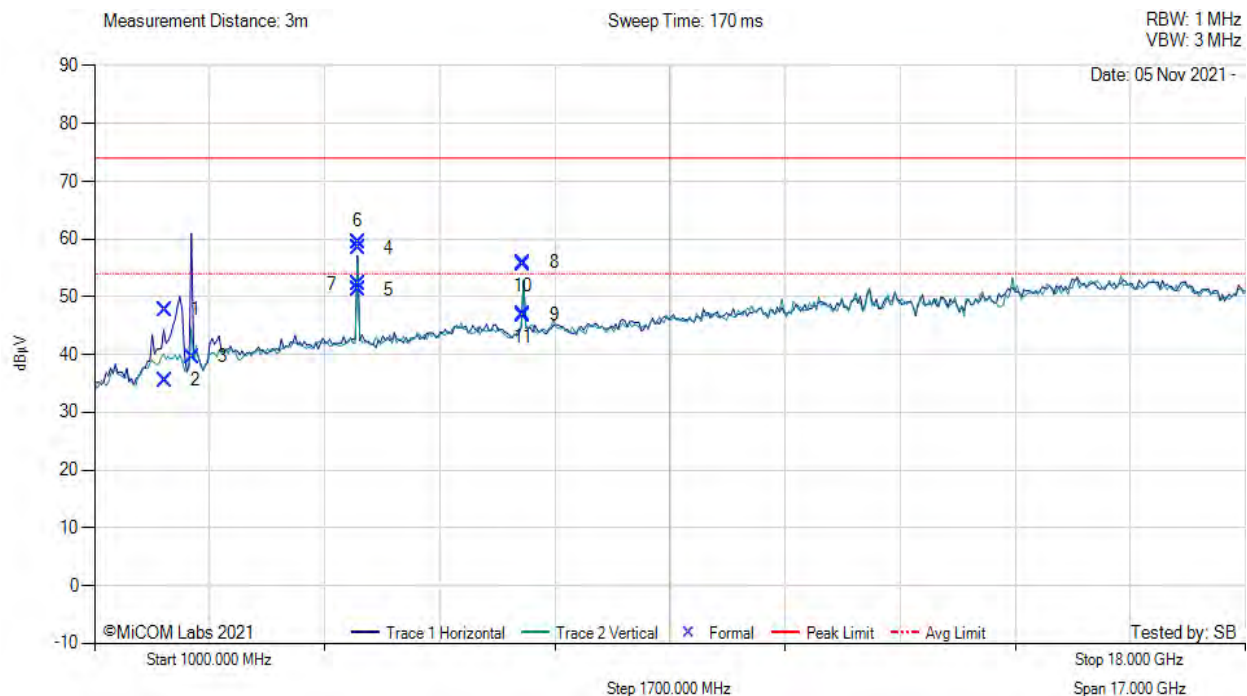

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2044.98	59.21	1.88	-13.30	47.79	Max Peak	Horizontal	115	78	74.0	-26.2	Pass
2	2044.98	46.94	1.88	-13.30	35.52	Max Avg	Horizontal	115	78	54.0	-18.5	Pass
3	2445.58	49.79	2.01	-12.18	39.62	Peak (NRB)	Vertical	100	0	--	--	Pass
4	4886.07	68.28	2.83	-12.61	58.50	Max Peak	Vertical	127	50	74.0	-15.5	Pass
5	4886.07	60.97	2.83	-12.61	51.19	Max Avg	Vertical	127	50	54.0	-2.8	Pass
6	4886.07	69.27	2.83	-12.61	59.49	Max Peak	Horizontal	103	217	74.0	-14.5	Pass
7	4886.07	62.04	2.83	-12.61	52.26	Max Avg	Horizontal	103	217	54.0	-1.7	Pass
8	7336.96	60.49	3.57	-8.16	55.90	Max Peak	Vertical	101	310	74.0	-18.1	Pass
9	7336.96	51.47	3.57	-8.16	46.88	Max Avg	Vertical	101	310	54.0	-7.1	Pass
10	7336.96	60.12	3.57	-8.16	55.53	Max Peak	Horizontal	135	226	74.0	-18.5	Pass
11	7336.96	51.25	3.57	-8.16	46.66	Max Avg	Horizontal	135	226	54.0	-7.3	Pass

Test Notes: Antenna - STKA-YA24-18SM


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

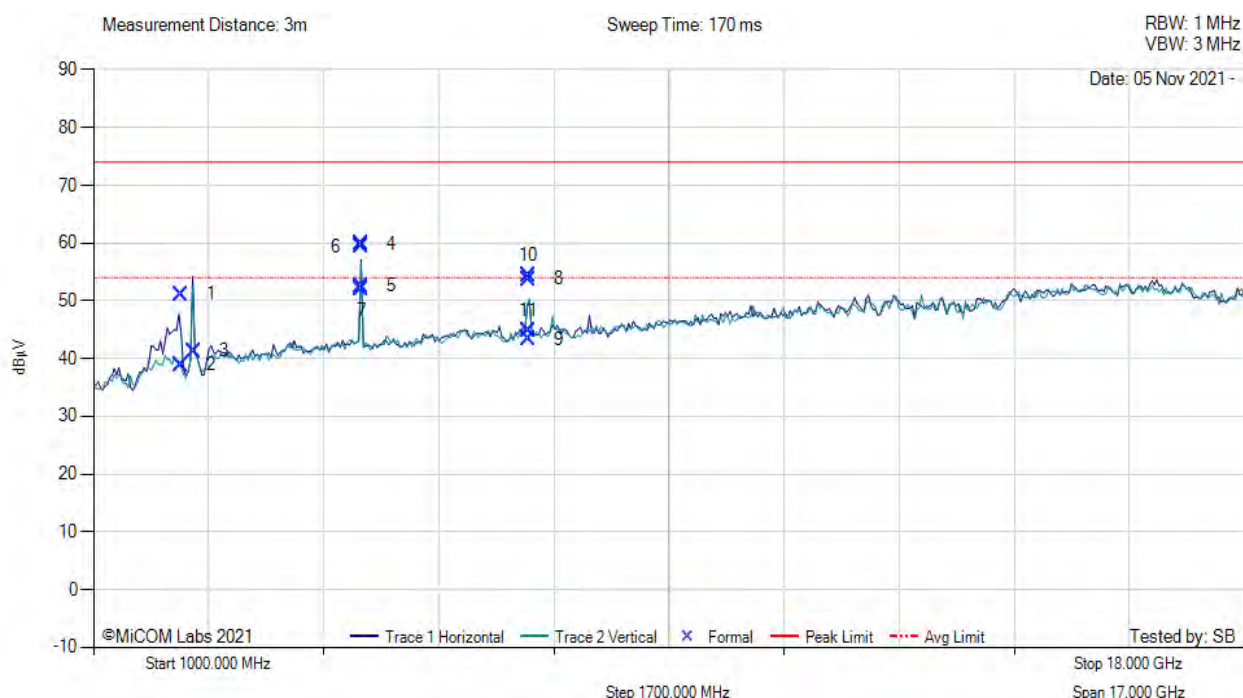

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2282.88	62.05	1.95	-12.84	51.16	Max Peak	Horizontal	148	98	74.0	-22.8	Pass
2	2282.88	49.76	1.95	-12.84	38.87	Max Avg	Horizontal	148	98	54.0	-15.1	Pass
3	2475.68	51.55	2.07	-12.35	41.27	Peak (NRB)	Horizontal	150	25	--	--	Pass
4	4951.33	69.47	2.89	-12.44	59.92	Max Peak	Horizontal	148	309	74.0	-14.1	Pass
5	4951.33	62.13	2.89	-12.44	52.58	Max Avg	Horizontal	148	309	54.0	-1.4	Pass
6	4951.33	68.88	2.89	-12.44	59.33	Max Peak	Vertical	148	45	74.0	-14.7	Pass
7	4951.33	61.49	2.89	-12.44	51.94	Max Avg	Vertical	148	45	54.0	-2.1	Pass
8	7426.60	58.06	3.66	-7.93	53.79	Max Peak	Horizontal	148	310	74.0	-20.2	Pass
9	7426.60	47.66	3.66	-7.93	43.39	Max Avg	Horizontal	148	310	54.0	-10.6	Pass
10	7426.60	58.68	3.66	-7.93	54.41	Max Peak	Vertical	148	312	74.0	-19.6	Pass
11	7426.60	49.04	3.66	-7.93	44.77	Max Avg	Vertical	148	312	54.0	-9.2	Pass

Test Notes: Antenna - STKA-YA24-18SM


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 18, Duty Cycle (%): 99

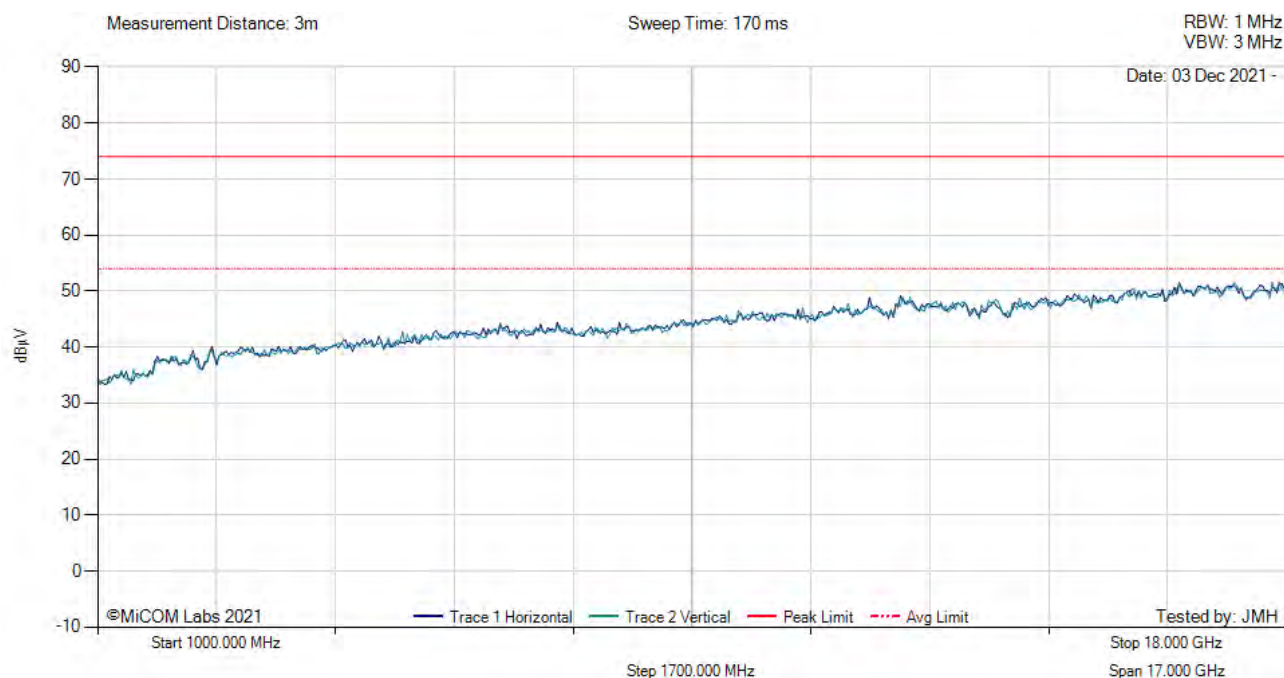

There are no emissions found within 6dB of the limit line.

9.4.2.2.4. Antenna PAT2419


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

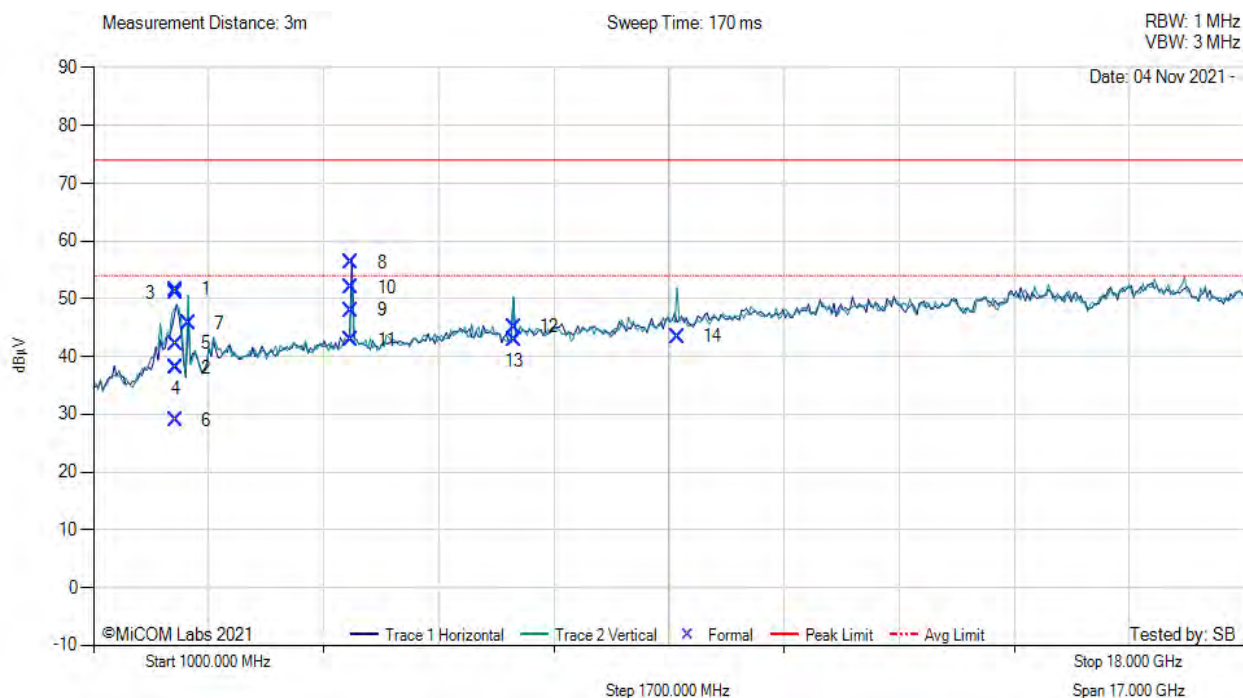

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2214.17	62.43	1.93	-12.75	51.61	Max Peak	Vertical	148	0	74.0	-22.4	Pass
2	2214.17	48.85	1.93	-12.75	38.03	Max Avg	Vertical	148	0	54.0	-16.0	Pass
3	2214.17	61.76	1.93	-12.75	50.94	Max Peak	Vertical	148	0	74.0	-23.1	Pass
4	2214.17	48.84	1.93	-12.75	38.02	Max Avg	Vertical	148	0	54.0	-16.0	Pass
5	2214.17	53.04	1.93	-12.75	42.22	Max Peak	Horizontal	148	36	74.0	-31.8	Pass
6	2214.17	39.79	1.93	-12.75	28.97	Max Avg	Horizontal	148	36	54.0	-25.0	Pass
7	2404.34	56.28	2.01	-12.61	45.68	Fundamental	Vertical	150	0	--	--	
8	4808.51	65.91	2.85	-12.43	56.33	Max Peak	Horizontal	148	322	74.0	-17.7	Pass
9	4808.51	57.61	2.85	-12.43	48.03	Max Avg	Horizontal	148	322	54.0	-6.0	Pass

10	4808.51	61.50	2.85	-12.43	51.92	Max Peak	Vertical	148	352	74.0	-22.1	Pass
11	4808.51	52.47	2.85	-12.43	42.89	Max Avg	Vertical	148	352	54.0	-11.1	Pass
12	7214.02	49.56	3.56	-8.02	45.10	Peak (NRB)	Horizontal	150	0	--	--	Pass
13	7214.02	47.38	3.56	-8.02	42.92	Peak (NRB)	Horizontal	150	0	--	--	Pass
14	9622.34	45.88	4.18	-6.57	43.49	Peak (NRB)	Horizontal	150	30	--	--	Pass

Test Notes: Antenna PAT2419


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2440.00 MHz, Power Setting: 18, Duty Cycle (%): 99

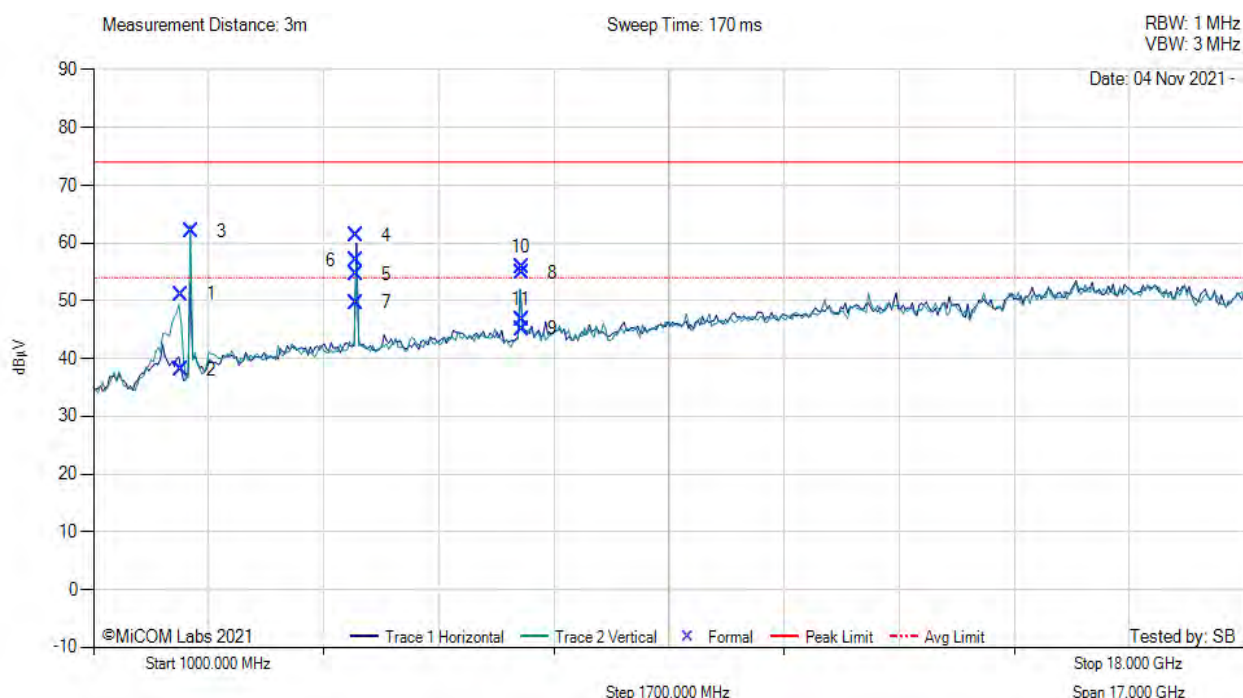

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2283.50	62.05	1.95	-12.84	51.16	Max Peak	Vertical	148	1	74.0	-22.8	Pass
2	2283.50	48.99	1.95	-12.84	38.10	Max Avg	Vertical	148	1	54.0	-15.9	Pass
3	2440.51	72.14	2.01	-12.20	61.95	Fundamental	Vertical	150	0	--	--	
4	4880.76	70.99	2.88	-12.54	61.33	Max Peak	Horizontal	148	318	74.0	-12.7	Pass
5	4880.76	57.2	2.91	-12.49	47.62	Max Avg	Horizontal	148	327	54	-6.38	Pass
6	4880.76	66.64	2.88	-12.54	56.98	Max Peak	Vertical	148	4	74.0	-17.0	Pass
7	4880.76	59.32	2.88	-12.54	49.66	Max Avg	Vertical	148	4	54.0	-4.3	Pass
8	7321.86	59.07	3.59	-7.84	54.82	Max Peak	Vertical	148	341	74.0	-19.2	Pass
9	7321.86	49.36	3.59	-7.84	45.11	Max Avg	Vertical	148	341	54.0	-8.9	Pass
10	7321.86	60.06	3.59	-7.84	55.81	Max Peak	Horizontal	148	340	74.0	-18.2	Pass
11	7321.86	50.96	3.59	-7.84	46.71	Max Avg	Horizontal	148	340	54.0	-7.3	Pass

Test Notes: Antenna PAT2419


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

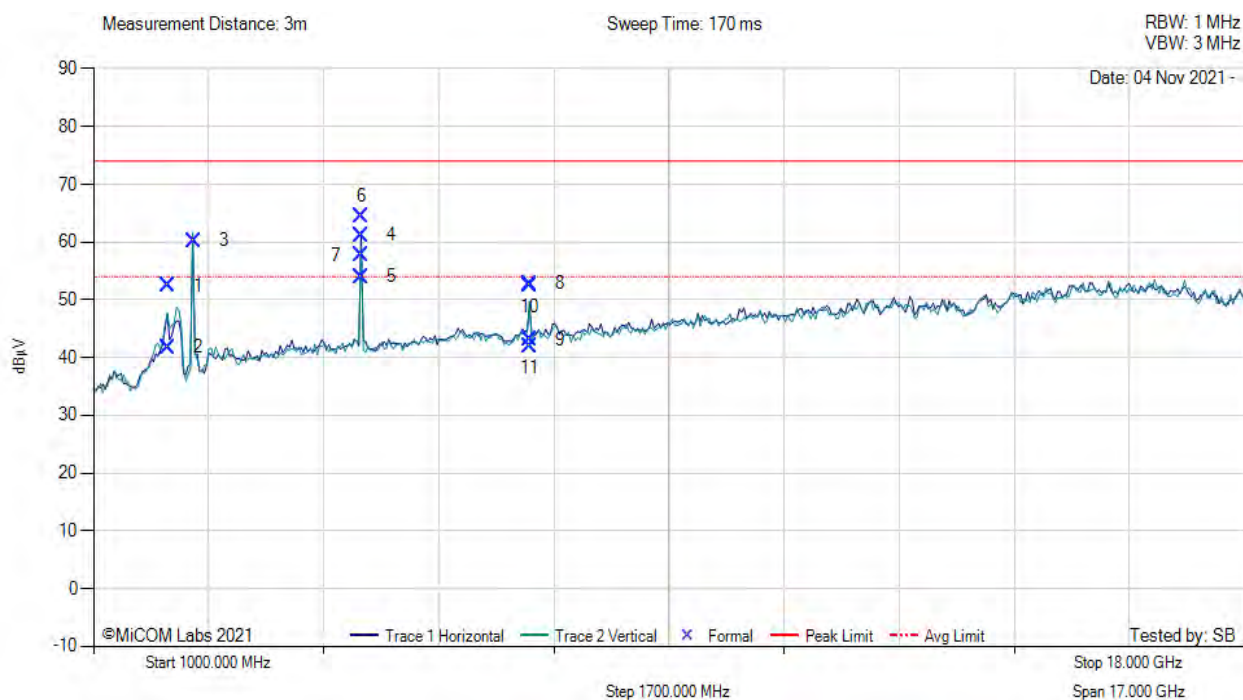

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2096.82	63.62	1.91	-13.03	52.50	Max Peak	Vertical	148	4	74.0	-21.5	Pass
2	2096.82	52.88	1.91	-13.03	41.76	Max Avg	Vertical	148	4	54.0	-12.2	Pass
3	2480.17	70.46	2.05	-12.32	60.19	Fundamental	Vertical	150	0	--	--	
4	4959.02	70.73	2.91	-12.49	61.15	Max Peak	Vertical	148	3	74.0	-12.9	Pass
5	4959.02	63.57	2.91	-12.49	53.99	Max Avg	Vertical	148	3	54.0	-0.01	Pass
6	4959.02	73.93	2.91	-12.49	64.35	Max Peak	Horizontal	148	327	74.0	-9.7	Pass
7	4959.02	60.24	2.91	-12.49	50.66	Max Avg	Horizontal	148	327	54	-3.34	Pass
8	7438.83	56.94	3.61	-7.73	52.82	Max Peak	Vertical	148	5	74.0	-21.2	Pass
9	7438.83	47.29	3.61	-7.73	43.17	Max Avg	Vertical	148	5	54.0	-10.8	Pass



Title: Digi International XBee-PRO S2C
To: FCC Part 15 Subpart C 15.247 (DTS), ISED 15-247 Issue 2
Serial #: DIGI93-U4 Rev A

10	7438.83	56.58	3.61	-7.73	52.46	Max Peak	Horizontal	148	341	74.0	-21.5	Pass
11	7438.83	45.98	3.61	-7.73	41.86	Max Avg	Horizontal	148	341	54.0	-12.1	Pass

Test Notes: Antenna PAT2419


Equipment Configuration for Restricted Band Spurious Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19.0	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

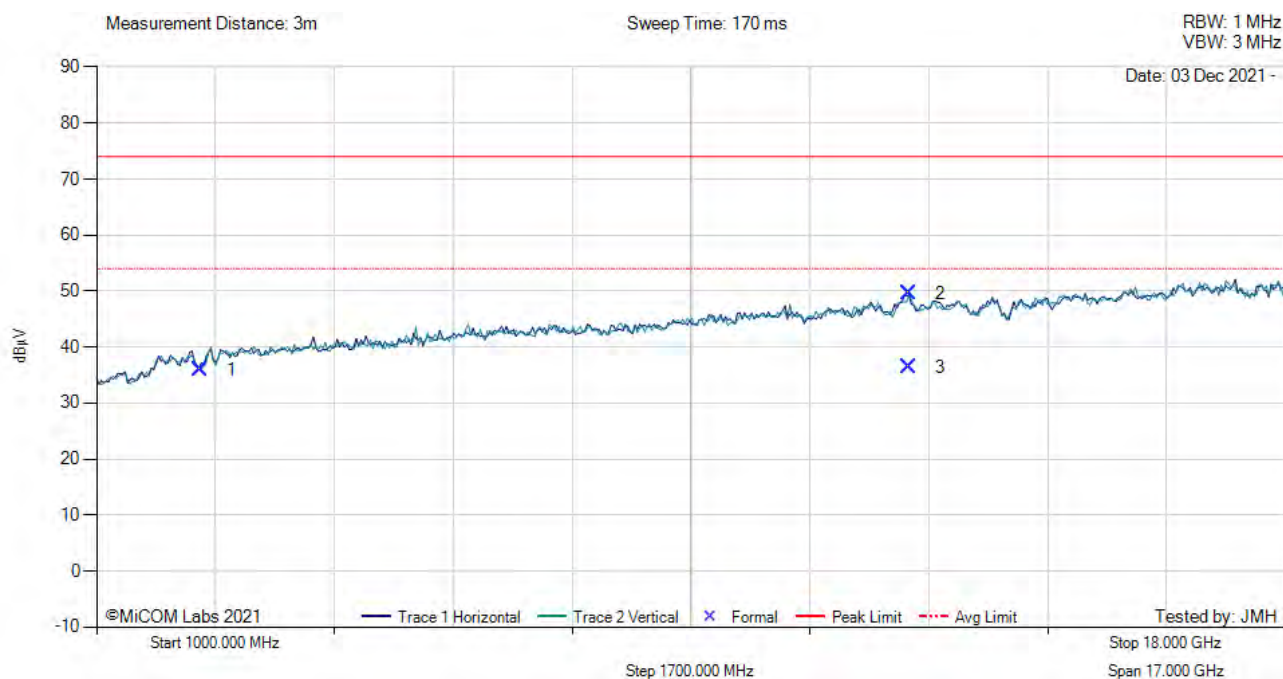

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2480.01	45.85	1.98	-11.88	35.95	Fundamental	Horizontal	190	0	--	--	
2	12611.55	50.81	5.26	-6.48	49.59	Max Peak	Vertical	134	130	74.0	-24.4	Pass
3	12611.55	37.55	5.26	-6.48	36.33	Max Avg	Vertical	134	130	54.0	-17.7	Pass

Test Notes: Antenna PAT2419

9.4.2.3. Restricted Edge & Band-Edge Emissions

9.4.2.3.1. Antenna STKA-YA24-18SM


Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

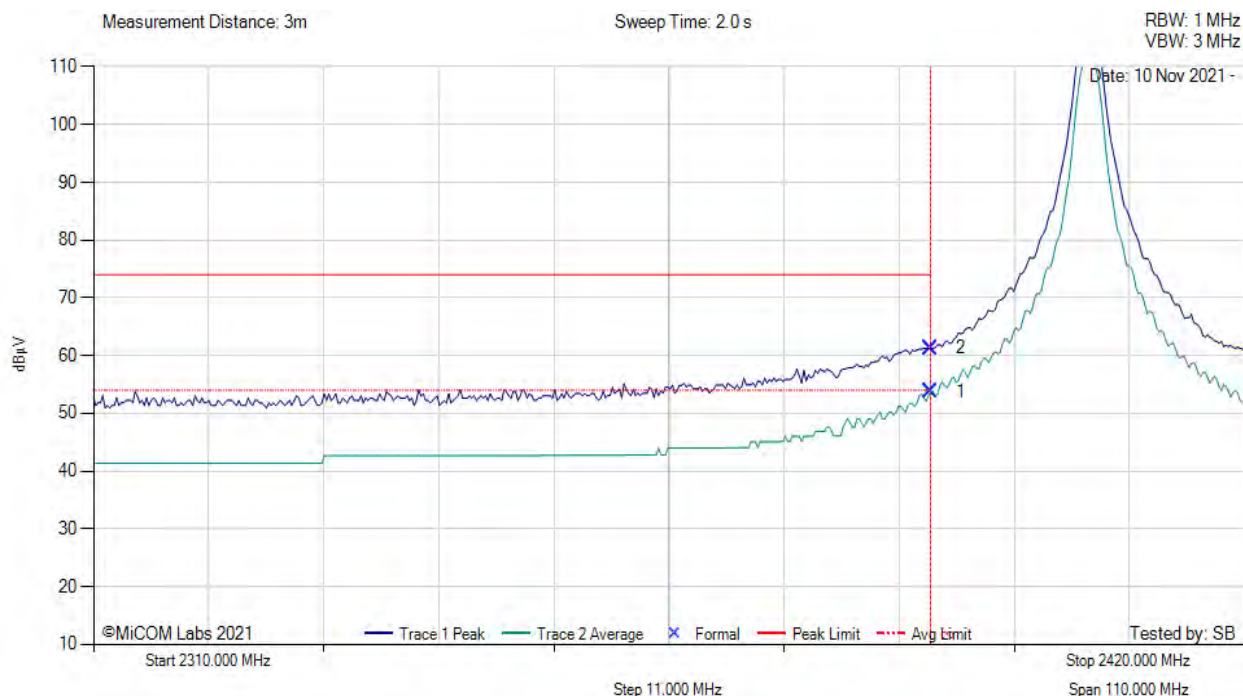

2310.00 - 2420.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2390.00	19.78	2.02	31.96	53.76	Max Avg	Horizontal	151	96	54.0	-0.2	Pass
2	2390.00	17.30	2.02	31.96	61.28	Max Peak	Horizontal	151	96	74.0	-2.7	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - STKA-YA24-18SM


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

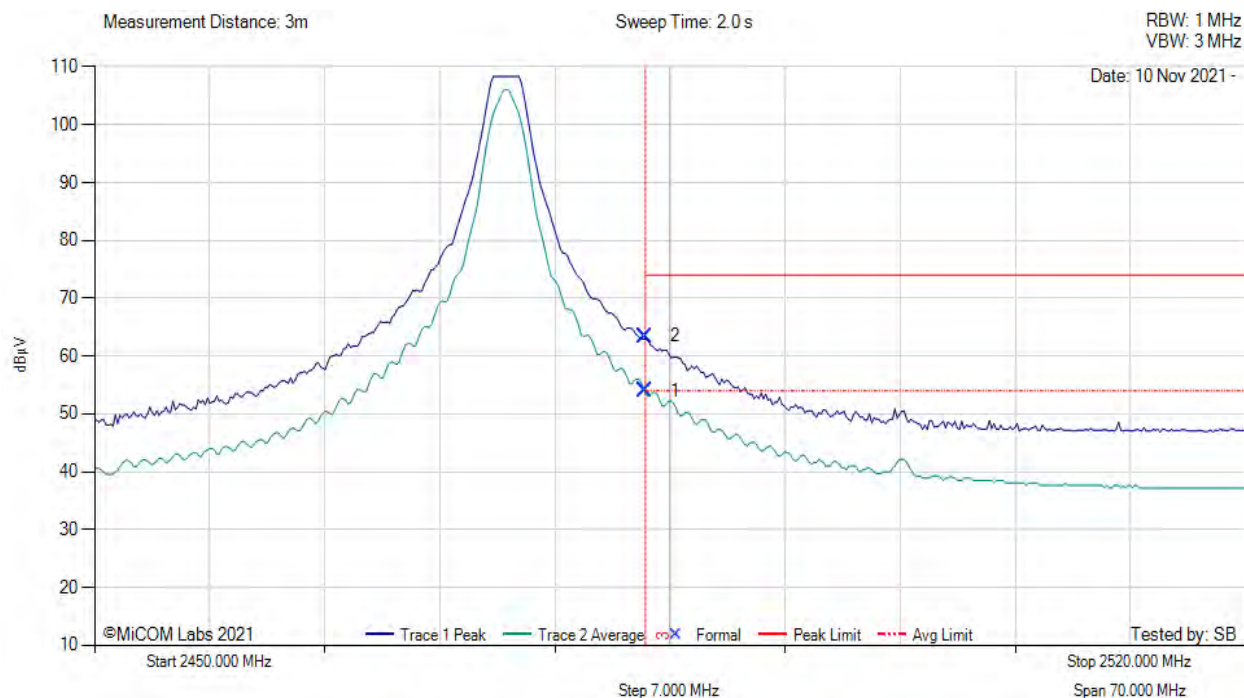

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	19.62	2.03	32.33	53.98	Max Avg	Horizontal	151	96	54.0	-0.02	Pass
2	2483.50	29.08	2.03	32.33	63.44	Max Peak	Horizontal	151	96	74.0	-2.7	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - STKA-YA24-18SM


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	STKA-YA24-18SM	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

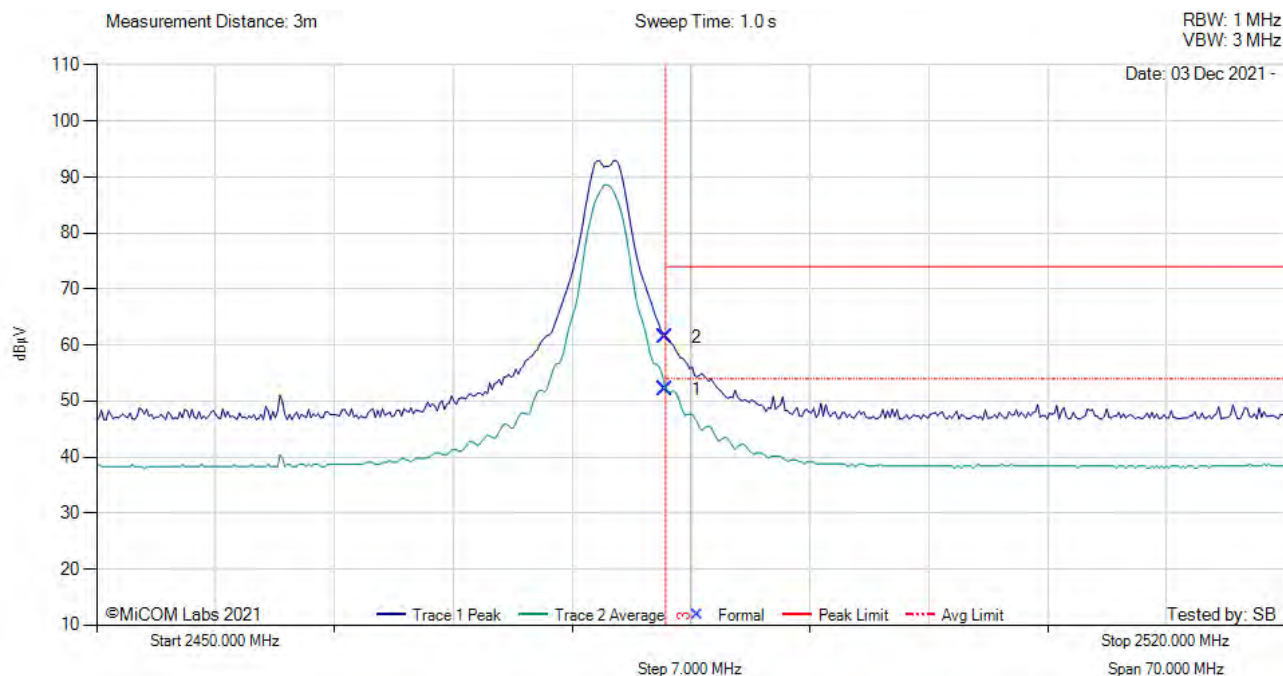

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	17.69	1.98	32.37	52.04	Max Avg	Horizontal	149	93	54.0	-2.0	Pass
2	2483.50	27.04	1.98	32.37	61.39	Max Peak	Horizontal	149	93	74.0	-12.6	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - STKA-YA24-18SM

9.4.2.3.2. Antenna HG2415U


Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15.0	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

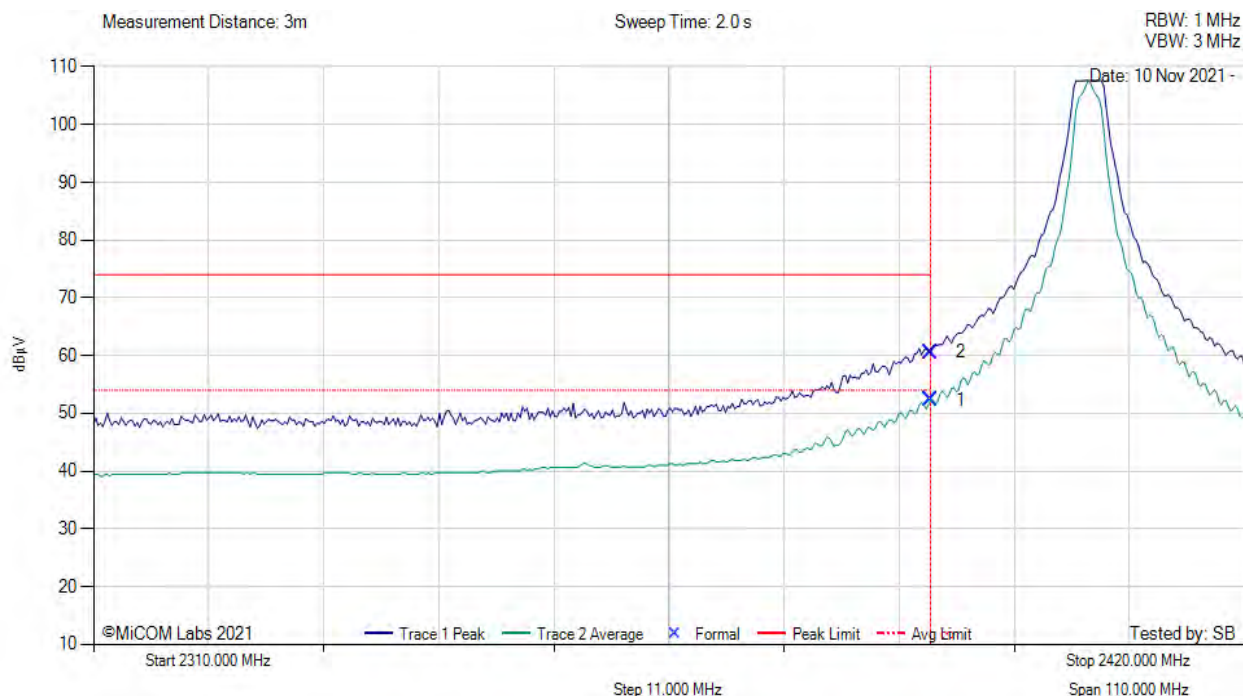

2310.00 - 2420.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2390.00	18.32	2.02	31.96	52.30	Max Avg	Vertical	151	274	54.0	-1.7	Pass
2	2390.00	26.58	2.02	31.96	60.56	Max Peak	Vertical	151	274	74.0	-13.4	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - HG2415U


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

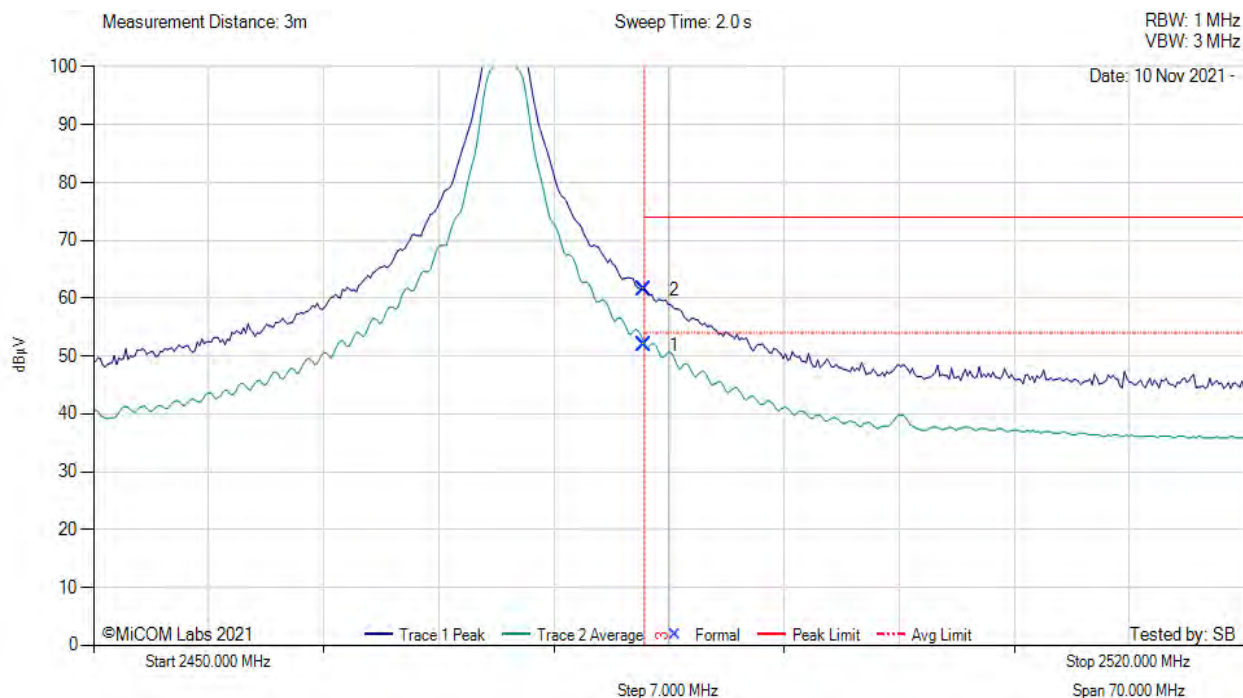

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	17.55	2.03	32.33	51.91	Max Avg	Vertical	151	274	54.0	-2.1	Pass
2	2483.50	27.17	2.03	32.33	61.53	Max Peak	Vertical	151	274	74.0	-12.4	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - HG2415U


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	HG2415U	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	15	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

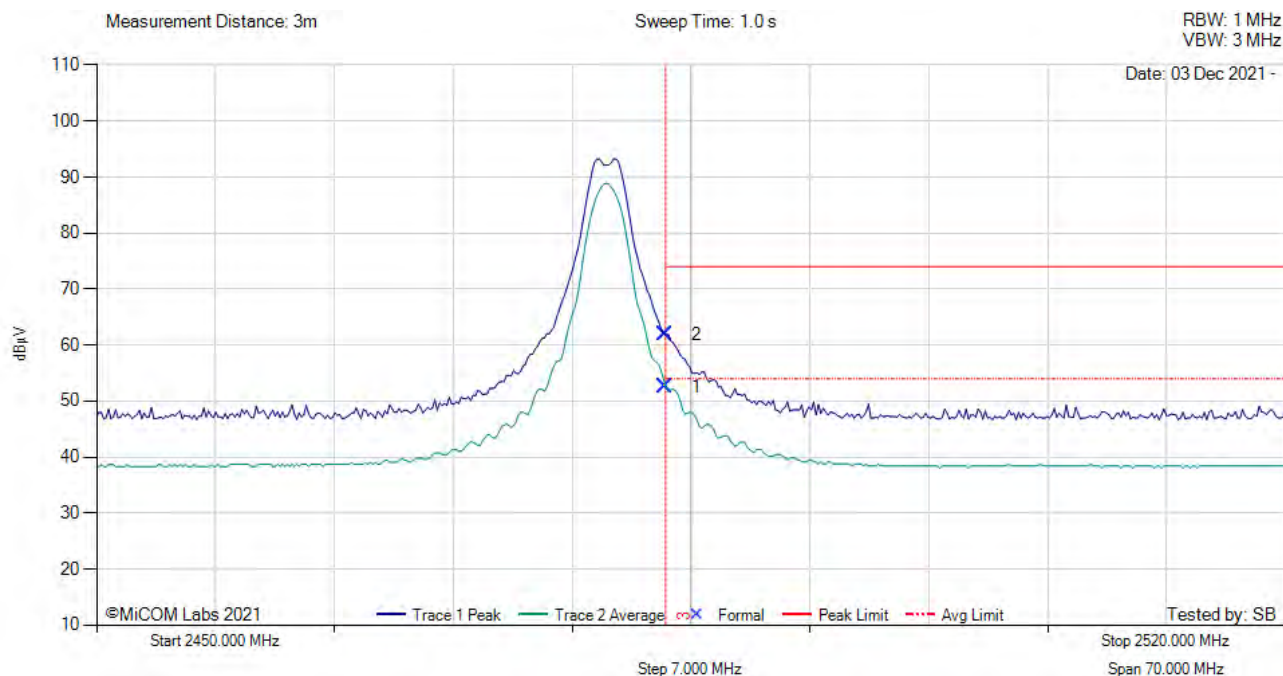

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	18.17	1.98	32.37	52.52	Max Avg	Vertical	149	-2	54.0	-1.5	Pass
2	2483.50	27.48	1.98	32.37	61.83	Max Peak	Vertical	149	-2	74.0	-12.2	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - HG2415U

9.4.2.3.3. Antenna A24-HASM-450


Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2405.00 MHz, Power Setting: 18, Duty Cycle (%): 99

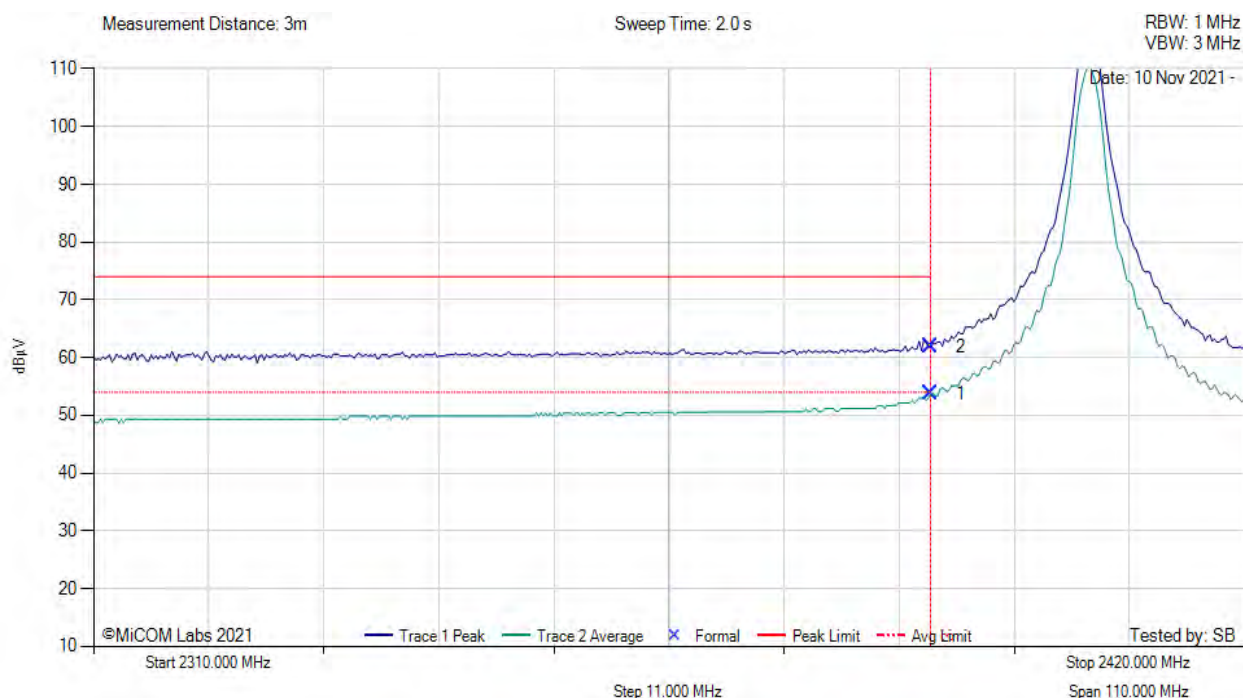

2310.00 - 2420.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2390.00	19.75	2.02	31.96	53.73	Max Avg	Vertical	151	220	54.0	-0.2	Pass
2	2390.00	27.86	2.02	31.96	61.84	Max Peak	Vertical	151	220	74.0	-12.1	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - A24-HASM-450


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

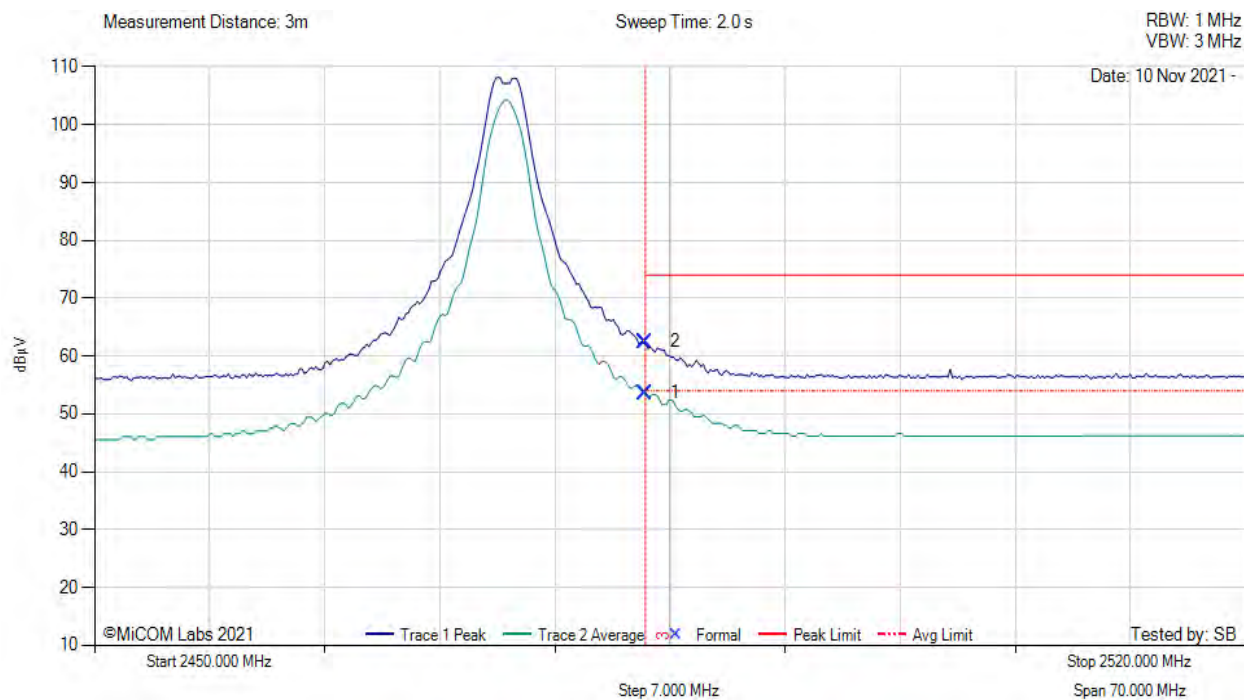

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	19.27	2.03	32.33	53.63	Max Avg	Vertical	151	220	54.0	-0.4	Pass
2	2483.50	28.10	2.03	32.33	62.46	Max Peak	Vertical	151	220	74.0	-11.5	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Antenna - A24-HASM-450


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	A24-HASM-450	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	2.1	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2480.00 MHz, Power Setting: 3, Duty Cycle (%): 99

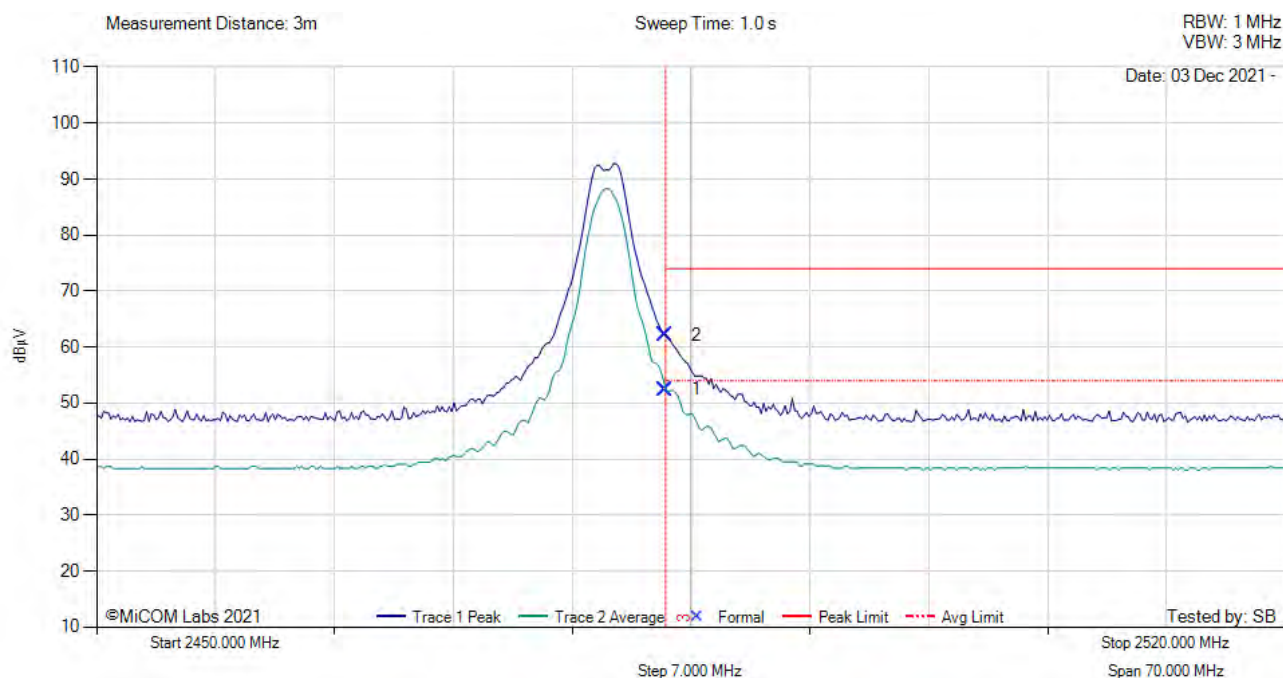

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	18.10	1.98	32.37	52.45	Max Avg	Vertical	149	45	54.0	-1.6	Pass
2	2483.50	27.84	1.98	32.37	62.19	Max Peak	Vertical	149	45	74.0	-11.8	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Test Notes: Antenna - A24-HASM-450

9.4.2.3.4. Antenna PAT2419

Equipment Configuration for 2390 MHz Radiated Band-Edge Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2405.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results

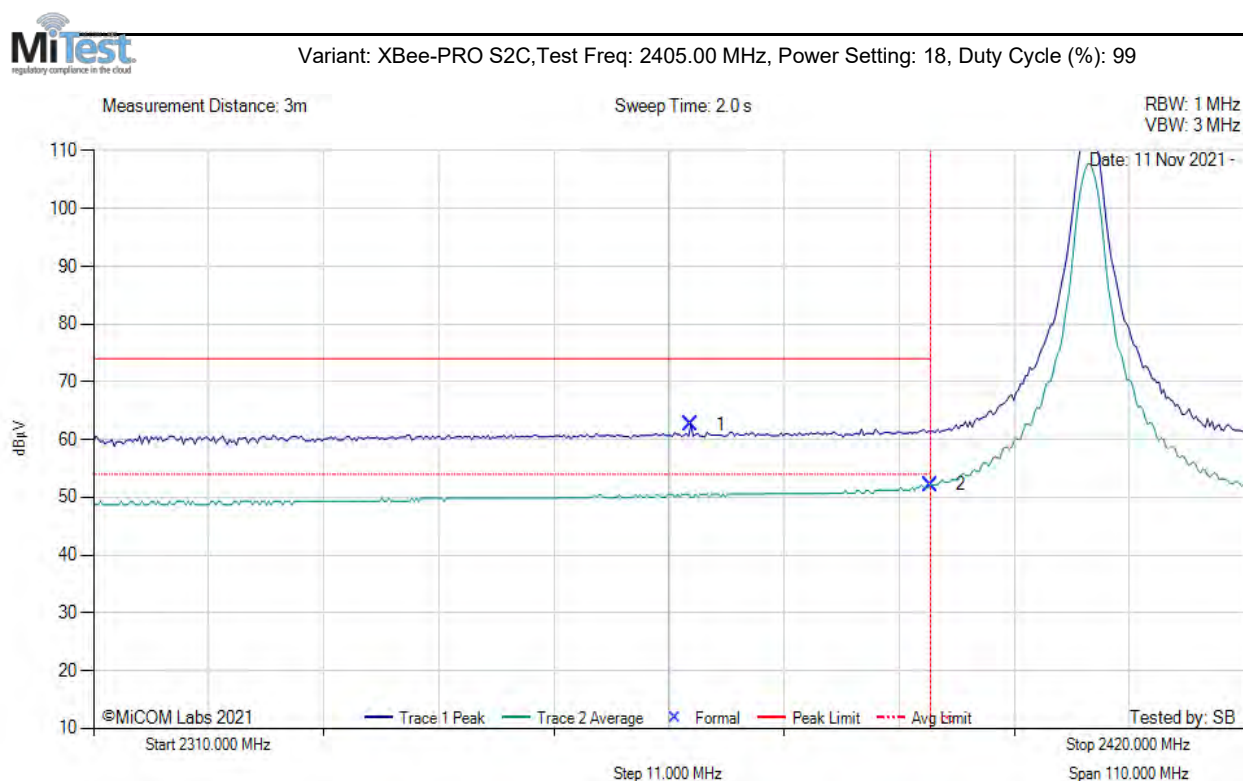

2310.00 - 2420.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2367.07	28.77	1.98	31.84	62.59	Max Peak	Vertical	101	354	74.0	-11.4	Pass
2	2390.00	18.20	2.02	31.96	52.18	Max Avg	Vertical	101	354	54.0	-1.8	Pass
3	2390.00	--	--	--	--	Restricted- Band	--	--	--	--	--	--


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2475.00	Data Rate:	1
Power Setting:	18	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

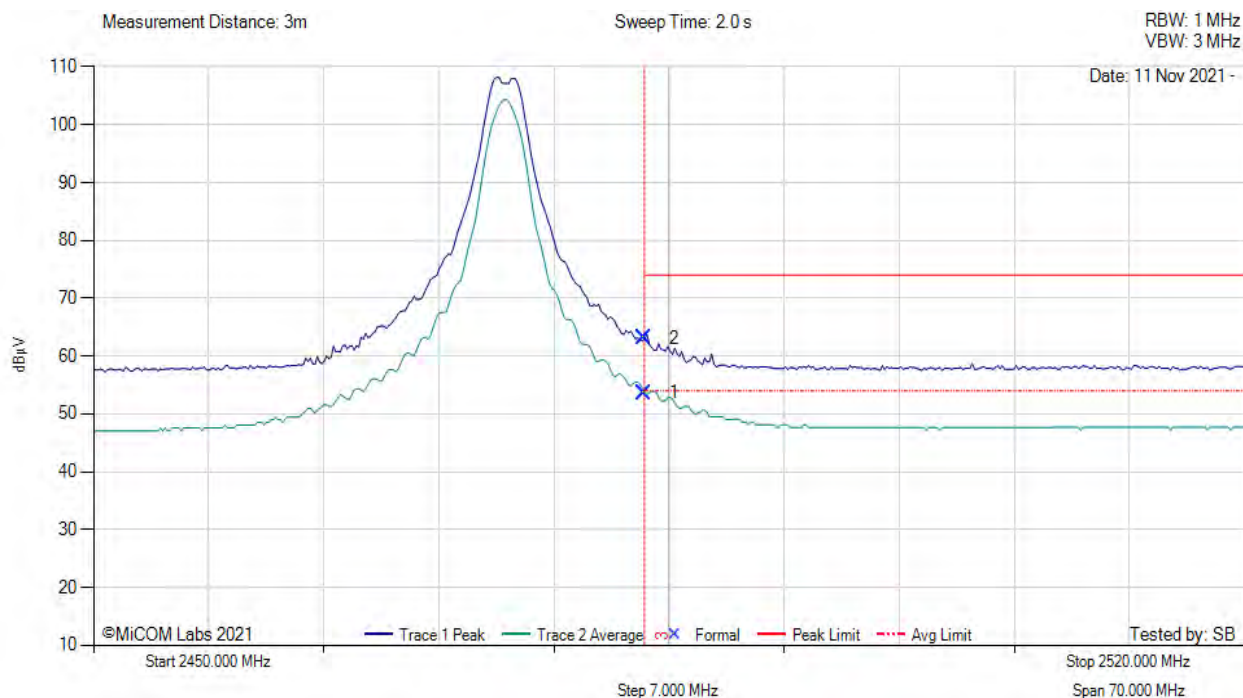

2450.00 - 2520.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	19.31	2.03	32.33	53.67	Max Avg	Vertical	101	350	54.0	-0.3	Pass
2	2483.50	28.68	2.03	32.33	63.04	Max Peak	Vertical	101	350	74.0	-11.0	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--


Equipment Configuration for 2483.5 MHz Radiated Band-Edge Emissions

Antenna:	PAT2419	Variant:	XBee-PRO S2C
Antenna Gain (dBi):	19	Modulation:	QPSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480.00	Data Rate:	1
Power Setting:	3	Tested By:	SB

Test Measurement Results



Variant: XBee-PRO S2C, Test Freq: 2475.00 MHz, Power Setting: 18, Duty Cycle (%): 99

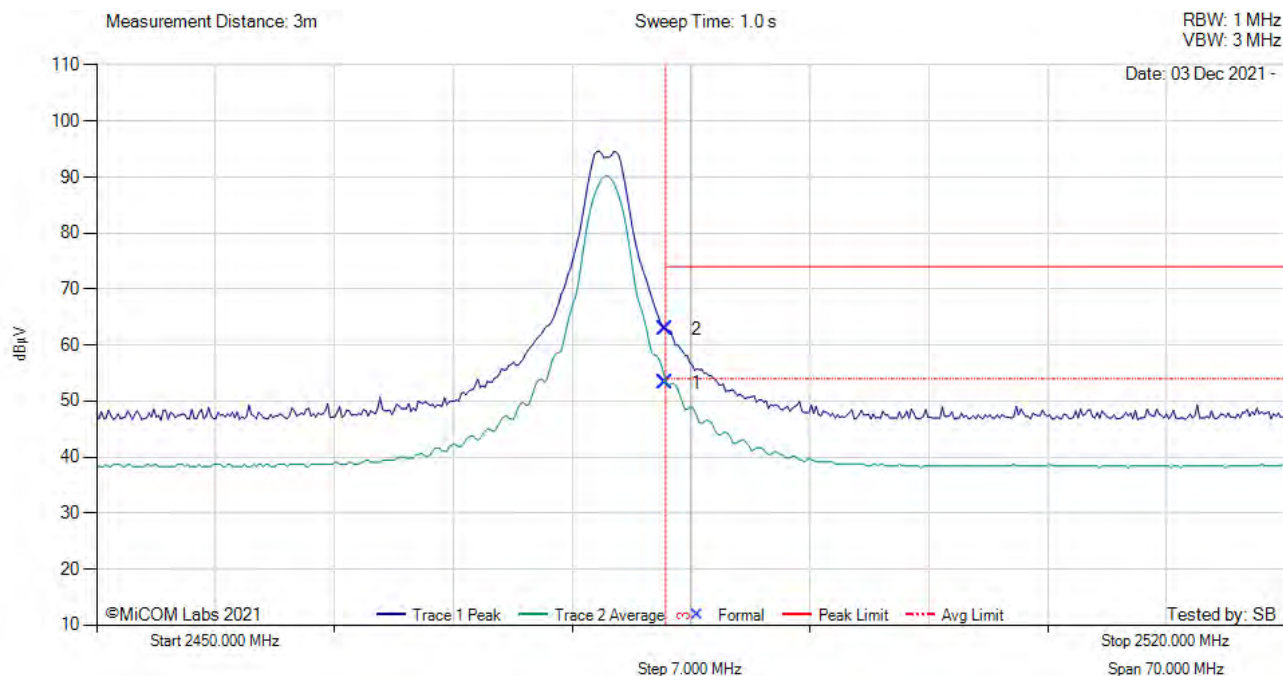

2450.00 - 2520.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.50	18.92	1.98	32.37	53.27	Max Avg	Vertical	149	14	54.0	-0.7	Pass
2	2483.50	28.53	1.98	32.37	62.88	Max Peak	Vertical	149	14	74.0	-11.1	Pass
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--


A. APPENDIX - GRAPHICAL IMAGES

A.1. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: QPSK, Channel: 2405.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

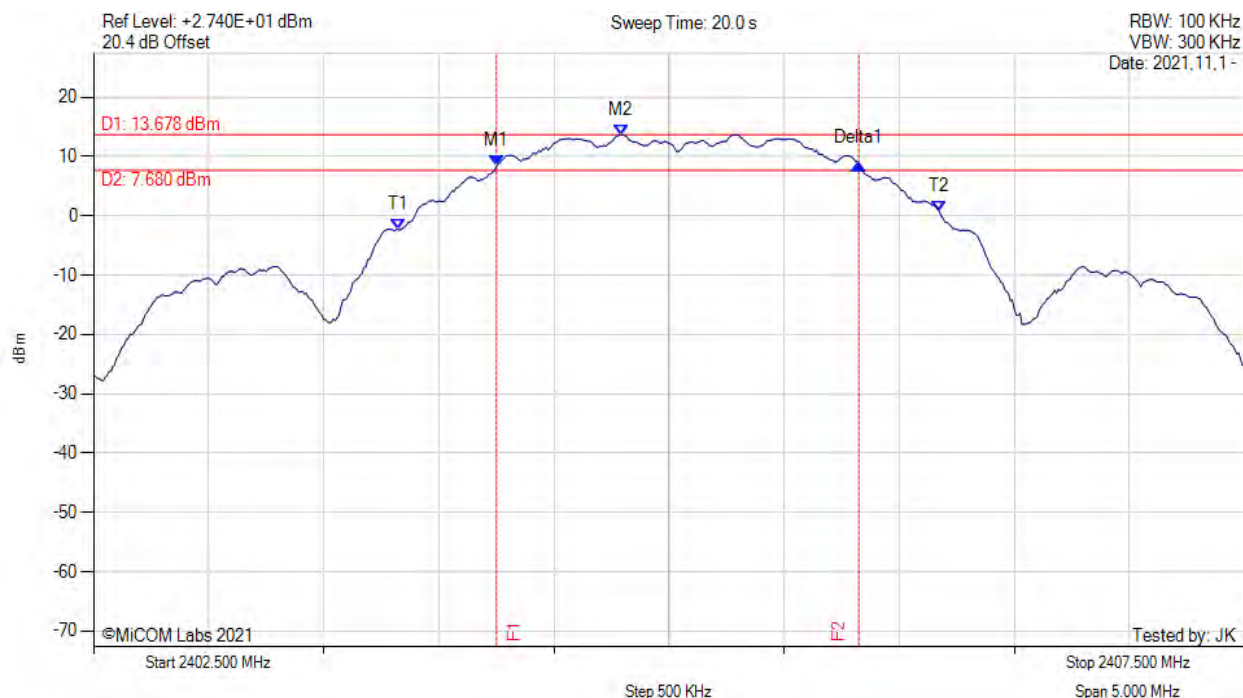


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 2404.250 MHz : 8.339 dBm M2 : 2404.792 MHz : 13.678 dBm Delta1 : 1.575 MHz : 0.441 dB T1 : 2403.825 MHz : -2.376 dBm T2 : 2406.175 MHz : 0.667 dBm OBW : 2.415 MHz	Measured 6 dB Bandwidth: 1.575 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: QPSK, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

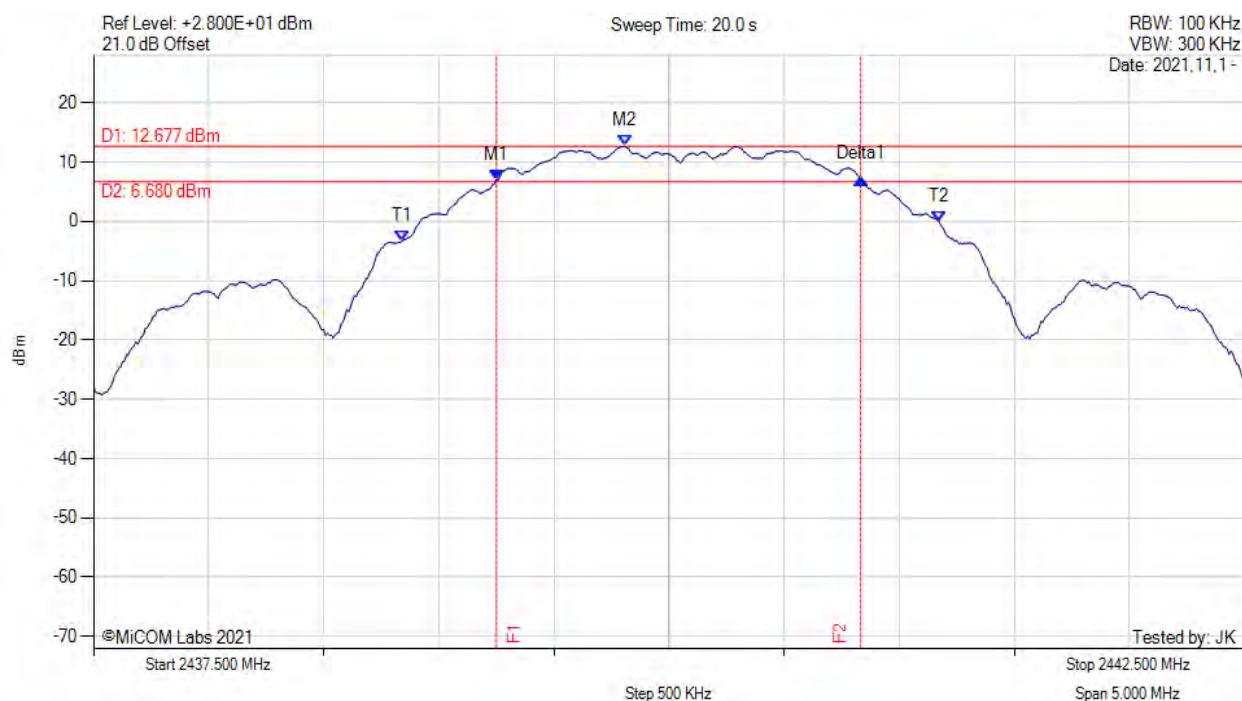


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 2439.250 MHz : 7.012 dBm M2 : 2439.808 MHz : 12.677 dBm Delta1 : 1.583 MHz : 0.079 dB T1 : 2438.842 MHz : -3.296 dBm T2 : 2441.175 MHz : -0.155 dBm OBW : 2.399 MHz	Measured 6 dB Bandwidth: 1.583 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: QPSK, Channel: 2475.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

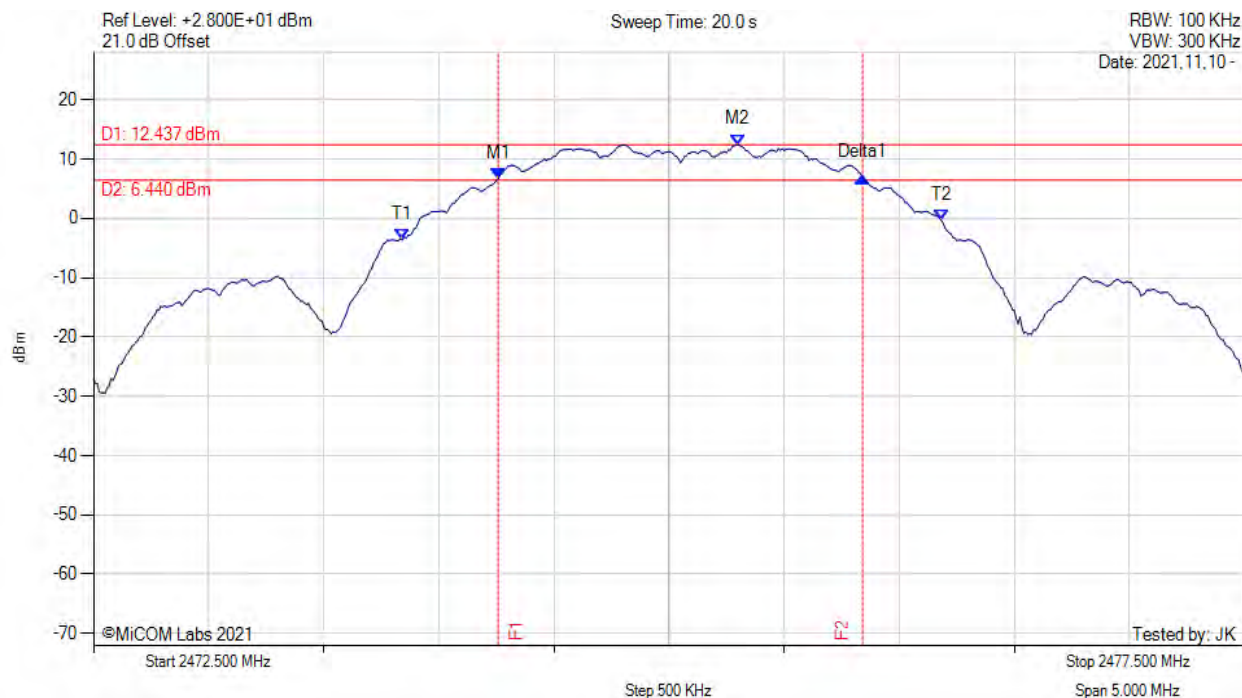


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAXH	M1 : 2474.258 MHz : 6.704 dBm M2 : 2475.300 MHz : 12.437 dBm Delta1 : 1.583 MHz : 0.268 dB T1 : 2473.842 MHz : -3.646 dBm T2 : 2476.183 MHz : -0.328 dBm OBW : 2.412 MHz	Measured 6 dB Bandwidth: 1.583 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: QPSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

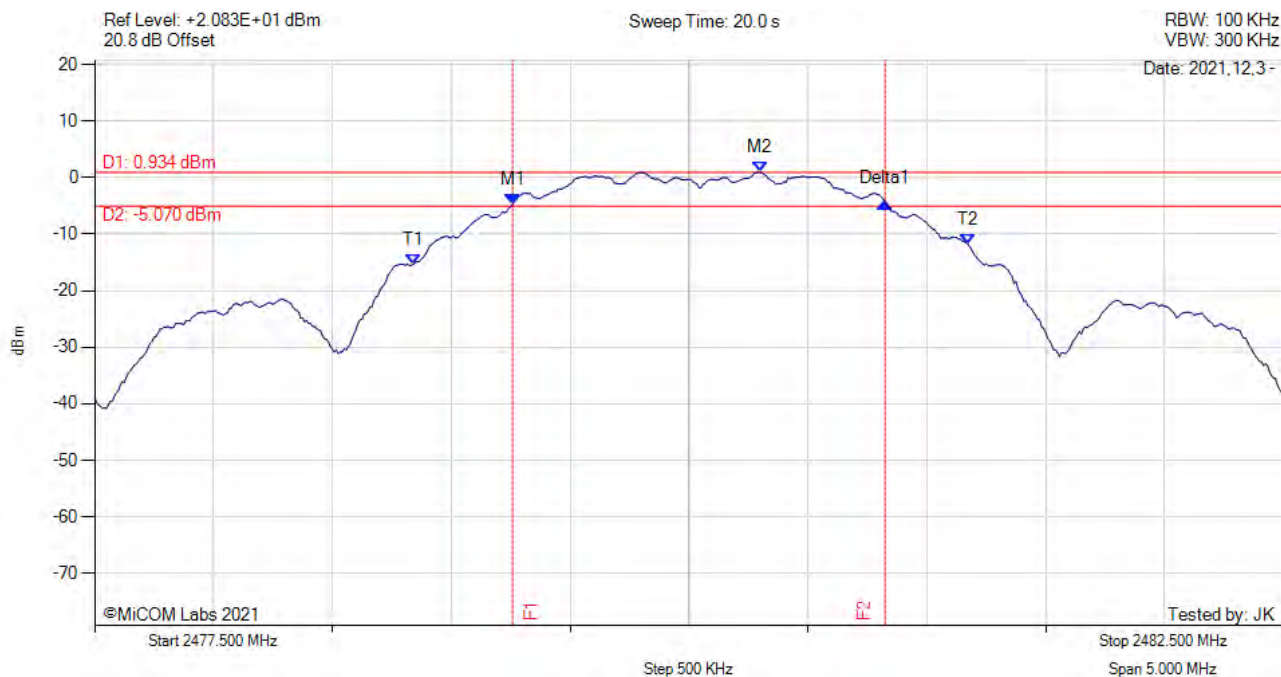

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = POS Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = MAXH	M1 : 2479.258 MHz : -4.623 dBm M2 : 2480.300 MHz : 0.934 dBm Delta1 : 1.567 MHz : 0.097 dB T1 : 2478.842 MHz : -15.342 dBm T2 : 2481.175 MHz : -11.900 dBm OBW : 2.396 MHz	Measured 6 dB Bandwidth: 1.567 MHz


[back to matrix](#)

A.2. Power Spectral Density



POWER SPECTRAL DENSITY - AVERAGE

Variant: QPSK, Channel: 2405.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

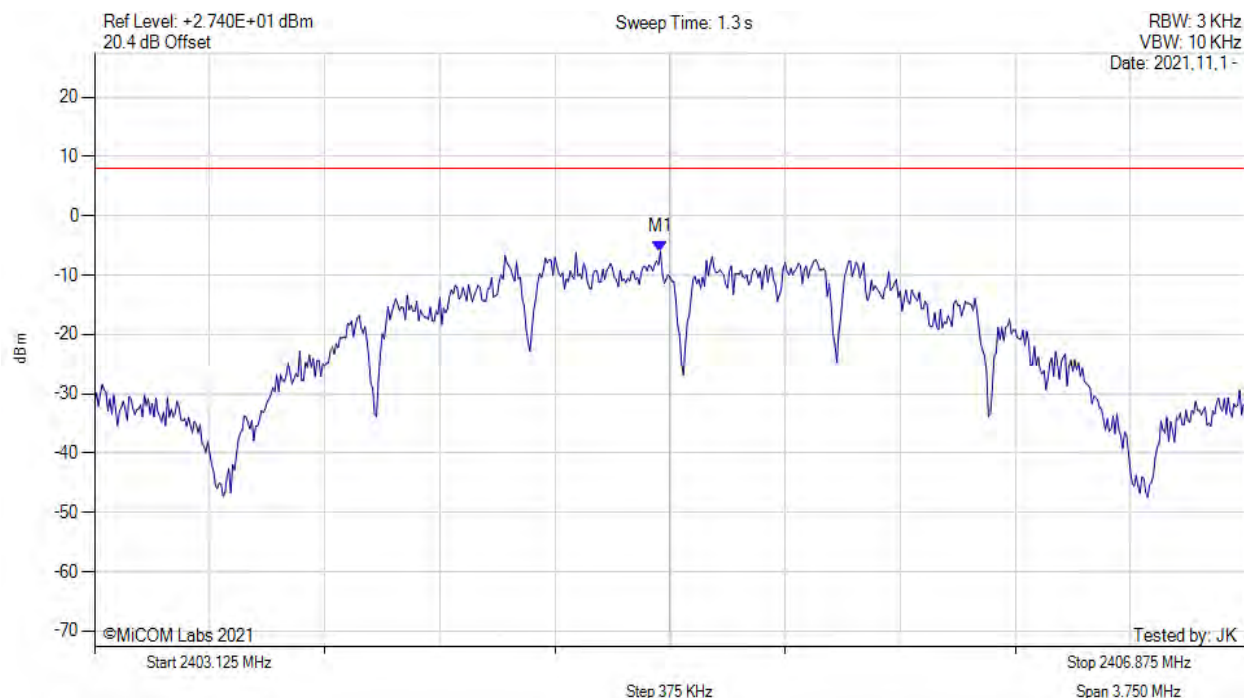


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.969 MHz : -6.049 dBm	Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2405.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

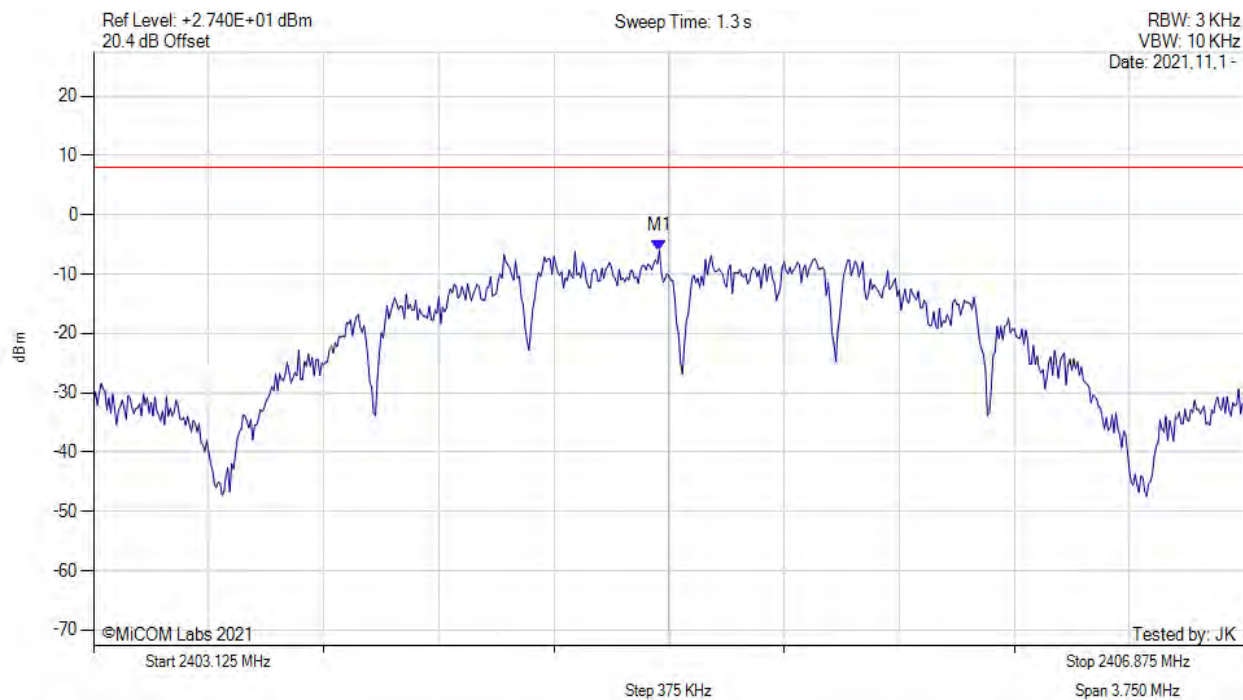


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2405.000 MHz : -6.049 dBm M1 + DCCF : 2405.000 MHz : -6.005 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -14.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

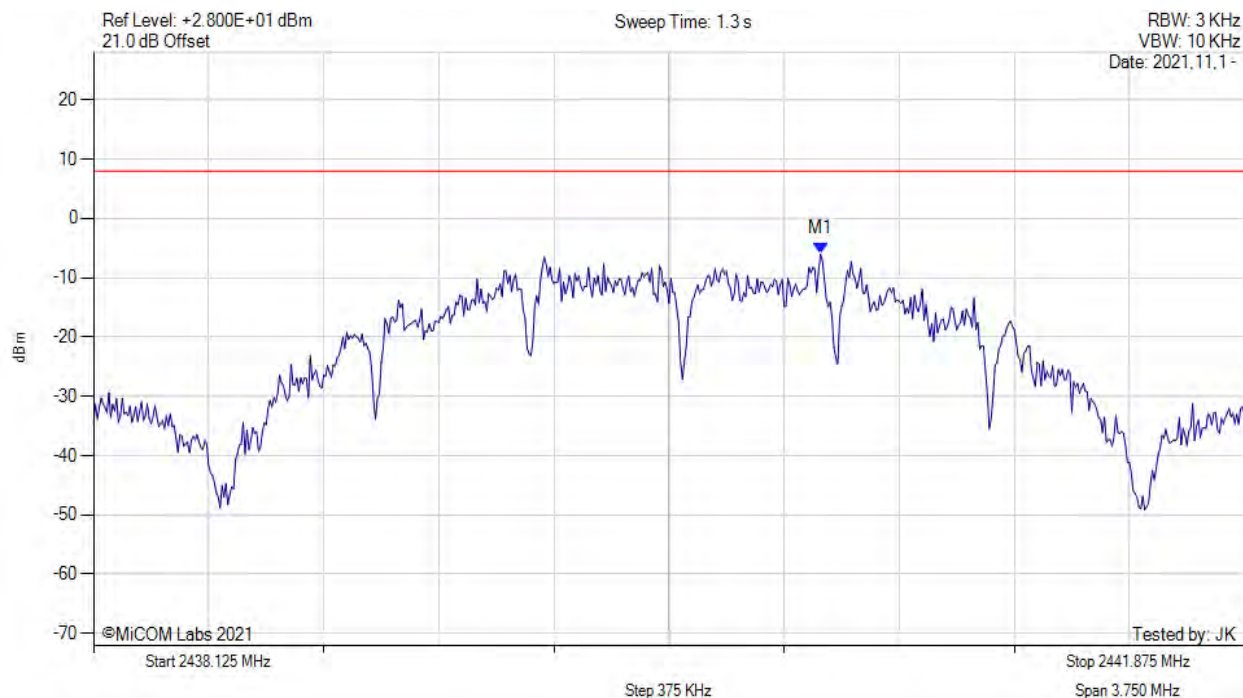


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2440.494 MHz : -5.992 dBm	Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2440.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

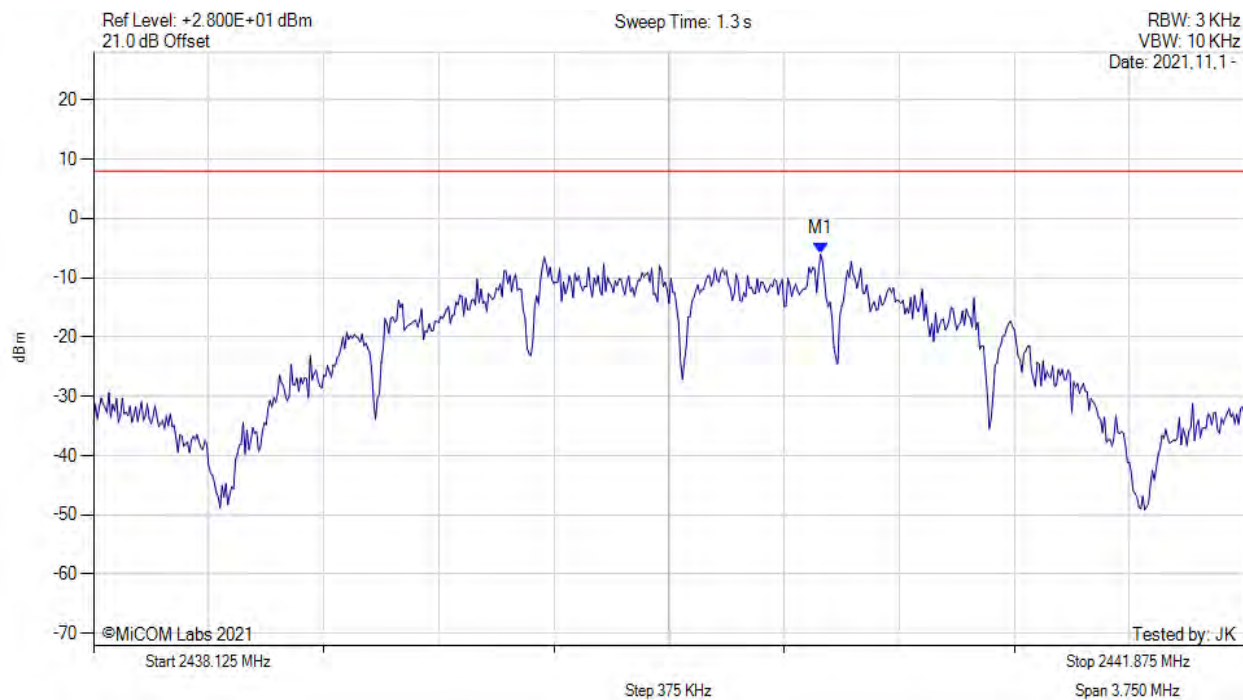


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2440.500 MHz : -5.992 dBm M1 + DCCF : 2440.500 MHz : -5.948 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -13.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2475.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

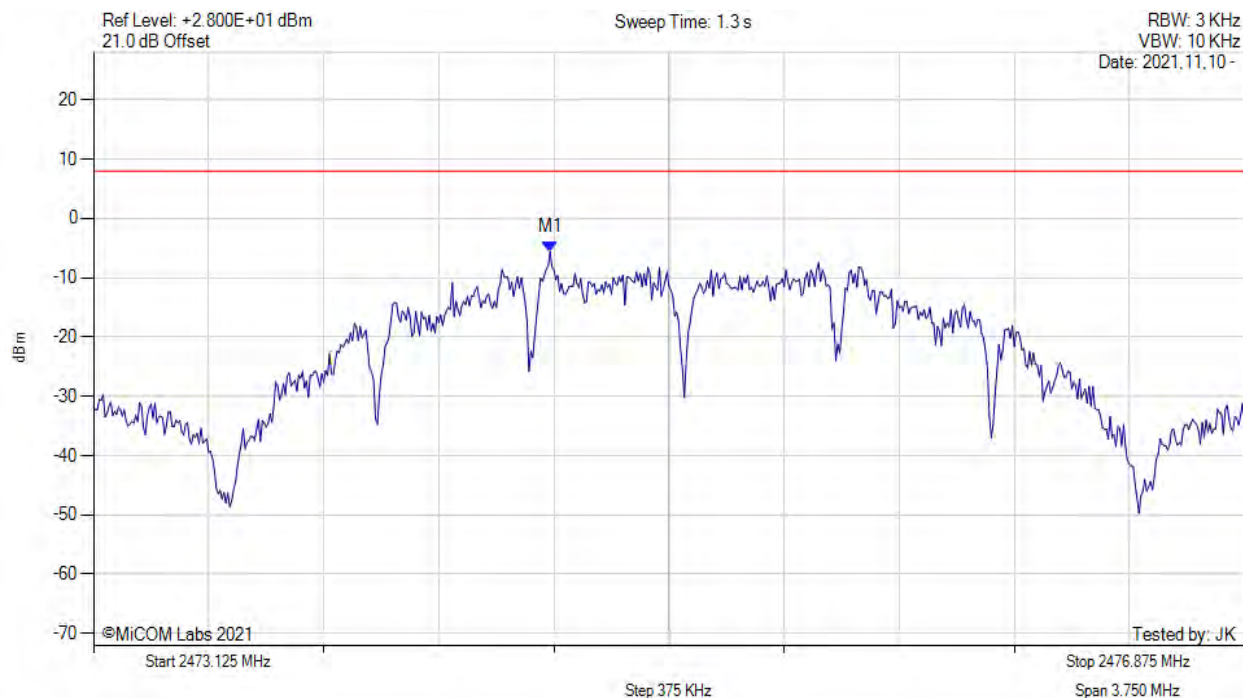


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2474.613 MHz : -5.623 dBm	Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2475.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

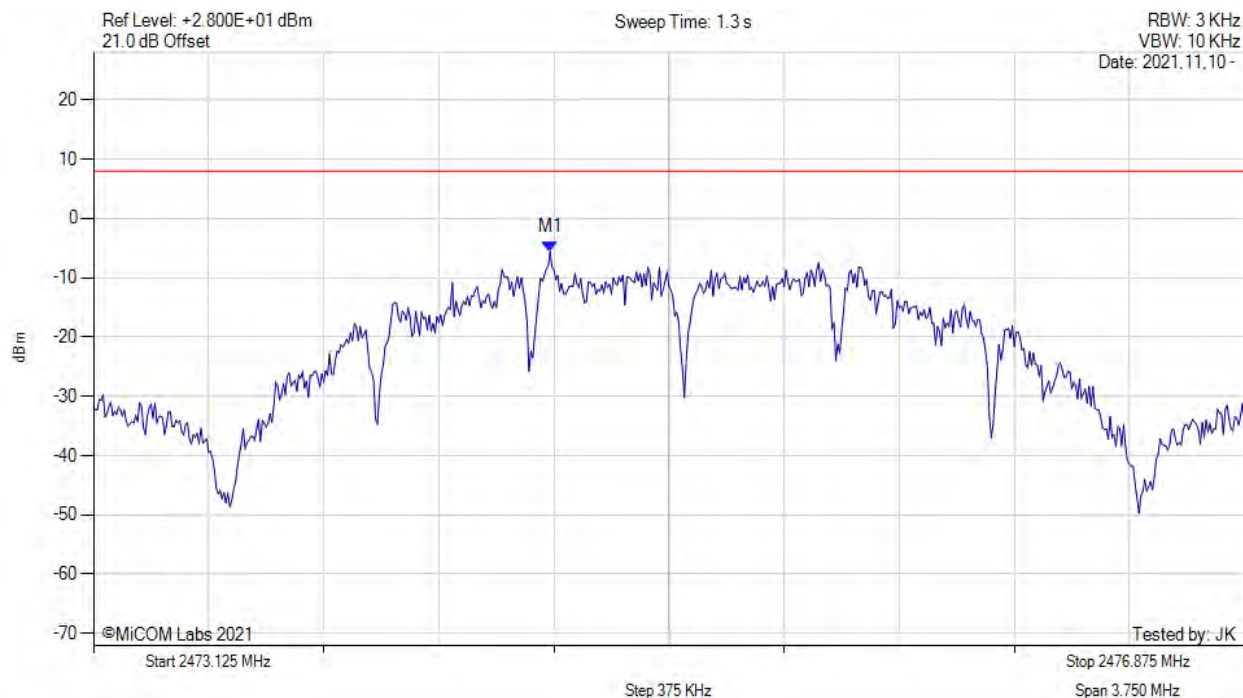


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2474.600 MHz : -5.623 dBm M1 + DCCF : 2474.600 MHz : -5.579 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -13.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

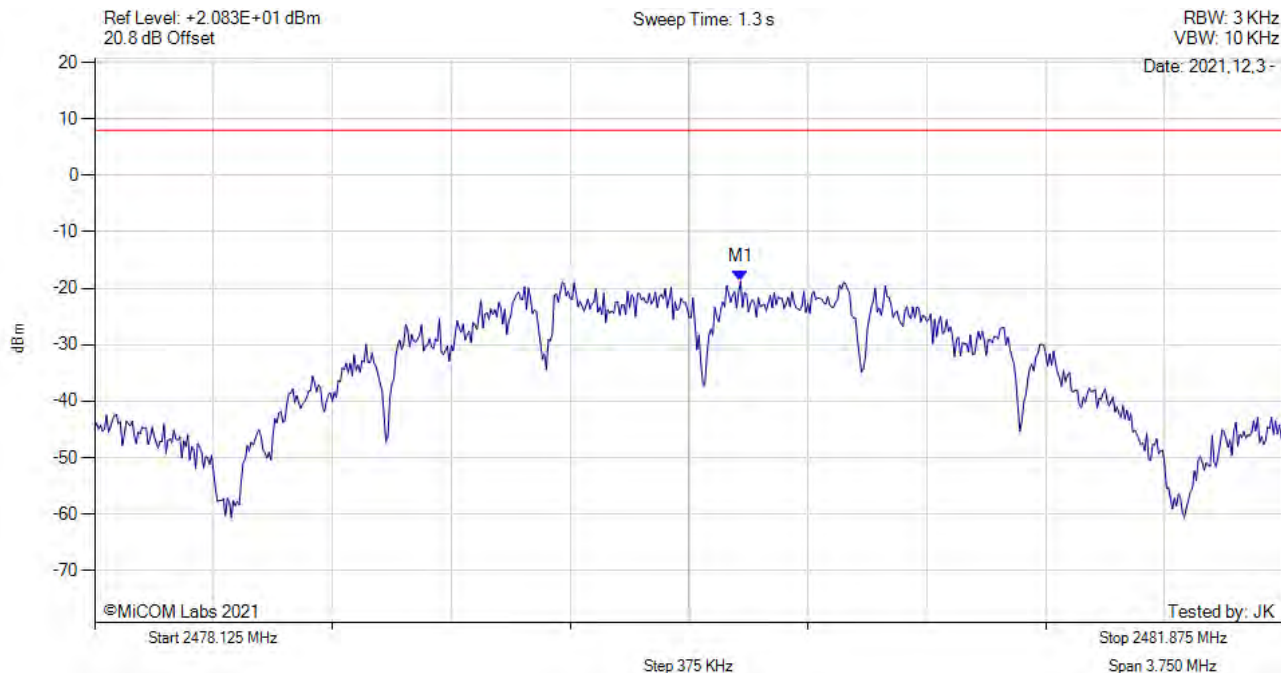


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2480.163 MHz : -18.747 dBm	Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: QPSK, Channel: 2480.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

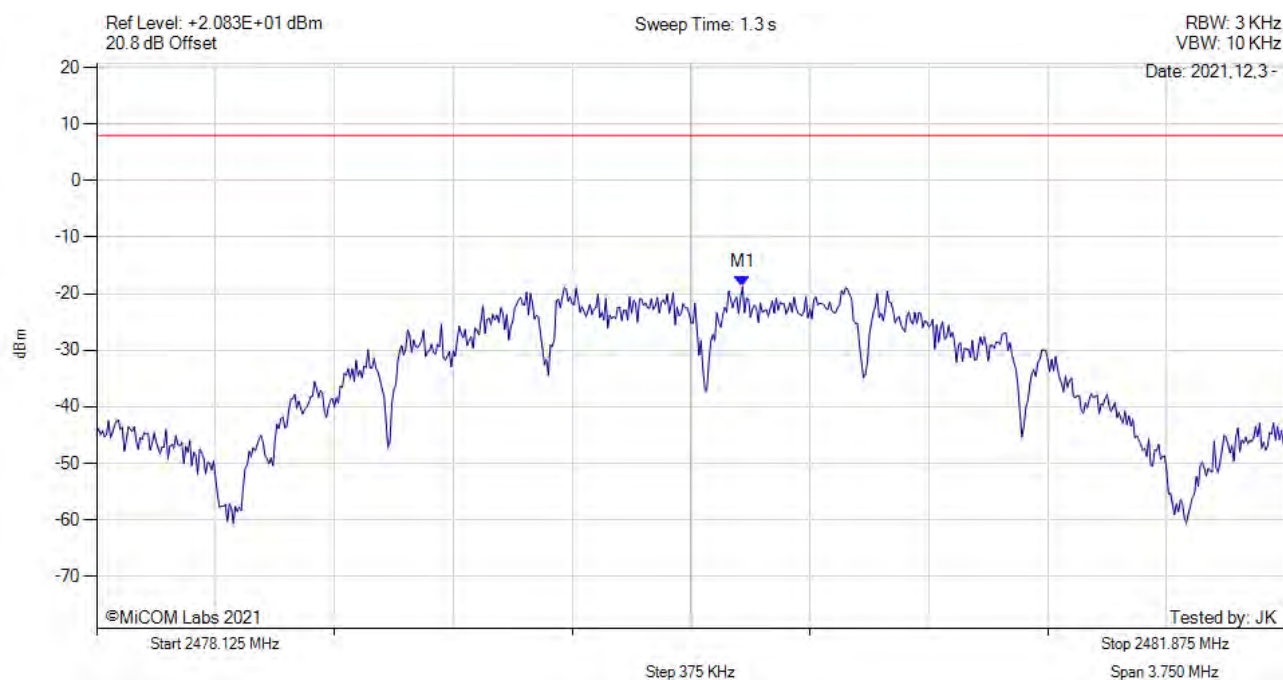


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2480.200 MHz : -18.747 dBm M1 + DCCF : 2480.200 MHz : -18.703 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -26.7 dB

[back to matrix](#)

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Spurious Emissions

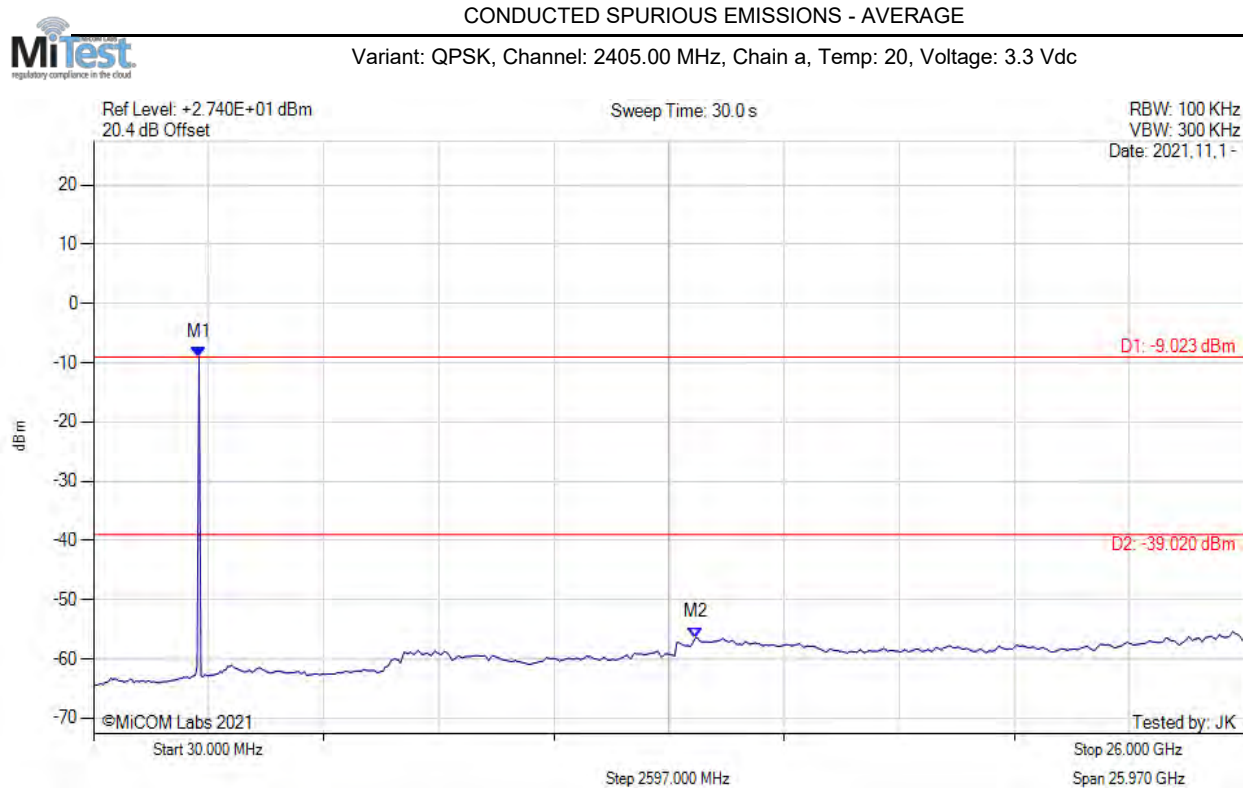


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2410.000 MHz : -9.023 dBm M2 : 13.620 GHz : -56.418 dBm	Limit: -39.02 dBm Margin: -17.40 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: QPSK, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

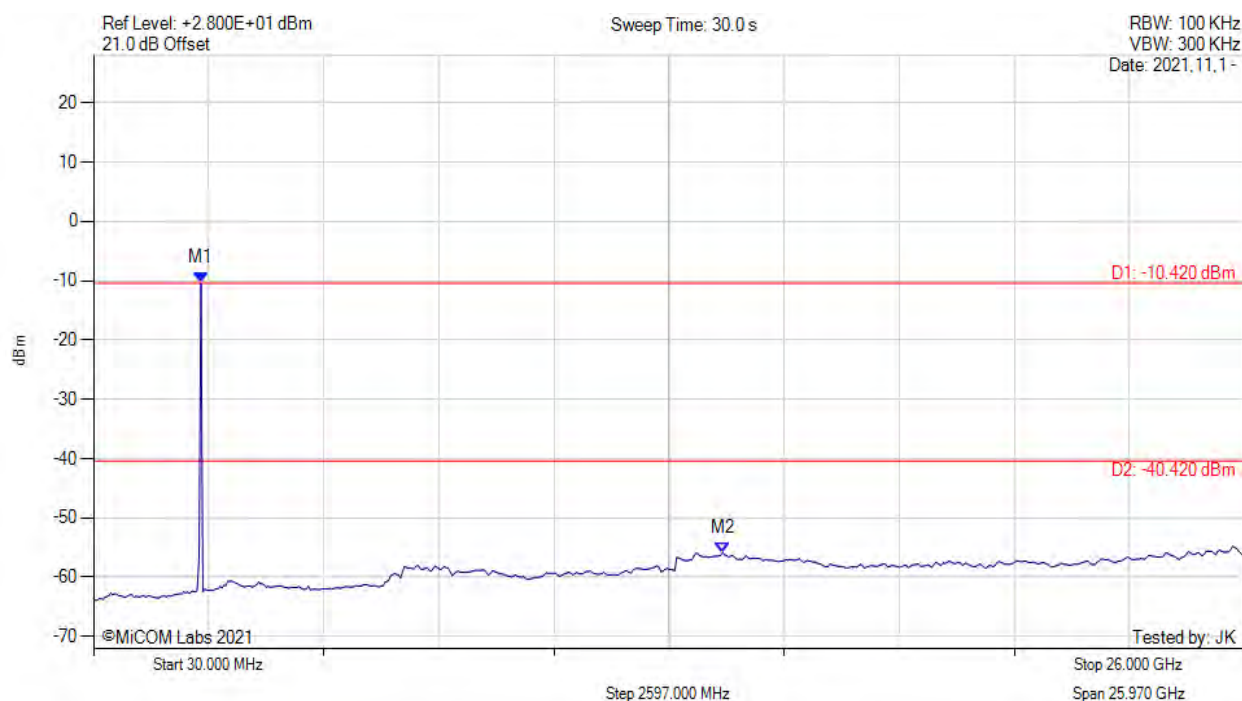


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2450.000 MHz : -10.420 dBm M2 : 14.230 GHz : -55.874 dBm	Limit: -40.42 dBm Margin: -15.45 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: QPSK, Channel: 2475.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

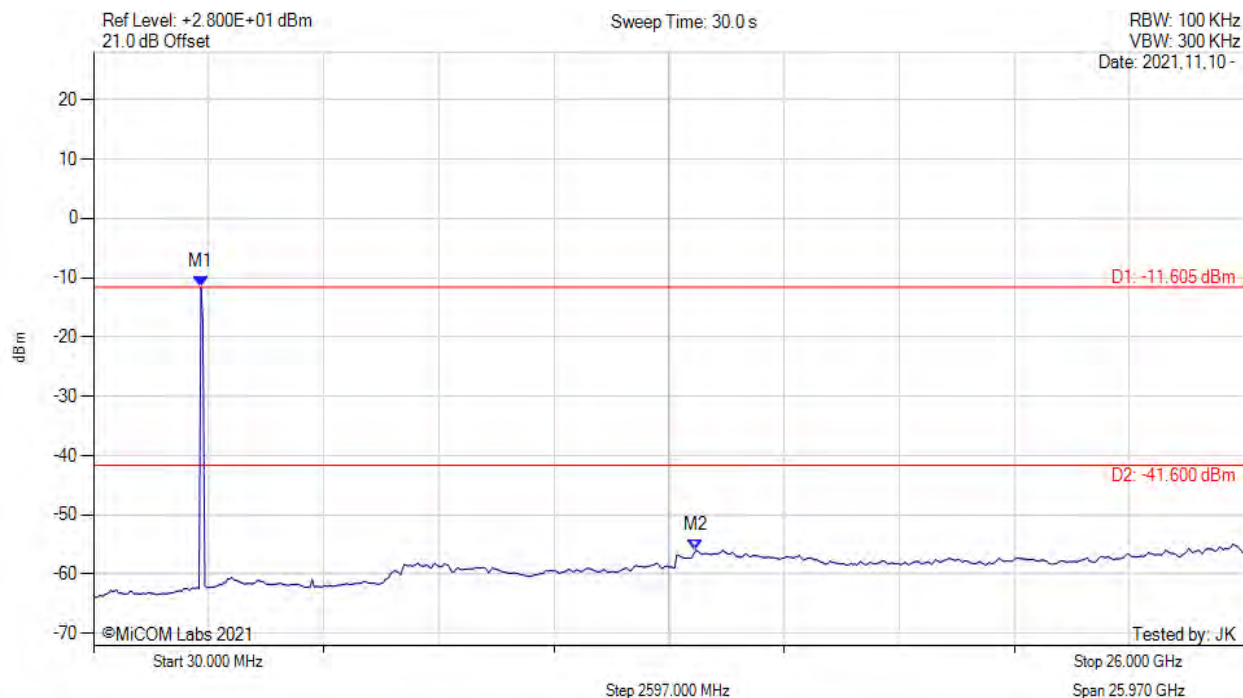


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2450.000 MHz : -11.605 dBm M2 : 13.620 GHz : -55.986 dBm	Limit: -41.60 dBm Margin: -14.39 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: QPSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

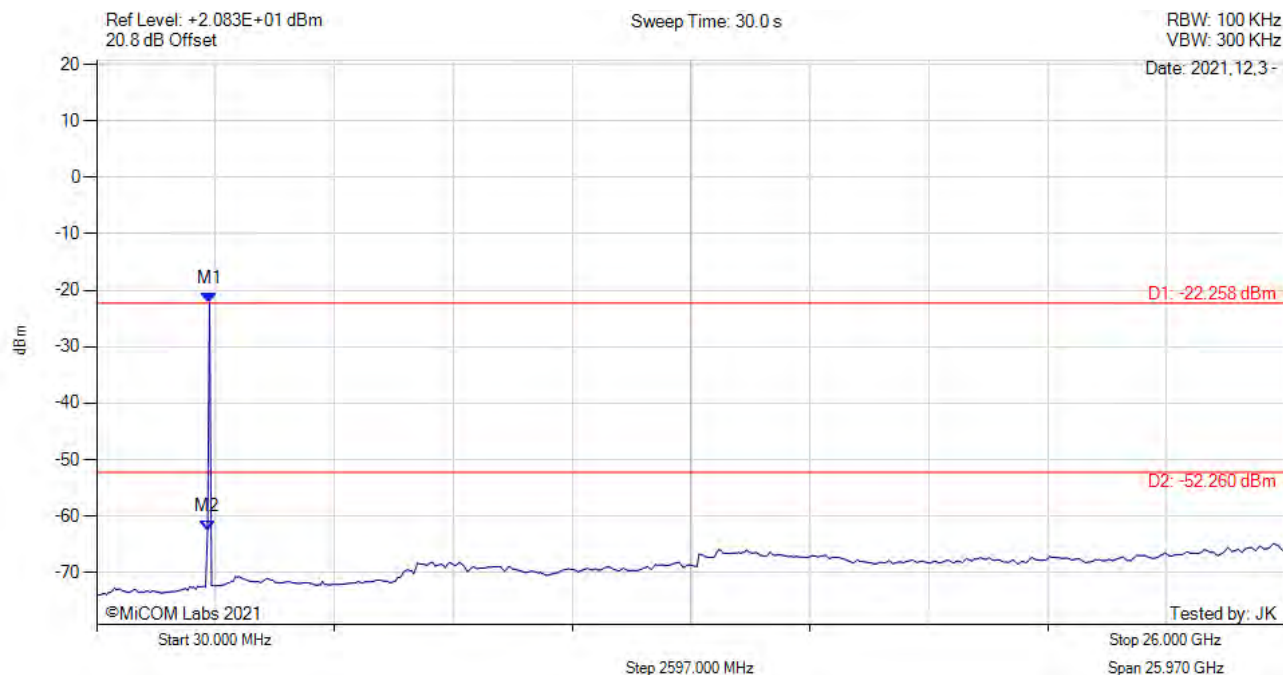

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2500.000 MHz : -22.258 dBm M2 : 2450.000 MHz : -62.554 dBm	Limit: -52.26 dBm Margin: -10.29 dB


[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: QPSK, Channel: 2405.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

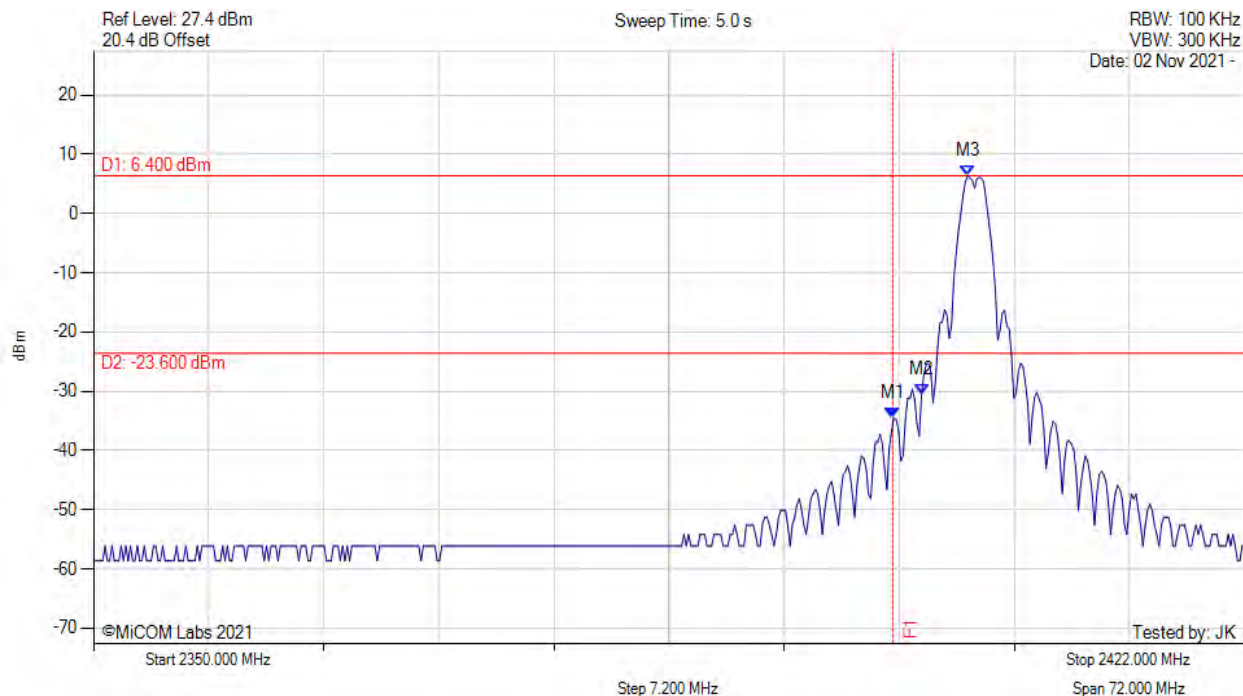


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2400.000 MHz : -34.541 dBm M2 : 2401.800 MHz : -30.549 dBm M3 : 2404.685 MHz : 6.400 dBm	Channel Frequency: 2405.00 MHz

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: QPSK, Channel: 2475.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

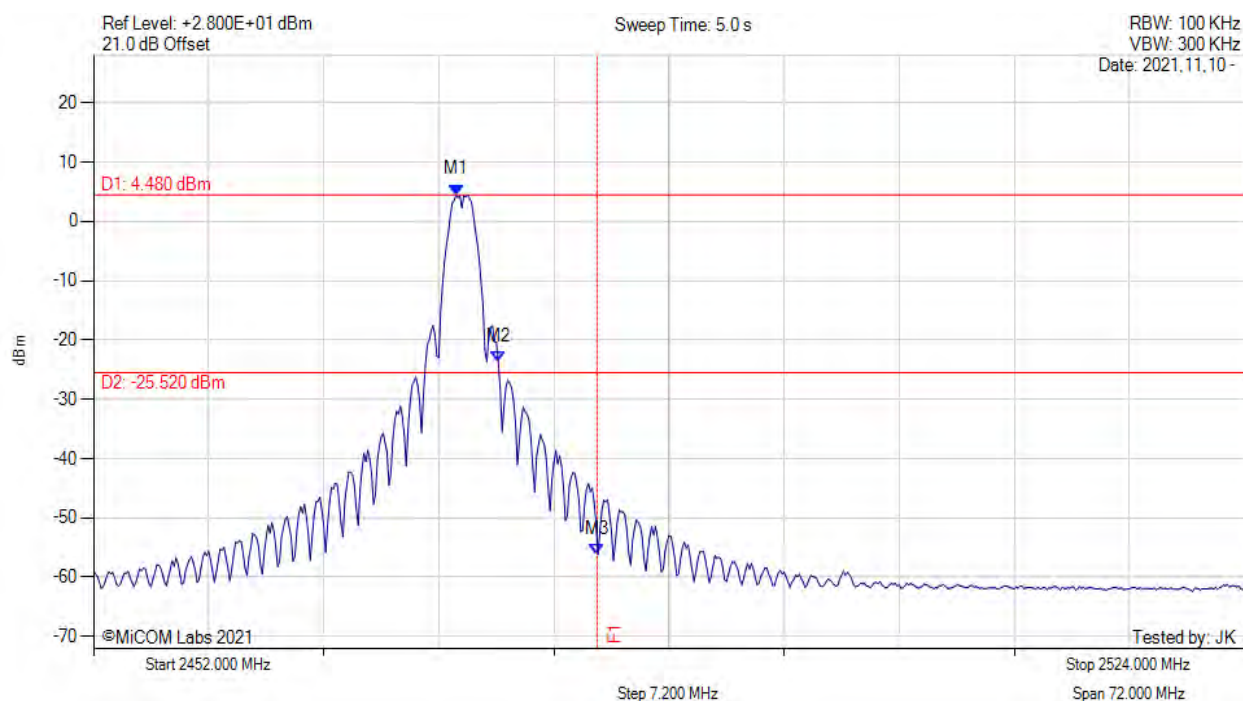


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2474.680 MHz : 4.480 dBm M2 : 2477.320 MHz : -23.718 dBm M3 : 2483.500 MHz : -56.102 dBm	Channel Frequency: 2475.00 MHz

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: QPSK, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

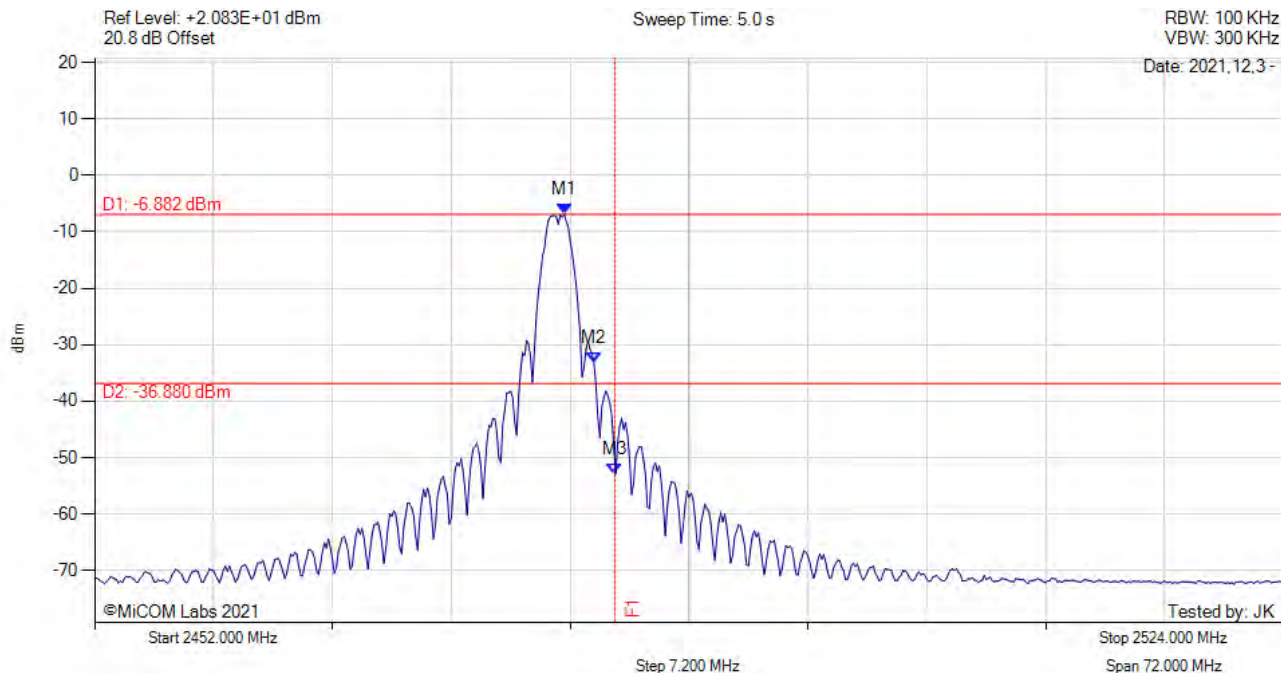

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVER Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2480.440 MHz : -6.882 dBm M2 : 2482.240 MHz : -33.126 dBm M3 : 2483.500 MHz : -52.851 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com