

MLT

MAX LIGHT

EXHIBIT B

Measurement report

Measurement Report

Product.....: External CD-RW
Manufacture.....: Mitsubishi Chemical / Verbatim Corp.
FCC ID.....: MDKMCASS600P00
Model.....: EDB-972
Report No......: MLT9802P15003
Test Date.....: MAR,30.1998

Test By

Max Light Technology Co.,Ltd.
Room 5, 8F, No.125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.
Tel: 886-2-2363-2447 Fax: 886-2-2363-2597



MAX LIGHT
MEASUREMENT REPORT

Page: 2

Table of Contents :

<i>I. General</i>	4.
<i>II. Conducted Emissions Requirements</i>	8.
<i>III. Radiated Emissions Requirements</i>	13.
<i>Appendix I (EUT Test Setup)</i>	20.



MAX LIGHT
MEASUREMENT REPORT

Page: 3

CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-1992. All test were conducted by **MLT (Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C** Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart B.

EUT : External CD-RW

Applicant : Mitsubishi Chemical / Verbatim Corp...
445 INDIO Way, SUNNYVALE,CA.

Manufacturer : Mitsubishi Chemical / Verbatim Corp...
445 INDIO Way, SUNNYVALE,CA.

Model No : EDB-972

FCC ID : MDKMCASS600P00

Prepared by : Country Huang
Country Huang

Approved by : Roger Chen
Roger Chen



MAX LIGHT
MEASUREMENT REPORT

Page: 4

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of Mitsubishi Chemical / Verbatim Corp. In support of a Class B Digital Device certification in accordance with Part2 Subpart J and Part 15 Subpart A and B of the Commission's Rules and Regulations.

1.2 Description of EUT

EUT : External CD-RW

**Applicant : Mitsubishi Chemical / Verbatim Corp.
445 INDIO Way, SUNNYVALE,CA.**

**Manufacturer : Mitsubishi Chemical / Verbatim Corp.
445 INDIO Way, SUNNYVALE,CA.**

Model No : EDB-972

FCC ID : MDKMCASS600P00

Power Type : 90V~260V AC

SCSI Cable : SCSI connector(Shielded, 60 cm long)

The EUT (External CD-RW) include a power supply and CD-RW (Mitsubishi CDRW226).The CD-RW (Mitsubishi CDRW226) have already gotten FCC ID (JURMP6200S). During testing the EUT (External CD-RW) was using the Easr-CD Pro 95 software to set at play and write mode for each emission measured. This was done in order to ensure that maximum emission levels were attained.



MAX LIGHT

MEASUREMENT REPORT

Page: 5

1.3 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-1991, following equipments were used as the support units.

Computer : COMPAQ

Model No. : 3284

Serial No. : L708BKTB4154

FCC ID : EJH3284

Monitor : COMPAQ

Model No. : 303U

Serial No. : 704AG19TG099

FCC ID : BJMCM14UH

Printer : PANASONIC

Model No. : KX-P1080I

Serial No. : 7CKAKE98933

FCC ID : ACJ5Z6KX-P10801

Modem

Model No. : Askey (External Fax / Data Modem)

Model No. : WS1414VE

Serial No. : IAH-10811

FCC ID : H8N1414VE

SCSI Card : Adaptec (PCI SCSI Card)

Model No. : AHA-2940

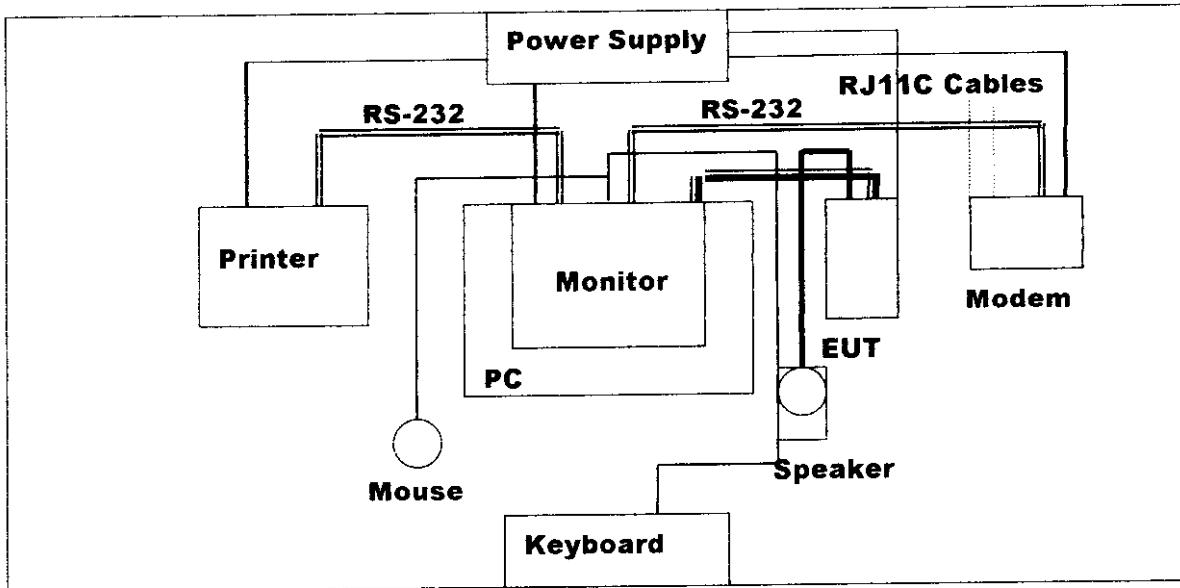
Serial No. : OBE0JT190J2K

FCC ID : FGTAHA2940-42

Speaker : Day Ter

Model No. : APOLLO 12

Serial No. : 123098712

1.4 Configuration of System Under Test

During testing the EUT(External CD-RW)r) was connected to Compaq PC's SCSI I/O port. So there is need for additional SISC Card. A speaker was connected to audio jack of EUT. A modem was connected to the series port and a printer was connected to the parallel port. Two telephone line(RJ11C cables) connected to the Phone Jack of modem and the Line Jack of modem. A keyboard and mouse were connected to the PS/2 port.

1.5 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-1992 "Measurement of unintentional Radiators."



MAX LIGHT

MEASUREMENT REPORT

Page: 7

1.6 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use, were investigated. The system's radiated and conducted emissions were investigated.



II. Conducted Emissions Requirements

2.1 General & Setup :

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.

2.2 Test Equipment List:

- A. EMCO 3825/2 LISN (S/N:2654)**
- B. EMCO 3825/2 LISN (S/N:2658)**
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)**
- D. Shielded Room (MLT-SR1)**



2.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Limits (dBuV)</i>
0.45 to 30	47.9



2.6 Measurement Data Of Conducted Emissions:

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

2.6.1 Conducted Emissions (Play Mode)

Manufacturer : *Mitsubishi Chemical / Verbatim Corp..*

Model No : *EDB-972*

EUT : *External CD-RW*

Power Line Conducted Emissions (Class B)			
Conductor	Frequency (MHz)	Peak Amplitude (dBuV)	Limits (dBuV)
L1	0.45	36.15	47.9
	3.55	39.33	47.9
	8.91	42.15	47.9
	18.11	41.33	47.9
	20.35	40.58	47.9
	24.08	39.16	47.9
	30.00	30.88	47.9
L2	0.45	36.05	47.9
	3.55	39.88	47.9
	8.91	41.85	47.9
	18.11	40.43	47.9
	20.35	41.55	47.9
	24.08	38.59	47.9
	30.00	31.04	47.9

Notes :

- 1.L1: One end & Ground L2: The other end & Ground**
- 2.Height of table on which the EUT was placed : 0.8 m.**
- 3.The above test results are obtained under the normal condition.**

2.6.2 Conducted Emissions (Write Mode)**Manufacturer** : Mitsubishi Chemical / Verbatim Corp..**Model No** : EDB-972**EUT** : External CD-RW

Power Line Conducted Emissions (Class B)			
Conductor	Frequency (MHz)	Peak Amplitude (dBuV)	Limits (dBuV)
L1	0.45	38.45	47.9
	3.83	39.88	47.9
	9.75	42.35	47.9
	18.55	42.36	47.9
	21.45	39.27	47.9
	24.08	40.03	47.9
	30.00	36.43	47.9
L2	0.45	36.44	47.9
	3.83	39.52	47.9
	9.75	41.08	47.9
	18.55	41.73	47.9
	21.45	39.01	47.9
	24.08	39.85	47.9
	30.00	35.39	47.9

Notes :

- 1.L1: One end & Ground L2: The other end & Ground
- 2.Height of table on which the EUT was placed : 0.8 m.
- 3.The above test results are obtained under the normal condition.



MAX LIGHT
MEASUREMENT REPORT

Page: 15

3.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

3.5 Radiated Emissions Limits:

Frequency range (MHz)	Peak(dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54



III. Radiated Emissions Requirements

3.1 General & Setup :

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591EM Spectrum Analyzer, EMCO Biconical Antenna (Model 3142) for 30-1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz, and the analyzer was operated in the quasi-peak detection mode. The highest emission amplitudes relative to the appropriate limit were measured and recorded in paragraph 3.6.

3.2 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)**
- B. HP 8447D Pre Amplifier (S/N:2944A08954)**
- C. EMCO 3142 Biconilog Antenna (S/N:1184)**
- D. HP 8590A 10KHz-1.5GHz Spectrum Analyzer (S/N:5212A000211)**
- E. HP 9872B Plotter (S/N:20447A03436)**

3.6 Measurement Data Of Radiated Emissions:**3.6.1 Open Field Radiated Emissions (Play Mode)**

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Manufacturer : Mitsubishi Chemical / Verbatim Corp..

Model No : EDB-972

EUT : External CD-RW

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
39.99	30.15	1	0	40	-9.85
119.95	38.43	1.5	360	43.5	-5.07
135.48	34.35	2	270	43.5	-9.15
143.95	30.75	2	200	43.5	-12.75
152.39	34.55	1.5	360	43.5	-8.95
160.00	40.25	1.5	0	43.5	-3.25
199.99	41.05	1	0	43.5	-2.45
400.00	35.58	2	270	46	-10.42
560.06	38.15	2	360	46	-7.85

Notes : 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter (30-1000MHz)

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

**5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss
+Antenna factor**

(Auto calculate in spectrum analyzer)

3.6.2 Open Field Radiated Emissions (Play Mode)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Manufacturer : *Mitsubishi Chemical / Verbatim Corp...*
Model No : *EDB-972*
EUT : *External CD-RW*

Radiated Emissions (VERTICAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
39.99	31.54	1	360	40	-8.46
119.95	38.55	1.5	360	43.5	-4.95
135.48	36.15	1.5	270	43.5	-7.35
143.95	36.85	1	270	43.5	-6.65
152.39	36.58	1.5	0	43.5	-6.92
160.00	40.35	1	360	43.5	-3.15
199.99	40.33	1.5	360	43.5	-3.17
400.00	34.58	2	270	46	-11.42
560.06	39.45	1	270	46	-6.55

*12/12/2012
V. V. V.***Notes : 1.Margin= Amplitude - Limits****2.Distance of Measurement : 3 Meter (30-1000MHz)****3.Height of table for EUT placed: 0.8 Meter.****4.ANT= Antenna height.****5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss****+Antenna factor****(Auto calculate in spectrum analyzer)**

3.6.3 Open Field Radiated Emissions (Write Mode)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Manufacturer : Mitsubishi Chemical / Verbatim Corp.

Model No : EDB-972

EUT : External CD-RW

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
39.85	30.05	1	0	40	-9.95
119.95	38.85	1.5	360	43.5	-4.65
135.80	34.08	1.5	360	43.5	-9.42
152.39	34.98	2	360	43.5	-8.52
160.05	40.13	2	0	43.5	-3.37
199.99	41.01	1.5	0	43.5	-2.49
328.35	37.15	2	270	46	-8.85
400.08	38.55	2	270	46	-7.45
599.98	39.03	1.5	0	46	-6.97

Notes : 1.Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter (30-1000MHz)

3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

**5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss
+Antenna factor**

(Auto calculate in spectrum analyzer)



MAX LIGHT

MEASUREMENT REPORT

Page: 19

3.6.4 Open Field Radiated Emissions (Write Mode)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Manufacturer : Mitsubishi Chemical / Verbatim Corp.

Model No : EDB-972

EUT : External CD-RW

Radiated Emissions (VERTICAL)						
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)	
39.85	31.44	1	360	40	-8.56	
119.95	38.75	1.5	360	43.5	-4.75	
135.80	37.98	1.5	270	43.5	-5.52	
152.39	37.01	1	0	43.5	-6.49	
160.05	40.05	1	360	43.5	-3.45	
199.99	40.33	1.5	360	43.5	-3.17	
328.35	36.58	2	270	46	-9.42	
400.08	39.18	1	270	46	-6.82	
599.98	39.73	1	0	46	-6.27	

Notes : 1. Margin= Amplitude - Limits

2.Distance of Measurement : 3 Meter (30-1000MHz)

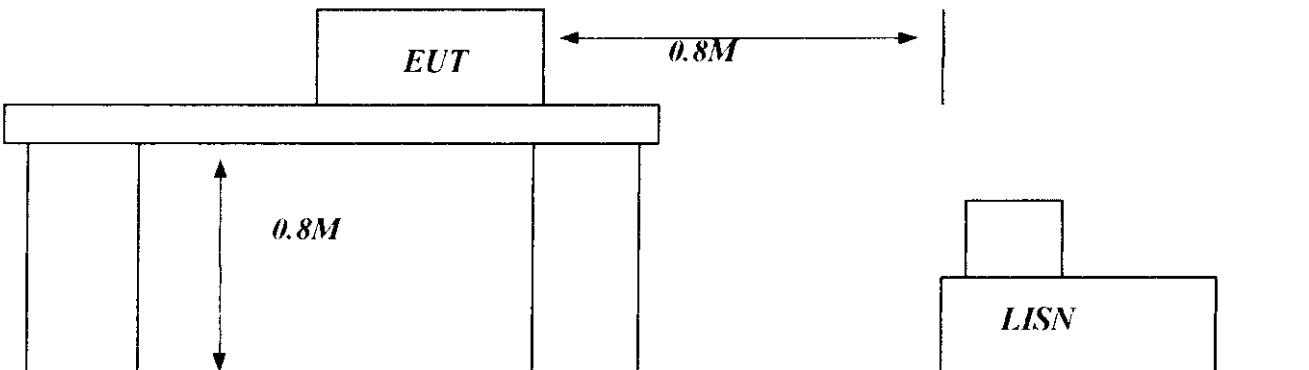
3.Height of table for EUT placed: 0.8 Meter.

4.ANT= Antenna height.

5.Amplitude= Reading Amplitude -Amplifier gain+Cable loss

+Antenna factor

(Auto calculate in spectrum analyzer)

*Appendix I- EUT Test SETUP***MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE**

Metal floor surfaced with 30mm of insulating material

*Appendix I- EUT Test SETUP***MEASUREMENT OF RADIATED EMISSION**