

EXHIBIT 4

Test Report

Test Report

TTEMC-F98119

APPLICATION FOR CERTIFICATION
On Behalf of
Synnex Technology International Corp.
SERVER

Model No. : (1) LEMEL SERVER (2) MITAC SERVER

FCC ID : (1) MDOLEMELSERVER
(2) MDOMITACSERVER

Prepared for : Synnex Technology International Corp.
4th Fl., No 75, Sec. 3, Ming Sheng E. Rd.,
Taipei, Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133

File Number : ATM-G98387
Report Number : TTEMC-F98119
Date of Test : Jul. 03/17, 1997
Date of Report : Jul. 20, 1997

STATEMENT:

The model no. LEMEL SERVER with ID No. of MDOLEMELSERVER and model no. MITAC SERVER with ID No. of MDOMITACSERVER are identical except for different trade name/brand, model number and FCC ID.

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Details of Support Equipments	5
1.3. Description of Test Facility	7
2. POWERLINE CONDUCTED TEST	8
2.1. Test Equipment	8
2.2. Block Diagram of Test Setup	8
2.3. Conducted Powerline Emission Limit (CLASS B)	8
2.4. EUT Configuration on Measurement	9
2.5. Operating Condition of EUT	9
2.6. Test Procedure	10
2.7. Line Conducted RF Voltage Measurement Results	10
3. RADIATED EMISSION TEST	15
3.1. Test Equipment	15
3.2. Block Diagram of Test Setup	15
3.3. Radiation Limit (CLASS B)	16
3.4. EUT Configuration on Measurement	16
3.5. Operating Condition of EUT	16
3.6. Test Procedure	17
3.7. Radiated Emission Noise Measurement Results	18
4. DEVIATION TO TEST SPECIFICATIONS	22
5. PHOTOGRAPHS	23
5.1. Photos of Powerline Conducted Measurement	23
5.2. Photos of Radiated Measurement at Open Field Test Site	24

TOKIN-FOED

TEST REPORT CERTIFICATION

Applicant : Synnex Technology International Corp.
Manufacturer : Synnex Technology International Corp., Distribution Center
FCC ID : (1) MDOLEMELSERVER (2) MDOMITACSERVER
EUT Description : SERVER
(A) MODEL NO. : (1) LEMEL SERVER (2) MITAC SERVER
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : AC 120V / 60Hz

Measurement Procedure Used :


FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1997
AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions. The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliant with the FCC official limits. TAIWAN TOKIN EMC ENG. CORP. recommends that this data was submitted for FCC certification purposes if a 6dB margin below FCC limits was obtained.


This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Jul. 03/08, 1998

Prepared by : 
(CHERRY WANG)

Test Engineer :  0729 '98
(ALLEN WANG)

Approve & Authorized Signer :

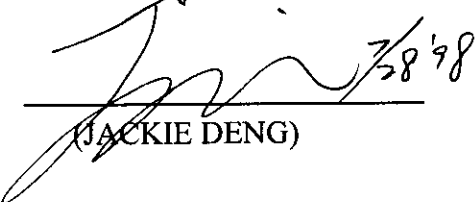 7/8 '98
(JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	SERVER
Model Number	:	(1) LEMEL SERVER (2) MITAC SERVER LEMEL SERVER for LEMEL use. MITAC SERVER for MITAC use.
FCC ID	:	(1) MDOLEMELSERVER (2) MDOMITACSERVER above two ID No. are identical except for different trade name/brand, model number. MDOLEMELSERVER for LEMEL use. MDOMITACSERVER for MITAC use.
Applicant	:	Synnex Technology International Corp. 4th F1., No 75, Sec. 3, Ming-Sheng E. Rd., Taipei, Taiwan, R.O.C.
Manufacturer	:	Synnex Technology International Corp. Distribution Center 15 Tinghu 9th St., Kueishan Hsiang, Taoyuan Hsien, Taiwan R.O.C.
Trade Name/Brand	:	(1) LEMEL (2) MITAC
Server Case	:	Chenbro, M/N A9881
CPU/External Clock Speed	:	Intel Pentium II -300MHz / 66MHz
Main Board	:	Gigabyte, M/N GA686DLX FCC ID. By DoC
Switching Power Supply	:	Zippy (Emacs), M/N AP2-5400F-RV AC Input: 115/230V, 60/50Hz, 400W
Floppy Driver 3.5"	:	Panasonic, M/N JU-257A606P
Hard Disk Driver	:	Conner, M/N CFA540A

VGA Card	:	Cardex, M/N S3 Trio64 V+ FCC ID ICUVGA-GW503B
LAN Card	:	D-Link, M/N DFE-530TX FCC ID EJMPCEDPCLA82XX
Power Cord	:	Non-shielded, Detachable, 1.8m
Date of Receipt of Sample	:	Jun. 25, 1998
Date of Test	:	Jul. 03/08, 1998

1.2. Details of Support Equipments

1.2.1. COLOR MONITOR

Model Number	:	CM752ET-311
Serial Number	:	T8E004368
FCC ID	:	by DoC
Manufacturer	:	Hitachi Technology (Taiwan) Ltd.
Data Cable	:	Shielded, Detachable, 1.7m
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	RT101
Serial Number	:	32240070
FCC ID	:	AQ6-MTN4XZ15
Manufacturer	:	DIGITAL
Data Cable	:	Shielded, Undetachable, 1.9m

1.2.3. PRINTER

Model Number	:	2225C+
Serial Number	:	3007S68643
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, M/N 82241A
Power Cord	:	Non-Shielded, Undetachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MODEM #1

Model Number : 1414
 Serial Number : 950110299
 FCC ID : IFAXDM1414
 Manufacturer : Aceex
 Data Cable : Shielded, Detachable, 1.2m
 Power Adapter : Amigo, Model AM-91000A
 Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM #2

Model Number : 1414
 Serial Number : 970024519
 FCC ID : IFAXDM1414
 Manufacturer : Aceex
 Data Cable : Shielded, Detachable, 1.2m
 Power Adapter : Amigo, Model AM-91000A
 Non-Shielded, Undetachable, 1.8m

1.2.6. MOUSE

Model Number : M-S34
 Serial Number : LZA65200685
 FCC ID : DZL210472
 Manufacturer : Logitech
 Data Cable : Non-Shielded, Undetachable, 1.9m

1.2.7. EARPHONE

Model Number : N/A
 Serial Number : N/A
 Manufacturer : Cathay Pacific
 Data Cable : Non-Shielded, Undetachable, 1.3m

1.2.8. PARTNER PERSONAL COMPUTER

Model Number : IPV3120400
 Serial Number : N/A
 FCC ID : E5YM410G586IPV
 Manufacturer : Diamond Flower Electric Instrument Co., Ltd.
 Switching Power Supply : DFI, M/N DPS-200D
 Hard Disk Driver : Quantum, M/N Bigfoot
 Floppy Driver 3.5" : Panasonic, M/N JU-2574605P
 Disk Ctrl Card : Within Mother Board
 Serial/Parallel Card : Within Mother Board
 VGA Card : Dataexpert Corp.
 M/N CP765V2, S/N E700492311
 FCC ID LUT-CP765
 LAN Card : D-Link, M/N DFE-500TX
 FCC ID K2APC5003
 Power Cord : Shielded, Detachable, 1.8m

1.2.9. PARTNER MONITOR

Model Number	:	PM36A
Serial Number	:	W70205166A
FCC ID	:	LLW9ZB1564
Manufacturer	:	Funai Electric Company of Taiwan
Data Cable	:	Shielded, Undetachable, 1.2m
Power Cord	:	Non-Shielded, Detachable, 1.5m

1.2.10. PARTNER KEYBOARD

Model Number	:	DFK191F
Serial Number	:	N/A
FCC ID	:	FBX5E9DFK191F
Manufacturer	:	Datacomp Electronics Co., Ltd.
Data Cable	:	Shielded, Undetachable, 1.2m

1.2.11. PARTNER MOUSE

Model Number	:	PC7XS-AA
Serial Number	:	LT41804589
FCC ID	:	DZL210513
Manufacturer	:	Digital
Data Cable	:	Non-Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 2 Open Site)	:	Jul. 15, 1996 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP Lab Code	:	200077-0


2. POWERLINE CONDUCTED TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS 10	844591/015	Nov.25, 97'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-1370-9	Jun.03, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-1370-10	Jun.03, 98'	1 Year

2.2. Block Diagram of Test Setup

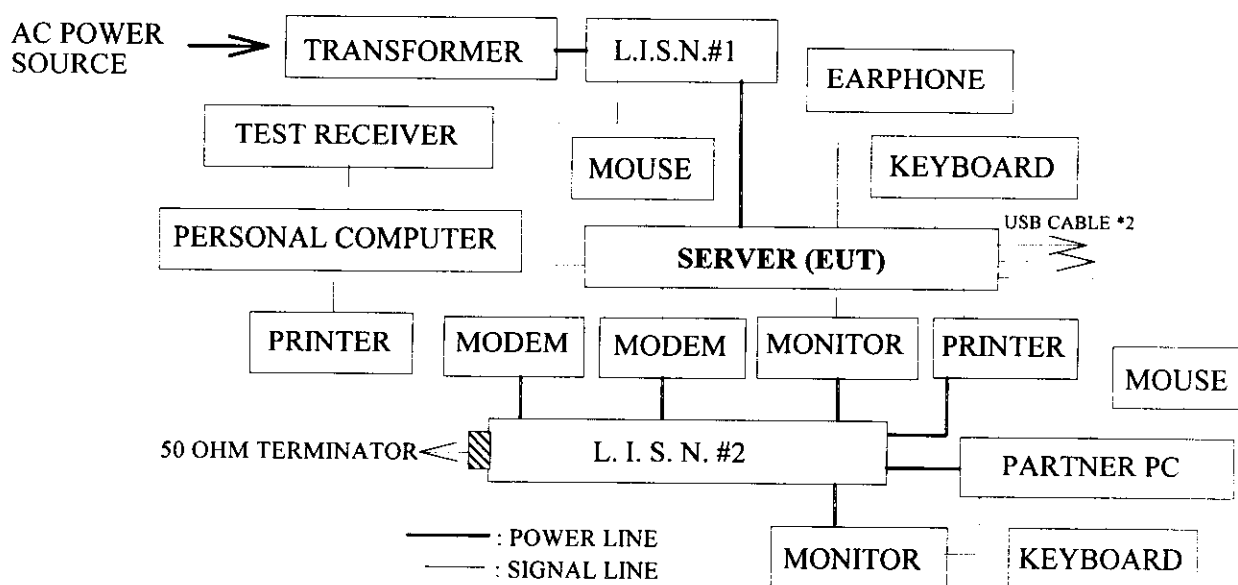

2.3. Conducted Powerline Emission Limit (CLASS B)

Frequency	Maximum RF Line Voltage	
	uV	dBuV
0.45MHz ~ 30MHz	250	48

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT Configuration on Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. SERVER (EUT)

Model Number	:	(1) LEMEL SERVER (2) MITAC SERVER
Serial Number	:	N/A
FCC ID	:	(1) MDOLEMELSERVER (2) MDOMITACSERVER
Manufacturer	:	Synnex Technology International Corp. Distribution Center
Trade Name/Brand	:	(1) LEMEL (2) MITAC
Server Case	:	Chenbro, M/N A9881
CPU/ Ext. Clock Speed	:	Intel Pentium II-300MHz / 66MHz
Main Board	:	Gigabyte, M/N GA686DLX FCC ID. By DoC
Switching Power Supply	:	Zippy (Emacs), M/N AP2-5400F-RV
Floppy Driver 3.5"	:	Panasonic, M/N JU-257A606P
Hard Disk Driver	:	Conner, M/N CFA540A
VGA Card	:	Cardex, M/N S3 Trio64 V+ FCC ID ICUVGA-GW503B
LAN Card	:	D-Link, M/N DFE-530TX FCC ID EJMPCEDPCLA82XX
Power Cord	:	Non-shielded, Detachable, 1.8m

2.4.2. Support Simulators : As in section 1.2.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown on 2.2.
- 2.5.2. Turned on the power of all equipments.
- 2.5.3. Server (EUT) read data from disk.
- 2.5.4. Server (EUT) sent "H" character to monitor and the screen displayed and filled with "H" pattern by VGA resolution 1024*768/85Hz.
- 2.5.5. Server (EUT) sent "H" character to printer, the printer printed "H" pattern on paper.
- 2.5.6. Server (EUT) read data from floppy disk and then wrote the data into floppy disk.
- 2.5.7. Server (EUT) read and wrote data from modem and through Lan Card sent "H" character to Partner PC, the screen of monitor displayed and filled with "H" pattern.
- 2.5.8. The other peripheral devices were drove and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N. #1) and the other peripheral devices power cord were connected to the power mains through a line impedance stabilization network (L.I.S.N. #2) This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-1992 during conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESHS 10) was set at 10KHz.

2.7. Line Conducted RF Voltage Measurement Results

All the test results are listed in the following next pages.

Test Data : Jul. 03, 1998 Temperature : 28 °C Humidity : 59 %

Reference Data # : # 1, 3 & # 2, 4

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:

#53-11 Tingfu Tsun, Linkou,


Taipei, Taiwan R.O.C.

Tel: 02-26092133 Fax: 02-26099303

Data#: 1

File#: SYNNER.EMI

Date: 1998-07-03 Time: 09:52:13

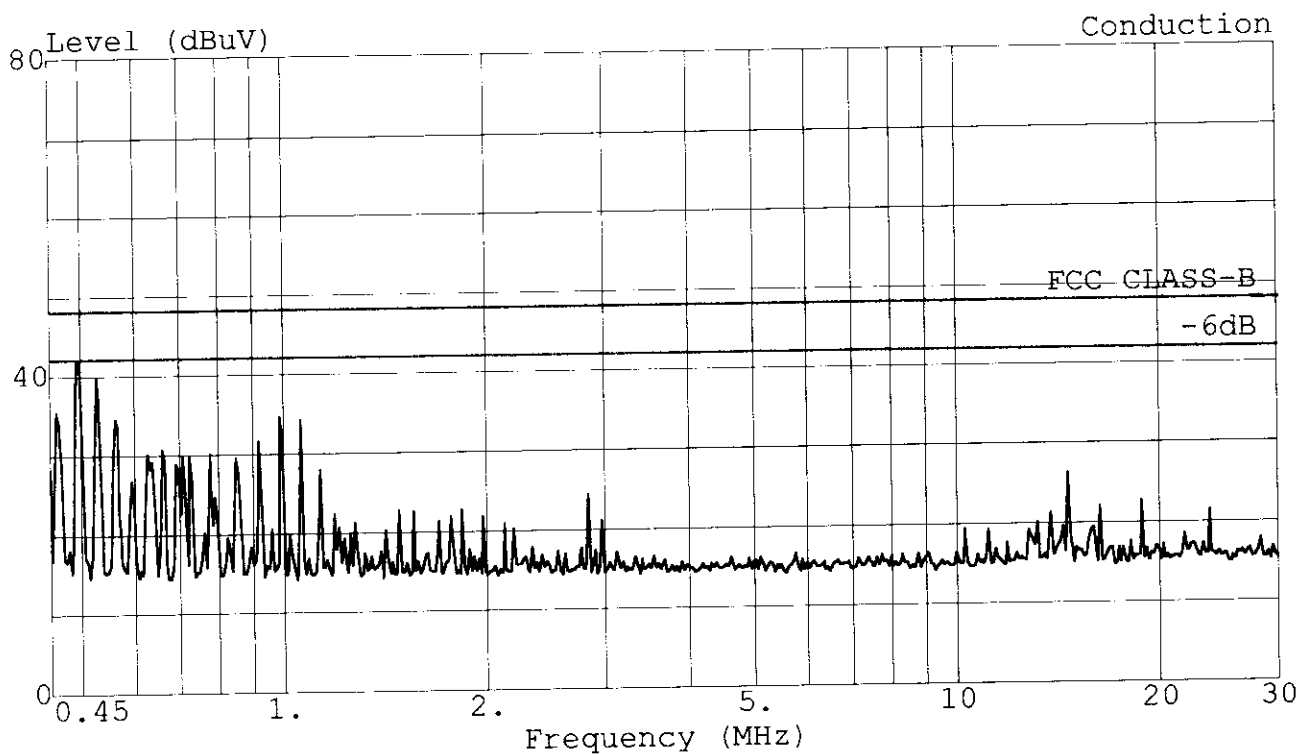

Trace:

Limit: FCC CLASS-B

Probe: LISN(FCC)8-1370-10 NEUTRAL

Ref Trace:

EUT : SERVER

Power: 120Vac/60Hz

Memo : M/N:LEMEL SERVER/MITAC SERVER

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:
 #53-11 Tingfu Tsun, Linkou,
 Taipei, Taiwan R.O.C.
 Tel:02-26092133 Fax:02-26099303

Data#: 3 File#: SYNNER.EMI

Date: 1998-07-03 Time: 09:55:22

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : SERVER

Power: 120Vac/60Hz

Memo : M/N:LEMEL SERVER/MITAC SERVER

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.494	41.96	-6.04	48.00	41.82	0.10	0.04	0.00	QP
2	0.528	39.74	-8.26	48.00	39.60	0.10	0.04	0.00	QP
3	0.562	34.58	-13.42	48.00	34.44	0.10	0.04	0.00	QP
4	0.987	34.72	-13.28	48.00	34.57	0.10	0.05	0.00	QP
5	1.060	34.27	-13.73	48.00	34.12	0.10	0.05	0.00	QP
6	14.630	26.33	-21.67	48.00	26.04	0.20	0.10	0.00	QP

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:


#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 2 File#: SYNNER.EMI

Date: 1998-07-03 Time: 09:53:49

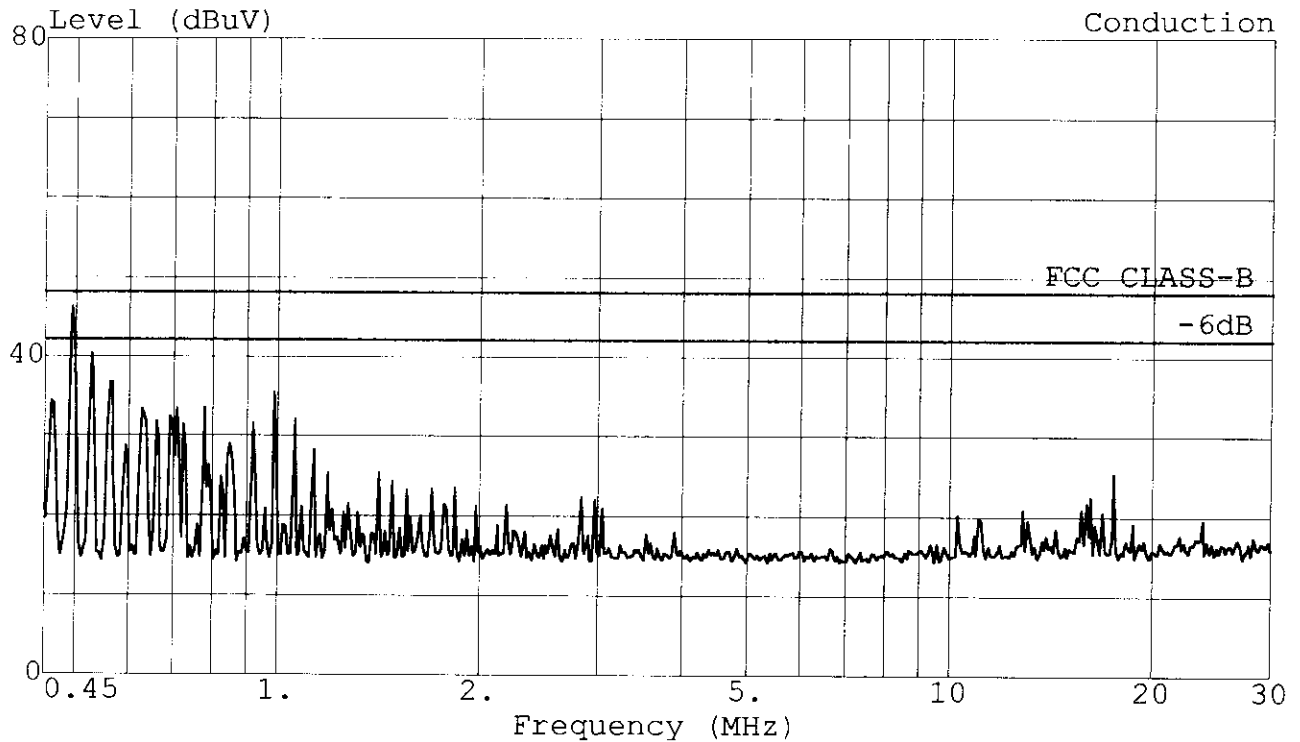

Trace:

Limit: FCC CLASS-B

EUT : SERVER

Power: 120Vac/60Hz

Memo : M/N:LEMEL SERVER/MITAC SERVER

Ref Trace:

Probe: LISN(FCC)8-1370-10 LINE

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:

#53-11 Tingfu Tsun, Linkou,

Taipei, Taiwan R.O.C.

Tel:02-26092133 Fax:02-26099303

Data#: 4 File#: SYNNER.EMI

Date: 1998-07-03 Time: 09:59:10

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : SERVER

Power: 120Vac/60Hz

Memo : M/N:LEMEL SERVER/MITAC SERVER

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1 !	0.494	44.81	-3.19	48.00	44.67	0.10	0.04	0.00	QP
2	0.528	40.37	-7.63	48.00	40.23	0.10	0.04	0.00	QP
3	0.562	36.72	-11.28	48.00	36.58	0.10	0.04	0.00	QP
4	0.777	33.58	-14.42	48.00	33.43	0.10	0.05	0.00	QP
5	0.987	35.54	-12.46	48.00	35.39	0.10	0.05	0.00	QP
6	17.525	25.45	-22.55	48.00	25.07	0.23	0.15	0.00	QP

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESVP	893202/001	Aug. 04, 97'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1240	Jan. 14, 98'	1 Year
3.	Broadband Antenna	Schwarzbeck	UHALP 9108-A	0139	Jan. 14, 98'	1 Year
4.	Pre-Amplifier	HP	8449B	3008A00529	Feb. 12. 98'	1 Year
5.	Spectrum Analyzer (1GHz~2GHz)	HP	8593A	3212A01727	Aug. 02, 97'	1 Year
6.	Double Ridge Horn. Antenna	EMCO	3115	9112-3775	Apr. 07, 98'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

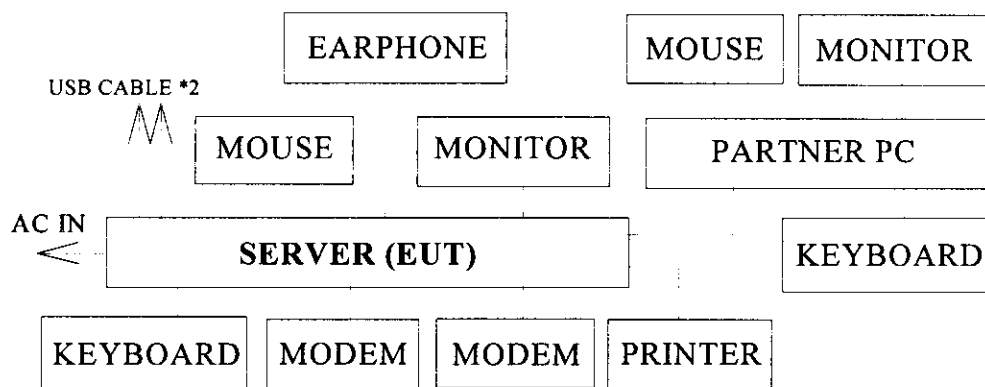

3.2.2. Open Field Test Site

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1METER TO 4 METERS

3 METERS

EUT

0.8
METER

TURN TABLE

GROUND PLANE

3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
MHz	Meters	uV/M	dBuV/M (Q.P.)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
1000 ~ 2000	3	53.5 (Average)	
1000 ~ 2000	3	73.5 (Peak)	

Remark : (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 (2) The tighter limit applies at the edge between two frequency bands.
 (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT Configuration on Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which was listed in 2.5.

3.6. Test Procedure

3.6.1. 30MHz ~ 1GHz frequency measurement :

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth setting on the field strength meter (R&S TEST RECEIVER ESVP) was 120KHz.

All the test results are listed in section 3.7.1.

3.6.2. 1GHz ~ 2GHz frequency measurement :

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level, EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna was fixed at 1 meter high (maximum emission level receiving position) above the ground.

A calibrated Horn Antenna was used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement, and both average and peak emission level were recorded form spectrum analyzer. In order to find the maximum emission level, all the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The resolution bandwidth of spectrum analyzer was setting at 1MHz.

All the test results are listed in section 3.7.2.

3.7. Radiated Emission Noise Measurement Results

3.7.1. 30MHz to 1GHz frequency measurement :

Date of Test : Jul. 08, 1997 Temperature : 23 °C
 EUT : SERVER Humidity : 68 %

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dBuV/m
			Horizontal dBuV		Horizontal dBuV/m	Limits dBuV/m	
35.901	21.76	1.67	- 1.60		21.83	40.00	18.17
75.238	12.76	2.40	16.10		31.26	40.00	8.74
79.403	13.87	2.48	16.00		32.35	40.00	7.65
84.400	15.01	2.55	6.80		24.36	40.00	15.64
120.060	19.40	3.05	6.50		28.95	43.50	14.55
134.861	20.46	3.21	- 0.90		22.77	43.50	20.73
140.000	20.85	3.33	2.30		26.48	43.50	17.02
179.999	21.74	3.82	0.80		26.36	43.50	17.14
200.000	22.19	3.98	7.50		33.67	43.50	9.83
* 210.000	22.18	4.13	13.20		39.51	43.50	3.99
230.000	22.67	4.34	6.30		33.31	46.00	12.69
240.000	22.56	4.49	6.60		33.65	46.00	12.35
280.001	25.32	4.86	1.00		31.18	46.00	14.82
320.000	13.63	5.36	13.40		32.39	46.00	13.61
340.000	14.36	5.48	10.60		30.44	46.00	15.56
360.000	15.11	5.76	9.60		30.47	46.00	15.53
380.000	16.59	5.92	13.90		36.41	46.00	9.59
400.000	17.02	6.08	8.70		31.80	46.00	14.20
440.001	17.14	6.62	2.60		26.36	46.00	19.64
450.000	17.31	6.67	3.60		27.58	46.00	18.42
470.000	17.30	6.89	1.70		25.89	46.00	20.11
520.040	18.04	7.33	0.90		26.27	46.00	19.73

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 210.000MHz with corrected signal level of 39.51dBuV/m (limit is 43.5dBuV/m) when the antenna was at horizontal polarization and was at 1.8m high and the turn table was at 240 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Date of Test : Jul. 08, 1997 Temperature : 23 °C
 EUT : SERVER Humidity : 68 %

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBuV	Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
36.048	21.21	1.67	5.60	28.48	40.00	11.52
54.134	14.70	2.04	5.40	22.14	40.00	17.86
* 74.708	15.14	2.40	18.70	36.24	40.00	3.76
78.797	15.19	2.43	9.60	27.22	40.00	12.78
84.106	15.70	2.55	10.40	28.65	40.00	11.35
120.060	18.56	3.05	9.00	30.61	43.50	12.89
134.858	19.11	3.21	1.60	23.92	43.50	19.58
140.000	19.03	3.33	2.40	24.76	43.50	18.74
200.000	20.98	3.98	6.00	30.96	43.50	12.54
210.000	22.36	4.13	8.40	34.89	43.50	8.61
230.000	21.75	4.34	4.80	30.89	46.00	15.11
240.000	23.44	4.49	4.00	31.93	46.00	14.07
252.879	23.61	4.62	- 3.00	25.23	46.00	20.77
269.728	25.42	4.85	- 2.60	27.67	46.00	18.33
320.000	14.33	5.36	12.60	32.29	46.00	13.71
340.000	14.58	5.48	10.60	30.66	46.00	15.34
360.000	14.68	5.76	9.80	30.24	46.00	15.76
380.000	15.49	5.92	7.70	29.11	46.00	16.89
400.000	15.96	6.08	4.40	26.44	46.00	19.56
404.591	16.06	6.08	6.00	28.14	46.00	17.86
440.002	16.52	6.62	0.90	24.04	46.00	21.96
520.032	19.36	7.33	- 0.30	26.39	46.00	19.61

- Remark :
1. All readings are Quasi-Peak values.
 2. The worst emission was detected at 74.708MHz with corrected signal level of 36.24dBuV/m (limit is 40dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 45 ° .
 3. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

3.7.2. 1GHz to 2GHz frequency measurement :

Date of Test : Jul. 08, 1998 Temperature : 23 °C
 EUT : SERVER Humidity : 68 %

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Pre-Amp Factor dB	Meter Reading Horizontal dBuV	RF Voltage Horizontal dBuV/m	(Average) Limits dBuV/m
1200.0	24.9	1.6	33.4	38.4	31.5	53.5
1500.0	25.7	1.8	33.1	16.4	10.8	53.5
1800.0	27.3	1.8	32.8	21.2	17.5	53.5

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Pre-Amp Factor dB	Meter Reading Horizontal dBuV	RF Voltage Horizontal dBuV/m	(Peak) Limits dBuV/m
1200.0	24.9	1.6	33.4	40.3	33.4	73.5
1500.0	25.7	1.8	33.1	23.2	17.6	73.5
1800.0	27.3	1.8	32.8	26.4	22.7	73.5

Date of Test : Jul. 08, 1998 Temperature : 23 °C
 EUT : SERVER Humidity : 68 %

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Pre-Amp Factor dB	Meter Reading Vertical dBuV	RF Voltage Vertical dBuV/m	(Average) Limits dBuV/m
1200.0	24.9	1.6	33.4	34.9	28.0	53.5
1500.0	25.7	1.8	33.1	19.1	13.5	53.5
1800.0	27.3	1.8	32.8	21.0	17.3	53.5

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Pre-Amp Factor dB	Meter Reading Vertical dBuV	RF Voltage Vertical dBuV/m	(Peak) Limits dBuV/m
1200.0	24.9	1.6	33.4	38.8	31.9	73.5
1500.0	25.7	1.8	33.1	24.3	18.7	73.5
1800.0	27.3	1.8	32.8	26.0	22.3	73.5

4. DEVIATION TO TEST SPECIFICATIONS

【 NONE 】