



FCC ID: MEUSKYGUARD

Report No.: ER/2008/30007

Issue Date: Mar. 10, 2008

Page: 1 of 33

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H and PART 24 SUBPART E REQUIREMENT

OF

Product Name: SkyGuard

Brand Name: SkyGuard

Model Name: GVT-1000

FCC ID: MEUSKYGUARD

GSM Module ID: QIPMC56

Report No.: ER/2008/30007

Issue Date: Mar. 10, 2008

FCC Rule Part: 2 & 24E& 22H

Prepared for Yield Technology Co., Ltd.

No5-7 Shia Shin Nan, Chungli (320) Taoyuan
Taiwan

Prepared by SGS Taiwan Ltd.

Electronics & Communication Laboratory
No. 134, Wu Kung Rd., Wuku Industrial Zone,
Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 本報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務、免責、管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

VERIFICATION OF COMPLIANCE

Applicant: Yield Technology Co., Ltd.
No5-7 Shia Shin Nan, Chungli (320) Taoyuan Taiwan

Equipment Under Test: SkyGuard

FCC ID Number: MEUSKYGUARD

Brand Name: SkyGuard

Model No.: GVT-1000

Model Difference: N/A

File Number: ER/2008/30007

Date of test: Mar. 06, 2008 ~ Mar. 07, 2008


Date of EUT Received: Mar. 05, 2008

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-1-1998 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H and FCC PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:



Date

Mar. 10, 2008

Jazz Huang / Engineer

Prepared By:



Date

Mar. 10, 2008

Gigi Yeh / Clerk

Approved By:



Date

Mar. 10, 2008

Vincent Su / Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw



FCC ID: MEUSKYGUARD

Report No.: ER/2008/30007

Issue Date: Mar. 10, 2008

Page 3 of 47

Version

Version No.	Date
00	Mar. 10, 2008

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description	5
1.2 Related Submittal(s) / Grant (s)	5
1.3 Test Methodology	5
1.4 Test Facility.....	6
1.5 Special Accessories.....	6
1.6 Equipment Modifications.....	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT Configuration	7
2.2 EUT Exercise	7
2.3 Test Procedure.....	7
2.4 Configuration of Tested System.....	8
3. SUMMARY OF TEST RESULTS	9
4. DESCRIPTION OF TEST MODES	9
5. RF POWER OUTPUT MEASUREMENT	10
5.1 Standard Applicable	10
5.2 Test Set-up:	10
5.3 Measurement Procedure.....	10
5.4 Measurement Equipment Used:.....	11
5.5 Measurement Result.....	11
6. ERP, EIRP MEASUREMENT	12
6.1 Standard Applicable	12
6.2 Test SET-UP (Block Diagram of Configuration)	12
6.3 Measurement Procedure.....	14
6.4 Measurement Equipment Used:.....	15
6.5 Measurement Result.....	16
7. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	18
7.1 Standard Applicable	18
7.2 EUT Setup (Block Diagram of Configuration)	18
7.3 Measurement Procedure.....	20
7.4 Measurement Equipment Used:.....	21
7.5 Measurement Result.....	21
APPENDIX 1 PHOTOGRPHS OF SET UP	34
APPENDIX 2 PHOTOGRPHS OF EUT	36

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

1. GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	SkyGuard
Brand Name:	SkyGuard
Model Name:	GVT-1000
Model Difference:	N/A
Simple Hands-Free (SHF):	One provide, Model: N/A
Data Cable (USB):	One provide, Model: N/A
Power Supply	3.7 Vdc re-chargeable battery or 12Vdc for Car charger

GSM:

Cellular Phone Standards	GSM/GPRS 850	824 MHz– 849MHz	33 dBm
Frequency Range and Power	GSM/GPRS 1900	1850MHz – 1910MHz	30 dBm
Type of Emission	GSM: 300KGXW		
IMEI	352023006424739		

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **MEUSKYGUARD** filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

SYSTEM TEST CONFIGURATION

1.7 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

1.8 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

1.9 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7&13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8&13 of ANSI C63.4-2003.

1.10 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

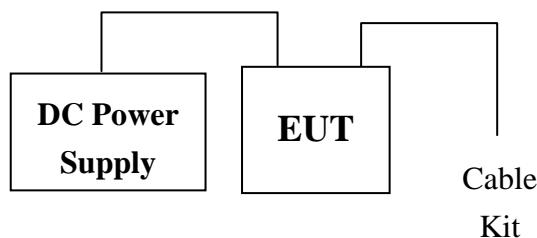


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	FCC ID	Series No.
1.	DC Power Supply	Chroma	41901	N/A	777188

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a) §22.913(a) §24.232(a)	RF Power Output	Compliant
§2.1046(a) §22.913(a) §24.232(a)	ERP/ EIRP measurement	Compliant
§2.1049(h)	99% Occupied Bandwidth	N/A
§2.1051 §22.917(a) §24.238(a)	Out of Band Emissions at Antenna Terminals and Band Edge	N/A
§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	Compliant
§2.1055(a)(1)(b)	Frequency Stability vs. Temperature	N/A
§2.1055(d)(1)(2)	Frequency Stability vs. Voltage	N/A
§15.107;§15.207	AC Power Line Conducted Emission	N/A

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel low, Mid and High for each type and band with rated data rate are chosen for full testing.

The GSM module was approved and the FCC ID number is **QIPMC56**. Thus, the output power, ERP/EIRP and Field Strength of Spurious Radiation were tested.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

RF POWER OUTPUT MEASUREMENT


1.11 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(b) Mobile station are limited to 2W.

1.12 Test Set-up:

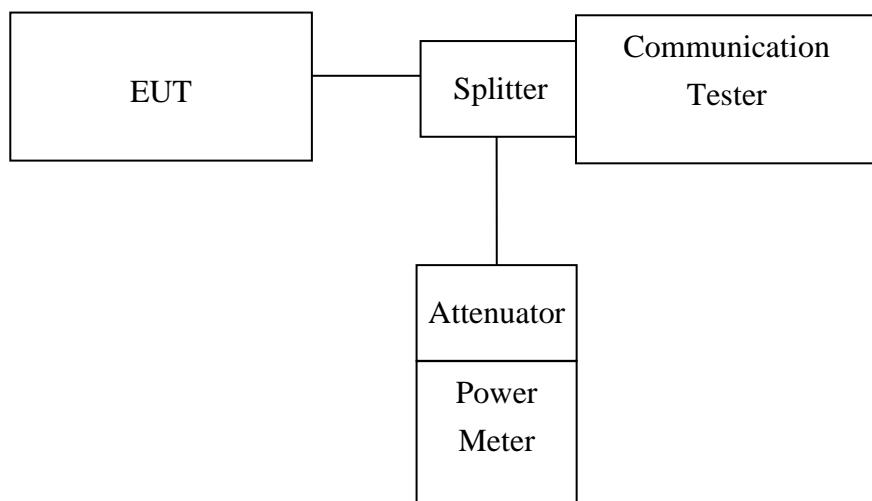

Note: Measurement setup for testing on Antenna connector

1.13 Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

1.14 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	E7405A	US41160416	06/28/2007	06/29/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008
Communication Test	R&S	SMU200	N/A	N/A	N/A
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2007	10/13/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2007	09/22/2008
Attenuator	Mini-Circult	BW-S6W5	N/A	09/23/2007	09/22/2008
Splitter	Agilent	11636B	51728	09/23/2007	09/22/2008
DC Power Supply	TOPWARD	3303A	N/A	N/A	N/A

1.15 Measurement Result

EUT Mode	Frequency (MHz)	CH	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
GSM 850	824.20	128	13.40	17.80	31.20
	836.60	190	13.35	17.80	31.15
	848.80	251	13.40	17.80	31.15

EUT Mode	Frequency (MHz)	CH	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
PCS 1900	1850.20	512	11.00	17.80	28.80
	1880.00	661	11.20	17.80	29.00
	1909.80	810	11.30	17.80	29.10

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

ERP, EIRP MEASUREMENT

1.16 Standard Applicable


According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.

1.17 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

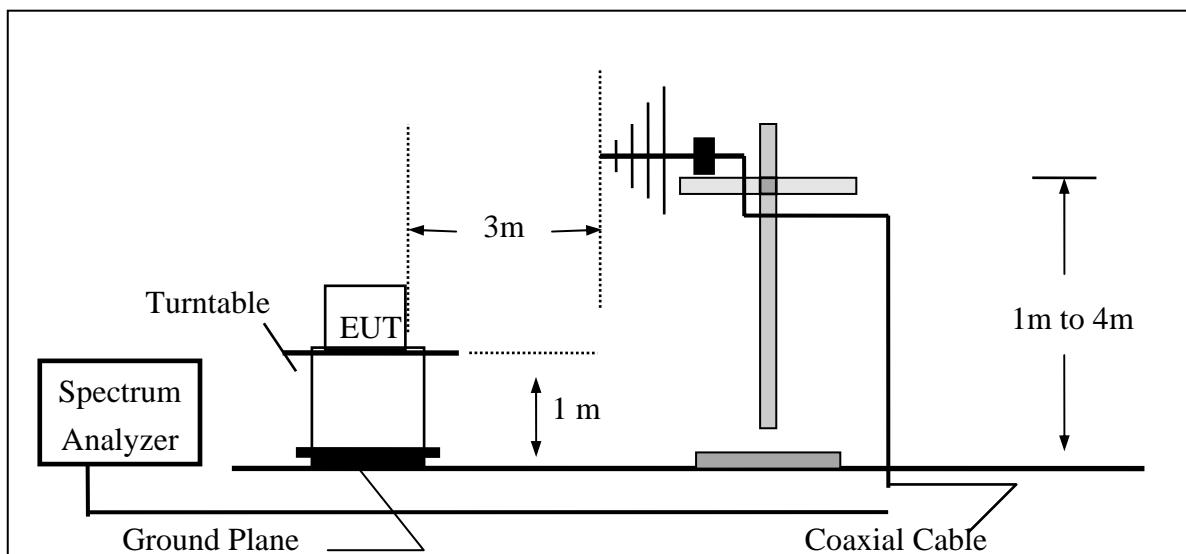


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

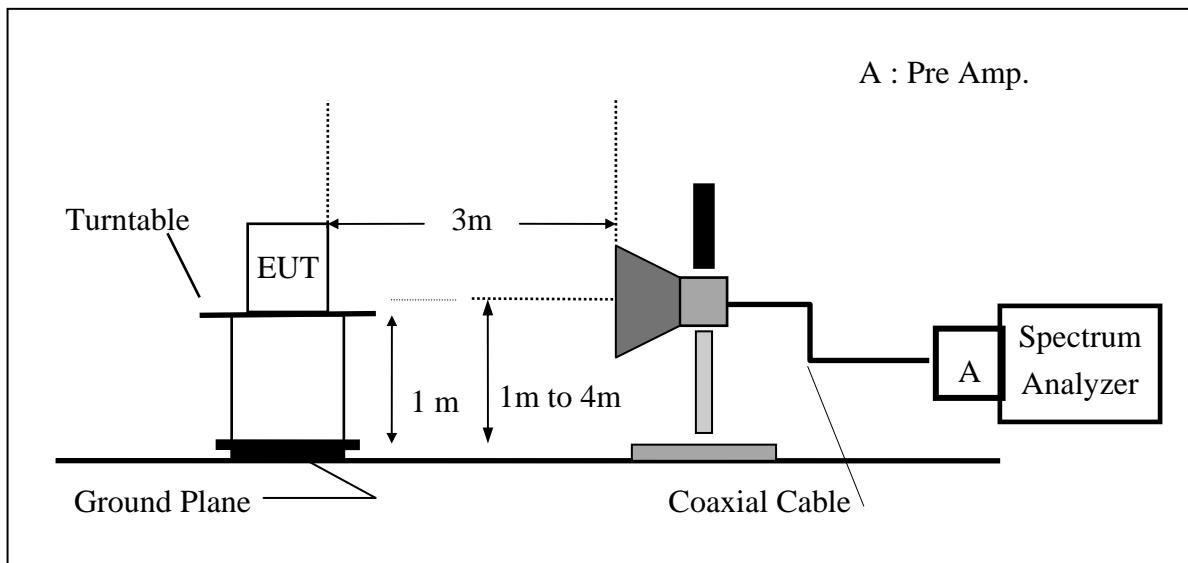

(C) Substituted Method Test Set-UP

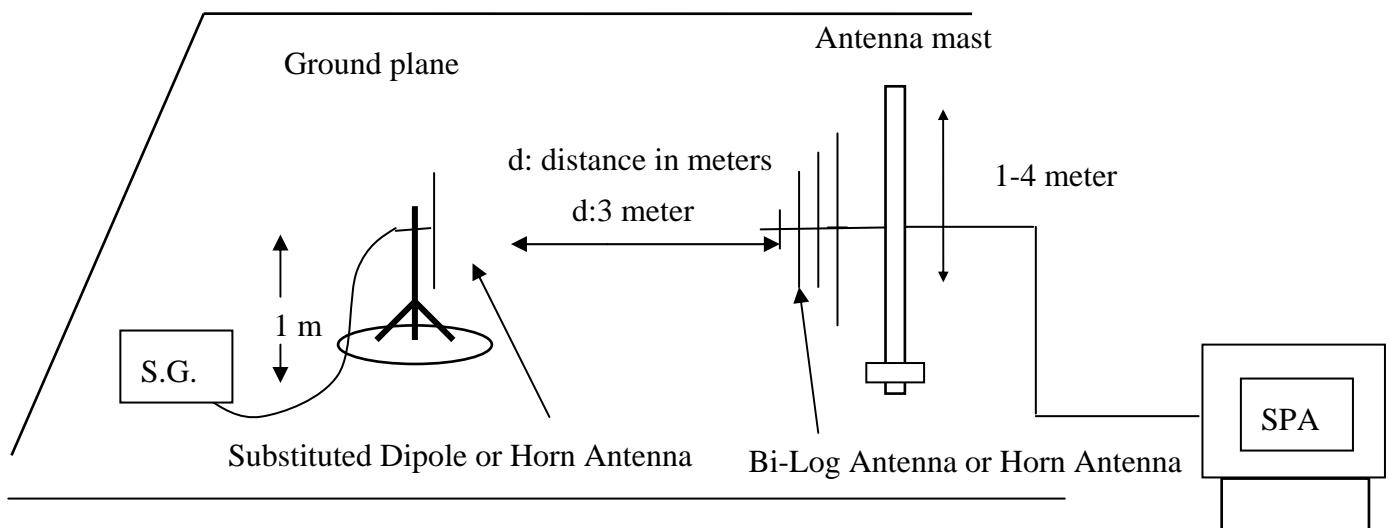

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊工業區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

1.18 Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

1.19 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2008	02/25/2009
Signal Generator	R&S	SMR40	100210	02/09/2008	02/10/2009
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2007	11/16/2008
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2007	09/22/2008
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

1.20 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GSM 850	824.20	128	H	V	106.96	19.64	-7.87	3.64	8.12	38.45
				H	113.78	26.12	-7.87	3.64	14.61	38.45
			E1	V	116.69	29.37	-7.87	3.64	17.85	38.45
				H	118.46	30.80	-7.87	3.64	19.29	38.45
			E2	V	112.10	24.78	-7.87	3.64	13.26	38.45
				H	115.39	27.73	-7.87	3.64	16.22	38.45
	836.60	190	H	V	108.74	21.71	-7.88	3.70	10.14	38.45
				H	113.58	26.24	-7.88	3.70	14.67	38.45
			E1	V	117.27	30.24	-7.88	3.70	18.67	38.45
				H	119.89	32.55	-7.88	3.70	20.98	38.45
			E2	V	111.62	24.59	-7.88	3.70	13.02	38.45
				H	114.73	27.39	-7.88	3.70	15.82	38.45
	848.80	251	H	V	106.24	19.50	-7.88	3.75	7.87	38.45
				H	112.50	25.48	-7.88	3.75	13.85	38.45
			E1	V	114.04	27.30	-7.88	3.75	15.67	38.45
				H	117.35	30.33	-7.88	3.75	18.70	38.45
			E2	V	109.44	22.70	-7.88	3.75	11.07	38.45
				H	112.49	25.47	-7.88	3.75	13.84	38.45

Remark :

(1) The RBW,VBW of SPA for frequency

Below 1GHz was RBW=100 KHz, VBW=300KHz,

Above 1GHz was RBW= 1MHz , VBW= 3MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
PCS 1900	1850.20	512	H	V	116.59	9.63	9.90	5.41	14.12	33.00
				H	124.42	17.53	9.90	5.41	22.02	33.00
			E1	V	120.07	13.11	9.90	5.41	17.60	33.00
				H	124.05	17.16	9.90	5.41	21.65	33.00
			E2	V	125.04	18.08	9.90	5.41	22.57	33.00
				H	117.45	10.56	9.90	5.84	14.62	33.00
	1880.00	661	H	V	115.78	8.83	9.99	5.46	13.36	33.00
				H	124.10	17.23	9.99	5.46	21.76	33.00
			E1	V	123.85	16.90	9.99	5.46	21.43	33.00
				H	128.42	21.55	9.99	5.46	26.08	33.00
			E2	V	124.83	17.88	9.99	5.46	22.41	33.00
				H	116.47	9.60	9.99	5.46	14.13	33.00
	1909.80	810	H	V	117.63	10.69	10.08	5.51	15.26	33.00
				H	121.76	14.91	10.08	5.51	19.47	33.00
			E1	V	119.40	12.46	10.08	5.51	17.03	33.00
				H	124.04	17.19	10.08	5.51	21.75	33.00
			E2	V	123.86	16.92	10.08	5.51	21.49	33.00
				H	113.59	6.74	10.08	5.51	11.30	33.00

Remark :	
(1)	The RBW,VBW of SPA for frequency Below 1GHz was RBW=100 KHz, VBW=300KHz, Above 1GHz was RBW= 1MHz , VBW= 3MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


1.21 Standard Applicable

According to FCC §2.1053,

FCC §22.917(a), §24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

1.22 EUT Setup (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

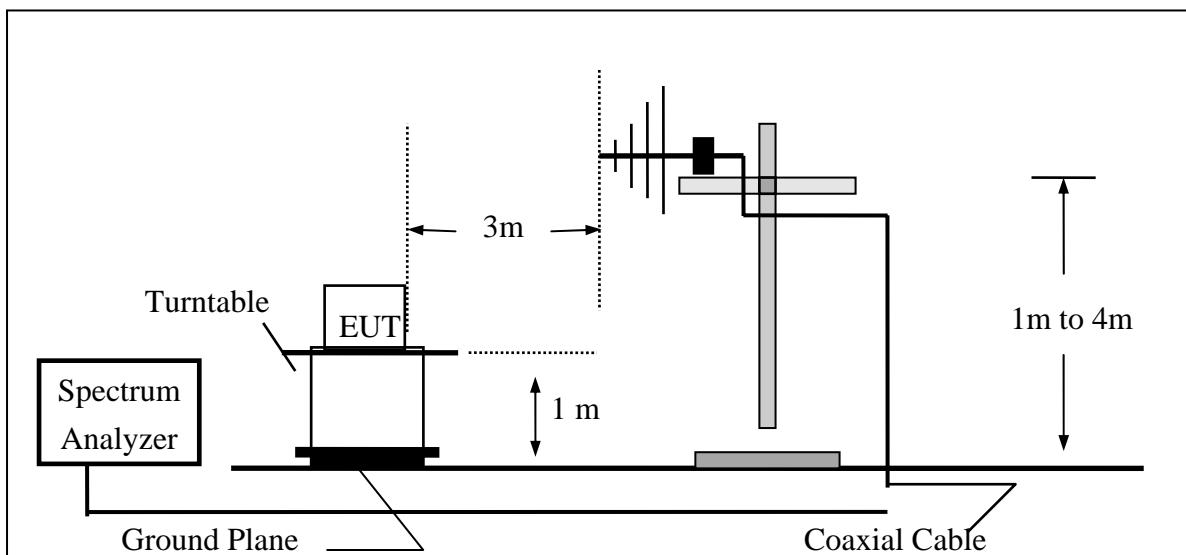


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊工業區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

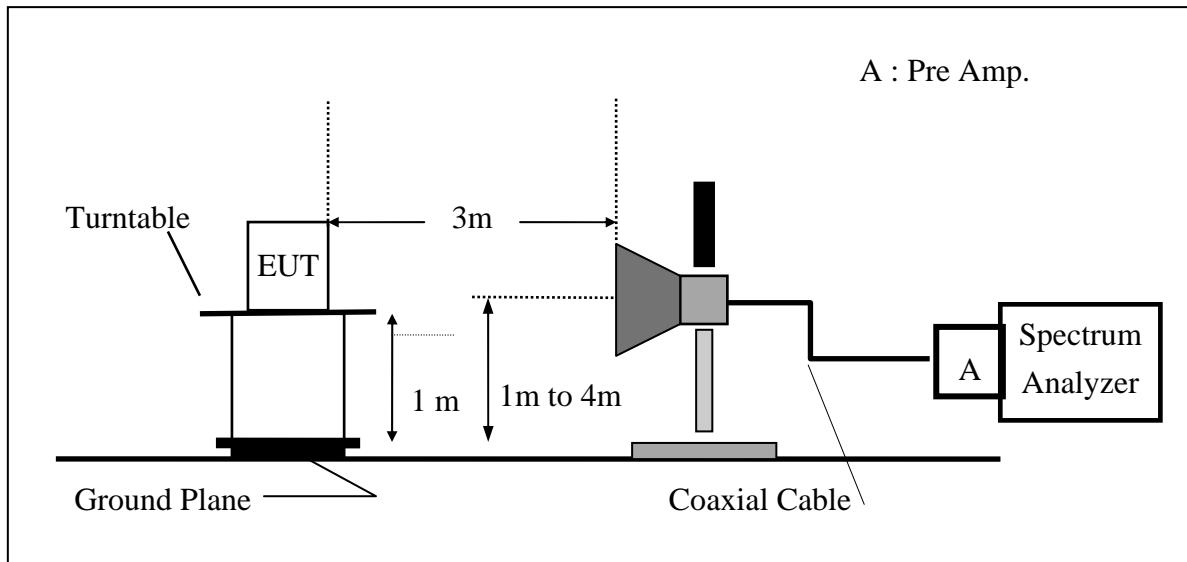

(C) Substituted Method Test Set-UP

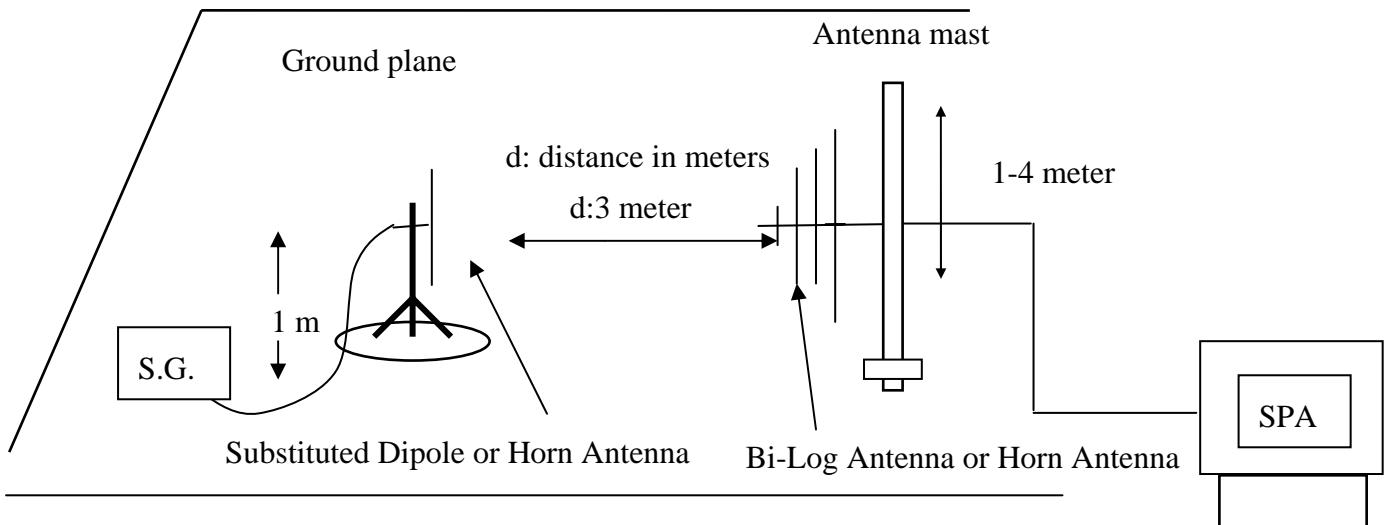

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 | t (886-2) 2299-3939 | f (886-2) 2298-2698 | www.sgs.com.tw

1.23 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$$

1.24 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2007	11/10/2008
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2008	02/25/2009
Signal Generator	R&S	SMR40	100210	02/09/2008	02/10/2009
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2007	11/16/2008
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2007	09/22/2008
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

1.25 Measurement Result

Refer to attach tabular data sheets.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北市新莊區五工路134號
台灣檢驗科技股份有限公司 t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode	: TX CH Low H mode	Test Date	: Mar. 06, 2008
Fundamental Frequency	: 824.20 MHz	Test By	: Jazz
Temperature	: 25	Pol	: Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
242.43	38.77	V	-62.14	-7.88	1.92	-71.95	-13.00	-58.95
320.03	37.62	V	-61.30	-7.81	2.18	-71.29	-13.00	-58.29
824.00	71.36	V	-15.97	-7.87	3.64	-27.49	-13.00	-14.49
1644.00	66.48	V	-40.56	9.27	5.05	-36.34	-13.00	-23.34
1648.40	---	V		9.29	5.23		-13.00	
2463.00	46.41	V	-57.71	10.08	6.28	-53.92	-13.00	-40.92
2472.60	---	V		10.08	6.53		-13.00	
3296.80	---	V		12.17	7.71		-13.00	
4121.00	---	V		12.61	8.86		-13.00	
4945.20	---	V		12.65	9.74		-13.00	
5769.40	---	V		13.55	10.54		-13.00	
5914.00	42.69	V	-51.49	13.77	9.88	-47.60	-13.00	-34.60
6593.60	---	V		12.05	11.30		-13.00	
7417.80	---	V		11.49	12.10		-13.00	
8242.00	---	V		11.48	12.71		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、篡改皆屬非法，違犯者將會被依法追訴。

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode	: TX CH Low H mode	Test Date	: Mar. 06, 2008
Fundamental Frequency	: 824.20 MHz	Test By	: Jazz
Temperature	: 25	Pol	: Hor
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	43.17	H	-57.47	-7.90	1.99	-67.36	-13.00	-54.36
313.24	43.45	H	-55.51	-7.85	2.12	-65.48	-13.00	-52.48
523.73	36.48	H	-56.64	-7.74	2.73	-67.11	-13.00	-54.11
824.00	72.36	H	-15.30	-7.87	3.64	-26.82	-13.00	-13.82
1644.00	60.99	H	-46.02	9.27	5.05	-41.80	-13.00	-28.80
1648.40	---	H		9.29	5.06		-13.00	
2463.00	52.83	H	-51.28	10.08	6.28	-47.49	-13.00	-34.49
2472.60	---	H		10.08	6.30		-13.00	
3289.00	38.82	H	-63.55	12.15	7.25	-58.65	-13.00	-45.65
3296.80	---	H		12.17	7.26		-13.00	
4121.00	---	H		12.61	8.33		-13.00	
4945.20	---	H		12.65	9.19		-13.00	
5769.40	---	H		13.55	9.80		-13.00	
5914.00	44.47	H	-49.70	13.77	9.88	-45.80	-13.00	-32.80
6593.60	---	H		12.05	10.61		-13.00	
7417.80	---	H		11.49	11.28		-13.00	
8242.00	---	H		11.48	12.26		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode	: TX CH Mid H mode	Test Date	: Mar. 06, 2008
Fundamental Frequency	: 836.60 MHz	Test By	: Jazz
Temperature	: 25	Pol	: Ver
Humidity	: 65%		

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
286.08	38.66	V	-61.23	-7.91	1.99	-71.13	-13.00	-58.13
1679.00	69.96	V	-37.07	9.38	5.11	-32.80	-13.00	-19.80
2496.00	50.16	V	-53.76	10.06	6.33	-50.03	-13.00	-37.03
2509.80	---	V		10.09	6.35		-13.00	
3338.00	40.17	V	-62.39	12.26	7.29	-57.42	-13.00	-44.42
3346.40	---	V		12.28	7.29		-13.00	
4183.00	---	V		12.62	8.40		-13.00	
4808.00	34.43	V	-62.72	12.65	9.05	-59.12	-13.00	-46.12
5019.60	---	V		12.67	9.26		-13.00	
5856.20	---	V		13.68	9.85		-13.00	
5914.00	42.57	V	-51.61	13.77	9.88	-47.72	-13.00	-34.72
6692.80	---	V		11.95	10.74		-13.00	
7529.40	---	V		11.45	11.35		-13.00	
8366.00	---	V		11.59	12.43		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark”---“ means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid H mode
 Fundamental Frequency : 836.60 MHz
 Temperature : 25
 Humidity : 65%

Test Date : Mar. 06, 2008
 Test By : Jazz
 Pol : Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	43.17	H	-57.47	-7.90	1.99	-67.36	-13.00	-54.36
313.24	43.45	H	-55.51	-7.85	2.12	-65.48	-13.00	-52.48
523.73	36.48	H	-56.64	-7.74	2.73	-67.11	-13.00	-54.11
1673.20	---	H		9.36	5.10		-13.00	
1679.00	67.63	H	-39.36	9.38	5.11	-35.09	-13.00	-22.09
2498.00	52.97	H	-50.94	10.06	6.33	-47.21	-13.00	-34.21
2509.80	---	H		10.09	6.35		-13.00	
3338.00	39.94	H	-62.39	12.26	7.29	-57.42	-13.00	-44.42
3346.40	---	H		12.28	7.29		-13.00	
4183.00	---	H		12.62	8.40		-13.00	
5019.60	---	H		12.67	9.26		-13.00	
5856.20	---	H		13.68	9.85		-13.00	
5914.00	43.53	H	-50.64	13.77	9.88	-46.74	-13.00	-33.74
6692.80	---	H		11.95	10.74		-13.00	
7529.40	---	H		11.45	11.35		-13.00	
8366.00	---	H		11.59	12.43		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark”---“ means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High H mode Test Date : Mar. 06, 2008
Fundamental Frequency : 848.80 MHz Test By : Jazz
Temperature : 25 Pol : Ver
Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
286.08	38.66	V	-61.23	-7.91	1.99	-71.13	-13.00	-58.13
850.00	73.43	V	-13.28	-7.88	3.75	-24.91	-13.00	-11.91
1693.00	66.78	V	-40.24	9.42	5.13	-35.95	-13.00	-22.95
1697.60	---	V		9.44	5.14		-13.00	
2533.00	49.20	V	-54.62	10.16	6.38	-50.84	-13.00	-37.84
2546.40	---	V		10.20	6.40		-13.00	
3395.20	---	V		12.38	7.33		-13.00	
4244.00	---	V		12.63	8.46		-13.00	
5092.80	---	V		12.74	9.32		-13.00	
5914.00	43.35	V	-50.83	13.77	9.88	-46.94	-13.00	-33.94
5941.60	---	V		13.81	9.89		-13.00	
6790.40	---	V		11.86	10.87		-13.00	
7639.20	---	V		11.40	11.48		-13.00	
8488.00	---	V		11.70	12.59		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High H mode
 Fundamental Frequency : 848.80 MHz
 Temperature : 25
 Humidity : 65%

Test Date : Mar. 06, 2008
 Test By : Jazz
 Pol : Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	44.30	H	-56.34	-7.90	1.99	-66.23	-13.00	-53.23
320.03	43.51	H	-55.12	-7.81	2.18	-65.11	-13.00	-52.11
850.00	74.67	H	-12.32	-7.88	3.75	-23.95	-13.00	-10.95
1693.00	55.77	H	-51.21	9.42	5.13	-46.92	-13.00	-33.92
1697.60	---	H		9.44	5.14		-13.00	
2533.00	55.25	H	-48.56	10.16	6.38	-44.79	-13.00	-31.79
2546.40	---	H		10.20	6.40		-13.00	
3394.00	41.73	H	-60.55	12.38	7.33	-55.51	-13.00	-42.51
3395.20	---	H		12.38	7.33		-13.00	
4244.00	---	H		12.63	8.46		-13.00	
5092.80	---	H		12.74	9.32		-13.00	
5914.00	42.64	H	-51.53	13.77	9.88	-47.63	-13.00	-34.63
5941.60	---	H		13.81	9.89		-13.00	
6790.40	---	H		11.86	10.87		-13.00	
7639.20	---	H		11.40	11.48		-13.00	
8488.00	---	H		11.70	12.59		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E2 mode Test Date : Mar. 06, 2008
Fundamental Frequency : 1850.20MHz Test By : Jazz
Temperature : 25 Pol : Ver
Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	43.94	V	-59.54	-7.76	1.23	-68.53	-13.00	-55.53
337.49	37.76	V	-60.59	-7.71	2.35	-70.65	-13.00	-57.65
1850.00	75.58	V	-31.38	9.90	5.41	-26.89	-13.00	-13.89
1854.00	57.06	V	-49.90	9.91	5.41	-45.40	-13.00	-32.40
3688.00	61.11	V	-40.53	12.61	7.71	-35.63	-13.00	-22.63
3700.40	---	V		12.61	7.73		-13.00	
5543.00	49.55	V	-45.68	13.21	9.68	-42.14	-13.00	-29.14
5550.60	---	V		13.23	9.68		-13.00	
7400.80	---	V		11.50	11.28		-13.00	
9251.00	---	V		11.92	13.10		-13.00	
11101.20	---	V		11.66	14.33		-13.00	
12951.40	---	V		13.63	15.98		-13.00	
14801.60	---	V		12.76	17.27		-13.00	
16651.80	---	V		15.92	19.04		-13.00	
18502.00	---	V		18.75	21.21		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB 80MHz -1000MHz: 3.76dB 1GHz - 13GHz: 4.45dB
-------------------------	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $\text{ERP/EIRP (dBm)} = \text{SG Setting(dBm)} + \text{Antenna Gain (dB/dBi)} - \text{Cable loss (dB)}$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E2 mode
 Fundamental Frequency : 1850.20MHz
 Temperature : 25
 Humidity : 65%

Test Date : Mar. 06, 2008
 Test By : Jazz
 Pol : Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	40.67	H	-59.97	-7.90	1.99	-69.86	-13.00	-56.86
337.49	41.69	H	-56.09	-7.71	2.35	-66.15	-13.00	-53.15
1850.00	82.03	H	-24.86	9.90	5.41	-20.37	-13.00	-7.37
1854.00	66.92	H	-39.97	9.91	5.41	-35.47	-13.00	-22.47
3688.00	74.27	H	-27.14	12.61	7.71	-22.24	-13.00	-9.24
3700.40	---	H		12.61	7.73		-13.00	
5543.00	47.20	H	-47.95	13.21	9.68	-44.41	-13.00	-31.41
5550.60	---	H		13.23	9.68		-13.00	
5914.00	40.14	H	-54.03	13.77	9.88	-50.13	-13.00	-37.13
7398.00	39.10	H	-46.97	11.50	11.28	-46.75	-13.00	-33.75
7400.80	---	H		11.50	11.28		-13.00	
9251.00	---	H		11.92	13.10		-13.00	
11101.20	---	H		11.66	14.33		-13.00	
12951.40	---	H		13.63	15.98		-13.00	
14801.60	---	H		12.76	17.27		-13.00	
16651.80	---	H		15.92	19.04		-13.00	
18502.00	---	H		18.75	21.21		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

Radiated Spurious Emission Measurement Result : PCS 1900 Mode

Operation Mode : TX CH Mid E2 mode
Fundamental Frequency : 1880MHz
Temperature : 25
Humidity : 65%

Test Date : Mar. 06, 2008
Test By : Jazz
Pol : Ver/Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
101.78	44.91	V	-58.57	-7.76	1.23	-67.56	-13.00	-54.56
337.49	39.34	V	-59.01	-7.71	2.35	-69.07	-13.00	-56.07
1868.00	63.24	V	-43.71	9.95	5.44	-39.20	-13.00	-26.20
3758.00	56.68	V	-44.63	12.60	7.82	-39.85	-13.00	-26.85
3760.00	---	V		12.60	7.82		-13.00	
5637.00	47.82	V	-47.14	13.36	9.73	-43.52	-13.00	-30.52
5640.00	---	V		13.36	9.73		-13.00	
7520.00	---	V		11.45	11.33		-13.00	
9400.00	---	V		11.93	13.15		-13.00	
11280.00	---	V		11.92	14.56		-13.00	
13160.00	---	V		13.33	16.11		-13.00	
15040.00	---	V		13.76	17.57		-13.00	
16920.00	---	V		15.27	19.66		-13.00	
18800.00	---	V		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG\ Setting(dBm) + Antenna\ Gain\ (dB/dBi) - Cable\ loss\ (dB)$

Radiated Spurious Emission Measurement Result : PCS 1900 Mode

Operation Mode : TX CH Mid E2 mode
Fundamental Frequency : 1880MHz
Temperature : 25
Humidity : 65%
Test Date : Mar. 06, 2008
Test By : Jazz
Pol : Ver/Hor

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	39.89	H	-60.75	-7.90	1.99	-70.64	-13.00	-57.64
329.73	38.79	H	-59.37	-7.75	2.28	-69.40	-13.00	-56.40
1868.00	64.18	H	-42.70	9.95	5.44	-38.19	-13.00	-25.19
3758.00	64.73	H	-36.39	12.60	7.82	-31.60	-13.00	-18.60
3760.00	---	H		12.60	7.82		-13.00	
5634.00	48.06	H	-46.85	13.35	9.73	-43.22	-13.00	-30.22
5640.00	---	H		13.36	9.73		-13.00	
5914.00	39.41	H	-54.76	13.77	9.88	-50.86	-13.00	-37.86
7520.00	---	H		11.45	11.33		-13.00	
7524.00	40.24	H	-45.44	11.45	11.34	-45.33	-13.00	-32.33
9400.00	---	H		11.93	13.15		-13.00	
11280.00	---	H		11.92	14.56		-13.00	
13160.00	---	H		13.33	16.11		-13.00	
15040.00	---	H		13.76	17.57		-13.00	
16920.00	---	H		15.27	19.66		-13.00	
18800.00	---	H		18.68	21.34		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)$

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High E2 mode
 Fundamental Frequency : 1909.8 MHz
 Temperature : 25
 Humidity : 65%

Test Date : Mar. 06, 2008
 Test By : Jazz
 Pol : Ver

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	38.77	V	-61.71	-7.90	1.99	-71.59	-13.00	-58.59
337.49	38.43	V	-59.92	-7.71	2.35	-69.98	-13.00	-56.98
1903.00	56.75	V	-50.19	10.06	5.50	-45.63	-13.00	-32.63
1910.00	73.53	V	-33.41	10.08	5.51	-28.84	-13.00	-15.84
3814.00	58.26	V	-42.80	12.60	7.91	-38.10	-13.00	-25.10
3981.60	---	V		12.60	8.17		-13.00	
5718.00	44.47	V	-50.27	13.48	9.77	-46.56	-13.00	-33.56
5972.40	---	V		13.86	9.91		-13.00	
7963.20	---	V		11.27	11.88		-13.00	
9954.00	---	V		12.08	13.43		-13.00	
11944.80	---	V		13.08	15.21		-13.00	
13935.60	---	V		11.82	16.86		-13.00	
15926.40	---	V		17.08	18.33		-13.00	
17917.20	---	V		9.63	20.12		-13.00	
19908.00	---	V		18.88	20.85		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark”---“ means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain (dB/dBi)} - Cable \text{ loss (dB)}$

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification, and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，請注意此條款列印於背面，亦可在www.sgs.com中查閱。將本公司之義務，免責，管轄權皆明確規範之。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High E2 mode Test Date : Mar. 06, 2008
Fundamental Frequency : 1909.8 MHz Test By : Jazz
Temperature : 25 Pol : Hor
Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out-put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
259.89	40.72	H	-59.92	-7.90	1.99	-69.81	-13.00	-56.81
337.49	39.18	H	-58.60	-7.71	2.35	-68.66	-13.00	-55.66
1903.64	60.44	H	-46.42	10.06	5.50	-41.86	-13.00	-28.86
1910.00	80.03	H	-26.82	10.08	5.51	-22.26	-13.00	-9.26
3767.50	---	H		12.60	7.83		-13.00	
3814.00	64.59	H	-36.29	12.60	7.91	-31.59	-13.00	-18.59
3981.60	---	H		12.60	8.17		-13.00	
5718.00	46.50	H	-48.18	13.48	9.77	-44.48	-13.00	-31.48
5914.00	40.15	H	-54.02	13.77	9.88	-50.12	-13.00	-37.12
5972.40	---	H		13.86	9.91		-13.00	
7963.20	---	H		11.27	11.88		-13.00	
9954.00	---	H		12.08	13.43		-13.00	
11944.80	---	H		13.08	15.21		-13.00	
13935.60	---	H		11.82	16.86		-13.00	
15926.40	---	H		17.08	18.33		-13.00	
17917.20	---	H		9.63	20.12		-13.00	
19908.00	---	H		18.88	20.85		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz - 1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) - Cable loss (dB)$