

# FCC / IC DTS REPORT

## Certification

**Applicant Name:**  
Universal Electronics Inc

**Address:**  
201 East Sandpointe Ave 8<sup>th</sup> Floor  
Santa Ana, CA 92707, U.S.A.

**Date of Issue:**  
June 17, 2019

**Test Site/Location:**  
EMCE Engineering

1726 Ringwood Avenue San Jose, California USA

**Report No.:** EMCE-R-1905-F002-1

<b>FCC ID:</b>	<b>MG3-I05020</b>
<b>IC:</b>	<b>2575A-I05020</b>
<b>APPLICANT:</b>	<b>Universal Electronics Inc</b>

**Model:** I05020  
**EUT Type:** Smart Home Hub  
**Peak Output Power:**  
 802.11b : 19.22 dBm  
 802.11g : 20.88 dBm  
 802.11n(HT20) : 20.53 dBm  
**Frequency Range:** 2412 MHz - 2462 MHz  
**Modulation type:** CCK/DSSS/OFDM  
**FCC Classification:** Digital Transmission System(DTS)  
**FCC Rule Part(s):** Part 15.247  
**ISED Rule Part(s):** RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance

---

**Steve In**  
**Test Engineer**  
**Certification Division**

---

**Billy Kim**  
**Technical Manager**  
**Certification Division**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the EMCE Engineering, Inc.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
EMCE-R-1905-F002	May 22, 2019	- First Approval Report
EMCE-R-1905-F002-1	June 17, 2019	- Revised antenna gain

# Table of Contents

<b>1. EUT DESCRIPTION .....</b>	<b>4</b>
ANTENNA CONFIGURATIONS .....	5
<b>2. TEST METHODOLOGY.....</b>	<b>6</b>
EUT CONFIGURATION .....	6
EUT EXERCISE .....	6
GENERAL TEST PROCEDURES.....	6
DESCRIPTION OF TEST MODES .....	6
<b>3. INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>4. FACILITIES AND ACCREDITATIONS.....</b>	<b>7</b>
FACILITIES .....	7
EQUIPMENT .....	7
<b>5. ANTENNA REQUIREMENTS .....</b>	<b>7</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>7. DESCRIPTION OF TESTS .....</b>	<b>9</b>
<b>8. SUMMARY TEST OF RESULTS.....</b>	<b>28</b>
<b>9. TEST RESULT.....</b>	<b>30</b>
<b>9.1 DUTY CYCLE.....</b>	<b>30</b>
<b>9.2 6dB BANDWIDTH &amp; 99 % BANDWIDTH .....</b>	<b>31</b>
<b>9.3 OUTPUT POWER.....</b>	<b>43</b>
<b>9.4 POWER SPECTRAL DENSITY .....</b>	<b>49</b>
<b>9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>54</b>
<b>9.6 RADIATED SPURIOUS EMISSIONS .....</b>	<b>76</b>
<b>9.7 RADIATED RESTRICTED BAND EDGES .....</b>	<b>87</b>
<b>9.8 RECEIVER SPURIOUS EMISSIONS .....</b>	<b>92</b>
<b>9.9 POWERLINE CONDUCTED EMISSIONS .....</b>	<b>93</b>
<b>10. LIST OF TEST EQUIPMENT.....</b>	<b>95</b>
<b>11. ANNEX A_ TEST SETUP PHOTO .....</b>	<b>96</b>

## 1. EUT DESCRIPTION

Model	I05020		
EUT Type	Smart Home Hub		
Power Supply	DC 5.0 V		
Frequency Range	2412 MHz - 2462 MHz		
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b : 19.09 dBm 802.11g : 20.77 dBm 802.11n(HT20) : 20.42 dBm
		Ant. 2 (SISO)	802.11b : 3.83 dBm 802.11g : 4.79 dBm 802.11n(HT20) : 4.53 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b : 19.22 dBm 802.11g : 20.88 dBm 802.11n(HT20) : 20.53 dBm
	Average Power	Ant. 1 (SISO)	802.11b : 13.21 dBm 802.11g : 13.31 dBm 802.11n(HT20) : 13.44 dBm
		Ant. 2 (SISO)	802.11b : -1.87 dBm 802.11g : -2.74 dBm 802.11n(HT20) : -2.66 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b : 13.34 dBm 802.11g : 13.42 dBm 802.11n(HT20) : 13.55 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	11 Channels		
Antenna Specification	Antenna type: inverted F type PCB trace type Peak Gain :5.96 dBi The antennas are without beamforming gain.		
Date(s) of Tests	April 15, 2019 ~ May 20, 2019		

## ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	O
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O

**Note:**

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

- If any transmit signals are correlated with each other(802.11b/g/n\_HT20),

$$\text{Directional gain} = 10 * \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

**■ Antenna Gain**

2.4 GHz Band

Antenna Gain	802.11b/g/n	Ant 0	5.96 dBi
		Ant 1	5.96 dBi
Directional Antenna Gain	802.11g/n	Ant 0 & 1	N/A

Note. The antennas are without Directional gain.

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r01 dated February 11, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

#### Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05r01)

### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test

Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5. ANTENNA REQUIREMENTS

#### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.55
Radiated Disturbance (9 kHz ~ 30 MHz)	3.20
Radiated Disturbance (30 MHz ~ 1 GHz)	4.73
Radiated Disturbance (1 GHz ~ 18 GHz)	5.21
Radiated Disturbance (18 GHz ~ 40 GHz)	5.18

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set  $RBW$  to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both  $RBW$  and  $VBW$  are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if  $VBW$  and/or  $RBW$  are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### Test Configuration

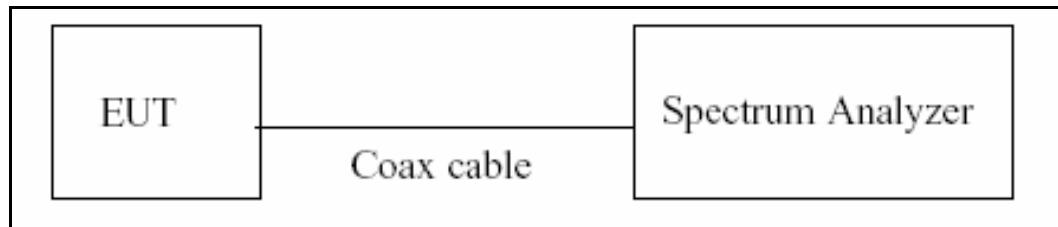

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of  $RBW$  is 8 MHz and  $VBW$  is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both  $RBW$  and  $VBW$  are  $> 50/T$ .


1.  $RBW = 8$  MHz (the largest available value)
2.  $VBW = 8$  MHz ( $\geq RBW$ )
3.  $SPAN = 0$  Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 * \log(1 / \text{Duty Cycle})$

## 7.2. 6dB Bandwidth & 99 % Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r01,  
Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\approx$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function

The Spectrum Analyzer is set to

- Peak Power (Procedure 8.3.1.1 in KDB 558074 v05r02)

RBW  $\geq$  Bandwidth

VBW  $\geq$  3  $\times$  RBW

SPAN  $\geq$  3  $\times$  RBW

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 8.3.2.2 in KDB 558074 v05r02)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz

VBW  $\geq$  3  $\times$  RBW.

Number of points in sweep  $\geq$  2  $\times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging (RMS) mode.

---

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### **Sample Calculation**


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration

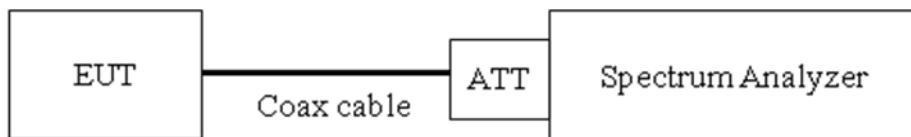

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) RBW = 3 kHz  $\leq$  RBW  $\leq$  100 kHz.
- 4) VBW  $\geq$  3 x RBW.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq$  [2 xspan / RBW].
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration

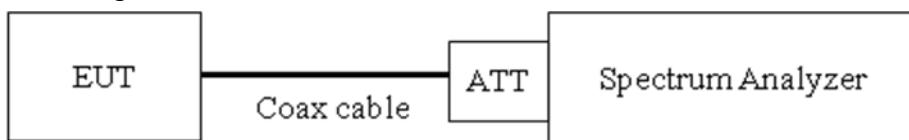

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 \* Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq [MHz]	Factor [dB]	Freq [MHz]	Factor [dB]
30	20.13	11000	21.19
100	20.31	12000	21.32
200	20.21	13000	21.44
300	20.16	14000	21.39
400	20.22	15000	21.51
500	20.15	16000	21.66
600	20.26	17000	21.72
700	20.17	18000	21.88
800	20.23	19000	21.92
900	20.21	20000	22.04
1000	20.19	21000	22.17
2000	20.38	22000	22.31
2400*	20.42	23000	22.57
2500*	20.51	24000	22.41
3000	20.53	25000	22.53
4000	20.61		
5000	20.97		
6000	20.73		
7000	21.01		
8000	20.88		
9000	21.11		
10000	21.21		

Note : 1. '\*' is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss + EUT Cable loss

## 7.6. Radiated Test

### Limit

### FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

### IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

### FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

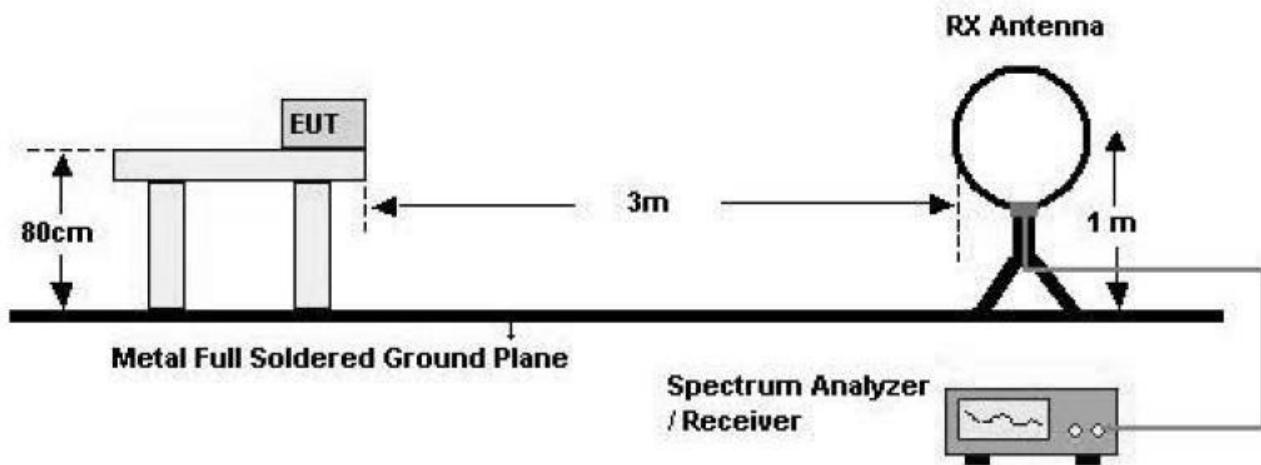

30 MHz - 1 GHz

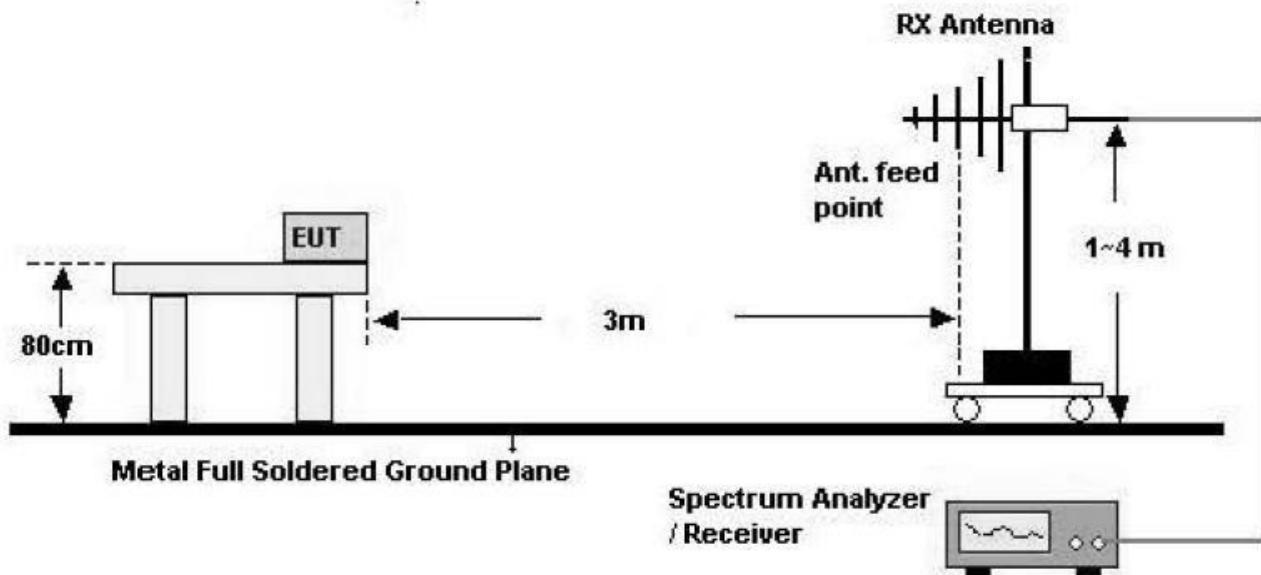

Above 1 GHz

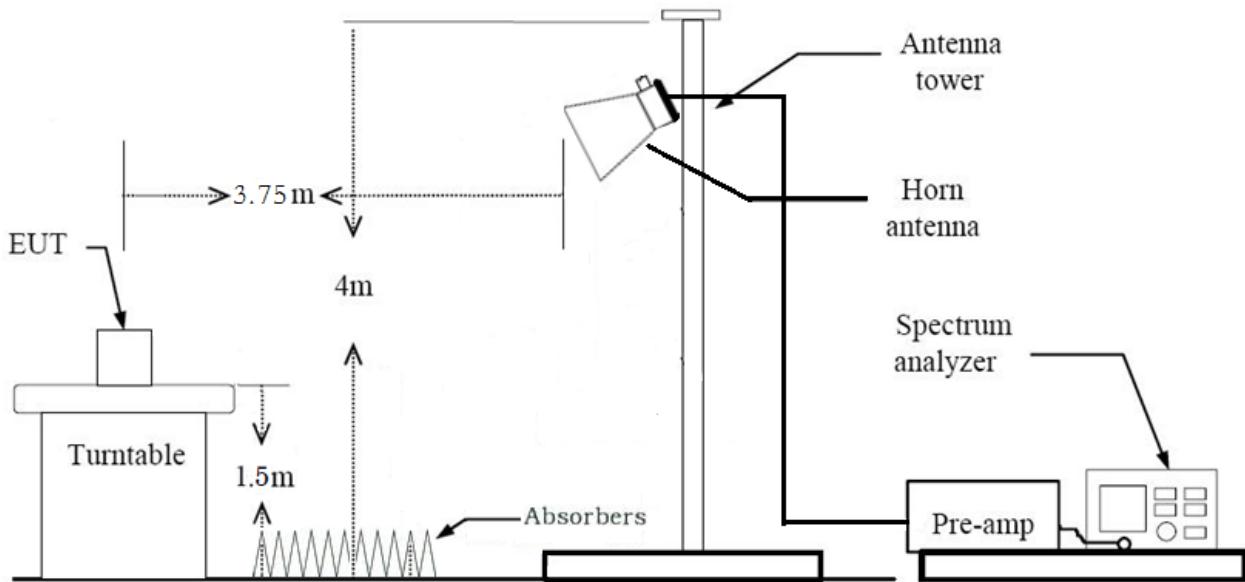

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40 * \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40 * \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

#### 8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 * \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Although these tests were performed at a test site other than an open area test site, adequate comparison measurements were confirmed against an open area test site. Therefore, sufficient test were made to demonstrate that the alternative site produces Result that correlate with the one of test made in an open field based on KDB 414788

Sample validation

Reference-signal Frequency [kHz]	Reading [dBuV]	Measurement Distance [m]	Extrapolation Factor	Total [dBuV/m]
135	76.1	3	88.4	-12.3
135	47.4	10	59.1	-11.7

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3\*RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

\*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).

\*Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

8. The unit was tested with its standard battery.

9. Spectrum Setting (Method 8.6 in KDB 558074 v05r01, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times \text{RBW}$

(2) Measurement Type(Average): Duty cycle  $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the

background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $<$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).

\*Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.

9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz  $\sim$  2390 MHz/ 2483.5 MHz  $\sim$  2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW

(2) Measurement Type(Average): Duty cycle  $\geq$  98%,

- Measured Frequency Range : 2310 MHz  $\sim$  2390 MHz/ 2483.5 MHz  $\sim$  2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3\*RBW

- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle < 98%)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Receiver Spurious Emissions

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

**Test Configuration**

30 MHz - 1 GHz

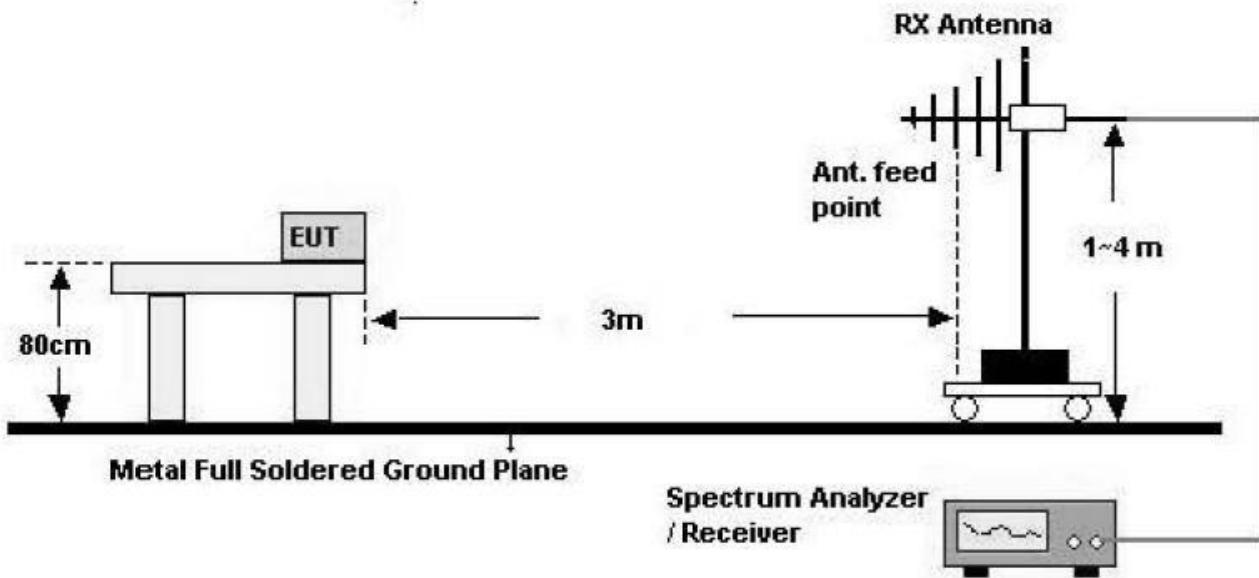

Above 1 GHz

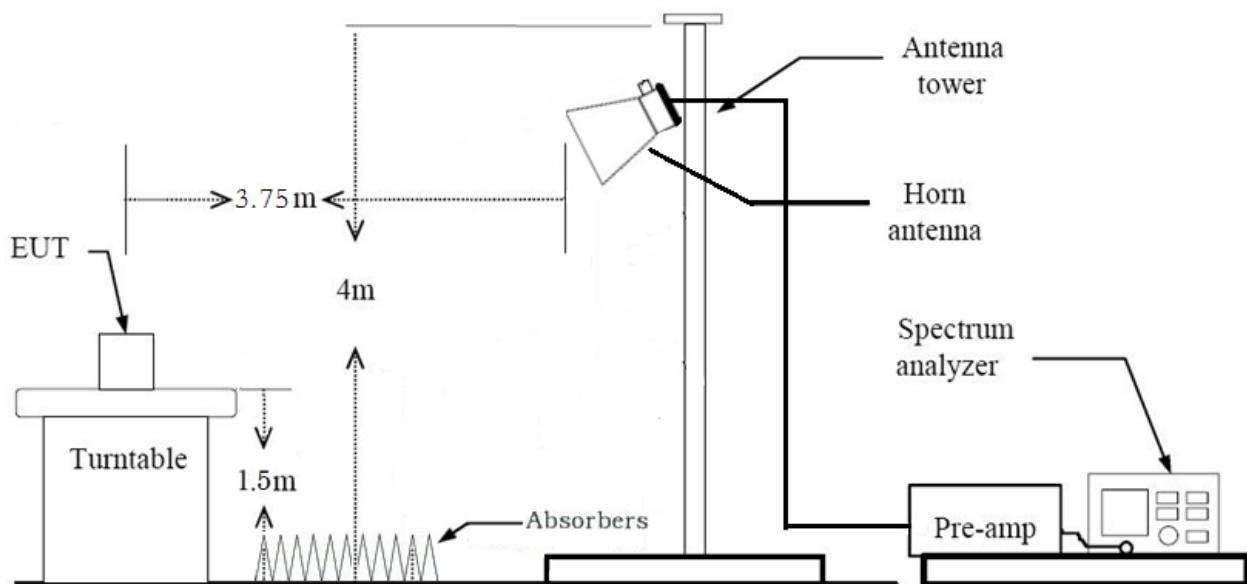

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).

\*Distance extrapolation factor =  $20 \times \log_{10}(\text{test distance} / \text{specific distance})$  (dB)

6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.

9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times \text{RBW}$

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 1 kHz

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)
  - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : Z
4. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
5. All datarate of operation were investigated and the worst case datarate results are reported
  - 802.11b : 1Mbps
  - 802.11g : 6Mbps
  - 802.11n : MCS0

### Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SISO & MIMO were tested and the all case results are reported.
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**IC Part**

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6		PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS

## 9. TEST RESULT

### 9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.407	8.498	0.989	0.046
	2	4.319	4.460	0.968	0.139
	5.5	1.690	1.816	0.931	0.312
	11	0.945	1.011	0.935	0.292
802.11g	6	1.399	1.449	0.966	0.151
	9	0.941	1.072	0.878	0.567
	12	0.709	0.760	0.933	0.303
	18	0.481	0.657	0.732	1.354
	24	0.365	0.496	0.735	1.334
	36	0.252	0.356	0.708	1.501
	48	0.192	0.360	0.534	2.728
	54	0.177	0.281	0.629	2.012
802.11n (HT20)	6.5 (MCS0)	1.307	1.484	0.881	0.550
	13 (MCS1)	0.672	0.830	0.809	0.919
	19.5 (MCS2)	0.461	0.592	0.778	1.088
	26 (MCS3)	0.356	0.533	0.668	1.752
	39 (MCS4)	0.250	0.389	0.641	1.931
	52 (MCS5)	0.196	0.265	0.738	1.319
	58.5 (MCS6)	0.181	0.249	0.724	1.401
	65 (MCS7)	0.164	0.332	0.494	3.065

## 9.2 6dB BANDWIDTH & 99 % BANDWIDTH

### FCC

#### [Ant1]

802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.600	> 0.5
2437	6	9.642	> 0.5
2462	11	10.043	> 0.5

802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.09	> 0.5
2437	6	16.08	> 0.5
2462	11	16.00	> 0.5

802.11n(HT20) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.17	> 0.5
2437	6	16.16	> 0.5
2462	11	16.66	> 0.5

**[Ant2]**

802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.600	> 0.5
2437	6	9.597	> 0.5
2462	11	10.067	> 0.5


802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.11	> 0.5
2437	6	16.34	> 0.5
2462	11	16.34	> 0.5

802.11n(HT20) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.71	> 0.5
2437	6	16.54	> 0.5
2462	11	16.70	> 0.5


**[Ant1]**

**Test Plots**


6dB Bandwidth plot (802.11b-CH 11)

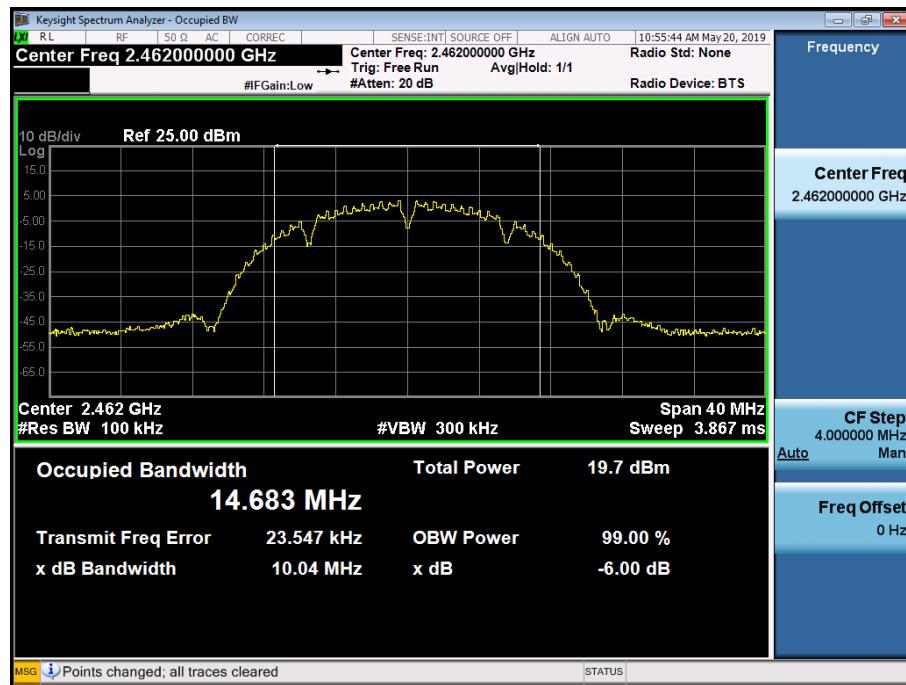

6dB Bandwidth plot (802.11g-CH 1)

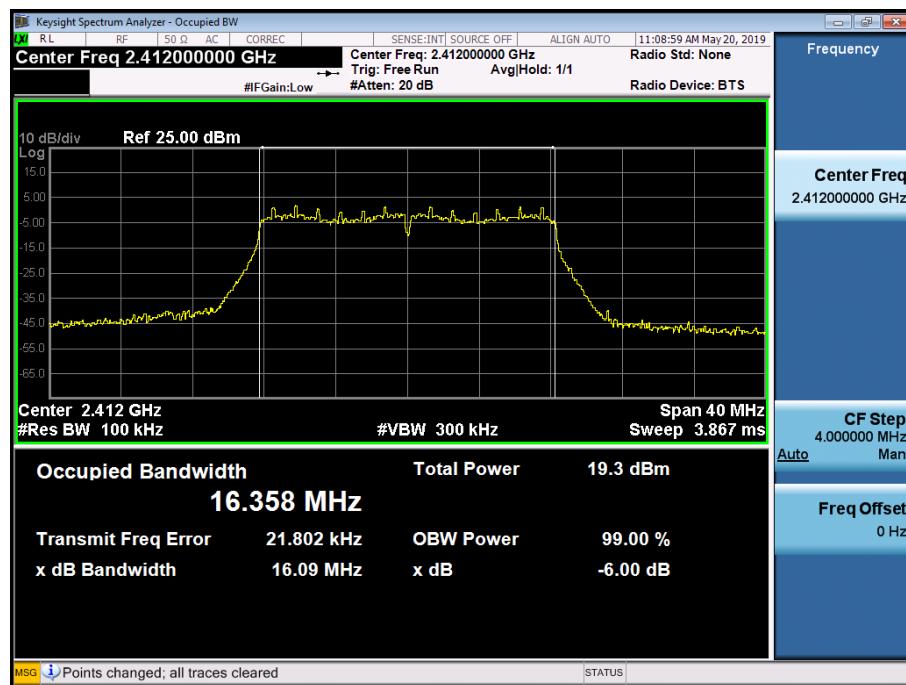

6dB Bandwidth plot (802.11n\_HT20-CH 11)

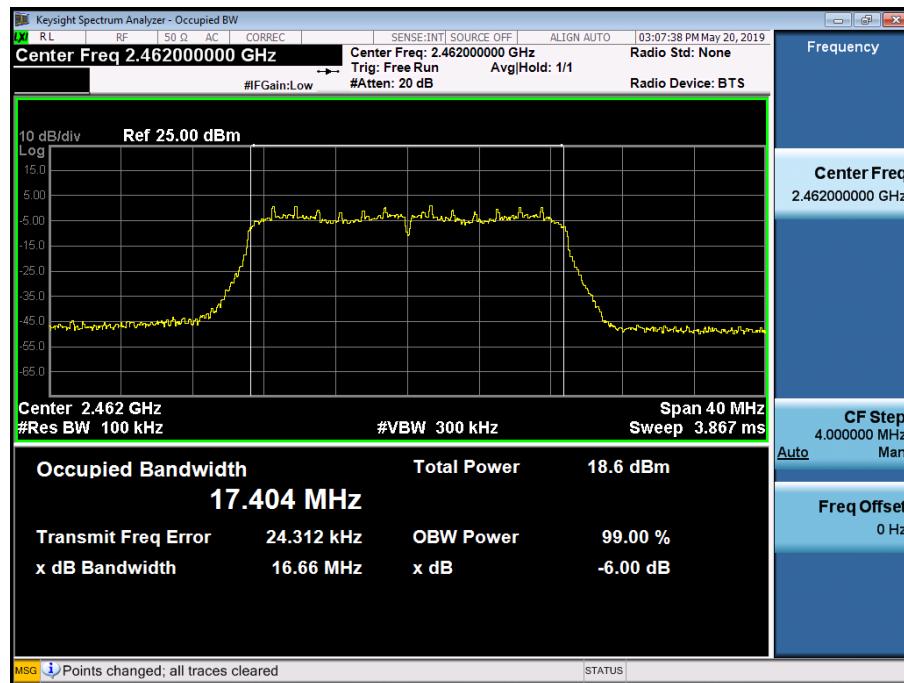


**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.


**[Ant2]**

**□ Test Plots**


6dB Bandwidth plot (802.11b-CH 11)

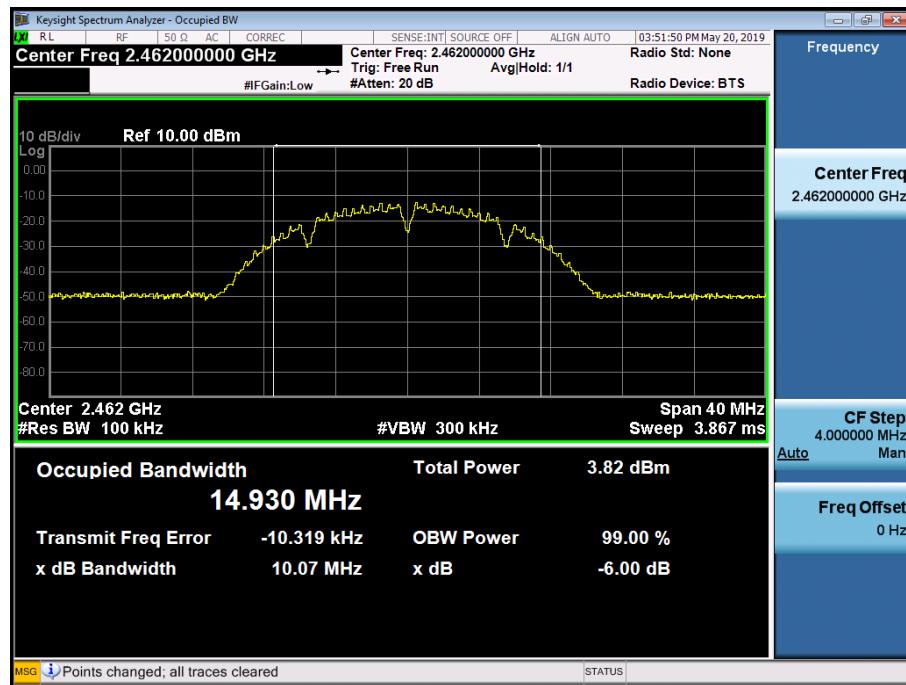

6dB Bandwidth plot (802.11g-CH 11)

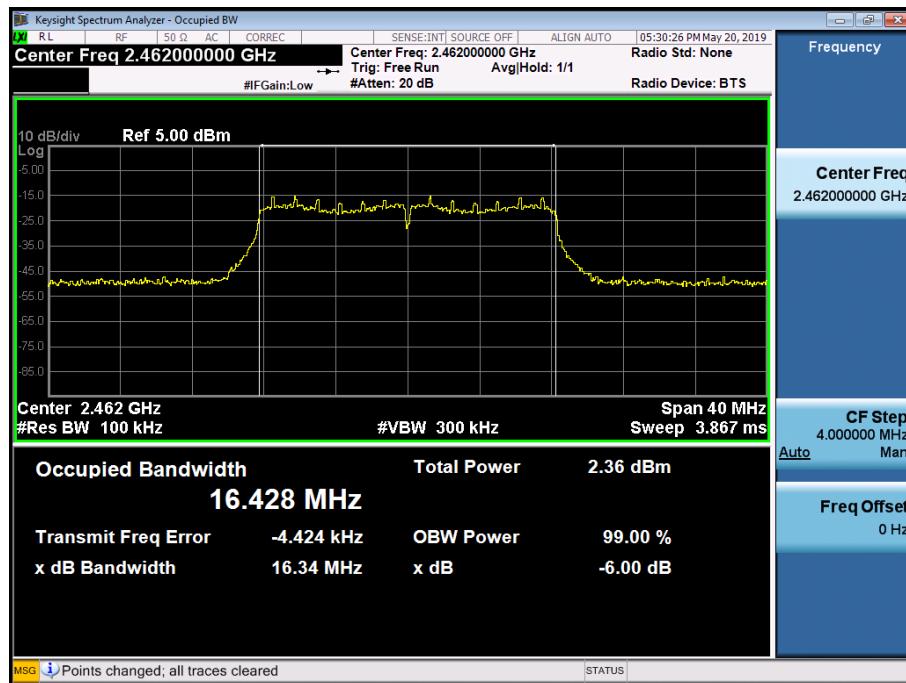

6dB Bandwidth plot (802.11n\_HT20-CH 11)

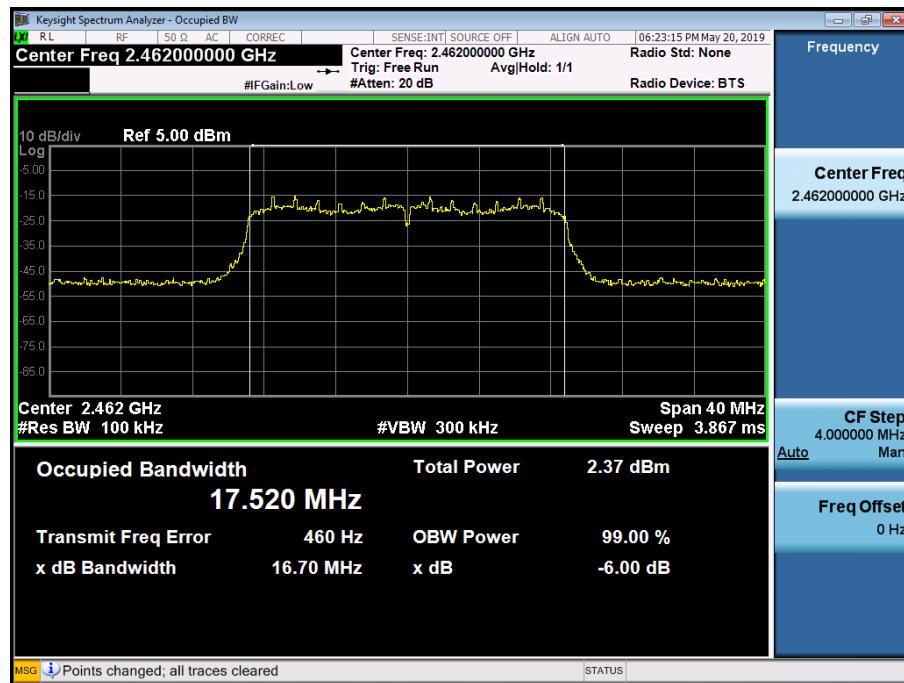

**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

IC

**[Ant1]**

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	14.72	N/A
2437	6	14.73	N/A
2462	11	14.72	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.68	N/A
2437	6	16.67	N/A
2462	11	16.67	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.53	N/A
2437	6	17.54	N/A
2462	11	17.53	N/A

**[Ant2]**

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.18	N/A
2437	6	15.28	N/A
2462	11	15.40	N/A


802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.83	N/A
2437	6	16.83	N/A
2462	11	16.84	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.65	N/A
2437	6	17.66	N/A
2462	11	17.68	N/A


[Ant1]

**Test Plots**


99% Bandwidth plot (802.11b-CH 6)

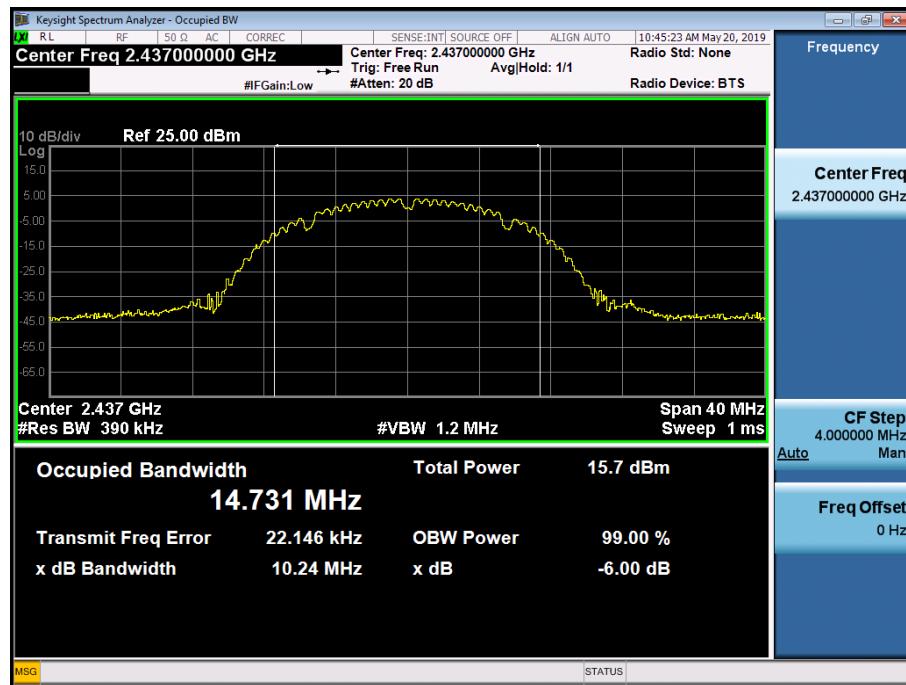

99% Bandwidth plot (802.11g-CH 1)

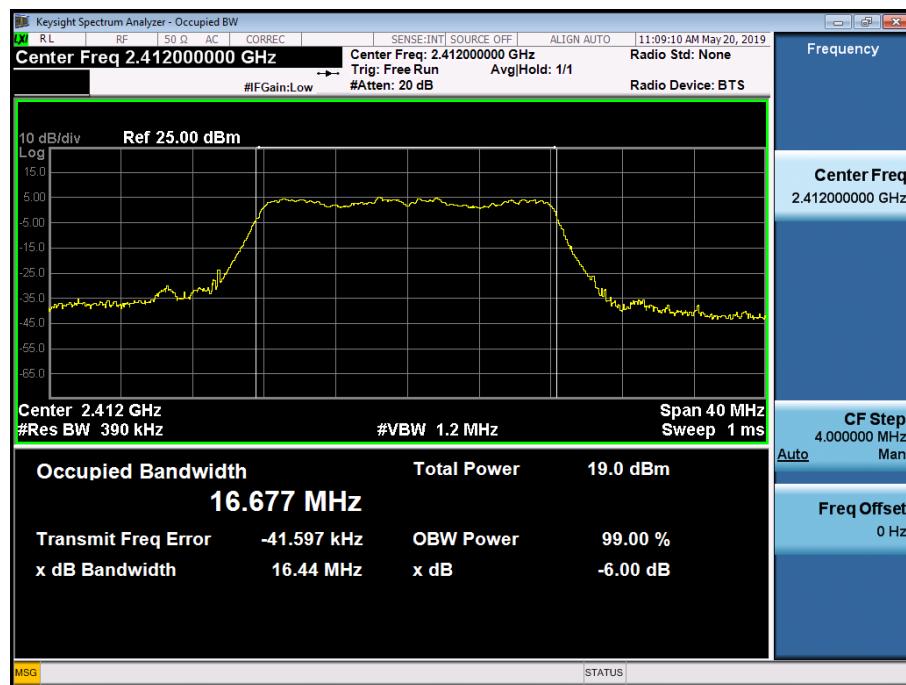

99% Bandwidth plot (802.11n\_HT20-CH 6)

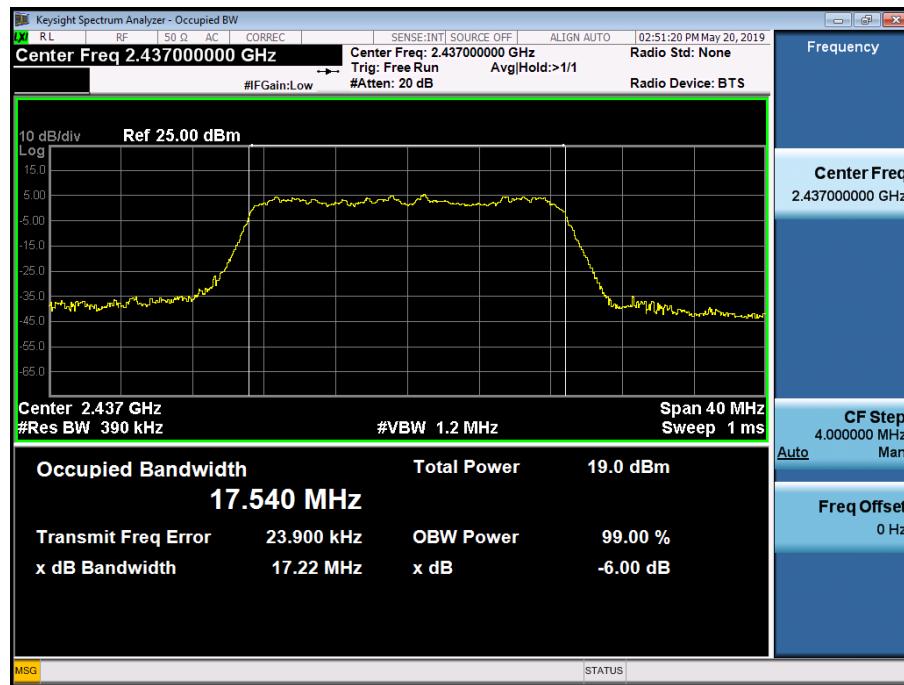


**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.


**[Ant2]**

**Test Plots**


99% Bandwidth plot (802.11b-CH 11)

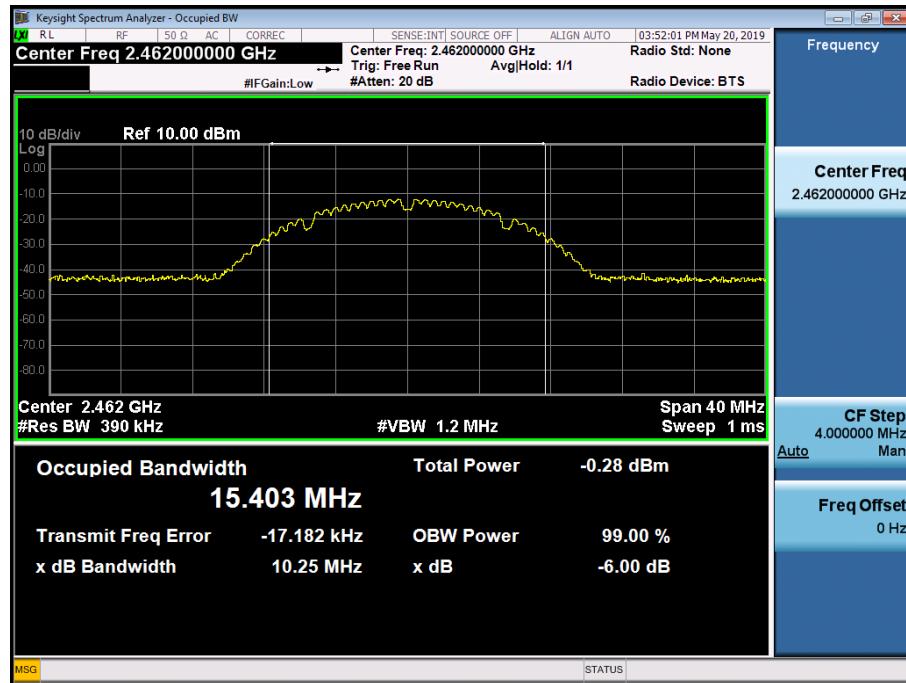

99% Bandwidth plot (802.11g-CH 11)

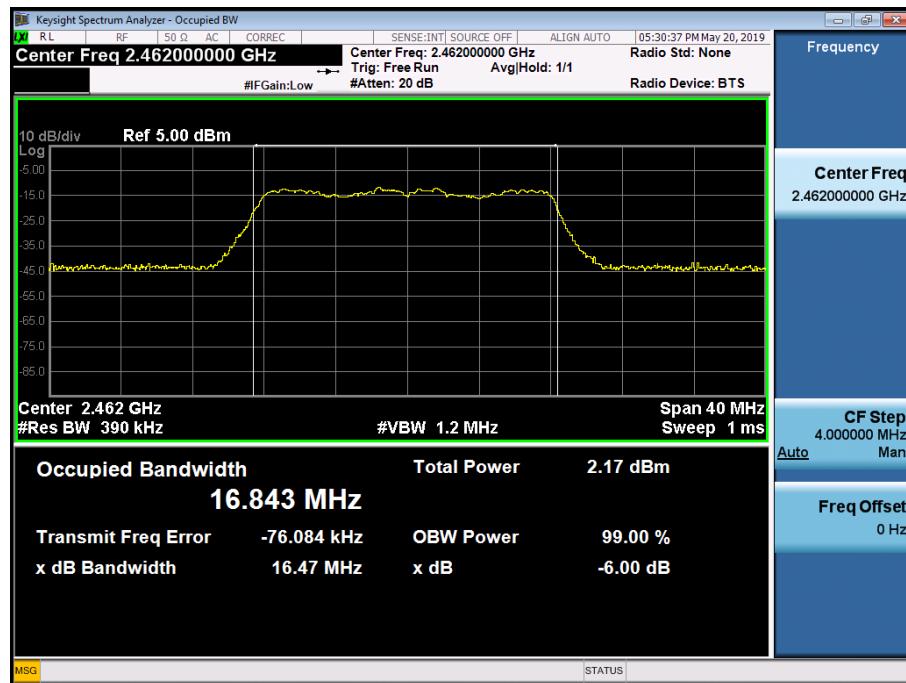

99% Bandwidth plot (802.11n\_HT20-CH 11)

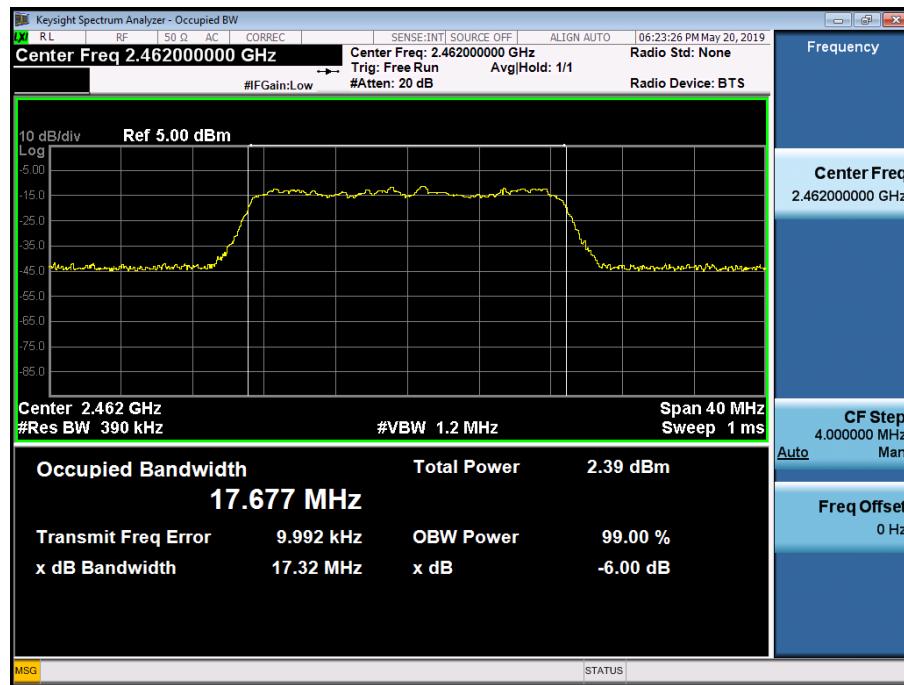

**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

## 9.3 OUTPUT POWER

### 1. Sample Calculation

- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.

So, 20.42 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting		
2412	1	1	16.06	15	0.99	15	16.19	30.00
		2	16.35		1.19		16.48	30.00
		5.5	17.75		2.56		17.88	30.00
		11	19.09		3.83		19.22	30.00
2437	6	1	15.23	15	-0.16	15	15.35	30.00
		2	15.59		0.08		15.71	30.00
		5.5	17.00		1.37		17.12	30.00
		11	18.49		2.67		18.60	30.00
2462	11	1	14.99	15	-0.88	15	15.10	30.00
		2	15.40		-0.61		15.51	30.00
		5.5	16.72		0.75		16.83	30.00
		11	18.13		2.03		18.24	30.00

802.11g Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting		
2412	1	6	19.83	15	4.54	15	19.96	30.00
		9	20.06		4.66		20.18	30.00
		12	19.70		4.28		19.82	30.00
		18	19.97		4.36		20.09	30.00
		24	20.47		4.79		20.59	30.00
		36	20.45		4.64		20.56	30.00
		48	20.77		4.78		20.88	30.00
		54	20.60		4.61		20.71	30.00
2437	6	6	19.50	15	3.67	15	19.61	30.00
		9	19.68		3.82		19.79	30.00
		12	19.39		3.40		19.50	30.00
		18	19.64		3.52		19.74	30.00
		24	20.10		3.94		20.20	30.00
		36	20.15		3.78		20.25	30.00
		48	20.40		3.95		20.50	30.00
		54	20.25		3.78		20.35	30.00
2462	11	6	19.27	15	3.09	15	19.37	30.00
		9	19.55		3.17		19.65	30.00
		12	19.17		2.81		19.27	30.00
		18	19.30		2.88		19.40	30.00
		24	19.78		3.31		19.88	30.00
		36	19.77		3.16		19.86	30.00
		48	20.02		3.31		20.11	30.00
		54	19.95		3.14		20.04	30.00

802.11n(HT20) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	0	19.98	15	4.53	15	20.10	30.00
		1	19.77		4.08		19.89	30.00
		2	19.61		3.93		19.73	30.00
		3	20.34		4.57		20.45	30.00
		4	20.25		4.37		20.36	30.00
		5	20.42		4.49		20.53	30.00
		6	20.16		4.09		20.27	30.00
		7	20.26		4.19		20.37	30.00
2437	6	0	19.35	15	3.56	15	19.46	30.00
		1	19.22		3.19		19.33	30.00
		2	19.14		3.01		19.24	30.00
		3	19.75		3.63		19.85	30.00
		4	19.72		3.45		19.82	30.00
		5	19.83		3.54		19.93	30.00
		6	19.60		3.18		19.70	30.00
		7	19.68		3.28		19.78	30.00
2462	11	0	19.12	15	2.96	15	19.22	30.00
		1	18.90		2.59		19.00	30.00
		2	18.80		2.40		18.90	30.00
		3	19.59		3.00		19.68	30.00
		4	19.48		2.83		19.57	30.00
		5	19.65		2.95		19.74	30.00
		6	19.28		2.56		19.37	30.00
		7	19.42		2.72		19.51	30.00

### Average Power

Report No.: EMCE-R-1905-F002-1

45 / 97

This document may not be copied or reproduced (reprinted) without written consent by EMCE Engineering, Inc.

EMCE Engineering, Inc., 1726 Ringwood Avenue, San Jose, CA 95131, USA

TEL: +1-510-933-8848 FAX: +1-510-933-8849

1. Sample Calculation

- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.

So, 20.42 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting		
2412	1	1	13.19	15	-1.87	15	13.32	30.00
		2	13.21		-1.87		13.34	30.00
		5.5	13.14		-2.03		13.27	30.00
		11	13.06		-2.31		13.18	30.00
2437	6	1	12.27	15	-3.04	15	12.40	30.00
		2	12.27		-3.15		12.39	30.00
		5.5	12.25		-3.30		12.37	30.00
		11	12.05		-3.53		12.17	30.00
2462	11	1	11.70	15	-3.81	15	11.82	30.00
		2	11.81		-3.97		11.92	30.00
		5.5	11.89		-4.16		12.00	30.00
		11	11.66		-4.13		11.77	30.00

802.11g Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting		
2412	1	6	11.80	15	-3.53	15	11.93	30.00
		9	12.04		-3.23		12.17	30.00
		12	11.53		-3.74		11.66	30.00
		18	12.59		-3.07		12.71	30.00
		24	12.38		-3.16		12.50	30.00
		36	12.26		-3.61		12.37	30.00
		48	13.31		-2.74		13.42	30.00
		54	12.60		-3.49		12.71	30.00
2437	6	6	11.13	15	-4.80	15	11.24	30.00
		9	11.39		-4.36		11.50	30.00
		12	11.04		-4.77		11.15	30.00
		18	11.96		-4.36		12.06	30.00
		24	11.72		-4.55		11.82	30.00
		36	11.18		-4.61		11.29	30.00
		48	12.50		-3.96		12.60	30.00
		54	11.80		-4.71		11.90	30.00
2462	11	6	10.88	15	-5.45	15	10.98	30.00
		9	11.34		-5.40		11.43	30.00
		12	10.25		-5.45		10.37	30.00
		18	11.82		-4.87		11.91	30.00
		24	11.64		-4.87		11.74	30.00
		36	11.31		-5.24		11.41	30.00
		48	12.37		-4.35		12.46	30.00
		54	11.57		-5.25		11.66	30.00

802.11n(HT20) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	0	12.23	15	-3.29	15	12.35	30.00
		1	12.42		-3.38		12.53	30.00
		2	12.29		-3.34		12.41	30.00
		3	12.91		-2.90		13.02	30.00
		4	12.75		-3.25		12.86	30.00
		5	11.99		-4.04		12.10	30.00
		6	11.77		-4.33		11.88	30.00
		7	13.44		-2.66		13.55	30.00
2437	6	0	11.64	15	-4.33	15	11.75	30.00
		1	11.72		-4.32		11.83	30.00
		2	11.91		-4.42		12.01	30.00
		3	12.31		-4.01		12.41	30.00
		4	12.14		-4.25		12.24	30.00
		5	11.30		-5.19		11.40	30.00
		6	11.14		-5.40		11.24	30.00
		7	12.97		-3.80		13.06	30.00
2462	11	0	11.12	15	-5.07	15	11.22	30.00
		1	11.31		-4.94		11.41	30.00
		2	11.07		-5.07		11.17	30.00
		3	11.85		-4.63		11.95	30.00
		4	11.55		-5.78		11.63	30.00
		5	10.71		-5.99		10.80	30.00
		6	10.59		-6.80		10.67	30.00
		7	12.29		-4.49		12.38	30.00

## 9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Measured PSD (dBm)			
			Ant 1	Ant 2	MIMO (Ant 1 + Ant 2)	Limit
802.11b	2412	1	3.532	-10.355	3.71	8.00
	2437	6	-7.504	-24.050	-7.41	
	2462	11	-0.015	-13.494	0.18	
802.11g	2412	1	-13.670	-28.282	-13.52	8.00
	2437	6	-13.714	-30.737	-13.63	
	2462	11	-13.932	-31.196	-13.85	
802.11n(HT20)	2412	1	-13.339	-29.832	-13.24	8.00
	2437	6	-14.480	-30.759	-14.38	
	2462	11	-14.688	-31.372	-14.60	

**Note :**

1. Sample Calculation

▪ Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.

So, 20.42 dB is offset for 2.4 GHz Band.


[Ant1]

## □ Test Plots


## Power Spectral Density (802.11b-CH 11)



## Power Spectral Density (802.11g-CH 12)

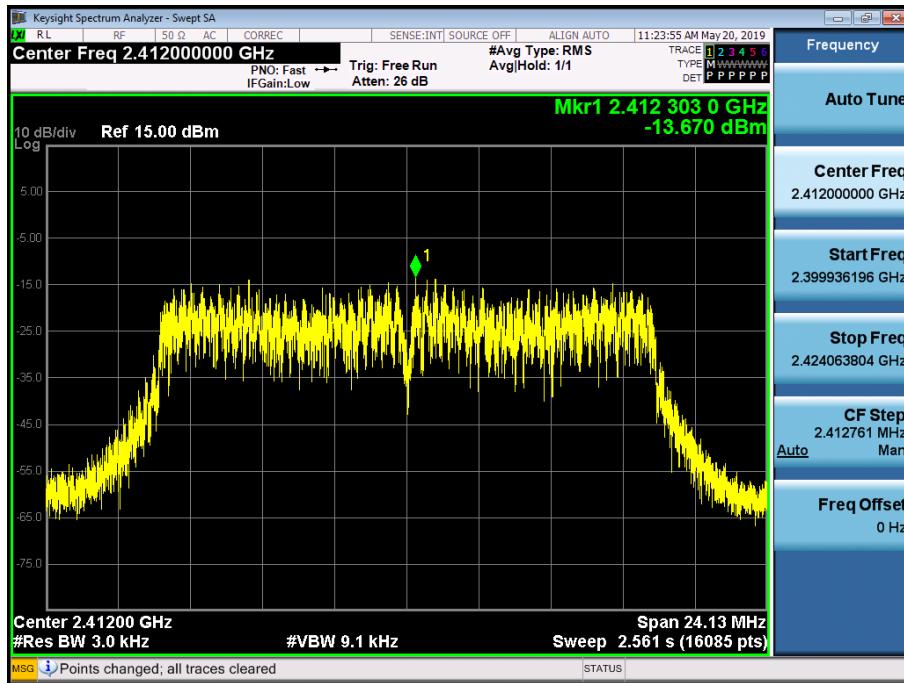

Power Spectral Density (802.11n\_HT20 -CH 12)

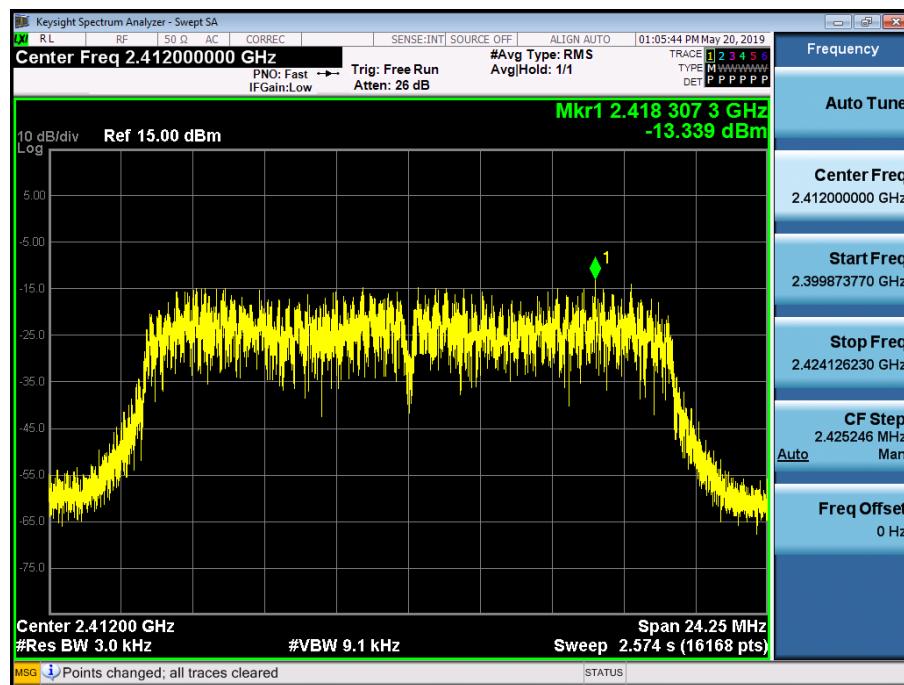


**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.


[Ant2]

□ Test Plots


Power Spectral Density (802.11b-CH 11)

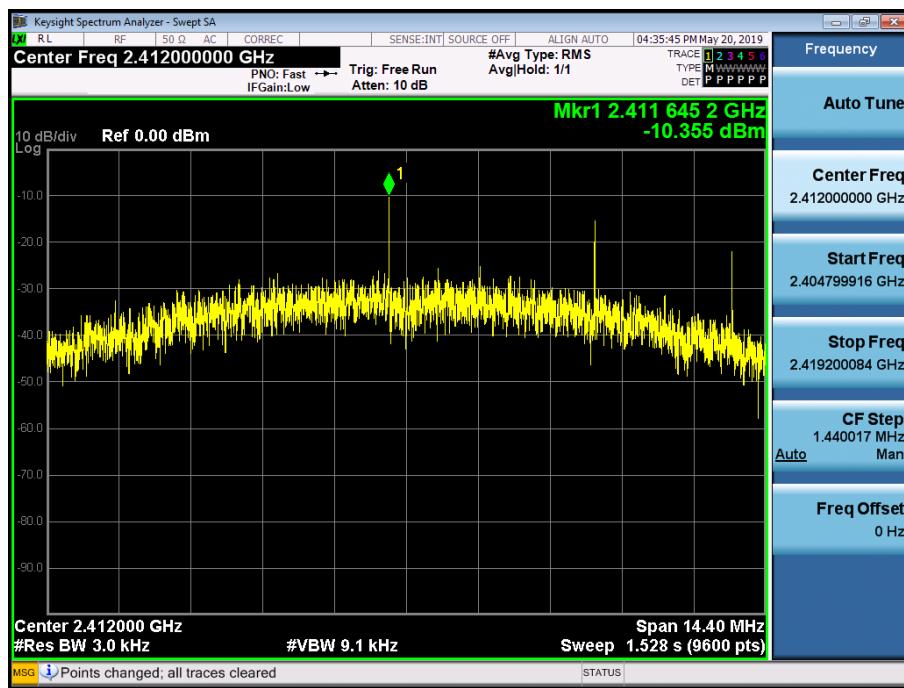

Power Spectral Density (802.11g-CH 12)

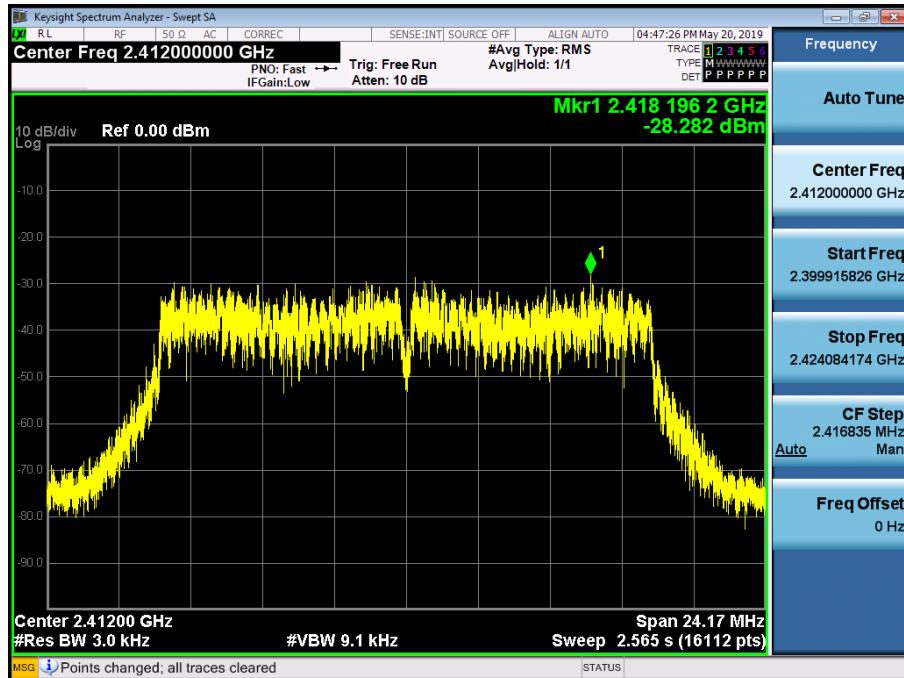

Power Spectral Density (802.11n\_HT20 -CH 12)

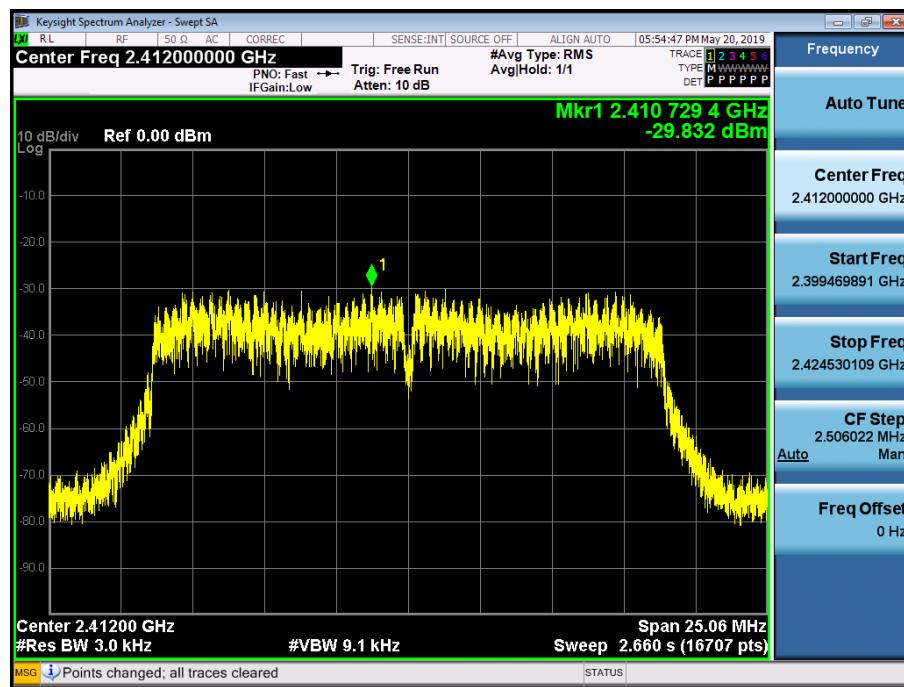

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.

## 9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

### ■ TEST RESULTS

#### Out of Band Emissions at the Band Edge

##### 802.11 b

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	41.85	20	Pass
2480	39	Upper	42.28	20	Pass

##### 802.11 g

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	37.96	20	Pass
2480	39	Upper	38.84	20	Pass

##### 802.11 n

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	38.96	20	Pass
2480	39	Upper	39.21	20	Pass

#### Conducted Spurious Emissions

##### 802.11 b

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	38.18	20	Pass

**ANT2**

**Out of Band Emissions at the Band Edge**

**802.11 b**

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	44.54	20	Pass
2480	39	Upper	45.81	20	Pass

**802.11 g**

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	38.11	20	Pass
2480	39	Upper	41.69	20	Pass

**802.11 n**

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	38.84	20	Pass
2480	39	Upper	41.99	20	Pass

**Conducted Spurious Emissions**


**802.11 b**

Frequency [MHz]	Channel No.	Position	Test Result		
			Measured Level [dB]	Limit [dBc]	Pass/Fail
2402	0	Lower	31.92	20	Pass


[Ant1]

□ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

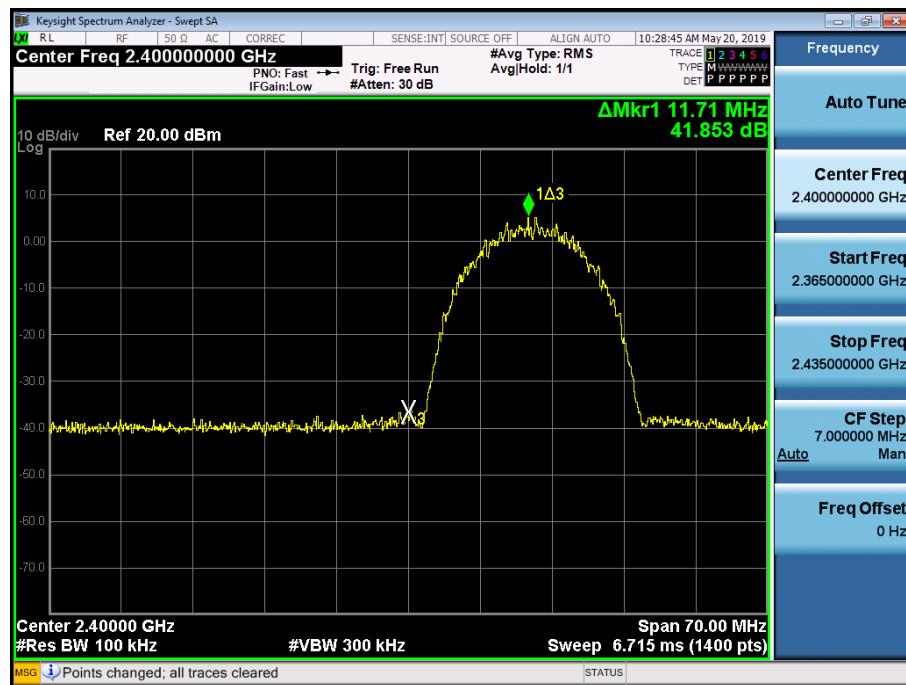


Band Edge (802.11b-CH11)

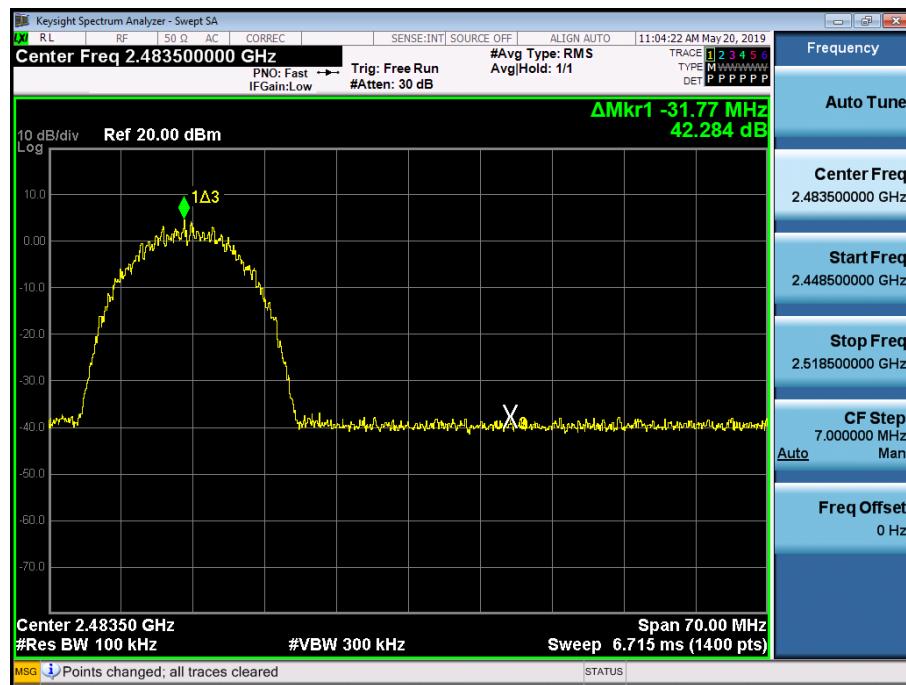

Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)

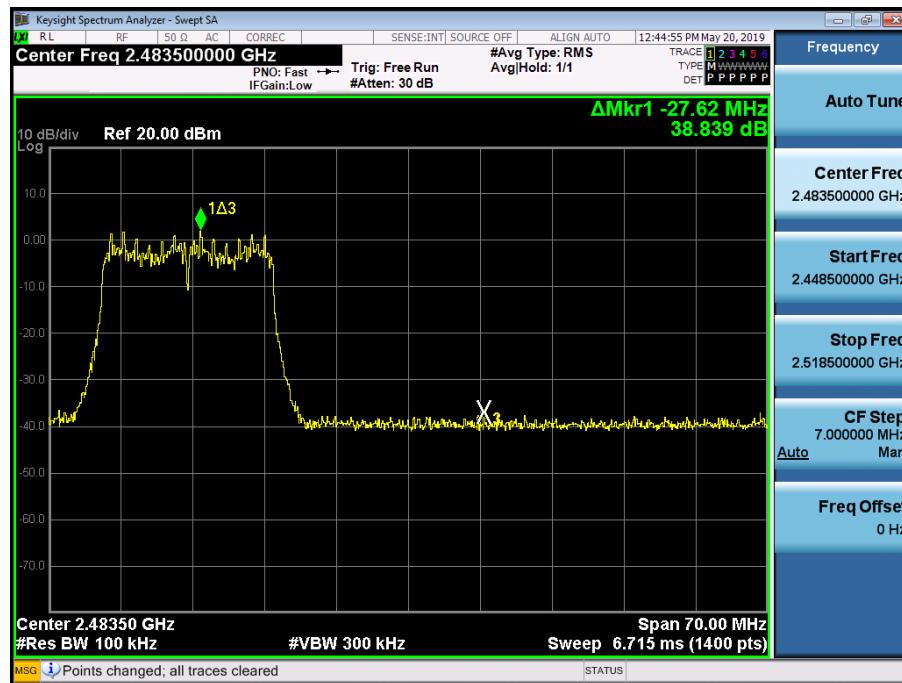

Band Edge (802.11n\_HT20 -CH1)



Band Edge (802.11n\_HT20 -CH11)

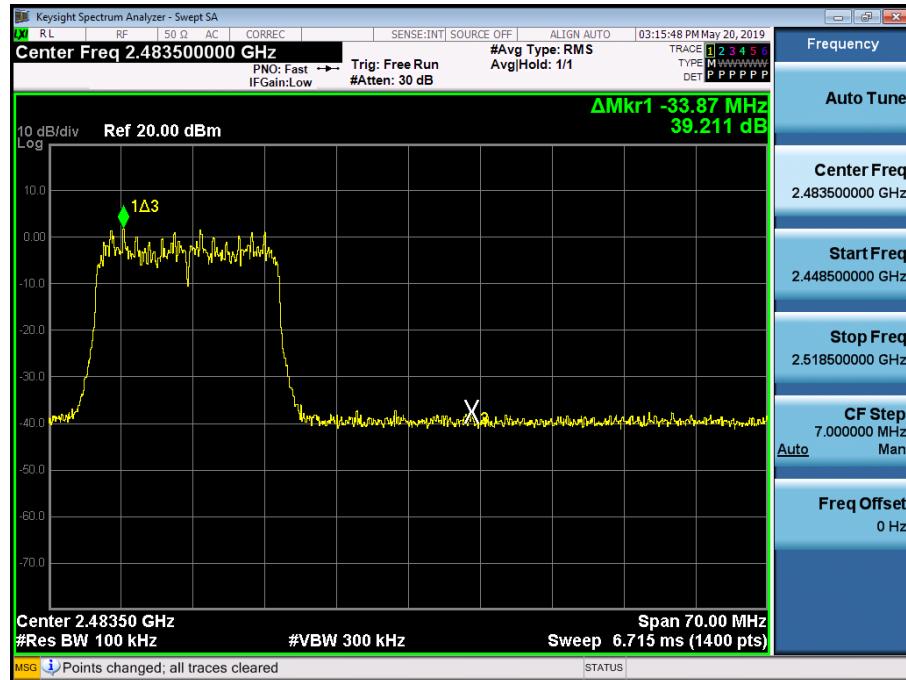

## □ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

## Conducted Spurious Emission (802.11b\_Ch.11)




1 GHz ~ 3 GHz

## Conducted Spurious Emission (802.11b\_Ch.11)

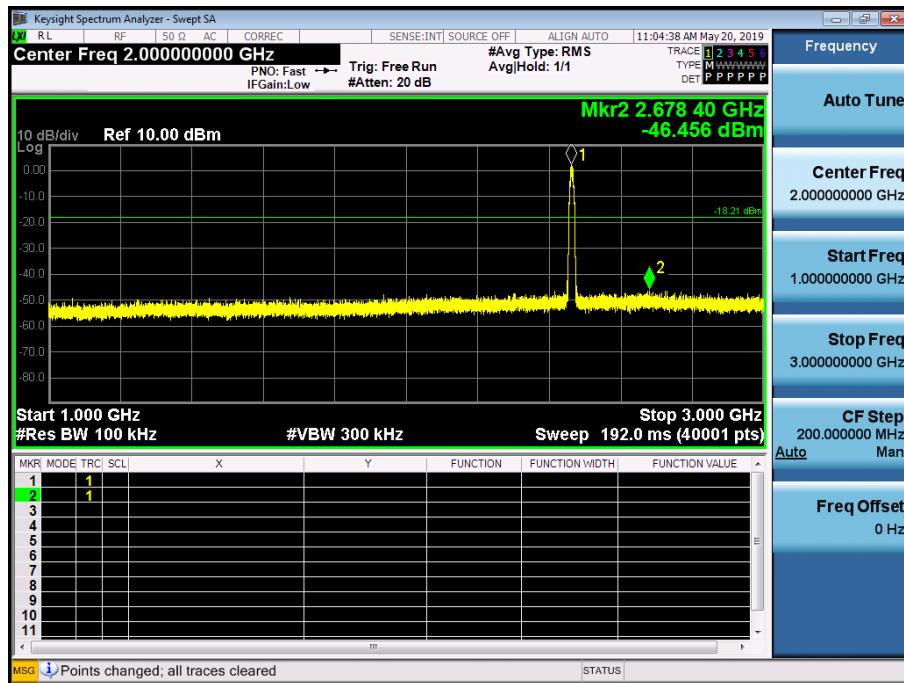


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

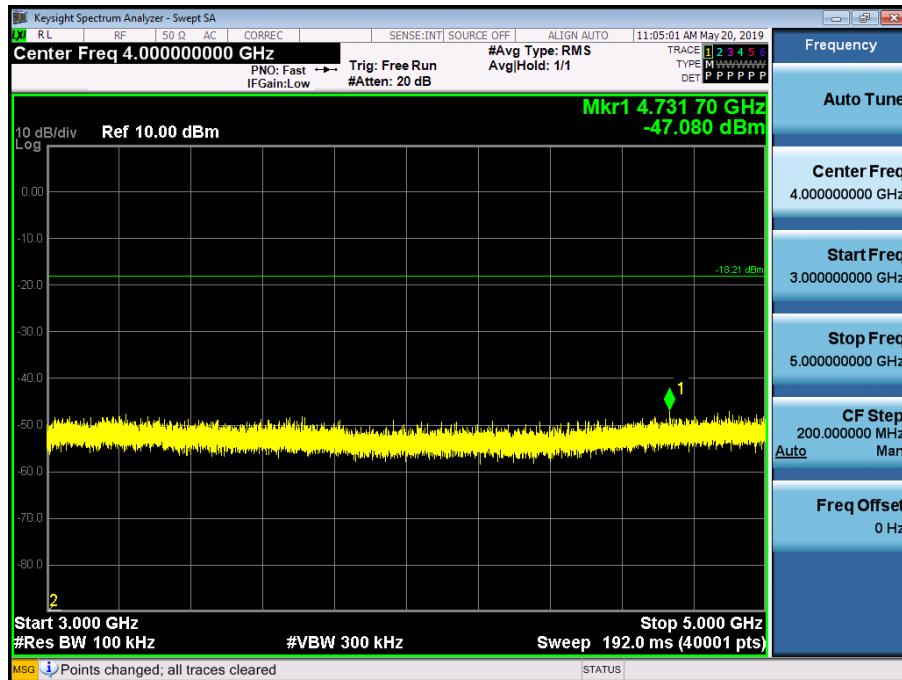


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

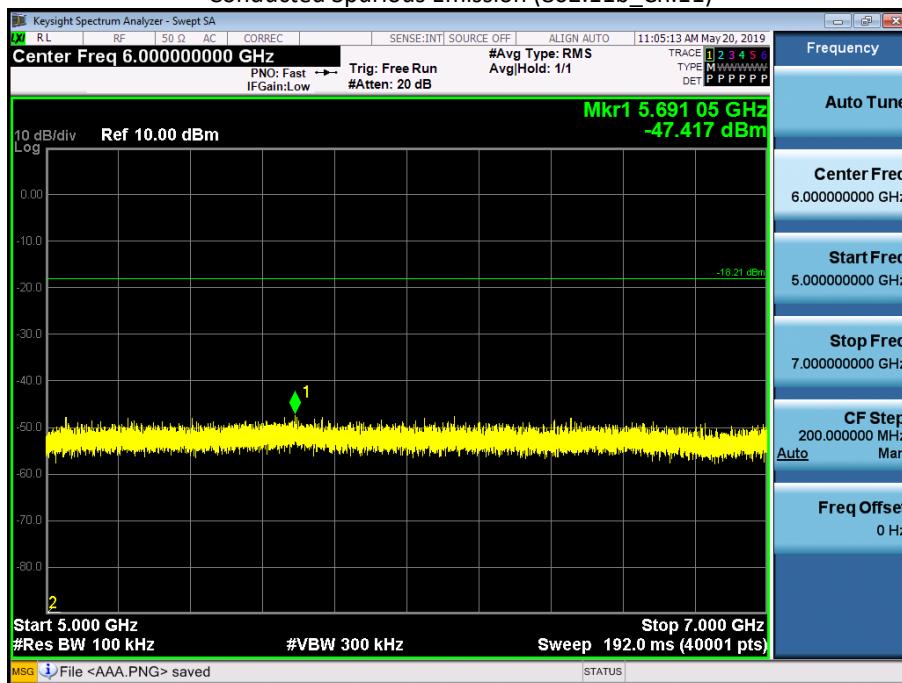


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

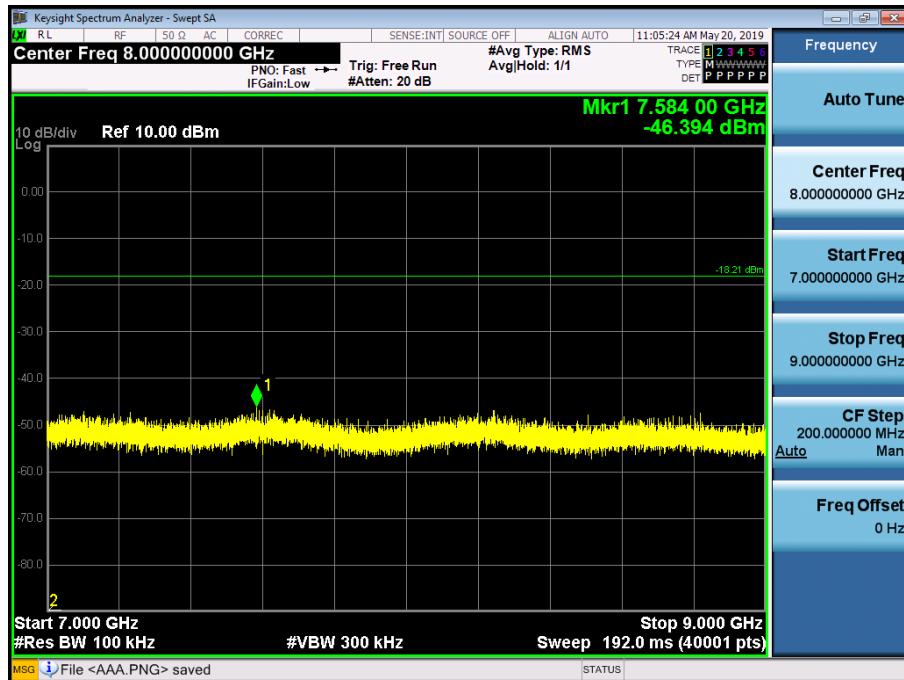


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

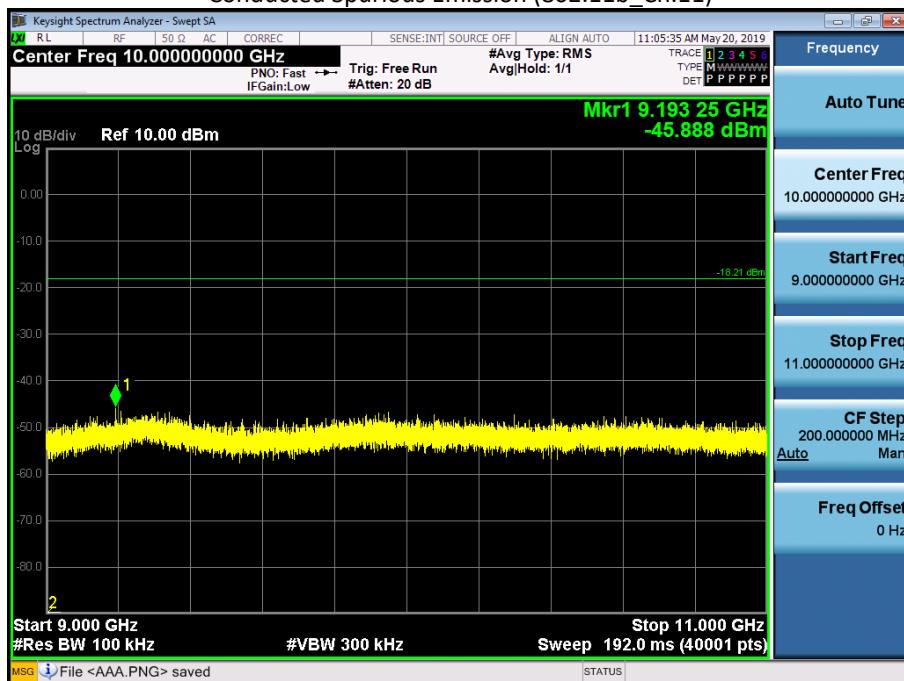


11 GHz ~ 13 GHz

## Conducted Spurious Emission (802.11b\_Ch.11)

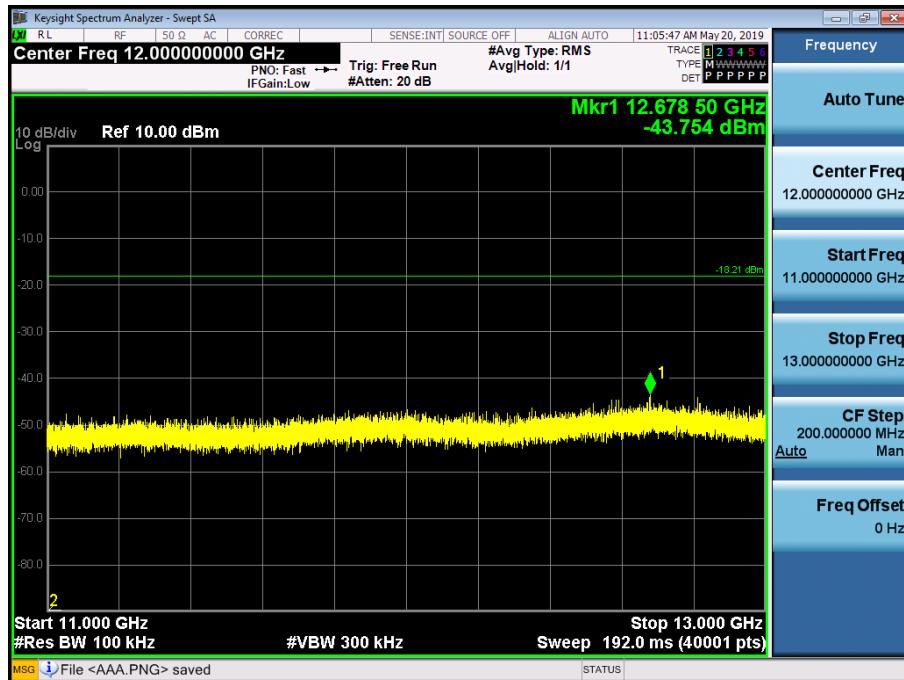


13 GHz ~ 15 GHz

## Conducted Spurious Emission (802.11b\_Ch.11)

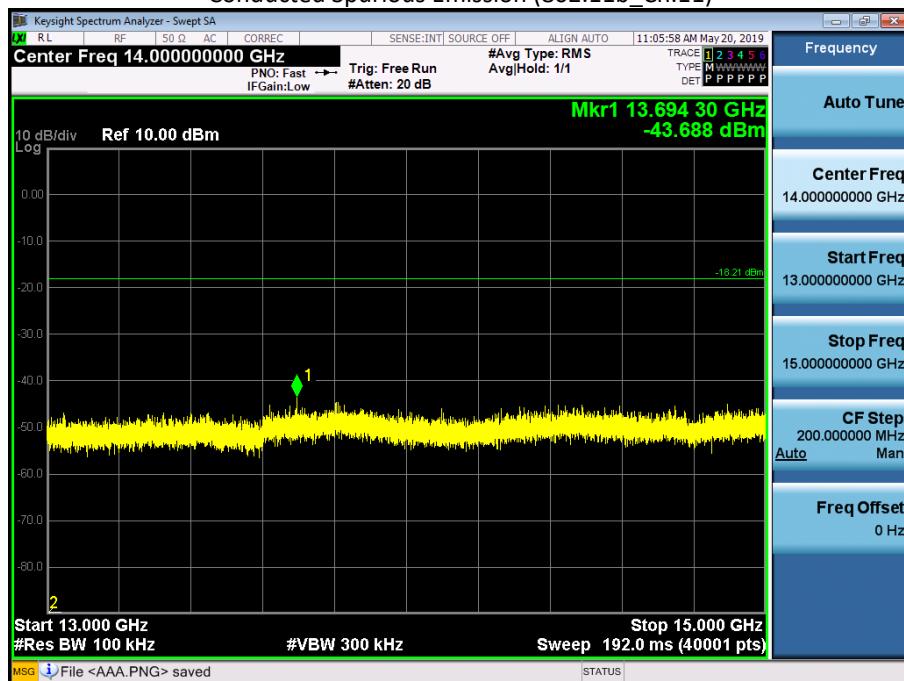


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

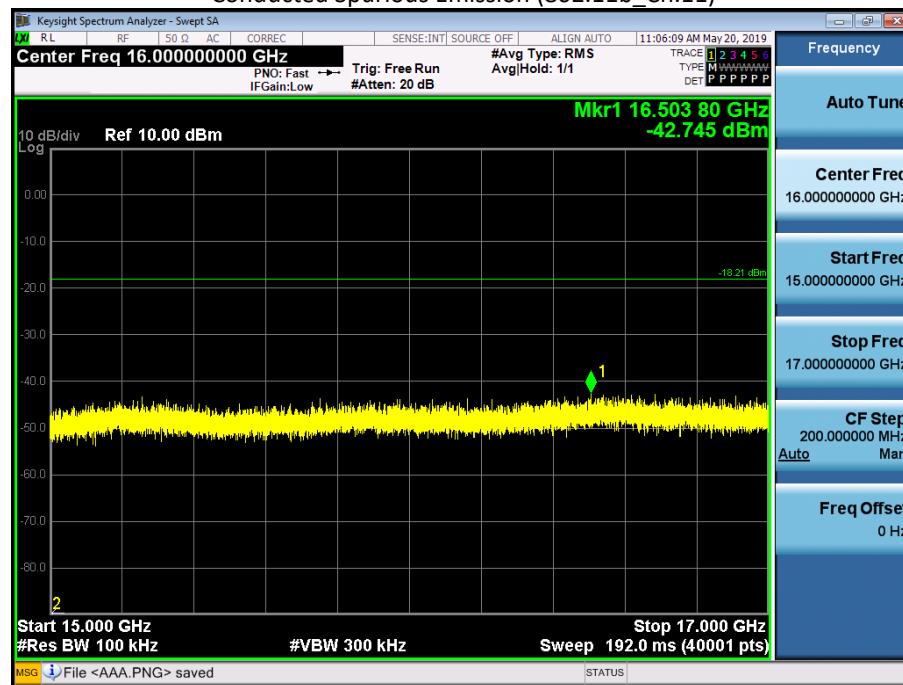


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

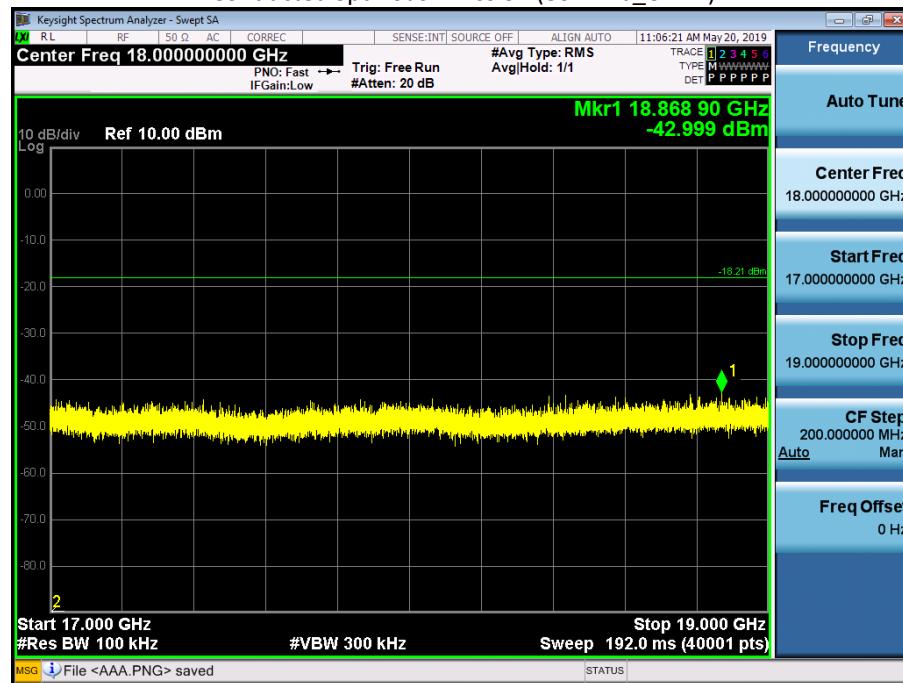


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

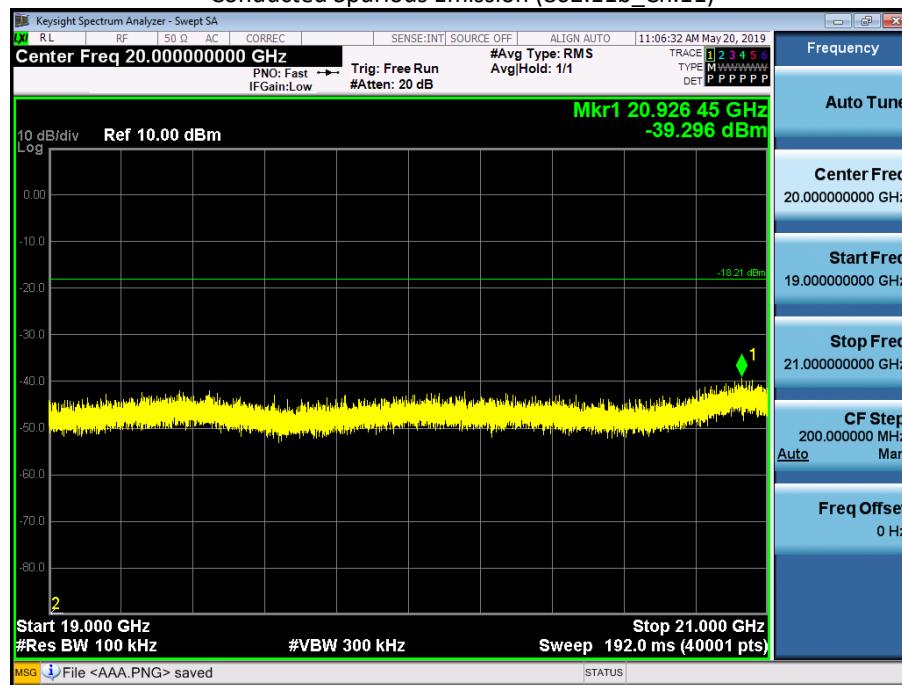


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

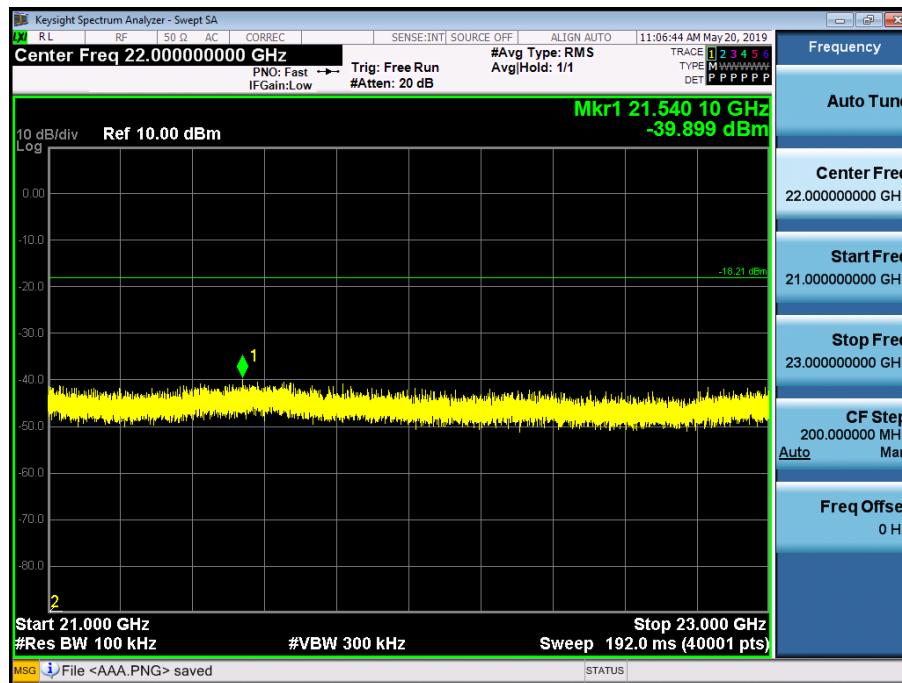

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

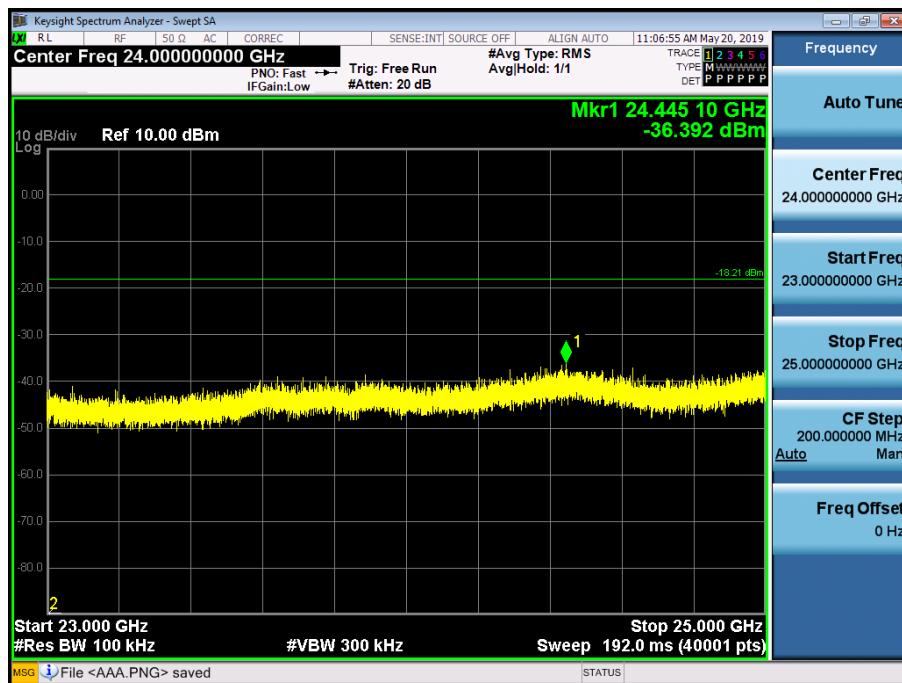


[Ant2]

□ Test Plots(BandEdge)


Band Edge (802.11b-CH1)



Band Edge (802.11b-CH11)

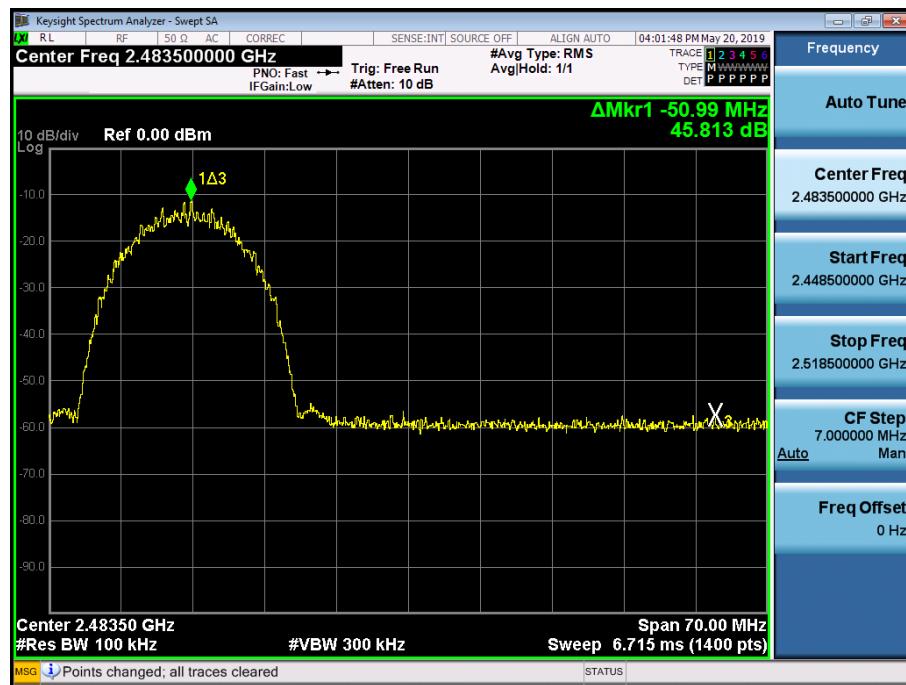

Band Edge (802.11g-CH1)

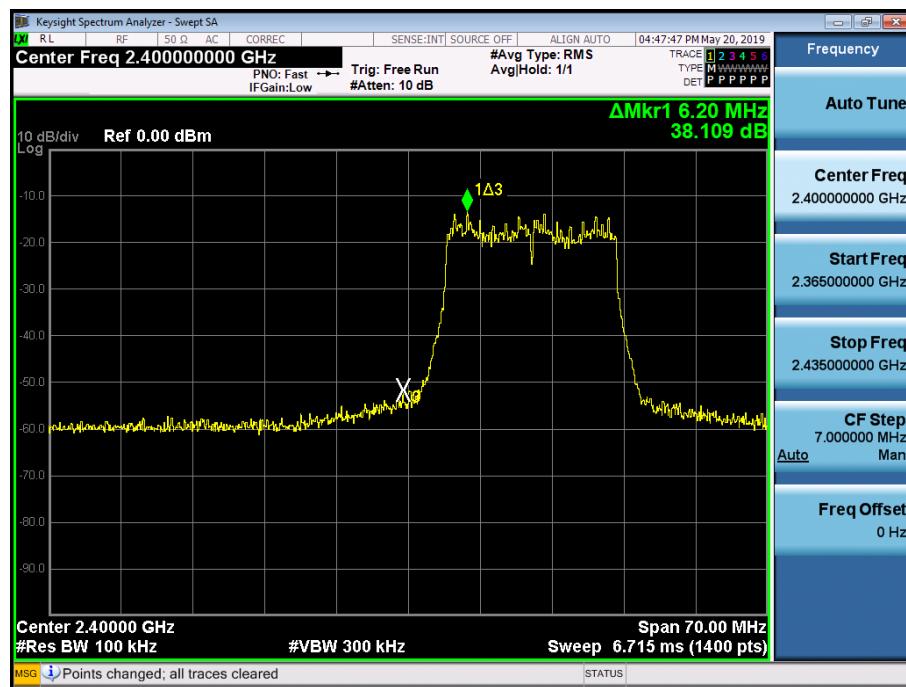


Band Edge (802.11g-CH11)



Band Edge (802.11n\_HT20 -CH1)




Band Edge (802.11n\_HT20 -CH11)

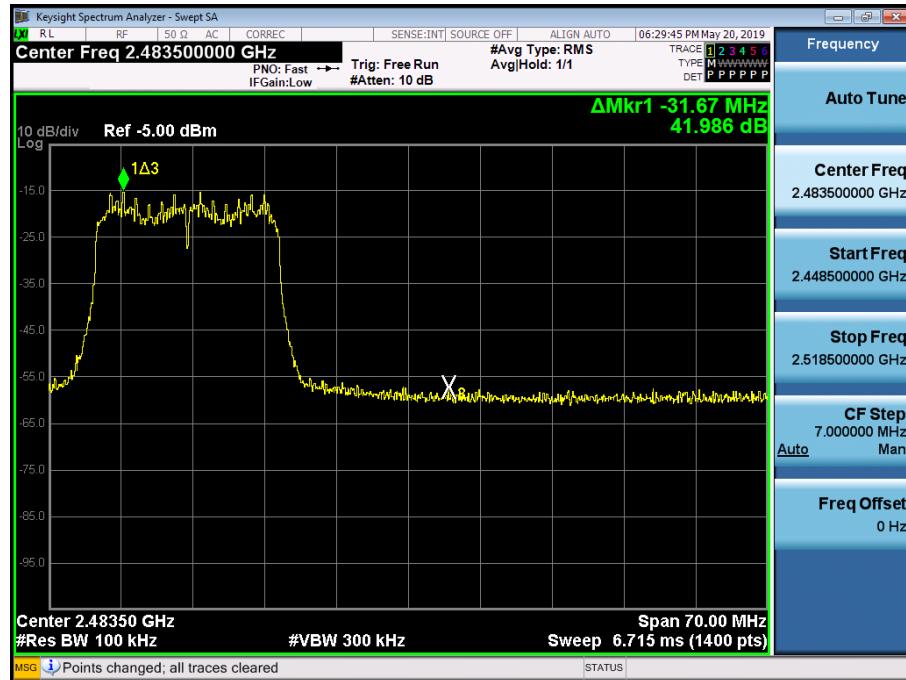

## □ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

## Conducted Spurious Emission (802.11b\_Ch.11)

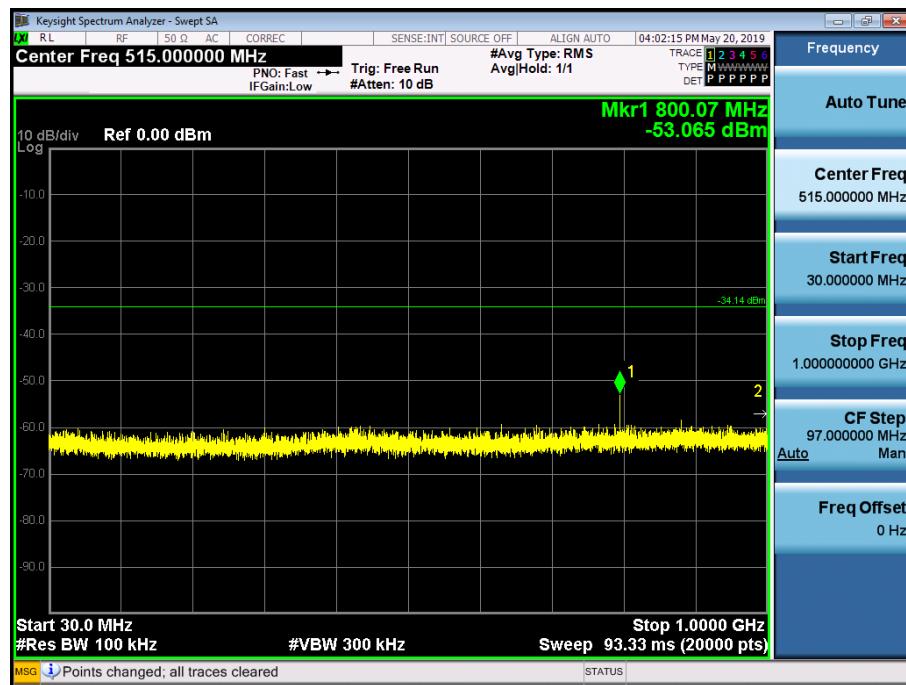


1 GHz ~ 3 GHz

### Conducted Spurious Emission (802.11b\_Ch.11)

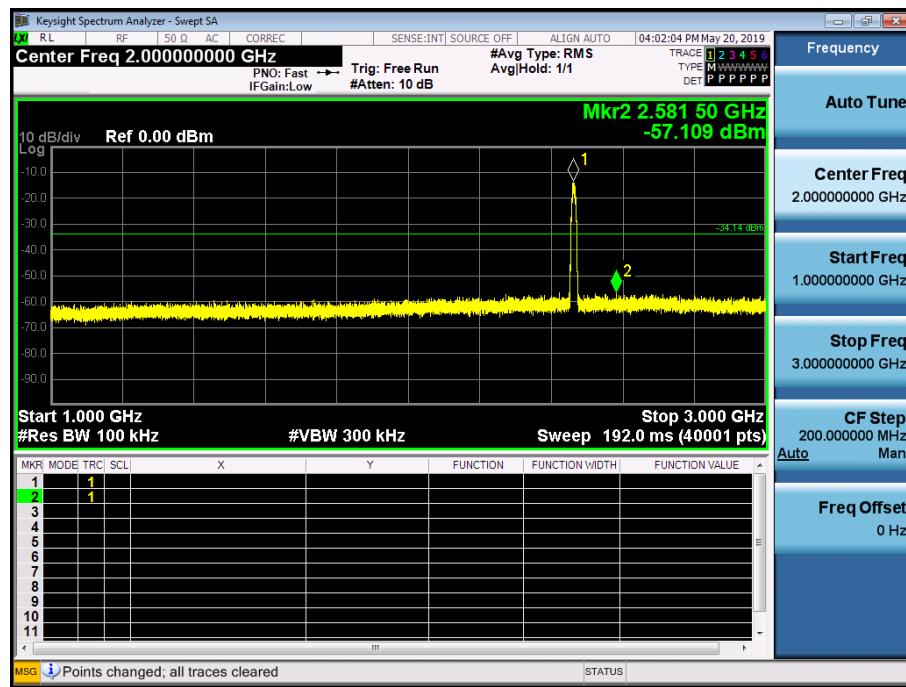

3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

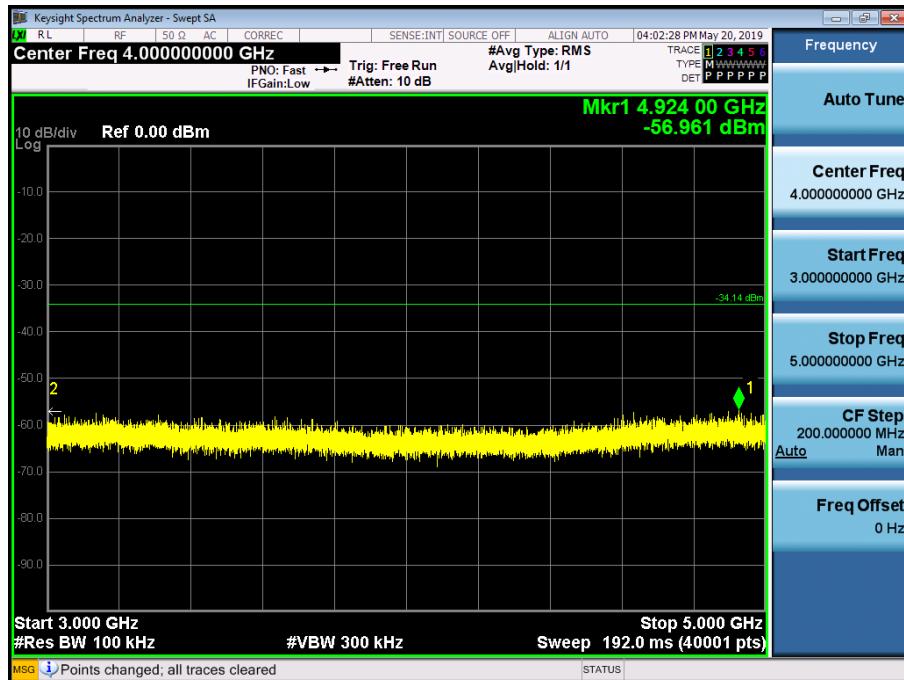


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b\_Ch.11)




7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

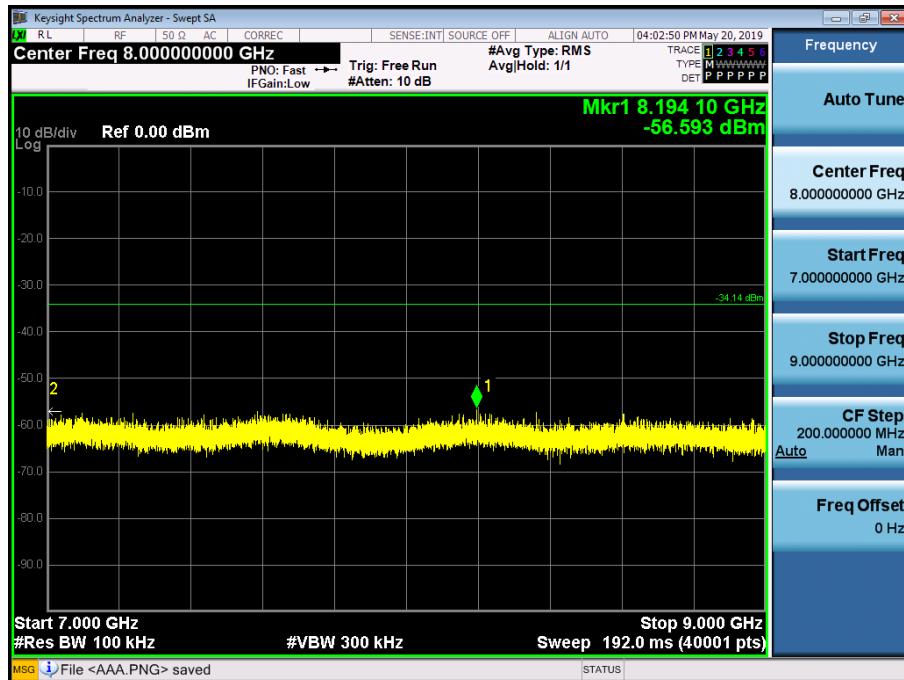


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

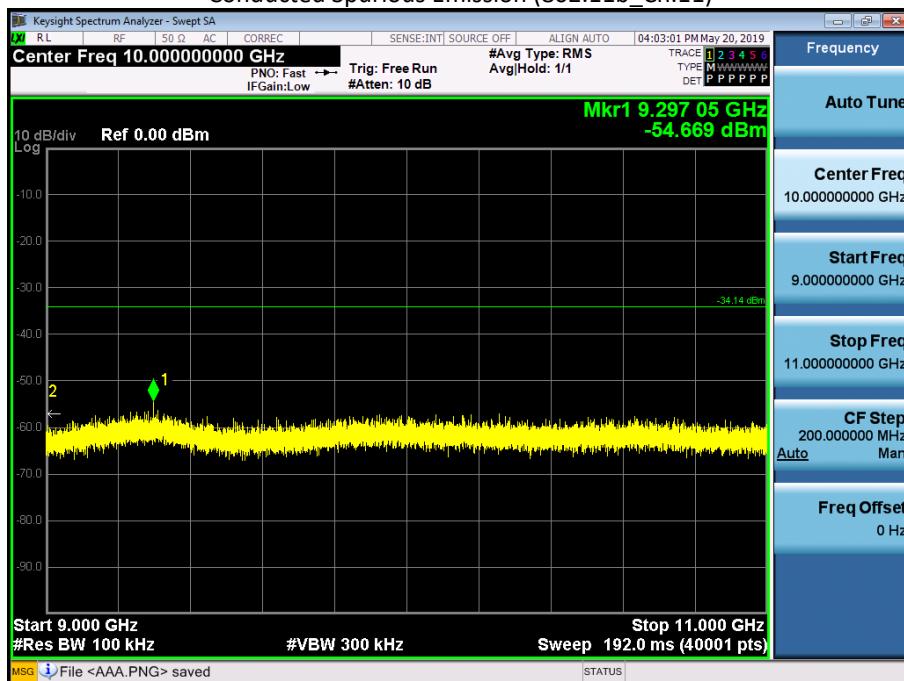


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

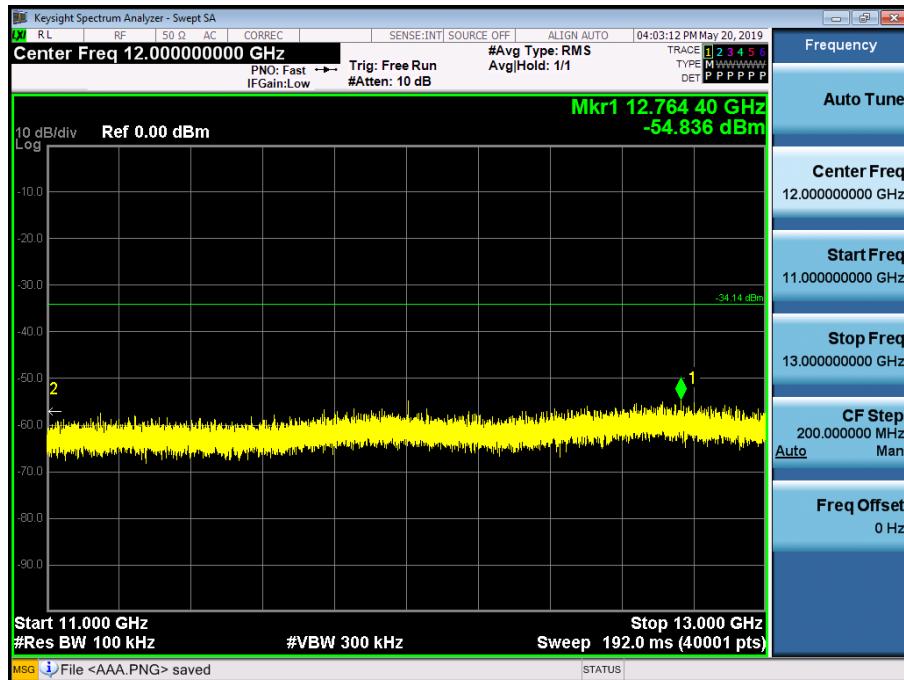

13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

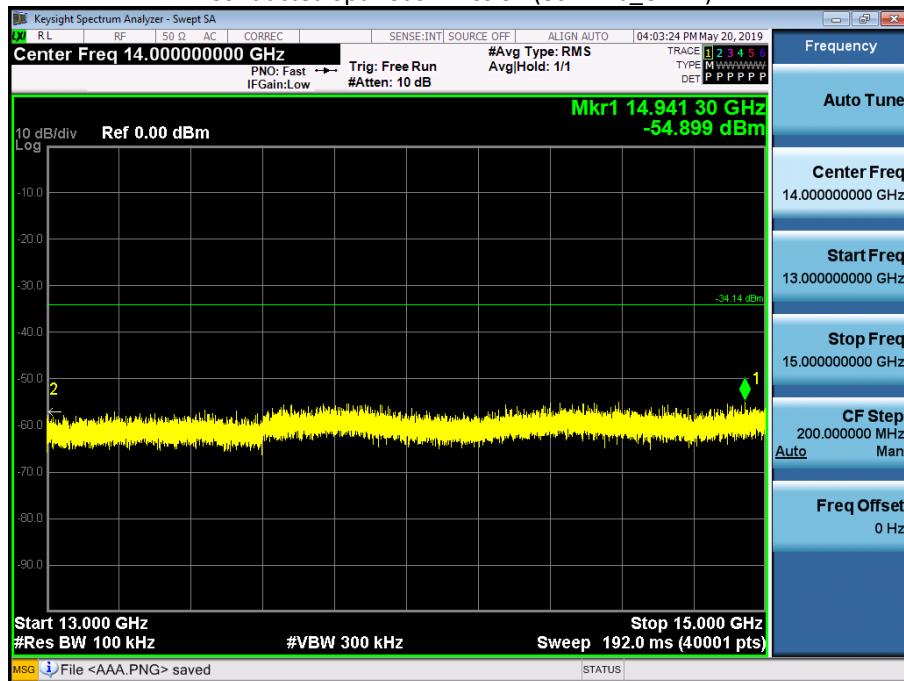


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b\_Ch.11)




17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

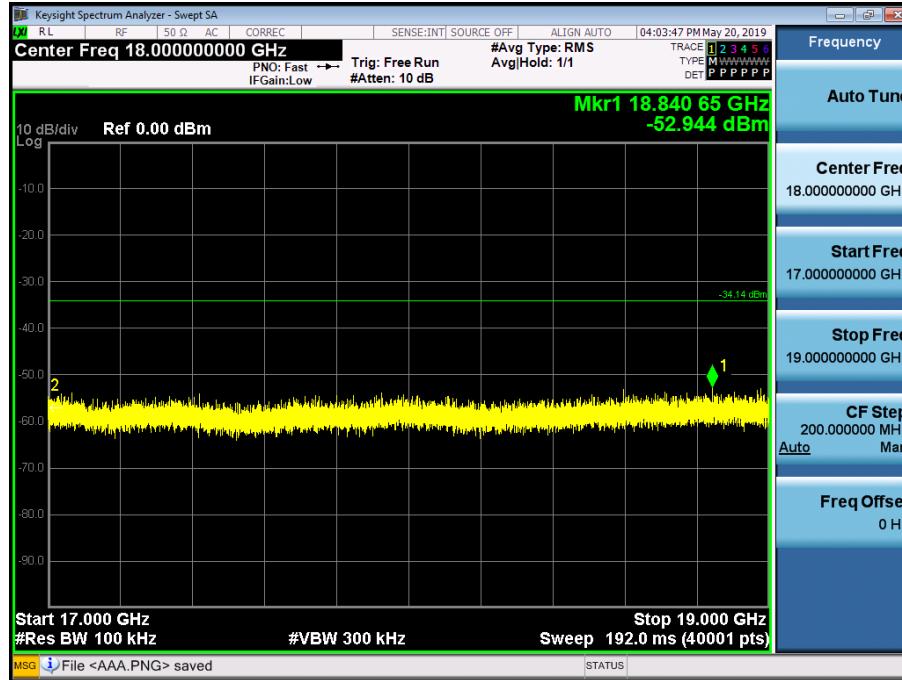


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

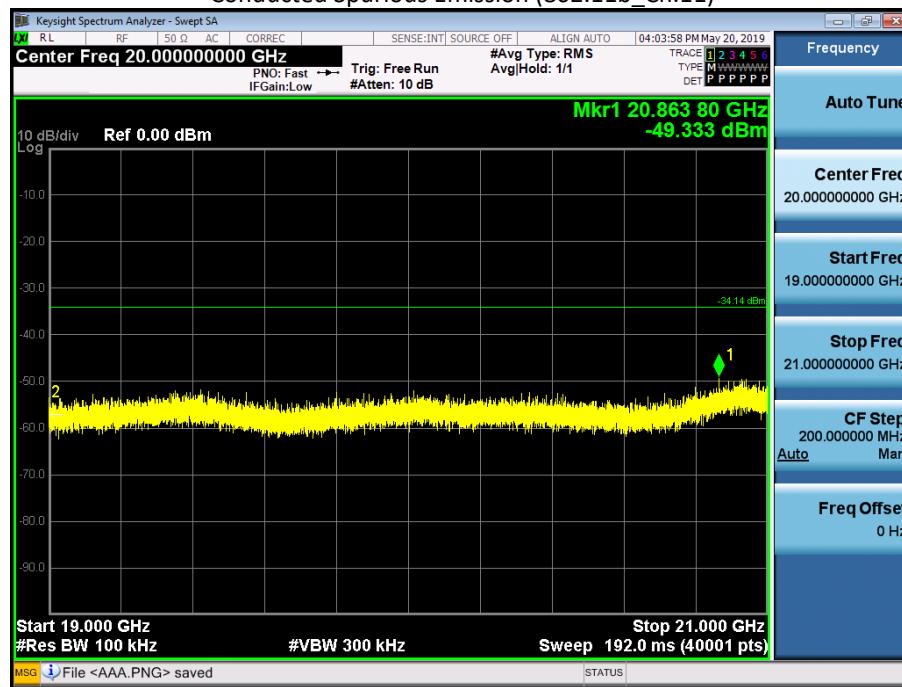


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

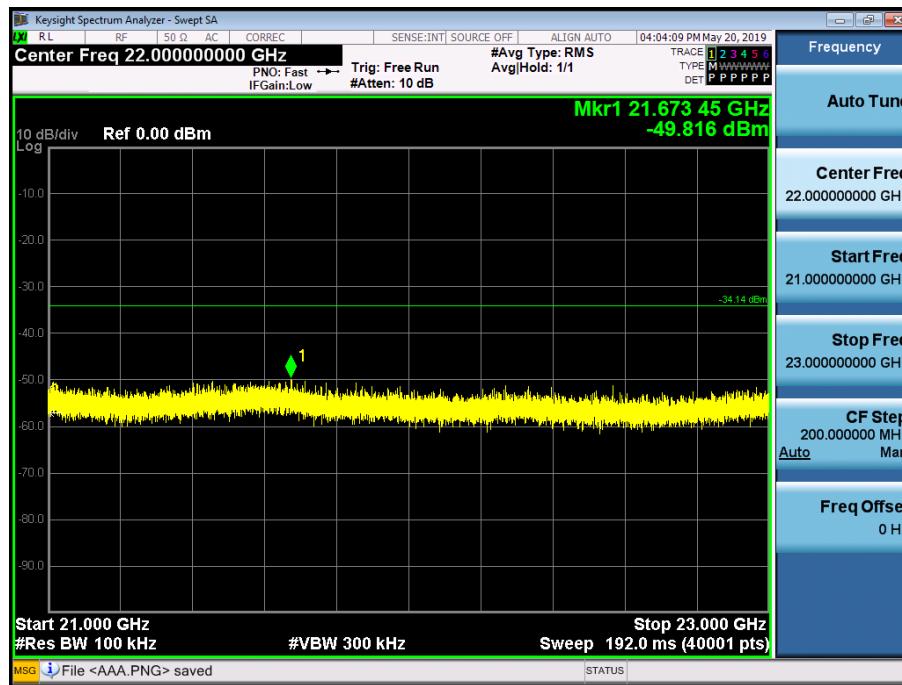

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b\_Ch.11)

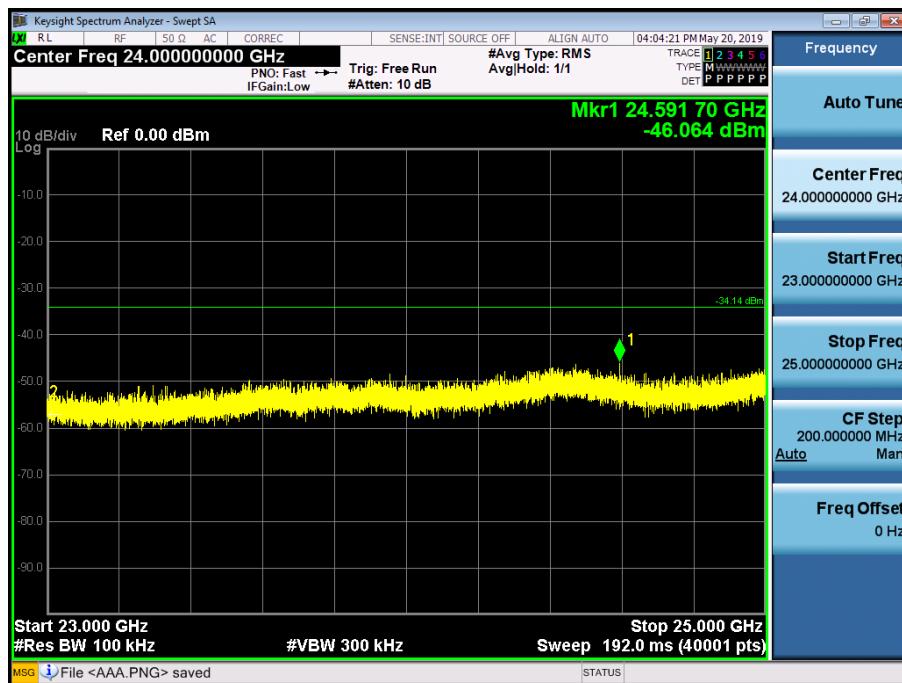

## 9.6 RADIATED SPURIOUS EMISSIONS

### 9 kHz – 30MHz

CH 1

Frequency [kHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
40	V	27	20.6	47.6	115.56	67.96	QP
40	H	27.8	20.6	48.4	115.56	67.16	QP

CH 6

Frequency [kHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
40	V	26.6	20.6	47.2	115.56	68.36	QP
40	H	27.2	20.6	47.8	115.56	67.76	QP

CH 11

Frequency [kHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
40	V	26.3	20.1	42.6	115.56	69.16	QP
40	H	27.5	20.1	42.6	115.56	67.96	QP

#### Notes:

Although these tests were performed at a test site other than an open area test site, adequate comparison measurements were confirmed against an open area test site. Therefore, sufficient test were made to demonstrate that the alternative site produces Result that correlate with the one of test made in an open field based on KDB 414788

#### Sample validation

Reference-signal Frequency [kHz]	Reading [dBuV]	Measurement Distance [m]	Extrapolation Factor	Total [dBuV/m]
135	76.1	3	88.4	-12.3
135	47.4	10	59.1	-11.7

1. The measurement distance is 3 meters.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Corrected reading: Antenna Factor + Cable loss + Read Level
5. The other operating Modes are attenuated more than 20 dB below the permissible limits. In order to simplify the report, attached Charging Mode via Laptop result were the worst-case mode.

**Frequency Range : Below 1 GHz**

**CH 1**

Frequency [MHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
67.4	V	51.6	-18.2	33.4	40	6.6	QP
69.3	H	39.0	-17.8	21.2	40	18.8	QP
114.1	V	47.1	-13.4	33.7	43.5	9.8	QP

**CH 6**

Frequency [MHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
31.5	V	33.9	-6.0	27.9	40	12.1	QP
67.7	V	51.7	-18.2	33.5	43.5	6.5	QP
113.6	H	46.5	-13.5	33.0	43.5	10.5	QP

**CH 11**

Frequency [MHz]	ANT. POL [H/V]	Reading [dBuV]	※A.F.+C.L. [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
31.2	V	33.9	-5.7	28.2	40	11.8	QP
67.3	H	51.5	-18.3	33.2	40	6.8	QP
114.1	H	47.0	-13.4	33.6	43.5	9.9	QP

[Only MIMO]

**Frequency Range : Above 1 GHz**

Operation Mode:	802.11b	
Transfer Rate:	1 Mbps	
Operating Frequency	2412	
Channel No.	01 Ch	

Frequency MHz	Polarization	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
4824	H	49.5	53.8	-3.2	46.3	50.6	54	74	7.7	23.4
4824	V	52.3	58.0	-3.3	49.0	54.7	54	74	5.0	19.3
7236	V	39.2	52.3	2.3	41.5	54.6	54	74	12.5	19.4
7236	H	39.3	52.9	2.3	41.6	55.2	54	74	12.4	18.8

Operation Mode:	802.11g	
Transfer Rate:	6 Mbps	
Operating Frequency	2412	
Channel No.	01 Ch	

Frequency MHz	Polarization	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2240	H	52.0	64.7	-13.1	38.9	51.6	54	74	15.1	22.4
2240	V	48.3	61.1	-13.1	35.2	48.0	54	74	18.8	26.0
4824	V	49.3	56.8	-3.4	45.9	53.4	54	74	8.1	20.6
4824	H	51.3	62.6	-3.4	47.9	59.2	54	74	6.1	14.8

---

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency MHz	Polarization	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
1499	H	44.3	57.7	-17.5	26.8	40.2	54	74	27.2	33.8
1499	V	49.4	66.0	-17.5	31.9	48.5	54	74	22.1	25.5
4824	V	40.6	55.0	-3.3	37.3	51.7	54	74	16.7	22.3
4824	H	39.1	52.2	-3.3	35.8	48.9	54	74	18.2	25.1
7236	V	37.9	51.7	1.9	39.8	53.6	54	74	14.2	20.4
7236	H	38.0	51.5	1.7	39.7	53.2	54	74	14.3	20.8

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency 2437  
 Channel No. 06 Ch

Frequency MHz	Polarizatio n	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2317	H	52.2	64.7	-13.0	39.2	51.7	54	74	14.8	22.3
2277	V	50.5	63.7	-13.1	37.4	50.6	54	74	16.6	23.4
4874	H	53.7	60.4	-3.4	50.3	57.0	54	74	3.7	17.0
4874	V	52.0	60.6	-3.4	48.6	57.2	54	74	5.4	16.8

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency 2437  
 Channel No. 06 Ch

Frequency MHz	Polarizati on	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2237	V	52.4	65.2	-13.1	39.3	52.1	54	74	14.7	21.9
3677	V	40.7	54.5	-6.4	34.3	48.1	54	74	19.7	25.9
4874	H	39.4	52.4	-3.3	36.1	49.1	54	74	17.9	24.9
4874	V	40.1	53.4	-3.4	36.7	50.0	54	74	17.3	24.0

---

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency MHz	Polarizati on	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
4874	H	44.8	54.9	-3.3	41.5	51.6	54	74	12.5	22.4
4874	V	39.5	52.8	-3.4	36.1	49.4	54	74	17.9	24.6
7311	H	37.9	51.6	2.1	40.0	53.7	54	74	14.0	20.3
7311	V	37.7	51.5	2.2	39.9	53.7	54	74	14.1	20.3

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency 2462  
 Channel No. 11 Ch

Frequency MHz	Polarizati on	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2261	H	50.5	63.0	-13.1	37.4	49.9	54	74	16.6	24.1
2221	V	54.1	66.2	-13.1	41.0	53.1	54	74	13.0	20.9
4924	H	50.8	57.8	-3.3	47.5	54.5	54	74	6.5	19.5
4924	V	49.1	52.4	-3.3	45.8	49.1	54	74	8.2	24.9

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency 2462  
 Channel No. 11 Ch

Frequency MHz	Polarizati on	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2259	H	35.4	63.5	-13.1	22.3	50.4	54	74	31.7	23.6
2259	V	41.2	61.5	-13.1	28.1	48.4	54	74	25.9	25.6
4924	H	35.5	51.6	-3.3	32.2	48.3	54	74	21.8	25.7
4924	V	36.1	49.8	-3.3	32.8	46.5	54	74	21.2	27.5

Operation Mode:	802.11n (HT20)	
Transfer Rate:	6.5 Mbps	
Operating Frequency	2462	
Channel No.	11 Ch	

Frequency MHz	Polarizati on	Reading			Level		Limit		Margin	
		dB(uV)		dB	dB(uV/m)		dB(uV/m)		dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
4924	H	44.8	54.9	-3.3	41.5	51.6	54	74	12.5	22.4
4924	V	39.5	52.8	-3.4	36.1	49.4	54	74	17.9	24.6
7386	H	37.9	51.6	2.1	40.0	53.7	54	74	14.0	20.3
7386	V	37.7	51.5	2.2	39.9	53.7	54	74	14.1	20.3

#### Note

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.

#### 4. Sample Calculation

Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)


= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor


**Test Plots**

**9 kHz – 30MHz**

Radiated Spurious Emissions plot – (802.11b)

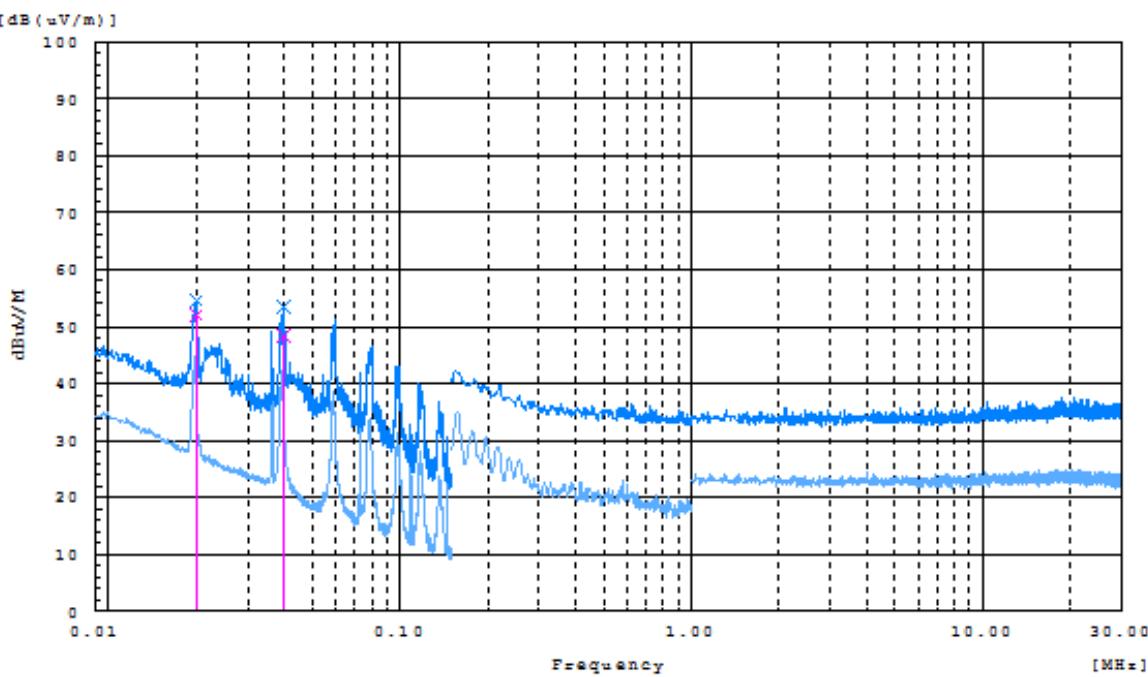


Radiated Spurious Emissions plot – (802.11b)

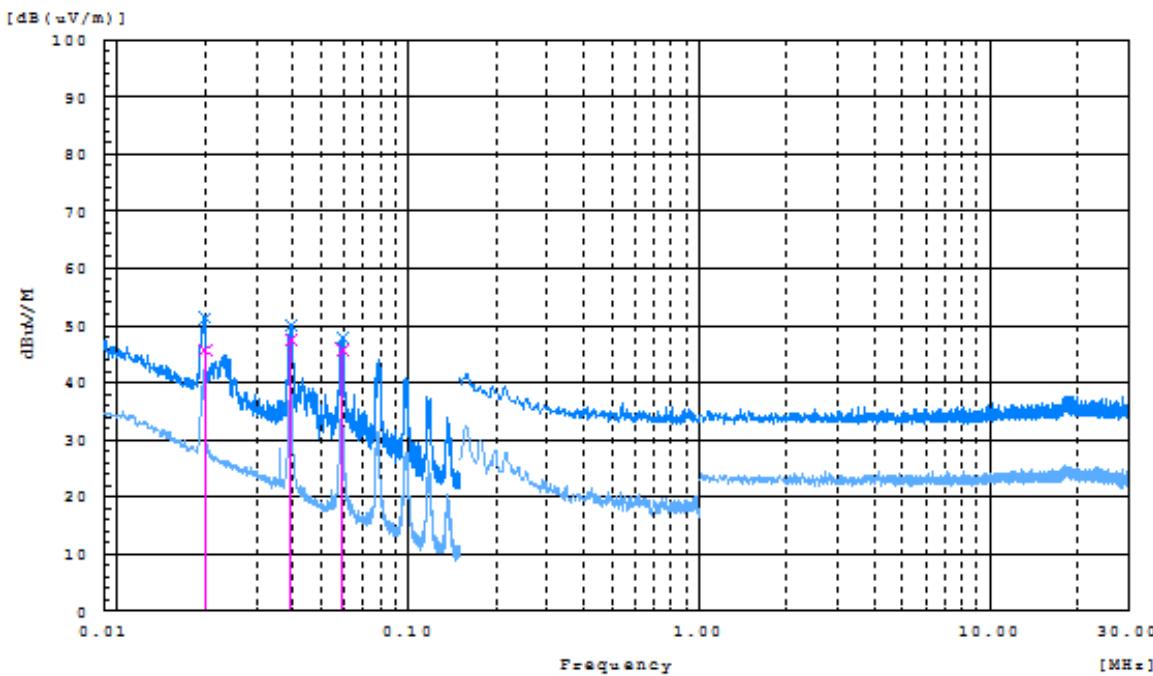


**Below 1 GHz**

Radiated Spurious Emissions plot – (802.11b)

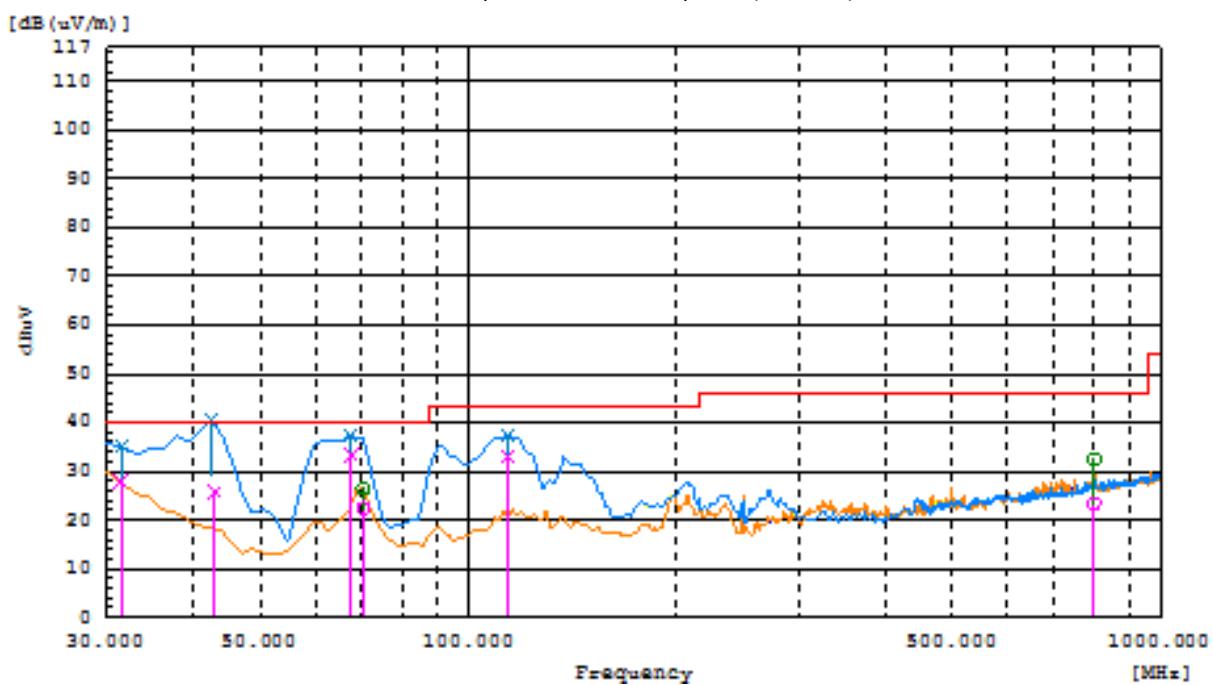


**Above 1 GHz**


Radiated Spurious Emissions plot – (802.11b)

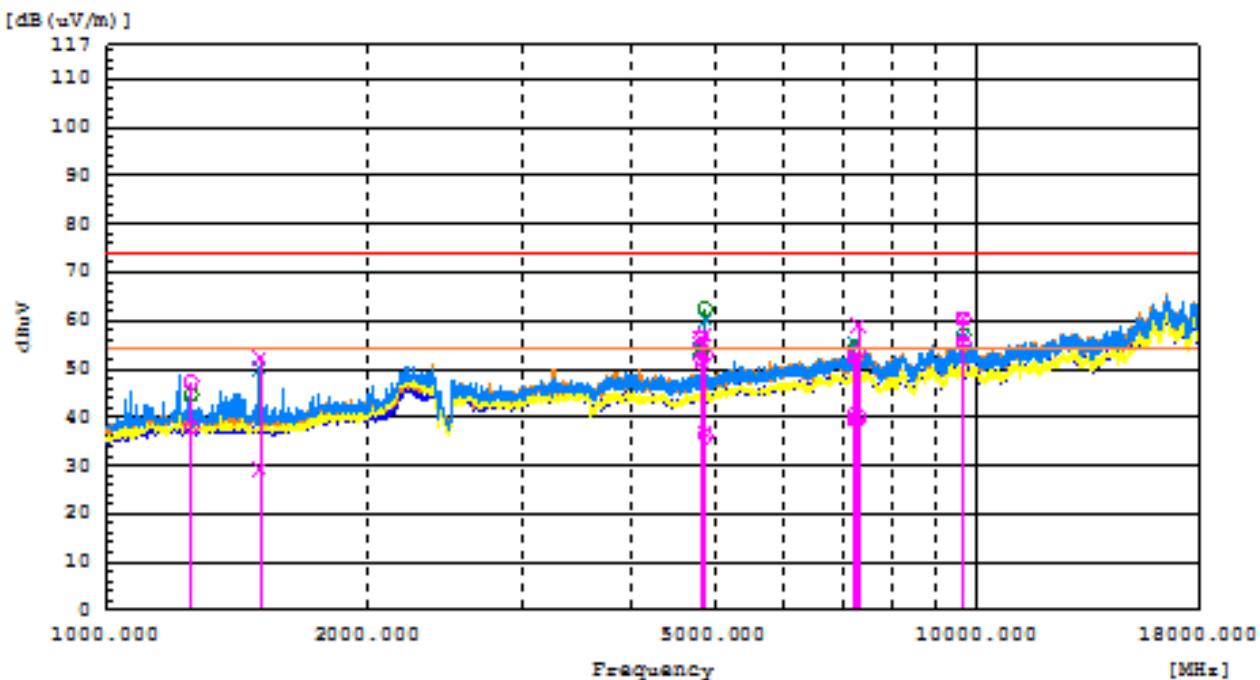

Radiated Spurious Emissions plot – (802.11g)

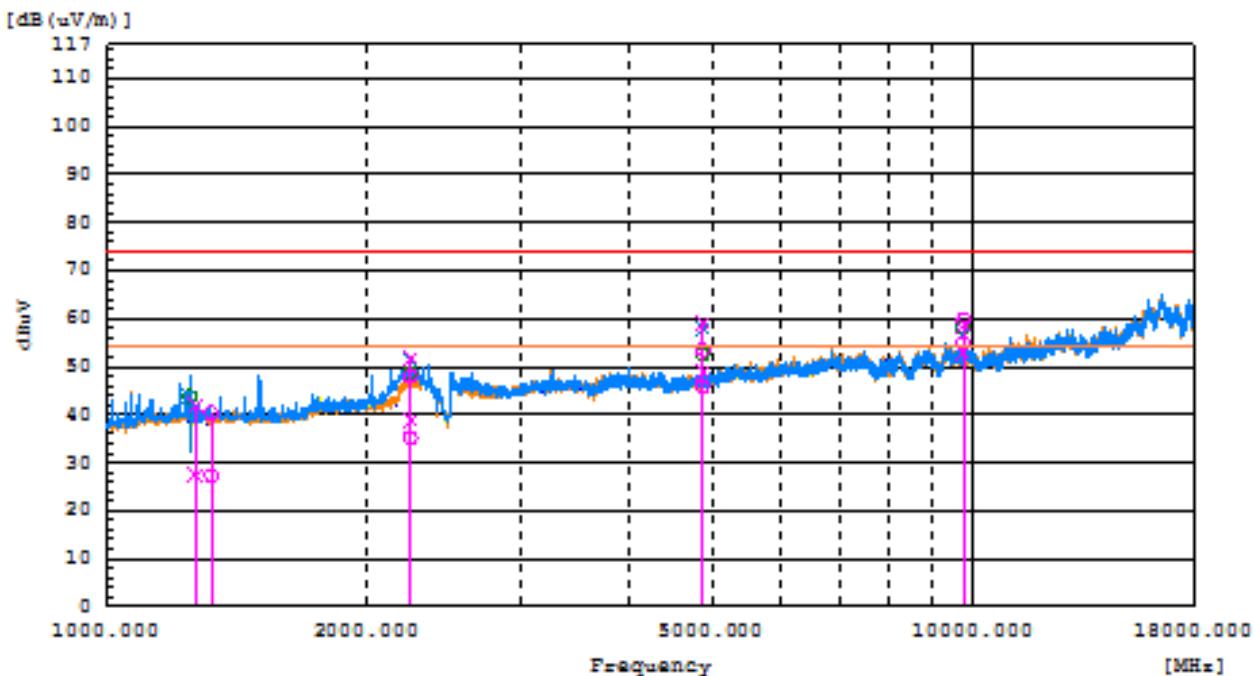

Radiated Spurious Emissions plot – (802.11n)

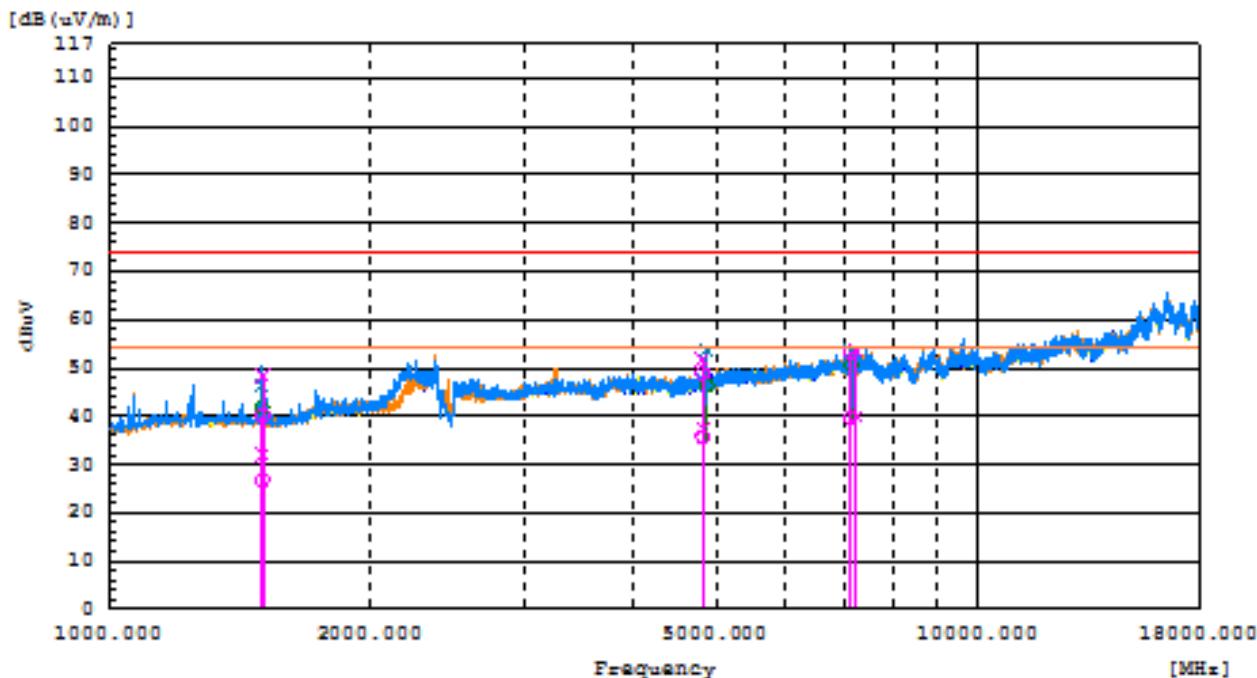

**Note:**

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b		
Transfer Rate:	1 Mbps		
Operating Frequency	2412 MHz, 2462 MHz		
Channel No.	01 Ch, 11 Ch		

Frequency MHz	Polarizati on	Reading dB(uV)			Level dB(uV/m)		Limit dB(uV/m)		Margin dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2390	V	5.9	22.3	35.5	41.4	57.8	54	74	12.6	16.2
2390	H	5.0	22.7	35.5	40.5	58.2	54	74	13.5	15.8
2483.5	H	5.8	18.1	36.1	41.9	54.2	54	74	12.1	19.8
2483.5	V	5.9	17.9	36.1	42	54	54	74	12	20

Operation Mode:	802.11g		
Transfer Rate:	6 Mbps		
Operating Frequency	2412 MHz, 2462 MHz		
Channel No.	01 Ch, 11 Ch		

Frequency MHz	Polarization	Reading dB(uV)			Level dB(uV/m)		Limit dB(uV/m)		Margin dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2390	H	10.4	33.6	35.5	45.9	69.1	54	74	8.1	4.9
2390	V	9.9	33.0	35.5	45.4	68.5	54	74	8.6	5.5
2483.5	H	6.6	21.3	36.1	42.7	57.4	54	74	11.3	16.6
2483.5	V	6.1	25.2	36.1	42.2	61.3	54	74	11.8	12.7

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency MHz	Polarization	Reading dB(uV)			Level dB(uV/m)		Limit dB(uV/m)		Margin dB	
		AV	PK	Factor	AV	PK	AV	PK	AV	PK
2390	H	10.4	29.1	35.5	45.9	64.6	54	74	8.1	9.4
2390	V	10.0	27.7	35.5	45.5	63.2	54	74	8.5	10.8
2483.5	H	4.3	18.2	36.1	40.4	54.3	54	74	13.6	19.7
2483.5	V	5.2	22.0	36.1	41.3	58.1	54	74	12.7	15.9

#### Note

1. Frequency range of measurement = 2300 MHz ~ 2390MHz / 2483.5 MHz ~ 2500 MHz

2. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

#### 3. Sample Calculation

Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)


Total(Measurement Type : Average, Duty cycle  $< 98\%$ )

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)


+ Duty Cycle Factor

□ Test Plots


Radiated Restricted Band Edges plot – (802.11b)

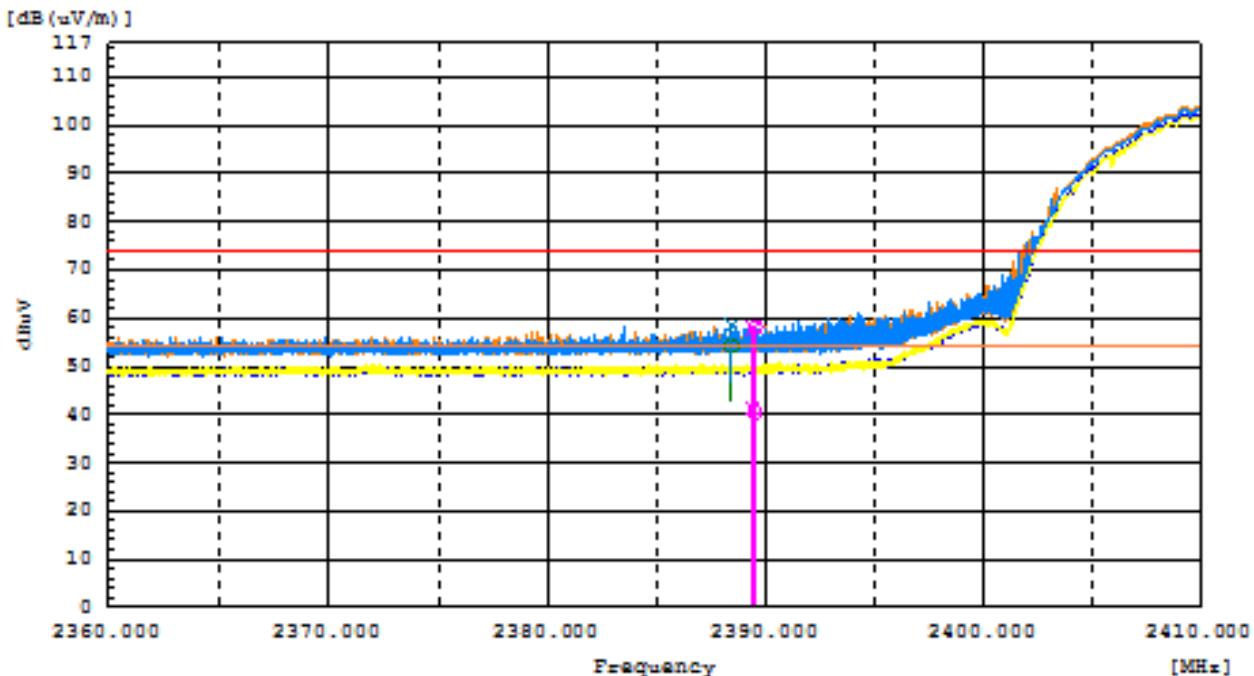


Radiated Restricted Band Edges plot – (802.11b)

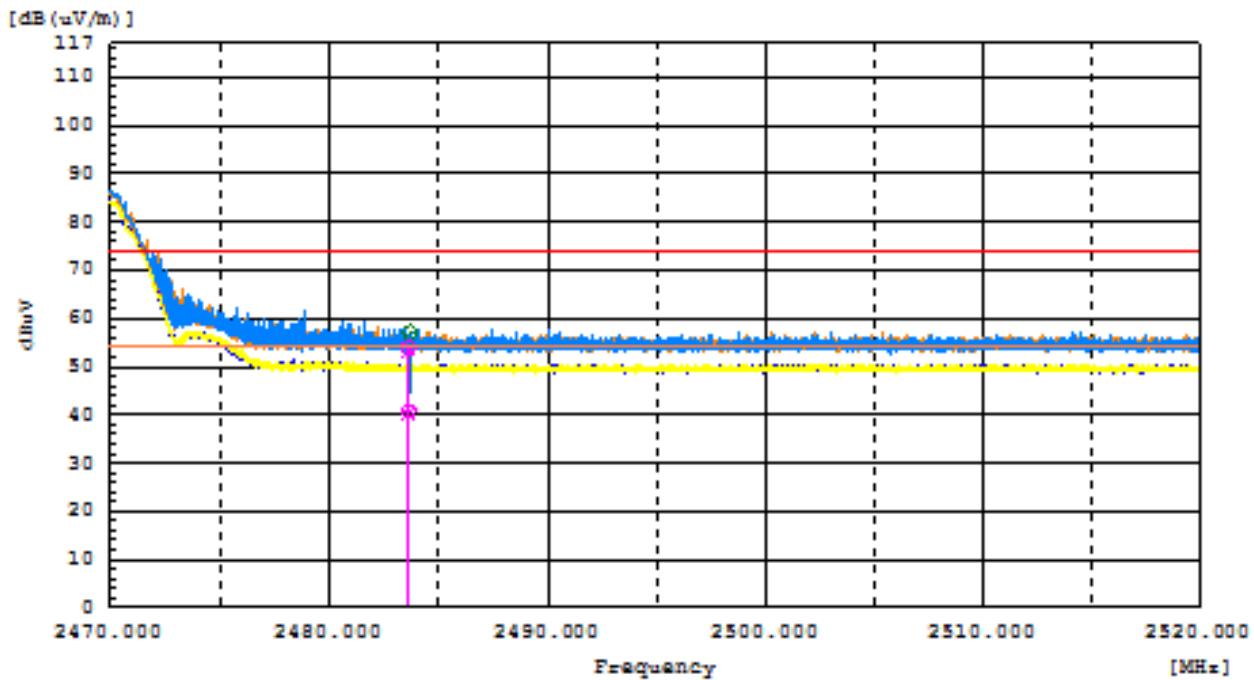


Radiated Restricted Band Edges plot – (802.11g)

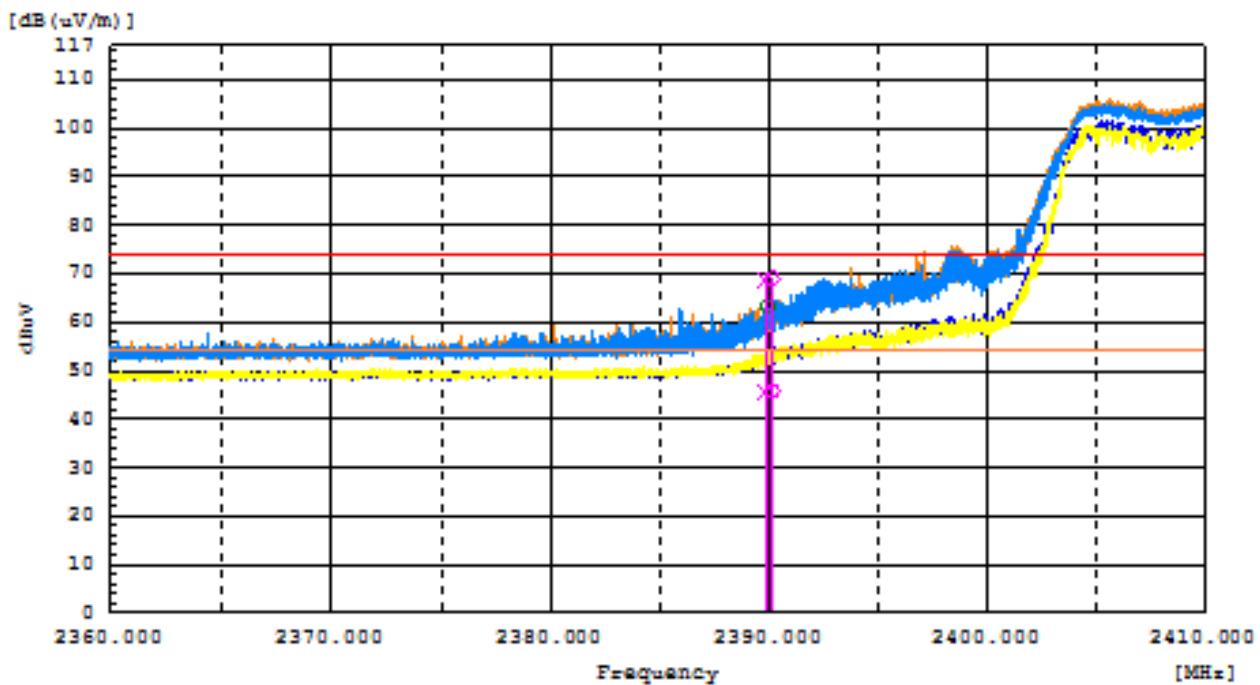


Radiated Restricted Band Edges plot – (802.11g)

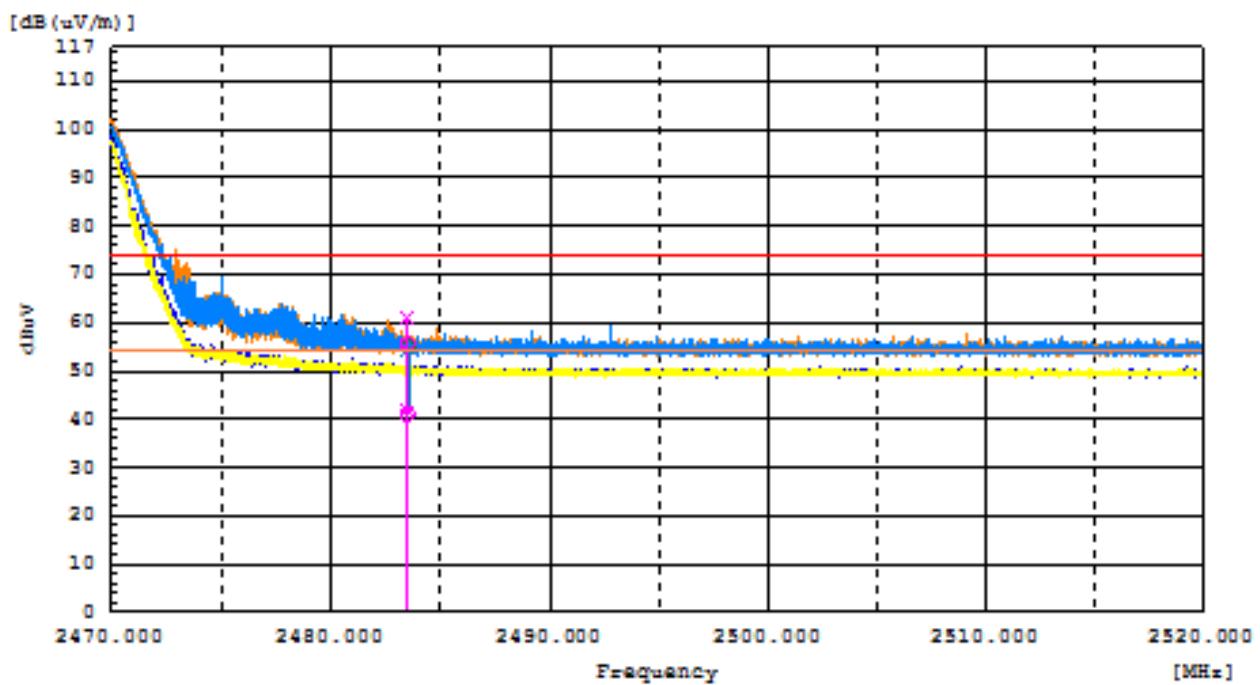

Radiated Restricted Band Edges plot – (802.11n)

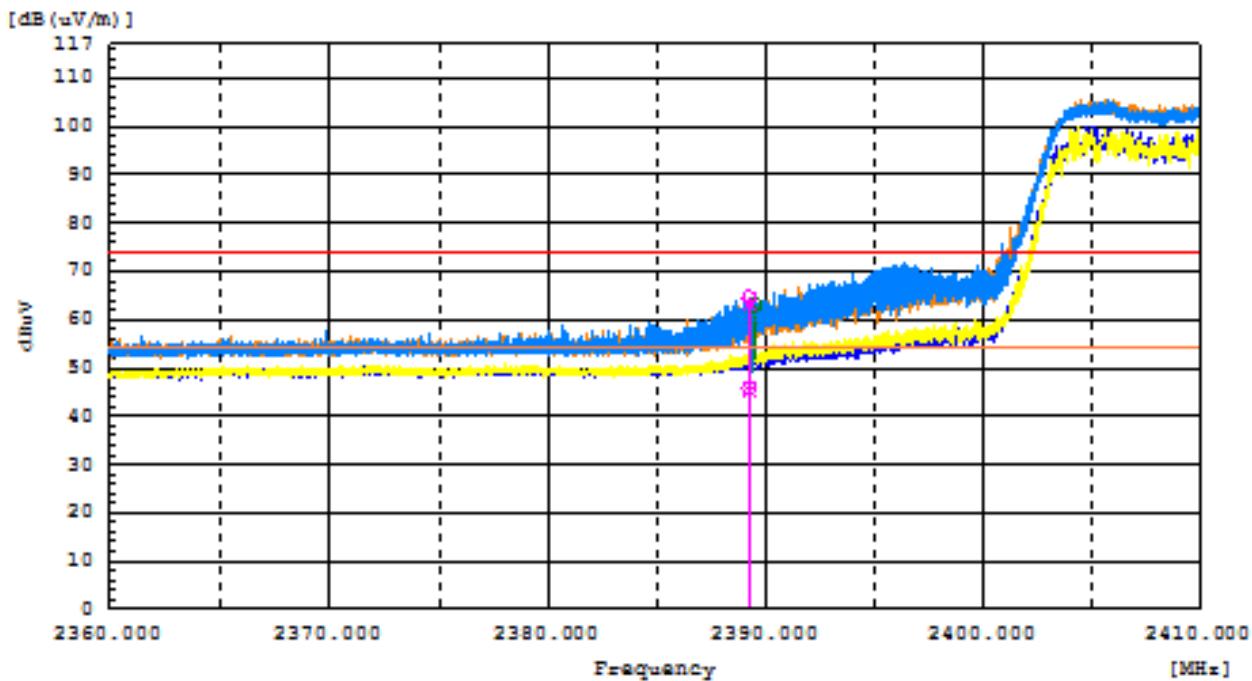

Radiated Restricted Band Edges plot – (802.11n)

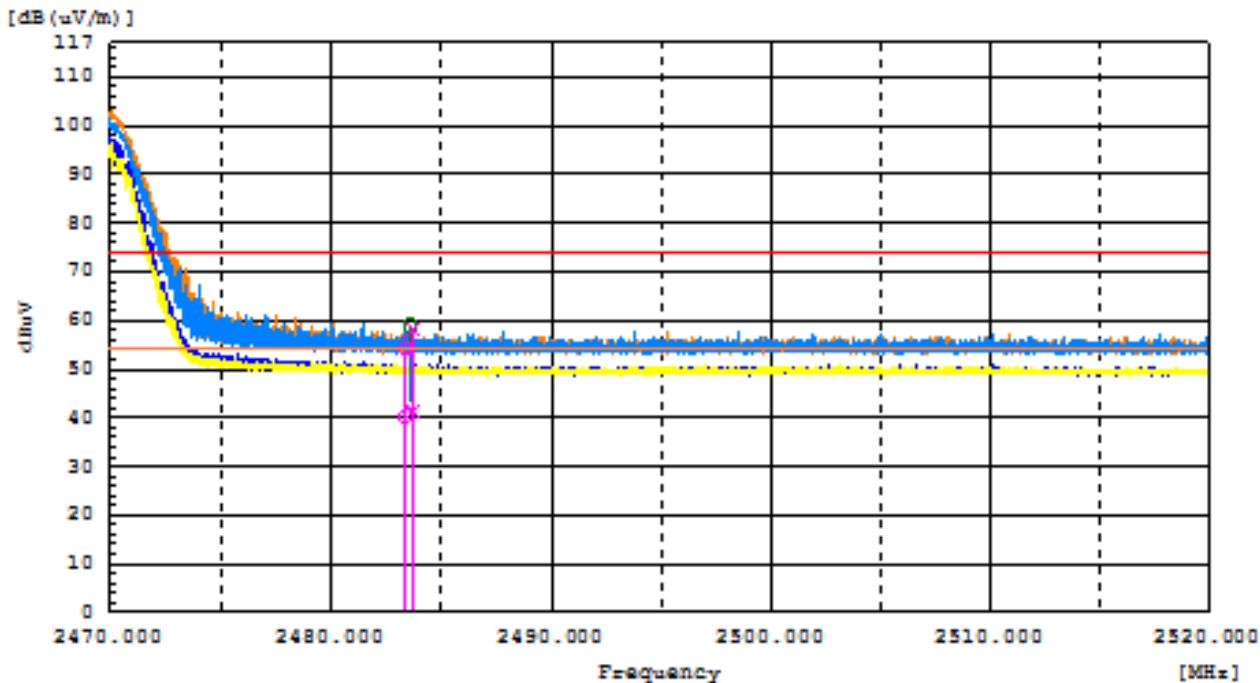

**Note:**

Plot of worst case are only reported.

## 9.8 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.


### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.9 POWERLINE CONDUCTED EMISSIONS

### Normal Mode – AC Mains Power Port

[ L1 ]

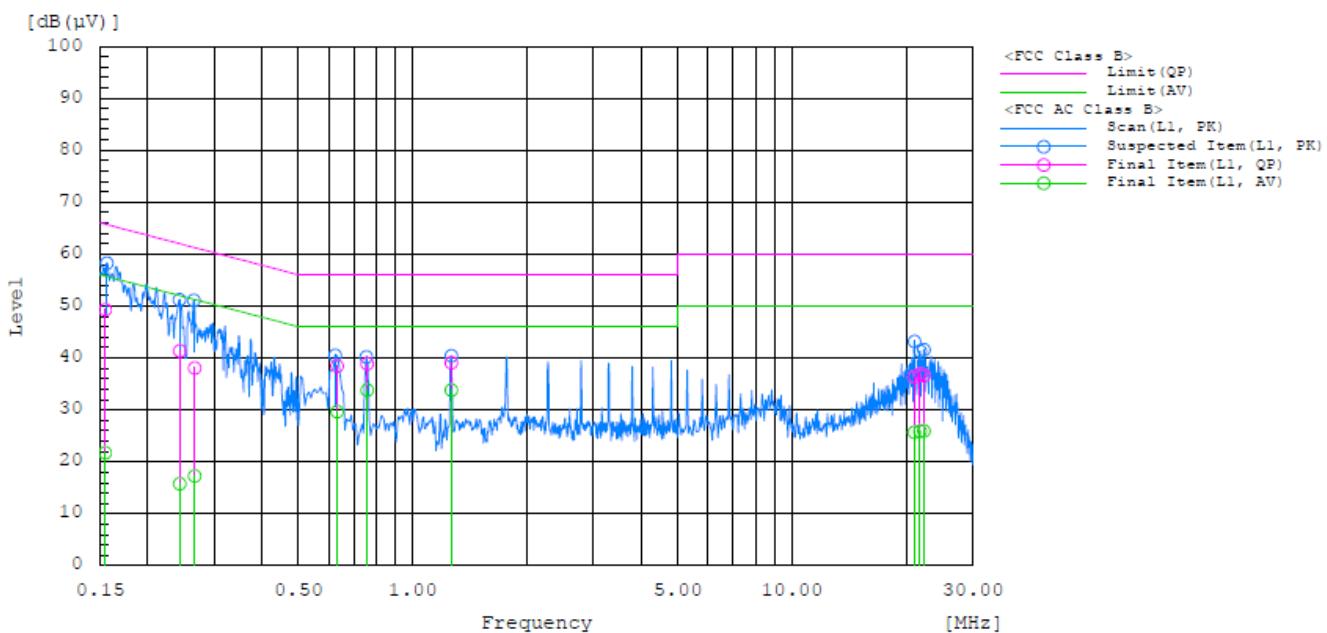


[ Final Results ]

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.155	L1	39.7	12.2	9.6	49.3	21.8	65.8	55.8	16.5	34
0.243	L1	31.8	6.2	9.6	41.4	15.8	62	52	20.6	36.2
0.266	L1	28.5	7.7	9.6	38.1	17.3	61.2	51.2	23.1	33.9
0.631	L1	28.9	20.1	9.6	38.5	29.7	56	46	17.5	16.3
0.758	L1	29.3	24.2	9.6	38.9	33.8	56	46	17.1	12.2
1.263	L1	29.4	24.2	9.7	39.1	33.9	56	46	16.9	12.1
20.971	L1	26.3	15.6	10.1	36.4	25.7	60	50	23.6	24.3
21.733	L1	26.8	15.8	10.1	36.9	25.9	60	50	23.1	24.1
22.239	L1	26.6	15.9	10.1	36.7	26	60	50	23.3	24

**Normal Mode – AC Mains Power Port**

[ N ]

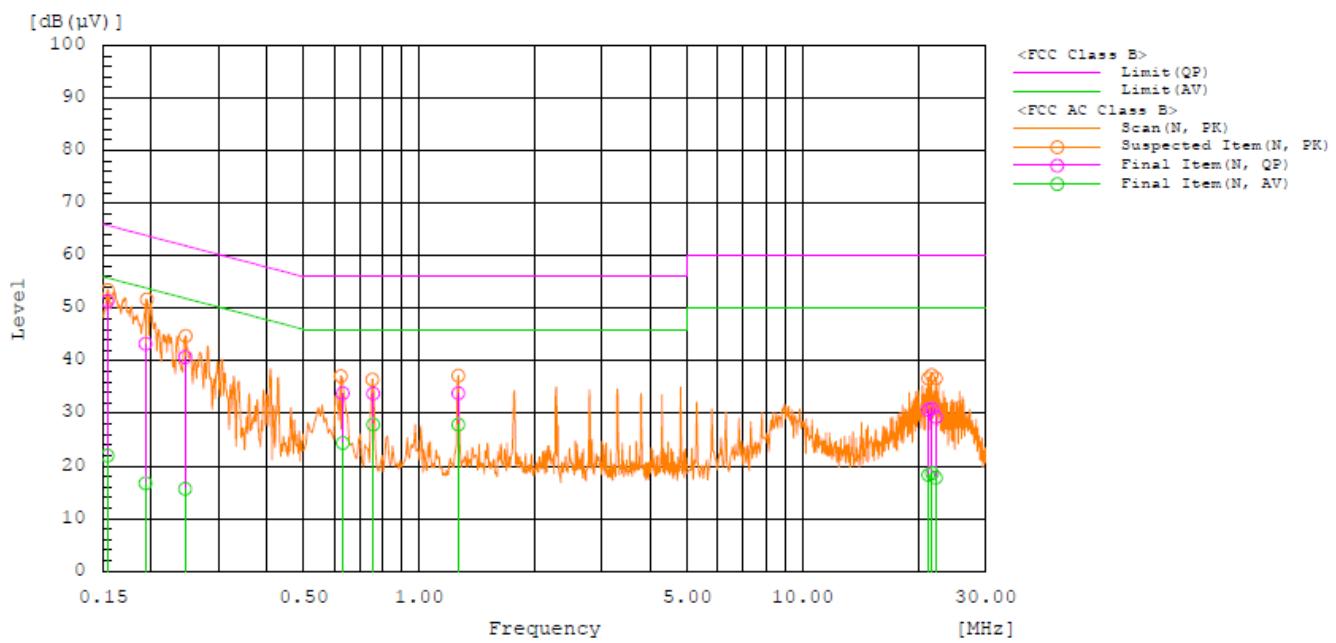

**[ Final Results ]**

Frequency MHz	Line	Reading dB(μV)		Corr. dB	Level dB(μV)		Limit dB(μV)		Margin dB	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.154	N	41.8	12.4	9.6	51.4	22	65.8	55.8	14.4	33.8
0.193	N	33.7	7.2	9.6	43.3	16.8	63.9	53.9	20.6	37.1
0.245	N	31.1	6.1	9.6	40.7	15.7	61.9	51.9	21.2	36.2
0.631	N	24.3	14.8	9.6	33.9	24.4	56	46	22.1	21.6
0.758	N	24.2	18.3	9.6	33.8	27.9	56	46	22.2	18.1
1.263	N	24.2	18.2	9.7	33.9	27.9	56	46	22.1	18.1
21.229	N	20.6	8.3	10.1	30.7	18.4	60	50	29.3	31.6
21.734	N	20.8	8.6	10.1	30.9	18.7	60	50	29.1	31.3
22.218	N	19.3	7.8	10.1	29.4	17.9	60	50	30.6	32.1

## 10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Due to Calibration	Manufacture	Serial No.
<input checked="" type="checkbox"/>	Signal Analyzer (20 Hz ~ 40.0 GHz)	ESU40	2019-12-20	ROHDE & SCHWARZ	100529
<input checked="" type="checkbox"/>	Signal Analyzer (3 Hz ~ 40 GHz)	N9020A	2019-11-09	AGILENT	MY52091291
<input checked="" type="checkbox"/>	BI-LOG Antenna (30 MHz ~ 1 GHz)	JB6	2019-06-27	Schwarzbeck	A060916
<input checked="" type="checkbox"/>	Attenuator (20 dB, DC ~ 26.5 GHz)	8493C	2019-12-20	HP	09072
<input checked="" type="checkbox"/>	DC power supply	6655A	2020-01-23	HP	KR94907553
<input checked="" type="checkbox"/>	POWER AMP (1 GHz ~ 18 GHz)	CBLU1183540B-01	2020-01-18	CERNEX	27974
<input checked="" type="checkbox"/>	POWER AMP (0.3GHz ~ 1GHz)	PAM-103A	2020-01-18	Com-Power Corporation	18020005
<input checked="" type="checkbox"/>	Horn Antenna (1 GHz ~ 18 GHz)	DRH-118	2020-05-24	Sunol	A070516
<input checked="" type="checkbox"/>	Loop Antenna (0.009 ~ 30 MHz)	HLA 6121	2020-08-27	Teseq	43964
<input checked="" type="checkbox"/>	Horn Antenna (18 GHz ~ 40 GHz)	DRH-1840	2020-02-20	Sunol	17120
<input checked="" type="checkbox"/>	POWER AMP (18 GHz ~ 40 GHz)	CBL184050-45-01	2020-02-20	CERNEX, Inc.	43964

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

---

## **11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	EMCE-R-1905-F002-P

