

# RF TEST REPORT



Report No.: FCC\_IC\_SL18050202-SEV-021-BLE

Supersede Report No.: None

Applicant	:	Technicolor
Product Name	:	Technicolor Denali BLE OTT RCU 2018
Model No.	:	R32040AA00-00001
Test Standard	:	47 CFR 15.247 RSS247 Issue 2, 2017
Test Method	:	ANSI C63.10: 2013 RSS Gen Iss 4: Nov 2014 558074 D01 DTS Meas Guidance v04
FCC ID	:	MG3-R32040
IC ID	:	2575A-R32040
Dates of test	:	5/12/2018 – 05/18/2018
Issue Date	:	05/29/2018
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification	[X]	
Equipment did not comply with the specification	[ ]	

This Test Report is Issued Under the Authority of:

<i>Gary Chou</i>	<i>Rachana</i>
Gary Chou	Rachana Khanduri
Test Engineer	Engineer Reviewer

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088



Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & RED
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

## CONTENTS

1	REPORT REVISION HISTORY.....	4
2	EXECUTIVE SUMMARY .....	5
3	CUSTOMER INFORMATION .....	5
4	TEST SITE INFORMATION.....	5
5	MODIFICATION.....	5
6	EUT INFORMATION.....	6
6.1	EUT Description .....	6
6.2	Spec for BT Radio .....	6
6.3	EUT test modes/configuration Description .....	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION .....	7
7.1	Supporting Equipment.....	7
7.2	Cabling Description.....	7
7.3	Test Software Description.....	7
8	TEST SUMMARY .....	8
9	MEASUREMENT UNCERTAINTY .....	9
9.1	Conducted Emissions .....	9
9.2	Radiated Emissions (30MHz to 1GHz) .....	9
9.3	Radiated Emissions (1GHz to 40GHz).....	10
9.4	RF conducted measurement.....	10
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	11
10.1	Antenna Requirement.....	11
10.2	Conducted Emissions .....	12
10.3	6dB & 99% Bandwidth .....	13
10.4	Output Power (Bluetooth LE).....	16
10.5	Band Edge.....	19
10.6	Peak Spectral Density .....	21
10.7	Radiated Spurious Emissions in restricted band .....	24
10.8	Radiated Spurious Emissions below 1GHz.....	26
10.9	Radiated Spurious Emissions between 1GHz – 25GHz.....	28
	ANNEX A. TEST INSTRUMENT .....	30
	ANNEX B. SIEMIC ACCREDITATION .....	31

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_SL18050202-SEV-021-BLE	None	Original	05/29/2018

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Technicolor  
Product: Technicolor Denali BLE OTT RCU 2018  
Model: R32040AA00-00001

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	:	Technicolor
Applicant Address	:	201 East Sandpointe Ave, 8th Floor, Santa Ana, CA 92707
Manufacturer Name	:	Gemstar Technology (Yangzhou) Co., Ltd
Manufacturer Address	:	No. 9 Junsheng Road, Fanshui Industrial Zone, Baoying Country, Yangzhou Jiangsu 225819 China

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	:	Technicolor Denali BLE OTT RCU 2018
Model No.	:	R32040AA00-00001
Trade Name	:	Technicolor
Serial No.	:	N/A
Input Power	:	3 Vdc
Power Adapter Manu/Model	:	N/A
Power Adapter SN	:	N/A
Product Hardware version	:	A01
Product Software version	:	A6
Radio Hardware version	:	N/A
Radio Software version	:	r0.4.0.3
Date of EUT received	:	05/10/2018
Equipment Class/ Category	:	DTS
Port/Connectors	:	N/A

### 6.2 Spec for BT Radio

Radio Type	Bluetooth
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK (LE)
Channel Spacing	2MHz (LE)
Antenna Type	PCB
Antenna Gain	0 dBi
Antenna Connector Type	N/A

Type	Channel No.	Frequency (MHz)	Power Setting (dBm)
Bluetooth(BLE) 2402-2480MHz	0	2402	8
	19	2440	8
	39	2480	8

### 6.3 EUT test modes/configuration Description

Mode	Note
Bluetooth	BLE (GFSK)

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Inspiron 15	4D9W0C2	Dell	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
-	-	-	-	-	-	-	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	Radio Control Console	Set the EUT to transmit continuously in different test mode

## 8 Test Summary

Test Item		Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 8.10	IC			<input type="checkbox"/> N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013 RSS Gen Issue 4: 2014		<input type="checkbox"/> Pass
	IC	RSS Gen 8.8	IC			<input checked="" type="checkbox"/> N/A
Antenna Requirement	FCC	15.203	FCC	ANSI C63.10 – 2013 558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	-	IC			<input type="checkbox"/> N/A

### DTS Band Requirement

Test Item		Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	-	-	-	-		<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 6.6	IC			<input type="checkbox"/> N/A
6dB Bandwidth	FCC	15.247(a)(2)	FCC	558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.1)	IC			<input type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.5)	IC			<input type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.4.4)	IC			<input type="checkbox"/> N/A
Receiver Spurious Emissions	IC	RSS Gen (4.8)	IC	RSS Gen Issue 4: 2014		<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-		<input type="checkbox"/> Pass
	IC	-	IC	-		<input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v04		<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.2)	IC			<input type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-		<input type="checkbox"/> Pass
	IC	RSS Gen(5.5)	IC	RSS Gen Issue 4: 2014		<input checked="" type="checkbox"/> N/A
Remark	1. All measurement uncertainties do not take into consideration for all presented test results. 2. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.					

## 9 Measurement Uncertainty

### 9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
Expanded Uncertainty (K=2)					3.856266

The total derived measurement uncertainty is +/- 3.86 dB.

### 9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

### 9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

### 9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174

The total derived measurement uncertainty is +/- 0.95 dB.

## 10 Measurements, Examination and Derived Results

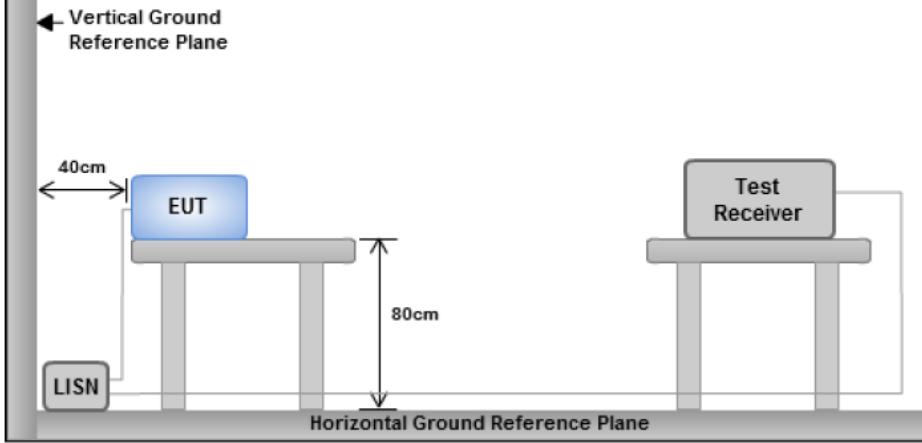
### 10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <ul style="list-style-type: none"> <li>a) Antenna must be permanently attached to the device.</li> <li>b) The antenna must use a unique type of connector to attach to the device.</li> <li>c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</li> </ul>	<input checked="" type="checkbox"/>
Remark	The EUT is no connector for antenna connection so it is meet the requirement.	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

## 10.2 Conducted Emissions

### Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 ~ 56	56 ~ 46
0.5 ~ 5	56	46
5 ~ 30	60	50

Spec	Item	Requirement	Applicable
RSS247(A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input type="checkbox"/>
Test Setup			
<b>Note:</b> <ol style="list-style-type: none"> <li>1. Support units were connected to second LISN.</li> <li>2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</li> </ol>			
Procedure	<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>		
Remark	This is battery product so test is not required.		
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail		

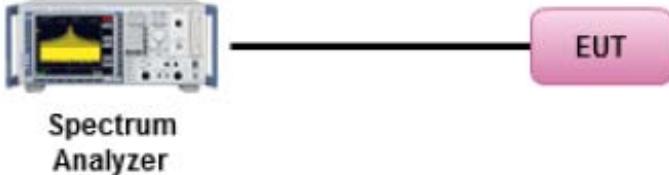
Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

Test was done by Gary Chou at Conducted Emission test site.

### 10.3 6dB & 99% Bandwidth

Requirement(s):

Spec	Requirement	Applicable
§ 15.247 RSS247 (5.2.1)	6dB BW $\geq$ 500KHz;	<input checked="" type="checkbox"/>
RSS Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth	<input checked="" type="checkbox"/>
Test Setup	 <p><b>Spectrum Analyzer</b></p>	
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 8.1 DTS bandwidth</p> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) <math>\geq 3 \times</math> RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> <li>- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ul>	
Test Date	05/18/2018	Environmental condition Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	N/A	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data  Yes  N/A

Test Plot  Yes  N/A

Test was done by Gary Chou at RF test site.

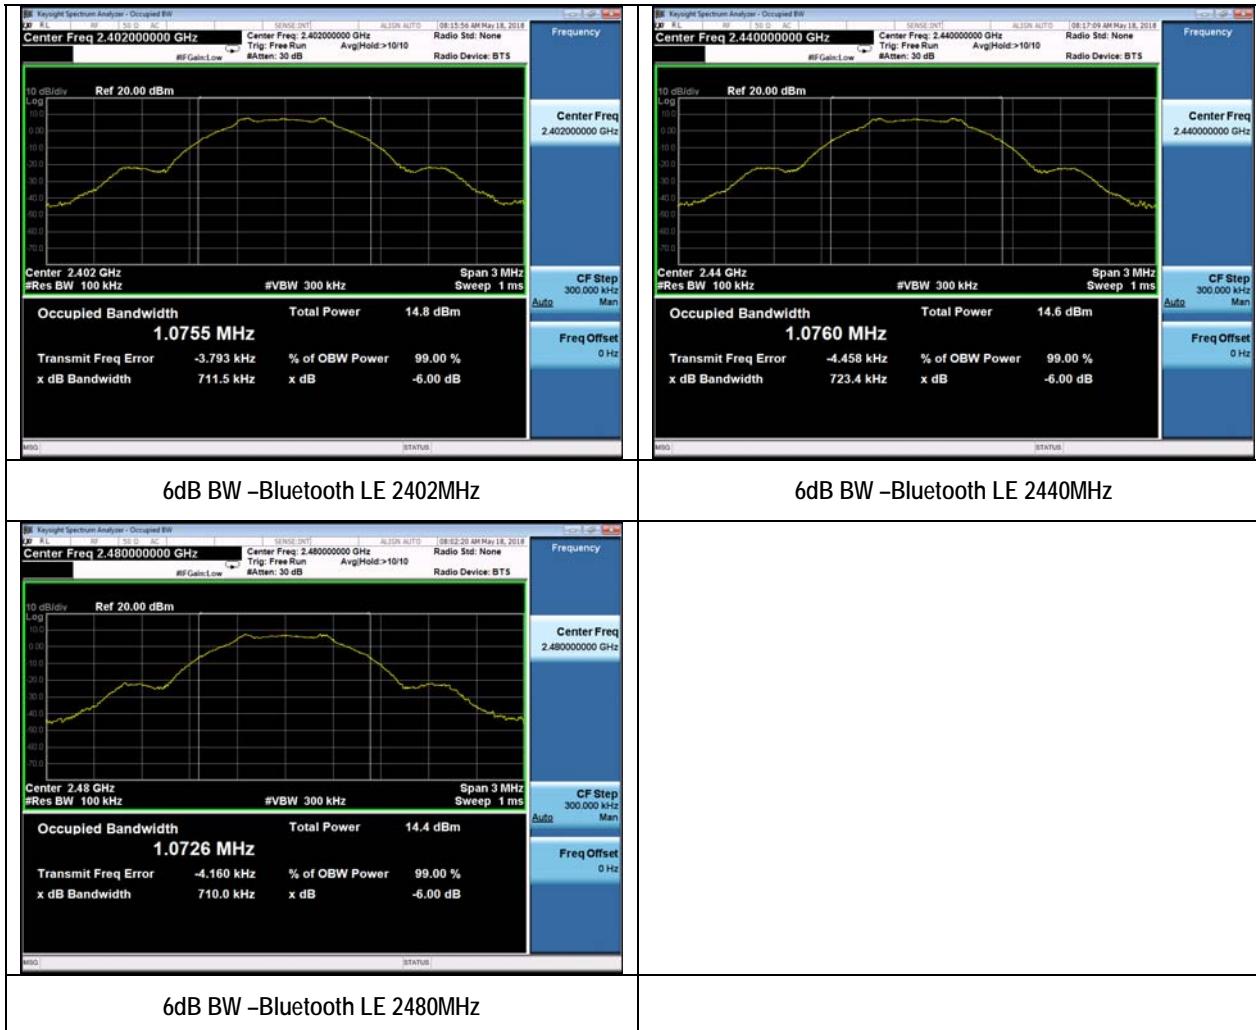
**6dB Bandwidth measurement result**

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	BT-LE	2402	Low	0.7115	≥0.5	Pass
6dB BW	BT-LE	2440	Mid	0.7234	≥0.5	Pass
6dB BW	BT-LE	2480	High	0.7100	≥0.5	Pass

**99% OBW measurement result for 2.4GHz**


Type	Test mode	Freq (MHz)	CH	Result (MHz)
99% OBW	BT-LE	2402	Low	1.0755
99% OBW	BT-LE	2440	Mid	1.0760
99% OBW	BT-LE	2480	High	1.0726

## 6dB &amp; 99% Bandwidth Test Plots



## 10.4 Output Power (Bluetooth LE)

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247 RSS247 (5.4.4)	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: $\leq 1$ Watt	<input checked="" type="checkbox"/>
Test Setup	 <p><b>Spectrum Analyzer</b> ————— EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 9.2.2.2</p> <p><u>Measurement using a Spectrum Analyzer (SA)</u></p> <ul style="list-style-type: none"> <li>(a) Set span to at least 1.5 times the OBW</li> <li>(b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.</li> <li>(c) Set VBW <math>\geq 3 \times</math> RBW.</li> <li>(d) Number of points in sweep <math>\geq 2 \times</math> span / RBW. (This gives bin-to-bin spacing <math>\leq</math> RBW/2, so that narrowband signals are not lost between frequency bins.)</li> <li>(e) Sweep time = auto.</li> <li>(f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</li> <li>(g) If transmit duty cycle <math>&lt; 98\%</math>, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle <math>\geq 98\%</math>, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".</li> <li>(h) Trace average at least 100 traces in power averaging (i.e., RMS) mode</li> <li>(i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.</li> </ul>		
Test Date	05/18/2018	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	

Test Data  Yes  N/A

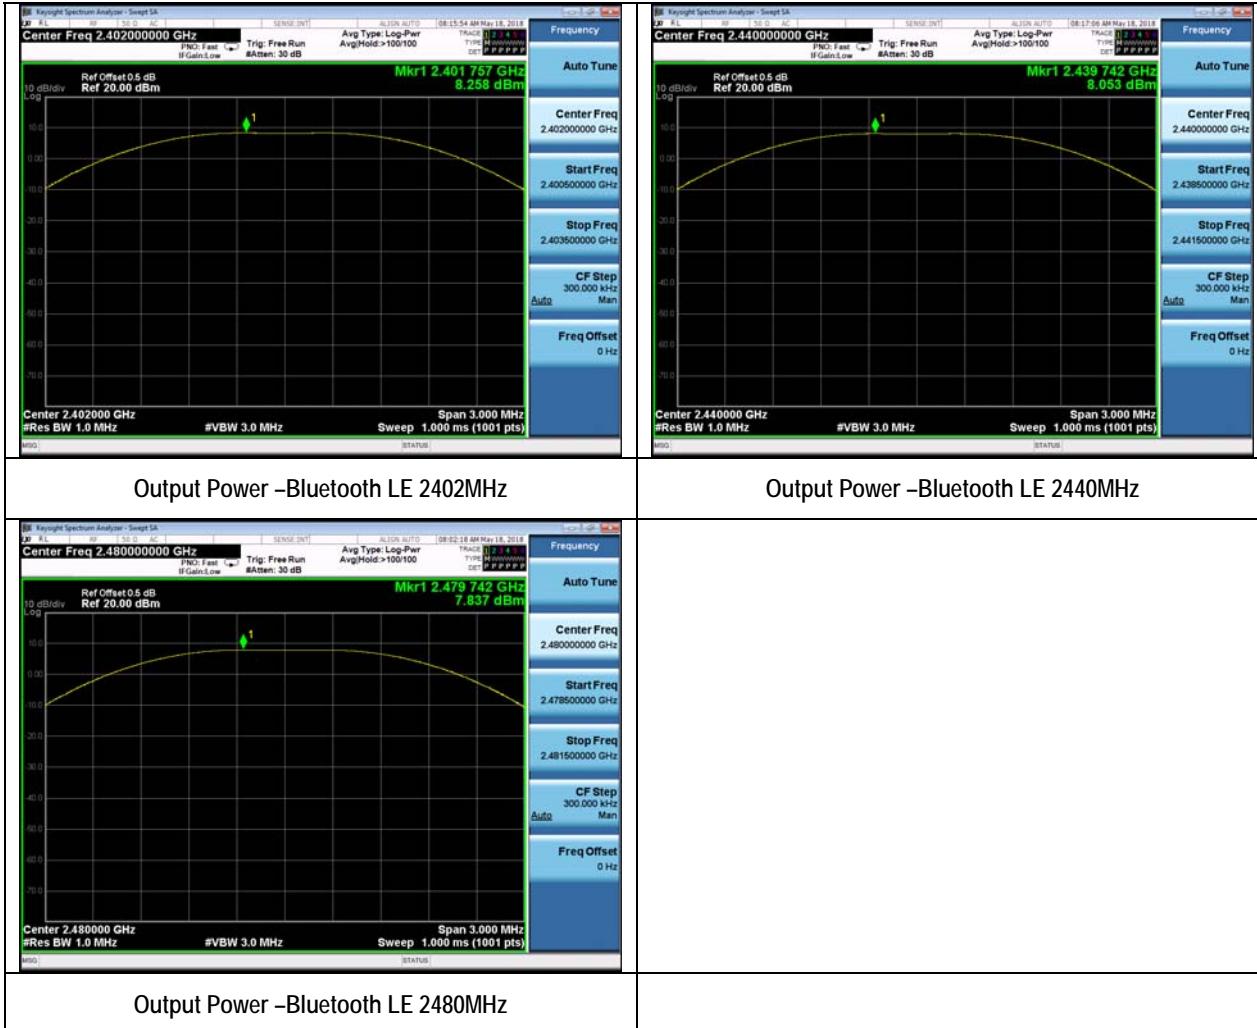
Test Plot  Yes (See below)  N/A

Test was done by Gary Chou at RF test site.

**Output Power measurement result**


Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	Bluetooth LE	2402	Low	8.258	30	Pass
Output power	Bluetooth LE	2440	Mid	8.053	30	Pass
Output power	Bluetooth LE	2480	High	7.837	30	Pass

## Test Plots



## 10.5 Band Edge

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247 RSS247(5.5)	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required  <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup		 <b>Spectrum Analyzer</b> ————— EUT	
Test Procedure		558074 D01 DTS Meas Guidance v03r05 <u>Band Edge measurement procedure</u> <ol style="list-style-type: none"> <li>1. Set the EUT to maximum power setting and enable the EUT transmit continuously.</li> <li>2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as measured. The attenuation shall be 30 dB instead of 20 dB when Peak conducted output power procedure is used.</li> <li>3. Change modulation and channel bandwidth then repeat step 1 to 2.</li> <li>4. Measured and record the results in the test report.</li> </ol>	
Test Date	05/18/2018	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data  Yes       N/A

Test Plot  Yes (See below)       N/A

Test was done by Gary Chou at RF test site.

### Band Edge Test Plots (Bluetooth LE)



## 10.6 Peak Spectral Density

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(e)	e)	DSSS: $\leq 8\text{dBm}/3\text{KHz}$	<input checked="" type="checkbox"/>
RSS247 (5.2.2)	f)	DSSS in hybrid sys with FH turned off: $\leq 8\text{dBm}/3\text{KHz}$	<input type="checkbox"/>
Test Setup	<p><b>EUT</b></p> <p><b>Spectrum Analyzer</b></p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 10.2 Method PKPSD (peak PSD)</p> <p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set analyzer center frequency to DTS channel center frequency.</li> <li>- Set the span to 1.5 times the DTS bandwidth.</li> <li>- Set the RBW to: <math>3\text{ kHz} \leq RBW \leq 100\text{ kHz}</math>.</li> <li>- Set the VBW <math>\geq 3 \times RBW</math>.</li> <li>- Detector = Peak</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = Max Hold</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul>		
Test Date	05/18/2018	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data  Yes  N/A

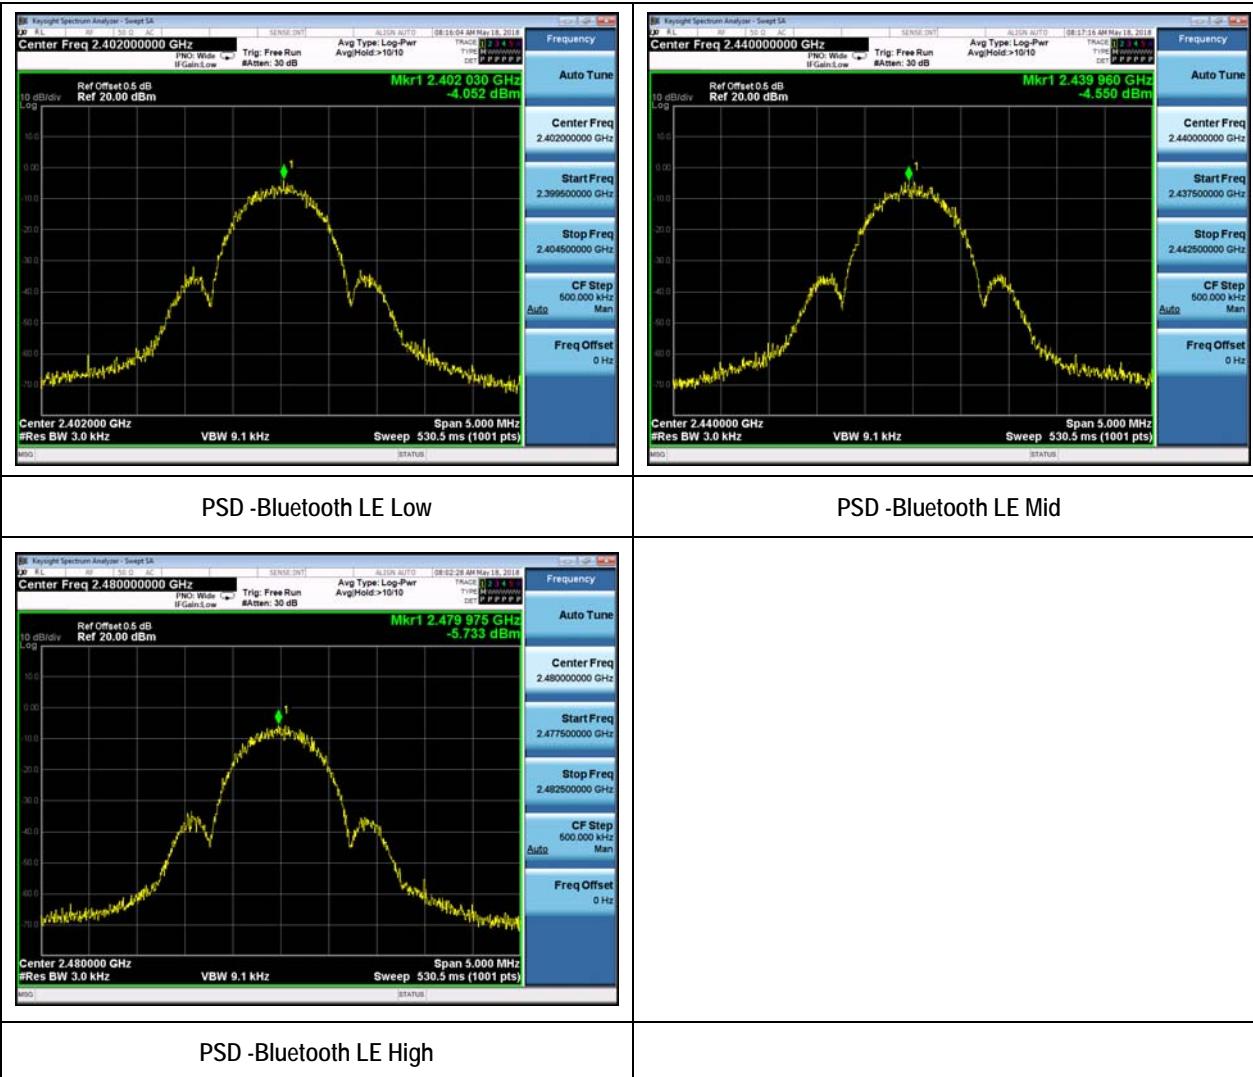
Test Plot  Yes (See below)  N/A

Test was done by Gary Chou at RF test site.

PSD measurement result (Bluetooth LE)

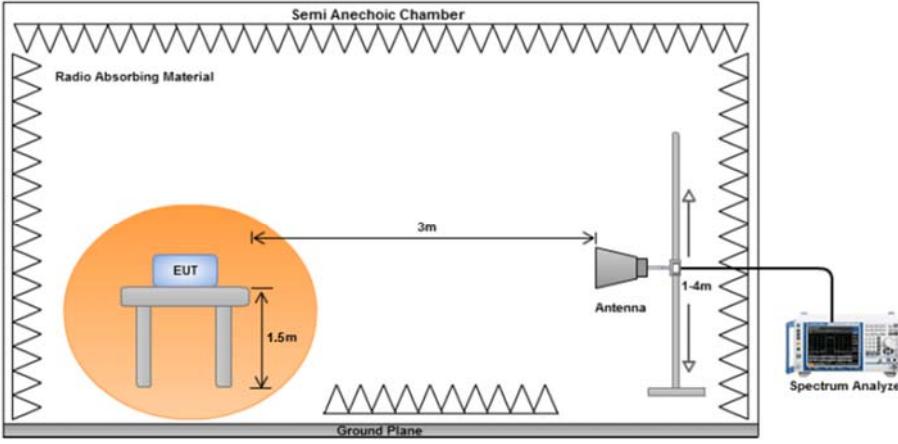
Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
PSD	Bluetooth LE	2402	Low	-4.05	≤8	Pass
PSD	Bluetooth LE	2440	Mid	-4.55	≤8	Pass
PSD	Bluetooth LE	2480	High	-5.73	≤8	Pass

### Test Plots (Bluetooth LE)



## 10.7 Radiated Spurious Emissions in restricted band

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required  <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. An average measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Remark	Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes (See below)     N/A

Test Plot     Yes (See below)     N/A

Test was done by Gary Chou at 10m chamber.

## Restricted Band Measurement Plots:



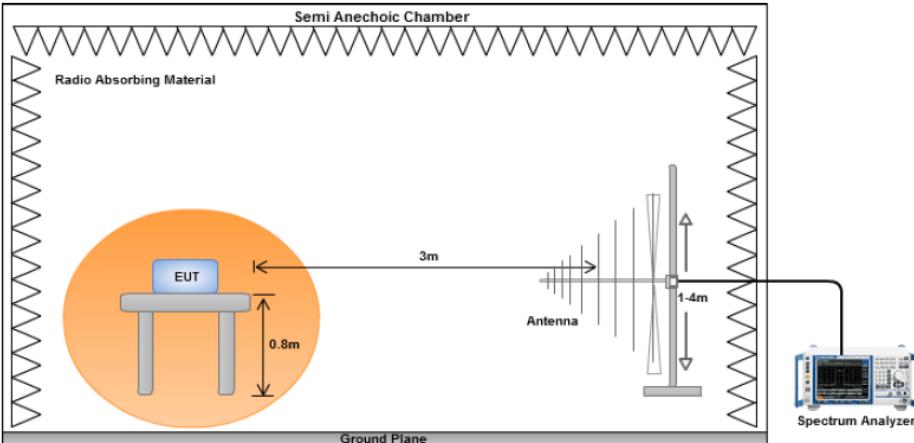
Restricted Band 2402MHz



Restricted Band 2480MHz

## 10.8 Radiated Spurious Emissions below 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.247(d) RSS247 (5.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup													
Procedure	1. 2. 3. 4.	<p>The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner.</p> <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.												
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail												

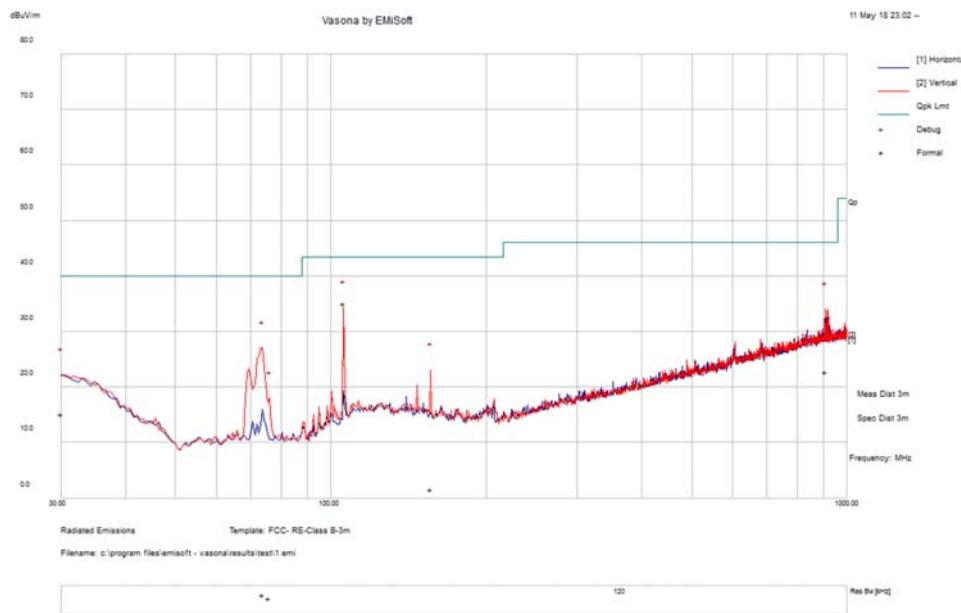
Test Data  Yes (See below)  N/A

Test Plot  Yes (See below)  N/A

Test was done by Gary Chou at 10m chamber.

## Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz		
Environmental Conditions:	Temp (°C):	26.1	Result
	Humidity (%)	47.5	
	Atmospheric (mbar):	1020	
Mains Power:	3 Vdc		Pass
Tested by:	Gary Chou		
Test Date:	05/11/2018		
Remarks:	Bluetooth LE TX 2440MHz		



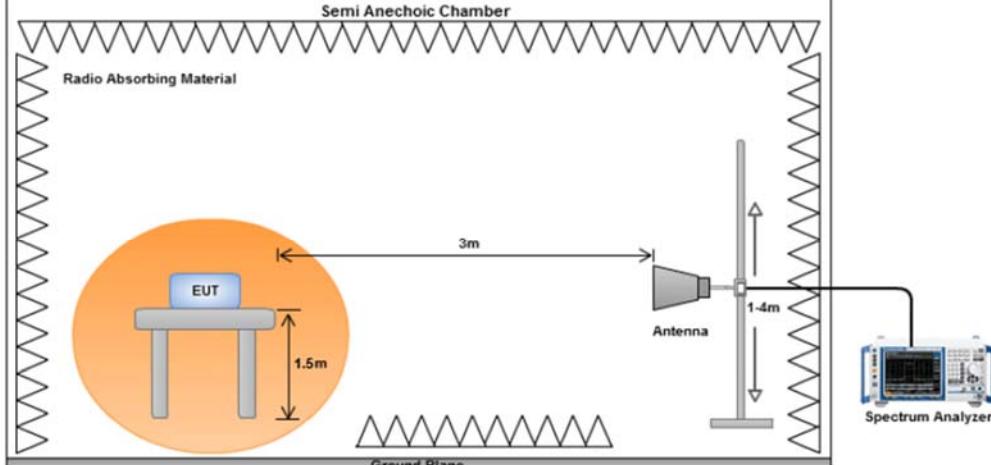
## Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
105.75	47.74	11.92	-24.44	35.22	Quasi Max	V	336	258	43.5	-8.28	Pass
907.46	20.03	15.93	-13.12	22.83	Quasi Max	V	125	134	46	-23.17	Pass
73.75	-1.11	11.61	-27.8	-17.3	Quasi Max	V	125	325	40	-57.3	Pass
30.00	16.87	11.12	-12.87	15.12	Quasi Max	H	120	242	40	-24.88	Pass
156.15	13.07	12.23	-23.61	1.69	Quasi Max	V	254	76	43.5	-41.81	Pass
75.98	-1.56	11.64	-27.94	-17.87	Quasi Max	V	271	73	40	-57.87	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

## 10.9 Radiated Spurious Emissions between 1GHz – 25GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure		<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. An average measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>	
Remark		The EUT was scanned up to 26GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.	
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data     Yes (See below)     N/A

Test Plot     Yes (See below)     N/A

Test was done by Gary Chou at 10m chamber.

### Radiated Emission Test Results (Above 1GHz)

#### BLE – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
17798.08	38.48	8.09	8.32	54.89	Peak Max	V	187	218	74	-19.12	Pass
1529.91	42.62	2.37	-6.34	38.65	Peak Max	V	250	302	74	-35.35	Pass
4804.39	41.32	4.1	-0.91	44.51	Peak Max	V	177	213	74	-29.49	Pass
17798.08	26.30	8.09	8.32	42.71	Average Max	V	187	218	54	-11.29	Pass
1529.91	30.25	2.37	-6.34	26.29	Average Max	V	250	302	54	-27.71	Pass
4804.39	27.07	4.1	-0.91	30.26	Average Max	V	177	213	54	-23.74	Pass

#### BLE – 2440MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
17924.52	38.04	7.94	8.67	54.66	Peak Max	H	165	141	74	-19.34	Pass
1530.80	41.07	2.37	-6.33	37.11	Peak Max	H	255	356	74	-36.89	Pass
4880.08	45.21	4.18	-1	48.39	Peak Max	V	267	21	74	-25.61	Pass
17924.52	26.36	7.94	8.67	42.98	Average Max	H	165	141	54	-11.02	Pass
1530.80	28.08	2.37	-6.33	24.12	Average Max	H	255	356	54	-29.88	Pass
4880.08	37.88	4.18	-1	41.06	Average Max	V	267	21	54	-12.94	Pass

#### BLE – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
12253.40	38.44	6.51	3.76	48.71	Peak Max	V	210	117	74	-25.29	Pass
4965.17	39.42	4.26	-1.08	42.6	Peak Max	V	350	261	74	-31.4	Pass
1130.13	43.81	2	-7.24	38.57	Peak Max	V	351	74	74	-35.43	Pass
12253.40	26.34	6.51	3.76	36.61	Average Max	V	210	117	54	-17.4	Pass
4965.17	26.55	4.26	-1.08	29.73	Average Max	V	350	261	54	-24.27	Pass
1130.13	31.96	2	-7.24	26.72	Average Max	V	351	74	54	-27.28	Pass

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44 GHz Spectrum Analyzer	N9010A	MY51440112	11/08/2017	1 Year	11/08/2018	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	03/09/2018	2 Year	03/09/2020	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	01/26/2017	2 Year	01/26/2020	<input checked="" type="checkbox"/>
Pre-Amplifier (1 - 40GHz)	J532-00104000- FQ FD	1960351	06/23/2017	1 Year	06/23/2018	<input checked="" type="checkbox"/>
RF Preamplifier	LPA-6-30	11170602	07/21/2017	1 Year	07/21/2018	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Agilent Spectrum Analyzer	N9010A	10SL0219	11/08/2017	1 Year	11/08/2018	<input checked="" type="checkbox"/>
Test Equity Environment Chamber	1007H	61201	11/08/2017	1 Year	11/08/2018	<input checked="" type="checkbox"/>

## Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0
Conducted Emission	EMISoft	EMISoft Vasona	V5.0

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling  Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI  KN22: Test Method for EMI  EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS  KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS
Taiwan NCC CAB Recognition		Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68
Taiwan BSMI CAB Recognition		Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Japan VCCI		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Australia CAB Recognition		R-3083: Radiation 3 meter site  C-3421: Main Ports Conducted Interference Measurement  T-1597: Telecommunication Ports Conducted Interference Measurement
Australia NATA Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4  Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771  Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1