

ELECTROCOM HPA4 OCCUPIED BANDWIDTH
REF 60.0 dBm ATTN 30 dB

MKR 454.999 2 MHz
49.10 dBm


10 dB/
POS PK
OFFSET
40.0
dB

CORR'D

CENTER 455.000 MHz
RES BW 300 Hz

VBW 300 Hz

SPAN 200 kHz
SWP 6.00 sec

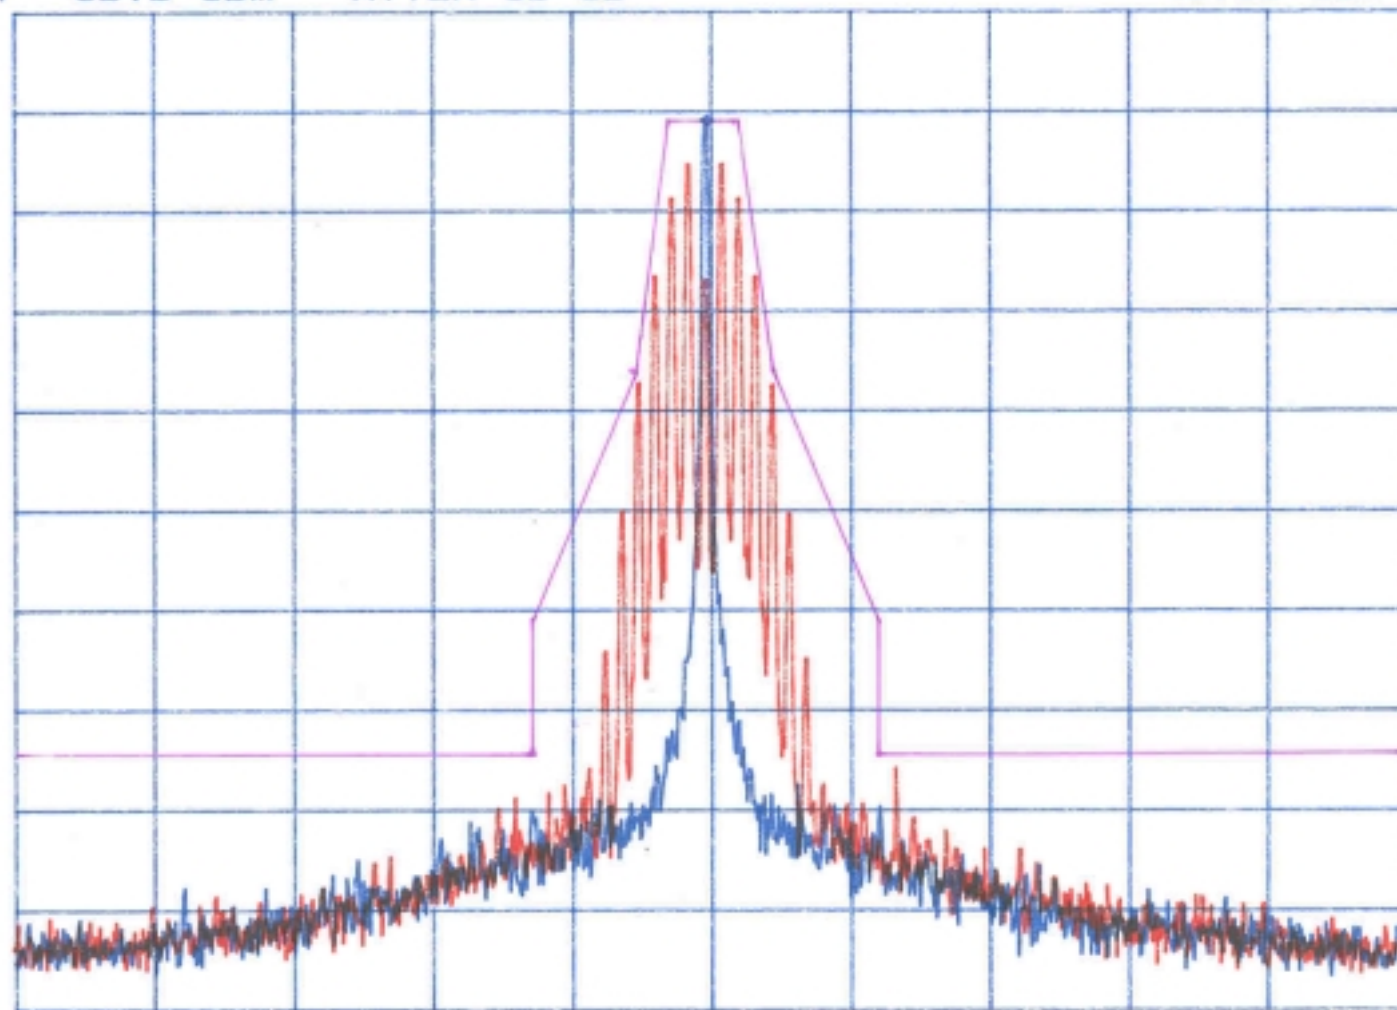

ELECTROCOM HPA4 OCCUPIED BANDWIDTH
REF 60.0 dBm ATTEN 30 dB

MKR 469.999 6 MHz
49.40 dBm

10 dB/

POS PK

OFFSET

40.0

dB

CORR'D


CENTER 470.000 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200 kHz

SWP 6.00 sec

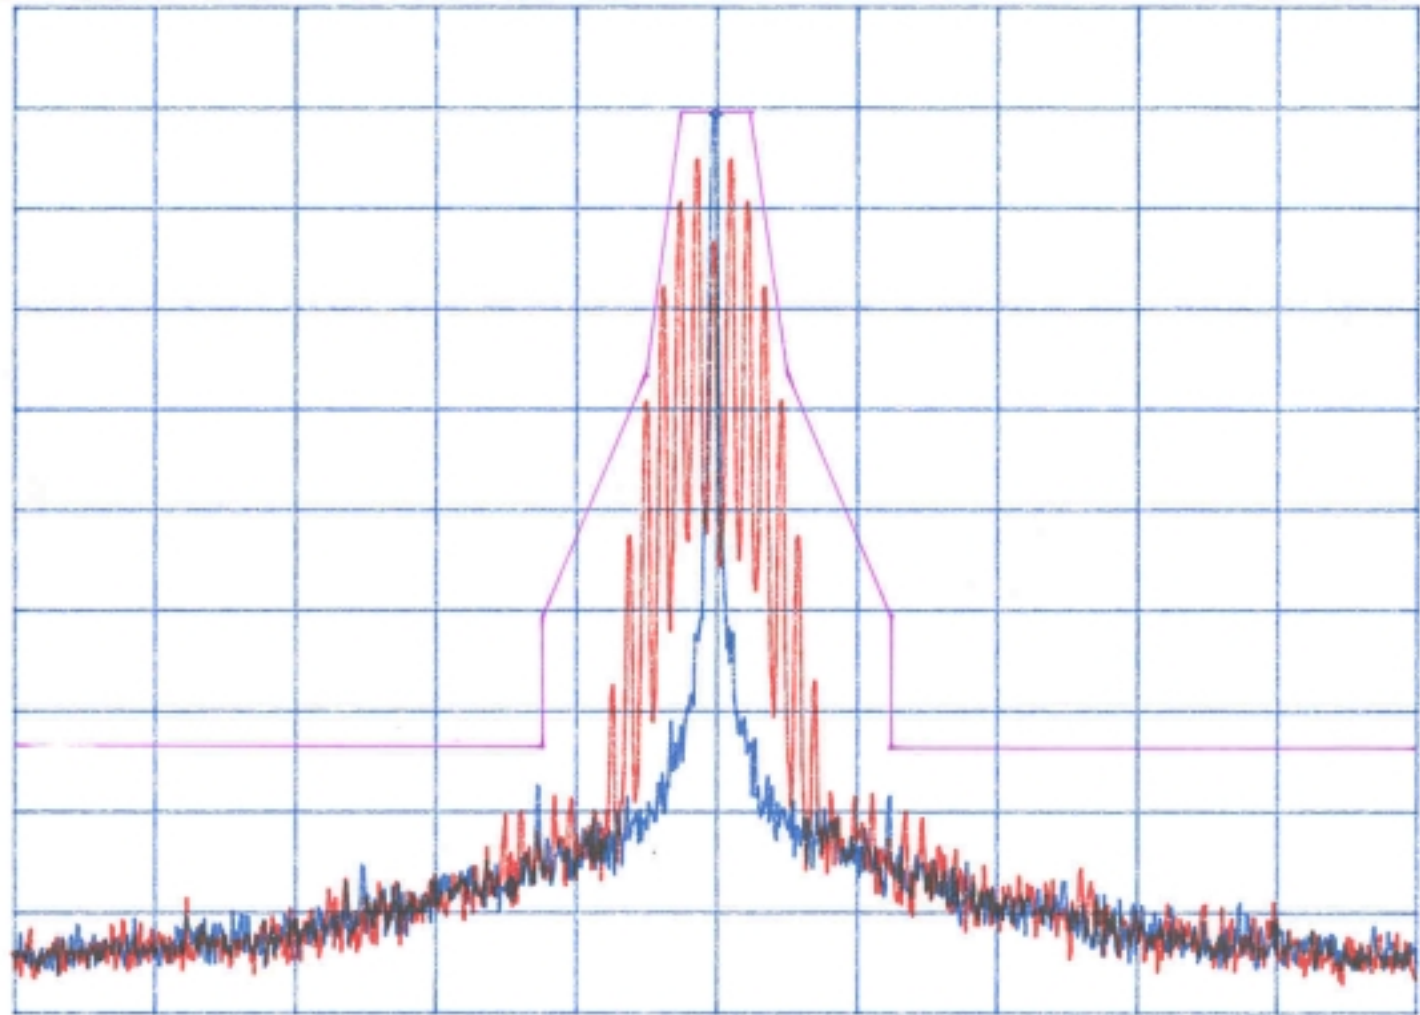

ELECTROCOM HPA4 INPUT 2.4KHz, 8KHz Dev. MKR 511.999 4 MHz
REF 60.0 dBm ATTN 30 dB 43.30 dBm

10 dB/

POS PK

OFFSET

40.0

dB

CORR'D


CENTER 512.000 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 100 KHz

SWP 3.00 sec

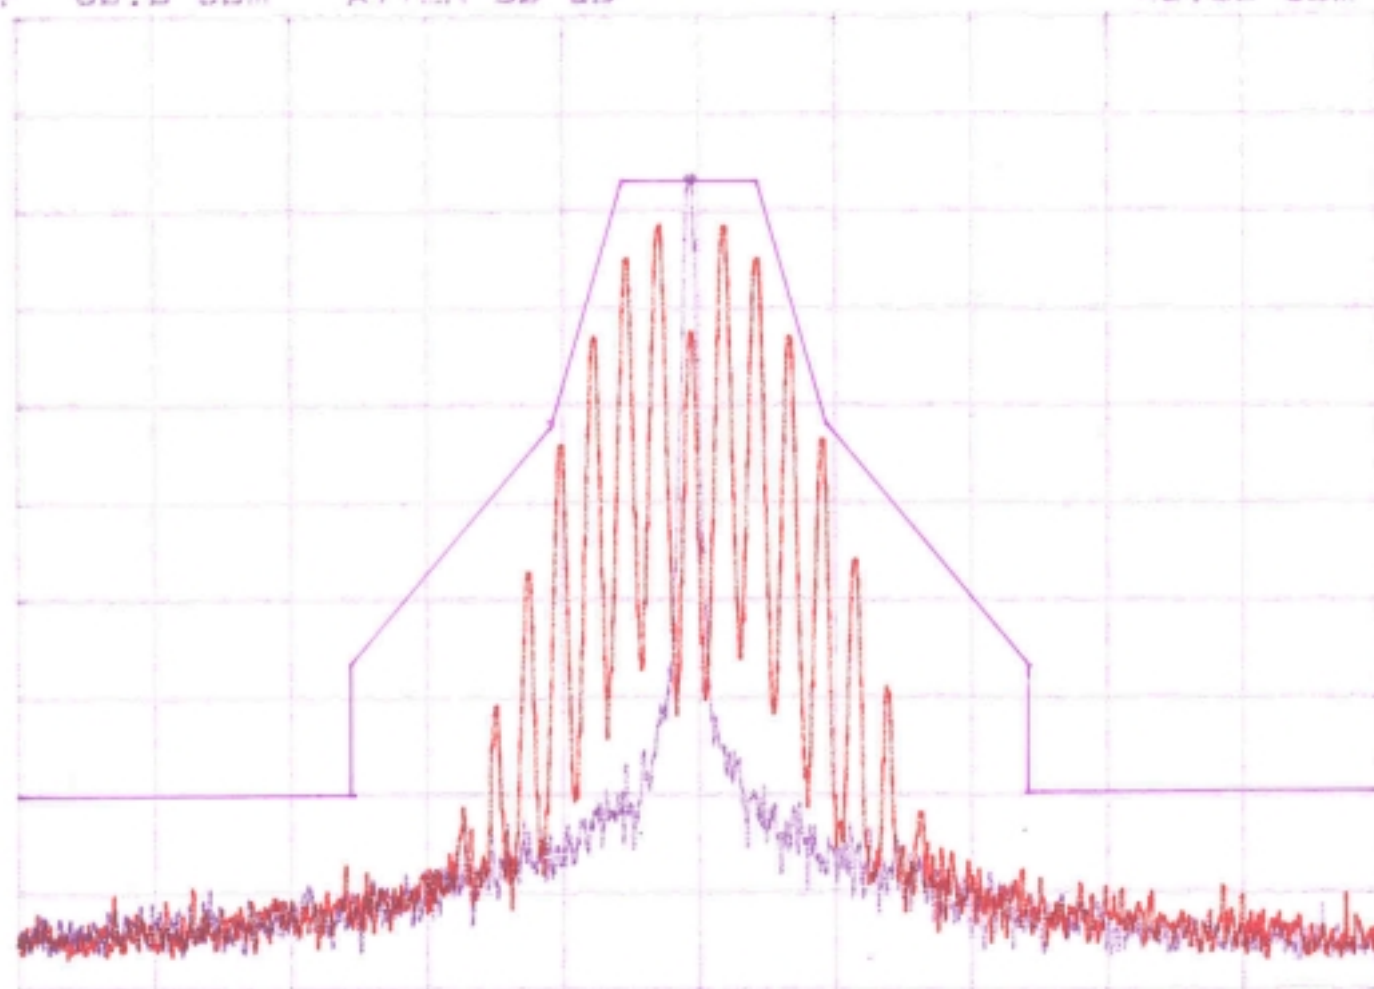

ELECTROCOM HPA4 OCCUPIED BANDWIDTH
REF 60.0 dBm ATTN 30 dB

MKR 511.999 4 MHz
48.90 dBm

10 dB/

POS PK

OFFSET
40.0
dB

CORR'D


CENTER 512.000 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 200 KHz

SWP 6.00 sec

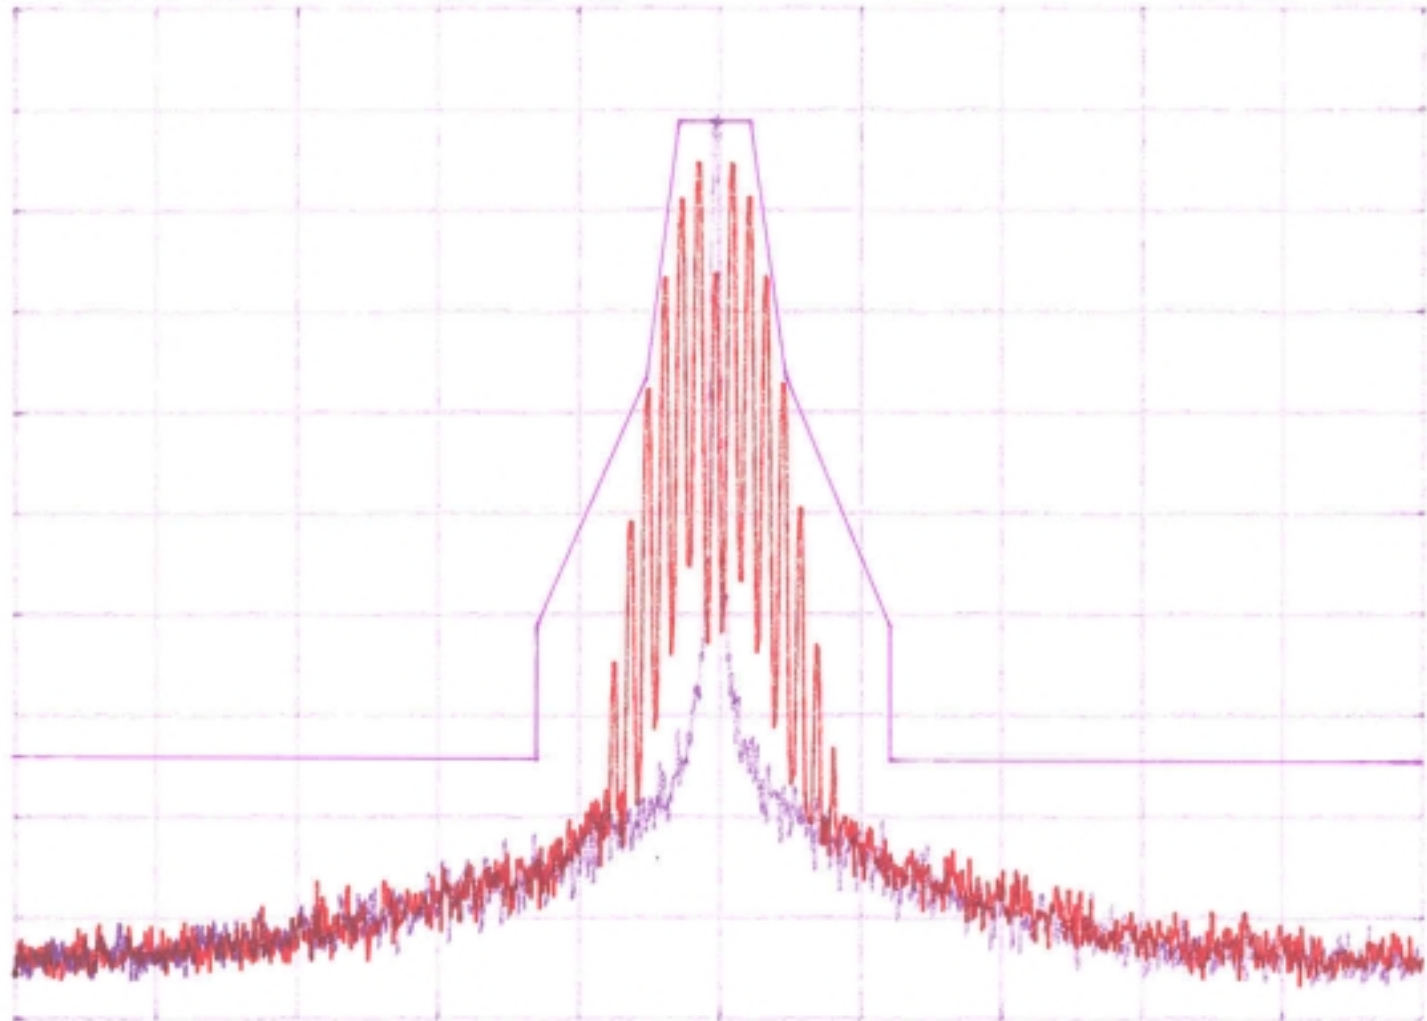

ELECTROCOM HPA4 OCCUPIED BANDWIDTH
REF 60.0 dBm ATTEN 30 dB

MKR 511.999 50 MHz
49.40 dBm

10 dB/
POS PK
OFFSET
40.0
dB

CORR'D

CENTER 512.000 0 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 50.0 kHz

SWP 1.50 sec

