

NU-METRICS FCC INFORMATION

RF Measurement Report

Prepared by:

National Certification Laboratory

**8370 Court Avenue, Suite B-1
Ellicott City, Maryland 21043
(410) 461-5548**

In Support of:

FCC REPORT OF RADIO INTERFERENCE

For:

**NU-METRICS
University Drive Box 518
Uniontown, Pennsylvania 15401**

Model: G1-2400 Transmitter

FCCID: MIK-NUMET24G1

Demonstration of Compliance with FCC Rules Part 15.247

No part of this report may be reproduced without written approval of National Certification Laboratory

April 9, 2001

TABLE OF CONTENTS

1.0 General Information.....	5
1.1 Summary	5
1.2 Test Methodology	5
1.3 Test Facility.....	5
2.0 Description of Equipment Under Test (EUT).....	6
2.1 EMI Countermeasure	7
3.0 Test Program.....	7
4.0 Test Configuration For Antenna Terminal Conducted.....	8
4.1 Peak Power Test Results.....	9
4.2 6 dB Emission Bandwidth Test Results	10
4.2.1 6 dB Bandwidth Emission (100 kHz Res. BW) Plot.....	11
4.3 Power Spectral Density.....	12
4.3.1 FCC Part 15.247(c) Power Spectral Density Plot.....	13
4.4 FCC Part 15.247(c) Conducted Spurious, 2451.00 MHz Frequency of Carrier	14
4.4.1 FCC Part 15.247(c) Conducted Spurious, 2451.00 MHz Frequency of Carrier Data Table	15
5.0 Test Configuration For Conducted And Radiated Emissions	16
6.0 A.C. Conducted Emissions Scheme	17
6.1 AC Conducted Emissions Data Table	18
7.0 Radiated Emissions Scheme	19
7.1 Radiated Emissions Data Table.....	20

TABLES

Table 1	EUT Accessories.....	21
Table 2	Support Equipment.....	22
Table 3	Measurement Equipment Used.....	23

EXHIBITS

Exhibit 1	Measurement Photographs	Error! Bookmark not defined.
Exhibit 1.1	AC Conducted Emissions Measurement Photographs.....	Error! Bookmark not defined.
Exhibit 1.2	Radiated Emissions Measurement Photographs	Error! Bookmark not defined.
Exhibit 2	Schematic	Error! Bookmark not defined.
Exhibit 3	User's Manual.....	Error! Bookmark not defined.

NCL PROJ.# Nu-Metrics-586

1.0 General Information:

This report has been prepared on behalf of **Nu-Metrics**, to support the attached Application for Certification of a Part 15 Spread Spectrum Transmitter. The Equipment Under Test (EUT) was the **Model: G1-2400 Transceiver**. The EUT configuration consisted of G2-2400 Transmitter. The test results reported in this document relate only to the item that was tested.

Radio-Noise Emissions tests were performed according to **FCC Public Notice 54797, titled "Guidance on Measurement for Direct Sequence SST"**. The measuring equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.1 Summary:

The Nu-Metrics, **G1-2400 Transceiver**, complies with the FCC limits (15.247) for a Direct Sequence SST. Tests were performed on a single radio channel.

1.2 Test Methodology:

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of three (3) meters.

1.3 Test Facility:

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of National Certification Laboratory 8370 Court Avenue, Suite B-1, Ellicott City, Maryland 21043. This site has been fully described in a report dated May 26, 1993, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.0 Description of Equipment Under Test (EUT):

The EUT features:

Permanent Attached PCB Antenna per 15.203

+10 dBm Max RF Output

2451.00 MHz Center Frequency

16.4 MHz 6 dB Emission Bandwidth

Single Channel Only

10 kbps Max Data Rate (BPSK)

5.25 MHz Data Clock

2.1 EMI Countermeasure:

The following modifications were made to the EUT, by the project engineer to assure compliance to specifications:

None.

3.0 Test Program:

This report contains measurement charts and data as evidence for the following tests performed:

1. (15.247b) Peak RF output power.
2. (15.247a) 6 dB Emission Bandwidth.
3. (15.247d) Power Spectral Density (3kHz Bandwidth).
4. (15.247c) RF Antenna Conducted output of harmonics and spurious out-of-band emissions.
5. (15.247c) Field Strength of harmonics and spurious out-of-band emissions.
6. (15.207) AC Power Line Conducted Emissions.

4.0 Test Configuration for Antenna Terminal Conducted:

RF antenna conducted output tests such as Bandwidth, Spurious/Harmonics, Power Spectral Density, and Power output were taken with the antenna connector feeding directly into the spectrum analyzer via external **20 dB attenuator**, or into the **Peak RF meter** as appropriate. The analyzer's internal attenuator was adjusted to prevent overloading of the front end. The transmitter is modulated at 10 kbps that is the highest available data rate.

Field strength measurements were taken with the transmitter operating at maximum RF power output.

4.1 Peak Power Test Results:

Limit: 1 watt (30 dBm)

Condition: Transmitter is set to a single modulated channel at full RF power.

Readings from Peak RF Power meter.

Channel: 2451 MHz - (+9.8 dBm)

4.2 6 dB Emission Bandwidth Test Results:

Minimum 6 dB BW: 0.500 MHz
RBW Setting on S.A.: 100 kHz

Condition: Transmitter is set to a single modulated channel at 10 kbps at full RF power.


Readings from Spectrum Analyzer:

Channel : 2451.00 MHz - (16.8 MHz)

SEE FOLLOWING PLOT OF MODULATED CARRIER

4.2.1 6 dB Bandwidth Emission (100 kHz Res. BW) Plot:

6 dB EMISSION BANDWIDTH – MODULATED CARRIER

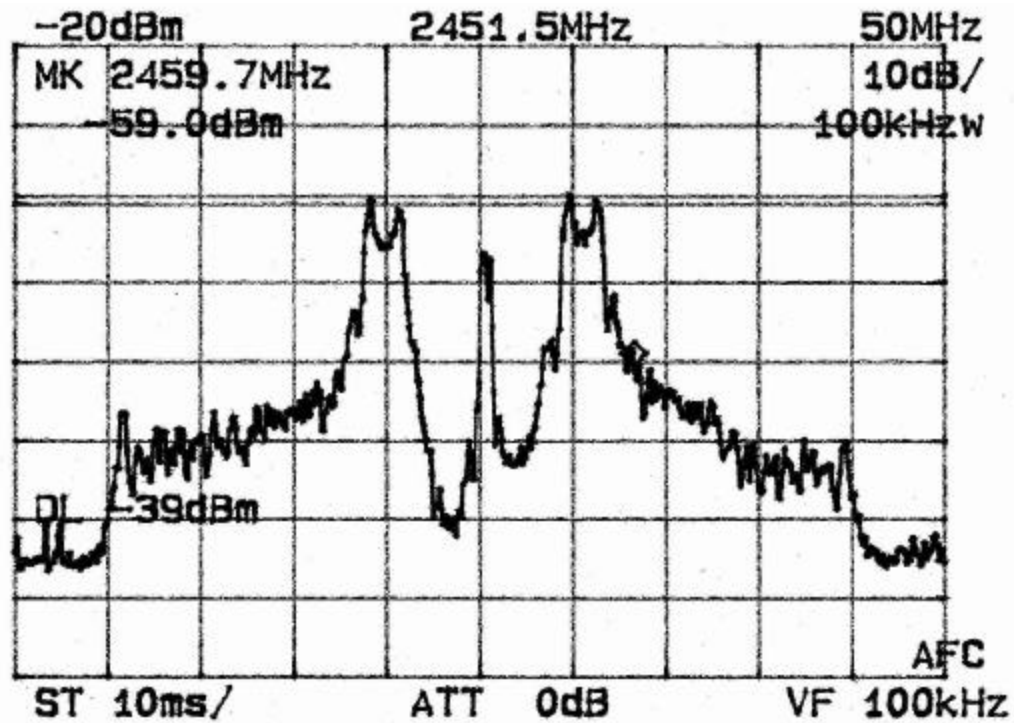

4.3 Power Spectral Density:

Limit: 8 dBm
Resolution BW: 3 kHz
Actual Time Interval used for testing:: 1.5 second/3kHz MHz

Condition: Transmitter is set to a single channel modulated at 10 kbps at full RF power.


Note: 20 dB front-end attenuator on analyzer

Reading from spectrum analyzer:

Channel: 2451.00 MHz - -1.8 dBm

SEE FOLLOWING PLOT & DATA TABLES

4.3.1 FCC Part 15.247(c) Power Spectral Density Plot:

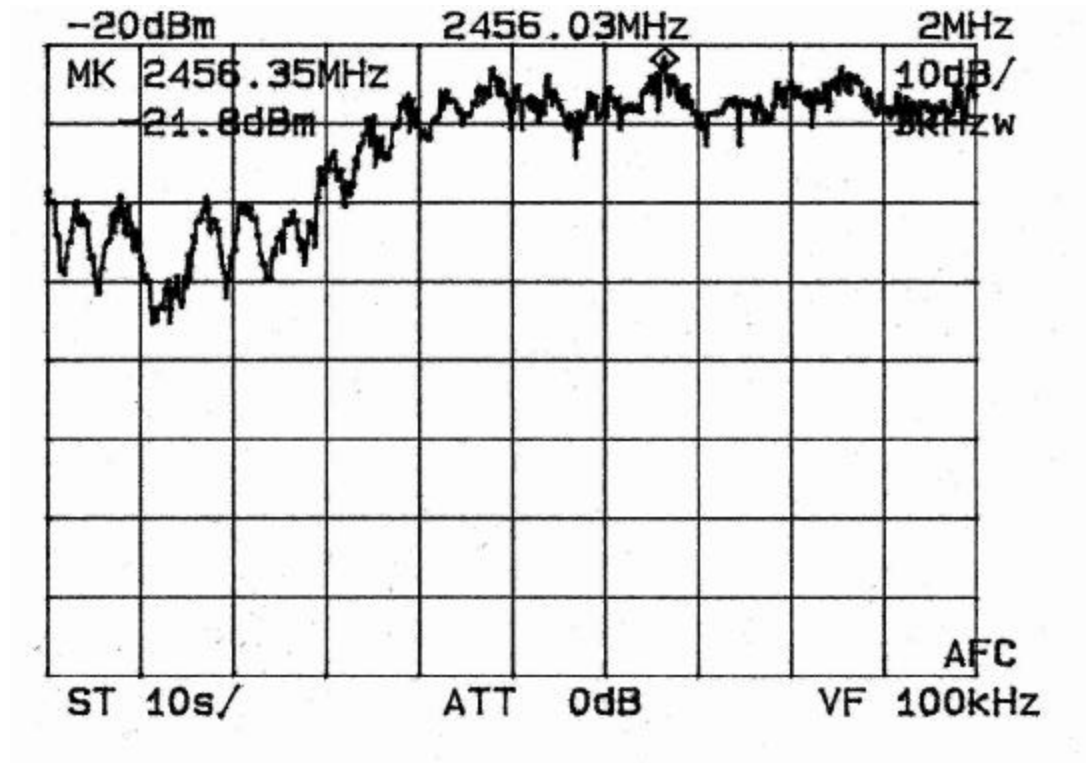

4.4 FCC Part 15.247(c) Conducted Spurious, 2451 MHz Frequency Of Carrier:

Frequency of Carrier = 2451 MHz
Limit Below Fc Level = 20 dB below Carrier Level Measured with 100 kHz RBW

Condition: Transmitter is set to a single modulated channel at full RF power.

SEE FOLLOWING DATA TABLE

4.4.1 FCC Part 15.247(c) Conducted Spurious, 2451 MHz Frequency of Carrier Data Table:

TEST RESULTS

LIMIT: -20 dBc

<u>Component</u>	<u>Frequency (MHz)</u>	<u>Result (dB Below Peak)</u>
Harmonic	4902.00	-59.0
Harmonic	7353.00	-61.0
Harmonic	9804.00	-62.0
Harmonic	12255.00	-65.0
Harmonic	14706.00	-70.0
Harmonic	17157.00	-71.0
Harmonic	19608.00	-73.0
Harmonic	22059.00	-75.0
Harmonic	24510.00	-75.0

5.0 Test Configuration for Conducted and Radiated Emissions:

The EUT was set up on the center of the test table, in a manner which follows the general guidelines of ANSI C63.4, Section 6 **“General Operating Conditions and Configurations”**. The transmitter is turned on and automatically begins transmission at full RF power output, once initialized.

6.0 A.C. Conducted Emissions Scheme:

The EUT is placed on an 80 cm high 1 X 1.5 m non-conductive table. Power to the RF amplifier is provided through a Solar Corporation 50 Ω / 50 uH Line Impedance Stabilization Network bonded to a 2.2 X 2 meter horizontal ground plane, and a 2.2 X 2 meter vertical ground plane. The LISN has its AC input supplied from a filtered AC power source. A separate LISN provides AC power to the peripheral equipment. I/O cables are moved about to obtain maximum emissions.

The 50 Ω output of the LISN is connected to the input of the spectrum analyzer and emissions in the frequency range of 450 kHz to 30 MHz are searched. The detector function is set to Quasi-Peak and the resolution bandwidth is set at 9 kHz, with all post detector filtering no less than 10 times the resolution bandwidth for final measurements. All emissions within 20 dB of the limit are recorded in the data tables.

6.1 AC Conducted Emissions Data Table

EUT is battery powered only.

7.0 Radiated Emissions Scheme:

The EUT is placed on an 80 cm high 1 X 1.5 meter non-conductive motorized turntable for radiated testing on the 3 meter open area test site. The emissions from the EUT are measured continuously at every azimuth by rotating the turntable. Guided horn and log periodic broadband antennas are mounted on an antenna mast to determine the height of the maximum emissions. The heights of the antennas are varied between 1 and 4 meters. Both the horizontal and vertical field components are measured.

The RF spectrum is searched from 30 MHz to 24 GHz.

The output from the antenna is connected to the input of the preamplifier. The pre-amp out is connected to the spectrum analyzer. The detector function is set to PEAK. The resolution bandwidth of the spectrum analyzer is set at 120 kHz for the frequency range of 30-1000 MHz, and 1 MHz for the frequency range of 1-24 GHz. A 10Hz video BW setting is used to average readings above 1 GHz when applicable. All emissions within 20 dB of the limit are recorded in the data tables.

To convert the spectrum analyzer reading into a quantified E-field level to allow comparison with the FCC limits, it is necessary to account for various calibration factors. These factors include cable loss (CL) and antenna factors (AF). The AF/CL in dB/m is algebraically added to the Spectrum Analyzer Voltage in dBμV/m. This level is then compared to the FCC limit.

EXAMPLE

Spectrum Analyzer Voltage: **VdBmV**

Composite Factor: **AF/CL dB/m**

Electric Field: **E dBmV/m = V dBmV + AF/CL dB/m**

Linear Conversion: **E mV/m = Antilog (E dBmV/m /20)**

7.1 Radiated Emissions Data Table:

FCC RADIATED EMISSIONS DATA

CLIENT: Nu-Metrics

EUT: G1-2400

FREQ.: 2451.00 MHZ

POWER: 10 dBm

3 METER TEST

DETECTOR - PEAK

DATE: 06/17/2001

FREQUENCY MHz	POLARITY		SPEC A dBuV	AF/C dB/m	AMP Gain dB	Average Factor dB	PEAK E-Field dbuV/m	Average Limit dBuV/m	MARGIN dB	CONDITION
	H	V								
4,902.00	H	V	37.00	35.00	25.00	0.00	47.00	54.00	7.00	PASS
12,255.00		V	32.00	40.00	25.00	0.00	47.00	54.00	7.00	PASS
14,706.00	H	V	27.00	43.00	25.00	0.00	45.00	54.00	9.00	PASS
19,608.00		V	28.00	36.00	25.00	0.00	39.00	54.00	15.00	PASS

TEST ENGINEER:

Brian Haghtalab

TABLE 1 – EUT ACCESSORIES

None Used

TABLE 2
SUPPORT EQUIPMENT

MANUFACTURER	FCC ID #	SERIAL #
None Used		

TABLE 3
MEASUREMENT EQUIPMENT USED

The following equipment is used to perform measurements:

EQUIPMENT	SERIAL #
HP 434A RF Peak Power Meter	1362016
EMCO Model 3110 Biconical Antenna	1619
Antenna Research MWH-1825B Horn Antenna	1005
EMCO Model 3115 Ridged Horn Antenna	3007
HP 8348A Pre-Amplifier	197-2564A
Solar 8012-50-R-24-BNC LISN	924867
Bird 8306-300-N-30dB Attenuator	29198391515
HP 14IT w/8555A Spectrum Analyzer	6-95-1124
4 Meter Antenna Mast	
Motorized Turntable	
Heliac FSJ1-50A ¼" Superflex Coax Cable	