



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ! BALTIMORE, MARYLAND 21230-3432 ! PHONE (410) 354-3300 ! FAX (410) 354-3313



October 2, 2003

Enfora Inc.
661 East 18th Street
Plano, Texas 75074

Reference: **Wireless Portfolio WP802b**
FCC ID: MIVWLN0101

Dear Mr. Phillip Raymond:

Enclosed is the EMC Test Report for the **Enfora Inc.** The **Enfora Inc Wireless Portfolio WP802b** was tested to the requirements of the FCC Rules and Regulations, Section 15.247, of Title 47 of the CFR, for a Part 15 Transmitter.

Thank you for using the testing services of MET Laboratories. If you have any questions regarding these results or if MET can be of further assistance to you, please feel free to contact me. We appreciate your business and look forward to working with you again soon.

Kindest Regards,
MET LABORATORIES, INC.
Marianne Bosley

Marianne T. Bosley
Documentation Department

Enclosures: (\Enfora Inc.\EMC14139-FCC247.rpt)
DOCTEM-23 Jan 02

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo in this report reflects the MET Accreditation under the NVLAP Program, these letters, logo, or Statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

Electro-Magnetic Compatibility

Test Report

for the

Enfora Inc.
Wireless Portfolio WP802b

Tested Under

FCC Part 15 Subpart C
Section 15.247
Title 47 of the CFR
for Intentional Radiators

MET REPORT: EMC14139-FCC247

September 20, 2003

PREPARED FOR:

Enfora Inc.
661 East 18th Street
Plano, Texas 75074

PREPARED BY:

MET Laboratories, Inc.
914 West Patapsco Avenue
Baltimore, Maryland 21230-3432

Copyright 2003, MET Laboratories, Inc.

This report shall not be reproduced except in full, without the express written consent of MET Laboratories, Inc., nor shall this report, or any copy thereof be provided to a competitor of MET Laboratories, Inc.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

Electro-Magnetic Compatibility

Test Report
for the

Enfora Inc.
Wireless Portfolio WP802b

Tested Under

FCC Part 15 Subpart C
Section 15.247
Title 47 of the CFR
for Intentional Radiators

MET REPORT: **EMC14139-FCC247**

September 20, 2003

PREPARED FOR:

Enfora Inc.
661 East 18th Street
Plano, Texas 75074

A handwritten signature in blue ink that appears to read "Christopher R. Harvey".

Christopher R. Harvey, Director
Electromagnetic Compatibility Testing

A handwritten signature in blue ink that appears to read "Marianne T. Bosley".

Marianne T. Bosley
Report Writer

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15, Section 15.247, of the FCC Rules under normal use and maintenance.

A handwritten signature in blue ink that appears to read "Liming Xu".

Liming Xu
Project Engineer



Table of Contents

I.	Executive Summary	1
A.	Purpose of Test	2
B.	Executive Summary	2
II.	General	3
A.	Test Site	4
B.	Description of Test Sample	4
C.	General Test Setup	4
D.	Mode of Operation	4
E.	Modifications	7
F.	Disposition of Test Sample	7
III.	Antenna Requirements	8
IV.	Emissions Requirements	10
A.	Conducted Emissions	11
B.	Radiated Emissions - General	17
V.	Bandwidth & Bandedge Requirements	20
VI.	Peak Output Power Requirements	26
A.	Peak Output Power (Conducted)	27
B.	RF Exposure Requirements	29
VII.	Spurious Emissions - Radiated & RF Conducted - Requirements	30
VIII.	Power Spectral Density Requirements	37
IX.	Test Equipment	41
X.	Certification Label & User's Manual Information	43
A.	Certification Information	44
B.	Label and User's Manual Information	47



List of Tables

Table 1.	Summary of Test Results	v
Table 2.	Summary of Test Data	v
Table 3.	EUT Compliance	2
Table 4.	References	2
Table 5.	Limits for Conducted Emissions from Intentional Radiators	11
Table 6.	Conducted Emissions Voltage-AC Power Phase, Worst Case Summary	13
Table 7.	Conducted Emissions Voltage-AC Power Neutral, Worst Case Summary	15
Table 8.	Limits for Spurious Emissions from Intentional Radiators	17
Table 9.	Radiated Emissions (Spurious) Results - 30MHz - 1GHz	19
Table 10.	Test Equipment for Intentional Radiators - §15.247	42

List of Figures

Figure 1.	Test Configuration	5
Figure 2.	FCC Intentional Radiators Tests Setup Photo	12



List of Terms and Abbreviations

AC	Alternating Current
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB_{FA}	Decibels above one microamp
dB_{FV}	Decibels above one microvolt
dB_{FA}/m	Decibels above one microamp per meter
dB_{FV}/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
CISPR	Comité International Special des Perturbations Radioélectriques (International Special Committee on Radio Interference)
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
fH	microhenry
fF	microfarad
fs	microseconds
NEBS	Network Equipment-Building System
OATS	Open Area Test Site
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



Summary of Test Results

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Section 15.247. All tests were conducted using measurement procedure ANSI C63.4-1992.

Type of Submission/Rule Part:	Original Filing
EUT:	Wireless Portfolio WP802b Prototype
FCC ID:	MIVWLN0101
Equipment Code:	DSSS
RF Power output:	0.016W Conducted
Frequency Range (MHz):	2.412 GHz - 2.462 GHz

Table 1.

Summary of Test Data

Name of Test	FCC Rule Part/Section	Results
Conducted Emissions	15.207(a)	Complies
Radiated Emissions	15.209(a)	Complies
Bandwidth & Channelization	15.247(a)	Complies
Output Power and RF Exposure	15.247(b)	Complies
Spurious Emissions - Radiated and RF Conducted	15.247(c)	Complies
Power Spectral Density	15.247(d)	Complies

Table 2.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

I. Executive Summary



I. Executive Summary

A. Purpose of Test

An EMC evaluation to determine compliance of the Wireless Portfolio WP802b with the requirements of Part 15, Section 15.247, was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the Marconi. Enfora Inc. should retain a copy of this document should be kept on file for at least five years after the manufacturing of the Marconi has been **permanently** discontinued.

B. Executive Summary

The following tests were performed in accordance with Enfora Inc. Purchase Order Number 5001410006:

Specifications	Description	Compliance
Title 47 of the CFR, Part 15, Subpart C, §15.207(a)	Electromagnetic Compatibility - Conducted Emissions for an Intentional Radiator	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.209(a)	Electromagnetic Compatibility - Radiated Emissions for an Intentional Radiator	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(a)	Electromagnetic Compatibility - Bandwidth & Channelization Requirements	Complies
Title 47 of the CFR, Part 15, Subpart C, 15.247(b)	Electromagnetic Compatibility - Output Power and RF Exposure Requirements	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(c)	Electromagnetic Compatibility - Spurious Emissions Requirements - Radiated and RF Conducted	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(d)	Electromagnetic Compatibility - Power Spectral Density	Complies

Table 3. EUT Compliance

The EUT, as supplied to MET Laboratories, complied with the requirements stated in this test report.

References	Description
Purchase Order #4830	Enfora Inc. Purchase Order for Marconi-10.4 TFT, 802.11b Web Tablet Testing
ANSI-C63.4:1992	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
FCC 47CFR, Chapter 1, Part 2	Title 47 Code of Federal Regulations Part 2 - Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
FCC 47CFR, Chapter 1, Part 15	Title 47 Code of Federal Regulations Part 15 - Radio Frequency Devices
FCC DA 00-705	Public Notice - Filing and Measurement Guidelines for DSSS Systems

Table 4. References



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

II. General



II. General

A. Test Site

All testing was conducted at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, Maryland 21230-3432. Radiated Emissions measurements were performed inside of a Semi Anechoic Chamber. In accordance with §2.948(a)(2), a complete site description is filed with the Commission's Laboratory in Columbia, Maryland. MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0)

B. Description of Test Sample

The Wireless Portfolio WP802b is an internet appliance device designed for the wireless. Internet connection ability is via the internal 802.11b miniPCI wireless LAN card, which has previously received a Limited Modular Approval under the FCC ID: A3LSWL-2250U.

C. General Test Setup

The EUT was tested in the configuration shown on the following pages.

D. Mode of Operation

The Wireless Portfolio WP802b was connected to the DC Power supply and a PDA.

The EUT is set to communicate at its maximum level over a wireless 802.11 link on a continuous basis. There is only one mode of operation being tested for all aspects of the requested tests.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

II. General

E. Modifications

There were no modifications.

F. Disposition of Test Sample

Returned to:

Enfora Inc.
661 East 18th Street
Plano, Texas 75074



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

III. Antenna Requirements



III. Antenna Requirements

Antenna Evaluation Criteria

Requirements: The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- (a) Antenna be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The Enfora Inc. **Wireless Portfolio WP802b** meets the criteria of this rule by virtue of having an internal PCB diversity antenna. EUT is therefore compliant with §15.203.

Antenna Gain = -3 dBi



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

IV. Emissions Requirements



IV. Emissions Requirements

A. Conducted Emissions

Requirements: The EUT shall meet the limits shown below:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Table 5. Limits for Intentional Radiators from FCC Part 15 §15.207(a)/CISPR 22

*Decreases with the logarithm of the frequency.

Test Equipment: Test equipment utilized in this test is located in Section IX of this report.

Test Configuration: The EUT was installed inside a shielded enclosure. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the shielded enclosure, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω/50 FH Line Impedance Stabilization Network (LISN).

Procedure: The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHZ." The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 FH LISN as the input transducer to an EMC/Field Intensity Meter. The tests were conducted in a RF shielded enclosure.

Results: The EUT complies with the Conducted Emissions Limits of 15.207(a).

Test Engineer: Liming Xu

Test Date: August 26, 2003



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

IV. Emissions Requirements

Subject: Conducted Emissions - Voltage, Data Plot

Port: AC Power Phase

Requirements: FCC Part 15 Subpart C, §15.207(a)/CISPR 22

Results: Equipment meets the specifications of §15.207(a)/CISPR 22(B). Plot appears on the following page.

Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	Margin (dB) AVG
Phase A	0.259	32.9	61.46	PASS	-28.56	27.5	51.46	PASS	-23.96
Phase A	0.363	33.5	58.66	PASS	-25.16	25.7	48.66	PASS	-22.96
Phase A	0.528	31.6	56	PASS	-24.4	21	46	PASS	-25
Phase A	1.55	30	56	PASS	-26	29	46	PASS	-17
Phase A	3.93	30.1	56	PASS	-25.9	25.1	46	PASS	-20.9
Phase A	4.65	29.9	56	PASS	-26.1	23.3	46	PASS	-22.7

Table 6. Conducted Emissions Voltage, AC Power Phase line , Worst Case Emissions Summary

Test Engineer: Liming Xu

Test Date: June 19, 2003



IV. Emissions Requirements

18:28:34 JUL 28, 2003

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	
2	1.549110	31.8	30.0	29.0	SELECT
3	4.154989	34.7	27.7	20.4	FRM LIST
4	3.925203	34.5	30.1	25.1	
5	4.652040	34.9	29.9	23.3	DELETE
6	6.824910	30.0	25.2	18.8	SIGNAL

SIGNAL NUMBER ACTV DET: PEAK
6 MEAS DET: PEAK QP AVG DELETE
MKR 6.79 MHz ALL SIGS
22.82 dBpV

LOG REF 75.0 dB μ V
10 dB/
ATN
10 dB
WA SB
SC FC
CORR
START 150 kHz STOP 30.00 MHz
#IF BW 9.0 kHz AVG BW 30 kHz SWP 1.11 sec
DELETE
MARKED
Previous
Menu

18:31:32 JUL 28, 2003

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	
4	0.259899	35.4	32.9	27.5	
5	0.362981	36.7	33.5	25.7	
6	0.378683	29.0	25.9	15.7	
7	0.506572	32.7	31.0	19.9	
8	0.528526	39.9	31.6	21.0	

LOG REF 75.0 dB μ V

10 dB/ μ V

ATN 10 dB

WA SB SC FC CORR

START 150 kHz #IF BW 9.0 kHz AVG BW 30 kHz

STOP 2,000 MHz SWP 68.5 msec

DELETE MARKED

Previous Menu



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

IV. Emissions Requirements

Subject: Conducted Emissions - Voltage, Data Plot

Port: AC Power Neutral

Requirements: FCC Part 15 Subpart C, §15.207(a)/CISPR 22

Results: Equipment meets the specifications of §15.207(a)/CISPR 22(B). Plot appears on the following page.

Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	Margin (dB) AVG
Neutral	0.157	28.5	65.62	PASS	-37.12	11.3	55.62	PASS	-44.32
Neutral	0.231	31.1	62.41	PASS	-31.31	26.7	52.41	PASS	-25.71
Neutral	1.418	30	56	PASS	-26	29.3	46	PASS	-16.7
Neutral	5.25	29.5	60	PASS	-30.5	22.1	50	PASS	-27.9
Neutral	7.95	25.5	60	PASS	-34.5	18.4	50	PASS	-31.6
Neutral	12.13	27.4	60	PASS	-32.6	22.9	50	PASS	-27.1

Table 7. Conducted Emissions Voltage, AC Power Neutral, Worst Case Emissions Summary

Test Engineer: Liming Xu

Test Date: August 26, 2003



Enfora Inc.

Wireless Portfolio WP802b


FCC ID: MIVWLN0101

September 20, 2003

18:19:12 JUL 28, 2003

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	
2	1.418285	31.6	30.0	29.3	SELECT
3	5.249258	36.3	29.5	22.1	FRM LIST
4	7.949894	29.2	25.5	18.4	
5	12.119315	28.6	22.0	16.2	
6	12.127993	31.3	27.8	22.9	DELETE SIGNAL

SIGNAL NUMBER	ACTV DET: PEAK	MEAS DET: PEAK QP AVG	DELETE
6	MEAS DET: PEAK QP AVG	MKR 12.16 MHz	ALL SIGS
		29.04 dB μ V	

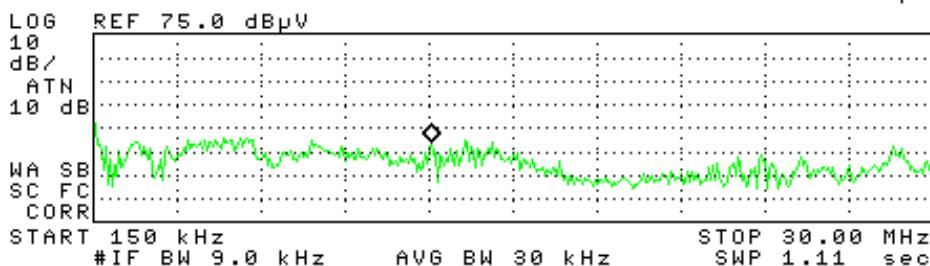


DELETE MARKED

Previous Menu

18:21:28 JUL 28, 2003

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	
1	0.157484	36.6	28.5	11.3	MEAS
2	0.231845	33.5	31.1	26.5	STEPPED
3	0.230815	33.8	31.1	26.7	
4	0.296480	25.6	20.9	12.3	
5	0.297444	26.2	20.8	12.7	FAST STP ON OFF

STOP	ACTV DET: PEAK	MEAS DET: PEAK QP AVG	AUTO-
1.0000 MHz	MEAS DET: PEAK QP AVG	MKR 296.6 kHz	MEASURE
		17.70 dB μ V	

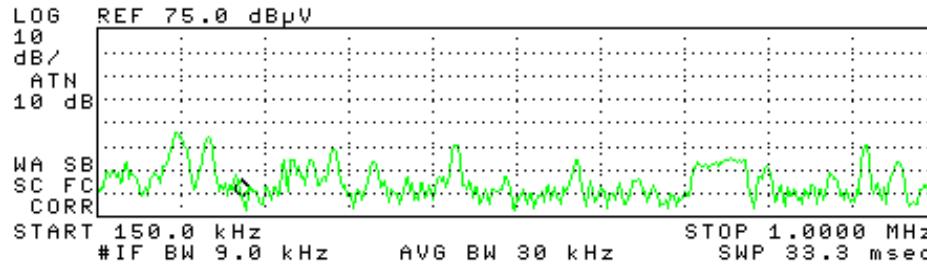

LIN CHCK ON OFF

Tower/ Turntabl

More 3 of 3



IV. Emissions Requirements

B. Radiated Emissions - General

Requirements: The EUT shall meet the limits shown below:

Frequency (MHz)	Limit (dB μ V/m) @ 3 m
30 - 88	100**
88 - 216	150**
216 - 960	200**
Above 960	500

Table 8. Limits for Spurious Emissions from Intentional Radiators from FCC Part 15 § 15.209(a)

** Except as provided in §15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. Sections 15.231 and 15.241.

Test Equipment: Test equipment for this test is located in Section IX of this report.

Test Conditions: The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a semi-anechoic chamber or OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHZ, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. For frequencies above 1 GHZ, peak measurements were made with a resolution bandwidth of 1 MHz and a video bandwidth of 1MHz and average measurements were made with RBW = 1MHz and VBW = 10 Hz.

For intentional radiators with a digital device portion which operates below 10 GHZ, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHZ, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.



IV. Emissions Requirements

Procedure: For pre-scanning, the EMI receiver scanned the frequency range from 30 MHz to 10 GHZ, per §15.33(a)(4) to obtain an Emission profile of the EUT. For each point of measurement, the turntable was rotated, the positions of the interface cables were varied, and the antenna height was varied between 1 m and 4 m, in order to find the maximum radiated Emissions. Measurements were taken using this technique with the antenna in two polarizations: horizontal and vertical.

Subject: Radiated Emissions - (Spurious) Electric Field Test Results

Specification: FCC Part 15 Subpart B and C, §15.109 and 15.209

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuv)	Antenna Correction Factor (dB) (+)	Cable Loss (dB)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuv)	Limit (dBuv)	Margin (dB)
47.307	0	H	1	8.6	9.48	1.55	0	19.63	40	-20.37
47.307	0	V	1	21.81	8.43	1.55	0	31.79	40	-8.21
110.6	320	H	1	8.2	7.10	2.37	0	17.67	43.5	-25.83
110.6	320	V	1	15.21	7.56	2.37	0	25.14	43.5	-18.36
155.1	0	H	1	9.1	8.01	2.68	0	19.79	43.5	-23.71
155.1	0	V	1	11.53	8.11	2.68	0	22.32	43.5	-21.18
564	0	H	1	8.71	18.52	4.86	0	32.09	46	-13.91
564	0	V	1	10.49	18.58	4.86	0	33.93	46	-12.07
738	0	H	1	4.1	21.14	5.34	0	30.58	46	-15.42
738	0	V	1	3.28	21.00	5.34	0	29.62	46	-16.38
980	0	H	1	2.1	24.10	6.21	0	32.41	54	-21.59
980	0	V	1	2.7	23.80	6.21	0	32.71	54	-21.29

Table 9. Radiated Emissions (spurious) Results - 30 MHz - 1 GHZ

* There is no detectable emissions between 980 Mhz and 24.8 GHz

Results: The EUT complied with the radiated Emissions limits of Section 15.209(a).

Test Engineer: Liming Xu

Test Date: September 4, 2003



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

V. Bandwidth & Bandedge Requirements



V. Bandwidth & Bandedge Requirements

Bandwidth & Bandedge Requirements - §15.247(a)


Requirements: For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. For DTS, the minimum 6dB bandwidth shall be at least 500 kHz. For frequency hopping systems, the EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Equipment: Test equipment for this test is located in Section IX of this report


**Test Configuration/
Procedure:** The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, $VBW \geq RBW$. The 20 dB bandwidth was measured and recorded.

Results: Equipment complies with § 15.247 (a). The 20 dB bandwidth was determined from the following plots:

V. Bandwidth & Bandedge Requirements

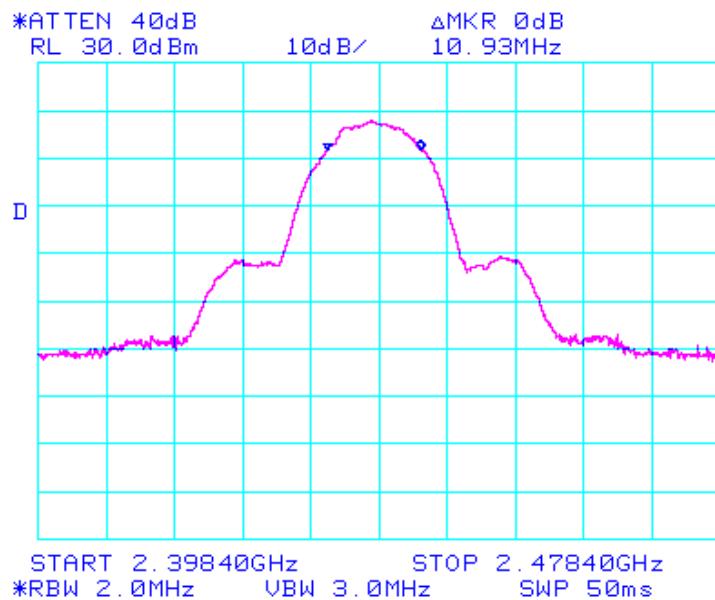

6 dB Bandwidth

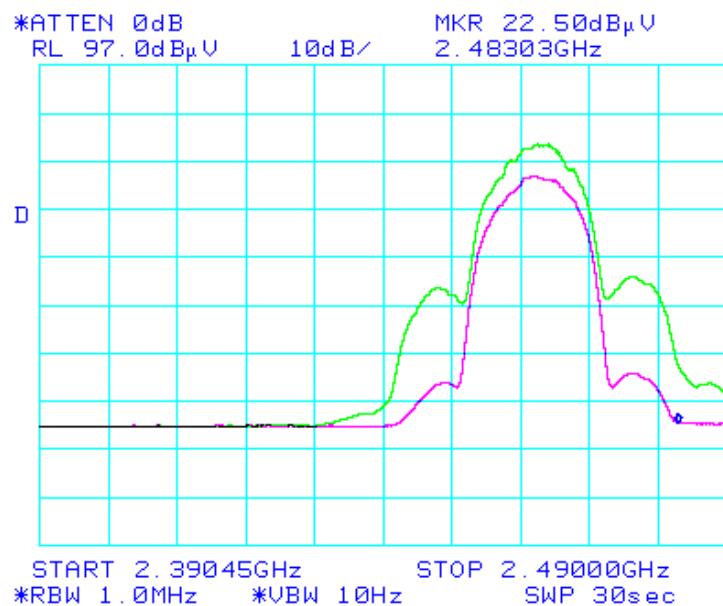


Spur emissions in restricted band:

$(22.5+27.88)$ dB μ V = 50.38 dB μ V
@ 3 meters

*27.88dB is antenna factor @
2.483GHz

*FCC Limit: 54 dB μ V @ 3 meters

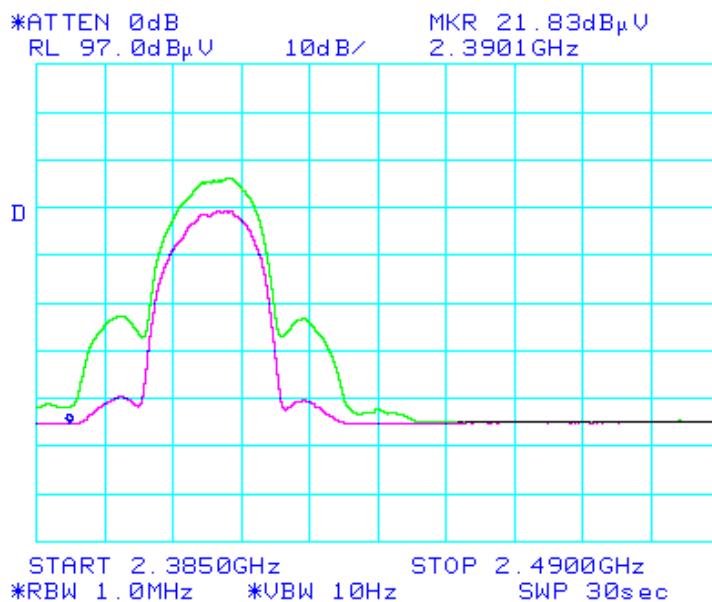


Spur emissions in restricted band:

(21.67 + 27.75) dB μ V = 49.42 dB μ V
@ 3 meters


*27.75 dB is the antenna factor @
2.39 GHz

*FCC Limit is 54 dB μ V @ 3 meters

V. Bandwidth & Bandedge Requirements

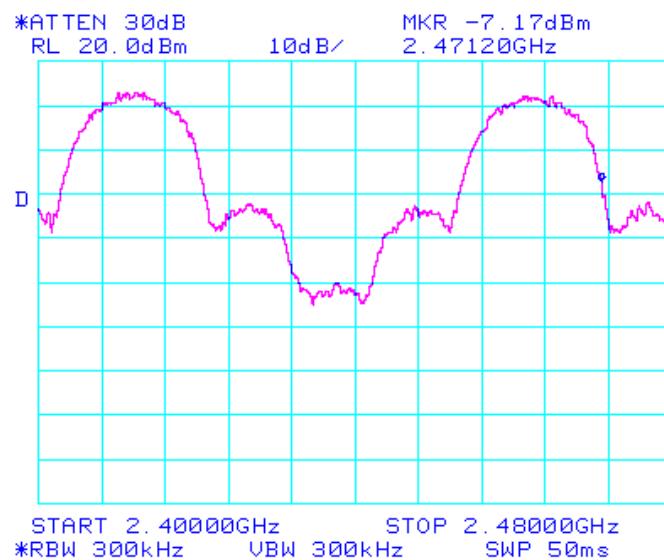

V. Bandwidth & Bandedge Requirements

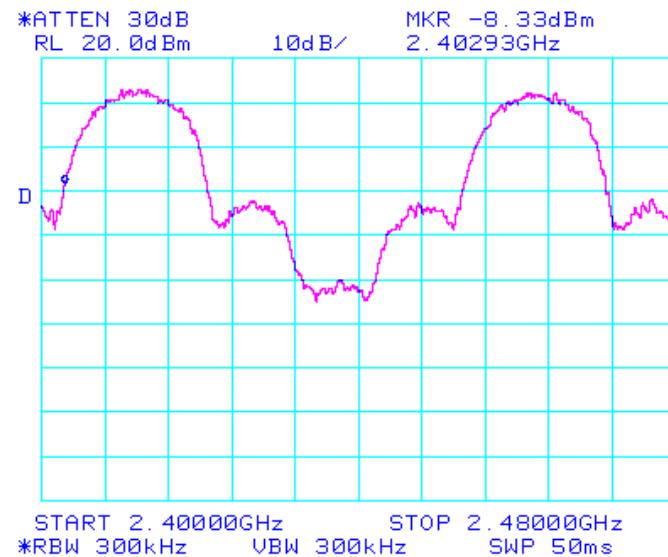




Enfora Inc.


Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

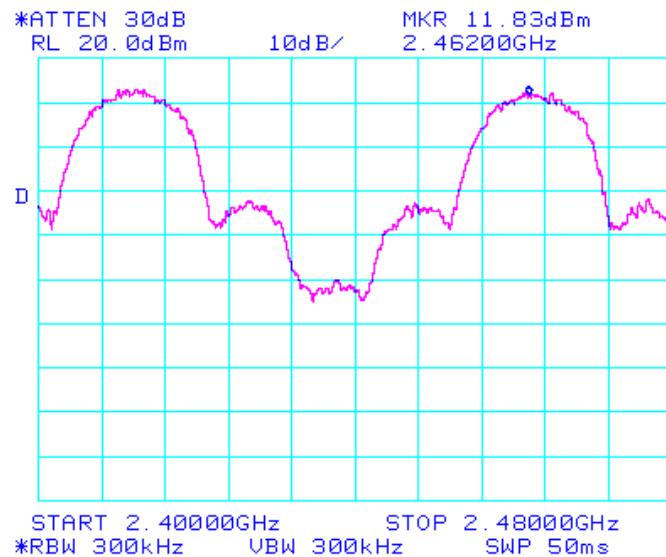

V. Bandwidth & Bandedge Requirements

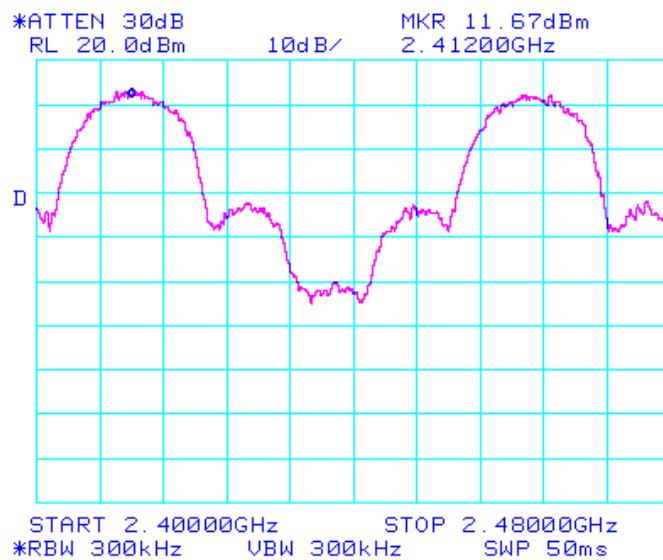

Test Engineer: Liming Xu

Test Date: July 14, 2003



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

VI. Peak Output Power Requirements



VI. Peak Output Power Requirements

A. Peak Output Power (Conducted) - §15.247(b)


Requirements: The EUT maximum peak output power shall not exceed 1 watt for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band. For all other frequency hopping systems in the 2400-2483.5 MHz band the maximum peak output power shall not exceed 0.125 watts.

Test Equipment: Test equipment for this test is located in Section IX of this report

Test Configuration/Procedure: The transmitter output was connected to the spectrum analyzer through an attenuator. The RBW is larger than the bandwidth of the emission, $VBW \geq RBW$
 $RBW = 2\text{MHz}$ (max setting).

Results: Equipment complies with § 15.247 (b)
Peak Output Power = 0.09 W (Conducted)
The peak output power was determined from the following plots:

VI. Peak Output Power Requirements

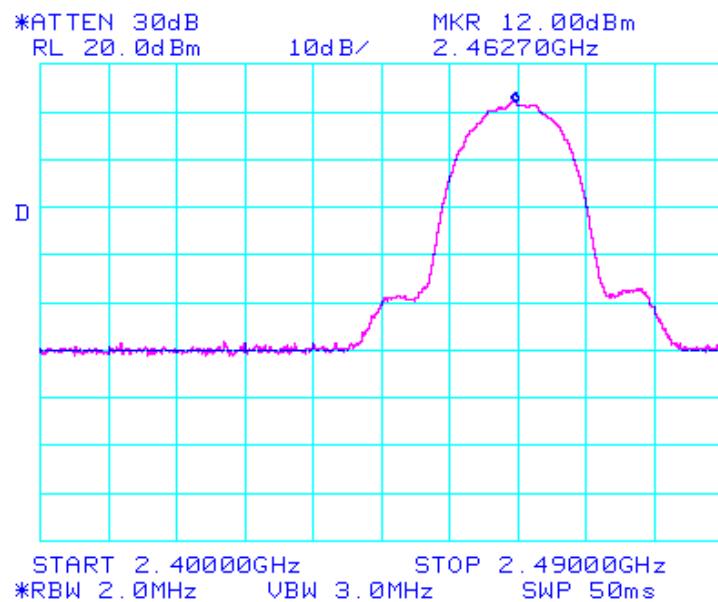

Test Engineer: Liming Xu

Test Date: August 26, 2003



VI. Peak Output Power Requirements

B. RF Exposure Requirements - §15.247(b)(5); §1.1307(b)(1)

Specification: Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

EUT meets the requirements of these sections as proven through SAR testing.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

VII. Spurious Emissions - Radiated and RF Conducted - Requirements



VII. Spurious Emissions - Radiated and RF Conducted - Requirements

Spurious Emissions - RF Conducted -

Requirements: FCC Part 15 Subpart C, §15.209(a); 15.247(c); for any emissions in restricted bands, as defined in Section 15.205

Test Equipment: Test equipment for this test is located in Section IX of this report

Test Configuration/

Procedure: The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a semi-anechoic chamber or OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHZ, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. For frequencies above 1 GHZ, peak measurements were made with a resolution bandwidth of 1 MHz and a video bandwidth of 1MHz and average measurements were made with RBW = 1MHz and VBW = 10 Hz.

For intentional radiators with a digital device portion which operates below 10 GHZ, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHZ, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For RF Conducted Emissions, the transmit output connected to the analyzer through the attenuator. RBW = 100kHz, VBW \geq RBW. (Scan through 10th harmonic)

Results:

Equipment complies with § 15.247 (C) - there are no detectable emissions up through the 10th harmonic of the carrier.




Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

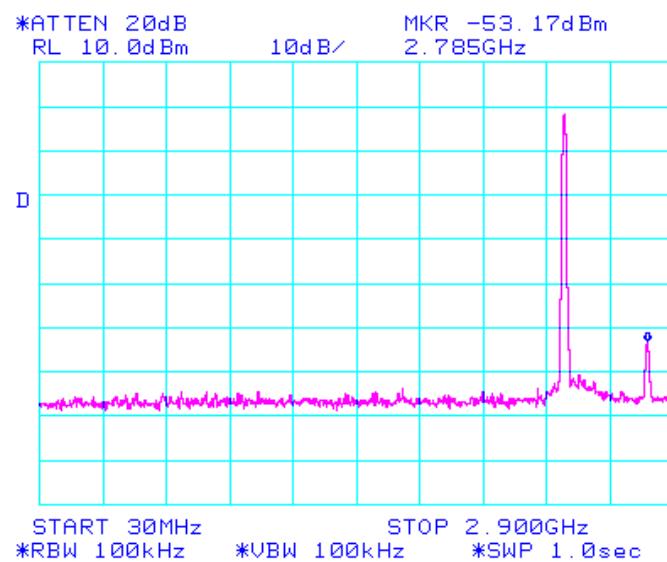





Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

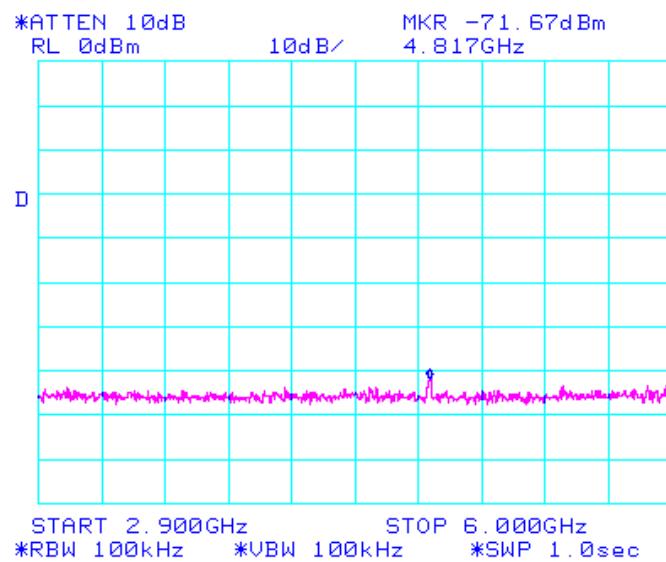

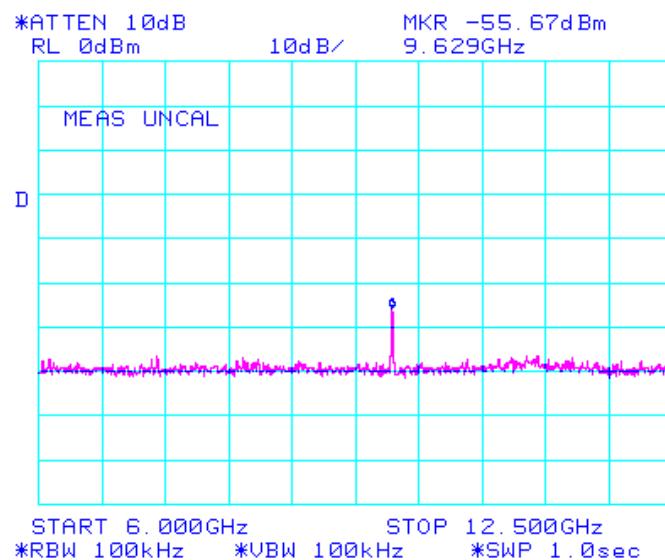




Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

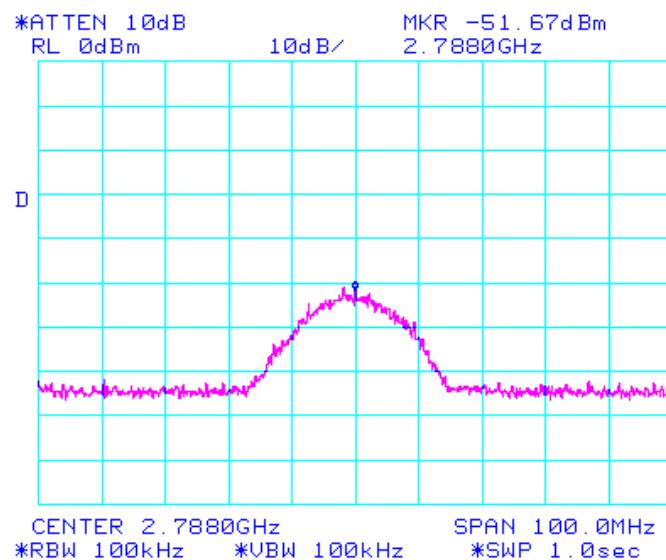




Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

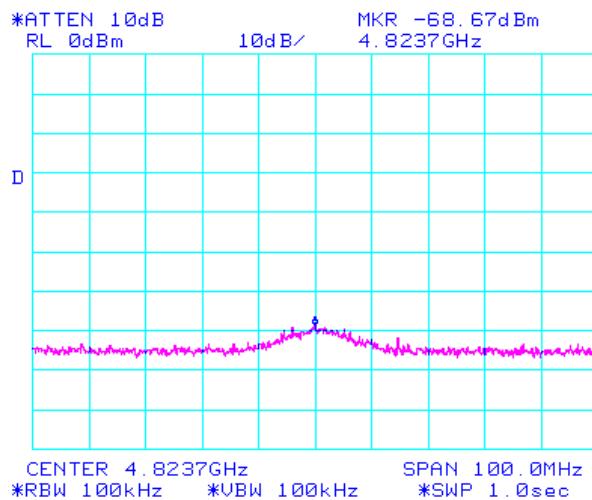




Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

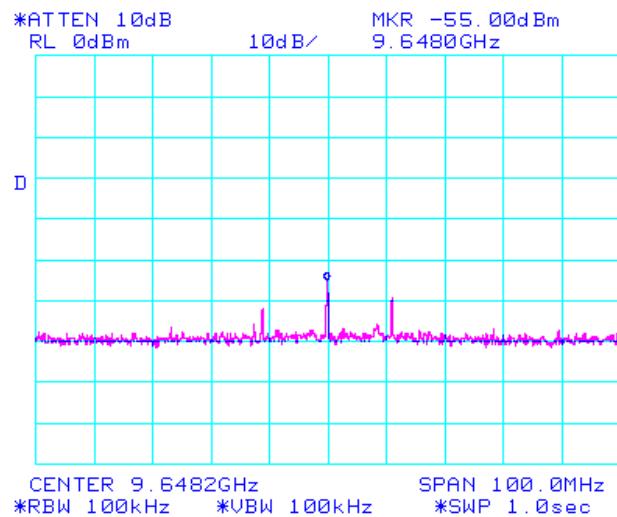

Test Engineer: Liming Xu

Test Date: August 26, 2003



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

VIII. Power Spectral Density Requirements



VIII. Power Spectral Density Requirements

Power Spectral Density - §15.247(d)

Requirements: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Equipment: Test equipment for this test is located in Section IX of this report

**Test Configuration/
Procedure:** The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, $VBW \geq RBW$. The 20 dB bandwidth was measured and recorded.

Results: Equipment complies with § 15.247 (d). See the following plots:




Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

VIII. Power Spectral Density Requirements

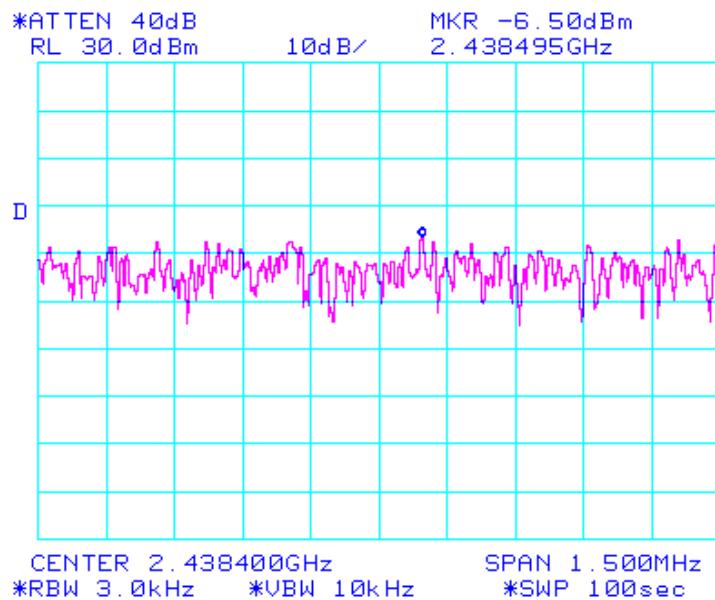



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

IX. Test Equipment



IX. Test Equipment

MET #	Equipment	Manufacturer	Model	Cal Date	Cal Due
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	08/21/2002	08/21/2003
1T4303	ANTENNA; BILOG	SCHAFNER - CHASE EMC	CBL6140A	4/9/03	4/9/04
1T4302	EMI Receiver	HP	8546A	09/17/2002	09/17/2003

Table 10. Test Equipment for Intentional Radiators - §15.247

Note: Functionally verified test equipment is verified at the time of testing.



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

X. Certification Label & User's Manual Information



A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.
 - (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
 - (i) Compliance testing;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c)



of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;

- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J
— Equipment Authorization Procedures:**

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, or the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted

¹In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.



by the applicant.

- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



B. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment



§ 15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help



Enfora Inc.

Wireless Portfolio WP802b

FCC ID: MIVWLN0101

September 20, 2003

END OF REPORT
