

**FCC Part 15 Subpart C Section 15.231
Radiated Emissions @ 3 Meters
Data Sheet**

Date : 11-Jul-02

Customer Fidelity Technologies

Order #: 160827 X

EUT : S37 Transmitter


Tech : Anthony A. Soffera *Anthony A. Soffera*

	Frequency (MHz)	Measured Level (dBuV)	Antenna Factor +(dB)	Cable Loss +(dB)	Preamp Gain -(dB)	Corrected Level (dBuV/m)	Spec Limit (dBuV/m)	Polarity (V/H)	Delta to Limit	Restricted Bands
1	434	68				68.00	80.83	V	-12.83	No
2	868	39				39.00	60.83	V	-21.83	No
3	1302	43.9	26.27	3	30.17	43.00	53.97	V	-10.97	Yes
4	1736	44.1	27.4	3.17	29.66	45.01	60.83	V	-15.82	No
5	2170	44.2	28.44	3.33	29	46.97	60.83	V	-13.86	No
6	2604	40.5	29.01	3.33	29.17	43.67	60.83	V	-17.16	No
7	3038	37.1	30.72	4.17	27.66	44.33	60.83	V	-16.50	No
8	3472	34.8	31.69	5.33	25.17	46.65	60.83	V	-14.18	No
9	3906	33.5	32.67	5.50	24.67	47.00	53.97	V	-6.97	Yes
10	4340	33.2	33.32	5.50	25.00	47.02	53.97	V	-6.95	Yes

Correction factors for frequencies 1 and 2 are on a separate data sheet

Duty Cycle Correction Factor : 0

Duty Cycle Correction Factor not applied

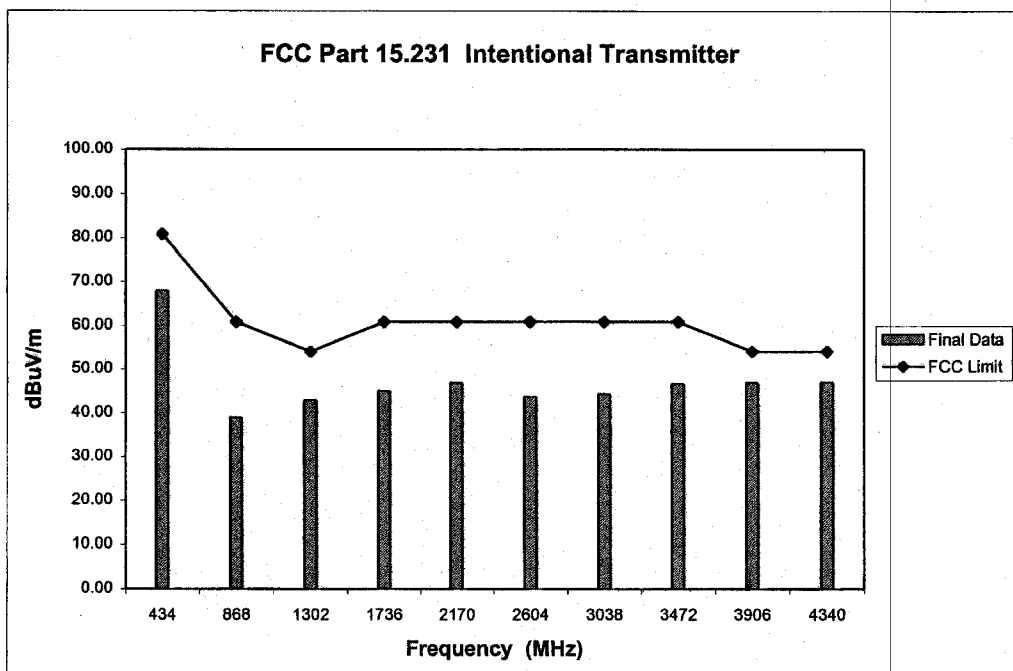

17 of 18