

# RF TEST REPORT

**Applicant**     TAKAYA Corporation

**FCC ID**        MK4IN-M-RST

**Product**        HYBRID Resetter

**Model**          IN-M-RST

**Report No.**     R2311A1307-R1V1

**Issue Date**     April 9, 2024

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

---

*Prepared by: Liu Wei*

*Approved by: Fan Guangchang*

**TA Technology (Shanghai) Co., Ltd.**

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

# TABLE OF CONTENT

|                                                     |    |
|-----------------------------------------------------|----|
| 1. Test Laboratory .....                            | 5  |
| 1.1. Notes of the Test Report.....                  | 5  |
| 1.2. Test facility .....                            | 5  |
| 1.3. Testing Location.....                          | 5  |
| 2. General Description of Equipment Under Test..... | 6  |
| 2.1. Applicant and Manufacturer Information .....   | 6  |
| 2.2. General Information .....                      | 6  |
| 3. Applied Standards .....                          | 7  |
| 4. Test Case Results .....                          | 8  |
| 4.1. Occupied Bandwidth .....                       | 8  |
| 4.2. Radiates Emission .....                        | 10 |
| 4.3. Conducted Emission .....                       | 16 |
| 5. Main Test Instruments.....                       | 18 |
| ANNEX A: The EUT Appearance.....                    | 19 |
| ANNEX B: Test Setup Photos .....                    | 20 |

| Version                                                                                                                                                                                                                         | Revision Description     | Issue Date    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------|
| Rev.0                                                                                                                                                                                                                           | Initial issue of report. | March 4, 2024 |
| Rev.1                                                                                                                                                                                                                           | Update information.      | April 9, 2024 |
| Note: This revised report (Report No.: R2311A1307-R1V1) supersedes and replaces the previously issued report (Report No.: R2311A1307-R1). Please discard or destroy the previously issued report and dispose of it accordingly. |                          |               |

## Summary of Measurement Results

| Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Test Case                      | Clause in FCC rules                               | Verdict |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------------------|---------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Occupied Bandwidth             | §2.1049<br>§15.215                                | PASS    |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Radiated Emissions Measurement | §15.201(a), §15.205(a),<br>§15.209(a), §15.215(a) | PASS    |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | AC Conducted Emissions         | §15.207(a)                                        | NA      |
| Date of Testing: December 13, 2023 ~ December 25, 2023                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                |                                                   |         |
| Date of Sample Received: December 4, 2023                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                |                                                   |         |
| <p>Note:</p> <p>NA = Not Applicable.</p> <p>PASS: The EUT complies with the essential requirements in the standard.</p> <p>FAIL: The EUT does not comply with the essential requirements in the standard.</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p> |                                |                                                   |         |

## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Fan Guangchang  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <https://www.eurofins.com/electrical-and-electronics>  
E-mail: Jack.Fan@cpt.eurofinscn.com

## 2. General Description of Equipment Under Test

### 2.1. Applicant and Manufacturer Information

|                      |                                                                       |
|----------------------|-----------------------------------------------------------------------|
| Applicant            | TAKAYA Corporation                                                    |
| Applicant address    | 661-1 Ibara-cho,Ibara-shi,Okayama, Japan                              |
| Manufacturer         | Hangzhou Century Co., Ltd.                                            |
| Manufacturer address | 528 Xingqi Road,Yuhang Economic Development Area, Hangzhou, P.R.China |

### 2.2. General Information

| EUT Description                                                                                                |                     |
|----------------------------------------------------------------------------------------------------------------|---------------------|
| Model                                                                                                          | IN-M-RST            |
| SN                                                                                                             | 23000296            |
| Hardware Version                                                                                               | 19044P01-PWB-V11    |
| Software Version                                                                                               | 19044S01-V14        |
| Power Supply                                                                                                   | Battery             |
| Antenna Type                                                                                                   | Internal Antenna    |
| Operating Frequency Range(s)                                                                                   | 114.3 kHz (Tx only) |
|                                                                                                                | 21.5 kHz (Rx only)  |
| State DC voltage                                                                                               | 3 V                 |
| Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. |                     |

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2023) Radio Frequency Devices**

**ANSI C63.10-2013**

## 4. Test Case Results

### 4.1. Occupied Bandwidth

#### Ambient Condition


| Temperature | Relative humidity | Pressure         |
|-------------|-------------------|------------------|
| 15°C ~ 35°C | 20% ~ 80%         | 86 kPa ~ 106 kPa |

#### Method of Measurement

The EUT was connected to the spectrum analyzer through space. RBW is set to 1 kHz; VBW is set to 3 kHz on spectrum analyzer.

Dector=Peak, Trace mode=max hold.

#### Test Setup

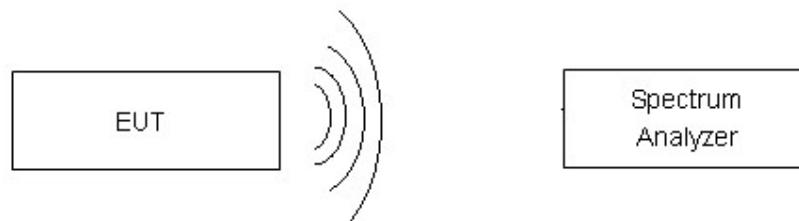


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

Test Results:

| Test frequency (kHz) | 99% bandwidth (kHz) | Conclusion |
|----------------------|---------------------|------------|
| 114.3                | 5.014               | PASS       |

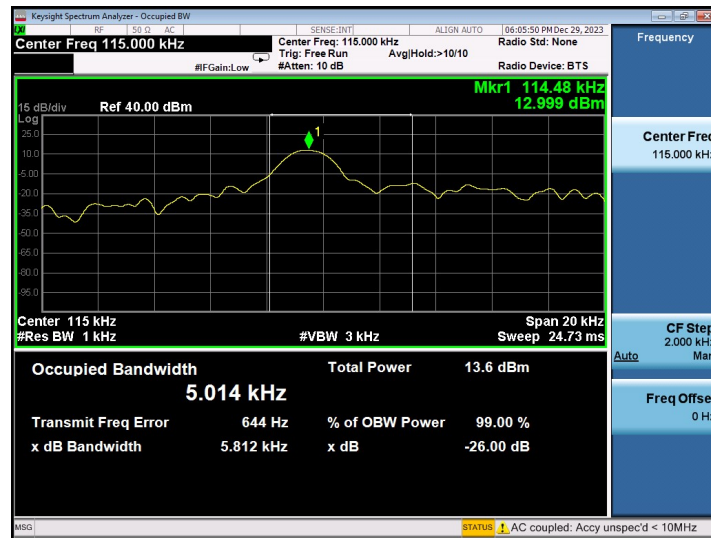

## 4.2. Radiates Emission

### Ambient Condition

| Temperature | Relative humidity | Pressure         |
|-------------|-------------------|------------------|
| 15°C ~ 35°C | 20% ~ 80%         | 86 kPa ~ 106 kPa |

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:


Below 30MHz

RBW=9 KHz, VBW=30 KHz,

detector; The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

### Test setup

#### 9kHz ~ 30MHz

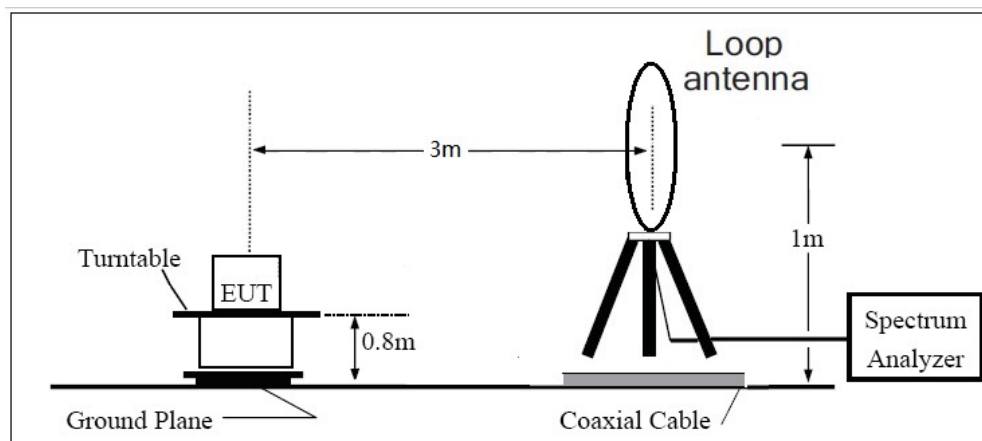

## Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength( $\mu\text{V/m}$ ) | Field strength(dB $\mu\text{V/m}$ ) |
|-----------------------------|-----------------------------------|-------------------------------------|
| 0.009–0.490                 | 2400/F(kHz)                       | /                                   |
| 0.490–1.705                 | 24000/F(kHz)                      | /                                   |
| 1.705–30.0                  | 30                                | /                                   |
| 30-88                       | 100                               | 40                                  |
| 88-216                      | 150                               | 43.5                                |
| 216-960                     | 200                               | 46                                  |
| Above960                    | 500                               | 54                                  |

## §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB $\mu\text{V/m}$

Average Limit=54 dB $\mu\text{V/m}$

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 - 0.110       | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15    |
| 0.495 - 0.505       | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46   |
| 2.1735 - 2.1905     | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75   |
| 4.125 - 4.128       | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5   |
| 4.17725 - 4.17775   | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2     |
| 4.20725 - 4.20775   | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5     |
| 6.215 - 6.218       | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7   |
| 6.26775 - 6.26825   | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4  |
| 6.31175 - 6.31225   | 123 - 138             | 2200 - 2300     | 14.47 - 14.5  |
| 8.291 - 8.294       | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2  |
| 8.362 - 8.366       | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4   |
| 8.37625 - 8.38675   | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12 |
| 8.41425 - 8.41475   | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0   |
| 12.29 - 12.293      | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8   |
| 12.51975 - 12.52025 | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5  |
| 12.57675 - 12.57725 | 322 - 335.4           | 3600 - 4400     | ( $\hat{c}$ ) |
| 13.36 - 13.41       |                       |                 |               |


## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


| Frequency  | Uncertainty |
|------------|-------------|
| 9KHz-30MHz | 3.55 dB     |

## Test Results:


The following graphs display the maximum values of horizontal and vertical by software.

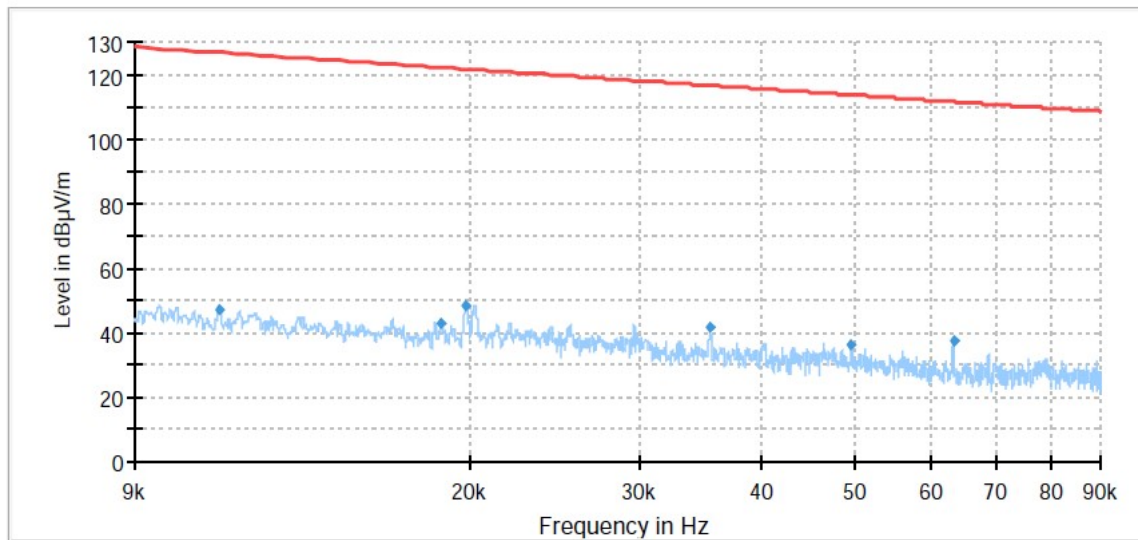


Radiates Emission from 9kHz to 90kHz

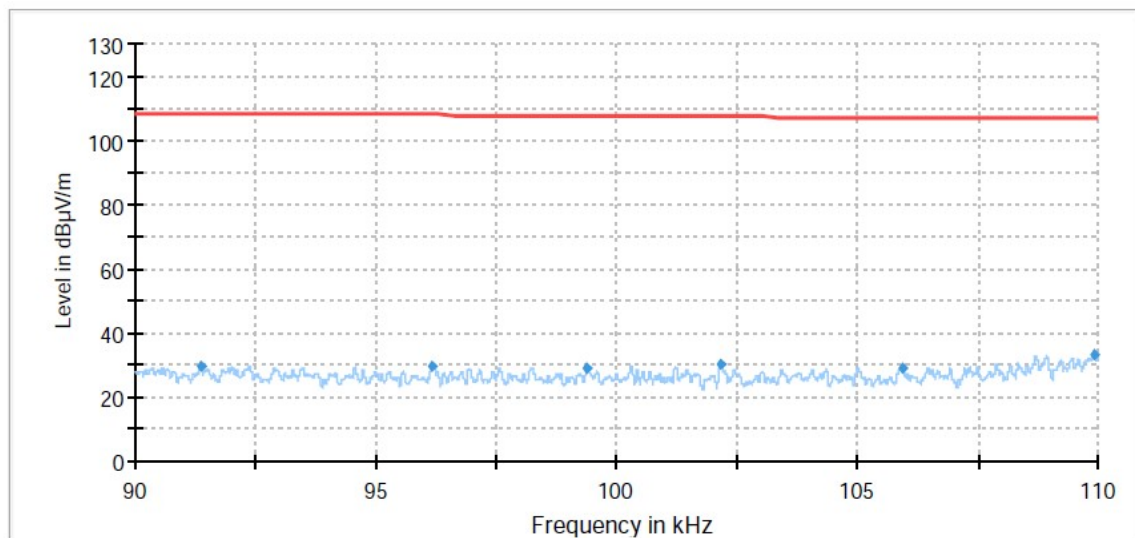


Radiates Emission from 90kHz to 110kHz

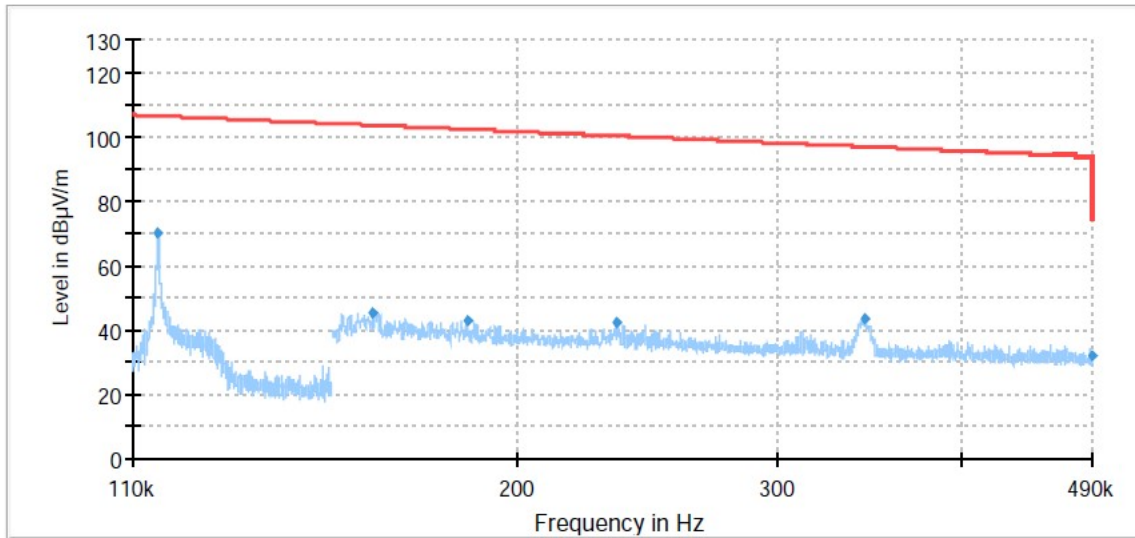

Radiates Emission from 110kHz to 490kHz

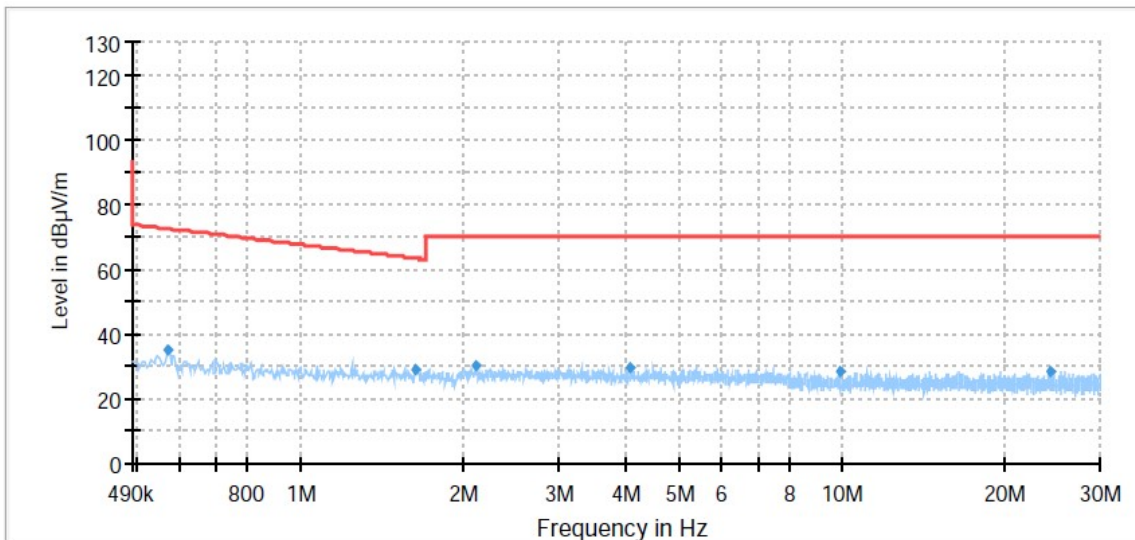

Radiates Emission from 490kHz to 30MHz

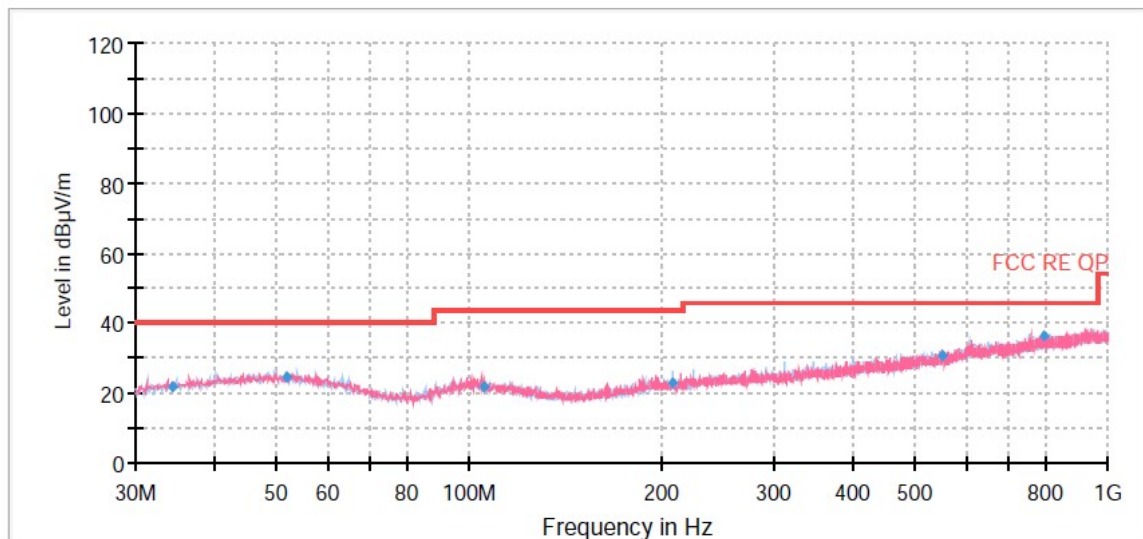

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) |
|-----------------|------------------|----------------|-------------|-------------|--------------|---------------|---------------------|
| 34.32           | 21.86            | 40.00          | 18.14       | 210.0       | V            | 44.00         | 18                  |
| 51.79           | 24.29            | 40.00          | 15.71       | 184.0       | H            | 348.00        | 20                  |
| 105.10          | 21.97            | 43.50          | 21.53       | 100.0       | H            | 180.00        | 19                  |
| 207.68          | 22.85            | 43.50          | 20.65       | 123.0       | H            | 98.00         | 18                  |
| 549.96          | 30.50            | 46.00          | 15.50       | 222.0       | V            | 108.00        | 27                  |
| 792.78          | 36.04            | 46.00          | 9.96        | 103.0       | V            | 324.00        | 30                  |

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**


**2. Margin = Limit –Average**

## Band Edge

A symbol ( $\text{dB}\mu\text{V}/$ ) in the test plot below means ( $\text{dB}\mu\text{V}/\text{m}$ )

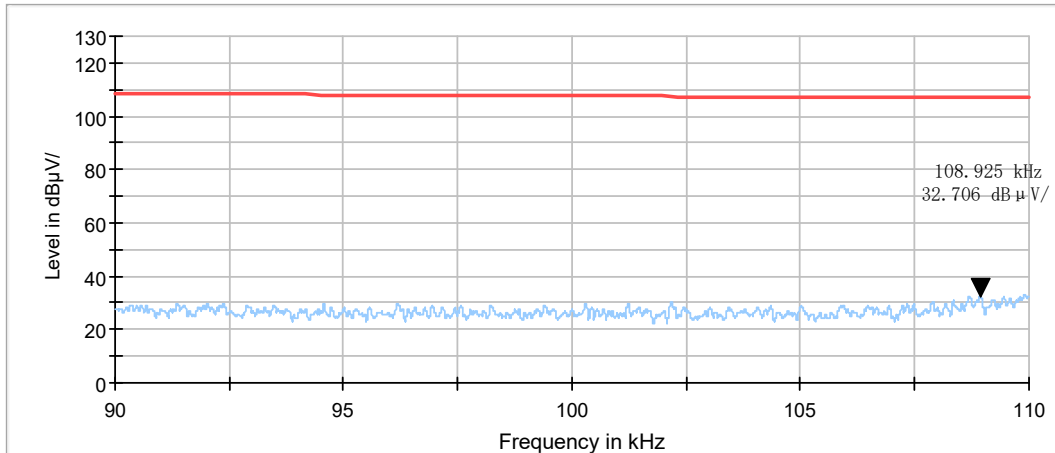

Band Edge from 9kHz to 90kHz

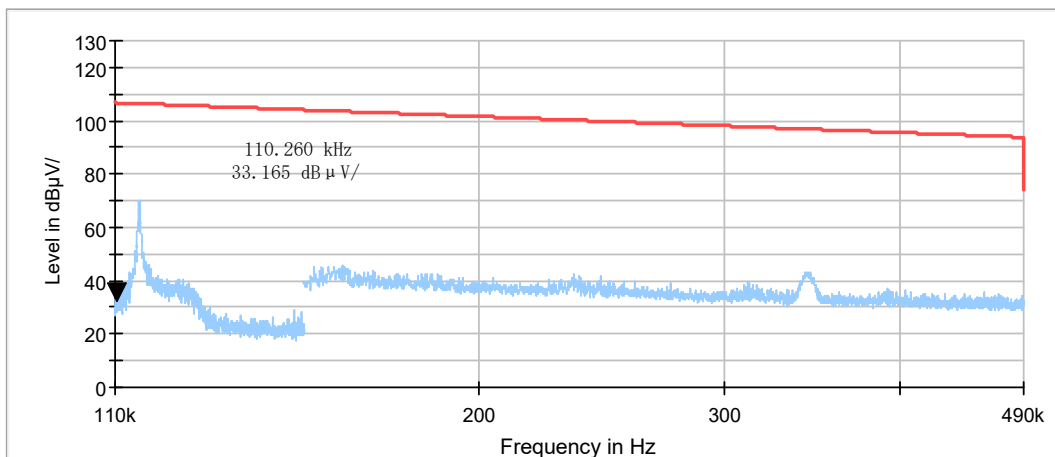

Band Edge from 110kHz to 160kHz

### 4.3. Conducted Emission

#### Ambient Condition

| Temperature | Relative humidity | Pressure         |
|-------------|-------------------|------------------|
| 15°C ~ 35°C | 20% ~ 80%         | 86 kPa ~ 106 kPa |


#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

#### Test Setup

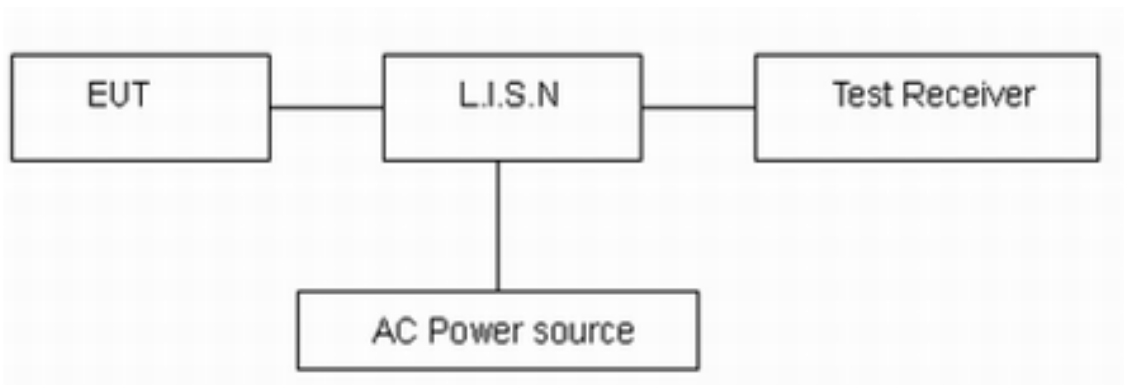

Note: AC Power source is used to change the voltage 110V/60Hz.

#### Limits

| Frequency<br>(MHz)                                | Conducted Limits(dB $\mu$ V) |           |
|---------------------------------------------------|------------------------------|-----------|
|                                                   | Quasi-peak                   | Average   |
| 0.15 - 0.5                                        | 66 to 56 *                   | 56 to 46* |
| 0.5 - 5                                           | 56                           | 46        |
| 5 - 30                                            | 60                           | 50        |
| *: Decreases with the logarithm of the frequency. |                              |           |

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**

The equipment doesn't connect to public network, therefore this requirement does not apply.

## 5. Main Test Instruments

| Name                     | Manufacturer | Type      | Serial Number | Calibration Date | Expiration Date |
|--------------------------|--------------|-----------|---------------|------------------|-----------------|
| EMI Test Receiver        | R&S          | ESCI3     | 100948        | 2023-05-12       | 2024-05-11      |
| Loop Antenna             | SCHWARZBECK  | FMZB1519  | 1519-047      | 2023-04-16       | 2026-04-15      |
| TRILOG Broadband Antenna | SCHWARZBECK  | VULB 9163 | 1023          | 2023-07-14       | 2026-07-13      |
| Software                 | R&S          | EMC32     | 9.26.01       | /                | /               |

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*