



World Standardization Certification & Testing CO.,LTD
World Standardization Safety and EMC Testing Centre

FCC ID TEST REPORT

for

TRAILER MONITORING SYSTEM

Trade Mark: N/A

Model: TRMS-ANT-10000

Test Report Number: WSCT10040112E

Issued Date: May 12, 2010

Issued for

Kenwo Industries Limited

Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Park Tin Par Street Tsuen Wan, Hong Kong

Issued by:

WORLD STANDARDIZATION CERTIFICATION & TESTING CO., LTD.

**1-2/F, DACHONG SCIENCE & TECHNOLOGY BUILDING NO.28 OF
TONGGU ROAD, NANSHAN DISTRICT, SHENZHEN. PRC**

TEL: +86-755-26996192

FAX: +86-755-26996253

***Note:** This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing CO., LTD. This document may be altered or revised by World Standardization Certification & Testing CO., LTD. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.*



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

Revision History of report

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	WSCT10040112E	Initial Issue	ALL	Kallen Wang



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	TEST RESULT SUMMARY	5
3	EUT DESCRIPTION.....	6
4	TEST METHODOLOGY.....	7
4.1	DECISION OF FINAL TEST MODE.....	7
4.2	EUT SYSTEM OPERATION	7
5	SETUP OF EQUIPMENT UNDER TEST.....	8
5.1	DESCRIPTION OF SUPPORT UNITS	8
5.2	CONFIGURATION OF SYSTEM UNDER TEST	8
6	FACILITIES AND ACCREDITATIONS	9
6.1	FACILITIES	9
6.2	ACCREDITATIONS.....	9
6.3	MEASUREMENT UNCERTAINTY.....	9
7	CONDUCTED EMISSION MEASUREMENT	10
7.4	TEST SETUP	11
7.5	TEST RESULTS.....	11
8	RADIATED EMISSION MEASUREMENT	14
8.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
8.2	TEST INSTRUMENTS	15
8.3	TEST PROCEDURES.....	15
8.4	TEST SETUP	16
8.5	TEST RESULTS.....	17
9	20DB OCCUPIED BANDWIDTH MEASUREMENT.....	18
10	DWELL TIME MEASUREMENT	20
11	ANTENNA REQUIREMENT	24



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

1 TEST RESULT CERTIFICATION

Product: TRAILER MONITORING SYSTEM

Model: TRMS-ANT-10000

Trade Mark: N/A

Applicant: Kenwo Industries Limited

Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Park Tin Par Street Tsuen Wan, Hong Kong

Factory Kenwo Manufacturing Factory

Linwu Industrial Area, Junzibu, Guanlan, Baoan, Shenzhen, China

Tested Date: April 18~ April 20,2010

Test Voltage: DC 12V(Adapter input AC 120V/60Hz)

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC PART 15C	No non-compliance noted
ANSI C63.4: 2003	No non-compliance noted

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard
None

The above equipment has been tested by World Standardization Certification & Testing Co., Ltd and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Davis Zhou
(Davis Zhou)

Date: 2010-05-12

Check By: Kelly Wu
(Kelly Wu)

Date: 2010-05-12

Approved By: Kallen Wang
(Kallen Wang)

Date: 2010-05-12



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

2 TEST RESULT SUMMARY

Test Item	Test Result
Conduct Emission	Pass
Radiation Emission	Pass
Bandwidth Test	Pass
Dwell time Test	Pass

- Note:** 1. The test result judgment is decided by the limit of test standard
2. The information of measurement uncertainty is available upon the customer's request.
3. N/A means to no applicable.



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

3 EUT DESCRIPTION

Product	TRAILER MONITORING SYSTEM
Brand Name	N/A
Model	TRMS-ANT-10000
Applicant	Kenwo Industries Limited
EUT Type	Prototype Sample.
Serial Number	N/A
Antenna Type	Intergral antenna
EUT Power Rating	DC 12V(Adapter input AC 120V/60Hz)
Temperature Range(Operating)	15-35℃
Operating Frequency	433.92MHz
Number of Channels	1
Channel Separation	N/A
Modulation type	FSK
Transmitter time	Manual transmission: data transmission, it will cease after 99ms. Periodic transmission: once every 6 minute, each transmission time is around 99ms

N/A mean to no applicable

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
N/A	N/A	N/A

Models difference

N/A

4 TEST METHODOLOGY

4.1 DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and configuration, which produced the worst emission levels, was selected and recorded in this report.

the following test mode was recorder in this report.

Test Item	Test mode
Conduct Emission	Normal operation
Radiation Emission	Continously TX mode
Bandwidth Test	Normal operation
Dwell time Test	Normal operation

4.2 EUT SYSTEM OPERATION

1. Set up EUT with the relative support equipments.
2. Make sure the EUT worked normally during the test.

5 SETUP OF EQUIPMENT UNDER TEST

5.1 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	N/A						

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2 CONFIGURATION OF SYSTEM UNDER TEST

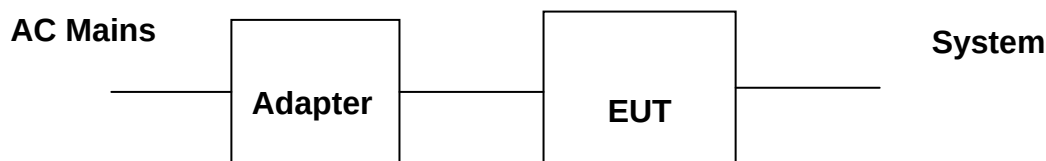

(EUT:TRAILER MONITORING SYSTEM)

6 FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1-2/F, DaChong Science&Technology Building, No.28 of Tonggu Road,Nanshan District, ShenZhen.PRC

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 15. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC (The certificate registration number is 276008)
	TIMCO (The certificate registration number is Q2001)
Japan	VCCI (The certificate registration number is C-2912, R-2662)
Canada	INDUSTRY CANADA (The certificated registration number is 46405-7700)
Germany	TUV (The certificate registration number is UA50138086-0001,UA50138086-0002)
	EMCC (The certificated registration number is 080380)
China	CNAS (The certificated registration number is L3732)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.wsct.org.cn>

6.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	450kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report reference No.:WSCT10040112E

Issued:May 12, 2010

Revised:None

7 CONDUCTED EMISSION MEASUREMENT

7.1 LIMITS

FREQUENCY (MHz)	LIMIT(dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system, shall not exceed the level of field strengths specified above.

7.2 TEST INSTRUMENTS

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100005	06/24/2010
LISN	AFJ	LS16	16010222119	09/29/2010
LISN(EUT)	Mestec	AN3016	04/10040	09/28/2010

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.

7.3 TEST PROCEDURES


The EUT was put on a wooden table which was 0.8metre high above the ground and connected to the AC mains through a Artificial Mains Network (A.M.N). The mains lead in excess of 1 m separating the EUT from the AMN was folded back and forth parallel to the lead so as to form a bundle with a length of 0.3m to 0.4m. The EUT was kept 0.4m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during conducted emission test.

The bandwidth of the test receiver (ESCI) was set at 9KHz.

The frequency range from 150 KHz to 30 MHz was investigated.

The test data of the worst-case condition(s) was recorded.

7.4 TEST SETUP

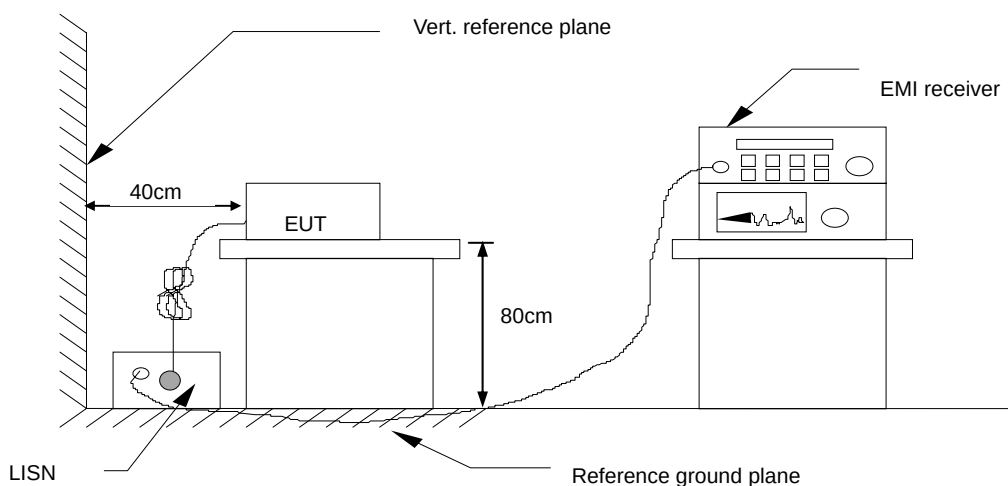

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. TEST RESULTS

Model No.	TRMS-ANT-10000	6dB Bandwidth	10 KHz
Environmental Conditions	26°C, 60% RH	Test Mode	Normal operation
Detector Function	Peak / Quasi-peak/AV	Test Result	Pass
Test By	Davis Zhou		

NOTE: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level(dBuV) = Receiver reading

Corr. Factor (dB) = Attenuator Factor+ Cable loss

Level (dBuV) = Reading level(dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Q.P.=Quasi-Peak


Conducted Emission Measurement

File :Kenwo
 80.0 dBuV

Data :#2

Date: 2010/05/06

Time: 14:52:13

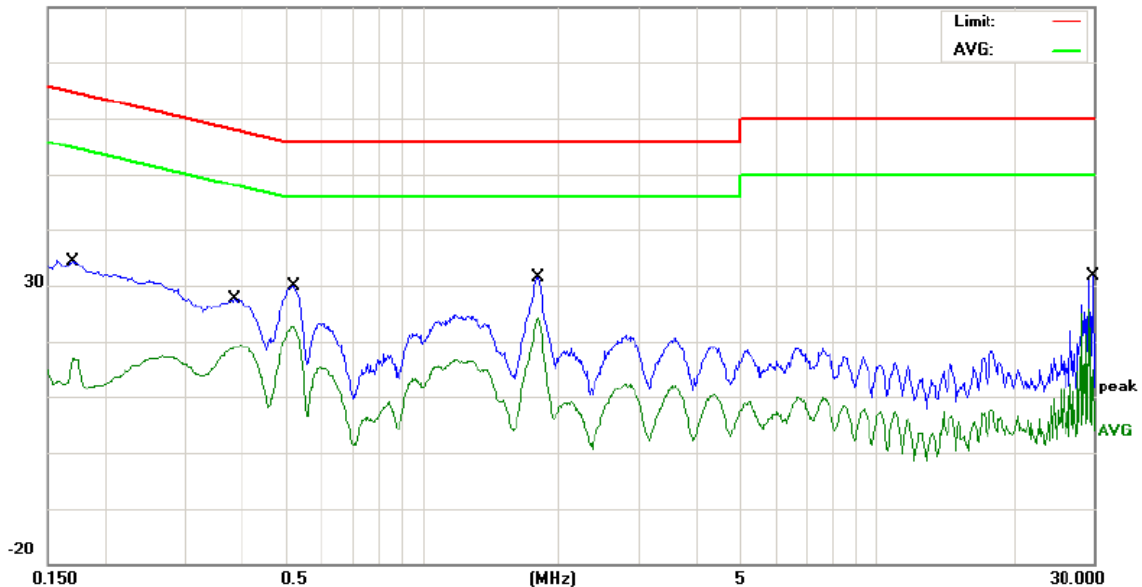

Site 843 Shielded Room

Phase: L1

Temperature: 26

Limit: FCC Part 15 C Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: TRAILER MONITORING SYSTEM

M/N: TRMS-ANT-10000

Mode: Normal operation

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1700	16.37	10.47	26.84	64.96	-38.12	QP	
2		0.1700	6.39	10.47	16.86	54.96	-38.10	AVG	
3		0.3860	11.44	10.72	22.16	58.15	-35.99	QP	
4		0.3860	8.22	10.72	18.94	48.15	-29.21	AVG	
5		0.5220	15.06	10.54	25.60	56.00	-30.40	QP	
6		0.5220	15.05	10.54	25.59	56.00	-30.41	QP	
7		0.5220	11.93	10.54	22.47	46.00	-23.53	AVG	
8		0.5220	11.94	10.54	22.48	46.00	-23.52	AVG	
9		1.8020	16.83	10.27	27.10	56.00	-28.90	QP	
10	*	1.8020	13.83	10.27	24.10	46.00	-21.90	AVG	
11		29.9580	16.97	10.65	27.62	60.00	-32.38	QP	
12		29.9580	6.21	10.65	16.86	50.00	-33.14	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None


Conducted Emission Measurement

File :Kenwo
80.0 dBuV

Data :#1

Date: 2010/05/06

Time: 14:43:21

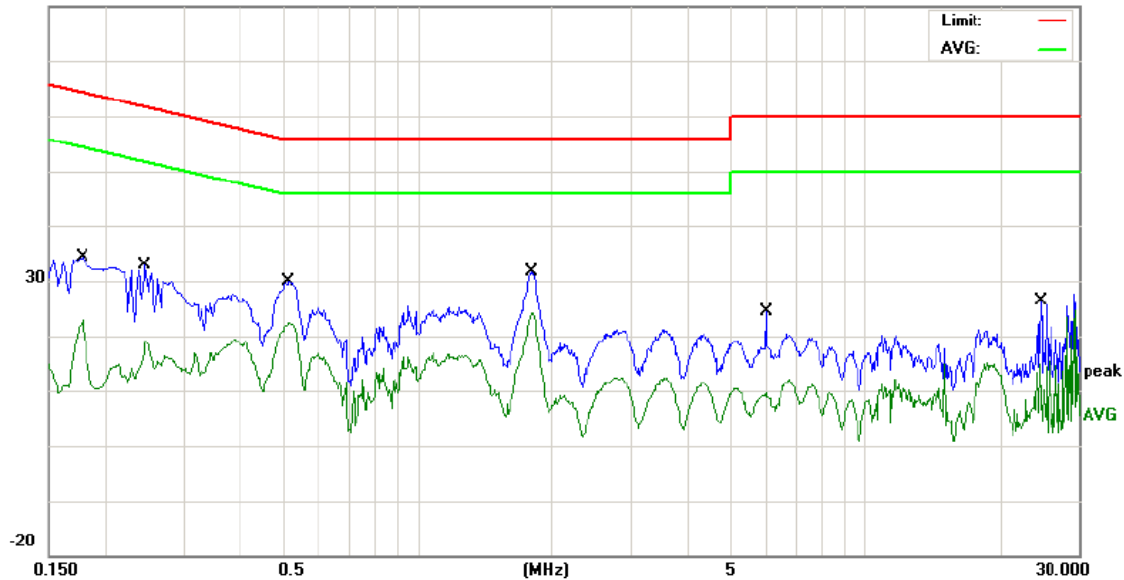

Site 843 Shielded Room

Phase: **N**

Temperature: 26

Limit: FCC Part 15 C Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: TRAILER MONITORING SYSTEM

M/N: TRMS-ANT-10000

Mode: Normal operation

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1780	17.62	10.54	28.16	64.57	-36.41	QP	
2		0.1780	-0.88	10.54	9.66	54.57	-44.91	AVG	
3		0.2460	13.27	10.79	24.06	61.89	-37.83	QP	
4		0.2460	2.53	10.79	13.32	51.89	-38.57	AVG	
5		0.5180	15.05	10.54	25.59	56.00	-30.41	QP	
6		0.5180	11.72	10.54	22.26	46.00	-23.74	AVG	
7		1.7980	17.30	10.27	27.57	56.00	-28.43	QP	
8	*	1.7980	14.17	10.27	24.44	46.00	-21.56	AVG	
9		5.9940	2.56	10.22	12.78	60.00	-47.22	QP	
10		5.9940	-1.54	10.22	8.68	50.00	-41.32	AVG	
11		24.7780	-2.09	10.26	8.17	60.00	-51.83	QP	
12		24.7780	-7.52	10.26	2.74	50.00	-47.26	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

8 RADIATED EMISSION MEASUREMENT

8.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FCC Part 15 C (Section:15.205; Section:15.209; Section:15.231(e))

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency(MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 - 40.70	1000	60	100	50
70 -130	500	53.98	50	43.98
130 - 174	500 to1500**	53.98 to 63.52	50 to150**	43.98 to 53.52
174 - 260	1500	63.52	150	53.52
260 - 470	1500 to 5000**	63.52 to 73.98	150 to 500**	53.52 to 63.98
Above 470	5000	73.98	500	63.98

Note: (1) Where F is the frequency in MHz,the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz,uV/m at 3 meters = $22.72727(F) - 2454.545$; for the band 260-470MHz,uV/m at 3 meters = $16.6667(F) - 2833.3333$.The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

(2) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges. Emissions radiated outside of the specified bands,shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength uV/meter	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz,the field strength limits are based on average detector, however,the peak field strength of any emission shall not exceed the maximum permitted average limits,specified above by more than 20dB under any condition fo modulation.

8.2 TEST INSTRUMENTS

Radiated Emission Test Site 966				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/24/2010
Spectrum Analyser	ROHDE&SCHWARZ	FSU	100114	04/14/2011
Preamplifier	H.P.	HP8447E	2945A02715	06/24/2010
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/24/2010
Preamplifier	Compliance Direction	PAM0118	1360976	06/15/2010
Horn Antenna	Compliance Engineer	CE18000	001	06/10/2010
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	06/09/2010
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).
2. N.C.R = No Calibration Request.

8.3 TEST PROCEDURES


The EUT was placed on a turn table which was 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. At the frequency of 30 MHz~1000MHz ,the measuring antenna moved up and down to find out the maximum emission level. It moved from 1 to 4 m for horizontal and vertical polarizations. The broadband antenna was used as a receiving antenna. At the frequency of 1 GHz -5GHz ,the measuring antenna stands 1 m for horizontal and vertical polarizations. The horn antenna was used as a receiving antenna. The bandwidth setting on the test receiver was 120 KHz(30 MHz~1000MHz). The bandwidth setting on the test receiver was 1MHz(1 GHz~5GHz). The test data of the worst-case condition(s) was recorded.

8.4 TEST SETUP

Below 1G

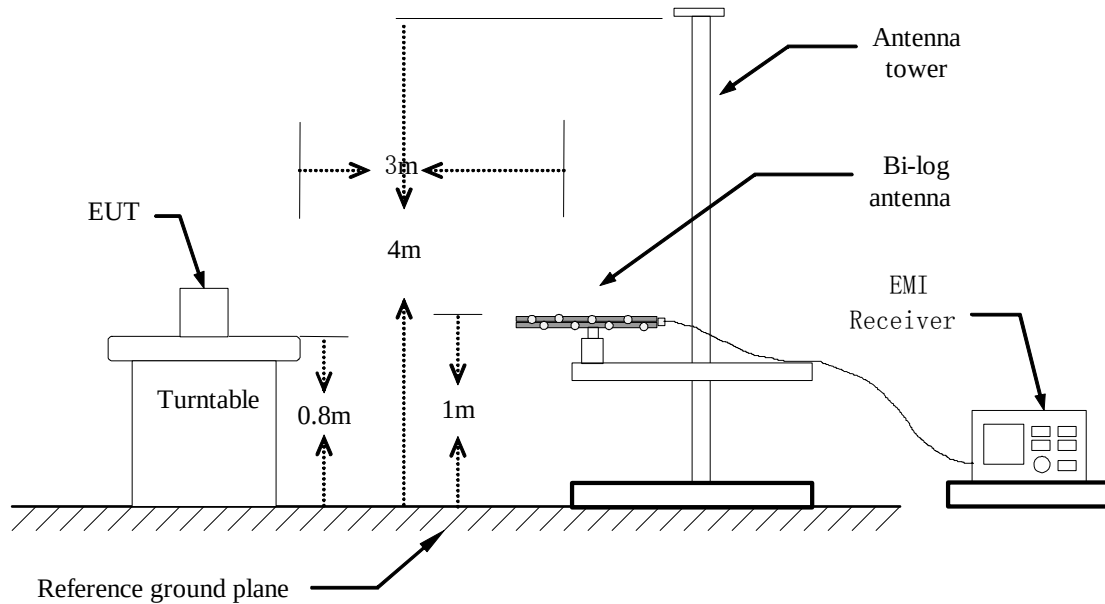

Above 1GHz

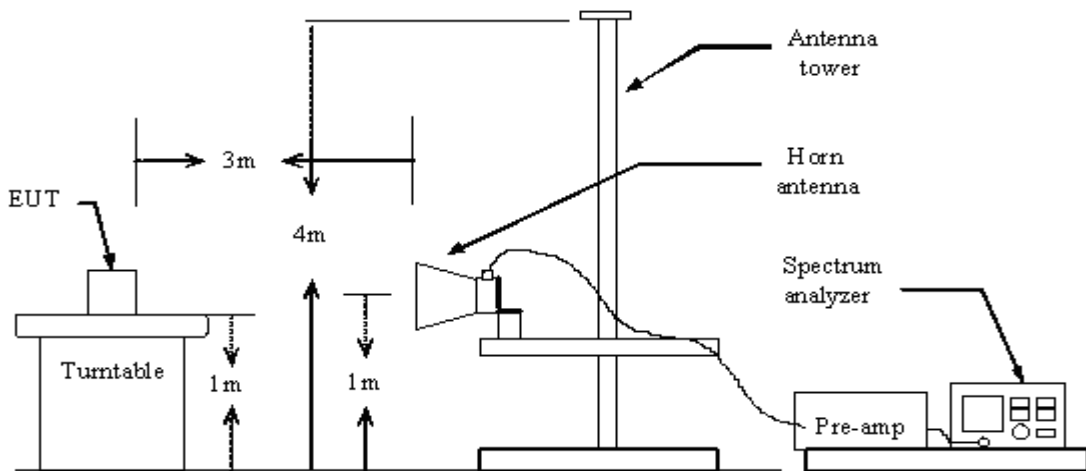



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

8.5 TEST RESULTS

Model No.	TRMS-ANT-10000	Test Mode	Continuously TX mode
Environmental Conditions	25°C, 55% RH	Test Result	Pass

Frequency (MHz)	Ant. Pol.	Corr.Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin	Note	Result
433.92	H	-1.80	71.58	92.87	-21.29	Peak	Pass
433.92	H	--	--	72.87	--	AV	Pass
867.84	H	1.25	35.69	72.87	-37.18	Peak	Pass
867.84	H	--	--	52.87	--	AV	Pass
1301.76	H	27.30	50.11	74.00	-23.89	Peak	Pass
1301.76	H	--	--	54.00	--	AV	Pass
45.00	H	-5.85	36.50	40.00	-3.50	QP	Pass
123.15	H	-4.64	36.80	43.50	-7.70	QP	Pass
1238.00	H	26.51	50.13	74.00	-23.87	Peak	Pass
1238.00	H	--	--	54.00	--	AV	Pass
433.92	V	-1.81	43.15	92.87	-49.72	Peak	Pass
433.92	V	--	--	72.87	--	AV	Pass
867.84	V	5.58	33.89	72.87	-38.98	Peak	Pass
867.84	V	--	--	52.87	--	AV	Pass
1301.76	V	1.47	33.97	74.00	-40.03	Peak	Pass
1301.76	V	--	--	54.00	--	AV	Pass
45.00	V	-6.07	25.60	40.00	-14.40	QP	Pass
267.65	V	-2.45	28.12	46.00	-17.88	QP	Pass
1754.00	V	27.22	35.60	74.00	-38.40	Peak	Pass
1754.00	V	27.22	--	54.00	--	AV	Pass

Note: 1. Level = Antenna Factor + Cable Loss + Meter Reading-Preamp factor
2. AV level =PK level-|20logdutycycle|
3. 20logdutycycle=20log98.4ms/100ms= -0.14
4. -- means to the measure is no necessary,due to the PK value comply with AV limits.

9 20dB OCCUPIED BANDWIDTH MEASUREMENT

9.1 LIMITS OF BAND

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz.

9.2 TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/24/2010
Pre Amplifier	H.P.	HP8447E	2945A02715	06/24/2010
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/24/2010

9.3 TEST PROCEDURE


The EUT was placed on a turn table was 0.8meter above ground.

The signal was coupled to the specturm analyzer through an antenna.

Set SPA RBW:10KHz,VBW:30 KHz sweep time :auto

Set SPA trace max hold,then view.

9.4 TEST SETUP

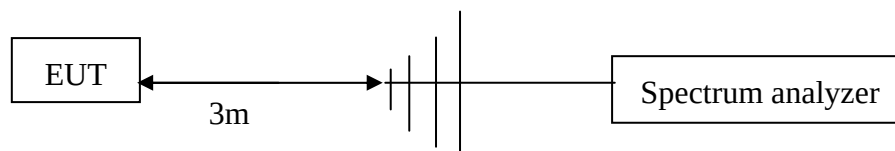


9.5 TEST RESULT

Frequency (MHz)	20dB bandwidth (KHz)	Maximum Limit (KHz)	Result
433.92	78	1084.8	Pass

Details please see the following test plots.



1. FM
 VIEW

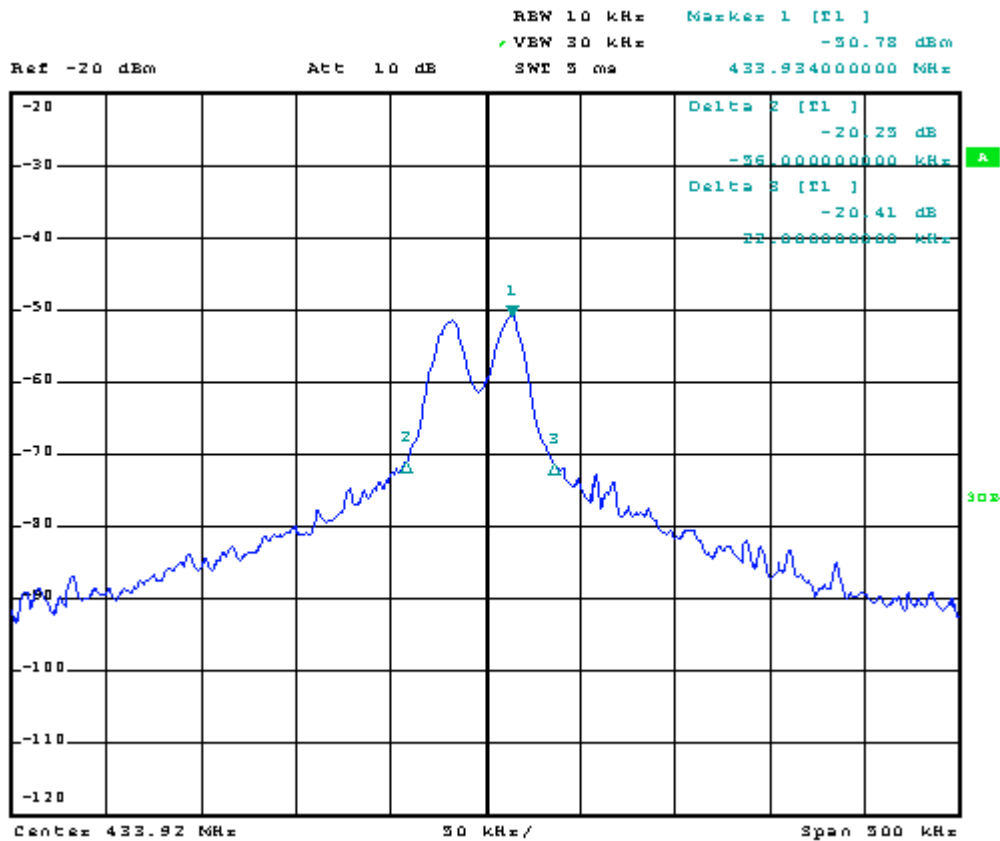

10 DWELL TIME MEASUREMENT

10.1 LIMIT OF DWELL TIME

FCC Part 15 C Section:15.231(e)

Each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in nso case less than 10 seconds.

10.2 TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/24/2010
Pre Amplifier	H.P.	HP8447E	2945A02715	06/24/2010
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/24/2010

10.3 TEST PROCEDURE


The EUT was placed on a turn table was 0.8meter above ground.

The signal was coupled to the specturm analyzer through an antenna.

Set SPA RBW:10 KHz/100KHz,VBW:10 KHz/30KHz, Span:0Hz

Set SPA trace max hold,then view.

10.4 TEST SETUP

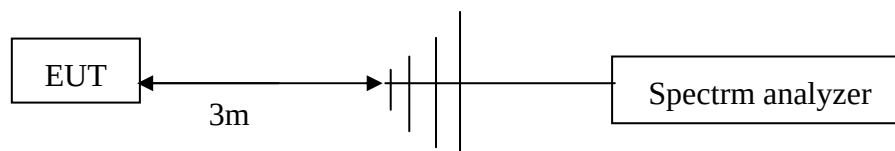

10.5 TEST RESULT

Ton/Toff (s)	Ton/Toff limits(s)	Result
0.099	Ton<1	Pass
See Note	Toff >30Ton	Pass

Note: Manual transmission: data transmission, it will cease after 99ms.

Periodic transmission: once every 6 minute, each transmission time is around 99ms

Details please see the following test plots



TRF No.:FCC PART 15C-15.231/A0

Page 20 of 24



FCC ID: MKFARI59

This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing CO., LTD.



Active transmission:

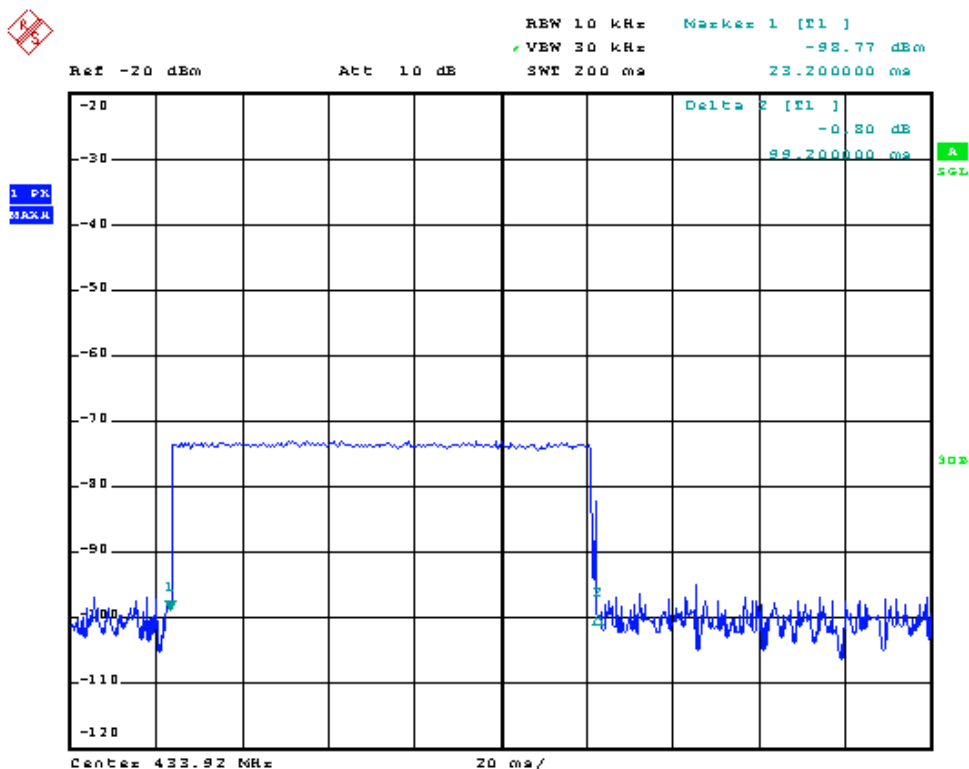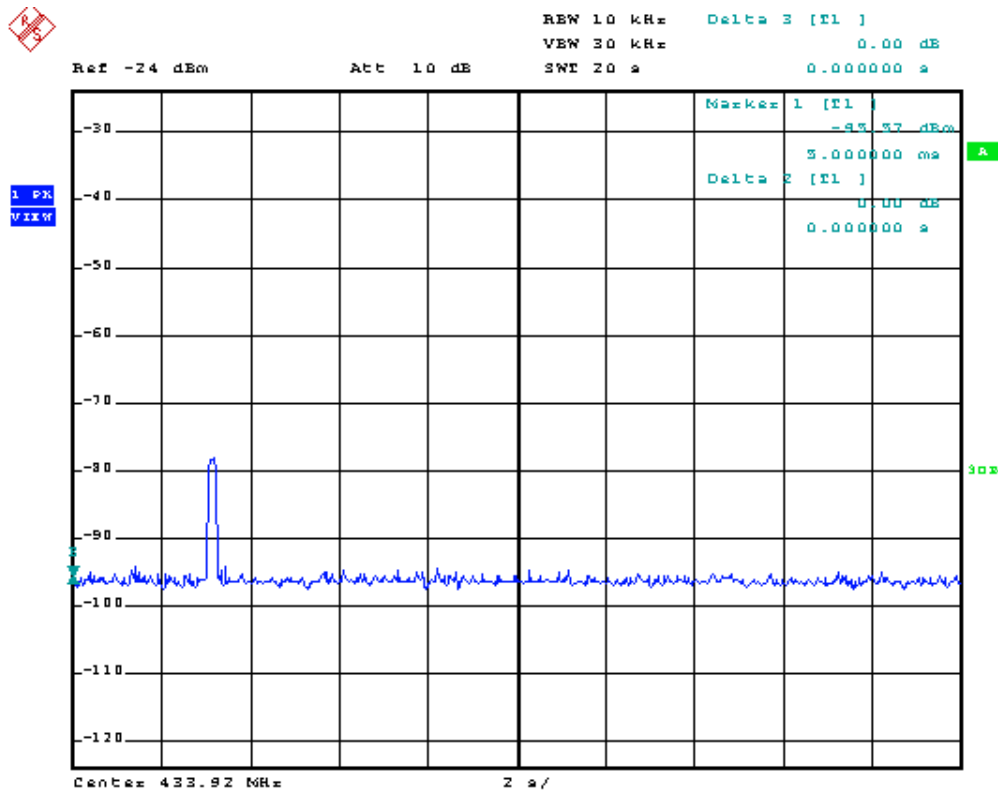

Periodic Transmission:

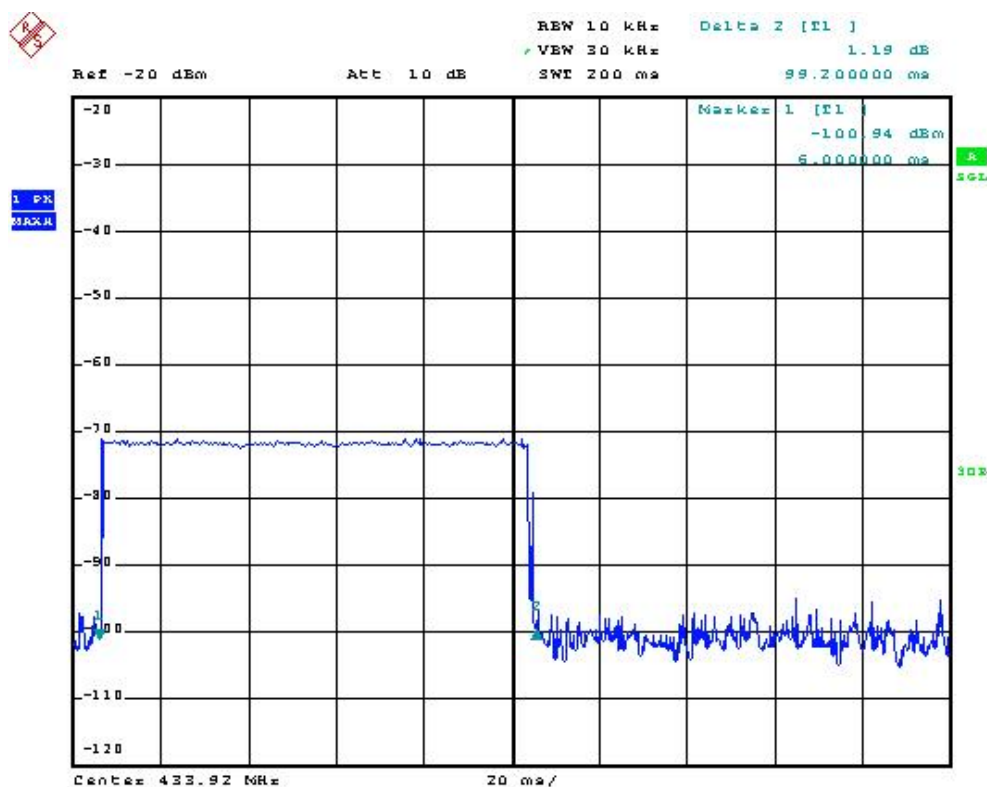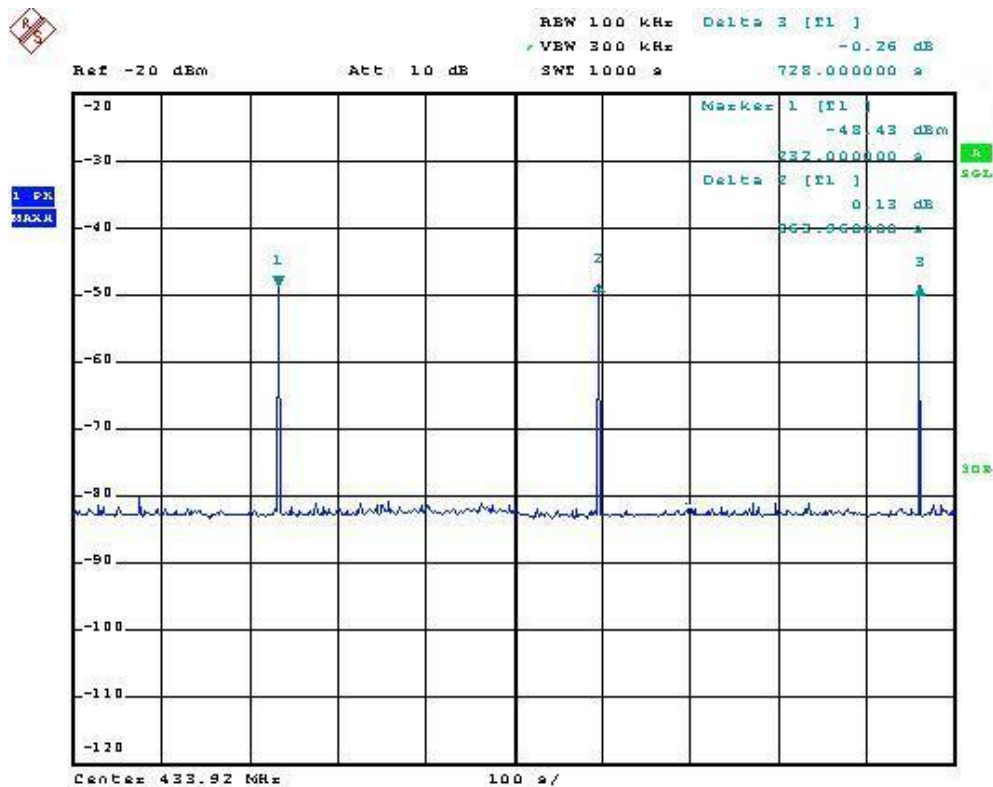

Active transmission/ Periodic Transmission:

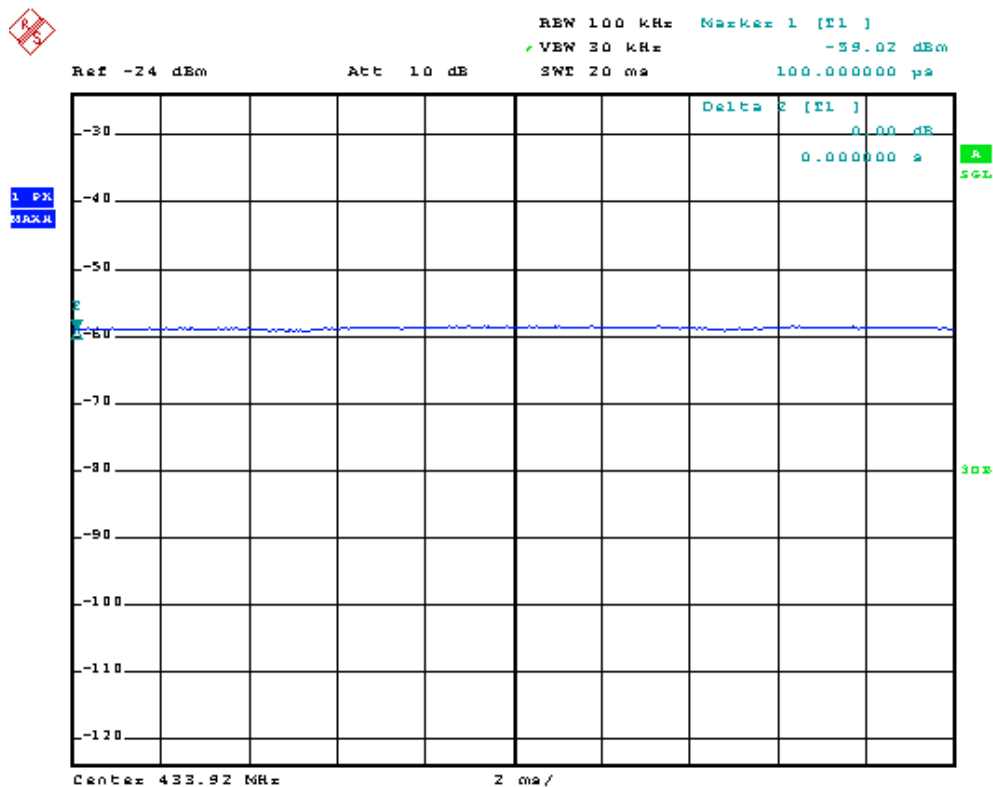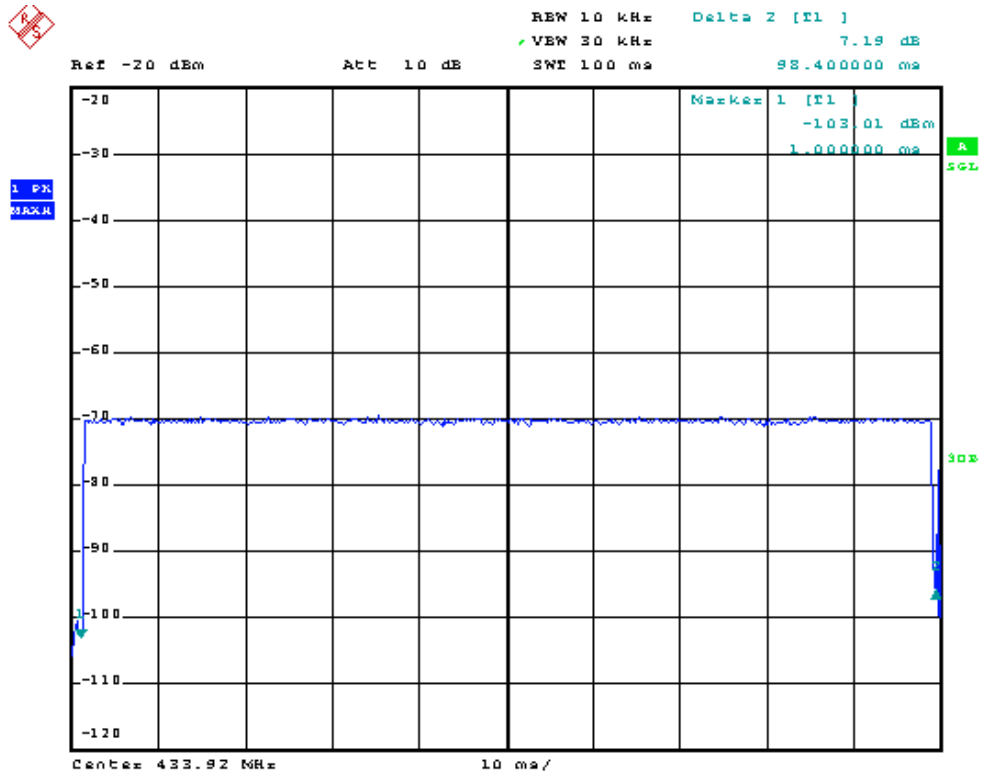



Report reference No.:WSCT10040112E
Issued:May 12, 2010
Revised:None

11. Antenna requirement

11.1. Standard applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2. Antenna connected construction

The antenna used in this product is integrated antenna and no consideration of replacement.