



World Standardization Certification & Testing CO., LTD
World Standardization Safety and EMC Testing Centre

FCC ID TEST REPORT

for

TRAILER MONITORING SYSTEM

Trade Mark: N/A

Model: TRMS-200-11002

Test Report Number: WSCT10040110E

Issued Date: May 06, 2010

Issued for

Kenwo Industries Limited

Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Park Tin Par Street Tsuen Wan, Hong Kong

Issued by:

WORLD STANDARDIZATION CERTIFICATION & TESTING CO., LTD.

1-2/F, DACHONG SCIENCE & TECHNOLOGY BUILDING NO.28 OF
TONGGU ROAD, NANSHAN DISTRICT, SHENZHEN, PRC

TEL: +86-755-26996192

FAX: +86-755-26996253

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing CO., LTD. This document may be altered or revised by World Standardization Certification & Testing CO., LTD. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

Revision History of report

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	WSCT10040110E	Initial Issue	ALL	Kallen Wang



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	4
2 TEST RESULT SUMMARY	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY.....	7
4.1 DECISION OF FINAL TEST MODE	7
4.2 EUT SYSTEM OPERATION	7
5 SETUP OF EQUIPMENT UNDER TEST.....	8
5.1 DESCRIPTION OF SUPPORT UNITS	8
5.2 CONFIGURATION OF SYSTEM UNDER TEST	8
6 ACILITIES AND ACCREDITATIONS.....	9
6.1 FACILITIES	9
6.2 ACCREDITATIONS	9
6.3 MEASUREMENT UNCERTAINTY	9
7 CONDUCTED EMISSION MEASUREMENT	10
7.4 TEST SETUP	11
7.5. TEST RESULTS.....	11
8 RADIATED EMISSION MEASUREMENT	12
8.1. LIMITS OF RADIATED EMISSION MEASUREMENT	12
8.2. TEST INSTRUMENTS	12
8.3.TEST PROCEDURES	13
8.4. TEST SETUP	14
8.5.TEST RESULTS.....	15
9 ANTENNA-CONDUCTED POWER MEASUREMENT	16
9.1. LIMITS OF ANTENNA-CONDUCTED POWER MEASUREMENT	16
9.2. TEST INSTRUMENTS	16
9.4. TEST SETUP	17
9.5.TEST RESULTS.....	18



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

1 TEST RESULT CERTIFICATION

Product: TRAILER MONITORING SYSTEM

Model: TRMS-200-11002

Trade Mark: N/A

Applicant: Kenwo Industries Limited

Unit 1-2, 7/F, Block A, Hi-Tech Ind Ctr 5 Park Tin Par Street Tsuen Wan, Hong Kong

Factory Kenwo Manufacturing Factory

Linwu Industrial Area, Junziblu, Guanlan, Baoan, Shenzhen, China

Tested Date: April 18~ May 05,2010

Test Voltage: DC 12V

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC PART 15B	No non-compliance noted
ANSI C63.4: 2003	No non-compliance noted

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard

None

The above equipment has been tested by World Standardization Certification & Testing Co., Ltd and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Davis Zhou

Date: 2010-05-06

(Davis Zhou)

Check By: Kelly Wu

Date: 2010-05-06

(Kelly Wu)

Approved By: Kallen Wang

Date: 2010-05-06

(Kallen Wang)



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

2 TEST RESULT SUMMARY

Test Item	Test Result
Conduct Emission	N/A
Radiation Emission	Pass
Antenna-conducted power Measurement	Pass

- Note:** 1. The test result judgment is decided by the limit of test standard
2. The information of measurement uncertainty is available upon the customer's request.
3. N/A means to no applicable.



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

3 EUT DESCRIPTION

Product	TRAILER MONITORING SYSTEM
Brand Name	N/A
Model	TRMS-200-11002
Applicant	Kenwo Industries Limited
EUT Type	Prototype production.
Serial Number	N/A
Antenna Type	Detachable antenna
EUT Power Rating	N/A
Temperature Range(Operating)	15-35°C
Operating Frequency	315MHz

N/A mean to no applicable

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
N/A	N/A	N/A

Models difference

N/A



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

4 TEST METHODOLOGY

4.1 DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and configuration, which produced the worst emission levels, was selected and recorded in this report.

the following test mode was recorder in this report.

Test Item	Test mode
Conduct Emission	N/A
Radiation Emission	Normal operation

4.2 EUT SYSTEM OPERATION

1. Set up EUT with the relative support equipments.
2. Supplying a transmitting signal of 315MHz,make sure the EUT receiving continuously during the test.

5 SETUP OF EQUIPMENT UNDER TEST

5.1 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	N/A						

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2 CONFIGURATION OF SYSTEM UNDER TEST

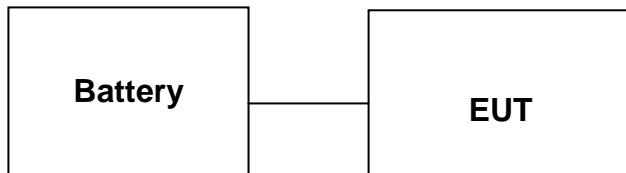

(EUT:TRAILER MONITORING SYSTEM)

6 FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
1-2/F, DaChong Science&Technology Building, No.28 of Tonggu Road,Nanshan District, ShenZhen.PRC

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 15. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC (The certificate registration number is 276008)
	TIMCO (The certificate registration number is Q2001)
Japan	VCCI (The certificate registration number is C-2912, R-2662)
Canada	INDUSTRY CANADA (The certificated registration number is 46405-7700)
Germany	TUV (The certificate registration number is UA50138086-0001,UA50138086-0002)
	EMCC (The certificated registration number is 080380)
China	CNAS (The certificated registration number is L3732)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct.org.cn>

6.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	450kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

7 CONDUCTED EMISSION MEASUREMENT

7.1 LIMITS

FREQUENCY (MHz)	LIMIT(dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system, shall not exceed the level of field strengths specified above.

7.2 TEST INSTRUMENTS

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100005	06/24/2010
LISN	AFJ	LS16	16010222119	09/29/2010
LISN(EUT)	Mestec	AN3016	04/10040	09/28/2010

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.

7.3 TEST PROCEDURES


The EUT was put on a wooden table which was 0.8metre high above the ground and connected to the AC mains through a Artificial Mains Network (A.M.N). The mains lead in excess of 1 m separating the EUT from the AMN was folded back and forth parallel to the lead so as to form a bundle with a length of 0.3m to 0.4m. The EUT was kept 0.4m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during conducted emission test.

The bandwidth of the test receiver (ESCI) was set at 9KHz.

The frequency range from 150 KHz to 30 MHz was investigated.

The test data of the worst-case condition(s) was recorded.

7.4 TEST SETUP

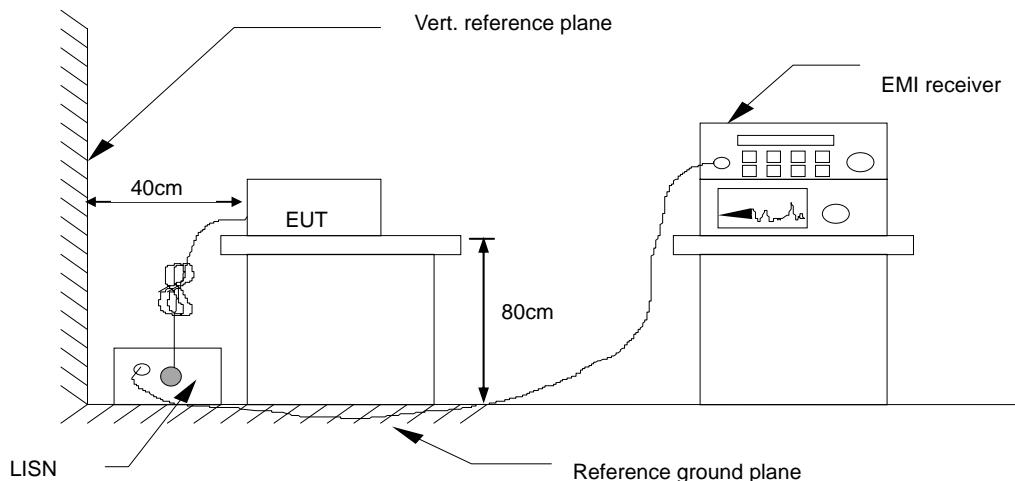

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. TEST RESULTS

No applicable. Due to this product is supplied power by battery.



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

8 RADIATED EMISSION MEASUREMENT

8.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	dBuV/m (At 3m)
	Class B
30~88	40.00
88~216	43.50
216~960	46.00
960~1000	54.00
>1000	PK:74;AV:54

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) The limit below 1GHz use QP detector

8.2. TEST INSTRUMENTS

966 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/24/2010
Spectrum Analyzer	R&S	FSU	100114	04/14/2010
Pre Amplifier	H.P.	HP8447E	2945A02715	06/24/2010
Pre-Amplifier	Compliance	PAM0118	1360976	06/04/2010
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/10/2010
Horn Antenna	Compliance	CE18000	001	06/10/2010
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	06/09/2010
Cable	TIME MICROWAVE	--	--	06/09/2010
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.

8.3.TEST PROCEDURES

The EUT was placed on a turn table which was 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. At the frequency band of 30MHz to 1GHz,The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 to 4 m for horizontal and vertical polarizations. The broadband antenna (calibrated by dipole antenna) was used as a receiving antenna. At the frequency band of 1GHz to 2GHz,The measuring antenna moved from 1 to 4 m for horizontal and vertical polarization. The horn antenna was used as a receiving antenna.

The resolution bandwidth and video bandwidth of the test receiver was 120 KHz and 300KHz for Quasi-peak detection at frequency below 1GHz.

The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 3MHz for Peak emission measurement above 1GHz .


The resolution bandwidth of the test receiver was 1MHz and the video bandwidth are 10Hz for Average emission measurement above 1GHz .

The EUT was tested in Chamber Site.


The test data of the worst case condition(s) was reported on the following pages.

8.4. TEST SETUP

Below 1GHz

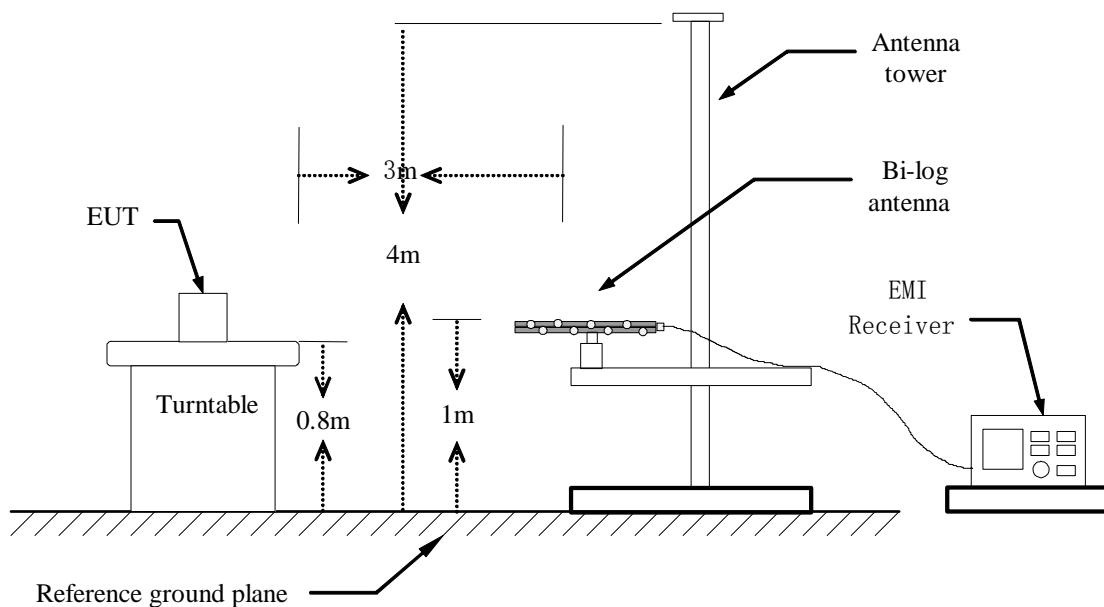

Above 1GHz

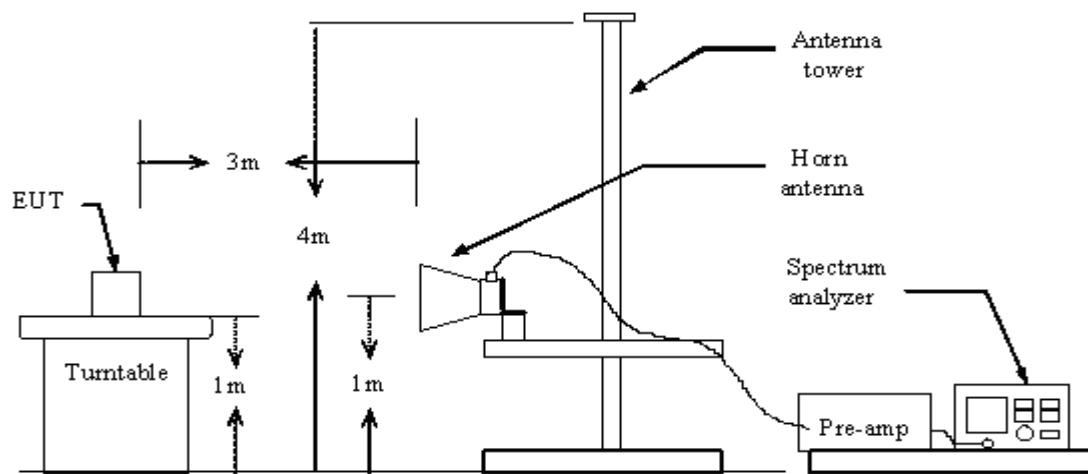



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

8.5. TEST RESULTS

Model No.	TRMS-200-11002	Test Mode	Normal operation
Environmental Conditions	25°C, 55% RH	Test Result	Pass

Frequency (MHz)	Ant. Pol.	Corr.Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin	Note	Result
315.00	H	-1.80	38.16	46.00	-7.84	QP	Pass
552.83	H	2.71	25.46	46.00	-20.54	QP	Pass
799.21	H	4.61	27.51	46.00	-18.49	QP	Pass
945.00	H	5.58	33.01	46.00	-12.99	QP	Pass
1238.00	H	26.51	50.00	74.00	-9.25	Peak	Pass
1238.00	H	26.51	--	54.00	--	AV	Pass
1754.00	H	27.22	48.15	74.00	-18.83	Peak	Pass
1754.00	H	27.22	--	54.00	--	AV	Pass
315.00	V	-1.81	34.00	46.00	-12.00	QP	Pass
547.01	V	2.50	27.05	46.00	-18.95	QP	Pass
666.32	V	5.17	29.06	46.00	-16.94	QP	Pass
945.00	V	3.29	30.77	46.00	-15.23	QP	Pass
1208.00	V	26.50	48.56	74.00	-15.12	Peak	Pass
1208.00	V	26.50	--	54.00	--	AV	Pass
1835.00	V	27.50	47.65	74.00	-17.24	Peak	Pass
1835.00	V	27.50	--	54.00	--	AV	Pass

Note: 1. Level = Antenna Factor + Cable Loss + Meter Reading-Preamp factor

2. – means to the measure is no necessary,due to the PK value comply with AV limits.



Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

9 ANTENNA-CONDUCTED POWER MEASUREMENT

9.1. LIMITS OF ANTENNA-CONDUCTED POWER MEASUREMENT

In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960Mhz and CB eceivers that provided terminals for the connection of an external receiving antenna may be tested to demonstrated compliance with the provisions of section 15.109 with the antenna termainal shielded and terminated with a resistive termination equal to the impedance specified fro the antenna,proviede these receivers also comply with the following: with the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in section 15.33 shall not exceed 2.0 nanowatts.

9.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/24/2010
Spectrum Analyzer	R&S	FSU	100114	04/14/2010

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).
2. N.C.R = No Calibration Request.

9.3. TEST PROCEDURES

- a) Check the calibration of the measuring instrument using either an internal calibrator.
- b) Connect the measuring equipment to the antenna input terminals of the EUT, using a balun or other impedance-matching device if necessary.
- c) Activate the EUT and make sure the product operation normally.
- d) Scan the specified range of measurements and record the level of the six highest emissions.
- e) The resolution bandwidth and video bandwidth of the test receiver was 120 KHz and 300KHz for Quasi-peak detection at frequency below 1GHz.
- f) The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 3MHz for Peak emssion mesurement above 1GHz . The resolution bandwidth of the test receiver was 1MHz and the video bandwidth are 10Hz for Average emssion mesurement above 1GHz .
- g) The test data of the worst case condition(s) was reported on the following pages.

9.4. TEST SETUP





Report reference No.:WSCT10040110E

Issued:May 06, 2010

Revised:None

9.5. TEST RESULTS

Model No.	TRMS-200-11002	Test Mode	Normal operation
Environmental Conditions	25°C, 55% RH	Test Result	Pass

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin	Note	Result
315.00	42.16	50.00	-7.84	QP	Pass
552.83	26.45	50.00	-23.55	QP	Pass
645.30	26.80	50.00	-23.2	QP	Pass
945.00	33.01	50.00	-16.99	QP	Pass
1238.00	42.15	70.00	-27.85	Peak	Pass
1238.00	--	50.00	--	AV	Pass
1645.00	38.50	70.00	-31.50	Peak	Pass
1645.00	--	50.00	--	AV	Pass
315.00	33.00	50.00	-17.00	QP	Pass
547.01	32.35	50.00	-17.65	QP	Pass
650.42	30.15	50.00	-19.85	QP	Pass
945.00	33.65	50.00	-16.35	QP	Pass
1208.00	35.64	70.00	-34.36	Peak	Pass
1208.00	--	50.00	--	AV	Pass
1835.00	34.90	70.00	-35.10	Peak	Pass
1835.00	--	50.00	--	AV	Pass

Note:1. -- means to the measure is no necessary,due to the PK value comply with AV limits.

2.The impedance of the measuring instrument is 50ohm ,the level is calculated by the formulas that $P = 10^{\log} U^2/R$