



# RADIO TEST REPORT

Report No.:STS2106135W02

Issued for

Orbit Irrigation Product Inc.

845 Overland Road, North Salt Lake, Utah 84058 USA

|                |                                                   |
|----------------|---------------------------------------------------|
| Product Name:  | B-HYVE Smart WiFi Indoor Sprinkler Timer          |
| Brand Name:    | Orbit/B-Hyve                                      |
| Model Name:    | WT24                                              |
| Series Model:  | N/A                                               |
| FCC ID:        | ML6WT24E                                          |
| IC:            | 3330A-WT24E                                       |
| Test Standard: | FCC Part 15.247<br>RSS-247 Issue 2, February 2017 |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.  
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,  
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





## TEST RESULT CERTIFICATION

**Applicant's Name** .....: Orbit Irrigation Product Inc.

Address .....: 845 Overland Road, North Salt Lake, Utah 84058 USA

**Manufacturer's Name**.....: Orbit Irrigation Product Inc.

Address .....: 845 Overland Road, North Salt Lake, Utah 84058 USA

### Product Description

Product Name .....: B-HYVE Smart WiFi Indoor Sprinkler Timer

Brand Name.....: Orbit/B-Hyve

Model Name .....: WT24

Series Model.....: N/A

FCC Part 15.247

**Test Standards** .....: RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 ,March 2019

Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

Date of receipt of test item.....: 23 June 2021

Date (s) of performance of tests .....: 23 June 2021 ~ 05 July 2021

Date of Issue .....: 05 July 2021

Test Result.....: **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





| Table of Contents                                            | Page      |
|--------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b>                            | <b>6</b>  |
| 1.1 TEST FACTORY                                             | 7         |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 7         |
| <b>2. GENERAL INFORMATION</b>                                | <b>8</b>  |
| 2.1 GENERAL DESCRIPTION OF THE EUT                           | 8         |
| 2.2 DESCRIPTION OF THE TEST MODES                            | 10        |
| 2.3 TEST SOFTWARE AND POWER LEVEL                            | 10        |
| 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11        |
| 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS   | 12        |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                       | 13        |
| <b>3. EMC EMISSION TEST</b>                                  | <b>15</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                           | 15        |
| 3.2 RADIATED EMISSION MEASUREMENT                            | 19        |
| <b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>        | <b>32</b> |
| 4.1 LIMIT                                                    | 32        |
| 4.2 TEST PROCEDURE                                           | 32        |
| 4.3 DEVIATION FROM STANDARD                                  | 32        |
| 4.4 TEST SETUP                                               | 32        |
| 4.5 EUT OPERATION CONDITIONS                                 | 32        |
| 4.6 TEST RESULTS                                             | 33        |
| <b>5. POWER SPECTRAL DENSITY TEST</b>                        | <b>49</b> |
| 5.1 LIMIT                                                    | 49        |
| 5.2 TEST PROCEDURE                                           | 49        |
| 5.3 DEVIATION FROM STANDARD                                  | 49        |
| 5.4 TEST SETUP                                               | 49        |
| 5.5 EUT OPERATION CONDITIONS                                 | 49        |
| 5.6 TEST RESULTS                                             | 50        |
| <b>6. BANDWIDTH TEST</b>                                     | <b>58</b> |
| 6.1 LIMIT                                                    | 58        |
| 6.2 TEST PROCEDURE                                           | 58        |
| 6.3 DEVIATION FROM STANDARD                                  | 58        |
| 6.4 TEST SETUP                                               | 58        |
| 6.5 EUT OPERATION CONDITIONS                                 | 58        |



| Table of Contents                             | Page      |
|-----------------------------------------------|-----------|
| 6.6 TEST RESULTS                              | 59        |
| <b>7. PEAK OUTPUT POWER TEST</b>              | <b>75</b> |
| 7.1 LIMIT                                     | 75        |
| 7.2 TEST PROCEDURE                            | 75        |
| 7.3 DEVIATION FROM STANDARD                   | 75        |
| 7.4 TEST SETUP                                | 75        |
| 7.5 EUT OPERATION CONDITIONS                  | 75        |
| 7.6 TEST RESULTS                              | 76        |
| <b>8. ANTENNA REQUIREMENT</b>                 | <b>78</b> |
| 8.1 STANDARD REQUIREMENT                      | 78        |
| 8.2 EUT ANTENNA                               | 78        |
| <b>9. FREQUENCY STABILITY</b>                 | <b>79</b> |
| 9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 79        |
| 9.2 TEST PROCEDURE                            | 79        |
| 9.3 TEST RESULT                               | 79        |
| <b>APPENDIX-PHOTOS OF TEST SETUP</b>          | <b>80</b> |

**Revision History**

| Rev. | Issue Date   | Report No.    | Effect Page | Contents      |
|------|--------------|---------------|-------------|---------------|
| 00   | 05 July 2021 | STS2106135W02 | ALL         | Initial Issue |
|      |              |               |             |               |





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

| FCC Part 15.247, Subpart C<br>RSS-247 Issue 2                       |                                         |          |        |
|---------------------------------------------------------------------|-----------------------------------------|----------|--------|
| Standard Section                                                    | Test Item                               | Judgment | Remark |
| 15.207<br>RSS-Gen 8.8                                               | Conducted Emission                      | PASS     | --     |
| 15.247 (a)(2)<br>RSS-Gen 6.7<br>RSS-247 5.2 a)                      | 6dB&99% Bandwidth                       | PASS     | --     |
| 15.247 (b)(3)<br>RSS-247 5.4 d)                                     | Output Power                            | PASS     | --     |
| 15.209<br>RSS-Gen 8.9/8.10                                          | Radiated Spurious Emission              | PASS     | --     |
| 15.247 (d)<br>RSS-247 5.5<br>RSS-Gen 8.9/8.10                       | Conducted Spurious & Band Edge Emission | PASS     | --     |
| 15.247 (e)<br>RSS-247 5.2 b)                                        | Power Spectral Density                  | PASS     | --     |
| 15.205<br>RSS-Gen 8.9/8.10                                          | Restricted Band Edge Emission           | PASS     | --     |
| Part 15.247(d)/part<br>15.209(a)<br>RSS-247 5.5<br>RSS-Gen 8.9/8.10 | Band Edge Emission                      | PASS     | --     |
| 15.203<br>RSS-Gen 6.8                                               | Antenna Requirement                     | PASS     | --     |
| RSS-Gen 6.11/8.11                                                   | Frequency Stability                     | PASS     | --     |

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                              | Uncertainty          |
|-----|-----------------------------------|----------------------|
| 1   | RF output power, conducted        | $\pm 0.68\text{dB}$  |
| 2   | Unwanted Emissions, conducted     | $\pm 2.988\text{dB}$ |
| 3   | All emissions, radiated 9K-30MHz  | $\pm 2.68\text{dB}$  |
| 4   | All emissions, radiated 30M-1GHz  | $\pm 4.39\text{dB}$  |
| 5   | All emissions, radiated 1G-6GHz   | $\pm 5.10\text{dB}$  |
| 6   | All emissions, radiated >6G       | $\pm 5.48\text{dB}$  |
| 7   | Conducted Emission (9KHz-150KHz)  | $\pm 2.79\text{dB}$  |
| 8   | Conducted Emission (150KHz-30MHz) | $\pm 2.80\text{dB}$  |



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

|                              |                                                       |                                                                                                                                                                                |
|------------------------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name/PMN             | B-HYVE Smart WiFi Indoor Sprinkler Timer              |                                                                                                                                                                                |
| Trade Name                   | Orbit/B-Hyve                                          |                                                                                                                                                                                |
| Model Name                   | WT24                                                  |                                                                                                                                                                                |
| HVIN                         | WT24E                                                 |                                                                                                                                                                                |
| Series Model                 | N/A                                                   |                                                                                                                                                                                |
| Model Difference             | N/A                                                   |                                                                                                                                                                                |
| Product Description          | The EUT is a B-HYVE Smart WiFi Indoor Sprinkler Timer |                                                                                                                                                                                |
|                              | Operation Frequency:                                  | 802.11b/g/n 20: 2412~2462 MHz<br>802.11n(40MHz):2422~2452MHz                                                                                                                   |
|                              | Modulation Type:                                      | 802.11b(DSSS):CCK,DQPSK,DBPSK<br>802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM<br>802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM                                                                |
|                              | Bit Rate of Transmitter:                              | 802.11b:11/5.5/2/1 Mbps<br>802.11g:54/48/36/24/18/12/9/6Mbps<br>802.11n(20MHz):<br>65/58.5/52/39/26/19.5/13/6.5Mbps<br>802.11n(40MHz):<br>135/121.5/108/81/54/40.5/37/13.5Mbps |
|                              | Number of Channel:                                    | 802.11b/g/n20: 11CH<br>802.11n 40: 7CH                                                                                                                                         |
|                              | Antenna Designation:                                  | Please refer to the Note 3.                                                                                                                                                    |
|                              | Antenna Gain (dBi):                                   | 1.5dBi                                                                                                                                                                         |
|                              | Duty Cycle:                                           | >98%                                                                                                                                                                           |
| Channel List                 | Please refer to the Note 2.                           |                                                                                                                                                                                |
| Adapter                      | Input: 120V AC 60Hz 23W<br>Output: 24V 750 mA 60Hz    |                                                                                                                                                                                |
| Battery                      | Manufacturer:                                         |                                                                                                                                                                                |
| Hardware version number      | 2.5                                                   |                                                                                                                                                                                |
| Software version number/FVIN | 42                                                    |                                                                                                                                                                                |
| Serial Numbers               | WT24E2021040001                                       |                                                                                                                                                                                |
| Connecting I/O Port(s)       | Please refer to the Note 1.                           |                                                                                                                                                                                |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



2.

| Operation Frequency of channel |           |                                 |           |
|--------------------------------|-----------|---------------------------------|-----------|
| 802.11b/g/n(20MHz)             |           | Channel List for 802.11n(40MHz) |           |
| Channel                        | Frequency | Channel                         | Frequency |
| 01                             | 2412      | 03                              | 2422      |
| 02                             | 2417      | 04                              | 2427      |
| 03                             | 2422      | 05                              | 2432      |
| 04                             | 2427      | 06                              | 2437      |
| 05                             | 2432      | 07                              | 2442      |
| 06                             | 2437      | 08                              | 2447      |
| 07                             | 2442      | 09                              | 2452      |
| 08                             | 2447      |                                 |           |
| 09                             | 2452      |                                 |           |
| 10                             | 2457      |                                 |           |
| 11                             | 2462      |                                 |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

| For 802.11b/g/n (HT20) |            | For 802.11n (HT40) |            |
|------------------------|------------|--------------------|------------|
| Channel                | Freq.(MHz) | Channel            | Freq.(MHz) |
| 01                     | 2412       | 03                 | 2422       |
| 06                     | 2437       | 06                 | 2437       |
| 11                     | 2462       | 09                 | 2452       |

3.

| Ant. | Brand        | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE         |
|------|--------------|------------|--------------|-----------|------------|--------------|
| 1    | Orbit/B-Hyve | WT24       | PCB          | N/A       | 1.5dBi     | WLAN Antenna |

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



## 2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Worst Mode | Description               | Data Rate |
|------------|---------------------------|-----------|
| Mode 1     | TX IEEE 802.11b CH1       | 1 Mbps    |
| Mode 2     | TX IEEE 802.11b CH6       | 1 Mbps    |
| Mode 3     | TX IEEE 802.11 b CH11     | 1 Mbps    |
| Mode 4     | TX IEEE 802.11g CH1       | 6 Mbps    |
| Mode 5     | TX IEEE 802.11g CH6       | 6 Mbps    |
| Mode 6     | TX IEEE 802.11g CH11      | 6 Mbps    |
| Mode 7     | TX IEEE 802.11n HT20 CH1  | MCS 0     |
| Mode 8     | TX IEEE 802.11n HT20 CH6  | MCS 0     |
| Mode 9     | TX IEEE 802.11n HT20 CH11 | MCS 0     |
| Mode 10    | TX IEEE 802.11n HT40 CH3  | MCS 0     |
| Mode 11    | TX IEEE 802.11n HT40 CH6  | MCS 0     |
| Mode 12    | TX IEEE 802.11n HT40 CH9  | MCS 0     |

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.
- (3) The battery is fully-charged during the radited and RF conducted test.

## AC Conducted Emission

| Test Case             |                         |
|-----------------------|-------------------------|
| AC Conducted Emission | Mode13: Keeping WIFI TX |

## 2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

| RF Function | Type      | Mode Or Modulation type | ANT Gain(dBi) | Power Class | Software For Testing  |
|-------------|-----------|-------------------------|---------------|-------------|-----------------------|
| WIFI(2.4G)  | 2.4G WIFI | 802.11b                 | 1.5           | 12          | ESP_RF_test_tool_v2.5 |
|             |           | 802.11g                 |               | 12          |                       |
|             |           | 802.11n(HT20)           |               | 12          |                       |
|             |           | 802.11n(HT40)           |               | 12          |                       |




## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Radiation Test Set

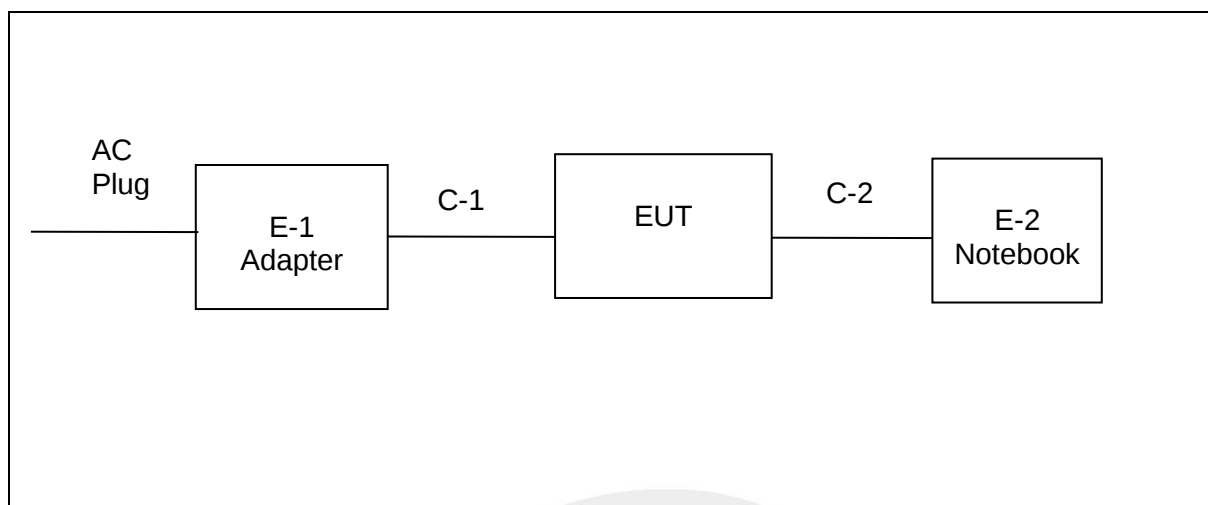

### conduction Test Set

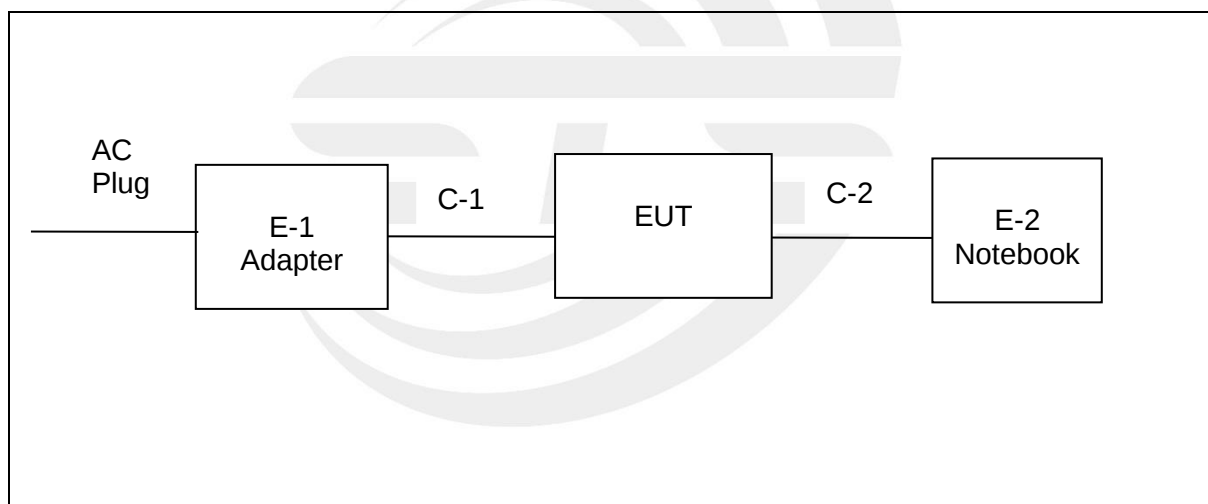



## 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| E-1  | Adapter   | Orbit     | JA1-48-069R    | N/A    | N/A  |
| C-1  | DC Cable  | N/A       | N/A            | 180cm  | N/A  |
|      |           |           |                |        |      |
|      |           |           |                |        |      |

### Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| E-2  | Notebook  | LENOVO    | ThinkPad E470  | N/A    | N/A  |
| C-2  | USB Cable | N/A       | N/A            | 180cm  | NO   |
|      |           |           |                |        |      |
|      |           |           |                |        |      |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

| Kind of Equipment                | Manufacturer | Type No.                   | Serial No.   | Last calibration | Calibrated until |
|----------------------------------|--------------|----------------------------|--------------|------------------|------------------|
| Test Receiver                    | R&S          | ESCI                       | 101427       | 2020.10.12       | 2021.10.11       |
| Signal Analyzer                  | R&S          | FSV 40-N                   | 101823       | 2020.10.10       | 2021.10.09       |
| Active loop Antenna              | ZHINAN       | ZN30900C                   | 16035        | 2019.07.11       | 2021.07.10       |
| Bilog Antenna                    | TESEQ        | CBL6111D                   | 34678        | 2020.10.12       | 2022.10.11       |
| Horn Antenna                     | SCHWARZBECK  | BBHA 9120D                 | 02014        | 2019.10.15       | 2021.10.14       |
| SHF-EHF Horn Antenna (18G-40GHz) | A-INFO       | LB-180400-KF               | J211020657   | 2020.10.12       | 2022.10.11       |
| Pre-Amplifier (0.1M-3GHz)        | EM           | EM330                      | 060665       | 2020.10.12       | 2021.10.11       |
| Pre-Amplifier (1G-18GHz)         | SKET         | LNPA-01018G-45             | SK2018080901 | 2020.10.12       | 2021.10.11       |
| Pre-Amplifier (18G-40GHz)        | SKET         | LNPA-1840-50               | SK2018101801 | 2020.10.10       | 2021.10.09       |
| Temperature & Humidity           | HH660        | Mieo                       | N/A          | 2020.10.12       | 2021.10.11       |
| Turn table                       | EM           | SC100_1                    | 60531        | N/A              | N/A              |
| Antenna mast                     | EM           | SC100                      | N/A          | N/A              | N/A              |
| Test SW                          | FARAD        | EZ-EMC(Ver.STSLAB-03A1 RE) |              |                  |                  |


## Conduction Test equipment

| Kind of Equipment      | Manufacturer | Type No.                   | Serial No. | Last calibration | Calibrated until |
|------------------------|--------------|----------------------------|------------|------------------|------------------|
| Test Receiver          | R&S          | ESCI                       | 101427     | 2020.10.12       | 2021.10.11       |
| LISN                   | R&S          | ENV216                     | 101242     | 2020.10.12       | 2021.10.11       |
| LISN                   | EMCO         | 3810/2NM                   | 23625      | 2020.10.12       | 2021.10.11       |
| Temperature & Humidity | HH660        | Mieo                       | N/A        | 2020.10.13       | 2021.10.12       |
| Test SW                | FARAD        | EZ-EMC(Ver.STSLAB-03A1 RE) |            |                  |                  |



## RF Connected Test

| Kind of Equipment               | Manufacturer | Type No.                   | Serial No. | Last calibration | Calibrated until |
|---------------------------------|--------------|----------------------------|------------|------------------|------------------|
| MIMO Power measurement test Set | Keysight     | U2021XA                    | MY55520005 | 2020.10.10       | 2021.10.09       |
|                                 |              |                            | MY55520006 | 2020.10.10       | 2021.10.09       |
|                                 |              |                            | MY56120038 | 2020.10.10       | 2021.10.09       |
|                                 |              |                            | MY56280002 | 2020.10.10       | 2021.10.09       |
| Signal Analyzer                 | Agilent      | N9020A                     | MY51110105 | 2021.03.04       | 2022.03.03       |
| Temperature & Humidity          | HH660        | Mieo                       | N/A        | 2020.10.13       | 2021.10.12       |
| MIMO Power measurement test Set | Keysight     | U2021XA                    | MY55520005 | 2020.10.10       | 2021.10.09       |
| Test SW                         | FARAD        | EZ-EMC(Ver.STSLAB-03A1 RE) |            |                  |                  |

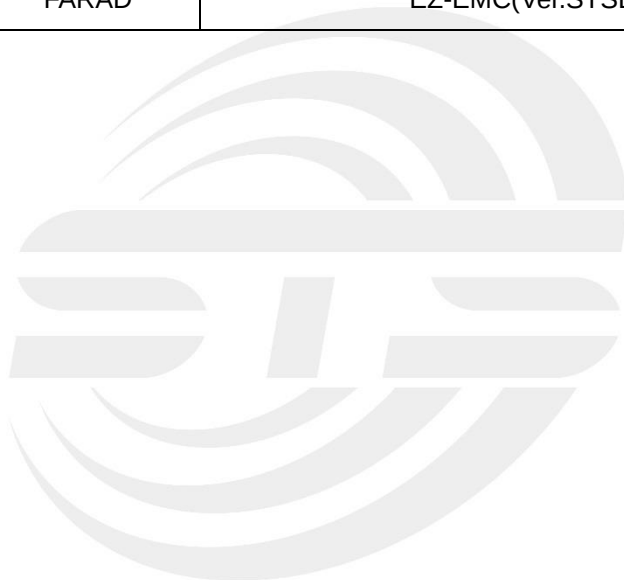



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

| FREQUENCY (MHz) | Conducted Emission limit (dBuV) |           |
|-----------------|---------------------------------|-----------|
|                 | Quasi-peak                      | Average   |
| 0.15 -0.5       | 66 - 56 *                       | 56 - 46 * |
| 0.50 -5.0       | 56.00                           | 46.00     |
| 5.0 -30.0       | 60.00                           | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

### 3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

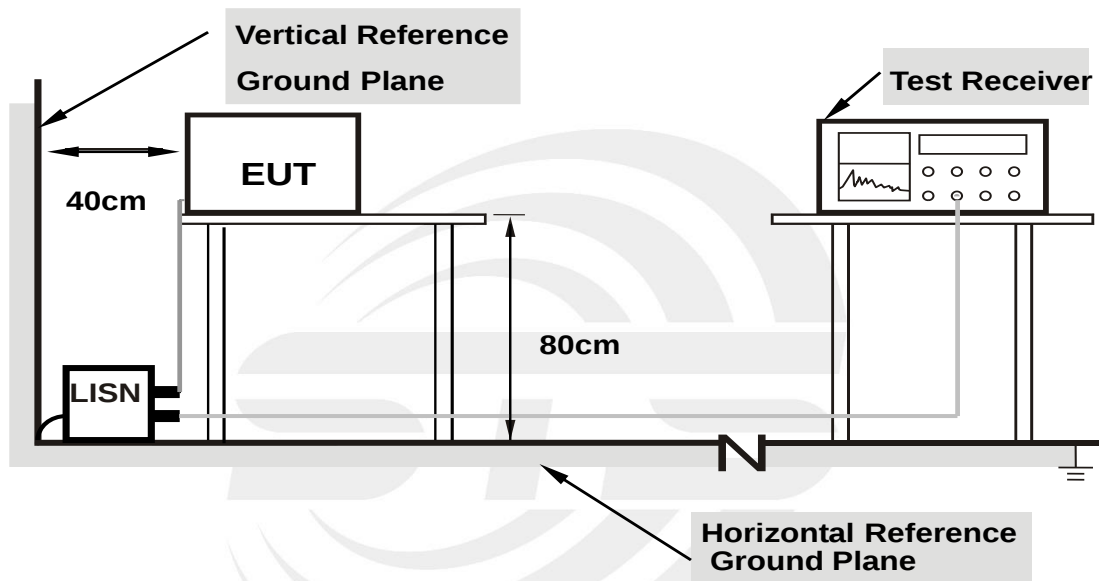

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




## 3.1.5 TEST RESULT

|               |              |                    |       |
|---------------|--------------|--------------------|-------|
| Temperature:  | 26.2(C)      | Relative Humidity: | 53%RH |
| Test Voltage: | AC 120V/60Hz | Phase:             | L     |
| Test Mode:    | Mode 13      |                    |       |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(d<br>B) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|---------------------------|------------------|-----------------|----------------|--------|
| 1   | 0.4460             | 7.40              | 20.54                     | 27.94            | 56.95           | -29.01         | QP     |
| 2   | 0.4460             | -1.46             | 20.54                     | 19.08            | 46.95           | -27.87         | AVG    |
| 3   | 1.3340             | 9.45              | 20.30                     | 29.75            | 56.00           | -26.25         | QP     |
| 4   | 1.3340             | 3.56              | 20.30                     | 23.86            | 46.00           | -22.14         | AVG    |
| 5   | 2.6660             | 10.71             | 20.33                     | 31.04            | 56.00           | -24.96         | QP     |
| 6   | 2.6660             | 6.36              | 20.33                     | 26.69            | 46.00           | -19.31         | AVG    |
| 7   | 9.3340             | 13.14             | 21.06                     | 34.20            | 60.00           | -25.80         | QP     |
| 8   | 9.3340             | 8.50              | 21.06                     | 29.56            | 50.00           | -20.44         | AVG    |
| 9   | 15.5500            | 11.58             | 21.86                     | 33.44            | 60.00           | -26.56         | QP     |
| 10  | 15.5500            | 5.27              | 21.86                     | 27.13            | 50.00           | -22.87         | AVG    |
| 11  | 21.3300            | 12.32             | 22.82                     | 35.14            | 60.00           | -24.86         | QP     |
| 12  | 21.3300            | 4.09              | 22.82                     | 26.91            | 50.00           | -23.09         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor )-Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

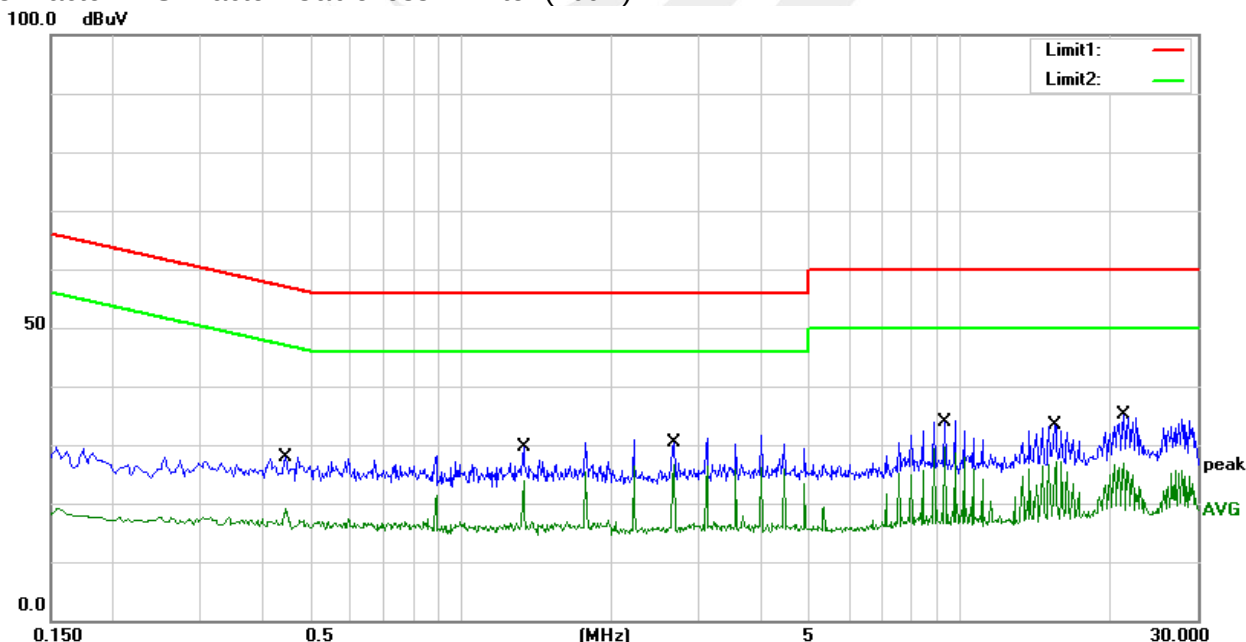




|               |              |                    |       |
|---------------|--------------|--------------------|-------|
| Temperature:  | 26.2(C)      | Relative Humidity: | 53%RH |
| Test Voltage: | AC 120V/60Hz | Phase:             | N     |
| Test Mode:    | Mode 13      |                    |       |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------------|------------------|-----------------|----------------|--------|
| 1   | 0.2900             | 8.86              | 20.70                 | 29.56            | 60.52           | -30.96         | QP     |
| 2   | 0.2900             | -2.57             | 20.70                 | 18.13            | 50.52           | -32.39         | AVG    |
| 3   | 1.3300             | 9.55              | 20.30                 | 29.85            | 56.00           | -26.15         | QP     |
| 4   | 1.3300             | 2.31              | 20.30                 | 22.61            | 46.00           | -23.39         | AVG    |
| 5   | 2.2180             | 11.53             | 20.31                 | 31.84            | 56.00           | -24.16         | QP     |
| 6   | 2.2180             | 7.00              | 20.31                 | 27.31            | 46.00           | -18.69         | AVG    |
| 7   | 4.4420             | 11.20             | 20.42                 | 31.62            | 56.00           | -24.38         | QP     |
| 8   | 4.4420             | 6.12              | 20.42                 | 26.54            | 46.00           | -19.46         | AVG    |
| 9   | 8.8780             | 10.15             | 20.96                 | 31.11            | 60.00           | -28.89         | QP     |
| 10  | 8.8780             | 4.71              | 20.96                 | 25.67            | 50.00           | -24.33         | AVG    |
| 11  | 27.8820            | 11.75             | 22.79                 | 34.54            | 60.00           | -25.46         | QP     |
| 12  | 27.8820            | 4.11              | 22.79                 | 26.90            | 50.00           | -23.10         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

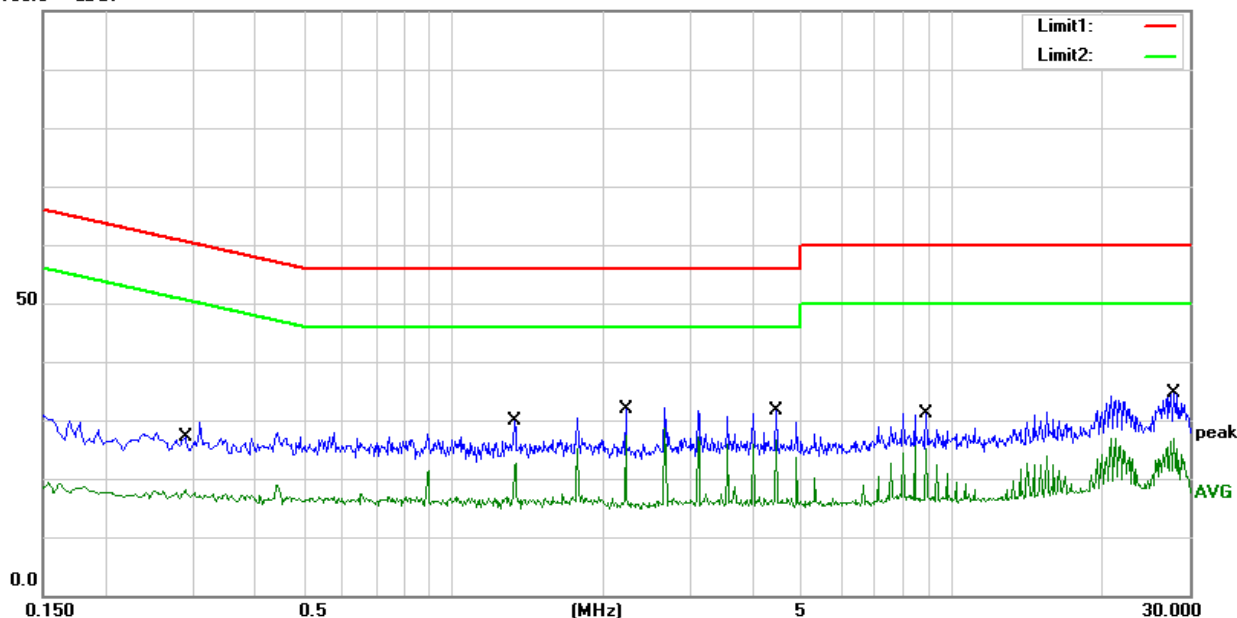



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen Issue 5 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) |         |
|-----------------|------------------|---------|
|                 | PEAK             | AVERAGE |
| Above 1000      | 74               | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

| FREQUENCY (MHz)   | FREQUENCY (MHz)     | FREQUENCY (MHz) | FREQUENCY (GHz) |
|-------------------|---------------------|-----------------|-----------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410       | 4.5-5.15        |
| 0.495-0.505       | 16.69475-16.69525   | 608-614         | 5.35-5.46       |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240        | 7.25-7.75       |
| 4.125-4.128       | 25.5-25.67          | 1300-1427       | 8.025-8.5       |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5     | 9.0-9.2         |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5   | 9.3-9.5         |
| 6.215-6.218       | 74.8-75.2           | 1660-1710       | 10.6-12.7       |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2   | 13.25-13.4      |
| 6.31175-6.31225   | 123-138             | 2200-2300       | 14.47-14.5      |
| 8.291-8.294       | 149.9-150.05        | 2310-2390       | 15.35-16.2      |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500     | 17.7-21.4       |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900       | 22.01-23.12     |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267       | 23.6-24.0       |
| 12.29-12.293      | 167.72-173.2        | 3332-3339       | 31.2-31.8       |
| 12.51975-12.52025 | 240-285             | 3345.8-3358     | 36.43-36.5      |
| 12.57675-12.57725 | 322-335.4           | 3600-4400       | Above 38.6      |
| 13.36-13.41       |                     |                 |                 |



IC:

| FREQUENCY (MHz)     | FREQUENCY (MHz)       | FREQUENCY (GHz) |
|---------------------|-----------------------|-----------------|
| 0.090 - 0.110       | 149.9 - 150.05        | 9.0 - 9.2       |
| 0.495 - 0.505       | 156.52475 - 156.52525 | 9.3 - 9.5       |
| 2.1735 - 2.1905     | 156.7 - 156.9         | 10.6 - 12.7     |
| 3.020 - 3.026       | 162.0125 - 167.17     | 13.25 - 13.4    |
| 4.125 - 4.128       | 167.72 - 173.2        | 14.47 - 14.5    |
| 4.17725 - 4.17775   | 240 - 285             | 15.35 - 16.2    |
| 4.20725 - 4.20775   | 322 - 335.4           | 17.7 - 21.4     |
| 5.677 - 5.683       | 399.9 - 410           | 22.01 - 23.12   |
| 6.215 - 6.218       | 608 - 614             | 23.6 - 24.0     |
| 6.26775 - 6.26825   | 960 - 1427            | 31.2 - 31.8     |
| 6.31175 - 6.31225   | 1435 - 1626.5         | 36.43 - 36.5    |
| 8.291 - 8.294       | 1645.5 - 1646.5       | Above 38.6      |
| 8.362 - 8.366       | 1660 - 1710           |                 |
| 8.37625 - 8.38675   | 1718.8 - 1722.2       |                 |
| 8.41425 - 8.41475   | 2200 - 2300           |                 |
| 12.29 - 12.293      | 2310 - 2390           |                 |
| 12.51975 - 12.52025 | 2483.5 - 2500         |                 |
| 12.57675 - 12.57725 | 2655 - 2900           |                 |
| 13.36 - 13.41       | 3260 - 3267           |                 |
| 16.42 - 16.423      | 3332 - 3339           |                 |
| 16.69475 - 16.69525 | 3345.8 - 3358         |                 |
| 16.80425 - 16.80475 | 3500 - 4400           |                 |
| 25.5 - 25.67        | 4500 - 5150           |                 |
| 37.5 - 38.25        | 5350 - 5460           |                 |
| 73 - 74.6           | 7250 - 7750           |                 |
| 74.8 - 75.2         | 8025 - 8500           |                 |
| 108 - 138           |                       |                 |



## For Radiated Emission

| Spectrum Parameter                    | Setting                                                                                                                         |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Attenuation                           | Auto                                                                                                                            |
| Detector                              | Peak/QP/AV                                                                                                                      |
| Start Frequency                       | 9 KHz/150KHz(Peak/QP/AV)                                                                                                        |
| Stop Frequency                        | 150KHz/30MHz(Peak/QP/AV)                                                                                                        |
| RB / VB (emission in restricted band) | 200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz);<br>200Hz (From 9kHz to 0.15MHz)/<br>9KHz (From 0.15MHz to 30MHz) |

| Spectrum Parameter                    | Setting            |
|---------------------------------------|--------------------|
| Attenuation                           | Auto               |
| Detector                              | Peak/QP            |
| Start Frequency                       | 30 MHz(Peak/QP)    |
| Stop Frequency                        | 1000 MHz (Peak/QP) |
| RB / VB (emission in restricted band) | 120 KHz / 300 KHz  |

| Spectrum Parameter                    | Setting                                   |
|---------------------------------------|-------------------------------------------|
| Attenuation                           | Auto                                      |
| Detector                              | Peak/AV                                   |
| Start Frequency                       | 1000 MHz(Peak/AV)                         |
| Stop Frequency                        | 10th carrier hamonic(Peak/AV)             |
| RB / VB (emission in restricted band) | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG) |

## For Restricted band

| Spectrum Parameter   | Setting                                                                |
|----------------------|------------------------------------------------------------------------|
| Detector             | Peak/AV                                                                |
| Start/Stop Frequency | Lower Band Edge: 2310 to 2430 MHz<br>Upper Band Edge: 2445 to 2500 MHz |
| RB / VB              | 1 MHz / 3 MHz(Peak)<br>1 MHz/1/T MHz(AVG)                              |



| Receiver Parameter     | Setting                              |
|------------------------|--------------------------------------|
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV    |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP       |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP        |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP     |

### 3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 3.2.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

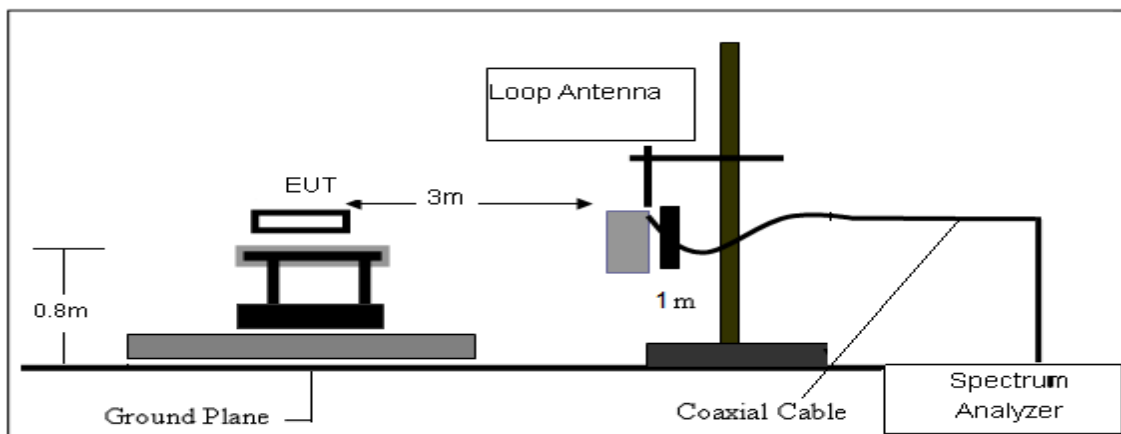

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

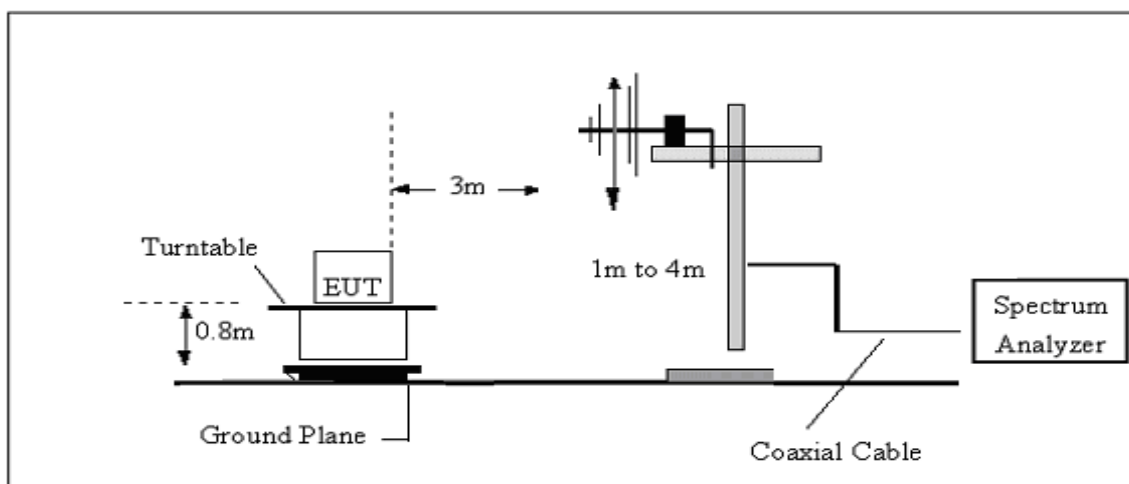

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

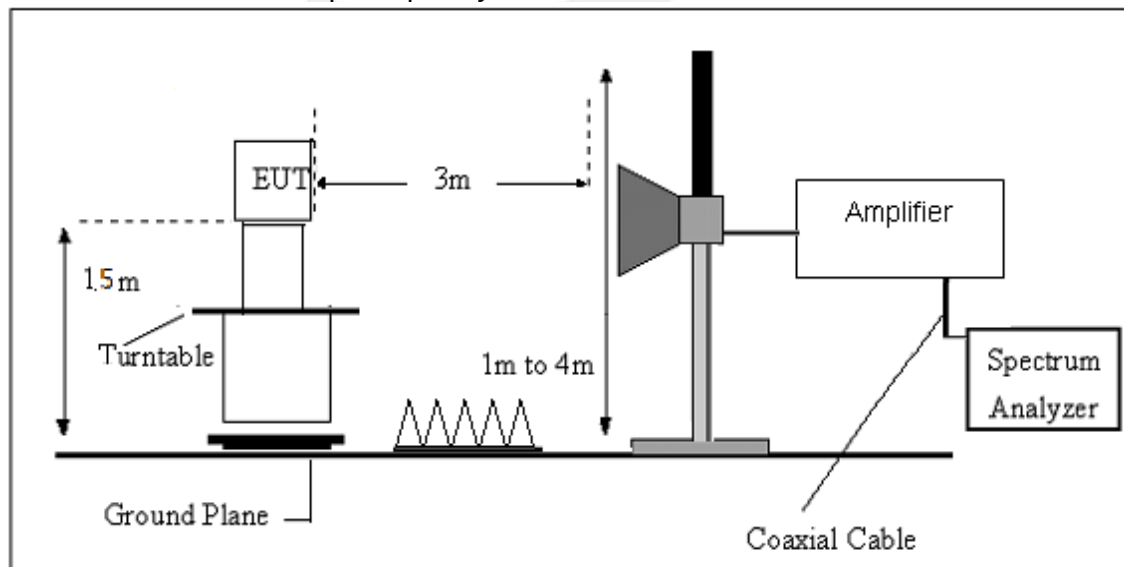

### 3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



### 3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

| Frequency | FS       | RA       | AF   | CL   | AG   | Factor |
|-----------|----------|----------|------|------|------|--------|
| (MHz)     | (dBμV/m) | (dBμV/m) | (dB) | (dB) | (dB) | (dB)   |
| 300       | 40       | 58.1     | 12.2 | 1.6  | 31.9 | -18.1  |

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.6 TEST RESULT

9KHz-30MHz

|               |              |                    |       |
|---------------|--------------|--------------------|-------|
| Temperature:  | 23.1(C)      | Relative Humidity: | 60%RH |
| Test Voltage: | AC 120V/60Hz | Polarization:      | --    |
| Test Mode:    | TX Mode      |                    |       |

| Freq. | Reading  | Limit    | Margin | State | Test Result |
|-------|----------|----------|--------|-------|-------------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |             |
| --    | --       | --       | --     | --    | PASS        |
| --    | --       | --       | --     | --    | PASS        |

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.




(30MHz - 1000MHz)

|               |                                                     |                    |            |
|---------------|-----------------------------------------------------|--------------------|------------|
| Temperature:  | 23.1(C)                                             | Relative Humidity: | 60%RH      |
| Test Voltage: | AC 120V/60Hz                                        | Phase:             | Horizontal |
| Test Mode:    | Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 8 worst mode) |                    |            |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/<br>m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1   | 159.9800           | 54.46             | -18.81                      | 35.65              | 43.50             | -7.85          | QP     |
| 2   | 320.0300           | 54.98             | -14.00                      | 40.98              | 46.00             | -5.02          | QP     |
| 3   | 480.0800           | 51.83             | -8.65                       | 43.18              | 46.00             | -2.82          | QP     |
| 4   | 640.1300           | 45.13             | -4.84                       | 40.29              | 46.00             | -5.71          | QP     |
| 5   | 720.6400           | 35.31             | -3.20                       | 32.11              | 46.00             | -13.89         | QP     |
| 6   | 960.2300           | 31.81             | 1.76                        | 33.57              | 54.00             | -20.43         | QP     |

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

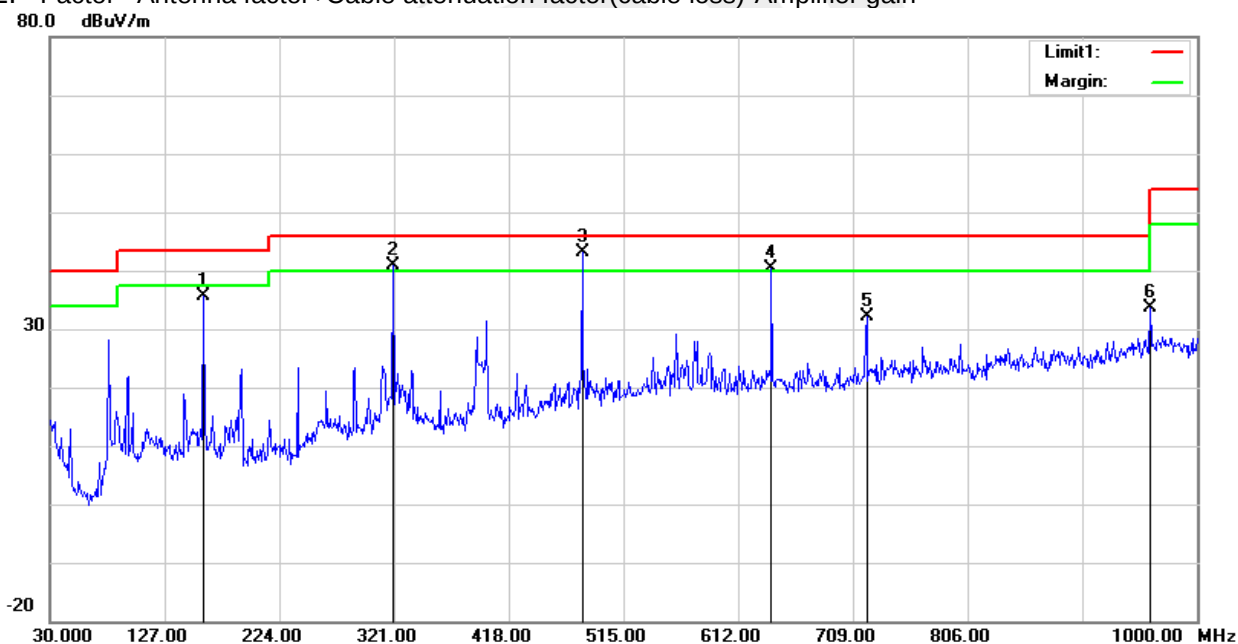




|               |                                                     |                    |          |
|---------------|-----------------------------------------------------|--------------------|----------|
| Temperature:  | 23.1(C)                                             | Relative Humidity: | 60%RH    |
| Test Voltage: | AC 120V/60Hz                                        | Phase:             | Vertical |
| Test Mode:    | Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 8 worst mode) |                    |          |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/<br>m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1   | 79.4700            | 54.28             | -23.11                      | 31.17              | 40.00             | -8.83          | QP     |
| 2   | 320.0300           | 51.09             | -14.00                      | 37.09              | 46.00             | -8.91          | QP     |
| 3   | 399.5700           | 44.75             | -11.16                      | 33.59              | 46.00             | -12.41         | QP     |
| 4   | 640.1300           | 42.28             | -4.84                       | 37.44              | 46.00             | -8.56          | QP     |
| 5   | 800.1800           | 36.66             | -2.05                       | 34.61              | 46.00             | -11.39         | QP     |
| 6   | 884.5700           | 34.90             | -0.67                       | 34.23              | 46.00             | -11.77         | QP     |

Remark:.

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

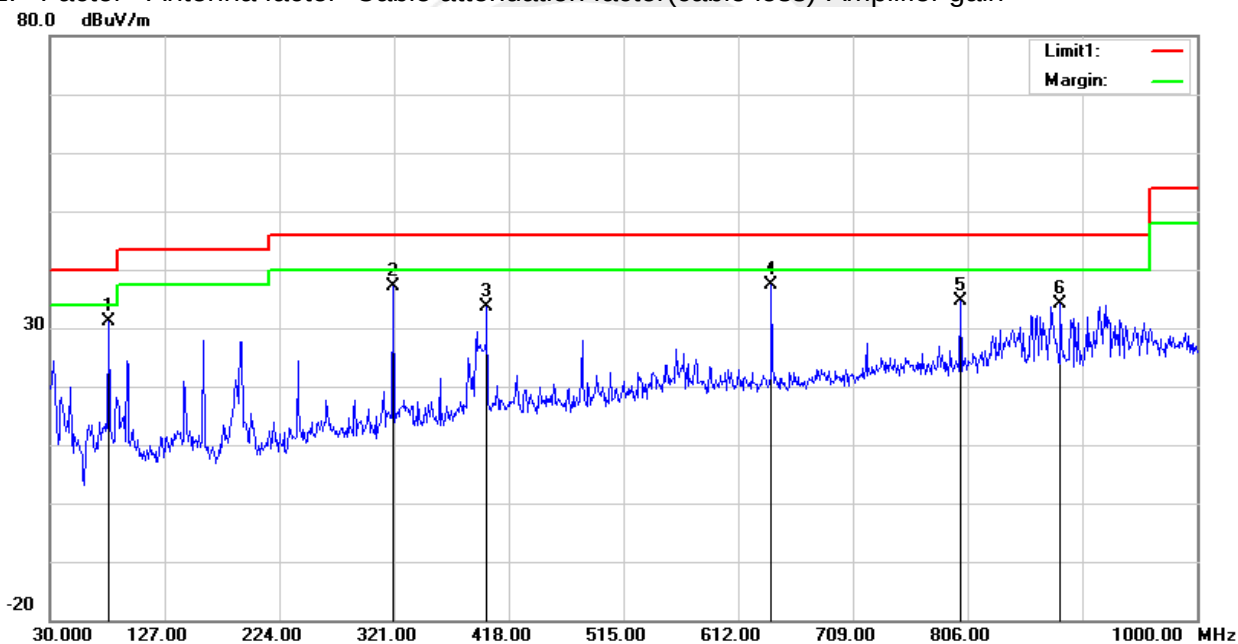



(1000MHz-25GHz) Spurious emission Requirements

## 802.11 n(HT20)

| Frequency                           | Meter Reading | Amplifier | Loss  | Antenna Factor | Corrected Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-------------------------------------|---------------|-----------|-------|----------------|------------------|----------------|----------|--------|----------|------------|
| (MHz)                               | (dBμV)        | (dB)      | (dB)  | (dB/m)         | (dB)             | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| Low Channel (802.11n20/2412 MHz)    |               |           |       |                |                  |                |          |        |          |            |
| 3264.62                             | 62.20         | 44.70     | 6.70  | 28.20          | -9.80            | 52.40          | 74.00    | -21.60 | PK       | Vertical   |
| 3264.62                             | 49.85         | 44.70     | 6.70  | 28.20          | -9.80            | 40.05          | 54.00    | -13.95 | AV       | Vertical   |
| 3264.68                             | 62.25         | 44.70     | 6.70  | 28.20          | -9.80            | 52.45          | 74.00    | -21.55 | PK       | Horizontal |
| 3264.68                             | 50.72         | 44.70     | 6.70  | 28.20          | -9.80            | 40.92          | 54.00    | -13.08 | AV       | Horizontal |
| 4824.35                             | 59.27         | 44.20     | 9.04  | 31.60          | -3.56            | 55.71          | 74.00    | -18.29 | PK       | Vertical   |
| 4824.35                             | 49.38         | 44.20     | 9.04  | 31.60          | -3.56            | 45.82          | 54.00    | -8.18  | AV       | Vertical   |
| 4824.60                             | 58.91         | 44.20     | 9.04  | 31.60          | -3.56            | 55.35          | 74.00    | -18.65 | PK       | Horizontal |
| 4824.60                             | 49.45         | 44.20     | 9.04  | 31.60          | -3.56            | 45.89          | 54.00    | -8.11  | AV       | Horizontal |
| 5359.75                             | 48.29         | 44.20     | 9.86  | 32.00          | -2.34            | 45.95          | 74.00    | -28.05 | PK       | Vertical   |
| 5359.75                             | 40.11         | 44.20     | 9.86  | 32.00          | -2.34            | 37.77          | 54.00    | -16.23 | AV       | Vertical   |
| 5359.58                             | 47.09         | 44.20     | 9.86  | 32.00          | -2.34            | 44.75          | 74.00    | -29.25 | PK       | Horizontal |
| 5359.58                             | 38.33         | 44.20     | 9.86  | 32.00          | -2.34            | 35.99          | 54.00    | -18.01 | AV       | Horizontal |
| 7235.71                             | 53.57         | 43.50     | 11.40 | 35.50          | 3.40             | 56.97          | 74.00    | -17.03 | PK       | Vertical   |
| 7235.71                             | 44.55         | 43.50     | 11.40 | 35.50          | 3.40             | 47.95          | 54.00    | -6.05  | AV       | Vertical   |
| 7235.73                             | 53.73         | 43.50     | 11.40 | 35.50          | 3.40             | 57.13          | 74.00    | -16.87 | PK       | Horizontal |
| 7235.73                             | 44.55         | 43.50     | 11.40 | 35.50          | 3.40             | 47.95          | 54.00    | -6.05  | AV       | Horizontal |
| Middle Channel (802.11n20/2437 MHz) |               |           |       |                |                  |                |          |        |          |            |
| 3264.73                             | 62.19         | 44.70     | 6.70  | 28.20          | -9.80            | 52.39          | 74.00    | -21.61 | PK       | Vertical   |
| 3264.73                             | 50.46         | 44.70     | 6.70  | 28.20          | -9.80            | 40.66          | 54.00    | -13.34 | AV       | Vertical   |
| 3264.74                             | 61.53         | 44.70     | 6.70  | 28.20          | -9.80            | 51.73          | 74.00    | -22.27 | PK       | Horizontal |
| 3264.74                             | 49.99         | 44.70     | 6.70  | 28.20          | -9.80            | 40.19          | 54.00    | -13.81 | AV       | Horizontal |
| 4874.33                             | 58.25         | 44.20     | 9.04  | 31.60          | -3.56            | 54.69          | 74.00    | -19.31 | PK       | Vertical   |
| 4874.33                             | 49.56         | 44.20     | 9.04  | 31.60          | -3.56            | 46.00          | 54.00    | -8.00  | AV       | Vertical   |
| 4874.37                             | 58.37         | 44.20     | 9.04  | 31.60          | -3.56            | 54.81          | 74.00    | -19.19 | PK       | Horizontal |
| 4874.37                             | 50.42         | 44.20     | 9.04  | 31.60          | -3.56            | 46.86          | 54.00    | -7.14  | AV       | Horizontal |
| 5359.84                             | 48.56         | 44.20     | 9.86  | 32.00          | -2.34            | 46.22          | 74.00    | -27.78 | PK       | Vertical   |
| 5359.84                             | 39.96         | 44.20     | 9.86  | 32.00          | -2.34            | 37.62          | 54.00    | -16.38 | AV       | Vertical   |
| 5359.72                             | 48.47         | 44.20     | 9.86  | 32.00          | -2.34            | 46.13          | 74.00    | -27.87 | PK       | Horizontal |
| 5359.72                             | 39.36         | 44.20     | 9.86  | 32.00          | -2.34            | 37.02          | 54.00    | -16.98 | AV       | Horizontal |
| 7310.73                             | 53.63         | 43.50     | 11.40 | 35.50          | 3.40             | 57.03          | 74.00    | -16.97 | PK       | Vertical   |
| 7310.73                             | 44.62         | 43.50     | 11.40 | 35.50          | 3.40             | 48.02          | 54.00    | -5.98  | AV       | Vertical   |
| 7310.69                             | 53.79         | 43.50     | 11.40 | 35.50          | 3.40             | 57.19          | 74.00    | -16.81 | PK       | Horizontal |
| 7310.69                             | 44.39         | 43.50     | 11.40 | 35.50          | 3.40             | 47.79          | 54.00    | -6.21  | AV       | Horizontal |



| High Channel (802.11n20/2462 MHz) |       |       |       |       |       |       |       |        |    |            |
|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|----|------------|
| 3264.67                           | 61.88 | 44.70 | 6.70  | 28.20 | -9.80 | 52.08 | 74.00 | -21.92 | PK | Vertical   |
| 3264.67                           | 50.61 | 44.70 | 6.70  | 28.20 | -9.80 | 40.81 | 54.00 | -13.19 | AV | Vertical   |
| 3264.67                           | 60.89 | 44.70 | 6.70  | 28.20 | -9.80 | 51.09 | 74.00 | -22.91 | PK | Horizontal |
| 3264.67                           | 51.22 | 44.70 | 6.70  | 28.20 | -9.80 | 41.42 | 54.00 | -12.58 | AV | Horizontal |
| 4924.29                           | 58.24 | 44.20 | 9.04  | 31.60 | -3.56 | 54.68 | 74.00 | -19.32 | PK | Vertical   |
| 4924.29                           | 49.23 | 44.20 | 9.04  | 31.60 | -3.56 | 45.67 | 54.00 | -8.33  | AV | Vertical   |
| 4924.33                           | 58.95 | 44.20 | 9.04  | 31.60 | -3.56 | 55.39 | 74.00 | -18.61 | PK | Horizontal |
| 4924.33                           | 50.53 | 44.20 | 9.04  | 31.60 | -3.56 | 46.97 | 54.00 | -7.03  | AV | Horizontal |
| 5359.72                           | 49.06 | 44.20 | 9.86  | 32.00 | -2.34 | 46.72 | 74.00 | -27.28 | PK | Vertical   |
| 5359.72                           | 39.81 | 44.20 | 9.86  | 32.00 | -2.34 | 37.47 | 54.00 | -16.53 | AV | Vertical   |
| 5359.67                           | 48.29 | 44.20 | 9.86  | 32.00 | -2.34 | 45.95 | 74.00 | -28.05 | PK | Horizontal |
| 5359.67                           | 39.05 | 44.20 | 9.86  | 32.00 | -2.34 | 36.71 | 54.00 | -17.29 | AV | Horizontal |
| 7385.78                           | 53.64 | 43.50 | 11.40 | 35.50 | 3.40  | 57.04 | 74.00 | -16.96 | PK | Vertical   |
| 7385.78                           | 44.60 | 43.50 | 11.40 | 35.50 | 3.40  | 48.00 | 54.00 | -6.00  | AV | Vertical   |
| 7385.85                           | 54.75 | 43.50 | 11.40 | 35.50 | 3.40  | 58.15 | 74.00 | -15.85 | PK | Horizontal |
| 7385.85                           | 44.68 | 43.50 | 11.40 | 35.50 | 3.40  | 48.08 | 54.00 | -5.92  | AV | Horizontal |

## Remark:


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40) the worst case is 802.11 n(HT20).  
Emission Level = Reading + Factor  
Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



## 3.2.6 TEST RESULTS(Band edge Requirements)


## 802.11 n(HT20)-Low

Horizontal

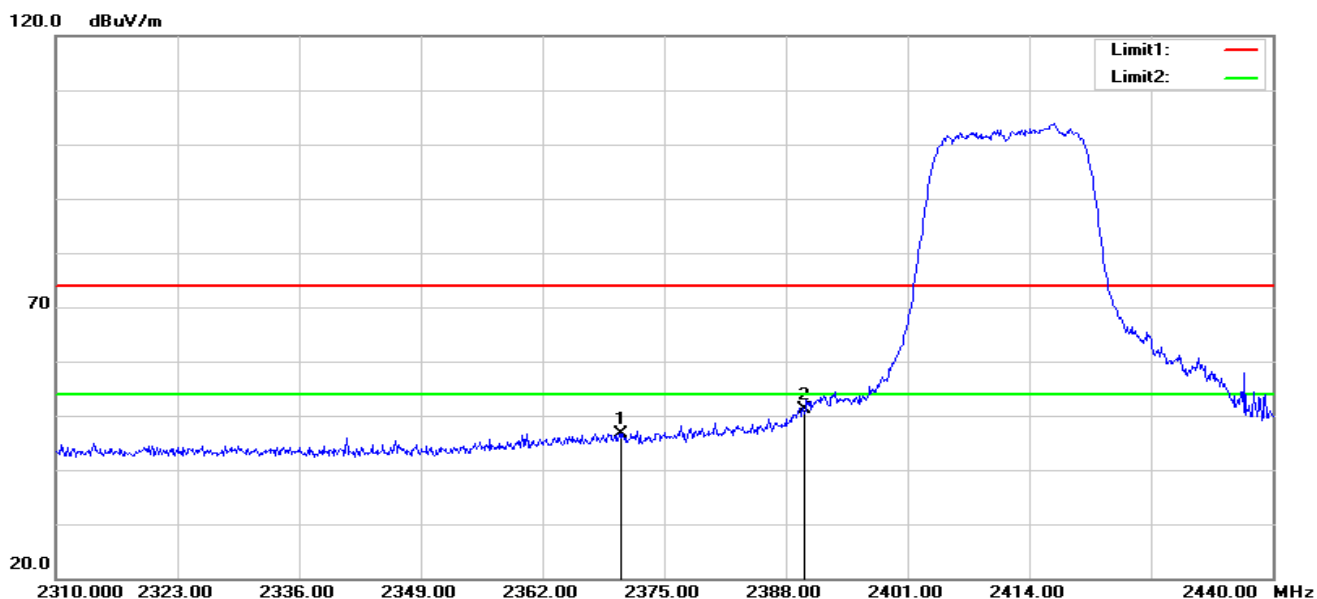

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2370.320           | 42.62             | 4.05                    | 46.67              | 74.00             | -27.33         | peak   |
| 2   | 2390.000           | 46.90             | 4.34                    | 51.24              | 74.00             | -22.76         | peak   |

Vertical

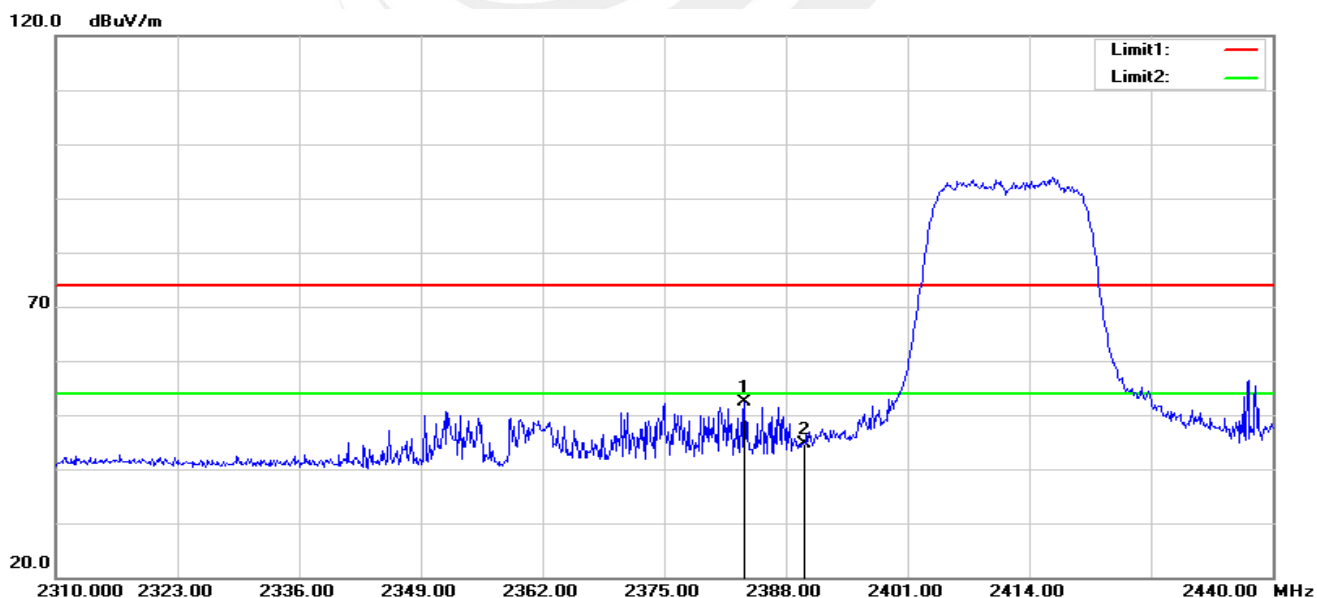


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2383.580           | 48.14             | 4.24                    | 52.38              | 74.00             | -21.62         | peak   |
| 2   | 2390.000           | 40.19             | 4.34                    | 44.53              | 74.00             | -29.47         | peak   |




## 802.11 n(HT20)-High

Horizontal

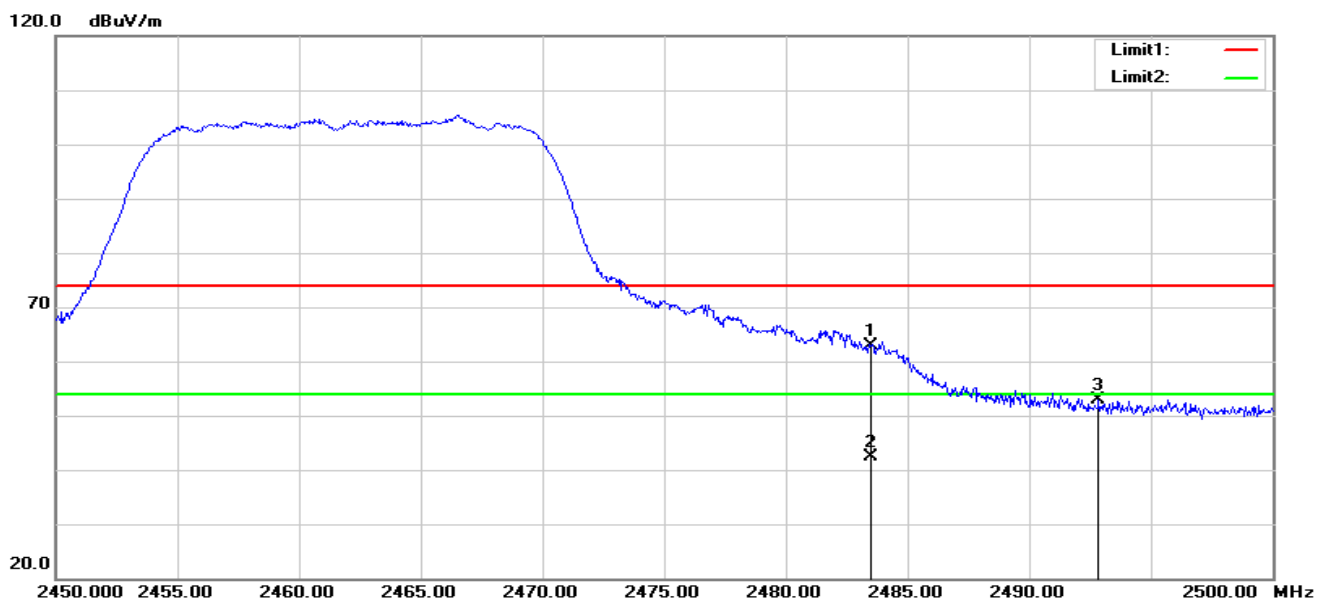

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2483.500           | 58.35             | 4.60                    | 62.95              | 74.00             | -11.05         | peak   |
| 2   | 2483.500           | 37.78             | 4.60                    | 42.38              | 54.00             | -11.62         | AVG    |
| 3   | 2492.850           | 48.27             | 4.64                    | 52.91              | 74.00             | -21.09         | peak   |

Vertical

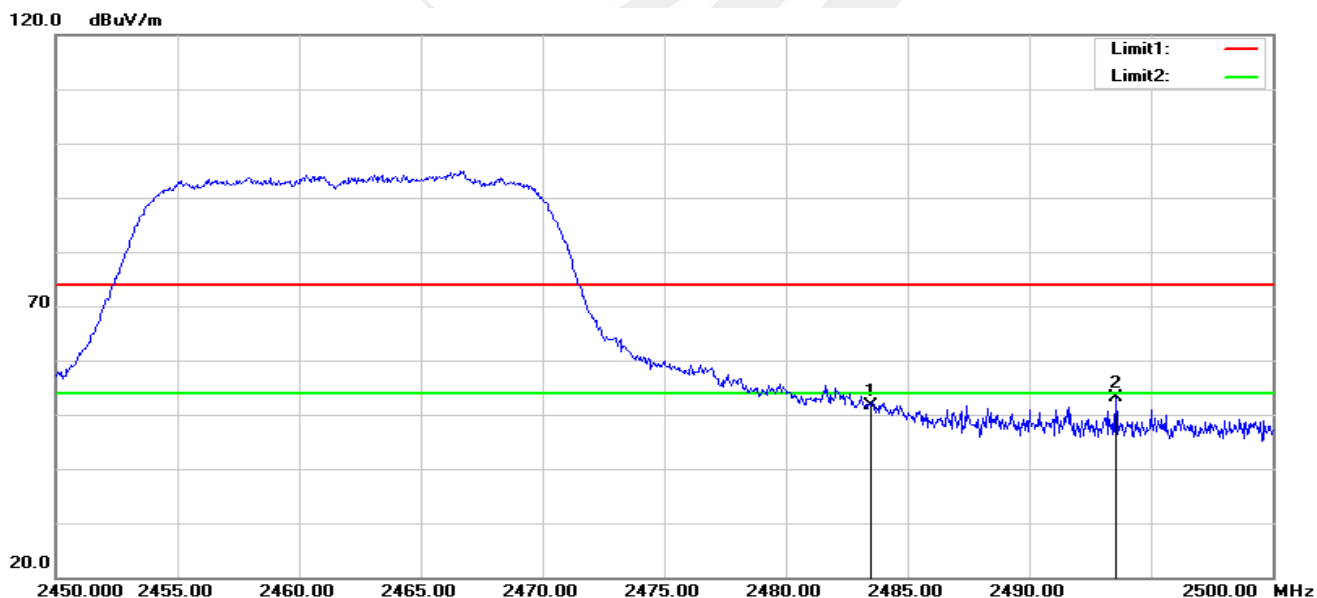

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2483.500           | 47.04             | 4.60                    | 51.64              | 74.00             | -22.36         | peak   |
| 2   | 2493.550           | 48.55             | 4.64                    | 53.19              | 74.00             | -20.81         | peak   |

Note: 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40) mode all have been tested, the worst case is 802.11 n(HT20), only show the worst case.

## 4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 4.1 LIMIT

According to FCC section 15.247(d)&RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

| Spectrum Parameter                    | Setting                         |
|---------------------------------------|---------------------------------|
| Detector                              | Peak                            |
| Start/Stop Frequency                  | 30 MHz to 10th carrier harmonic |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                 |
| Trace-Mode:                           | Max hold                        |

For Band edge

| Spectrum Parameter                    | Setting                                                                |
|---------------------------------------|------------------------------------------------------------------------|
| Detector                              | Peak                                                                   |
| Start/Stop Frequency                  | Lower Band Edge: 2300 to 2432 MHz<br>Upper Band Edge: 2442 to 2500 MHz |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz                                                        |
| Trace-Mode:                           | Max hold                                                               |

### 4.3DEVIATION FROM STANDARD

No deviation.

### 4.4 TEST SETUP



The EUT which is powered by the Adapter, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 4.5 EUT OPERATION CONDITIONS


Please refer to section 3.1.4 of this report.




## 4.6 TEST RESULTS

|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX b Mode /CH01, CH06, CH11 |

## CH 01

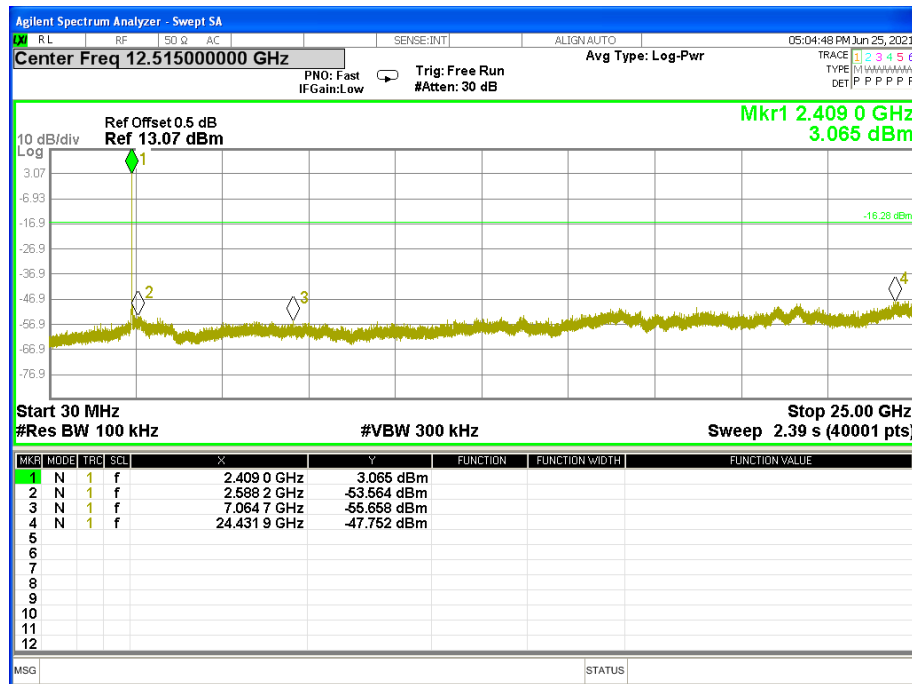


## CH 06

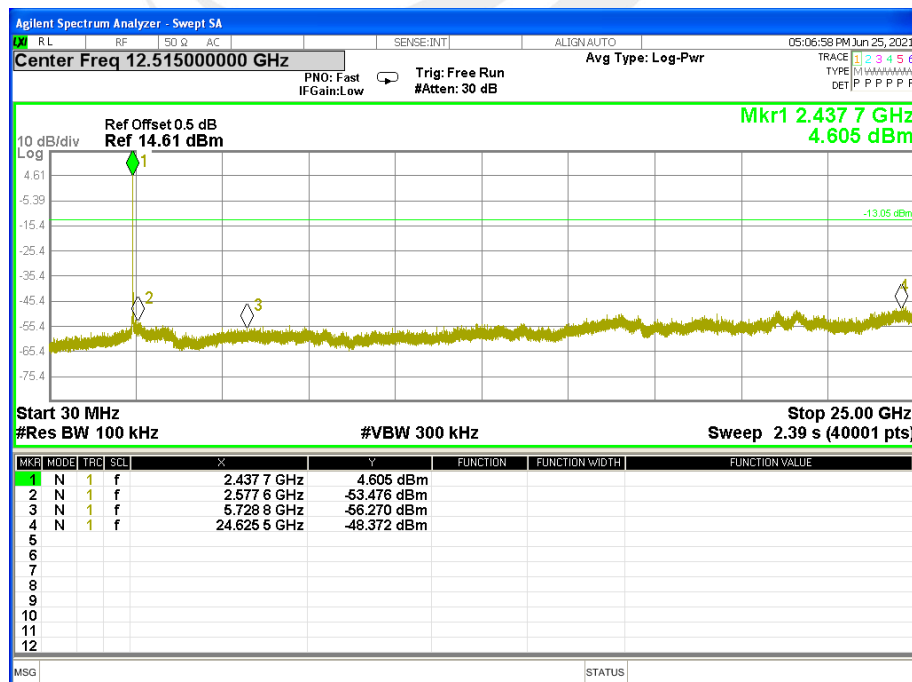




## CH 11

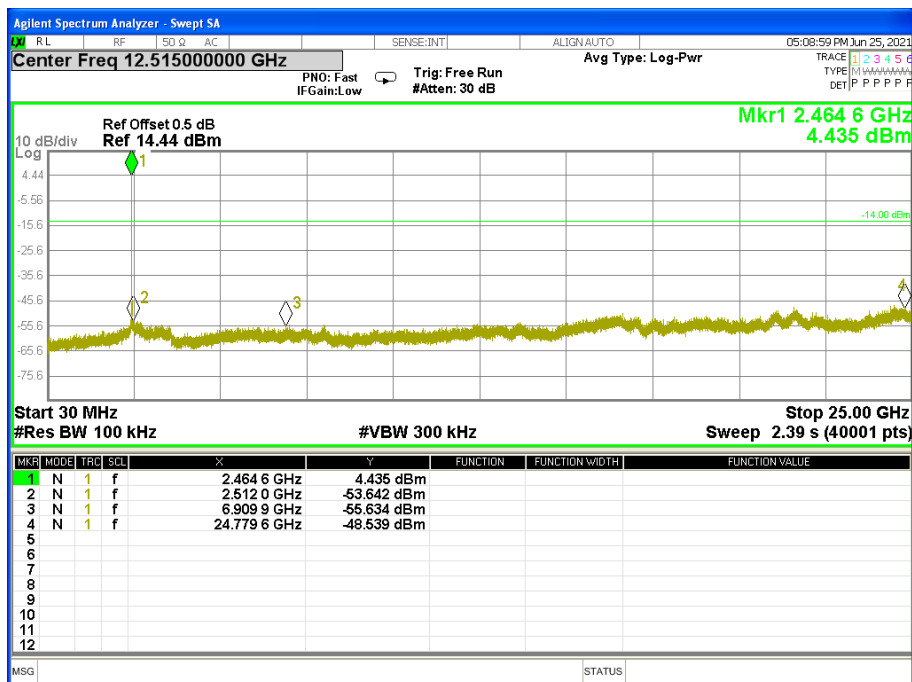




Band edge(it's also the reference level for conducted spurious emission)

### CH 01

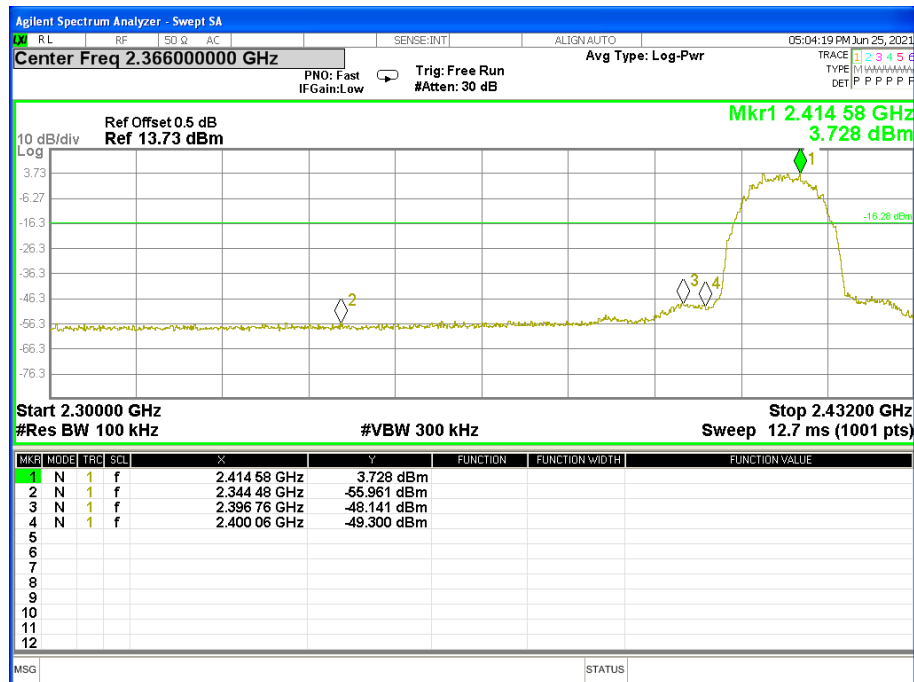


### CH 06

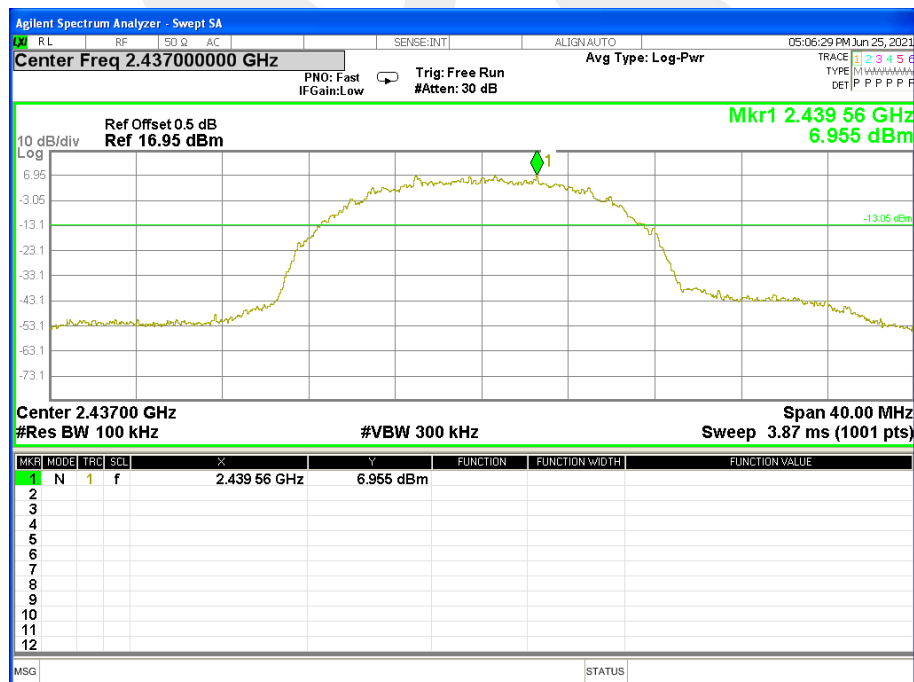




## CH 11

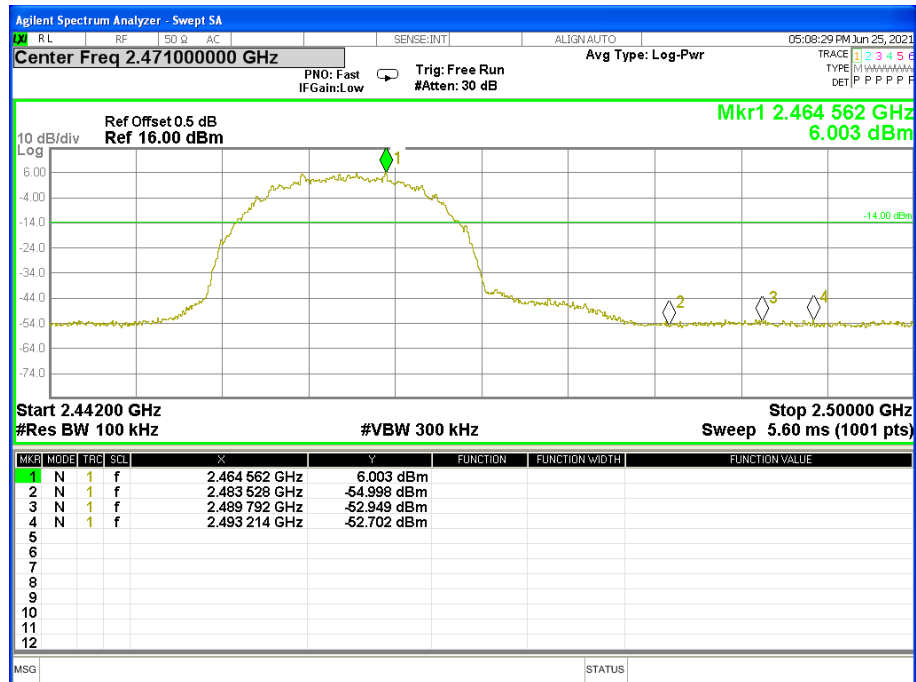




|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX g Mode /CH01, CH06, CH11 |

## CH 01

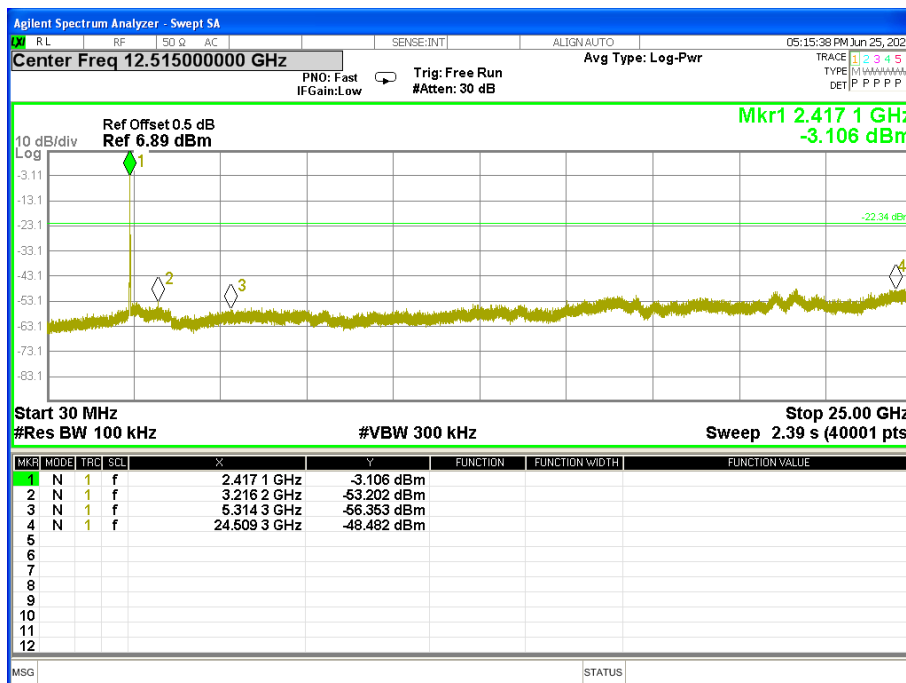


## CH06

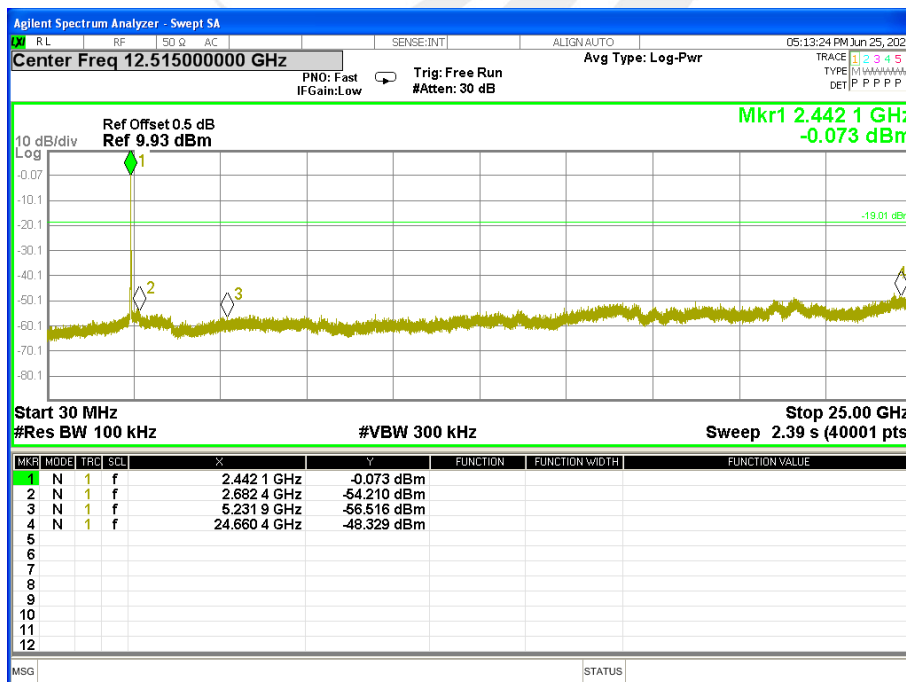




## CH 11

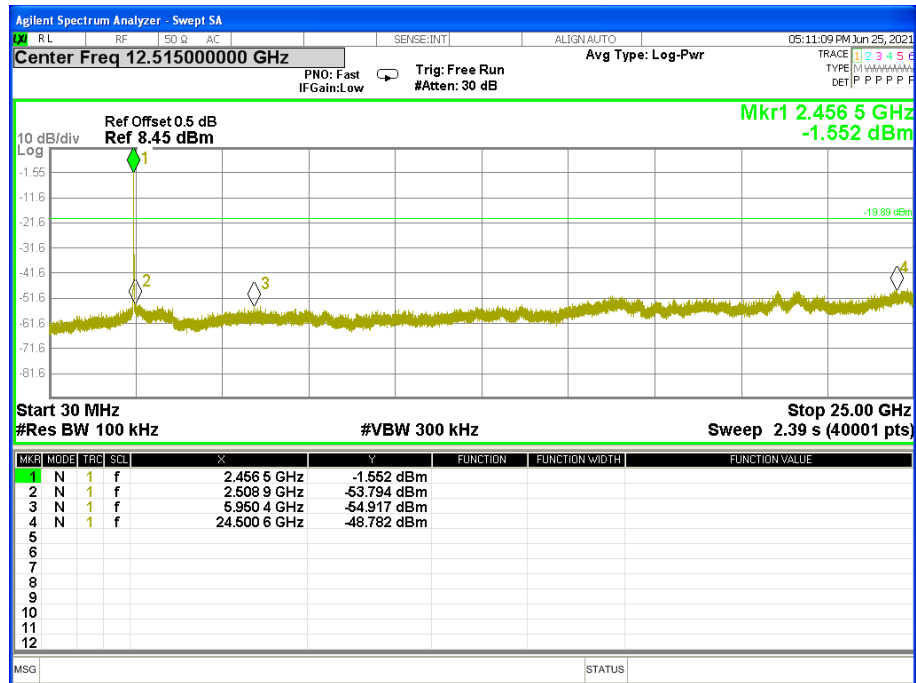




Band edge(it's also the reference level for conducted spurious emission)

### CH 01

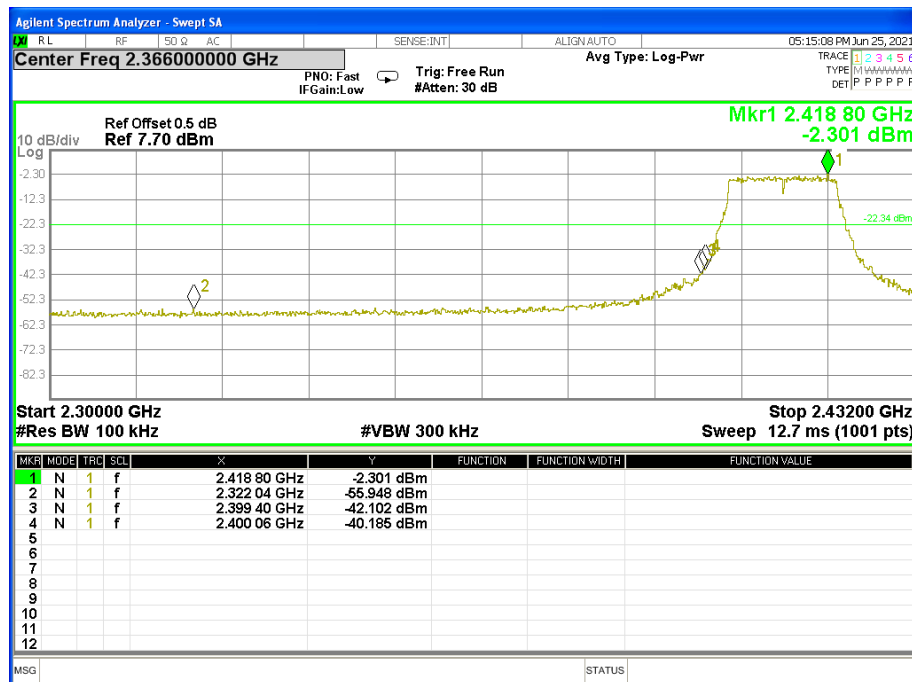


### CH06

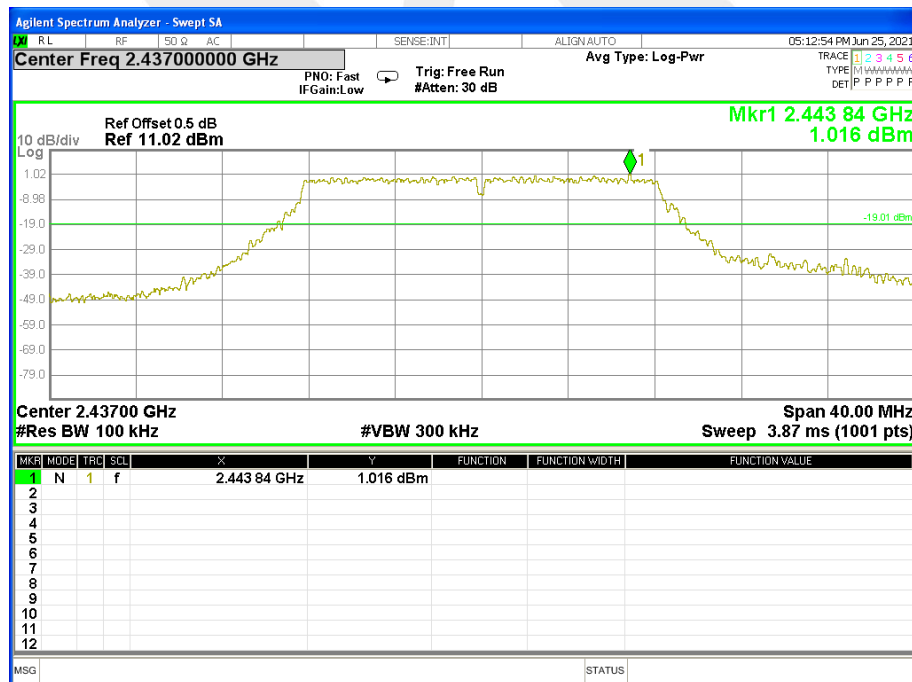




## CH11

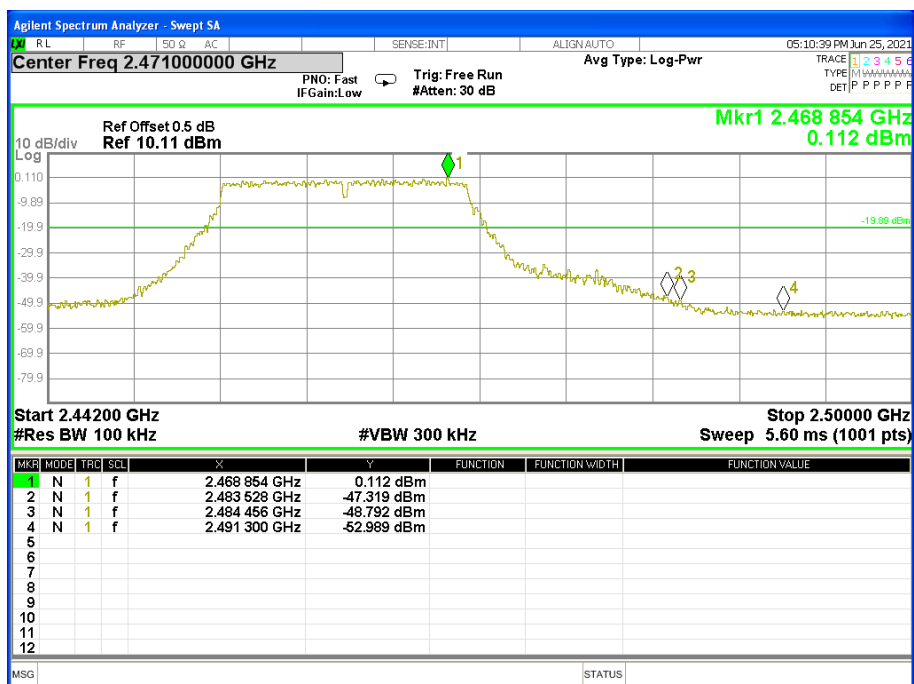




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(20M) /CH01, CH06, CH11 |

## CH 01

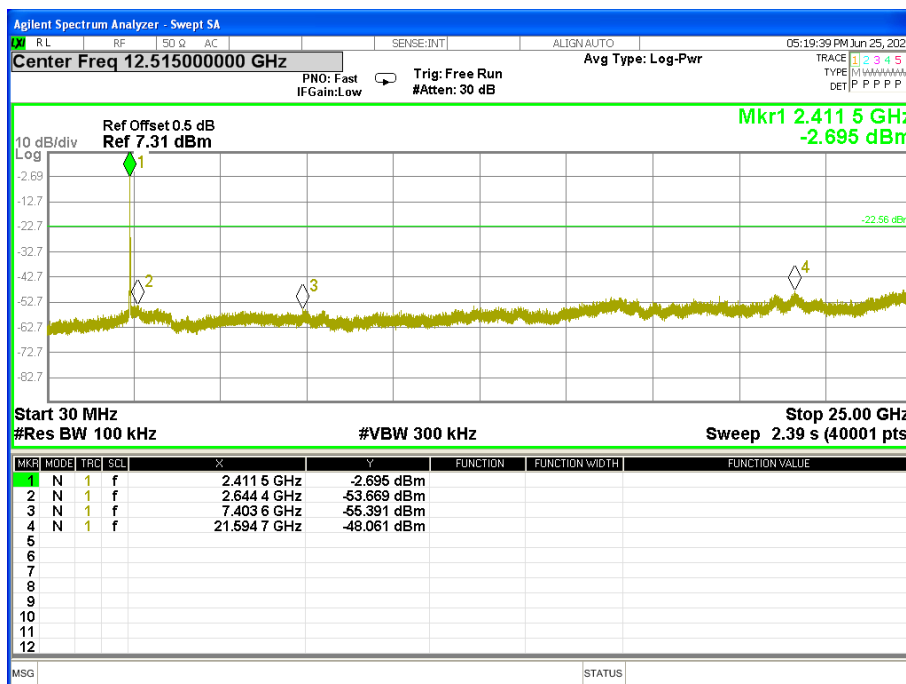


## CH 06

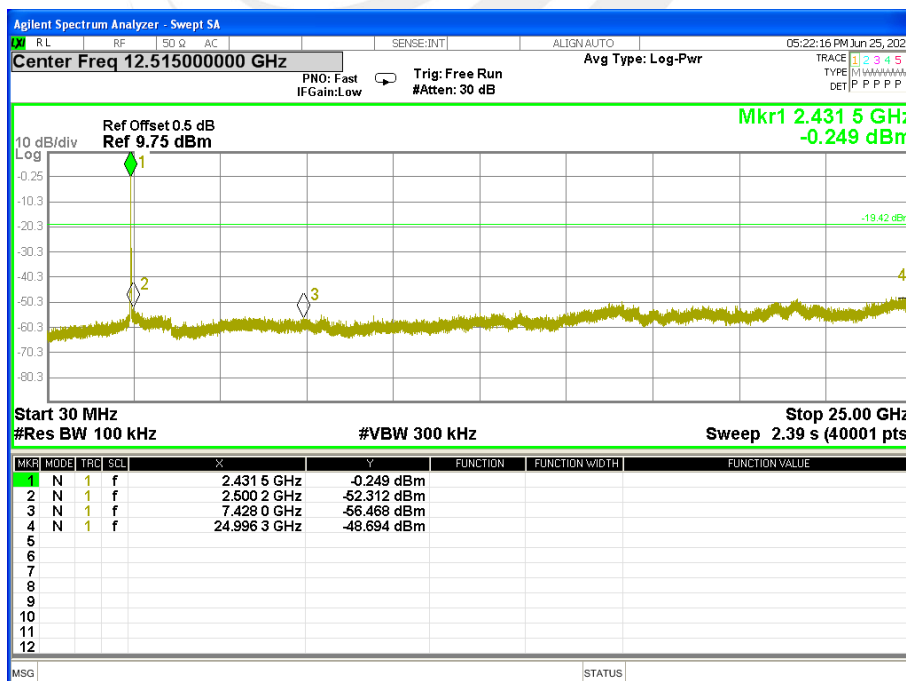




## CH 11

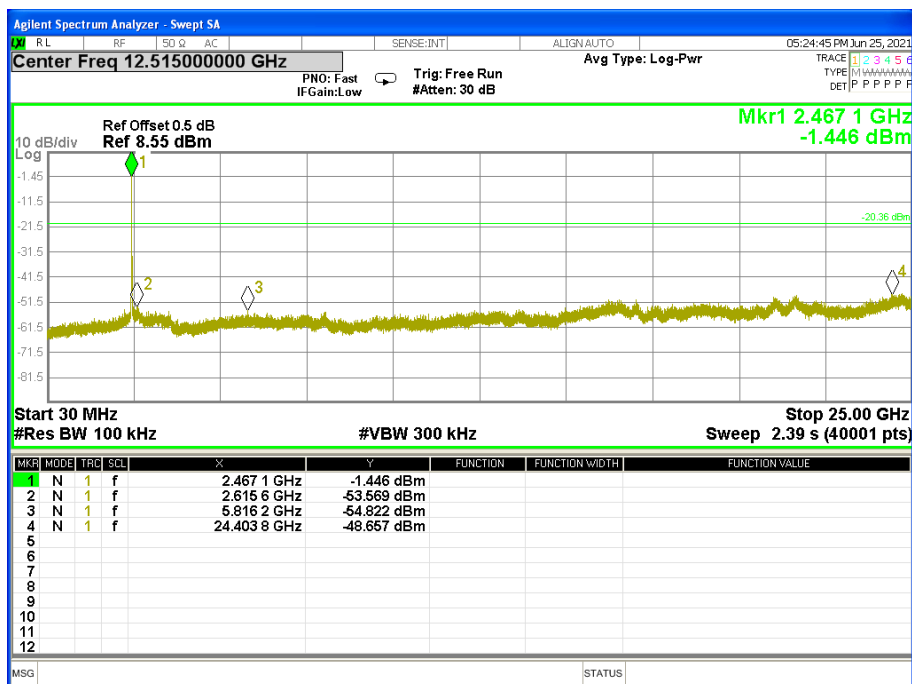




Band edge(it's also the reference level for conducted spurious emission)


### CH 01

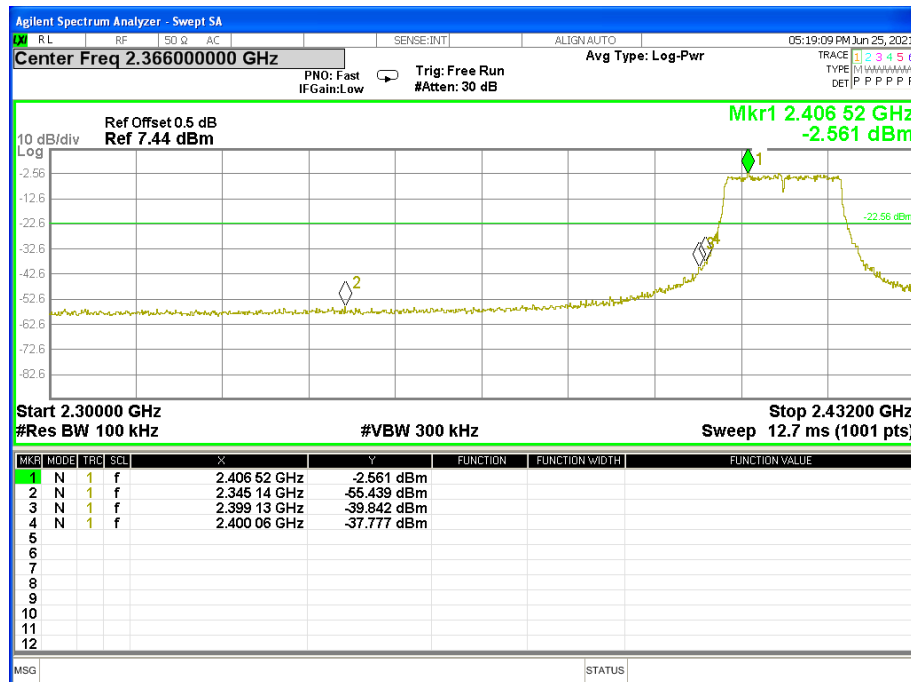

### CH 06

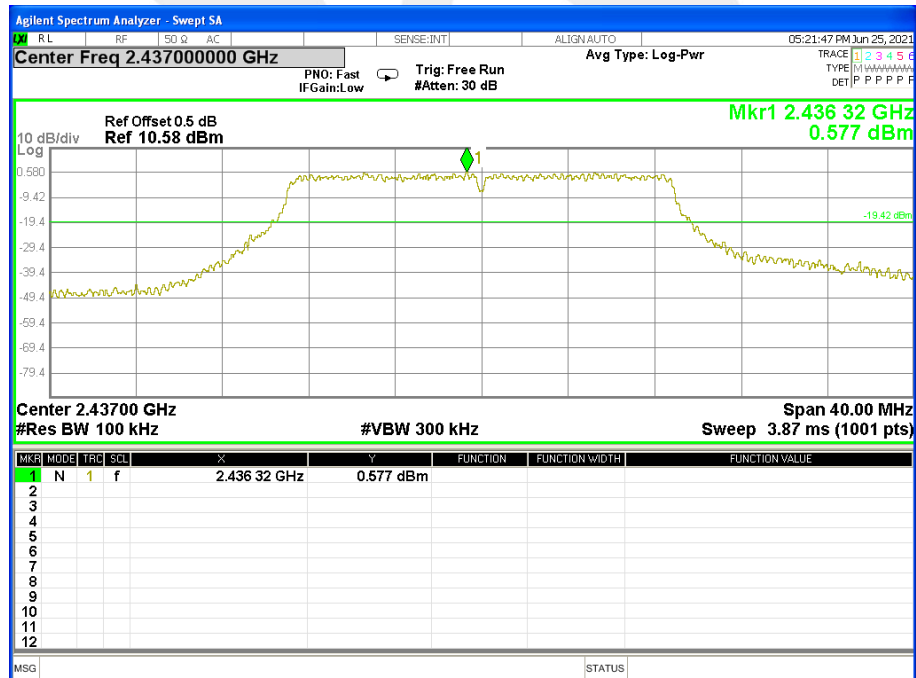


## CH 11

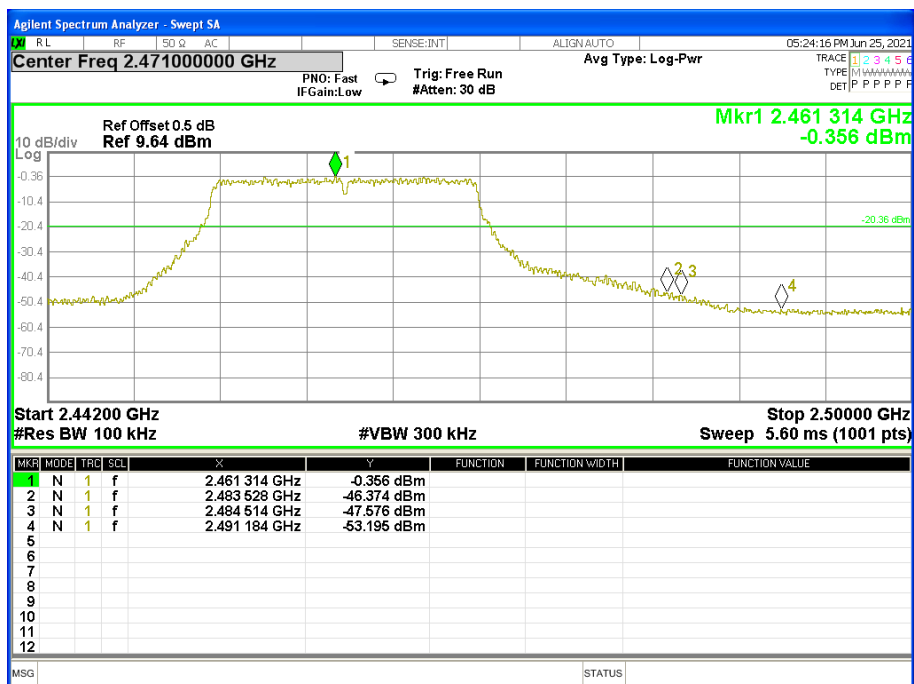




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(40M) /CH03, CH06, CH09 |

## CH 03

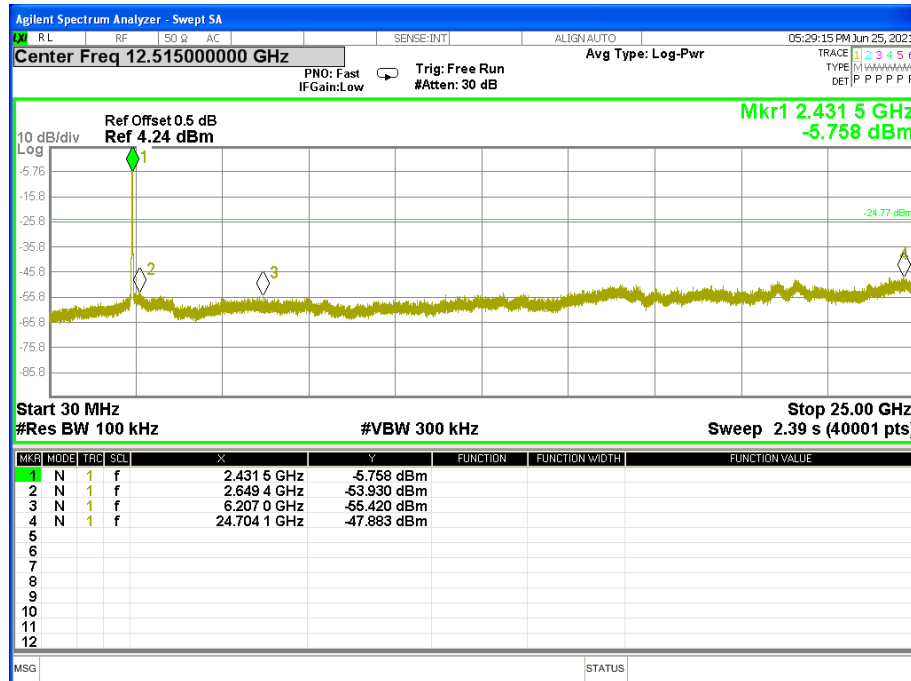




## CH06

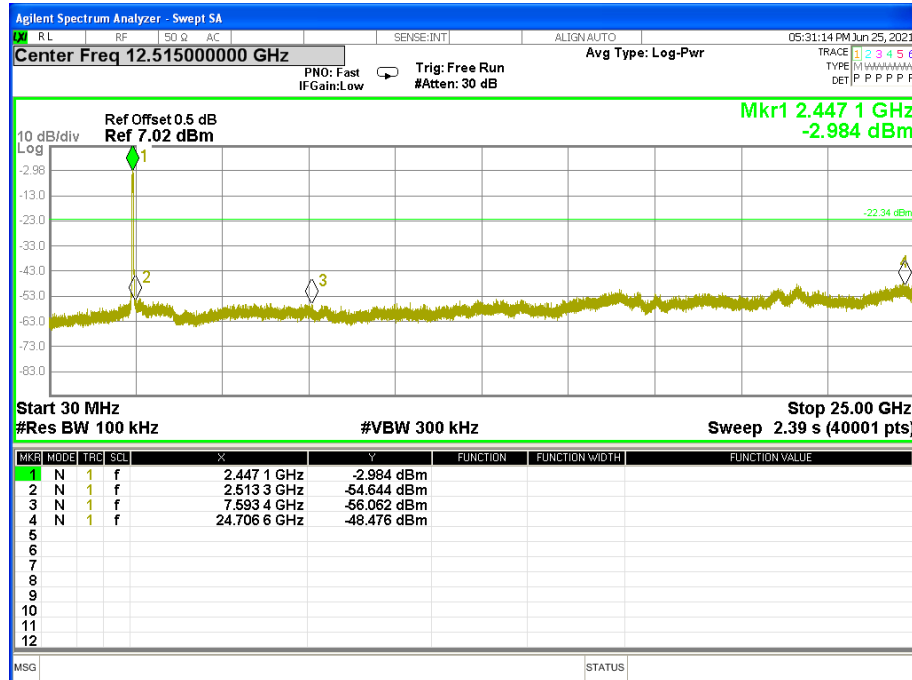


## CH09

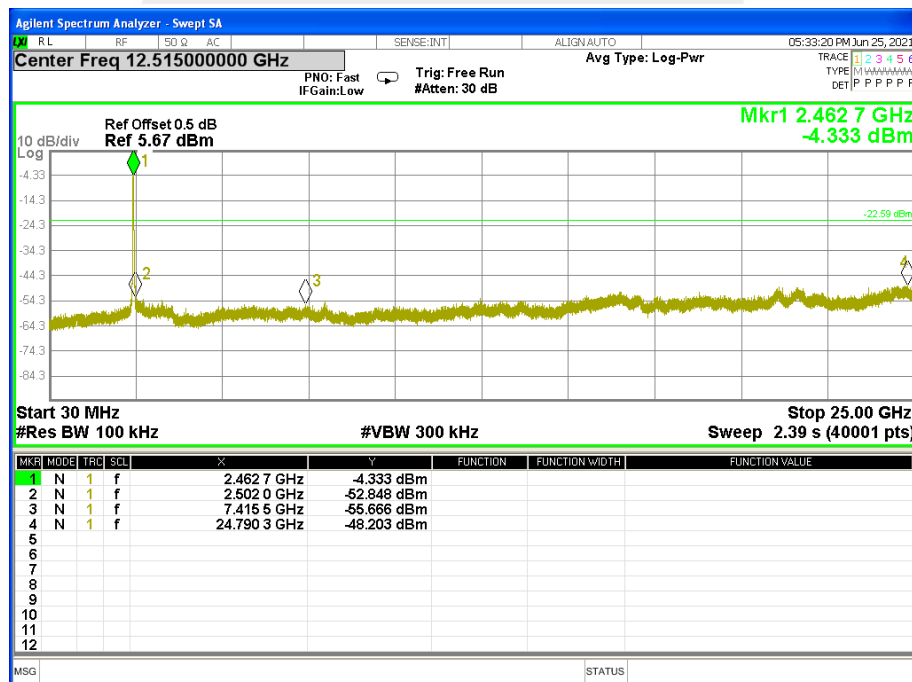




Band edge(it's also the reference level for conducted spurious emission)

### CH03

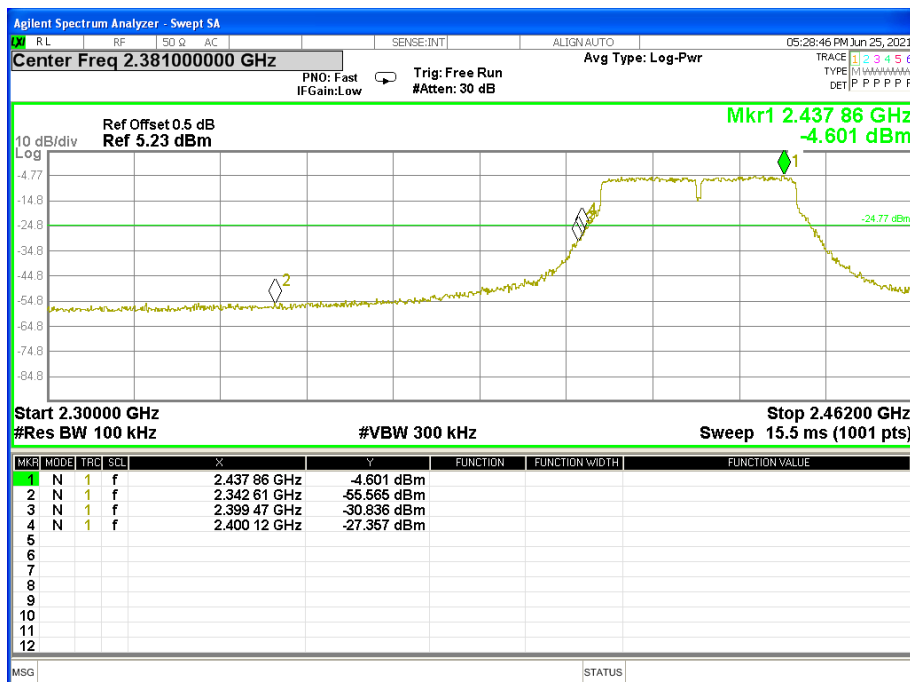


### CH 06

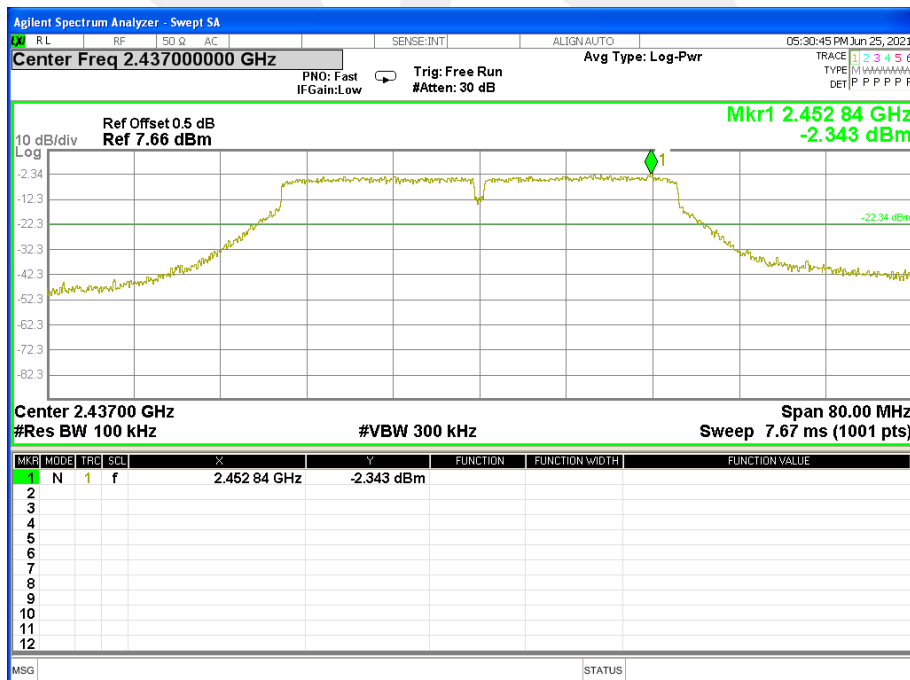



## CH 09

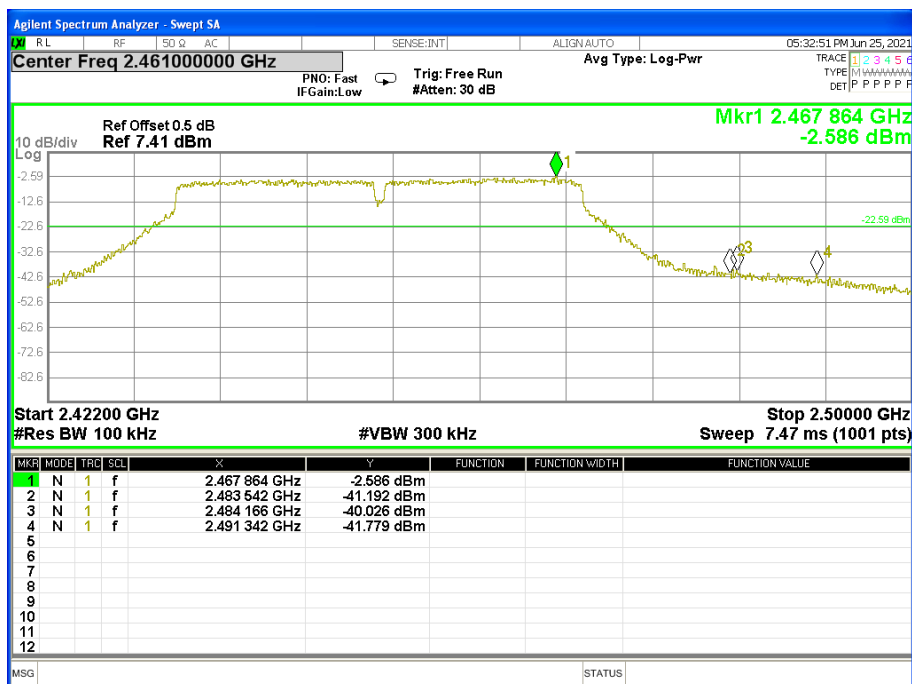



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 LIMIT

| FCC Part15.247 , Subpart C<br>RSS-247 Issue 2 |                        |                                    |                       |        |
|-----------------------------------------------|------------------------|------------------------------------|-----------------------|--------|
| Section                                       | Test Item              | Limit                              | Frequency Range (MHz) | Result |
| 15.247(e)<br>RSS-247 Issue 2                  | Power Spectral Density | $\leq 8$ dBm<br>(RBW $\geq 3$ KHz) | 2400-2483.5           | PASS   |

### 5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the  $\text{VBW} \geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




## 5.6 TEST RESULTS

|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX b Mode /CH01, CH06, CH11 |


| Frequency | Power Density | Limit (dBm/3KHz) | Result |
|-----------|---------------|------------------|--------|
|           | (dBm/3kHz)    |                  |        |
| 2412 MHz  | -12.005       | ≤8               | PASS   |
| 2437 MHz  | -9.302        | ≤8               | PASS   |
| 2462 MHz  | -9.859        | ≤8               | PASS   |

## TX CH01

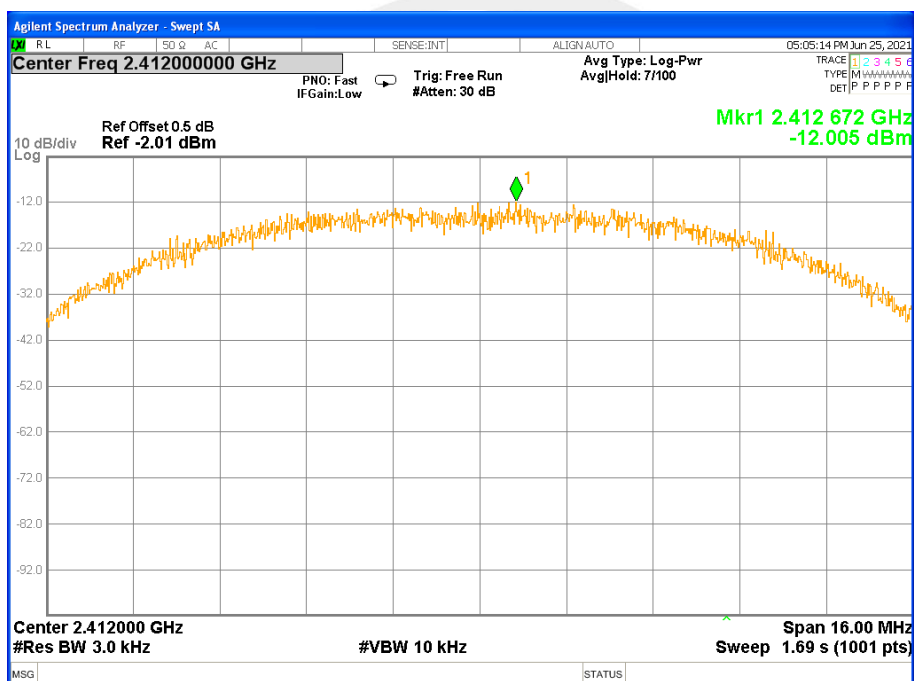




## TX CH06

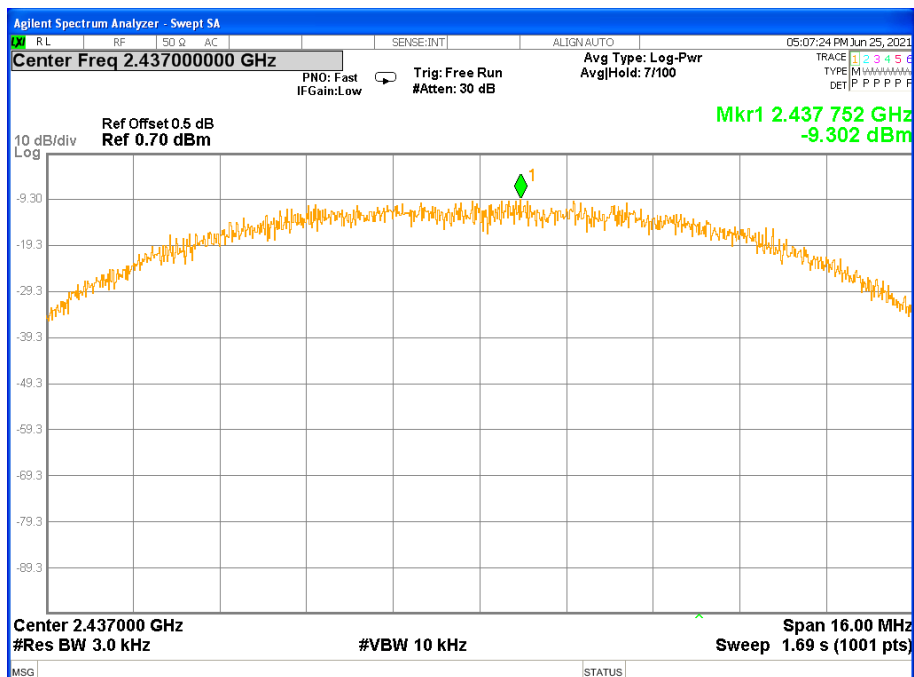

## TX CH11

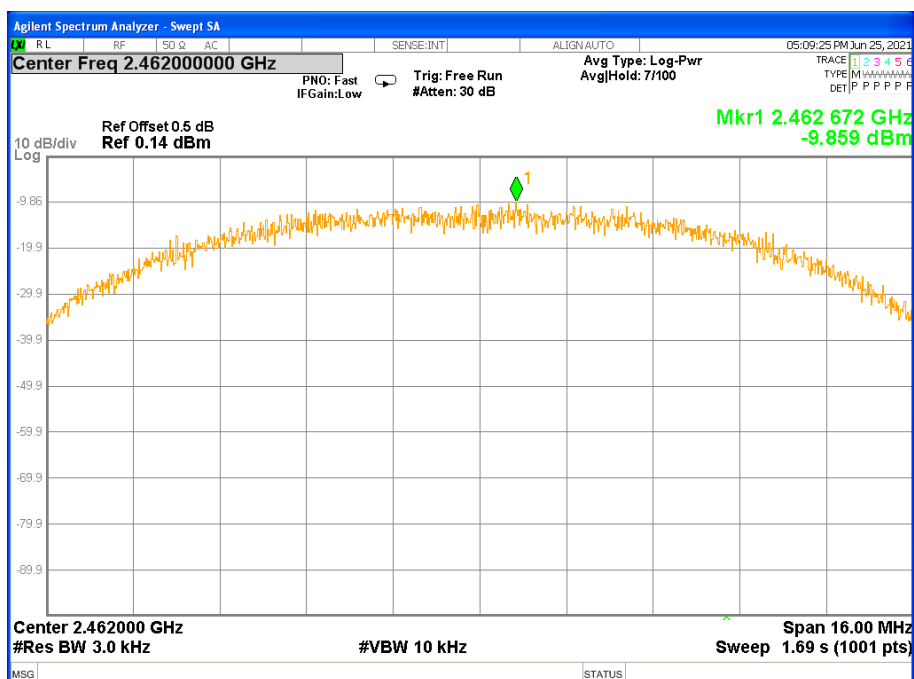




|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX g Mode /CH01, CH06, CH11 |


| Frequency | Power Density | Limit (dBm/3KHz) | Result |
|-----------|---------------|------------------|--------|
|           | (dBm/3kHz)    |                  |        |
| 2412 MHz  | -17.4560      | ≤8               | PASS   |
| 2437 MHz  | -14.2110      | ≤8               | PASS   |
| 2462 MHz  | -15.2460      | ≤8               | PASS   |

## TX CH01

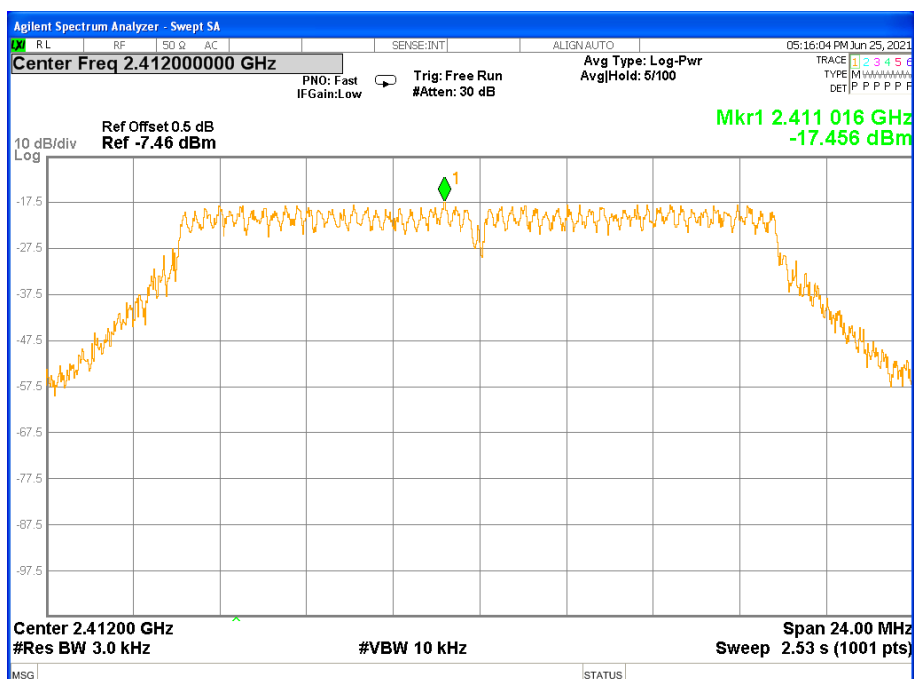




## TX CH06

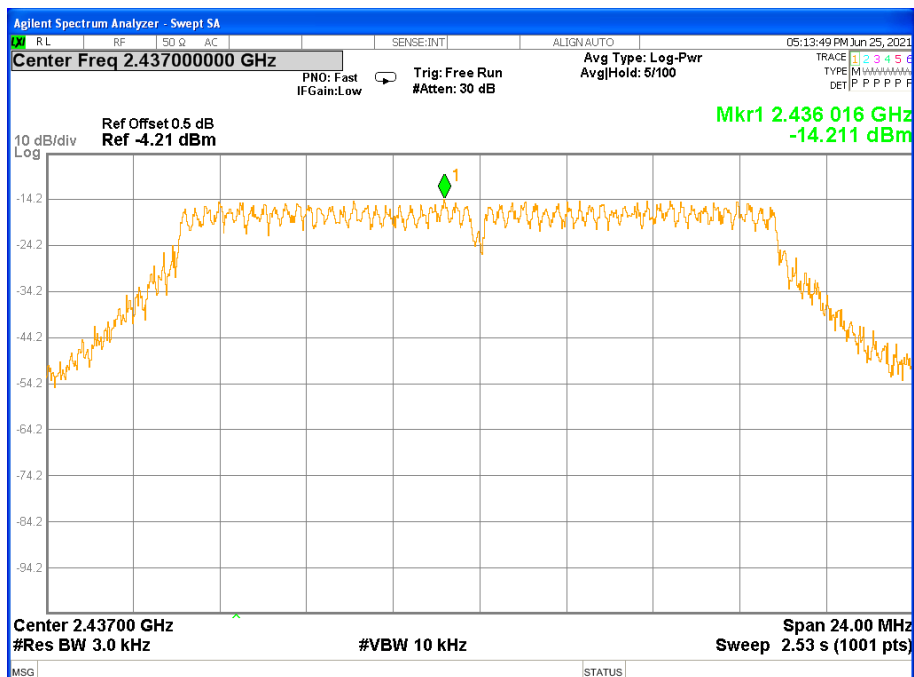

## TX CH11

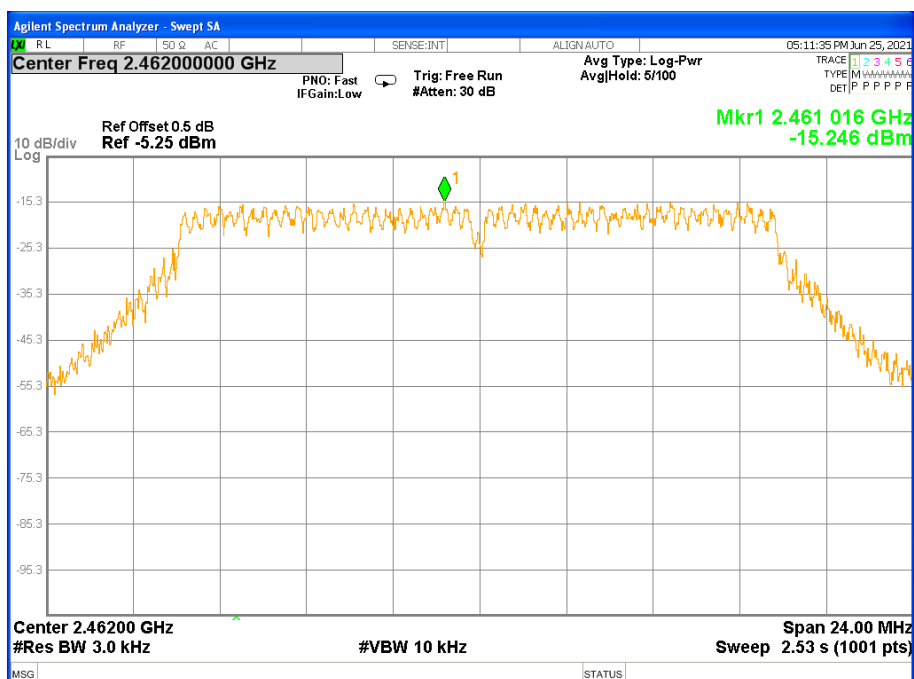




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(20M) /CH01, CH06, CH11 |


| Frequency | Power Density | Limit (dBm/3KHz) | Result |
|-----------|---------------|------------------|--------|
|           | (dBm/3kHz)    |                  |        |
| 2412 MHz  | -17.4500      | ≤8               | PASS   |
| 2437 MHz  | -14.3640      | ≤8               | PASS   |
| 2462 MHz  | -15.0430      | ≤8               | PASS   |

## TX CH01

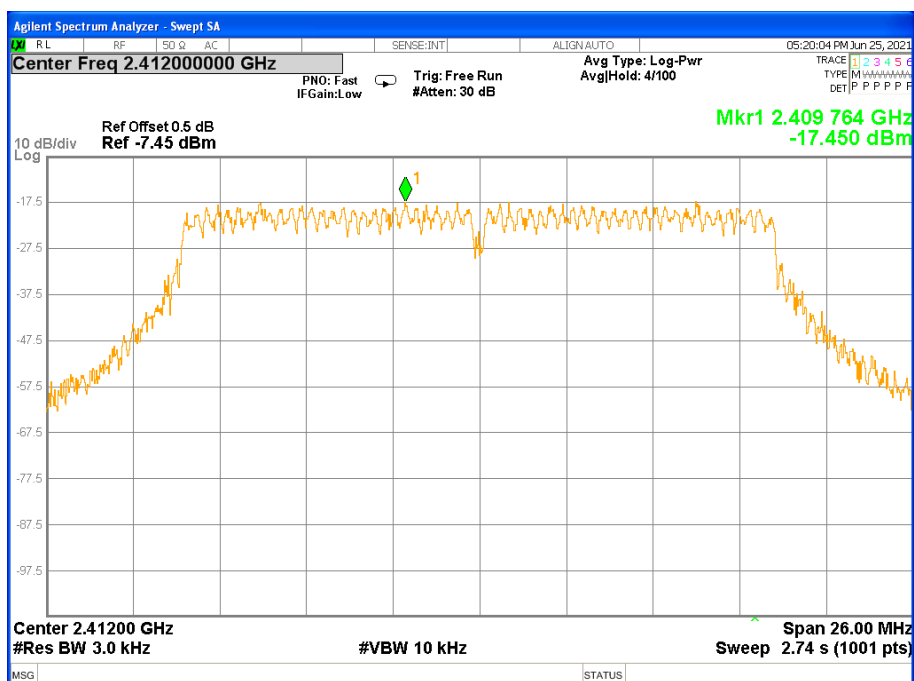




## TX CH06

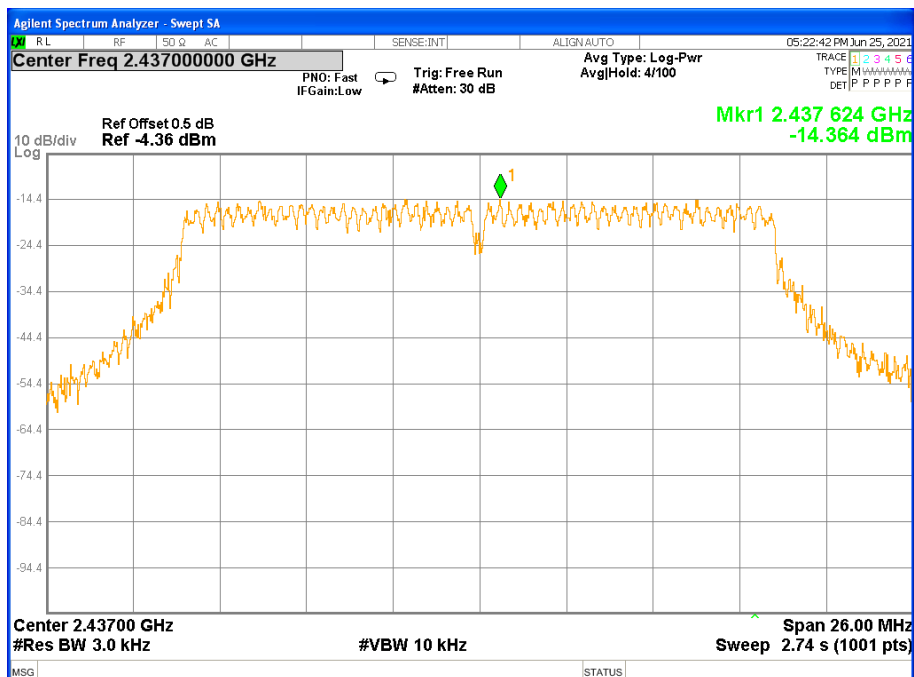

## TX CH11

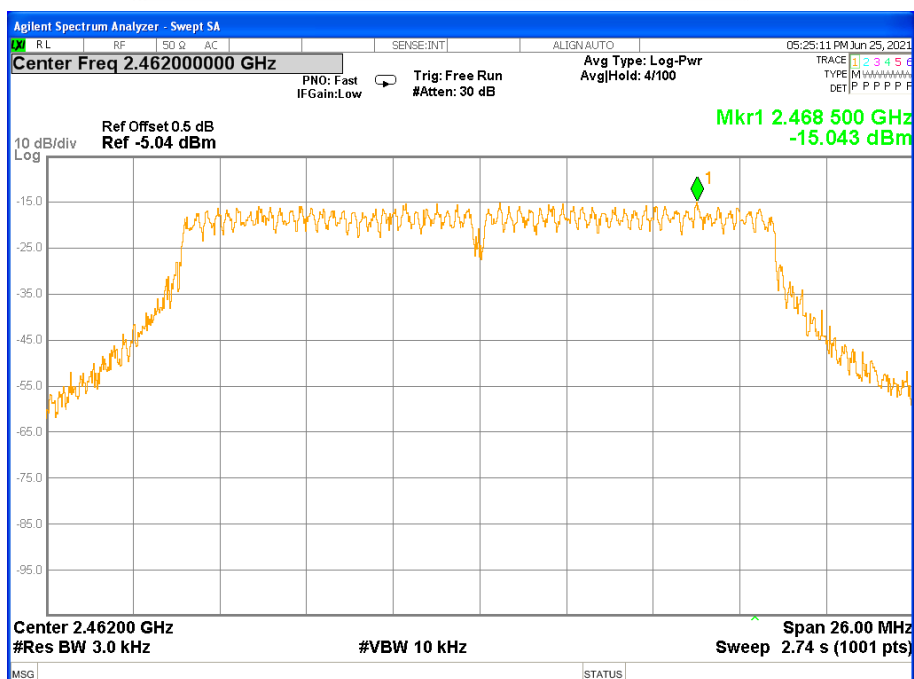




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(40M) /CH03, CH06, CH09 |


| Frequency | Power Density | Limit (dBm/3KHz) | Result |
|-----------|---------------|------------------|--------|
|           | (dBm/3kHz)    |                  |        |
| 2422 MHz  | -18.8750      | ≤8               | PASS   |
| 2437 MHz  | -15.6530      | ≤8               | PASS   |
| 2452 MHz  | -16.3060      | ≤8               | PASS   |

## TX CH03

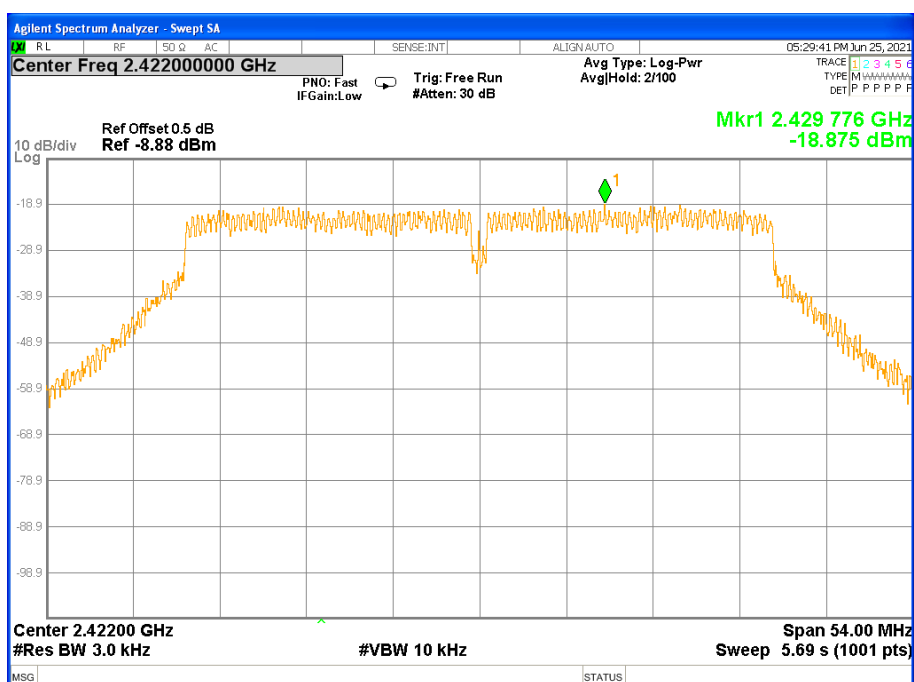




## TX CH06

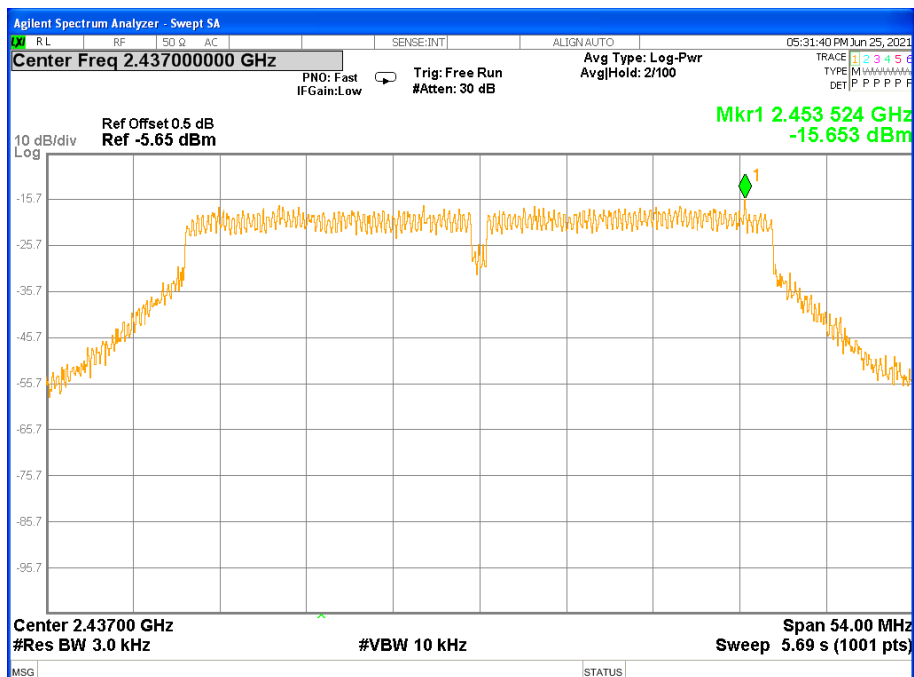

## TX CH09

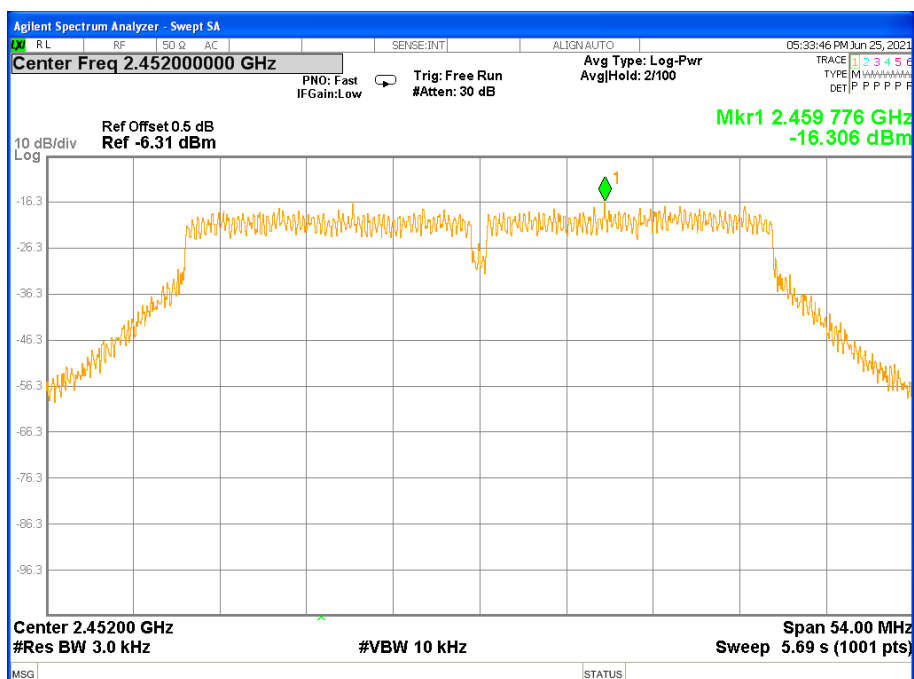



## 6. BANDWIDTH TEST

### 6.1 LIMIT

| FCC Part15.247,Subpart C<br>RSS-Gen Clause 6.7 |                  |                                         |                       |        |
|------------------------------------------------|------------------|-----------------------------------------|-----------------------|--------|
| Section                                        | Test Item        | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)<br>RSS-247 5.2 (a)                | Bandwidth        | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |
| RSS-Gen Clause<br>6.7                          | 99%<br>Bandwidth | For reporting<br>purposes only.         | 2400-2483.5           | PASS   |

### 6.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

|                  |                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------|
| Center Frequency | The centre frequency of the channel under test                                                            |
| Detector         | Peak                                                                                                      |
| RBW              | For 6 dB Bandwidth :100KHz<br>For 99% Bandwidth :1% to 5% of the occupied bandwidth                       |
| VBW              | For 6dB Bandwidth : $\geq 3 \times \text{RBW}$<br>For 99% Bandwidth : approximately $3 \times \text{RBW}$ |
| Trace            | Max hold                                                                                                  |
| Sweep            | Auto                                                                                                      |

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




## 6.6 TEST RESULTS

|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX b Mode /CH01, CH06, CH11 |

Remark: PEAK DETECTOR IS USED


| Frequency | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|---------------------|---------------------|-------------|--------|
| 2412 MHz  | 10.070              | 12.925              | ≥500KHz     | PASS   |
| 2437 MHz  | 10.070              | 12.916              | ≥500KHz     | PASS   |
| 2462 MHz  | 10.070              | 12.909              | ≥500KHz     | PASS   |

## 6dB Bandwidth TX CH 01

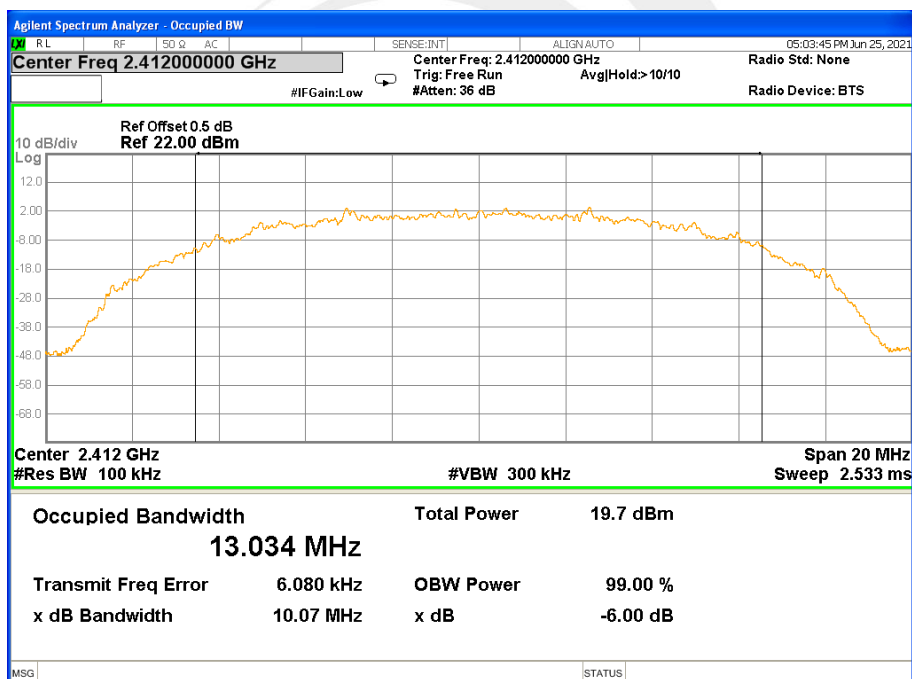




## 6dB Bandwidth TX CH 06

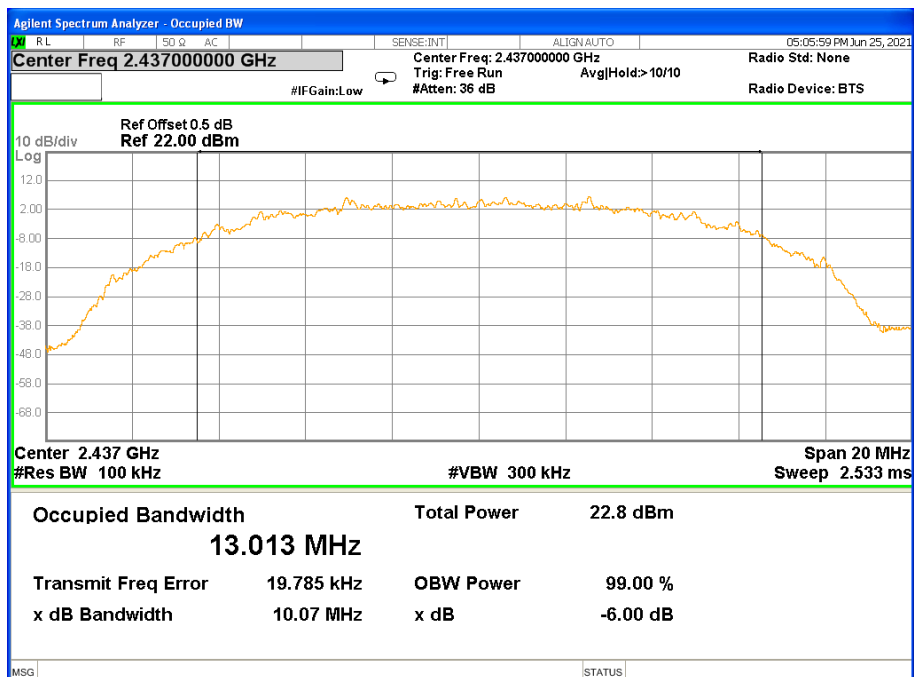


## 6dB Bandwidth TX CH 11

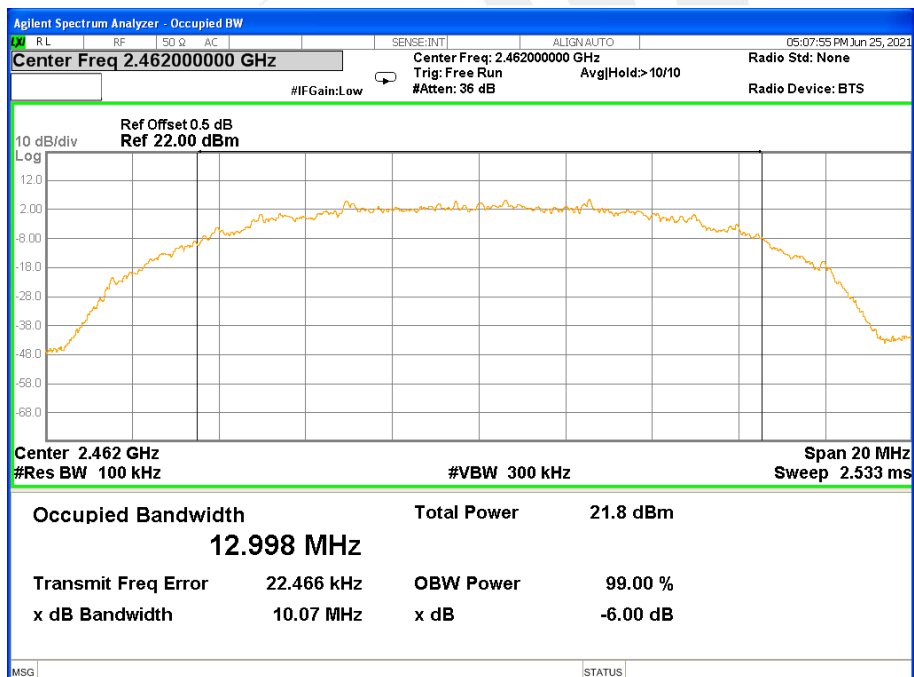




## 99% Bandwidth TX CH 01

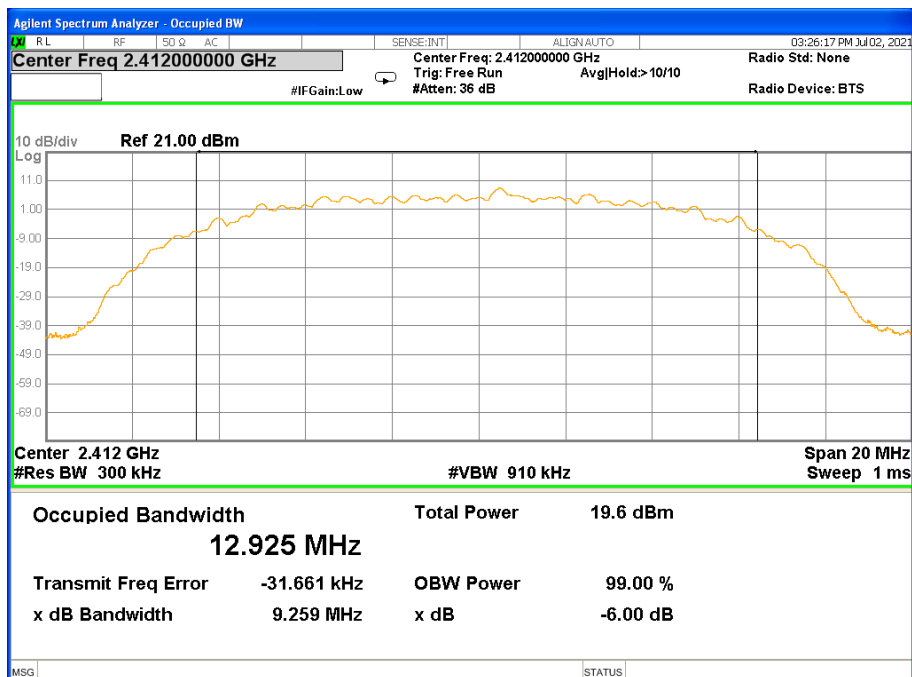


## 99% Bandwidth TX CH 06

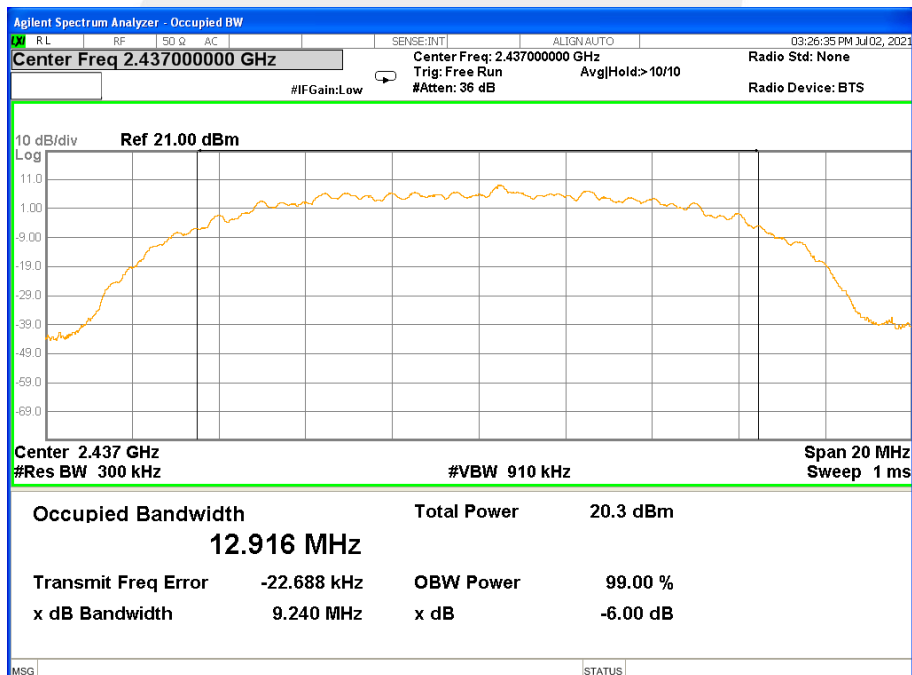



## 99% Bandwidth TX CH 11

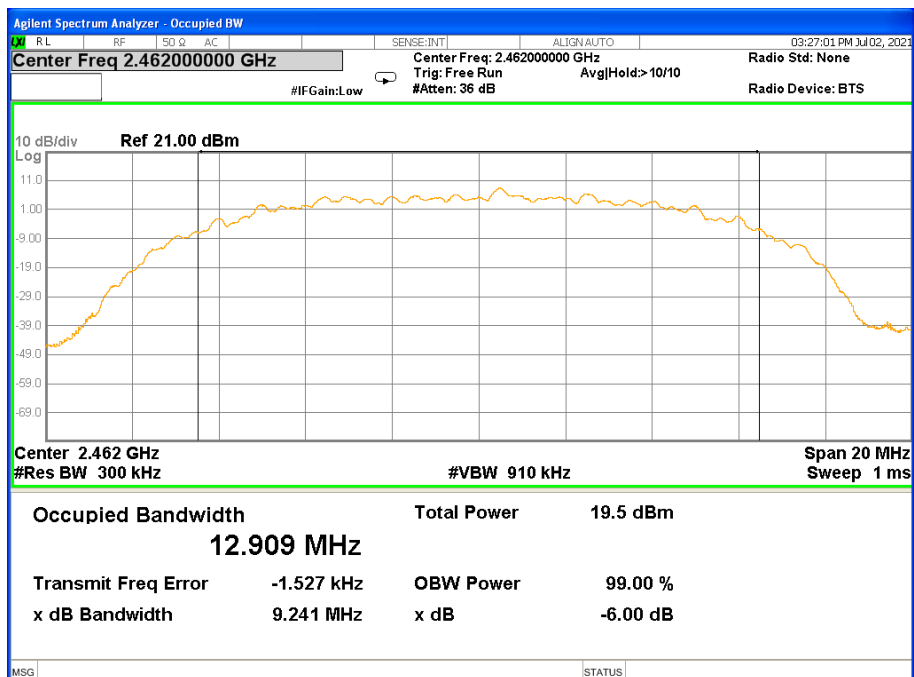




|               |              |                    |                             |
|---------------|--------------|--------------------|-----------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                         |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX g Mode /CH01, CH06, CH11 |


| Frequency | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|---------------------|---------------------|-------------|--------|
| 2412 MHz  | 16.49               | 16.15               | ≥500KHz     | PASS   |
| 2437 MHz  | 16.48               | 16.15               | ≥500KHz     | PASS   |
| 2462 MHz  | 16.47               | 16.15               | ≥500KHz     | PASS   |

### 6dB Bandwidth TX CH 01

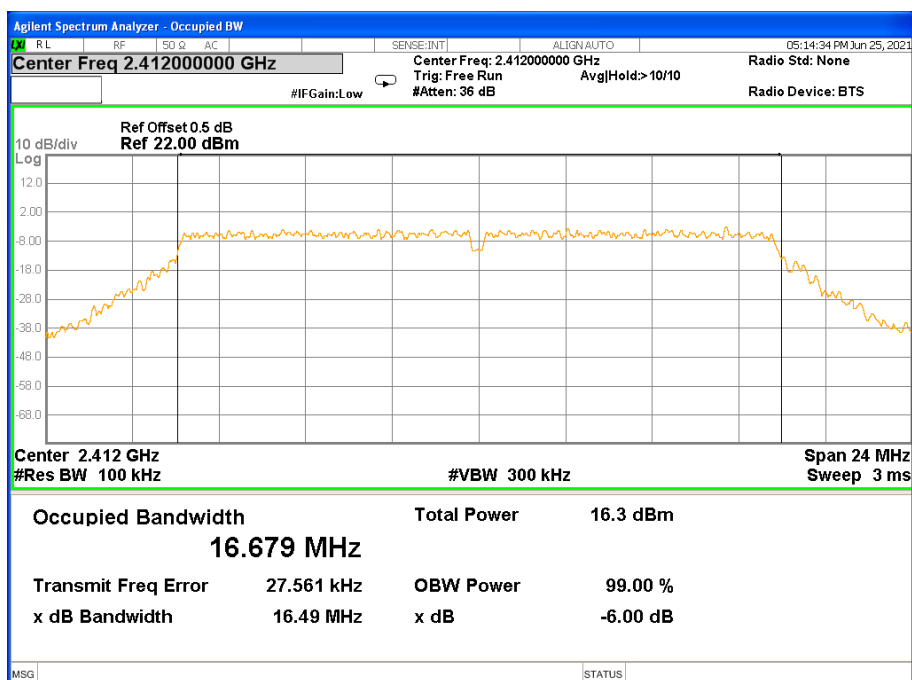




## 6dB Bandwidth TX CH 06

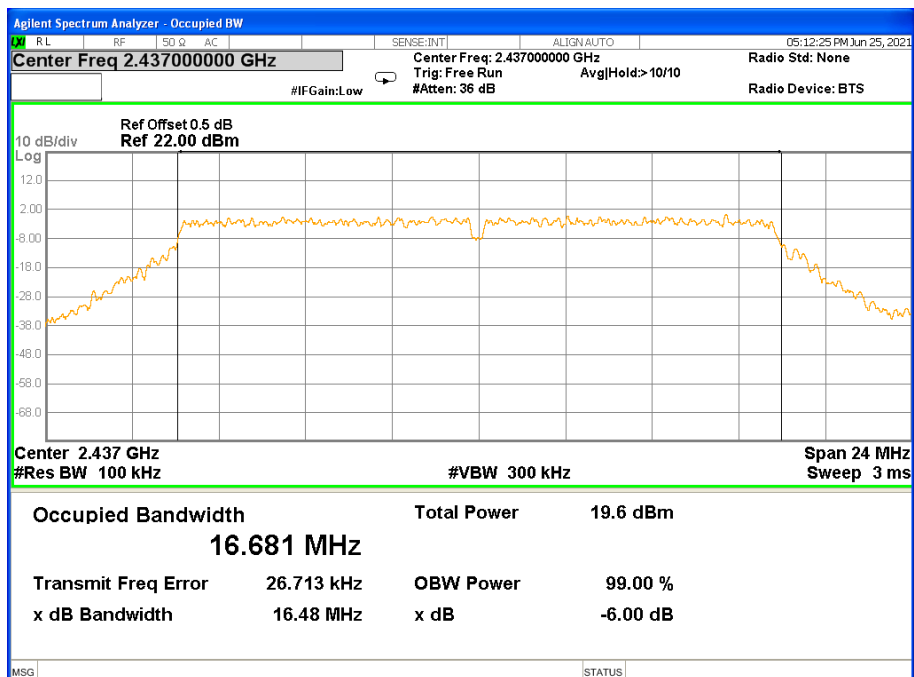


## 6dB Bandwidth TX CH 11

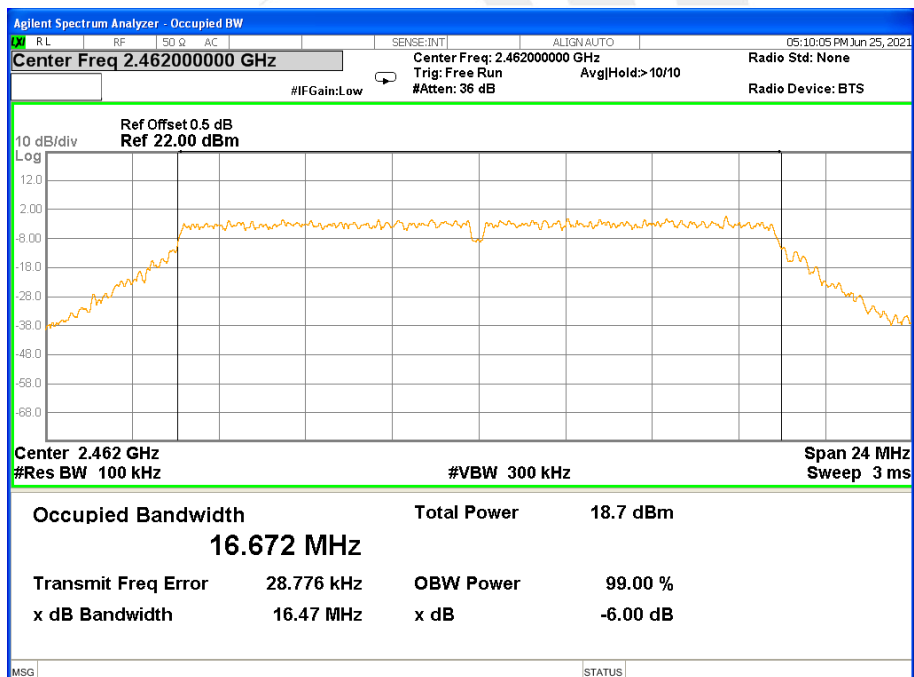




## 99% Bandwidth TX CH 01

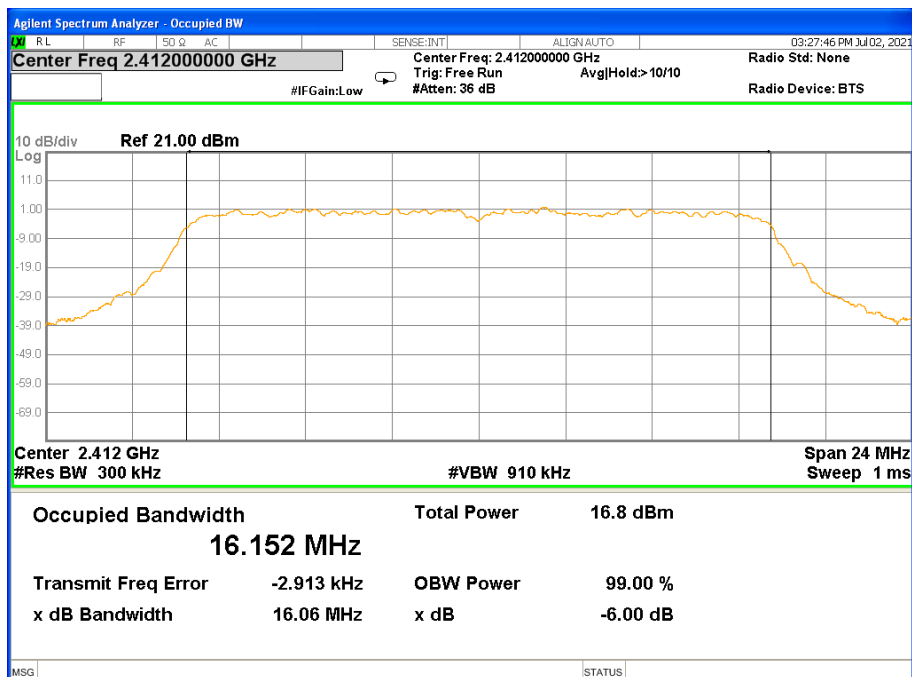


## 99% Bandwidth TX CH 06

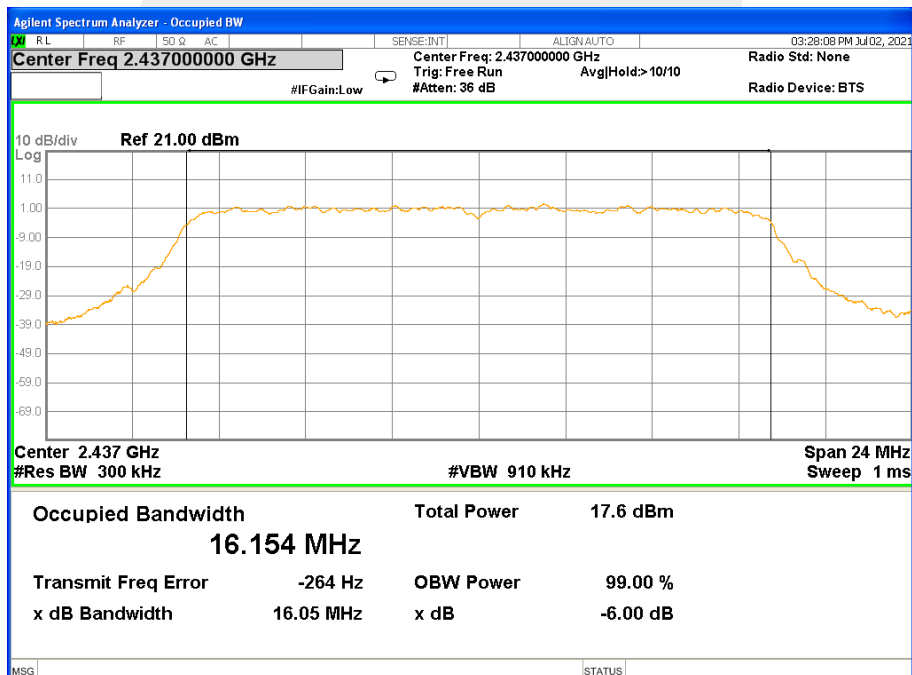



## 99% Bandwidth TX CH 11

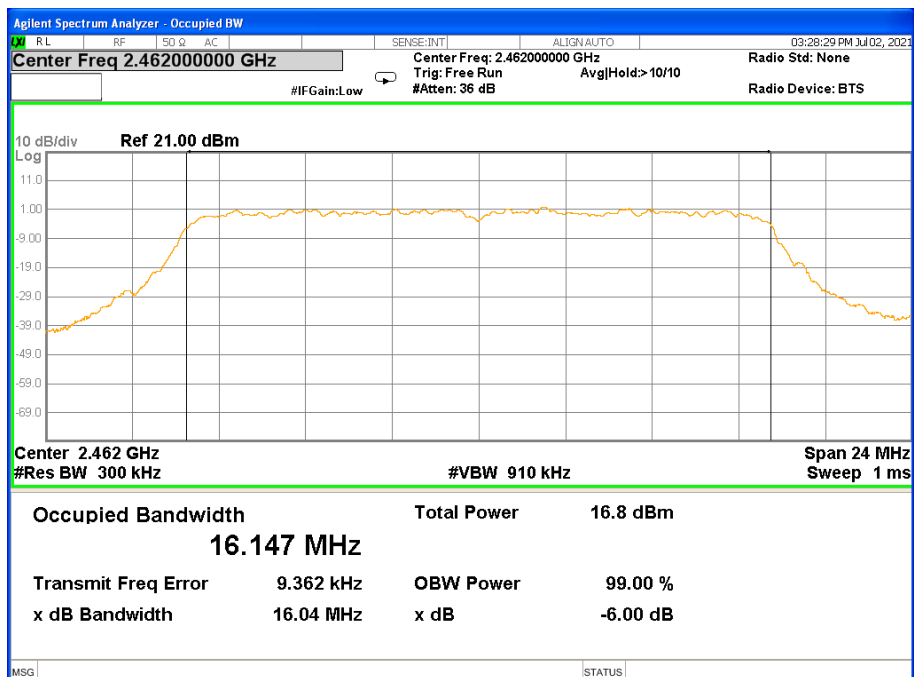




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(20M) /CH01, CH06, CH11 |


| Frequency | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|---------------------|---------------------|-------------|--------|
| 2412 MHz  | 17.71               | 16.79               | ≥500KHz     | PASS   |
| 2437 MHz  | 17.70               | 16.79               | ≥500KHz     | PASS   |
| 2462 MHz  | 17.70               | 16.78               | ≥500KHz     | PASS   |

### 6dB Bandwidth TX CH 01

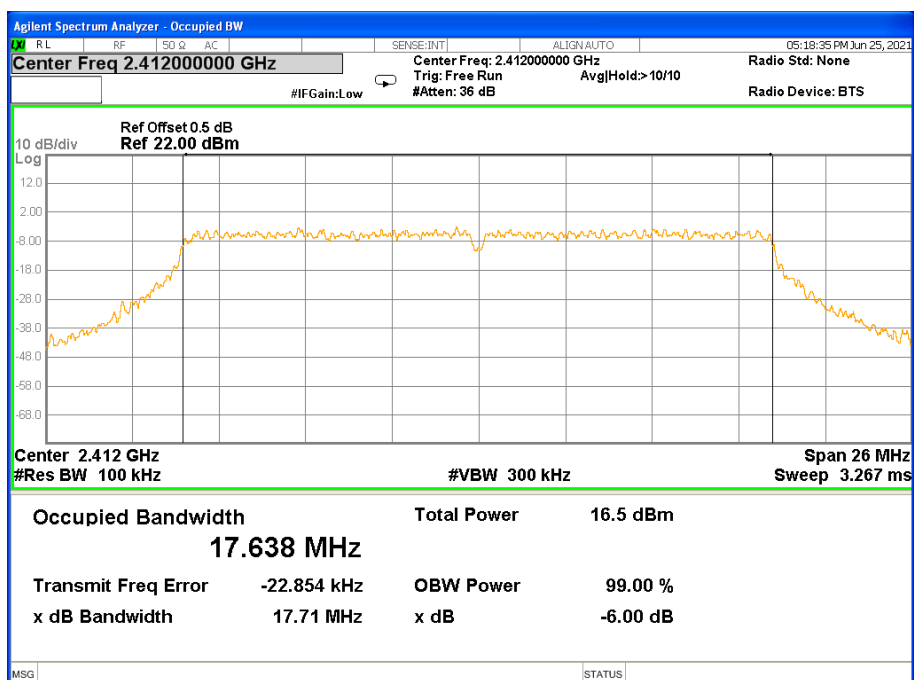




## 6dB Bandwidth TX CH 06

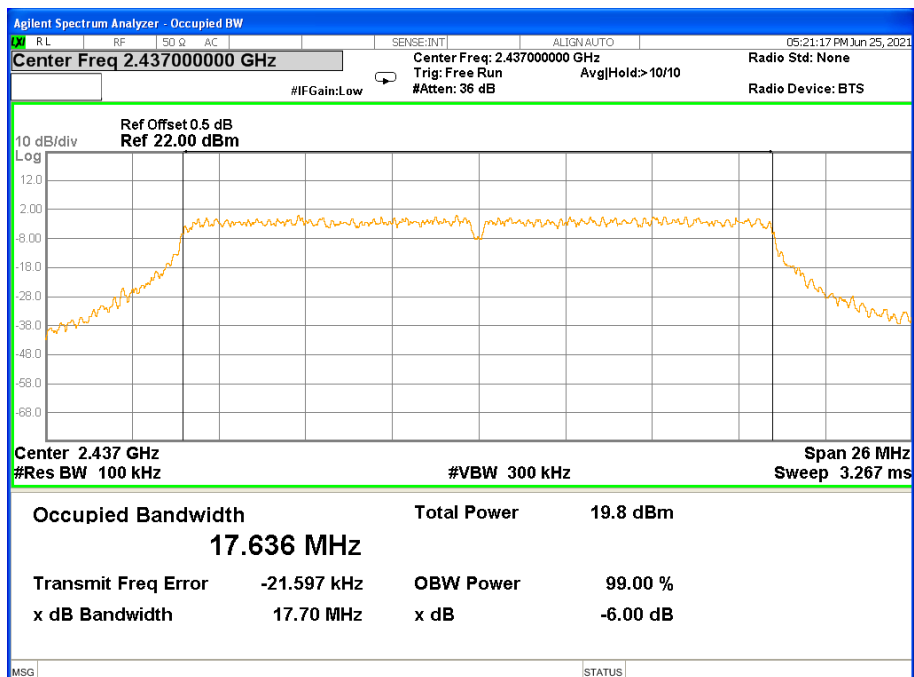


## 6dB Bandwidth TX CH 11

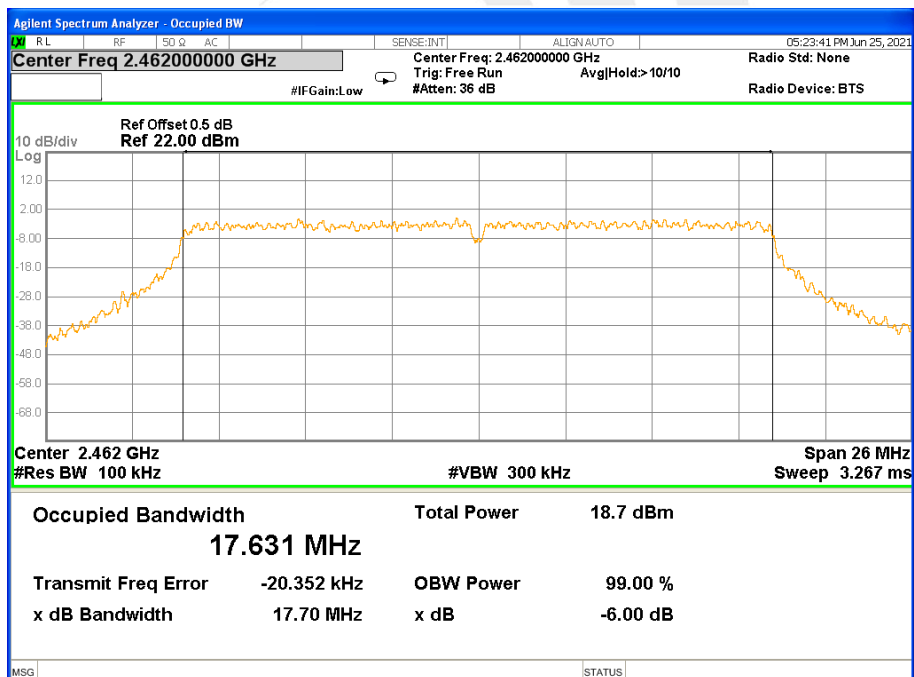




## 99% Bandwidth TX CH 01

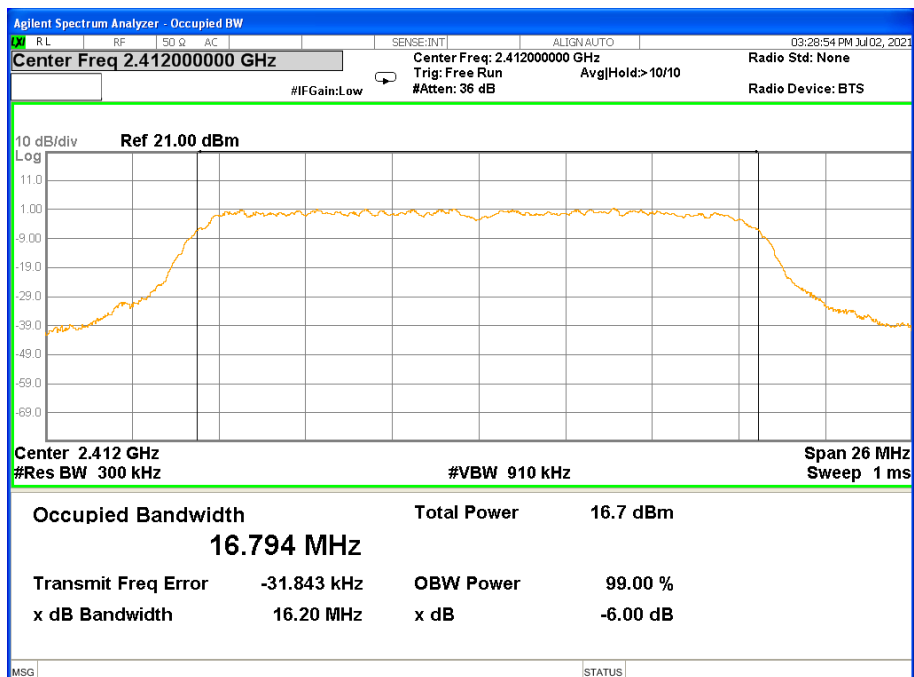


## 99% Bandwidth TX CH 06

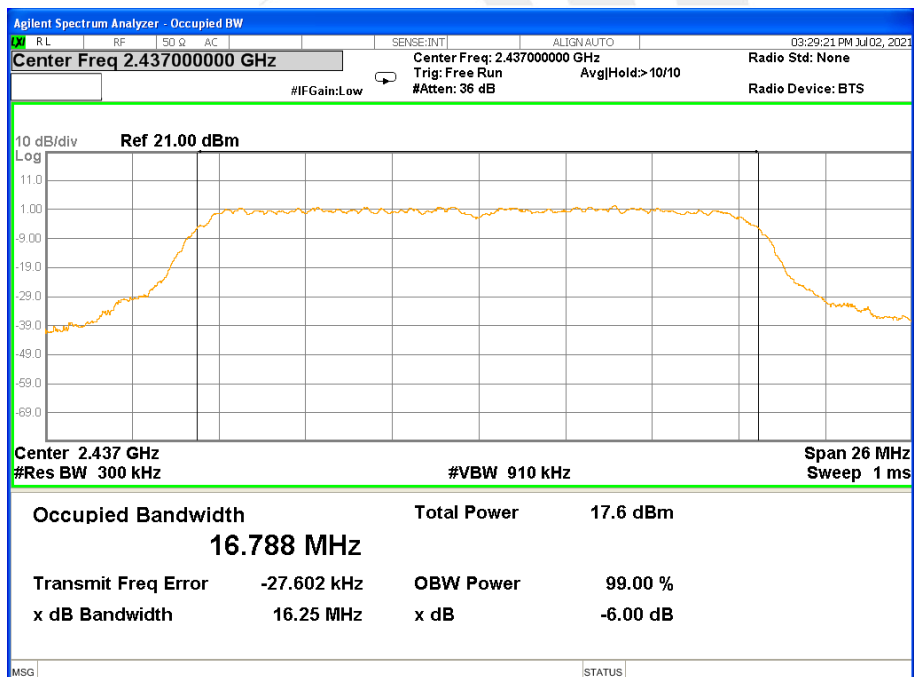



## 99% Bandwidth TX CH 11

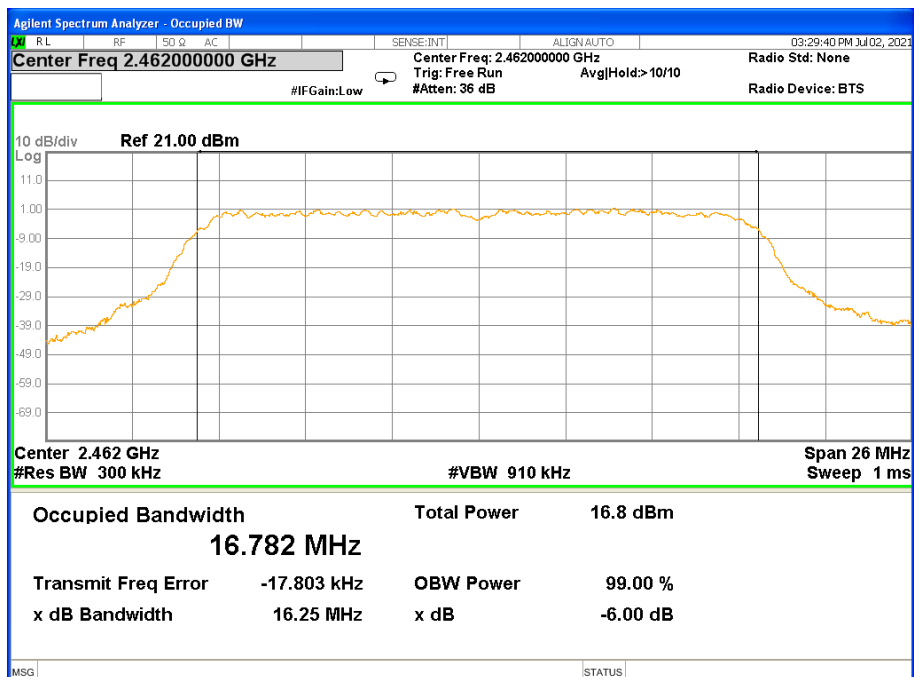




|               |              |                    |                                  |
|---------------|--------------|--------------------|----------------------------------|
| Temperature:  | 25°C         | Relative Humidity: | 60%                              |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX n Mode(40M) /CH03, CH06, CH09 |


| Frequency | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|---------------------|---------------------|-------------|--------|
| 2422 MHz  | 36.52               | 35.71               | ≥500KHz     | PASS   |
| 2437 MHz  | 36.51               | 35.72               | ≥500KHz     | PASS   |
| 2452 MHz  | 36.50               | 35.71               | ≥500KHz     | PASS   |

### 6dB Bandwidth TX CH 03

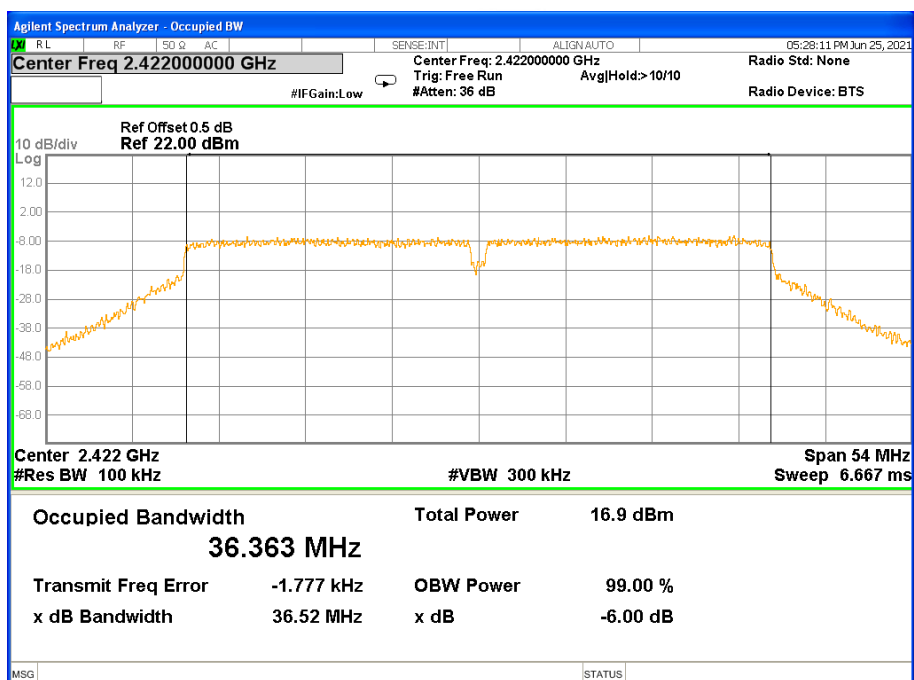




## 6dB Bandwidth TX CH 06

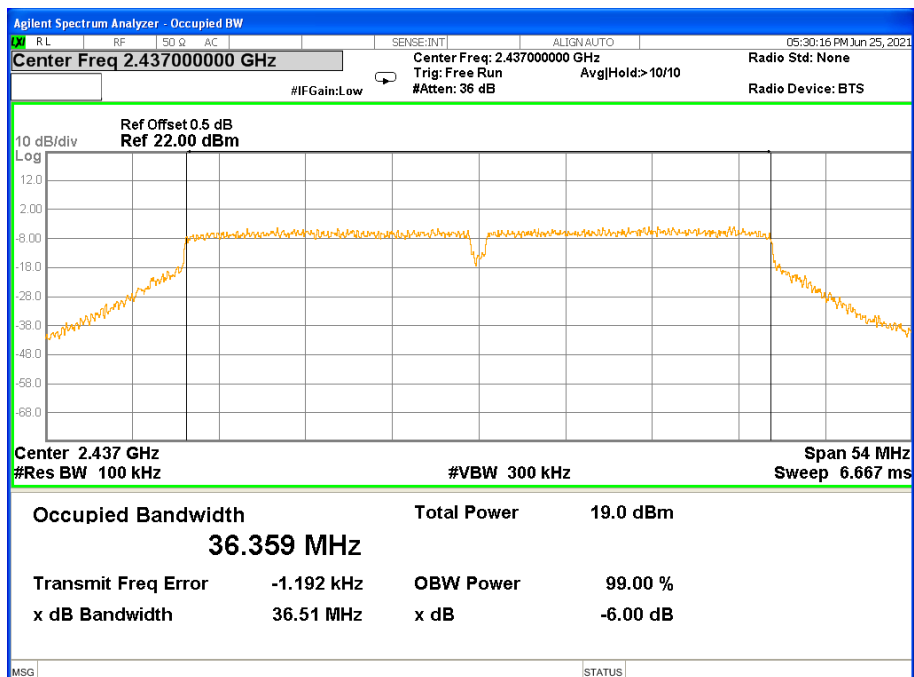


## 6dB Bandwidth TX CH 09

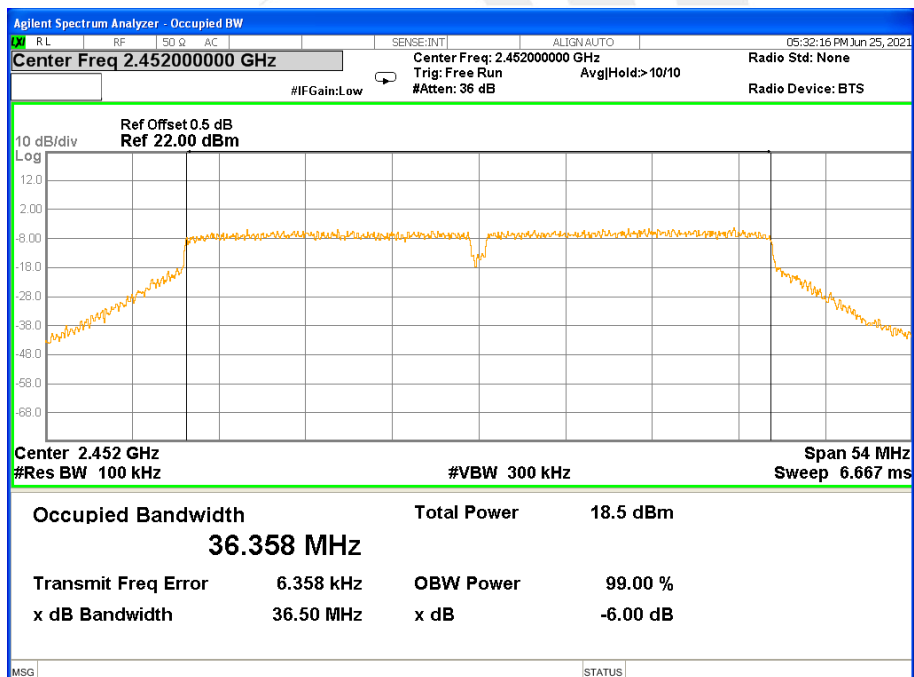




## 99% Bandwidth TX CH 03

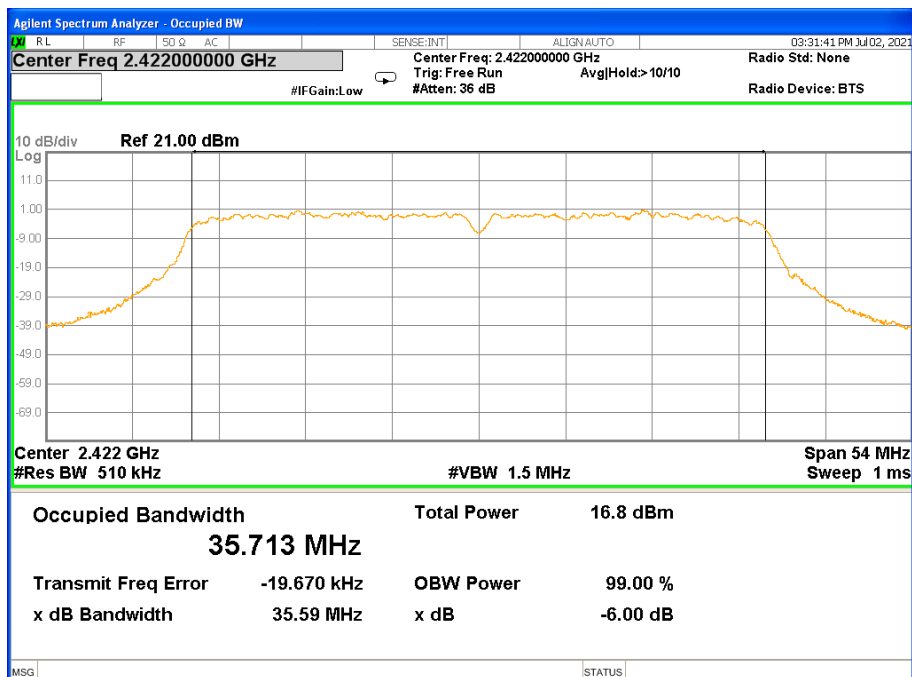


## 99% Bandwidth TX CH 06

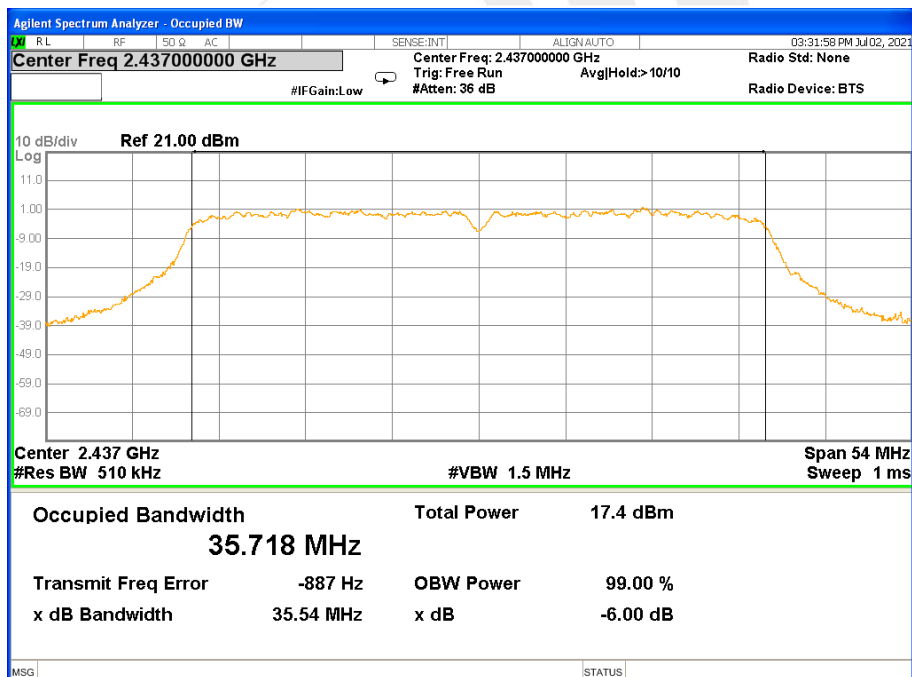



## 99% Bandwidth TX CH 09

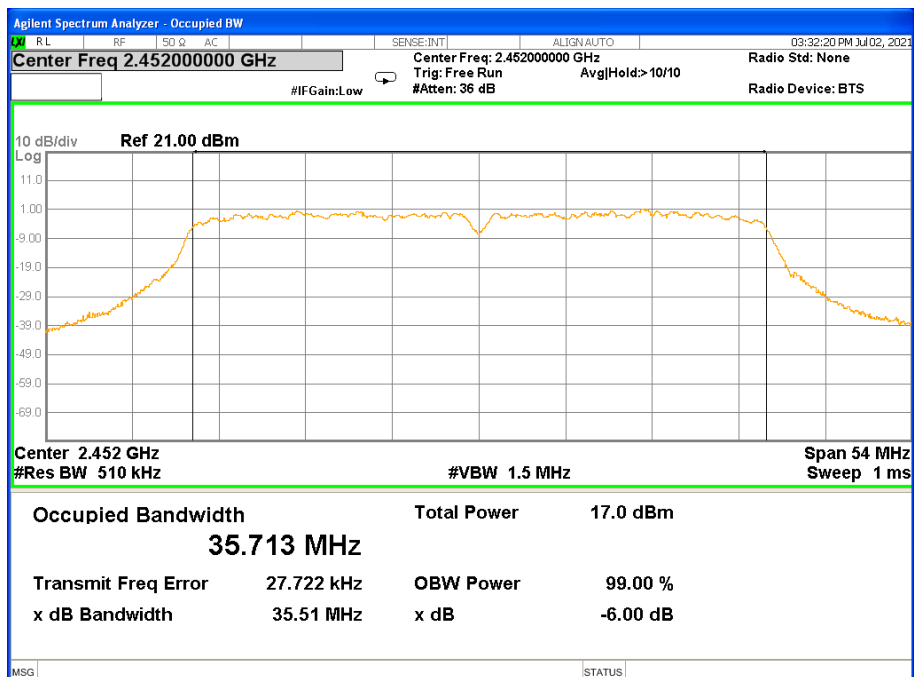



## 7. PEAK OUTPUT POWER TEST

### 7.1 LIMIT

| FCC Part15.247, Subpart C<br>RSS-247 Issue 2 |              |                 |                       |        |
|----------------------------------------------|--------------|-----------------|-----------------------|--------|
| Section                                      | Test Item    | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)<br>RSS 247 Issue 2              | Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |
| RSS-247                                      | EIRP         | 4W              | 2400-2483.5           | PASS   |

### 7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW  $\geq$  DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq$  [3  $\times$  RBW].
- Set span  $\geq$  [3  $\times$  RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW  $\geq$  [3  $\times$  RBW].
- Set the span  $\geq$  [1.5  $\times$  DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.



## 7.6 TEST RESULTS

|               |              |                    |     |
|---------------|--------------|--------------------|-----|
| Temperature:  | 25℃          | Relative Humidity: | 60% |
| Test Voltage: | AC 120V/60Hz |                    |     |

| Mode         | Test Channel | Frequency | Peak Conducted Output Power | Average Conducted Output Power | LIMIT |
|--------------|--------------|-----------|-----------------------------|--------------------------------|-------|
|              |              | (MHz)     | (dBm)                       | (dBm)                          | dBm   |
| TX 802.11b   | CH01         | 2412      | 14.69                       | 11.84                          | 30    |
|              | CH06         | 2437      | 18.35                       | 15.56                          | 30    |
|              | CH11         | 2462      | 16.65                       | 13.90                          | 30    |
| TX 802.11g   | CH01         | 2412      | 15.87                       | 10.56                          | 30    |
|              | CH06         | 2437      | 19.48                       | 14.37                          | 30    |
|              | CH11         | 2462      | 17.92                       | 12.73                          | 30    |
| TX 802.11n20 | CH01         | 2412      | 16.11                       | 10.44                          | 30    |
|              | CH06         | 2437      | 19.73                       | 14.26                          | 30    |
|              | CH11         | 2462      | 18.30                       | 12.61                          | 30    |
| TX 802.11n40 | CH03         | 2422      | 16.18                       | 11.67                          | 30    |
|              | CH06         | 2437      | 18.43                       | 14.19                          | 30    |
|              | CH09         | 2452      | 17.82                       | 13.41                          | 30    |



## EIRP Power

| TX 802.11b Mode   |           |            |              |            |       |
|-------------------|-----------|------------|--------------|------------|-------|
| Test Channel      | Frequency | Peak Power | Antenna Gain | EIRP Power | LIMIT |
|                   | (MHz)     | (dBm)      | (dBi)        | (dBm)      | dBm   |
| CH01              | 2412      | 14.69      | 1.50         | 16.19      | 36.02 |
| CH06              | 2437      | 18.35      | 1.50         | 19.85      | 36.02 |
| CH11              | 2462      | 16.65      | 1.50         | 18.15      | 36.02 |
| TX 802.11g Mode   |           |            |              |            |       |
| Test Channel      | Frequency | Peak Power | Antenna Gain | EIRP Power | LIMIT |
|                   | (MHz)     | (dBm)      | (dBi)        | (dBm)      | dBm   |
| CH01              | 2412      | 15.87      | 1.50         | 17.37      | 36.02 |
| CH06              | 2437      | 19.48      | 1.50         | 20.98      | 36.02 |
| CH11              | 2462      | 17.92      | 1.50         | 19.42      | 36.02 |
| TX 802.11n20 Mode |           |            |              |            |       |
| Test Channel      | Frequency | Peak Power | Antenna Gain | EIRP Power | LIMIT |
|                   | (MHz)     | (dBm)      | (dBi)        | (dBm)      | dBm   |
| CH01              | 2412      | 16.11      | 1.50         | 17.61      | 36.02 |
| CH06              | 2437      | 19.73      | 1.50         | 21.23      | 36.02 |
| CH11              | 2462      | 18.30      | 1.50         | 19.80      | 36.02 |
| TX 802.11n40 Mode |           |            |              |            |       |
| Test Channel      | Frequency | Peak Power | Antenna Gain | EIRP Power | LIMIT |
|                   | (MHz)     | (dBm)      | (dBi)        | (dBm)      | dBm   |
| CH03              | 2422      | 16.18      | 1.50         | 17.68      | 36.02 |
| CH06              | 2437      | 18.43      | 1.50         | 19.93      | 36.02 |
| CH09              | 2452      | 17.82      | 1.50         | 19.32      | 36.02 |



## 8. ANTENNA REQUIREMENT

### 8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.





## 9. FREQUENCY STABILITY

### 9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.02\%$  of the operating frequency over a temperature variation of  $-30$  degrees to  $50$  degrees C at normal supply voltage, and for a variation in primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees.

### 9.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at  $+20$  degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from  $85\%$  to  $115\%$  and the frequency record.

### 9.3 TEST RESULT

Channel 06 (2437MHz)

Voltage vs. Frequency Stability

| Voltage(V)         | Measurement Frequency(MHz) |
|--------------------|----------------------------|
| 138                | 2437.0032                  |
| 120                | 2437.0027                  |
| 102                | 2437.0031                  |
| Max.Deviation(MHz) | 0.0032                     |
| Max.Deviation(ppm) | 1.31                       |

Rated working voltage: AC 120V/60Hz

Temperature vs. Frequency Stability

| Temperature( $^{\circ}$ C) | Measurement Frequency(MHz) |
|----------------------------|----------------------------|
| -30                        | 2437.0039                  |
| -20                        | 2437.0038                  |
| -10                        | 2437.0032                  |
| 0                          | 2437.0033                  |
| 10                         | 2437.0030                  |
| 20                         | 2437.0035                  |
| 30                         | 2437.0034                  |
| 40                         | 2437.0036                  |
| 50                         | 2437.0029                  |
| Max.Deviation(MHz)         | 0.0039                     |
| Max.Deviation(ppm)         | 1.60                       |



## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

