



TEST REPORT

Application No.: GZCR2106020533LM
Applicant: DOREL JUVENILE GROUP
Address of Applicant: 2525 State Street Columbus Indiana, 47201-7494, United States
Manufacturer: GRACE (NINGBO) LIGHTING CO., LTD
Address of Manufacturer: No.3, Building 1, No.818, Qiming Road, Yinzhou district, Ningbo, Zhejiang
Factory: Shengzhou Zhitong Electronic Co., Ltd
Address of Factory: Building 2, No.8 Dacheng Road, Economic Development Zone, Shengzhou City Zhejiang Province, China

Equipment Under Test (EUT):
EUT Name: Under Crib Smart Light
Model No.: IH552
Trade Mark: Safety 1ST
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2021-07-01
Date of Test: 2021-07-05 to 2021-07-12
Date of Issue: 2021-07-16

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian

Kobe Jian

EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kexhu Road, Solentech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Testing & Inspection Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-07-16		Original

Authorized for issue by				
Tested By				
				Kevin Zhang /Project Engineer
Reviewed By				
				Ricky Liu/Reviewer

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5 & 11.12.1	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6 & 11.12.1	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6 & 11.12.1	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List.....	9
6 Radio Spectrum Technical Requirement	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
7 Radio Spectrum Matter Test Results	13
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	13
7.1.1 E.U.T. Operation	13
7.1.2 Test Mode Description	13
7.1.3 Test Setup Diagram.....	14
7.1.4 Measurement Procedure and Data.....	14
7.2 Conducted Peak Output Power.....	17
7.2.1 E.U.T. Operation	17
7.2.2 Test Mode Description	17
7.2.3 Test Setup Diagram.....	18
7.2.4 Measurement Procedure and Data.....	18
7.3 Minimum 6dB Bandwidth	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Mode Description	19
7.3.3 Test Setup Diagram.....	20
7.3.4 Measurement Procedure and Data.....	20
7.4 Power Spectrum Density.....	21
7.4.1 E.U.T. Operation	21
7.4.2 Test Mode Description	21
7.4.3 Test Setup Diagram.....	22
7.4.4 Measurement Procedure and Data.....	22
7.5 Conducted Band Edges Measurement	23
7.5.1 E.U.T. Operation	23
7.5.2 Test Mode Description	23
7.5.3 Test Setup Diagram.....	24
7.5.4 Measurement Procedure and Data.....	24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6	Conducted Spurious Emissions	25
7.6.1	E.U.T. Operation	25
7.6.2	Test Mode Description	25
7.6.3	Test Setup Diagram	26
7.6.4	Measurement Procedure and Data.....	26
7.7	Radiated Emissions which fall in the restricted bands	27
7.7.1	E.U.T. Operation	27
7.7.2	Test Mode Description	27
7.7.3	Test Setup Diagram	28
7.7.4	Measurement Procedure and Data.....	28
7.8	Radiated Spurious Emissions (Below 1GHz).....	49
7.8.1	E.U.T. Operation	49
7.8.2	Test Mode Description	49
7.8.3	Test Setup Diagram	50
7.8.4	Measurement Procedure and Data.....	50
7.9	Radiated Spurious Emissions (Above 1GHz)	53
7.9.1	E.U.T. Operation	53
7.9.2	Test Mode Description	53
7.9.3	Test Setup Diagram	54
7.9.4	Measurement Procedure and Data.....	55
8	Test Setup Photo	86
9	EUT Constructional Details (EUT Photos)	87
10	Appendix.....	88



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: DC 5,0 V powered by AC/DC adapter as below:
Option 1:
Model: TEKA-UCA10US
Input: AC 100-240 V, 50/60 Hz, 0.2 A Max
Output: DC 5.0 V, 1.0 A
Option 2:
Model: JK050100-S37USVU
Input: AC 100-240 V, 50/60 Hz, 0.5 A Max
Output: DC 5.0 V, 1000 mA
Cable(s): USB power cable with electronic controller
Test Voltage: AC 120 V, 60 Hz
Function: Under Crib Smart Light with Wi-Fi & BT function
BT BLE: 2402MHz to 2480MHz
Operation Frequency: 802.11b/g/n(HT20): 2412MHz to 2462MHz;
802.11n(HT40): 2422MHz to 2452MHz
BT BLE: GFSK
Modulation Type: 802.11b: DSSS (CCK, DQPSK, DBPSK);
802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
BT BLE: 40
Number of Channels: 802.11b/g/n(HT20):11;
802.11n(HT40):7
Channel Spacing: 2MHz for BT BLE
5MHz for 802.11b/g/n(HT20)/802.11n(HT40)
Antenna Type: PCB Antenna
Antenna Gain: 1.5 dBi declared by applicant
Hardware Version: R_Light bell_RGBWC USB1.3
Firmware Version: SV01
Testing Software: WiFiTestTool(V1.5.2).exe
Sample NO.: M1
Power Setting: 20 dBm for Wi-Fi & 5 dBm for BT can not be changed by user

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Note Book Computer	LENOVO	ThinkPad T490	PF1D1MVJ
Router	TP-LINK	TL-WR841N	9727201635
Mobile Phone	SAMSUNG	GT-I9500	RV1D82X8W9X



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±3.12dB
Conducted Peak Output Power	± 0.75dB
Minimum 6dB Bandwidth	± 3%
Power Spectrum Density	± 2.84dB
Conducted Band Edges Measurement	± 0.75dB
Conducted Spurious Emissions	± 0.75dB
Radiated Emissions which fall in the restricted bands	±5.06dB (3m); ±4.46dB (10m) ±5.08dB (1GHz-6GHz); ±5.14dB(above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	±5.06dB (3m); ±4.46dB (10m)
Radiated Spurious Emissions (Above 1GHz)	±5.08dB (1GHz-6GHz); ±5.14dB(above 6GHz)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch EMC Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2020-09-25	2021-09-24
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR4	EMC2221	2021/6/1	2022/5/31

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08



Radiated Spurious Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable	HangTianXing	N/A	EMC0542	2020-09-09	2022-09-08
Trilog Broadband Antenna(25MHz-1GHz)-Lab	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Amplifier(9kHz-1.3GHz)	HP	8447F	EMC2065	2021-05-19	2022-05-18
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2019-12-27	2021-12-26
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2220	2021/5/26	2022/5/25

Radiated Spurious Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
High Pass Filter (915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2020-07-29	2021-07-28
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement: Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.5 dBi. Please refer to internal photos.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 52 % RH

Atmospheric Pressure: 1005 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode_Keep the EUT in transmitting with modulation mode .

7.1.3 Test Setup Diagram

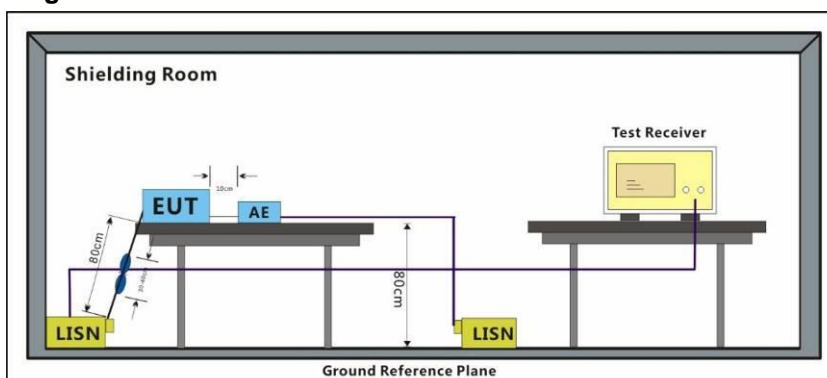

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is deemed to have accepted the Terms and Conditions of the Company's service and to have agreed to follow the instructions of the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or expiration date of this document will render it null and void. The results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com.
 No.190 Kezhu Road, Shientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqs.china@sqs.com


Test Mode: 01; Line: Live line

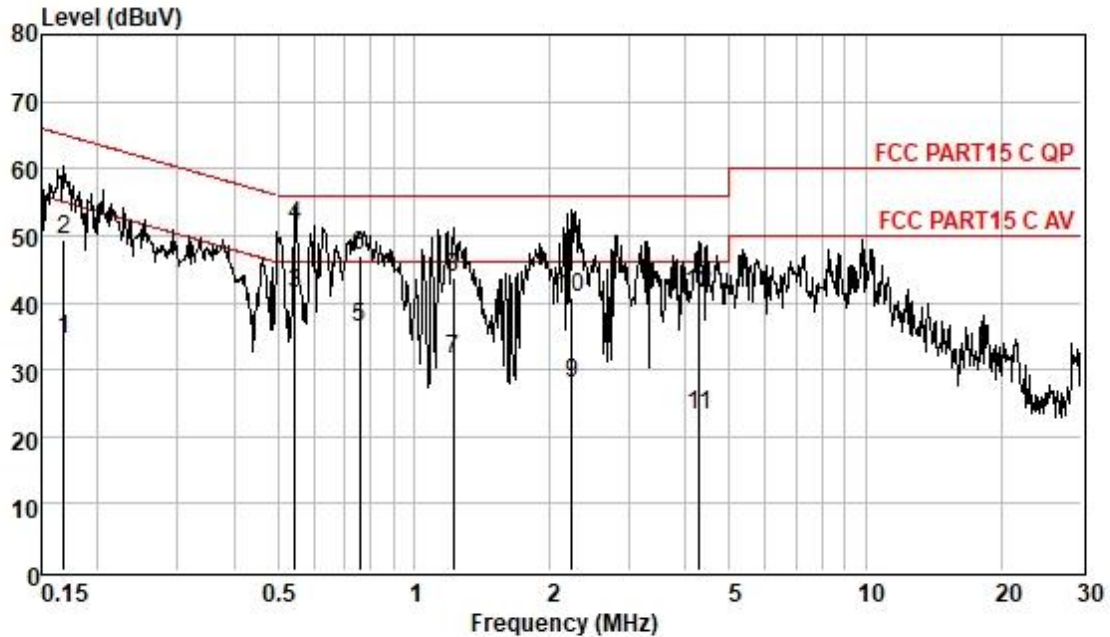

Pol : LINE
Mode : 2#
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	24.94	0.06	9.62	34.62	55.03	-20.41	Average
0.17	39.83	0.06	9.62	49.51	65.03	-15.52	QP
0.55	31.64	0.07	9.63	41.34	46.00	-4.66	Average
0.55	41.87	0.07	9.63	51.57	56.00	-4.43	QP
0.76	26.45	0.07	9.63	36.15	46.00	-9.85	Average
0.76	37.27	0.07	9.63	46.97	56.00	-9.03	QP
1.22	21.87	0.08	9.61	31.56	46.00	-14.44	Average
1.22	34.00	0.08	9.61	43.69	56.00	-12.31	QP
2.24	18.16	0.13	9.62	27.91	46.00	-18.09	Average
2.24	31.09	0.13	9.62	40.84	56.00	-15.16	QP
4.29	13.49	0.17	9.63	23.29	46.00	-22.71	Average
4.29	31.56	0.17	9.63	41.36	56.00	-14.64	QP

Test Mode: 01; Line: Neutral Line

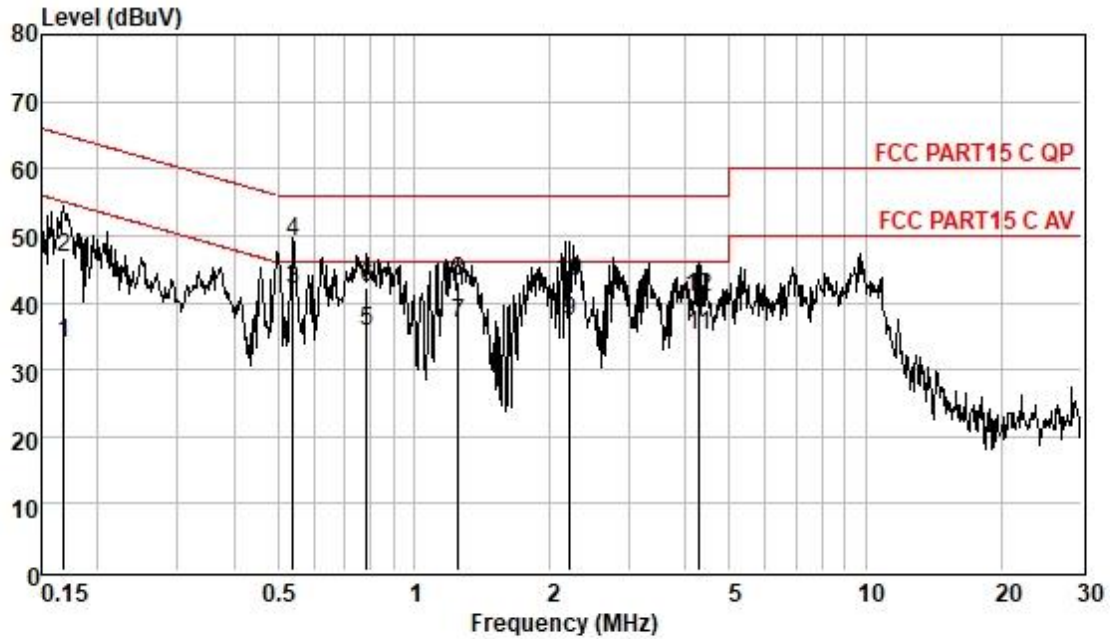

Pol : NEUTRAL
Mode : 2#
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	24.26	0.06	9.55	33.87	55.03	-21.16	Average
0.17	37.16	0.06	9.55	46.77	65.03	-18.26	QP
0.54	32.44	0.07	9.55	42.06	46.00	-3.94	Average
0.54	39.59	0.07	9.55	49.21	56.00	-6.79	QP
0.79	26.15	0.07	9.55	35.77	46.00	-10.23	Average
0.79	32.62	0.07	9.55	42.24	56.00	-13.76	QP
1.26	27.37	0.09	9.55	37.01	46.00	-8.99	Average
1.26	33.46	0.09	9.55	43.10	56.00	-12.90	QP
2.21	27.40	0.13	9.54	37.07	46.00	-8.93	Average
2.21	33.35	0.13	9.54	43.02	56.00	-12.98	QP
4.29	25.35	0.17	9.56	35.08	46.00	-10.92	Average
4.29	31.06	0.17	9.56	40.79	56.00	-15.21	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 29.0 °C


Humidity: 37.3 % RH

Atmospheric Pressure: 1005 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.

7.2.3 Test Setup Diagram

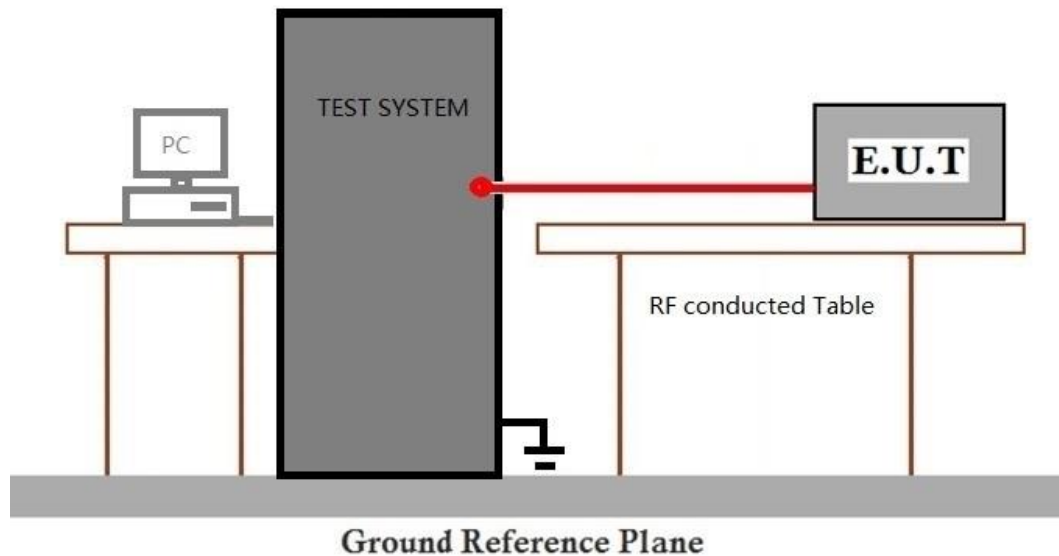

7.2.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer To Appendix For Details

7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 29.0 °C Humidity: 37.3 % RH Atmospheric Pressure: 1005 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.

7.3.3 Test Setup Diagram

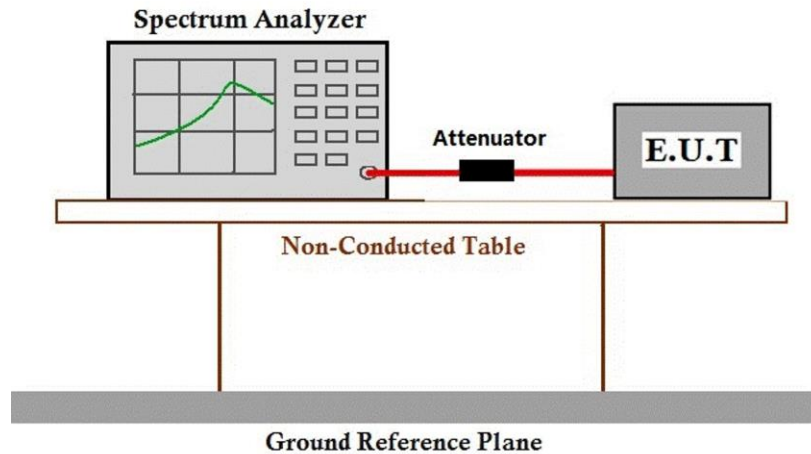

7.3.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer To Appendix For Details

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2
Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation


Operating Environment:
Temperature: 29.0 °C Humidity: 37.3 % RH Atmospheric Pressure: 1005 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	01	
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.



7.4.3 Test Setup Diagram

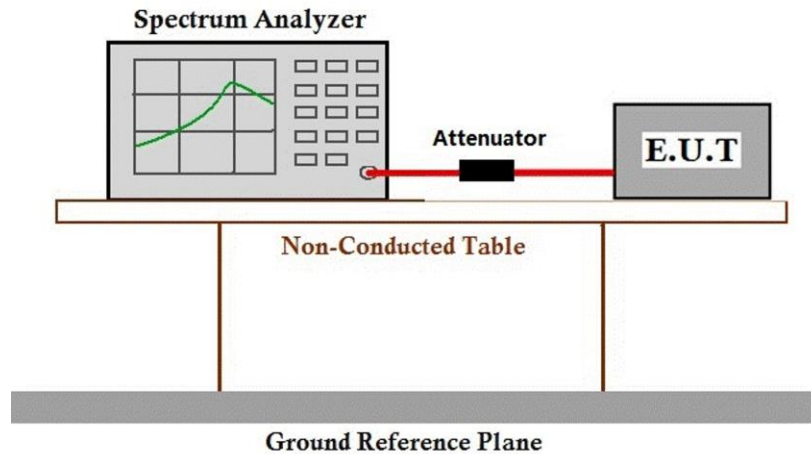

7.4.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer To Appendix For Details

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 11.13.3.2
 Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 29.0 °C Humidity: 37.3 % RH Atmospheric Pressure: 1005 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.



7.5.3 Test Setup Diagram

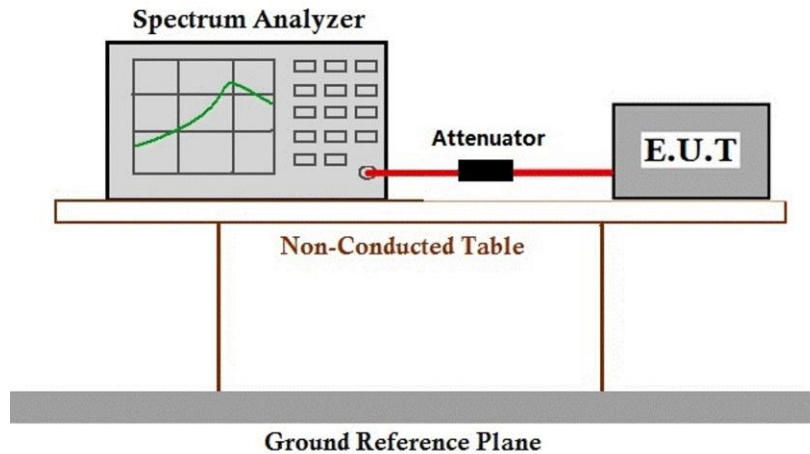

7.5.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer To Appendix For Details

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 29.0 °C

Humidity: 37.3 % RH


Atmospheric Pressure: 1005 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.



7.6.3 Test Setup Diagram

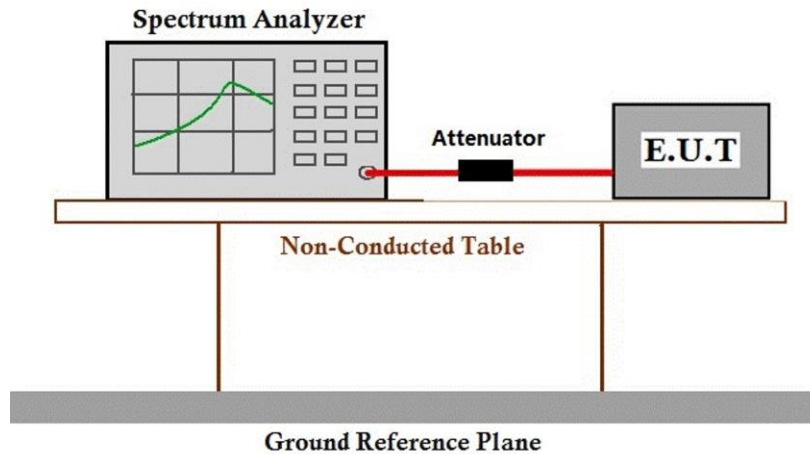

7.6.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer To Appendix For Details

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5 & 11.12.1

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C

Humidity: 64.2 % RH

Atmospheric Pressure: 1005 mbar

7.7.2 Test Mode Description


Pre-scan / Mode
Final test Code Description

Final test 01 TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

Final test 04 TX mode_Keep the EUT in transmitting with modulation mode.



7.7.3 Test Setup Diagram

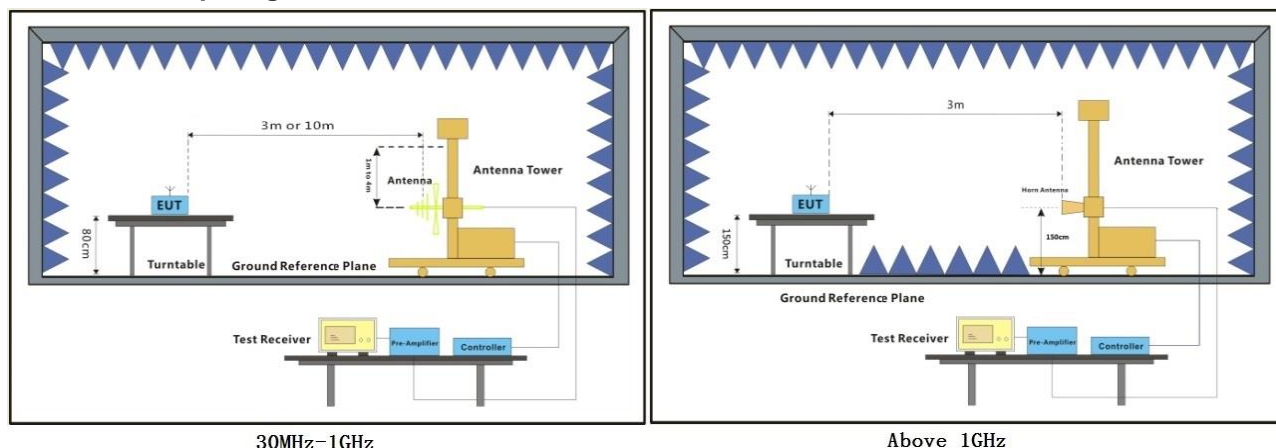

7.7.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: Antenna: 3 denotes the type of antenna for above 1000MHz.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

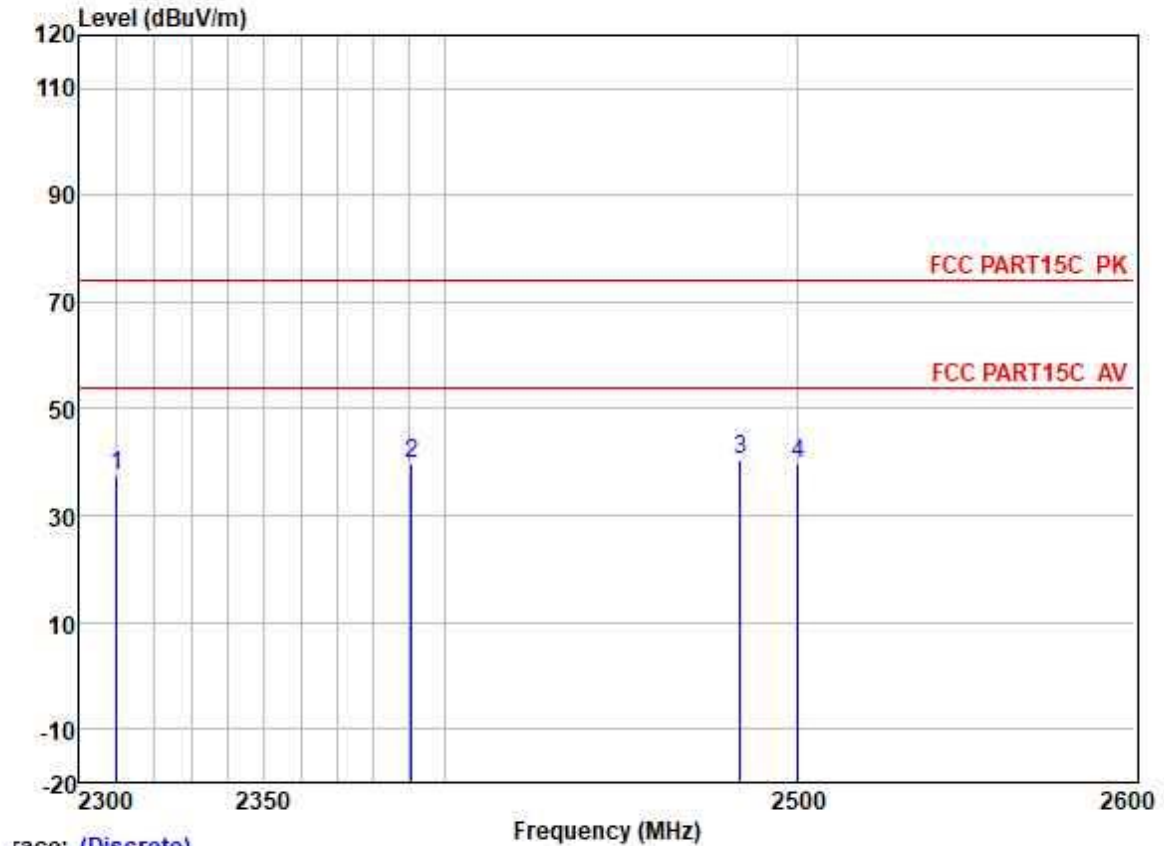

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	44.77	27.15	3.32	37.62	37.62	74.00	-36.38
2	2390.350	46.68	27.33	3.48	37.59	39.90	74.00	-34.10
3	2483.500	47.08	27.48	3.53	37.57	40.52	74.00	-33.48
4	2500.184	46.25	27.50	3.40	37.56	39.59	74.00	-34.41

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11b; Bandwidth: 20MHz; Channel: Low

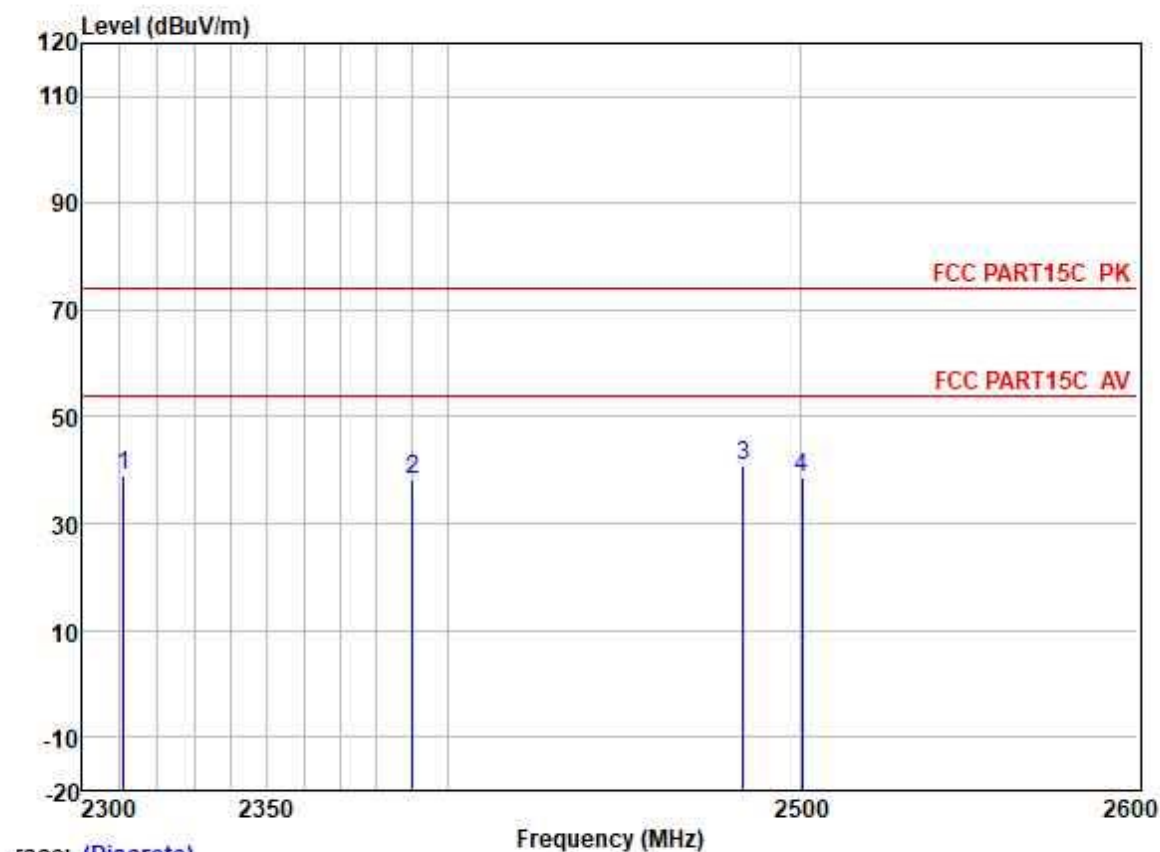

race: (Discrete)

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Limit Line	Over Limit	Pol/Phase	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.943	46.12	27.15	3.32	37.62	38.97	74.00	-35.03	HORIZONTAL Peak
2	2390.000	44.92	27.33	3.48	37.59	38.14	74.00	-35.86	HORIZONTAL Peak
3	2483.500	47.60	27.48	3.53	37.57	41.04	74.00	-32.96	HORIZONTAL Peak
4	2500.503	45.23	27.50	3.40	37.56	38.57	74.00	-35.43	HORIZONTAL Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed and available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to terms and Conditions of Sale and Conditions of Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx#Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqsg.china@sqs.com


Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

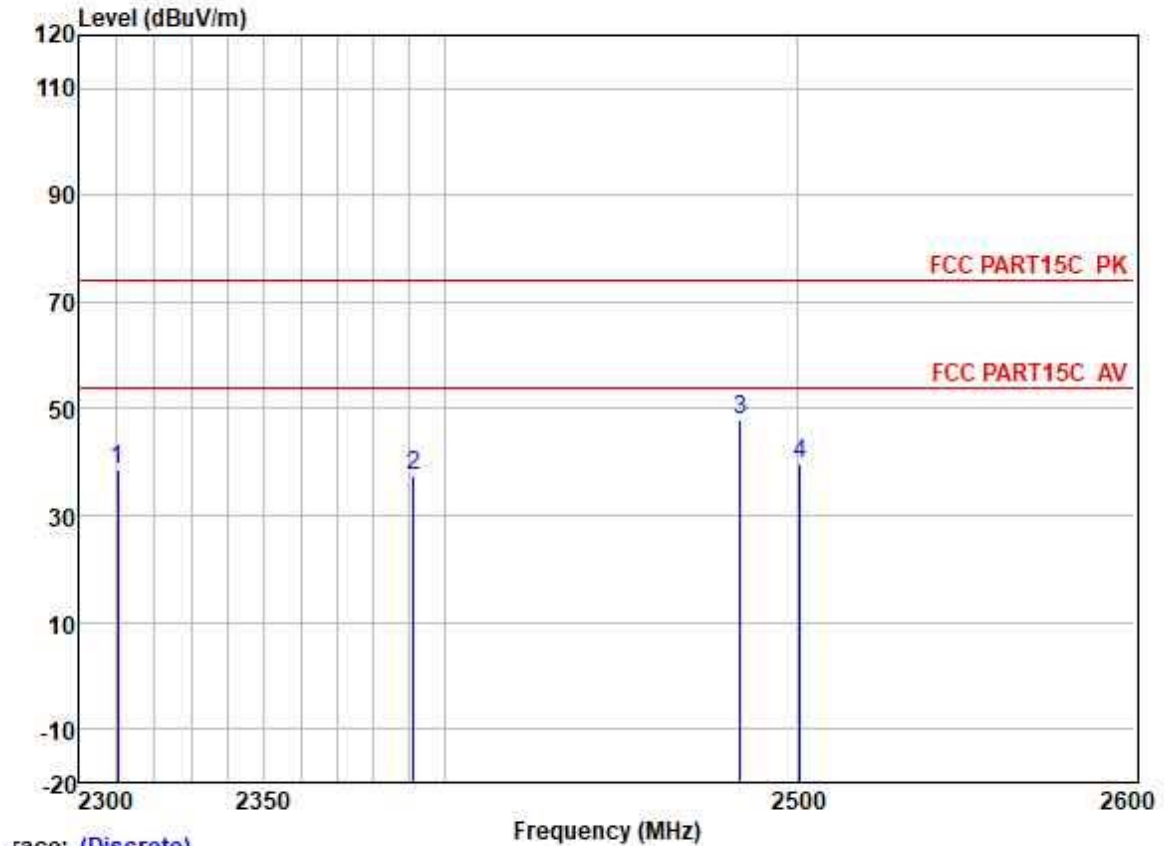

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.229	45.90	27.15	3.32	37.62	38.75	74.00	-35.25	HORIZONTAL	Peak
2	2390.901	44.42	27.34	3.49	37.59	37.66	74.00	-36.34	HORIZONTAL	Peak
3	2483.500	54.46	27.48	3.53	37.57	47.90	74.00	-26.10	HORIZONTAL	Peak
4	2500.890	46.52	27.50	3.40	37.56	39.86	74.00	-34.14	HORIZONTAL	Peak


Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

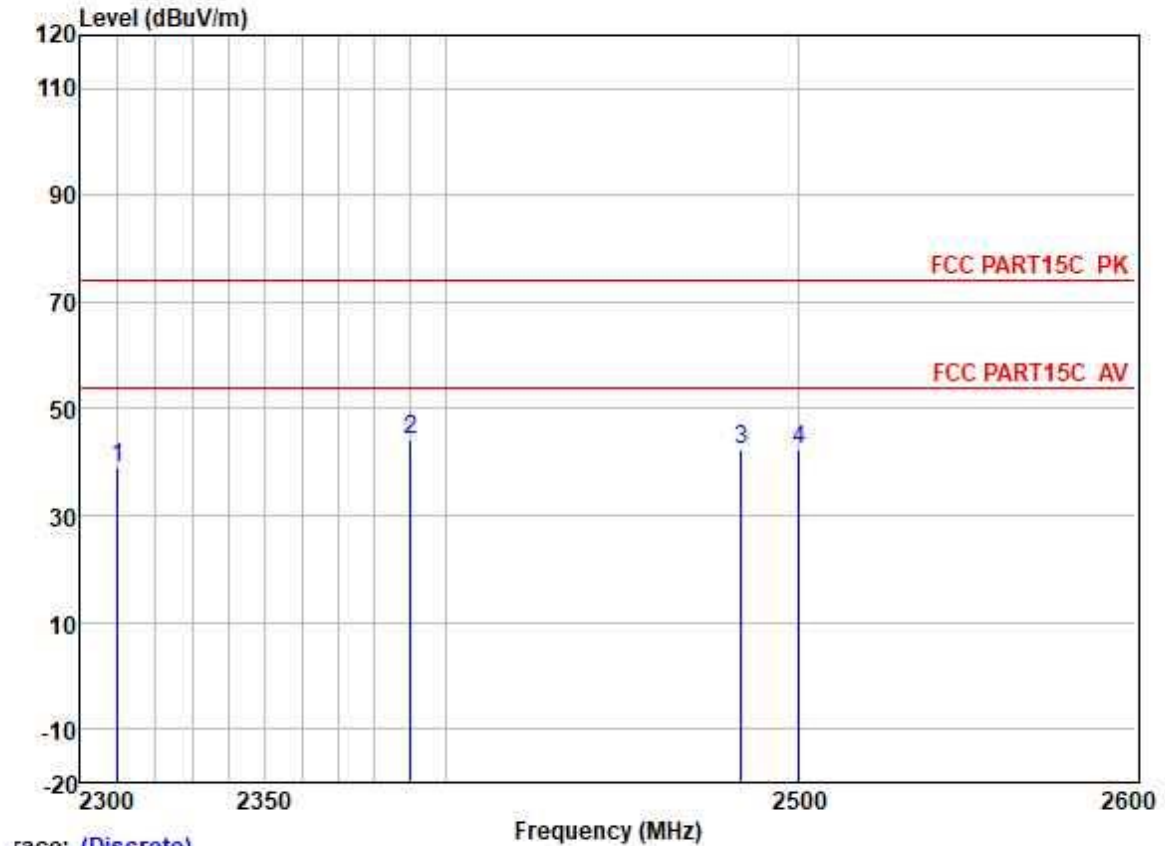

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	46.14	27.15	3.32	37.62	38.99	74.00	-35.01
2	2390.000	50.96	27.33	3.48	37.59	44.18	74.00	-29.82
3	2483.500	48.74	27.48	3.53	37.57	42.18	74.00	-31.82
4	2500.276	49.00	27.50	3.40	37.56	42.34	74.00	-31.66


Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

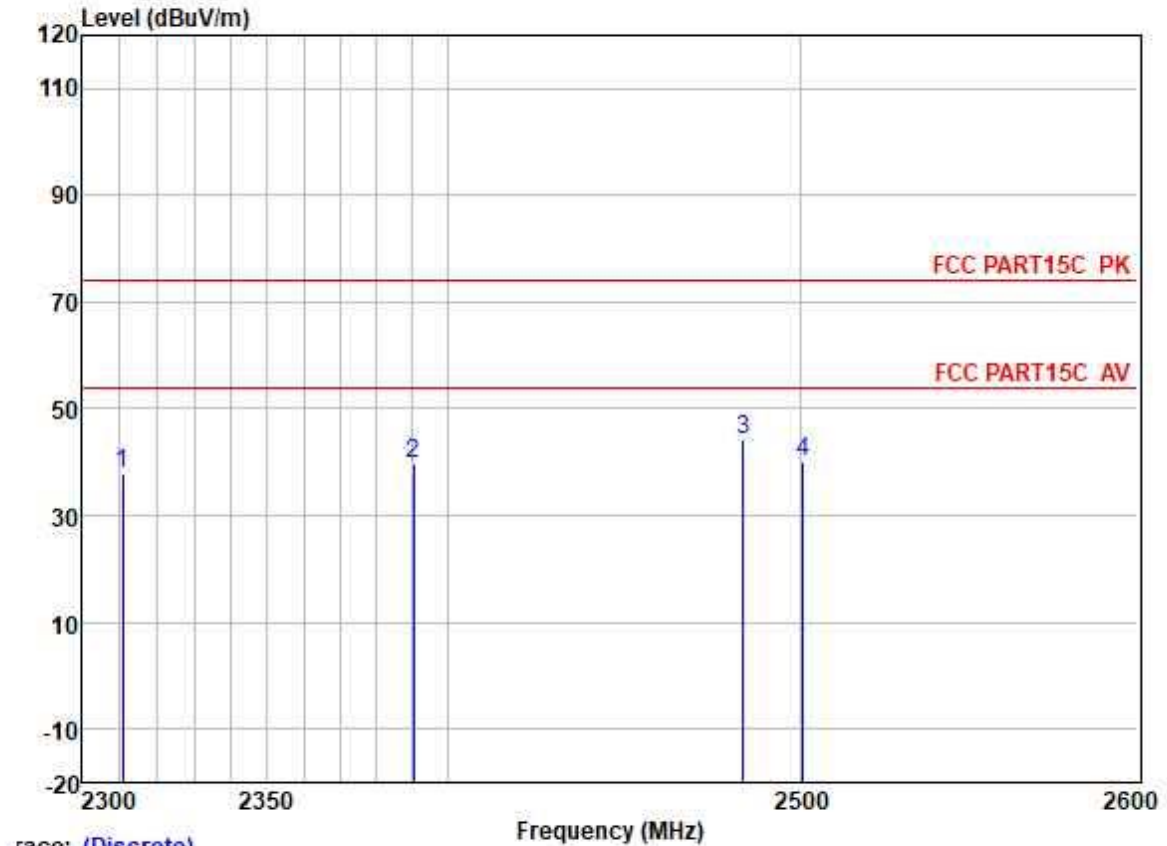

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.859	44.88	27.15	3.32	37.62	37.73	74.00	-36.27	HORIZONTAL Peak
2	2390.042	46.34	27.33	3.48	37.59	39.56	74.00	-34.44	HORIZONTAL Peak
3	2483.500	50.91	27.48	3.53	37.57	44.35	74.00	-29.65	HORIZONTAL Peak
4	2500.663	46.69	27.50	3.40	37.56	40.03	74.00	-33.97	HORIZONTAL Peak


Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

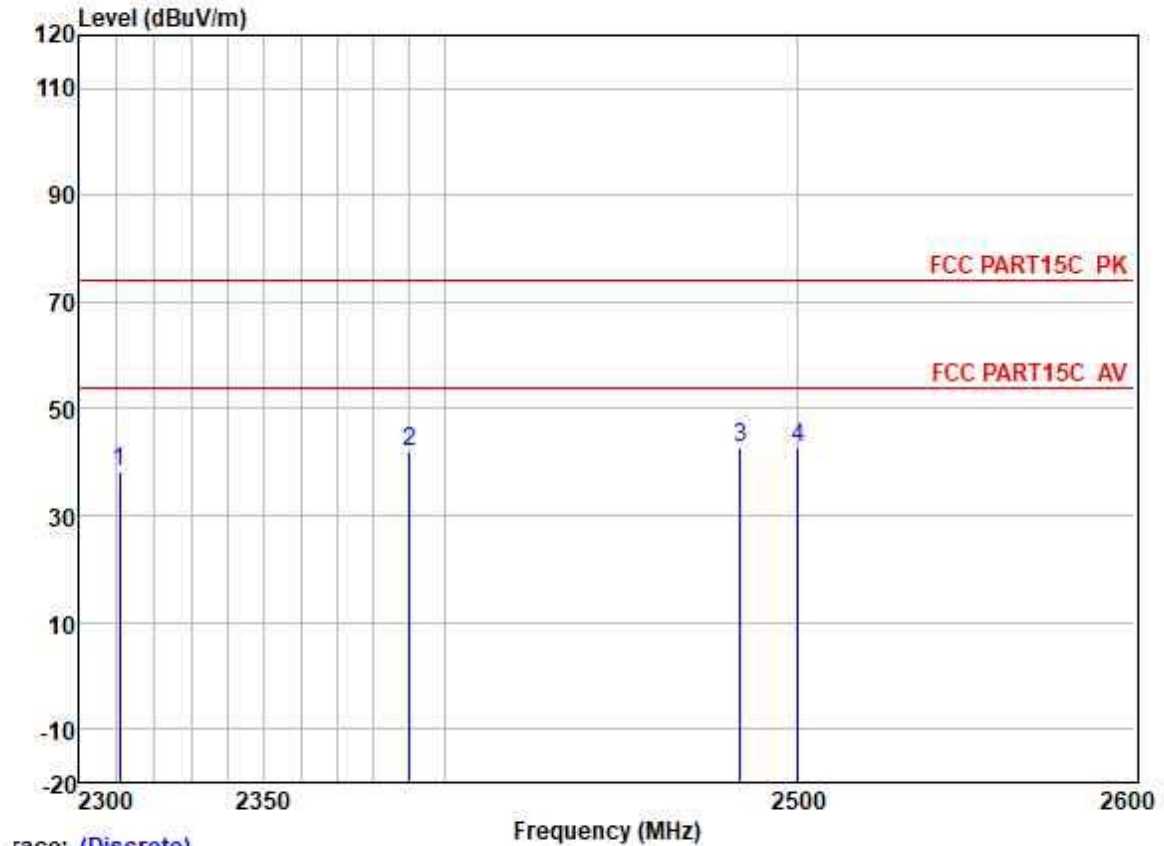

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.658	45.50	27.15	3.32	37.62	38.35	74.00	-35.65
2	2390.000	48.77	27.33	3.48	37.59	41.99	74.00	-32.01
3	2483.500	49.27	27.48	3.53	37.57	42.71	74.00	-31.29
4	2500.276	49.55	27.50	3.40	37.56	42.89	74.00	-31.11


Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

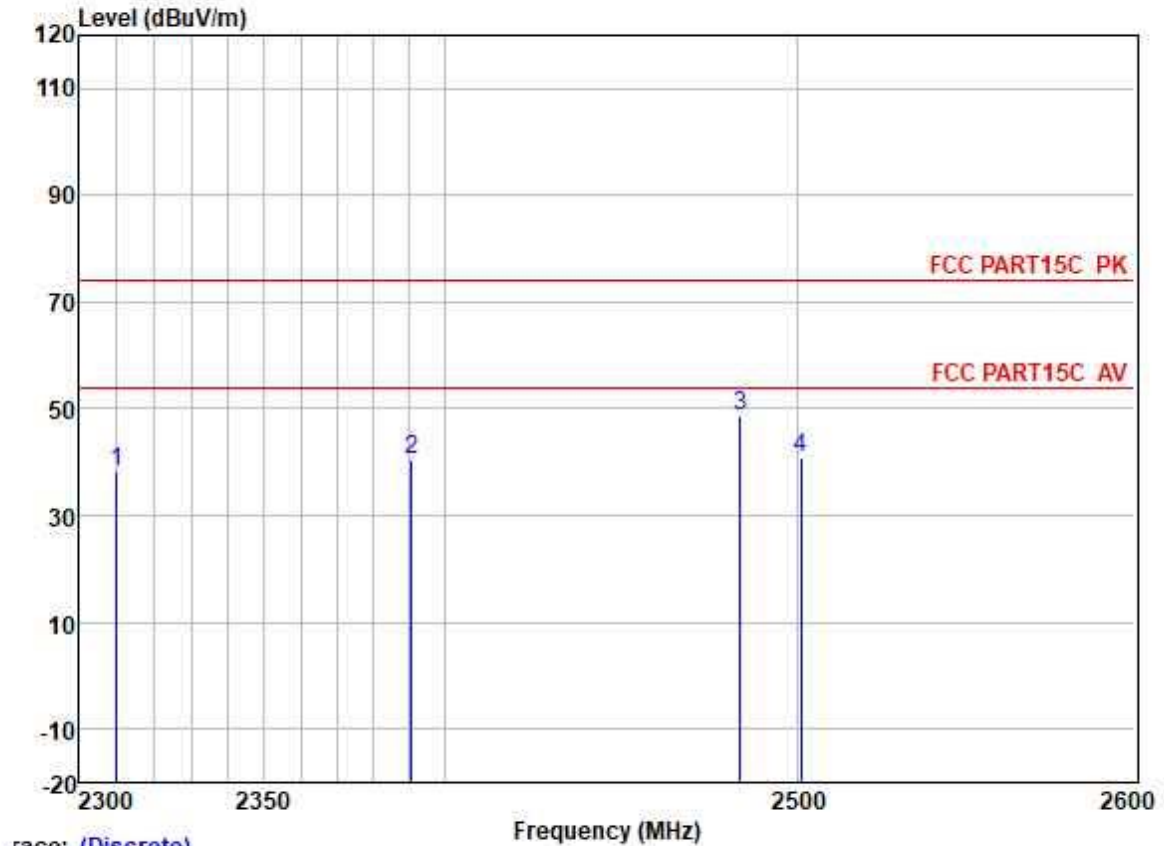

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.090	45.40	27.15	3.32	37.62	38.25	74.00	-35.75	HORIZONTAL	Peak
2	2390.490	47.33	27.34	3.49	37.59	40.57	74.00	-33.43	HORIZONTAL	Peak
3	2483.500	55.07	27.48	3.53	37.57	48.51	74.00	-25.49	HORIZONTAL	Peak
4	2500.970	47.40	27.50	3.40	37.56	40.74	74.00	-33.26	HORIZONTAL	Peak


Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

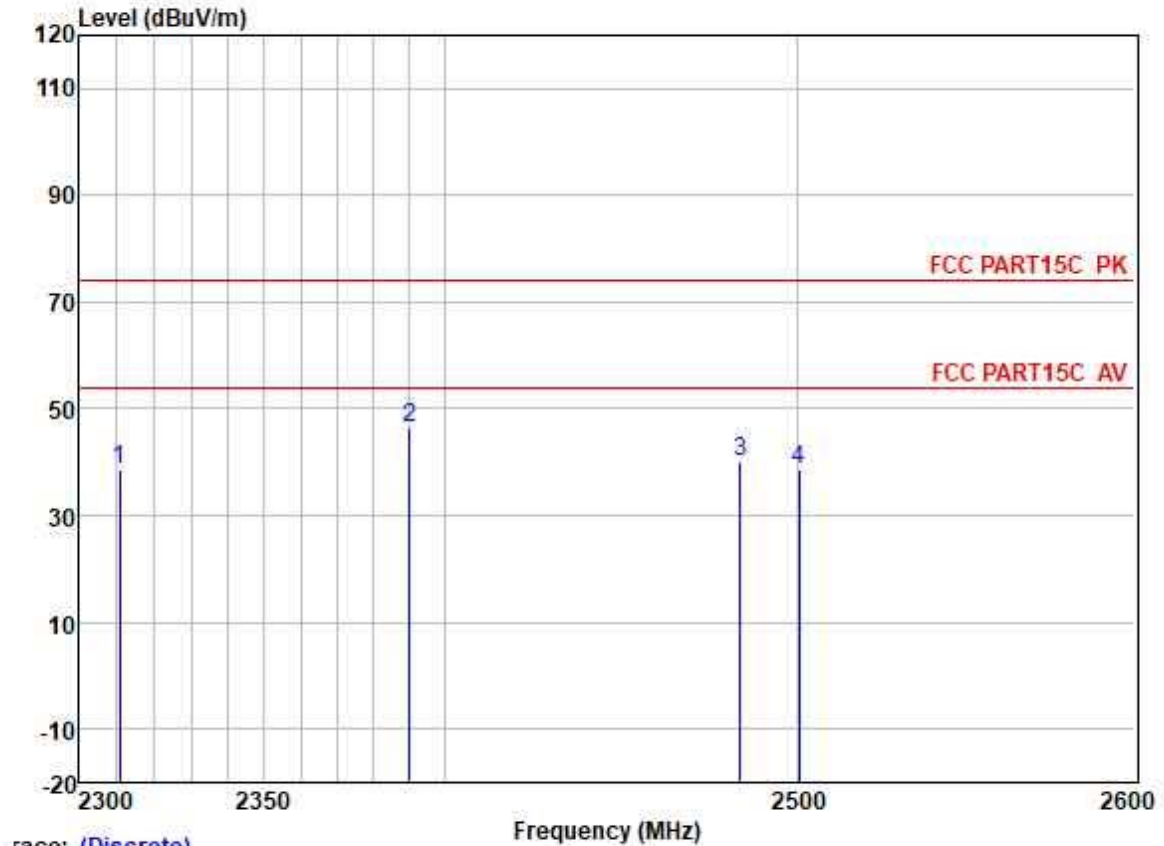

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.657	45.68	27.15	3.32	37.62	38.53	74.00	-35.47
2	2390.000	53.09	27.33	3.48	37.59	46.31	74.00	-27.69
3	2483.500	46.54	27.48	3.53	37.57	39.98	74.00	-34.02
4	2500.583	45.09	27.50	3.40	37.56	38.43	74.00	-35.57


Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

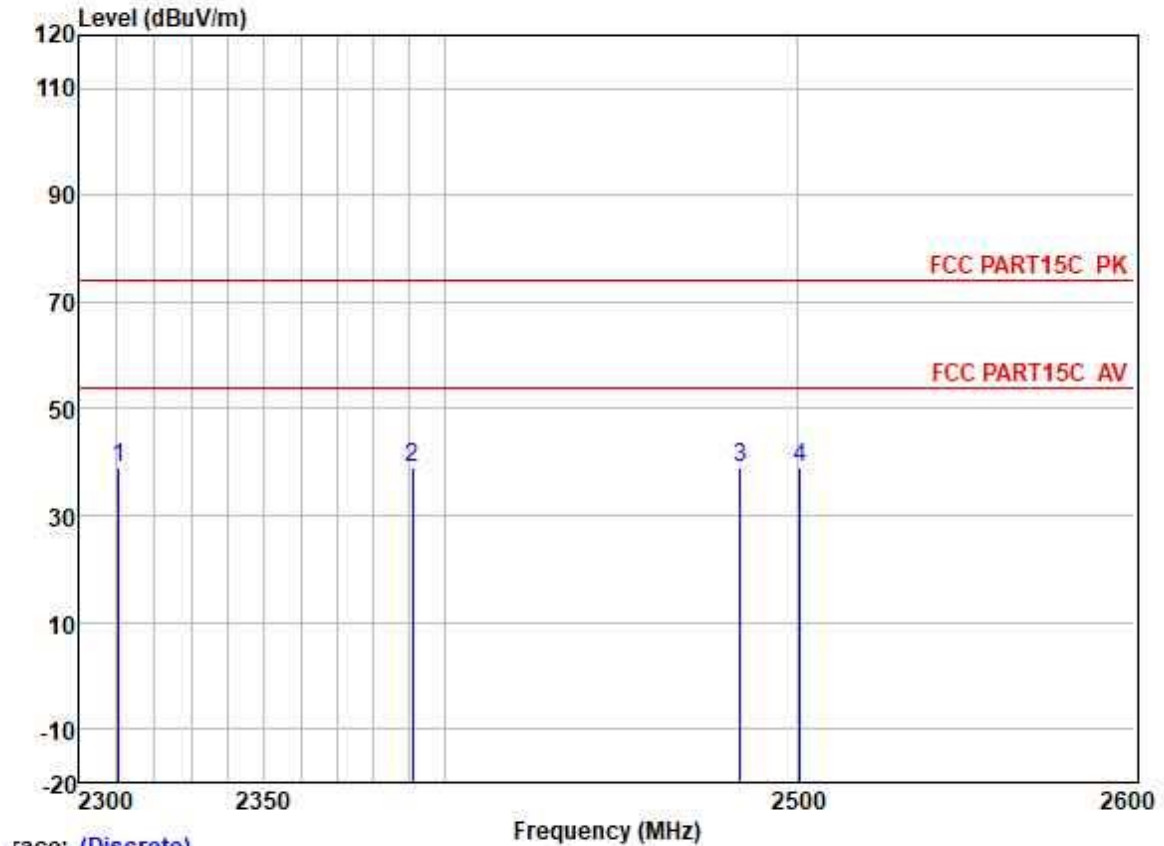

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.516	46.06	27.15	3.32	37.62	38.91	74.00	-35.09	VERTICAL	Peak
2	2390.737	45.71	27.34	3.49	37.59	38.95	74.00	-35.05	VERTICAL	Peak
3	2483.500	45.45	27.48	3.53	37.57	38.89	74.00	-35.11	VERTICAL	Peak
4	2500.650	45.56	27.50	3.40	37.56	38.90	74.00	-35.10	VERTICAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

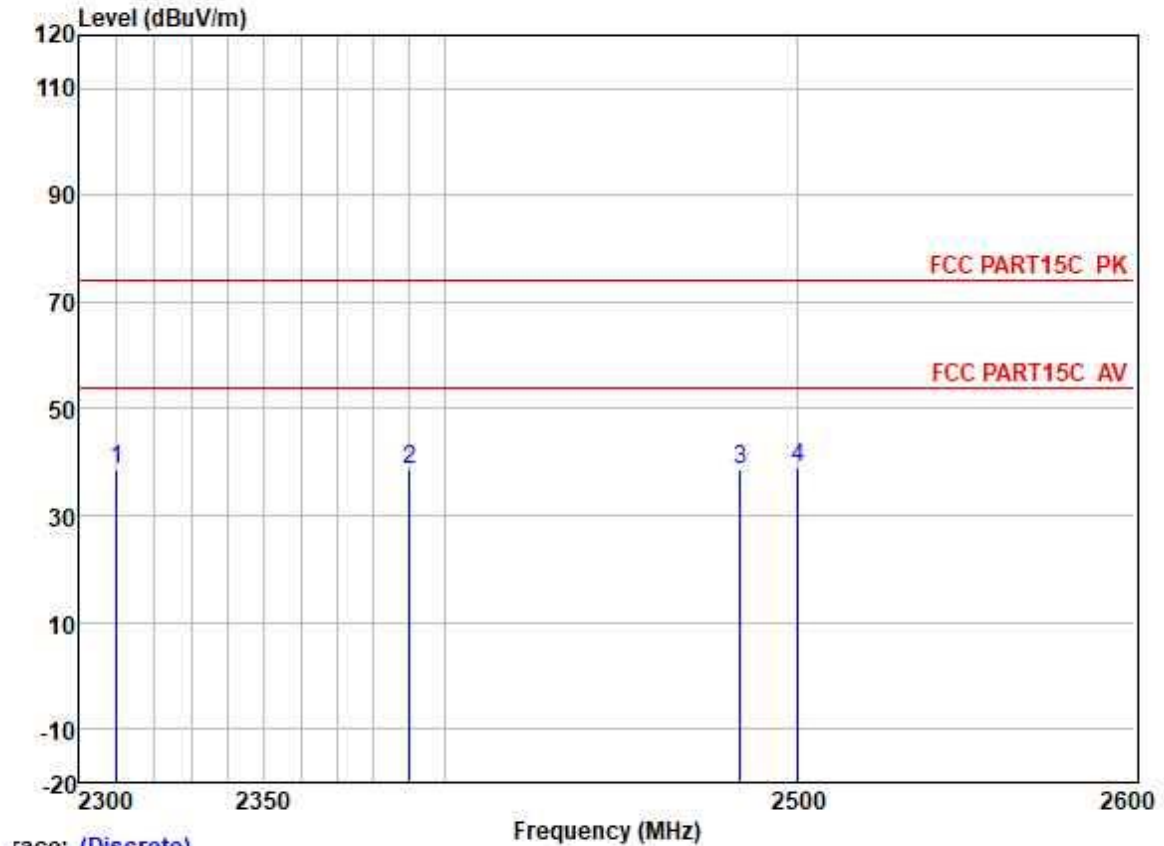

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.100	45.63	27.15	3.32	37.62	38.48	74.00	-35.52	VERTICAL	Peak
2	2390.000	45.51	27.33	3.48	37.59	38.73	74.00	-35.27	VERTICAL	Peak
3	2483.500	45.11	27.48	3.53	37.57	38.55	74.00	-35.45	VERTICAL	Peak
4	2500.196	45.76	27.50	3.40	37.56	39.10	74.00	-34.90	VERTICAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

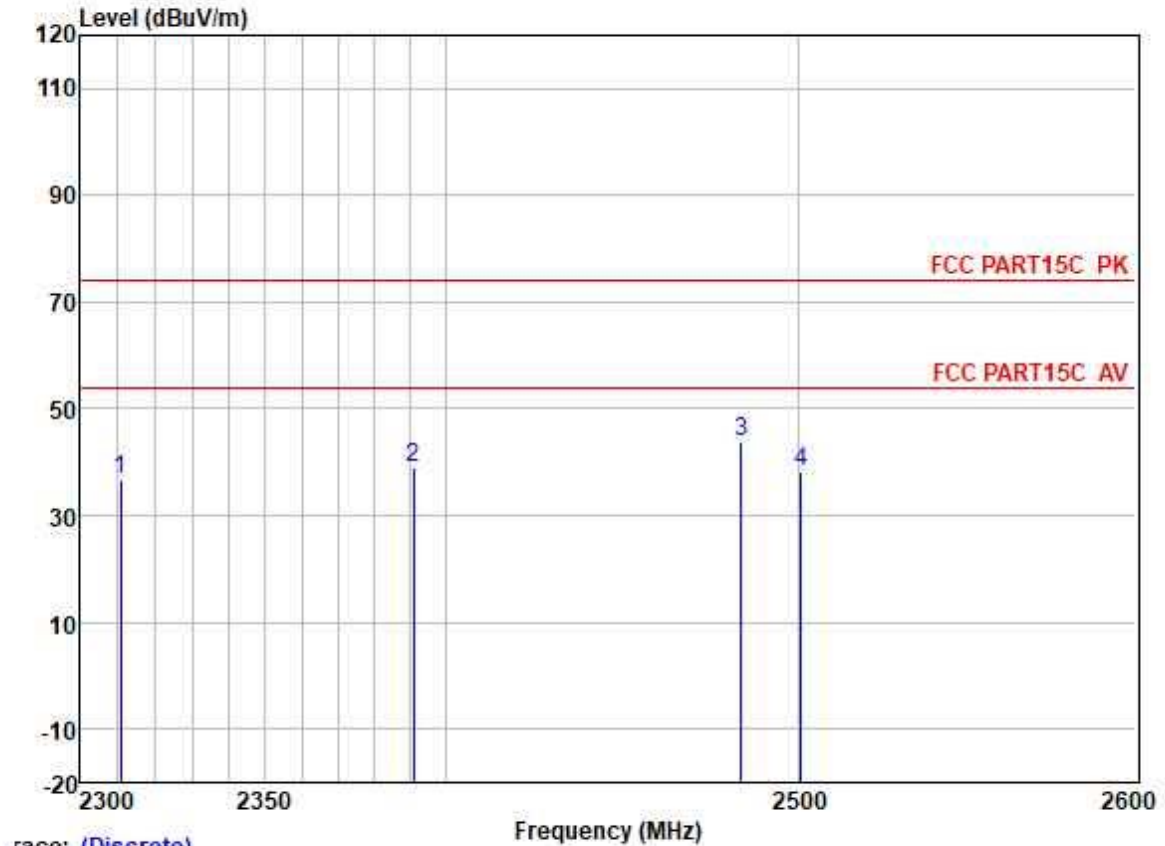

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.824	43.96	27.15	3.32	37.62	36.81	74.00	-37.19	VERTICAL	Peak
2	2390.843	45.64	27.34	3.49	37.59	38.88	74.00	-35.12	VERTICAL	Peak
3	2483.500	50.49	27.48	3.53	37.57	43.93	74.00	-30.07	VERTICAL	Peak
4	2500.663	45.03	27.50	3.40	37.56	38.37	74.00	-35.63	VERTICAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation: 802.11g; Bandwidth: 20MHz; Channel: Low

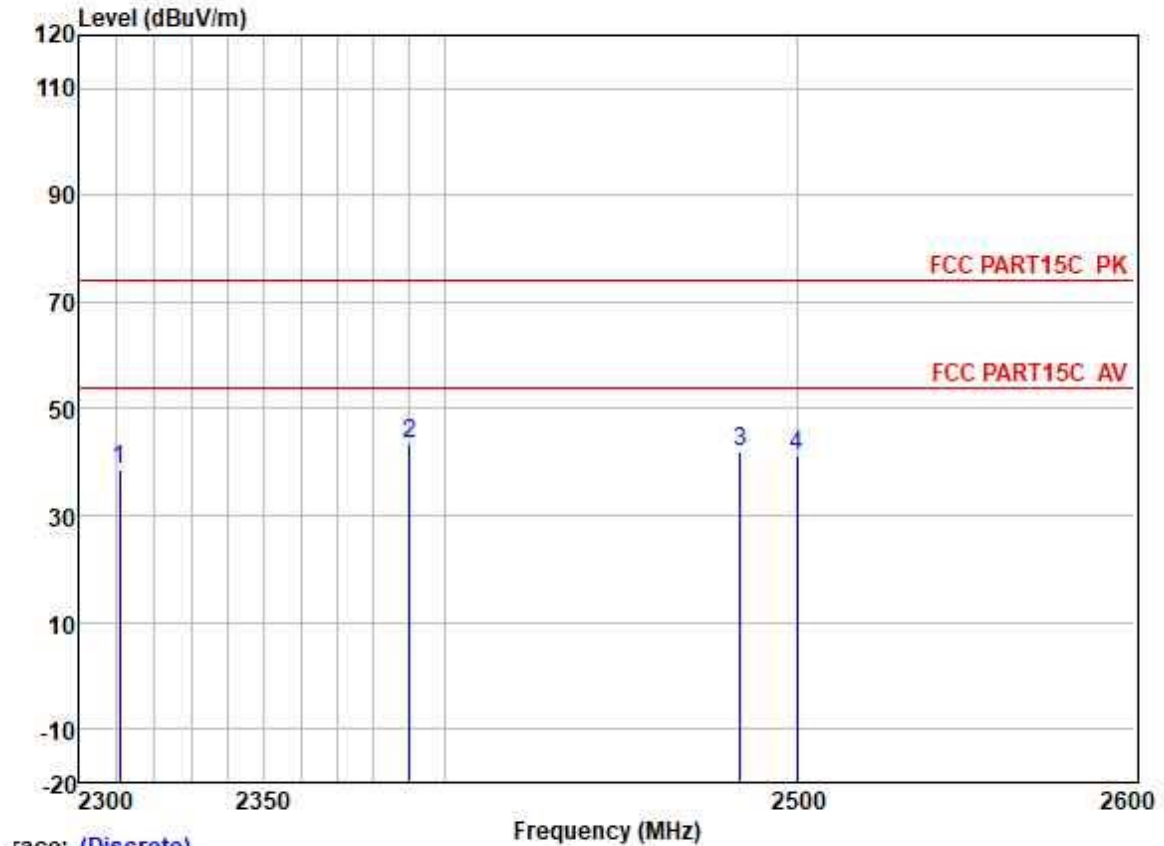

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.917	45.86	27.15	3.32	37.62	38.71	74.00	-35.29	VERTICAL	Peak
2	2390.000	50.30	27.33	3.48	37.59	43.52	74.00	-30.48	VERTICAL	Peak
3	2483.500	48.47	27.48	3.53	37.57	41.91	74.00	-32.09	VERTICAL	Peak
4	2500.000	48.03	27.50	3.40	37.56	41.37	74.00	-32.63	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

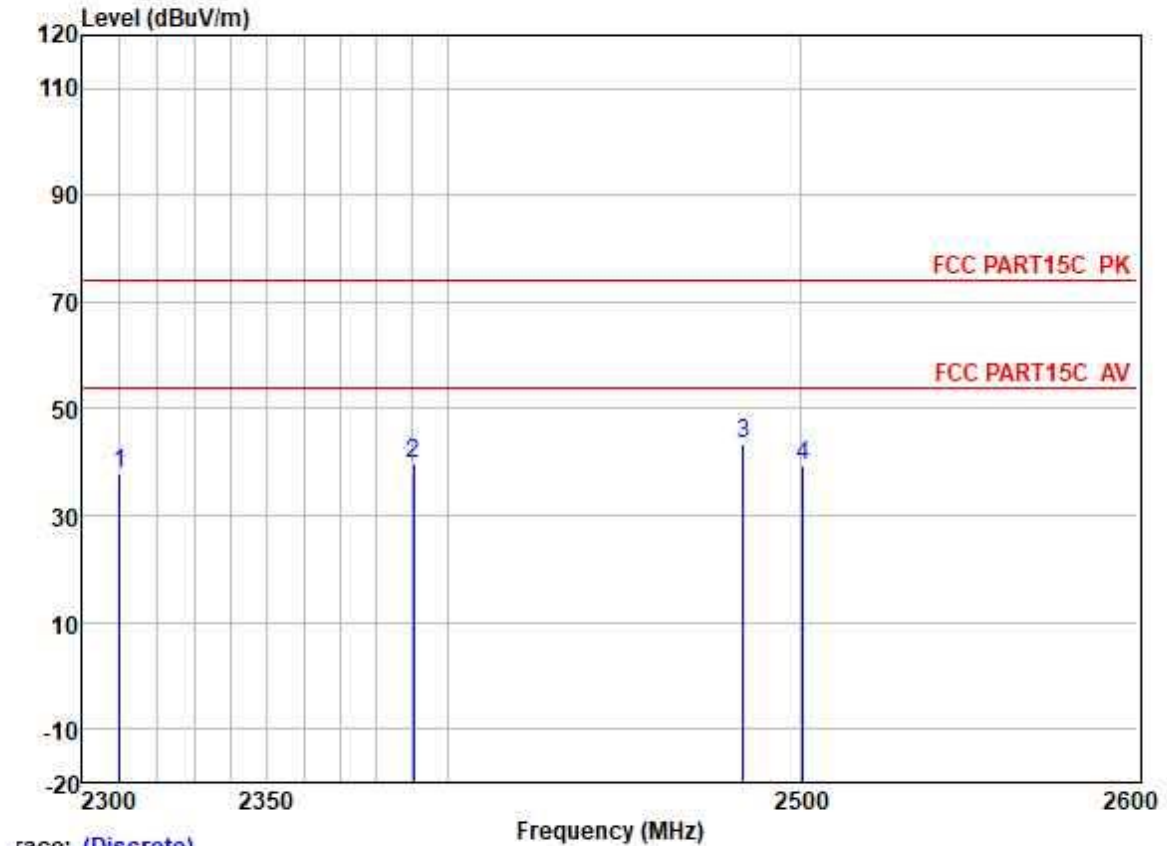

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.090	44.91	27.15	3.32	37.62	37.76	74.00	-36.24	VERTICAL	Peak
2	2390.138	46.52	27.33	3.48	37.59	39.74	74.00	-34.26	VERTICAL	Peak
3	2483.500	49.90	27.48	3.53	37.57	43.34	74.00	-30.66	VERTICAL	Peak
4	2500.663	46.05	27.50	3.40	37.56	39.39	74.00	-34.61	VERTICAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: Low

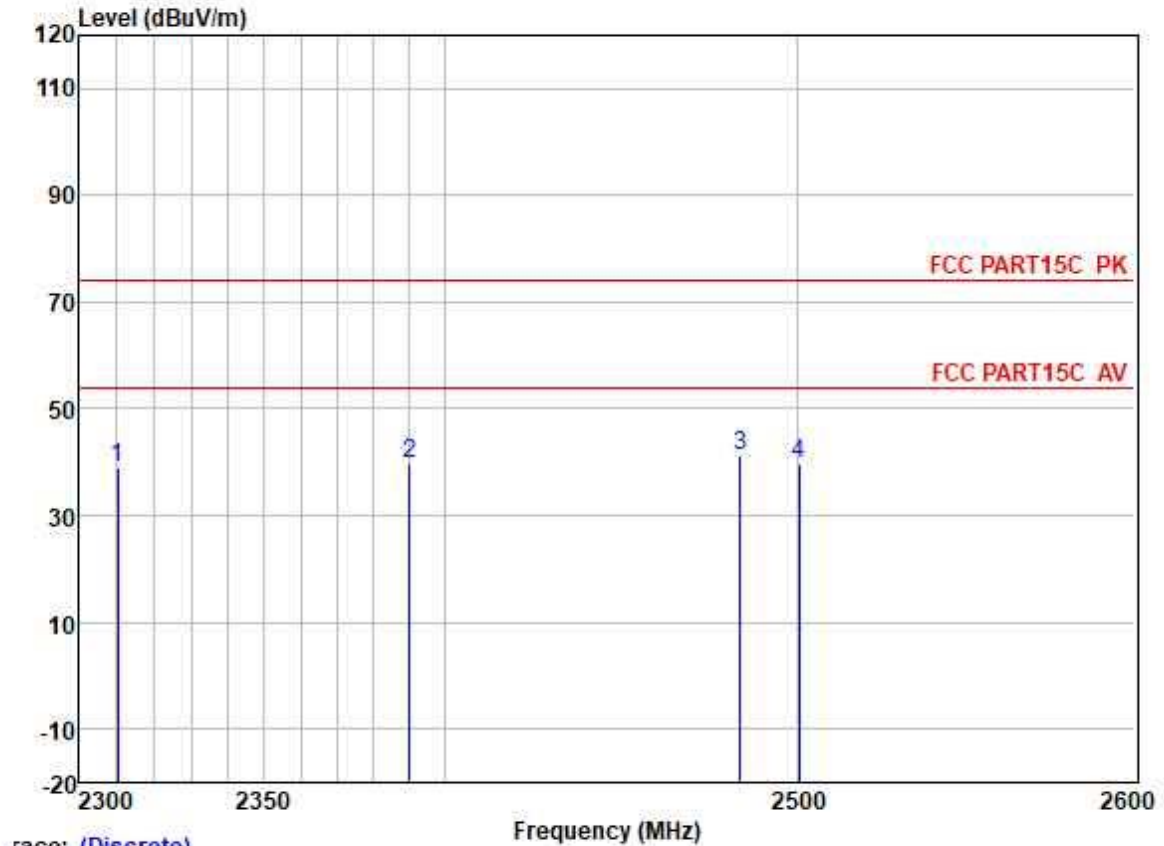

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.379	46.03	27.15	3.32	37.62	38.88	74.00	-35.12	VERTICAL Peak
2	2390.000	46.42	27.33	3.48	37.59	39.64	74.00	-34.36	VERTICAL Peak
3	2483.599	47.94	27.48	3.53	37.57	41.38	74.00	-32.62	VERTICAL Peak
4	2500.438	46.50	27.50	3.40	37.56	39.84	74.00	-34.16	VERTICAL Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

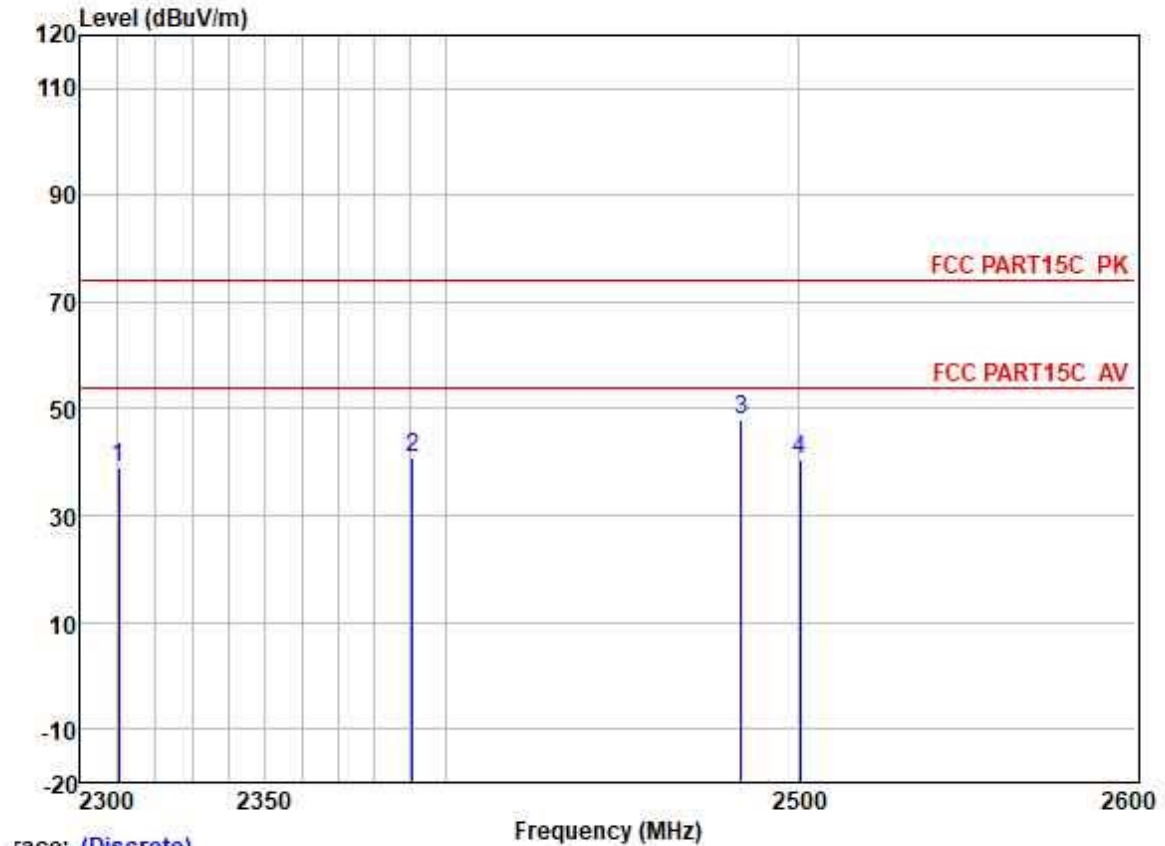

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.361	46.27	27.15	3.32	37.62	39.12	74.00	-34.88	VERTICAL	Peak
2	2390.372	47.44	27.34	3.49	37.59	40.68	74.00	-33.32	VERTICAL	Peak
3	2483.500	54.44	27.48	3.53	37.57	47.88	74.00	-26.12	VERTICAL	Peak
4	2500.583	47.17	27.50	3.40	37.56	40.51	74.00	-33.49	VERTICAL	Peak


Test Mode: 01; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

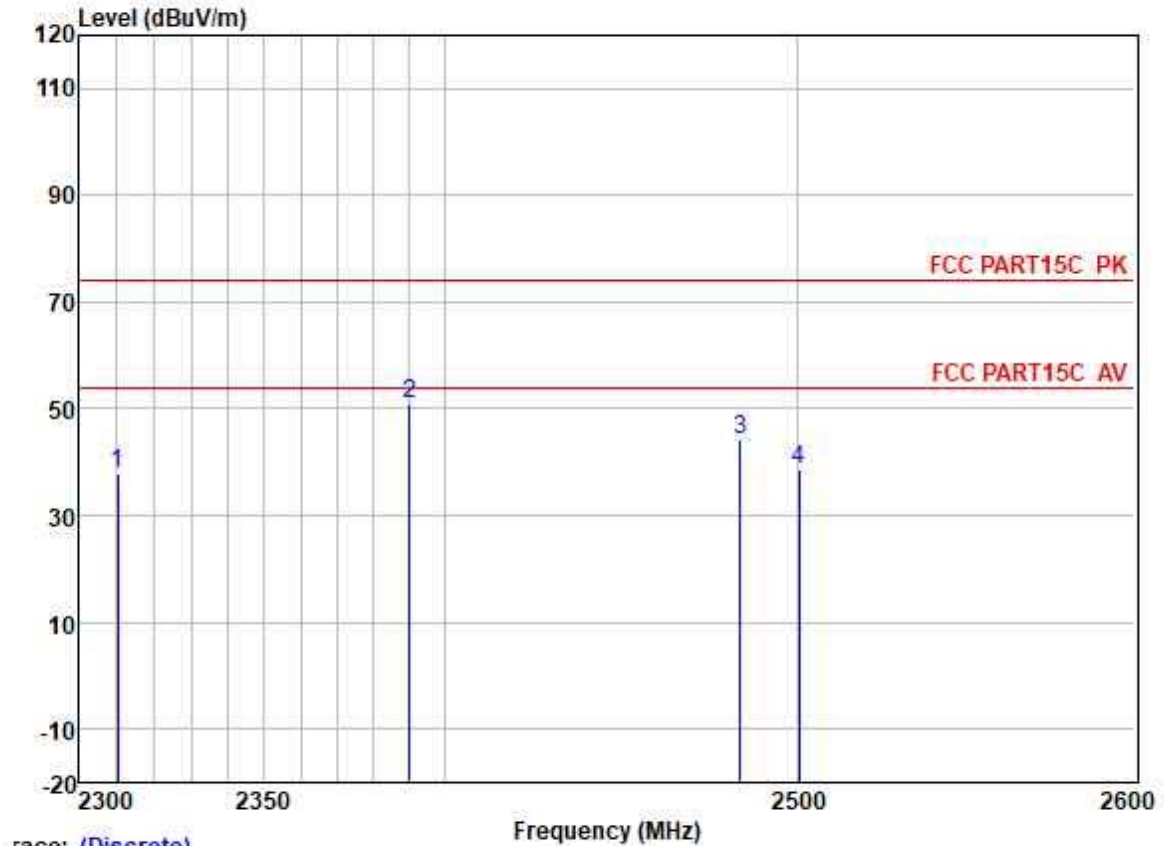

Trace: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	2310.375	45.03	27.15	3.32	37.62	37.88	74.00 -36.12	VERTICAL	Peak
2	2390.000	57.75	27.33	3.48	37.59	50.97	74.00 -23.03	VERTICAL	Peak
3	2483.500	50.60	27.48	3.53	37.57	44.04	74.00 -29.96	VERTICAL	Peak
4	2500.583	45.32	27.50	3.40	37.56	38.66	74.00 -35.34	VERTICAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

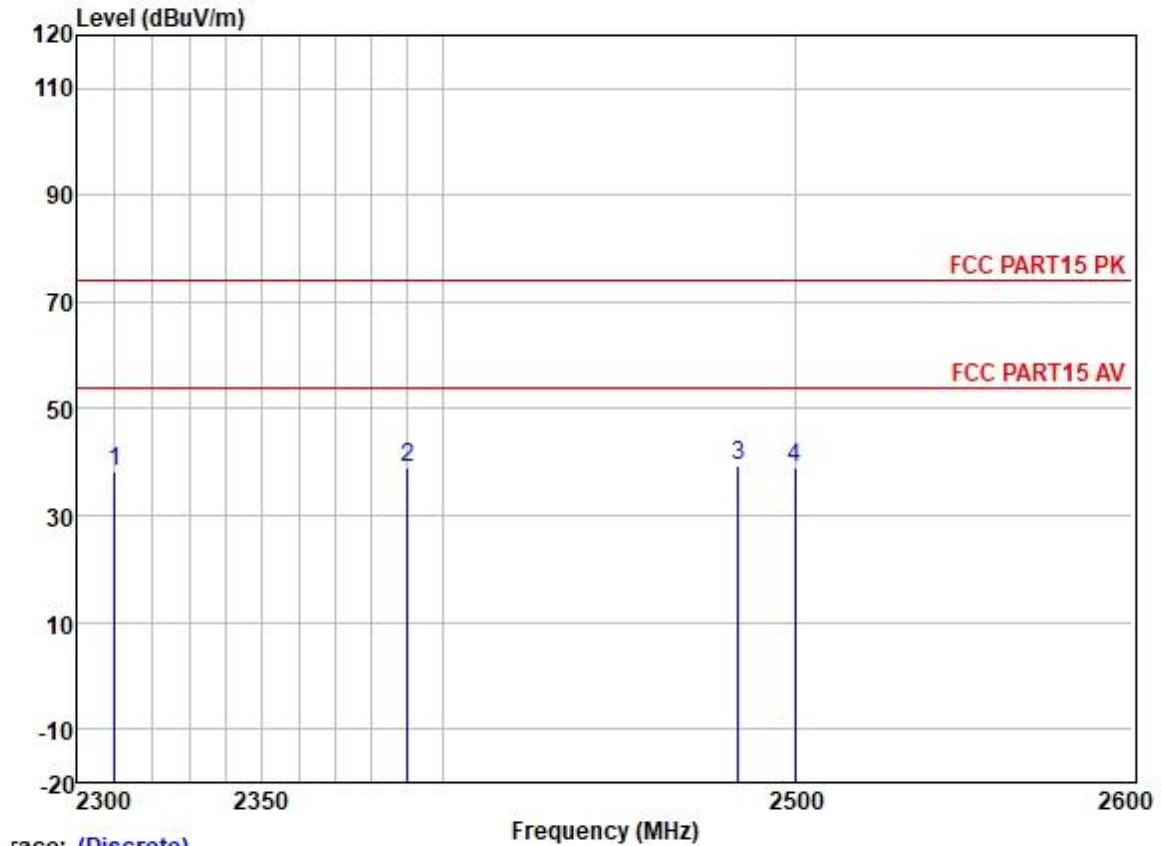

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	45.56	27.15	3.32	37.62	38.41	74.00	-35.59 HORIZONTAL Peak
2	2390.000	45.71	27.33	3.48	37.59	38.93	74.00	-35.07 HORIZONTAL Peak
3	2483.500	45.90	27.48	3.53	37.57	39.34	74.00	-34.66 HORIZONTAL Peak
4	2500.000	45.65	27.50	3.40	37.56	38.99	74.00	-35.01 HORIZONTAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

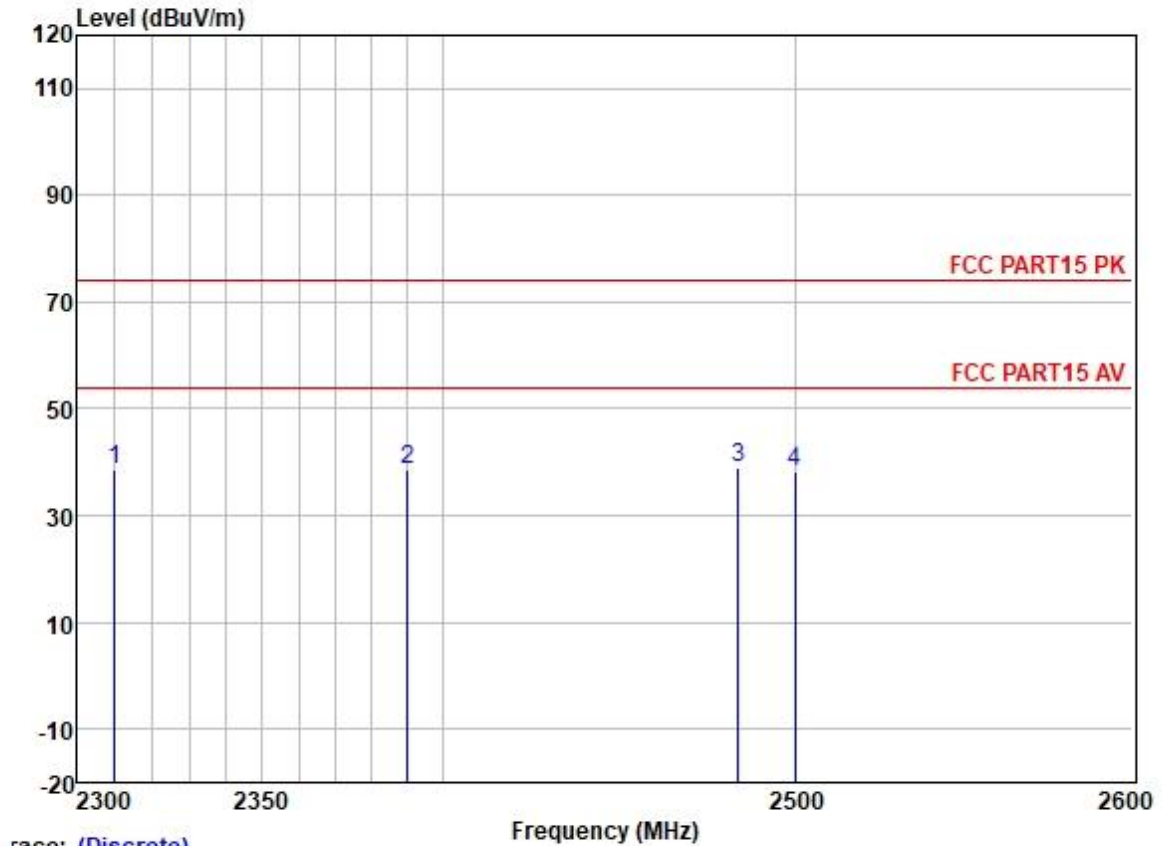

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	45.78	27.15	3.32	37.62	38.63	74.00	-35.37	HORIZONTAL	Peak
2	2390.000	45.43	27.33	3.48	37.59	38.65	74.00	-35.35	HORIZONTAL	Peak
3	2483.500	45.55	27.48	3.53	37.57	38.99	74.00	-35.01	HORIZONTAL	Peak
4	2500.000	44.80	27.50	3.40	37.56	38.14	74.00	-35.86	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:GFSK; ; Channel:High

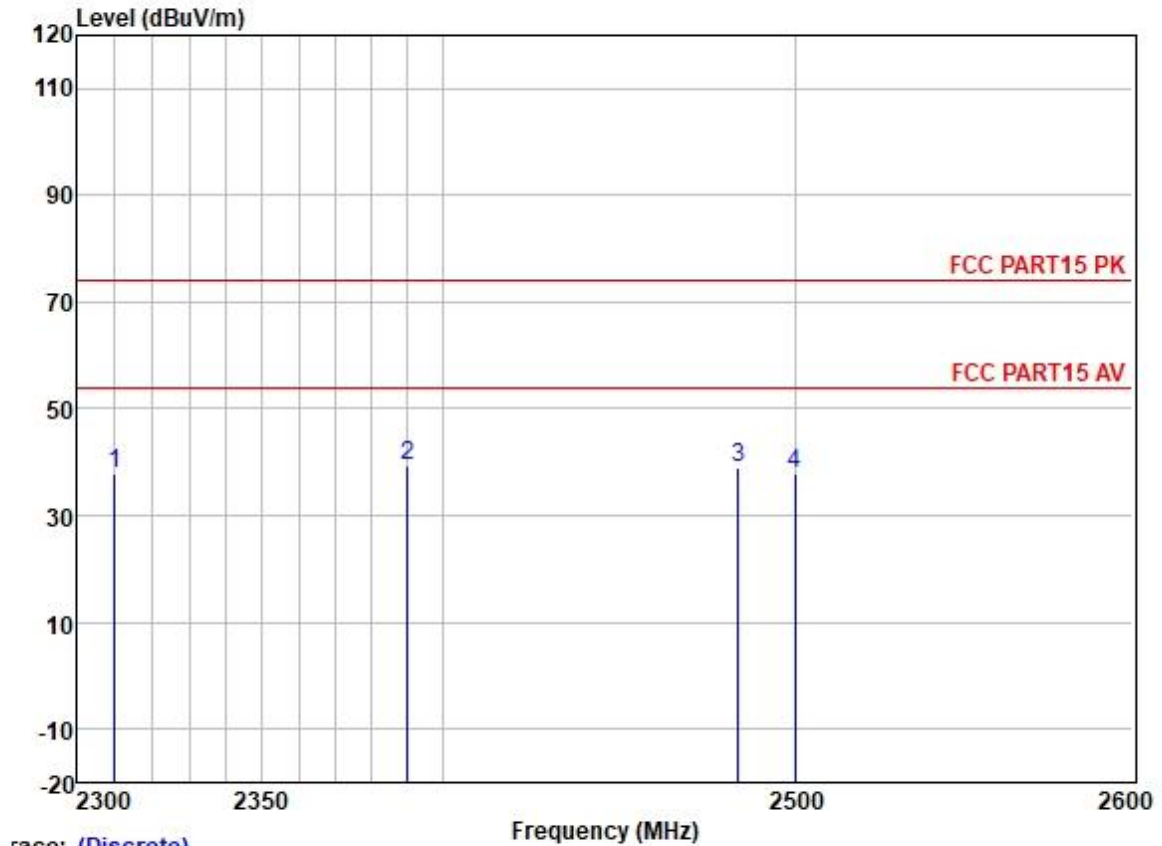

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	44.96	27.15	3.32	37.62	37.81	74.00	-36.19	VERTICAL	Peak
2	2390.000	46.23	27.33	3.48	37.59	39.45	74.00	-34.55	VERTICAL	Peak
3	2483.500	45.73	27.48	3.53	37.57	39.17	74.00	-34.83	VERTICAL	Peak
4	2500.000	44.37	27.50	3.40	37.56	37.71	74.00	-36.29	VERTICAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

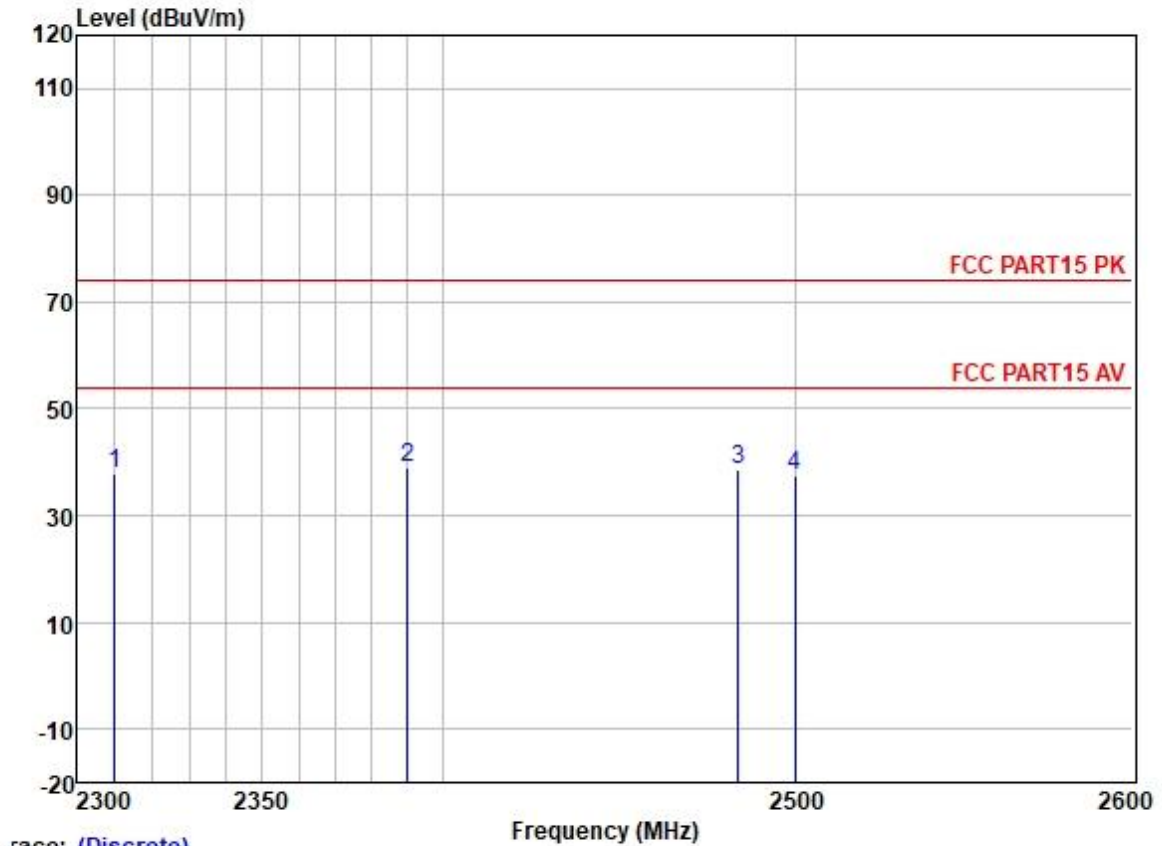

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	44.98	27.15	3.32	37.62	37.83	74.00	-36.17	VERTICAL	Peak
2	2390.000	45.79	27.33	3.48	37.59	39.01	74.00	-34.99	VERTICAL	Peak
3	2483.500	45.35	27.48	3.53	37.57	38.79	74.00	-35.21	VERTICAL	Peak
4	2500.000	44.30	27.50	3.40	37.56	37.64	74.00	-36.36	VERTICAL	Peak

7.8 Radiated Spurious Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C

Humidity: 51.6 % RH

Atmospheric Pressure: 1005 mbar

7.8.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 01 TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.


Pre-scan 04 TX mode_Keep the EUT in transmitting with modulation mode.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.8.3 Test Setup Diagram

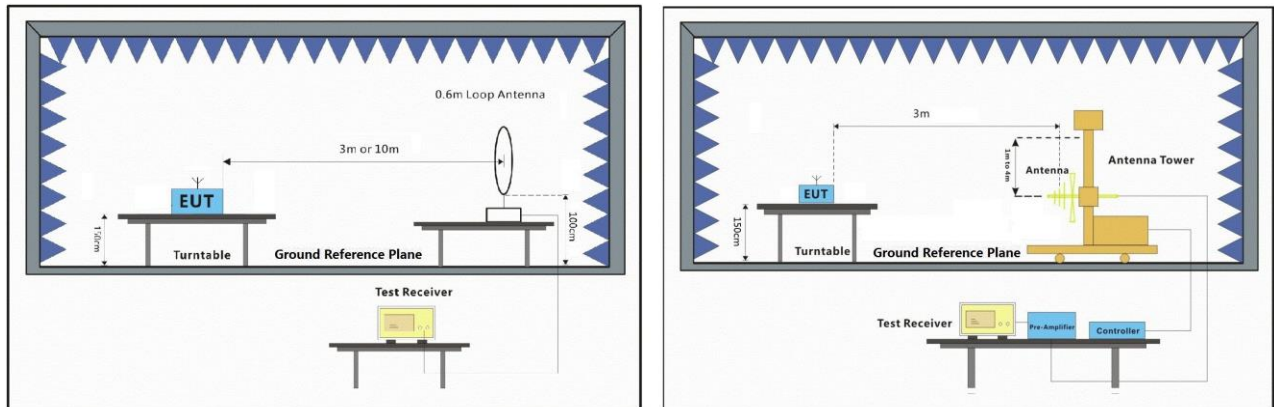

7.8.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Through pre-scan found the worst case is the highest channel for 802.11b(HT20). Only the worst case is recorded in the report.
- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

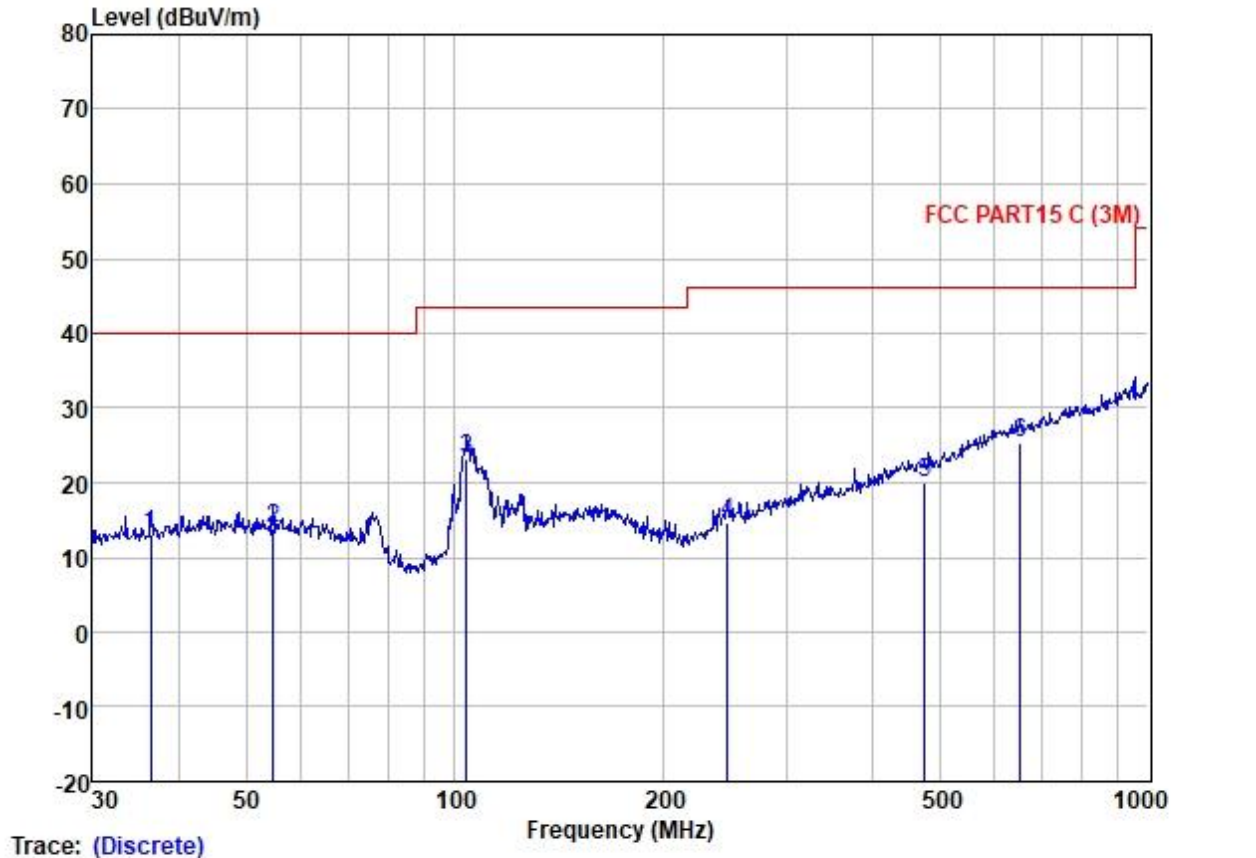

Site : SGS
Condition : FCC PART15 C (3M) HORIZONTAL
Job :
Model : M1
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	36.38	26.19	13.05	1.08	27.18	13.14	40.00	-26.86	HORIZONTAL	QP
2	54.64	25.95	13.77	1.19	27.16	13.75	40.00	-26.25	HORIZONTAL	QP
3	103.81	38.72	9.74	1.75	27.07	23.14	43.50	-20.36	HORIZONTAL	QP
4	246.81	26.32	12.03	2.90	26.63	14.62	46.00	-31.38	HORIZONTAL	QP
5	475.50	25.95	17.50	4.32	27.88	19.89	46.00	-26.11	HORIZONTAL	QP
6	654.23	27.49	20.53	5.51	28.18	25.35	46.00	-20.65	HORIZONTAL	QP

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

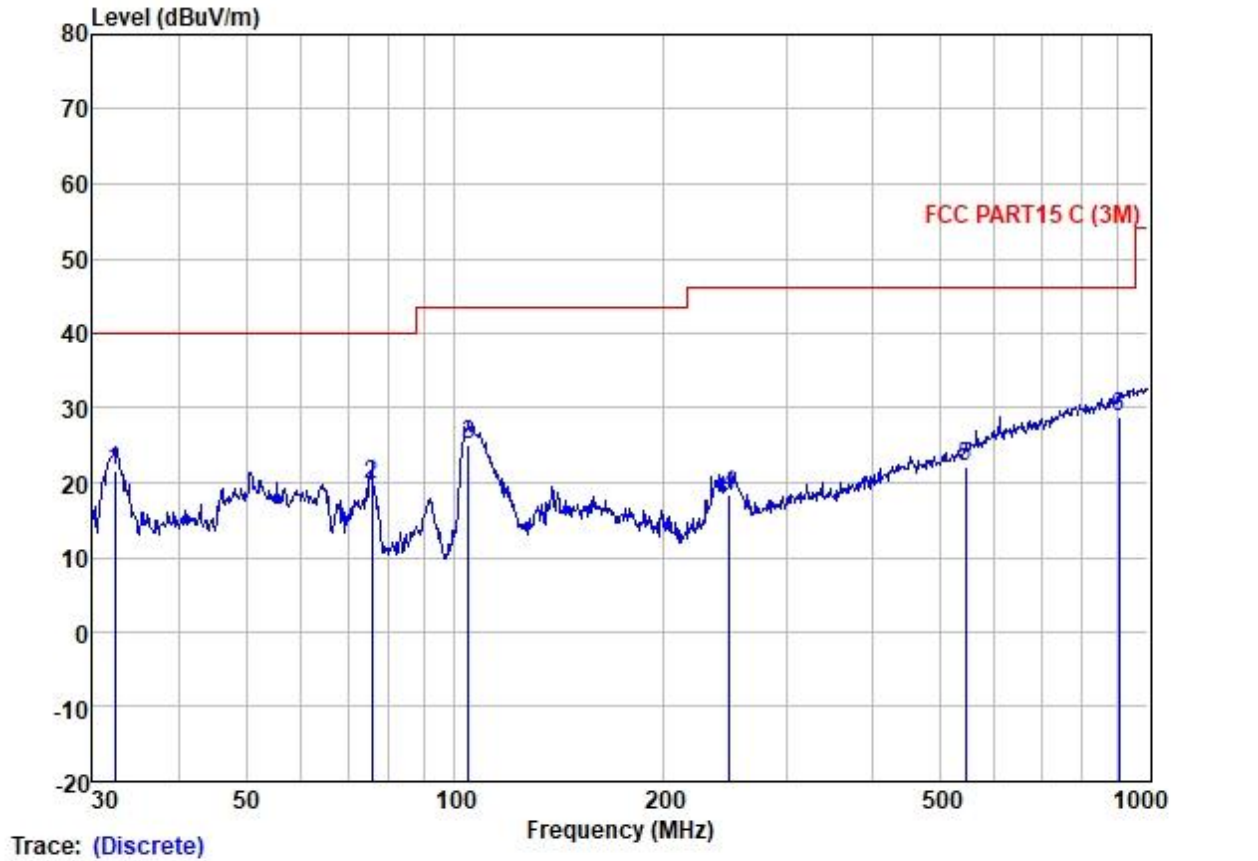

Site : SGS
Condition : FCC PART15 C (3M) VERTICAL
Job :
Model : M1
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	32.29	35.07	12.71	1.05	27.19	21.64	40.00	-18.36	VERTICAL	QP
2	75.98	35.04	10.30	1.45	27.10	19.69	40.00	-20.31	VERTICAL	QP
3	104.54	40.44	9.83	1.76	27.07	24.96	43.50	-18.54	VERTICAL	QP
4	248.55	30.00	12.07	2.90	26.62	18.35	46.00	-27.65	VERTICAL	QP
5	545.18	27.04	18.55	4.76	28.09	22.26	46.00	-23.74	VERTICAL	QP
6	906.48	26.29	23.37	6.96	27.84	28.78	46.00	-17.22	VERTICAL	QP

7.9 Radiated Spurious Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6 & 11.12.1
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 25.6 °C Humidity: 64.1 % RH Atmospheric Pressure: 1005 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.
Final test	04	TX mode_Keep the EUT in transmitting with modulation mode.



7.9.3 Test Setup Diagram

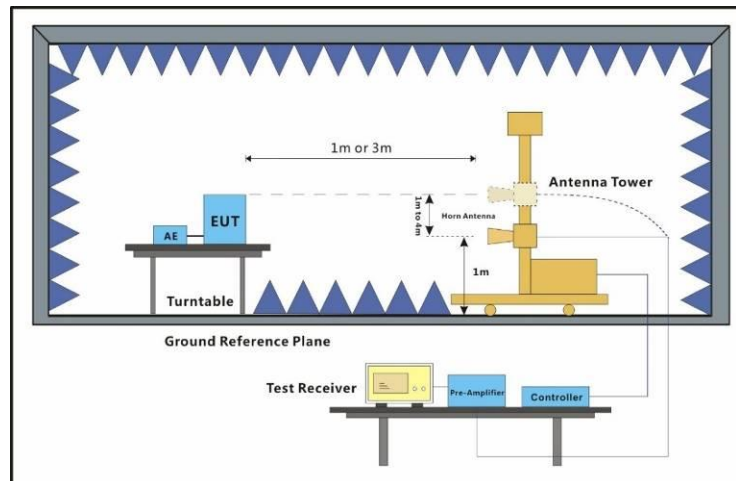

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed on the back of the report or available on request at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic forms of documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (S 7EJ0327-14-15)

Results shown in this test report relate only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.
or email: CN.Doccheck@sgs.com
No.198 Kezhu Road, Science&Tech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) The field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

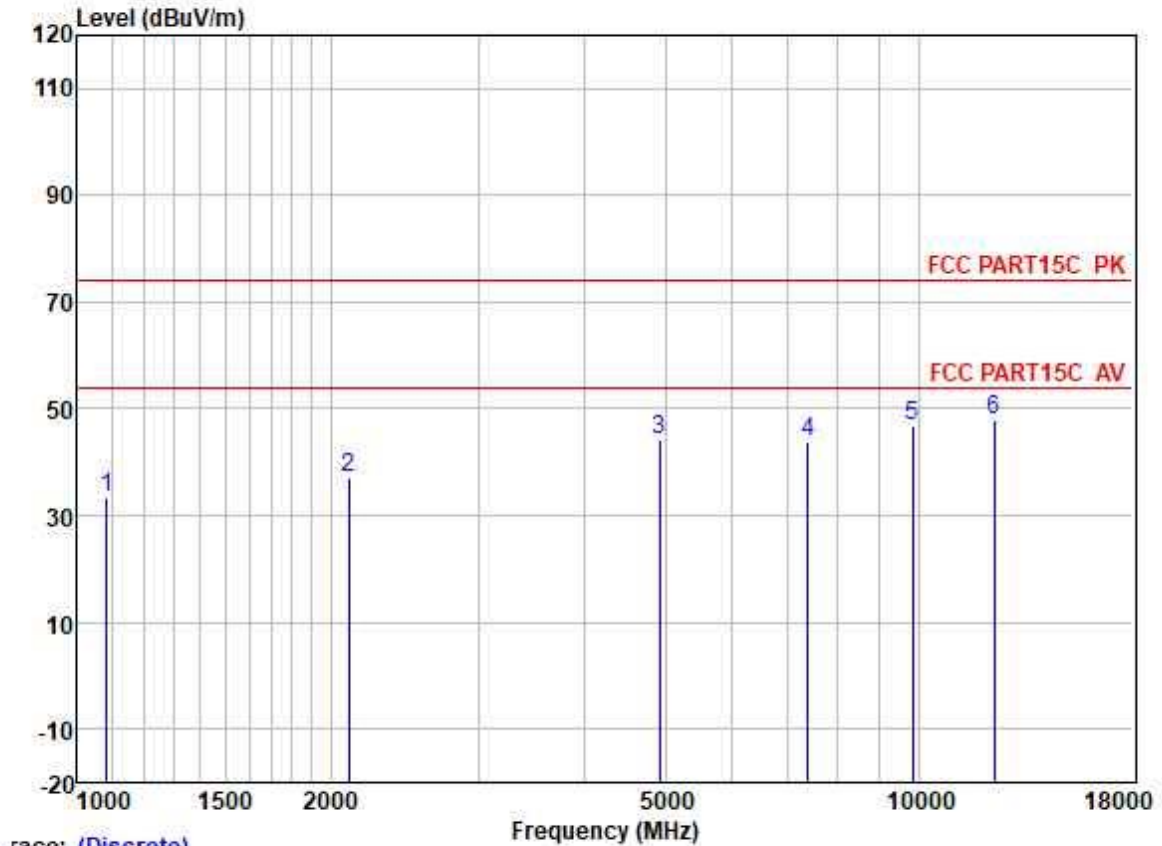

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1084.295	45.15	24.33	2.33	38.46	33.35	74.00	-40.65	HORIZONTAL	Peak
2	2101.866	45.30	26.30	3.15	37.68	37.07	74.00	-36.93	HORIZONTAL	Peak
3	4924.307	43.77	31.62	5.60	36.84	44.15	74.00	-29.85	HORIZONTAL	Peak
4	7386.429	39.05	36.17	6.19	37.45	43.96	74.00	-30.04	HORIZONTAL	Peak
5	9848.221	38.66	38.58	6.99	37.41	46.82	74.00	-27.18	HORIZONTAL	Peak
6	12310.610	38.11	38.63	8.01	36.95	47.80	74.00	-26.20	HORIZONTAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11b; Bandwidth: 20MHz; Channel: Low

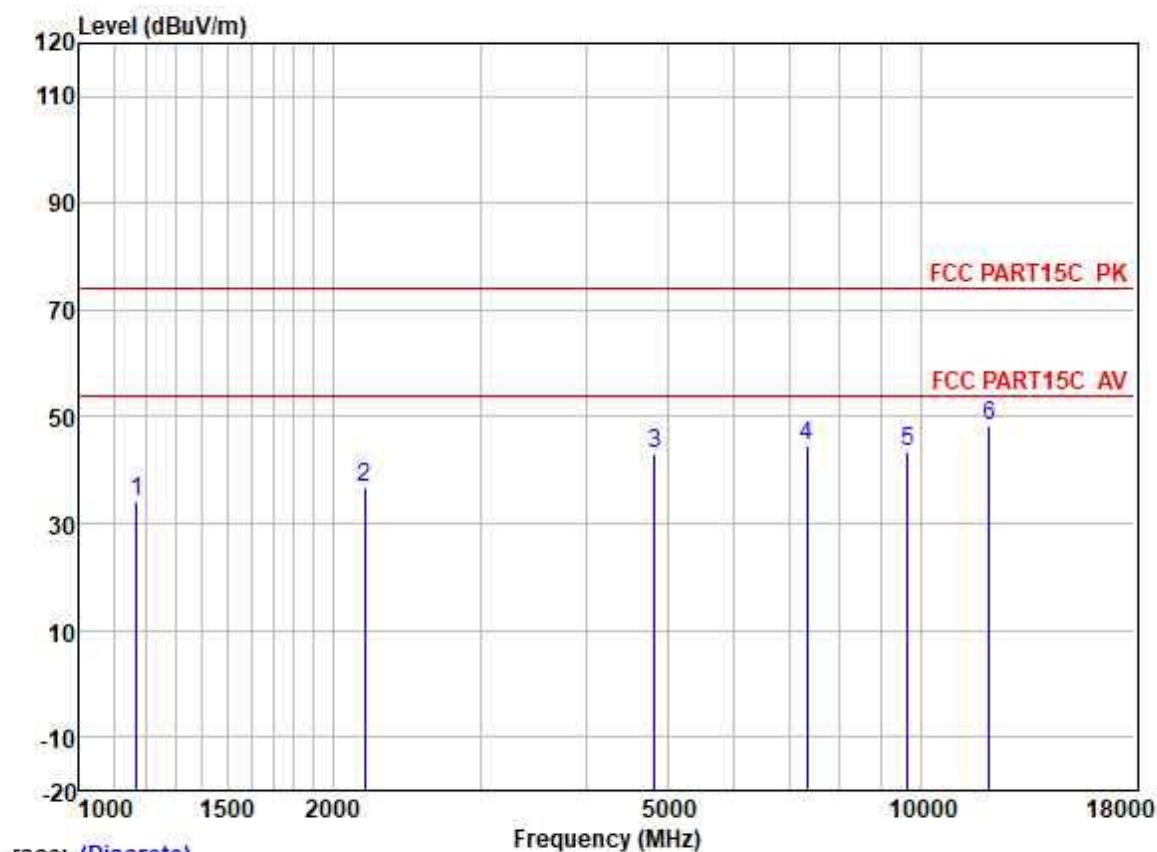

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	45.57	24.55	2.39	38.40	34.11	74.00	-39.89	HORIZONTAL	Peak
2	2182.346	44.86	26.54	3.19	37.66	36.93	74.00	-37.07	HORIZONTAL	Peak
3	4824.540	43.20	31.45	5.42	36.83	43.24	74.00	-30.76	HORIZONTAL	Peak
4	7326.052	39.91	36.00	6.13	37.43	44.61	74.00	-29.39	HORIZONTAL	Peak
5	9648.909	35.40	38.40	7.06	37.42	43.44	74.00	-30.56	HORIZONTAL	Peak
6	12060.540	38.27	38.88	8.17	37.08	48.24	74.00	-25.76	HORIZONTAL	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (SGS 75E) 82071444

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 www.sqsgroup.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sqsg.china@sqs.com


Test Mode: 01; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

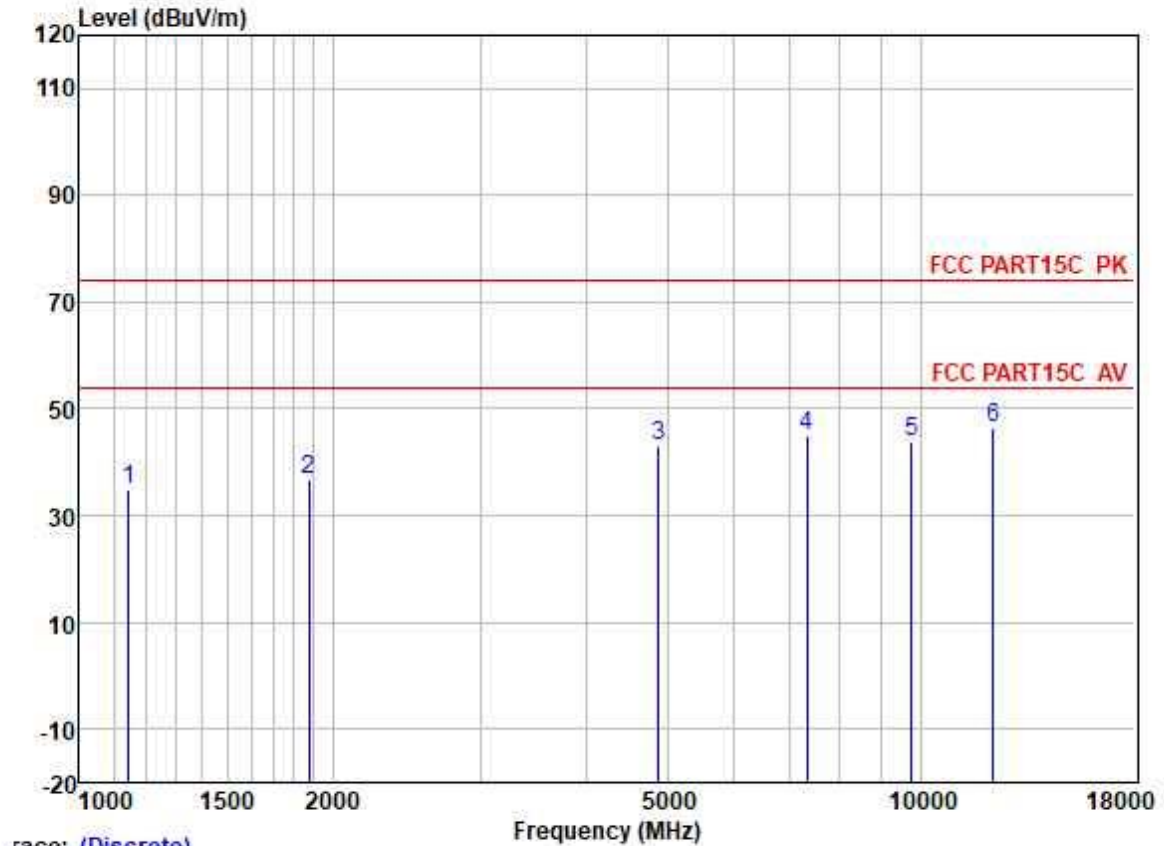

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	46.65	24.48	2.32	38.42	35.03	74.00	-38.97	HORIZONTAL	Peak
2	1872.381	45.76	26.02	2.92	37.77	36.93	74.00	-37.07	HORIZONTAL	Peak
3	4884.975	42.98	31.56	5.52	36.84	43.22	74.00	-30.78	HORIZONTAL	Peak
4	7326.015	40.19	36.00	6.13	37.43	44.89	74.00	-29.11	HORIZONTAL	Peak
5	9768.880	35.58	38.53	7.01	37.41	43.71	74.00	-30.29	HORIZONTAL	Peak
6	12210.950	36.67	38.74	8.08	37.00	46.49	74.00	-27.51	HORIZONTAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

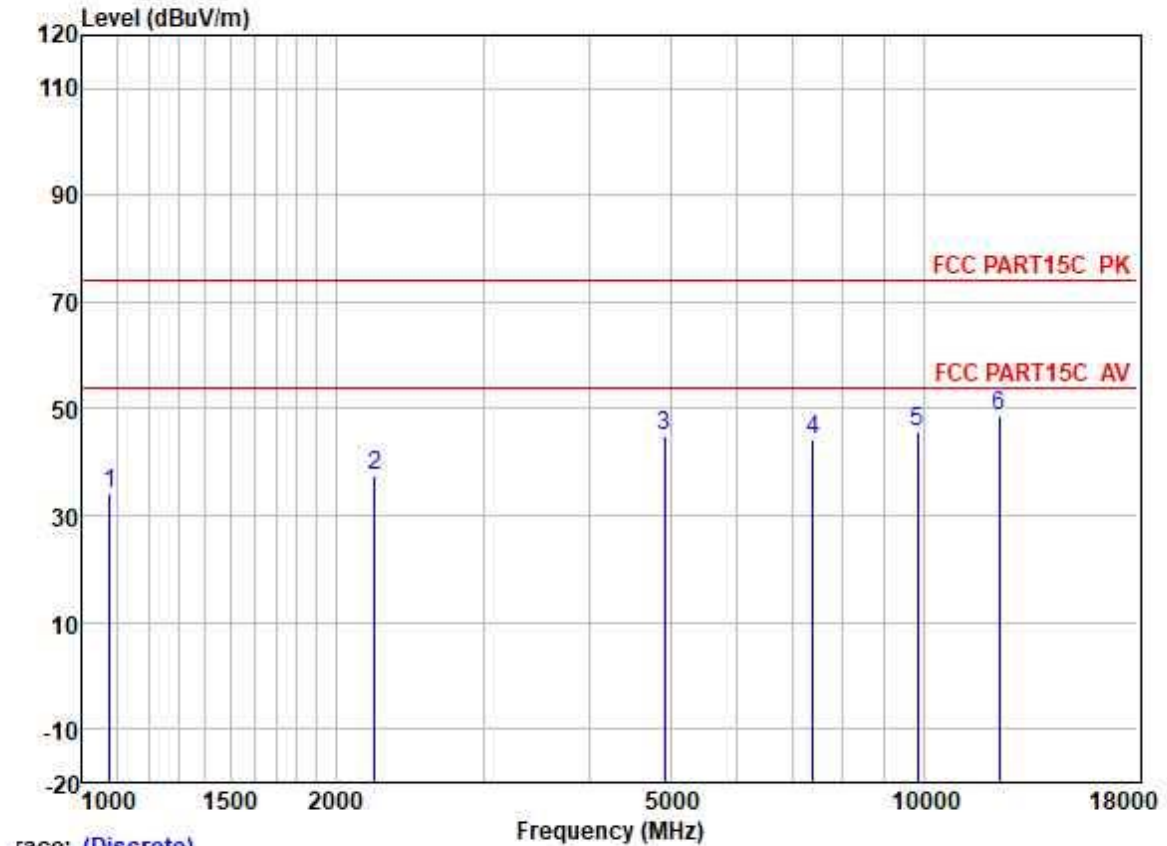


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1078.046	45.87	24.32	2.34	38.46	34.07	74.00	-39.93 HORIZONTAL Peak
2	2226.950	45.15	26.76	3.23	37.64	37.50	74.00	-36.50 HORIZONTAL Peak
3	4924.058	44.43	31.62	5.60	36.84	44.81	74.00	-29.19 HORIZONTAL Peak
4	7386.070	39.28	36.17	6.19	37.45	44.19	74.00	-29.81 HORIZONTAL Peak
5	9848.916	37.45	38.58	6.99	37.41	45.61	74.00	-28.39 HORIZONTAL Peak
6	12310.270	39.19	38.63	8.01	36.95	48.88	74.00	-25.12 HORIZONTAL Peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

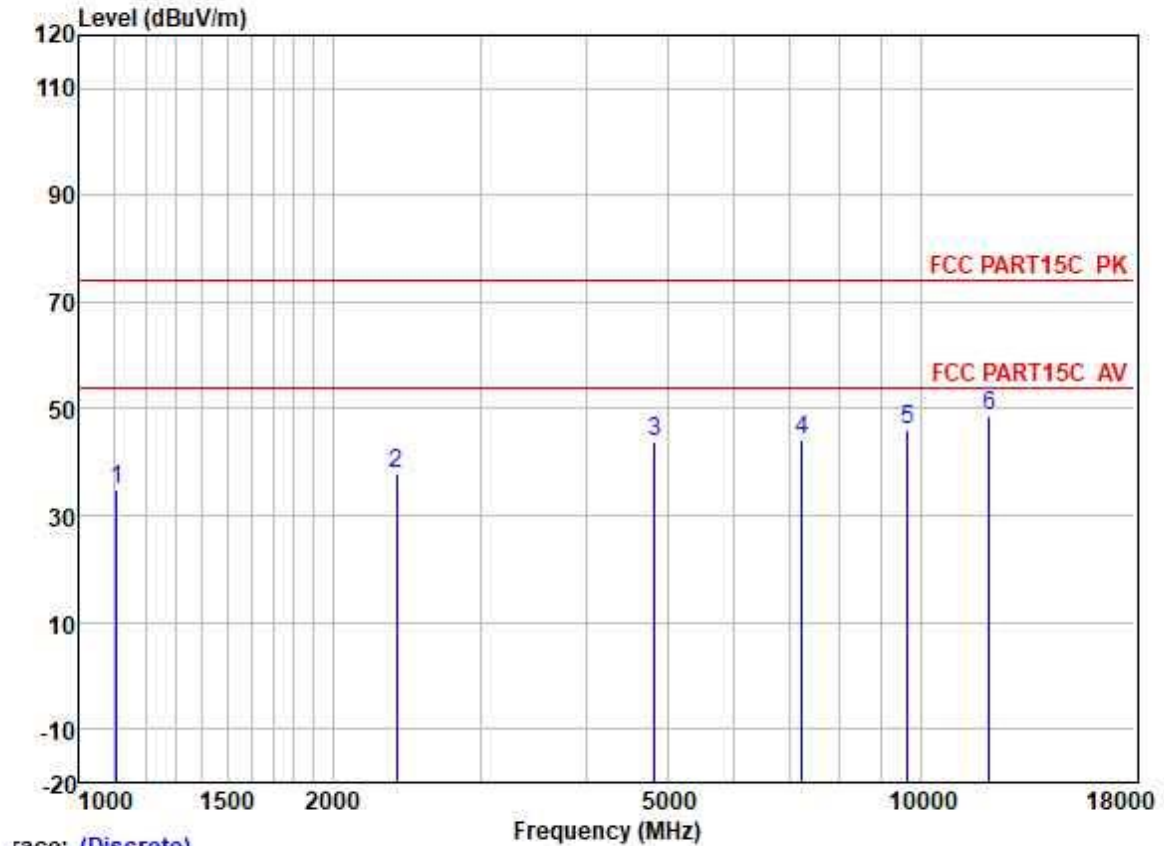


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1106.457	46.76	24.38	2.28	38.45	34.97	74.00	-39.03
2	2380.026	44.81	27.31	3.46	37.60	37.98	74.00	-36.02
3	4824.662	43.78	31.45	5.42	36.83	43.82	74.00	-30.18
4	7236.914	39.90	35.70	6.03	37.39	44.24	74.00	-29.76
5	9648.371	37.92	38.40	7.06	37.42	45.96	74.00	-28.04
6	12060.440	38.81	38.88	8.17	37.08	48.78	74.00	-25.22

Test Mode: 01; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

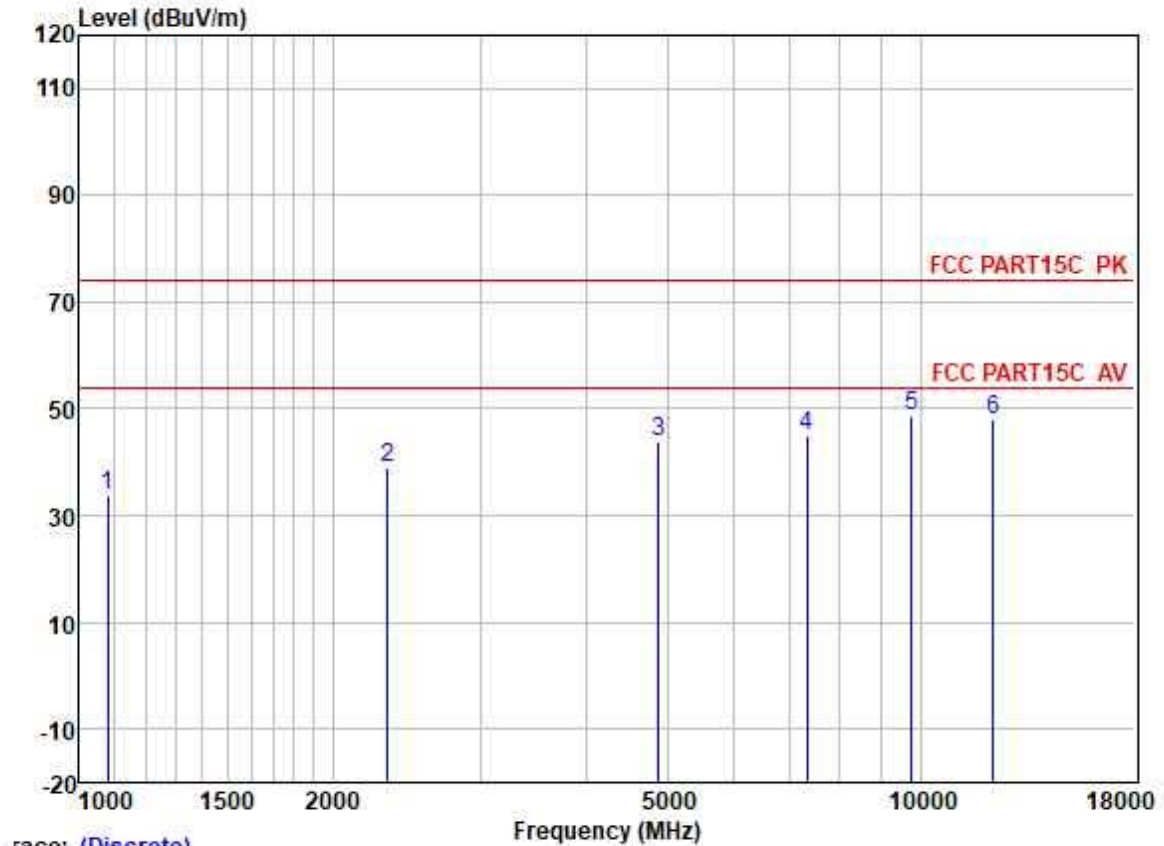


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1081.166	45.65	24.33	2.33	38.46	33.85	74.00	-40.15	HORIZONTAL	Peak
2	2325.624	46.18	27.19	3.34	37.62	39.09	74.00	-34.91	HORIZONTAL	Peak
3	4884.662	43.45	31.56	5.52	36.84	43.69	74.00	-30.31	HORIZONTAL	Peak
4	7326.122	40.36	36.00	6.13	37.43	45.06	74.00	-28.94	HORIZONTAL	Peak
5	9768.349	40.55	38.53	7.01	37.41	48.68	74.00	-25.32	HORIZONTAL	Peak
6	12210.700	38.21	38.74	8.08	37.00	48.03	74.00	-25.97	HORIZONTAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

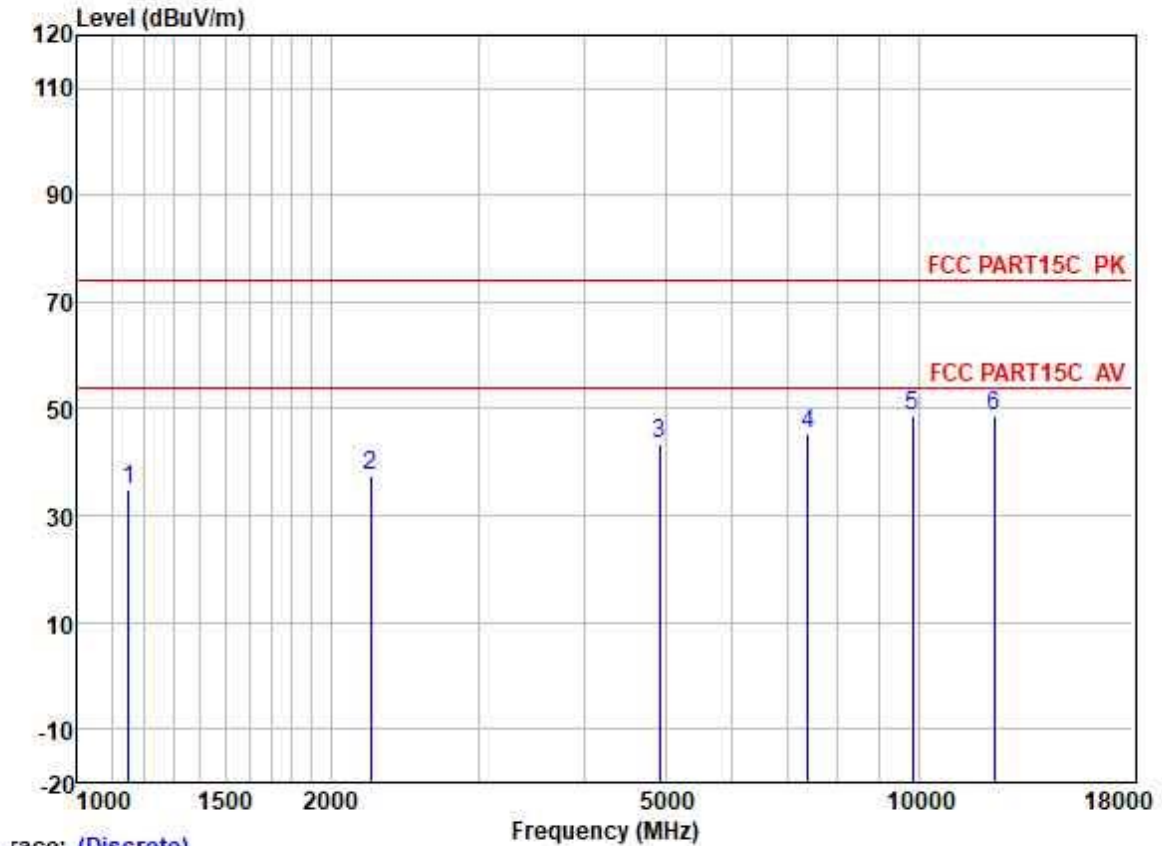


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	46.61	24.50	2.36	38.42	35.05	74.00	-38.95	HORIZONTAL	Peak
2	2233.396	45.19	26.80	3.23	37.64	37.58	74.00	-36.42	HORIZONTAL	Peak
3	4924.721	43.12	31.62	5.60	36.84	43.50	74.00	-30.50	HORIZONTAL	Peak
4	7386.122	40.55	36.17	6.19	37.45	45.46	74.00	-28.54	HORIZONTAL	Peak
5	9848.525	40.49	38.58	6.99	37.41	48.65	74.00	-25.35	HORIZONTAL	Peak
6	12310.350	39.05	38.63	8.01	36.95	48.74	74.00	-25.26	HORIZONTAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

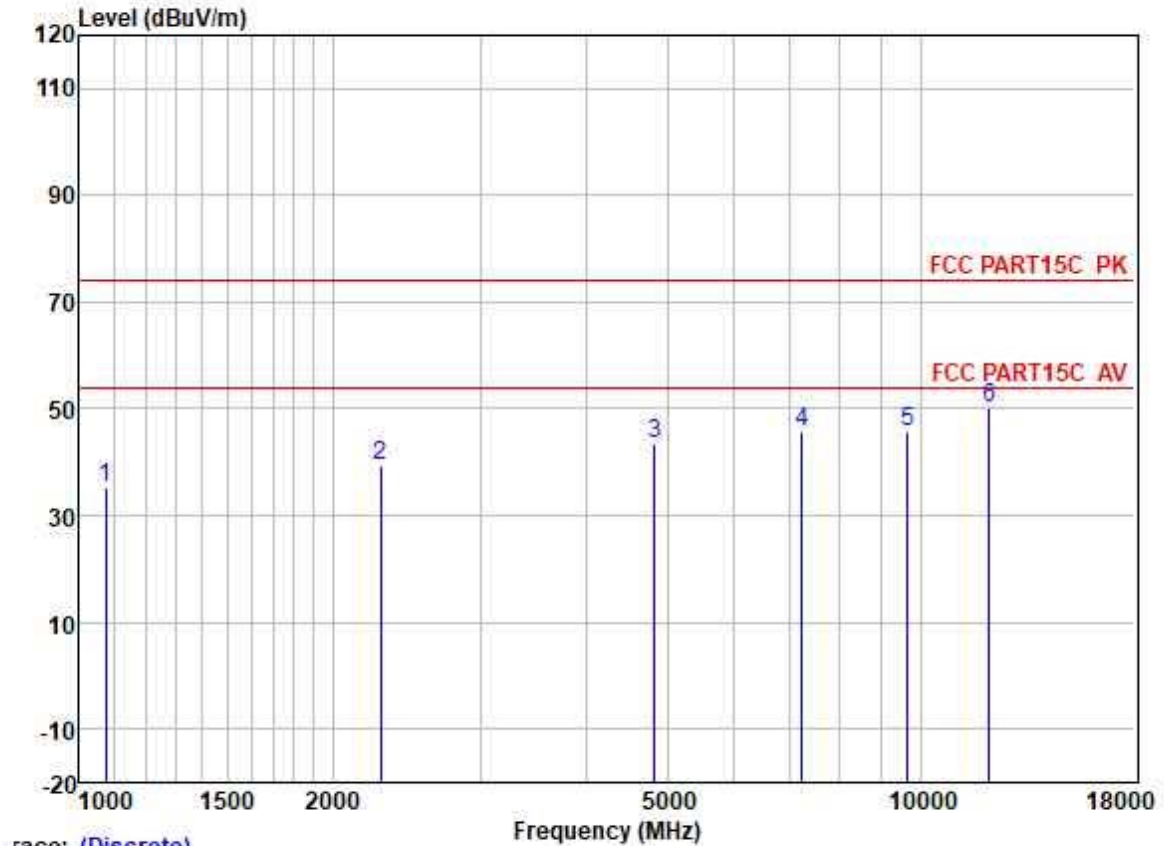


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1074.934	47.18	24.32	2.35	38.46	35.39	74.00	-38.61
2	2279.044	46.72	27.03	3.28	37.63	39.40	74.00	-34.60
3	4824.887	43.46	31.45	5.42	36.83	43.50	74.00	-30.50
4	7236.144	41.48	35.70	6.03	37.39	45.82	74.00	-28.18
5	9648.916	37.51	38.40	7.06	37.42	45.55	74.00	-28.45
6	12060.740	40.09	38.88	8.17	37.08	50.06	74.00	-23.94

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

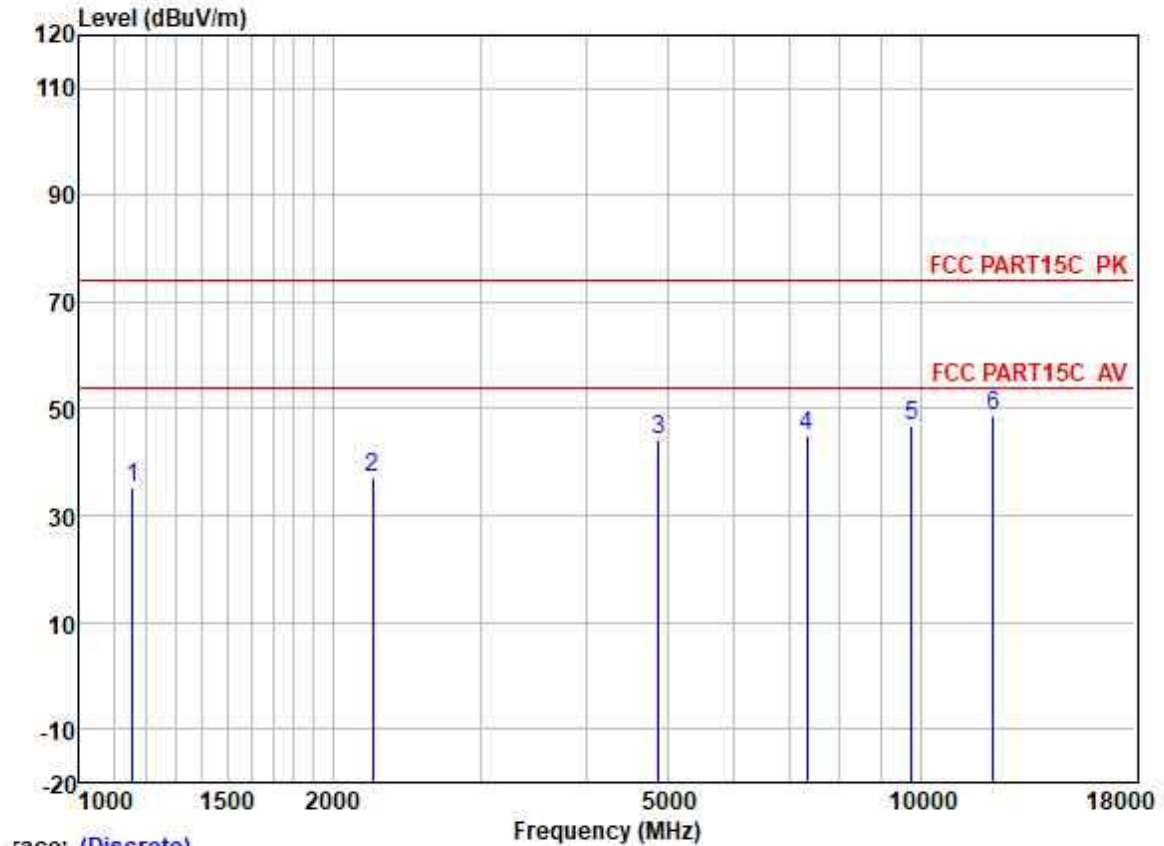


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1155.483	46.82	24.51	2.38	38.42	35.29	74.00	-38.71	HORIZONTAL	Peak
2	2233.396	44.81	26.80	3.23	37.64	37.20	74.00	-36.80	HORIZONTAL	Peak
3	4884.043	44.12	31.56	5.52	36.84	44.36	74.00	-29.64	HORIZONTAL	Peak
4	7326.144	40.21	36.00	6.13	37.43	44.91	74.00	-29.09	HORIZONTAL	Peak
5	9768.312	38.59	38.53	7.01	37.41	46.72	74.00	-27.28	HORIZONTAL	Peak
6	12210.820	39.02	38.74	8.08	37.00	48.84	74.00	-25.16	HORIZONTAL	Peak

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

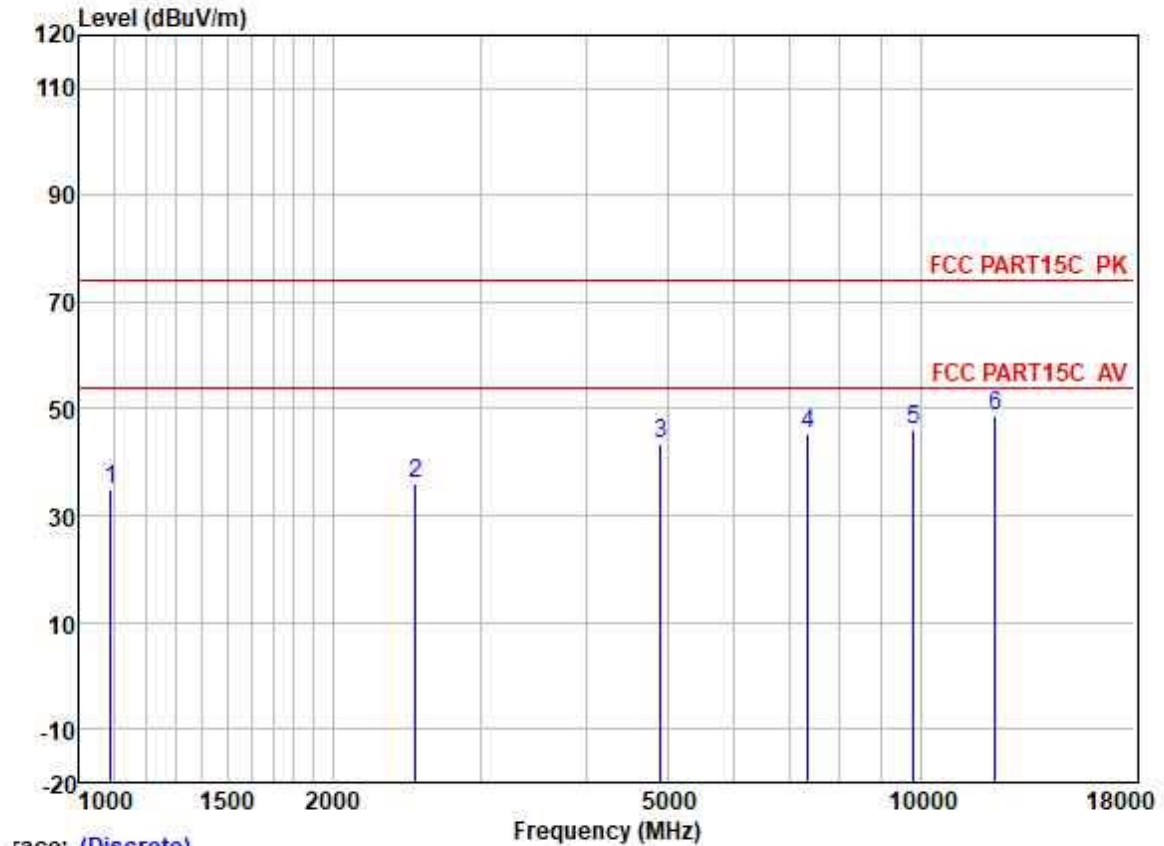


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1090.582	46.71	24.35	2.32	38.45	34.93	74.00	-39.07
2	2507.129	42.59	27.51	3.41	37.56	35.95	74.00	-38.05
3	4904.999	43.15	31.58	5.55	36.84	43.44	74.00	-30.56
4	7356.015	40.54	36.06	6.15	37.44	45.31	74.00	-28.69
5	9808.371	38.07	38.56	7.00	37.41	46.22	74.00	-27.78
6	12260.580	39.09	38.70	8.06	36.98	48.87	74.00	-25.13

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

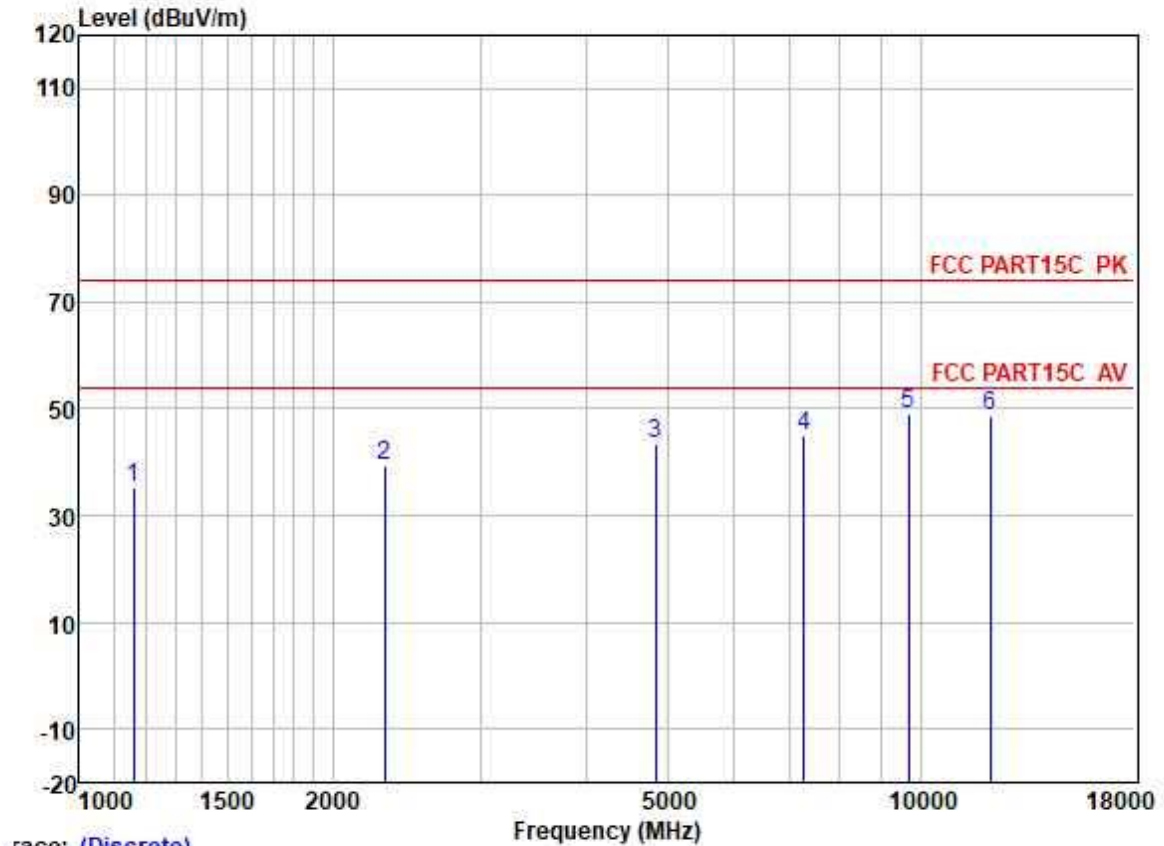


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1158.828	46.57	24.52	2.40	38.42	35.07	74.00	-38.93
2	2305.546	46.67	27.13	3.31	37.62	39.49	74.00	-34.51
3	4844.975	43.23	31.50	5.45	36.84	43.34	74.00	-30.66
4	7266.474	40.46	35.78	6.06	37.41	44.89	74.00	-29.11
5	9688.525	41.13	38.44	7.04	37.42	49.19	74.00	-24.81
6	12110.580	38.85	38.83	8.14	37.05	48.77	74.00	-25.23

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

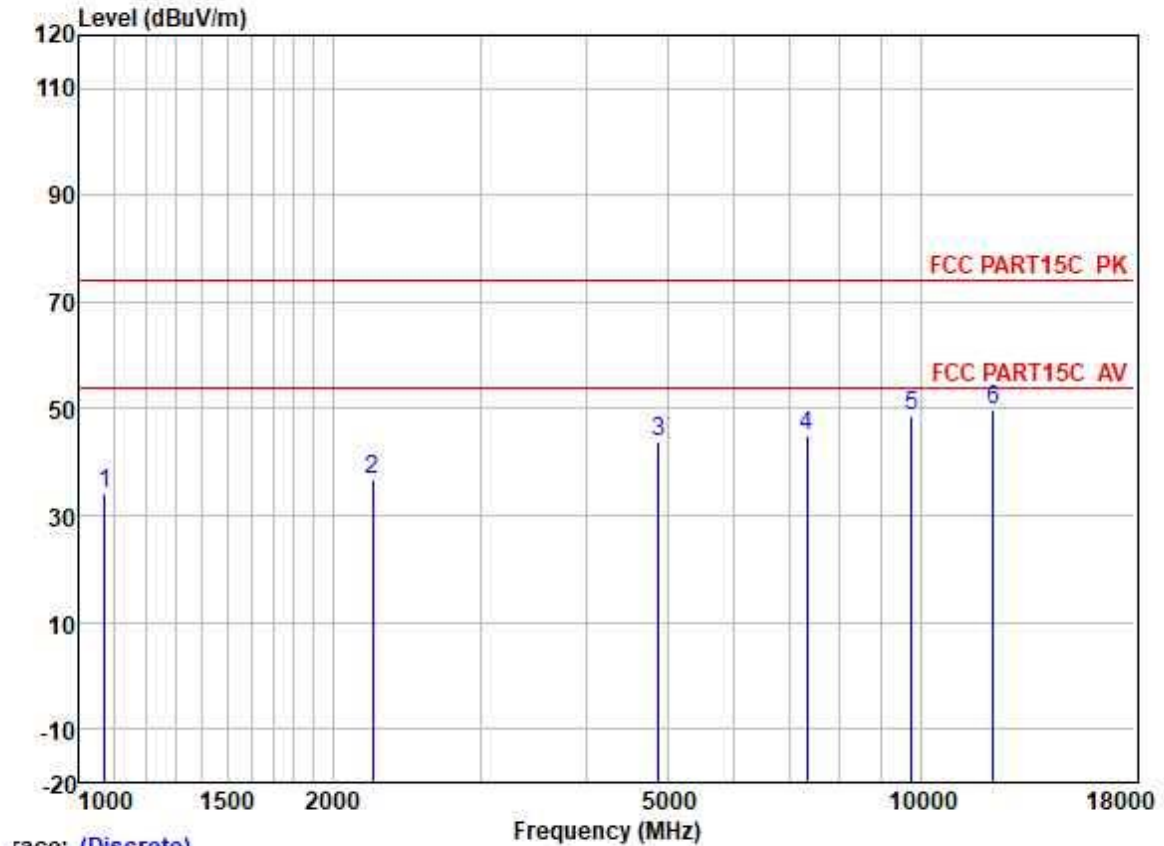


	Freq	ReadAntenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1071.832	45.99	24.31	2.36	38.46	34.20	74.00	-39.80
2	2233.396	44.43	26.80	3.23	37.64	36.82	74.00	-37.18
3	4884.515	43.48	31.56	5.52	36.84	43.72	74.00	-30.28
4	7326.150	40.35	36.00	6.13	37.43	45.05	74.00	-28.95
5	9768.717	40.43	38.53	7.01	37.41	48.56	74.00	-25.44
6	12210.700	40.12	38.74	8.08	37.00	49.94	74.00	-24.06

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

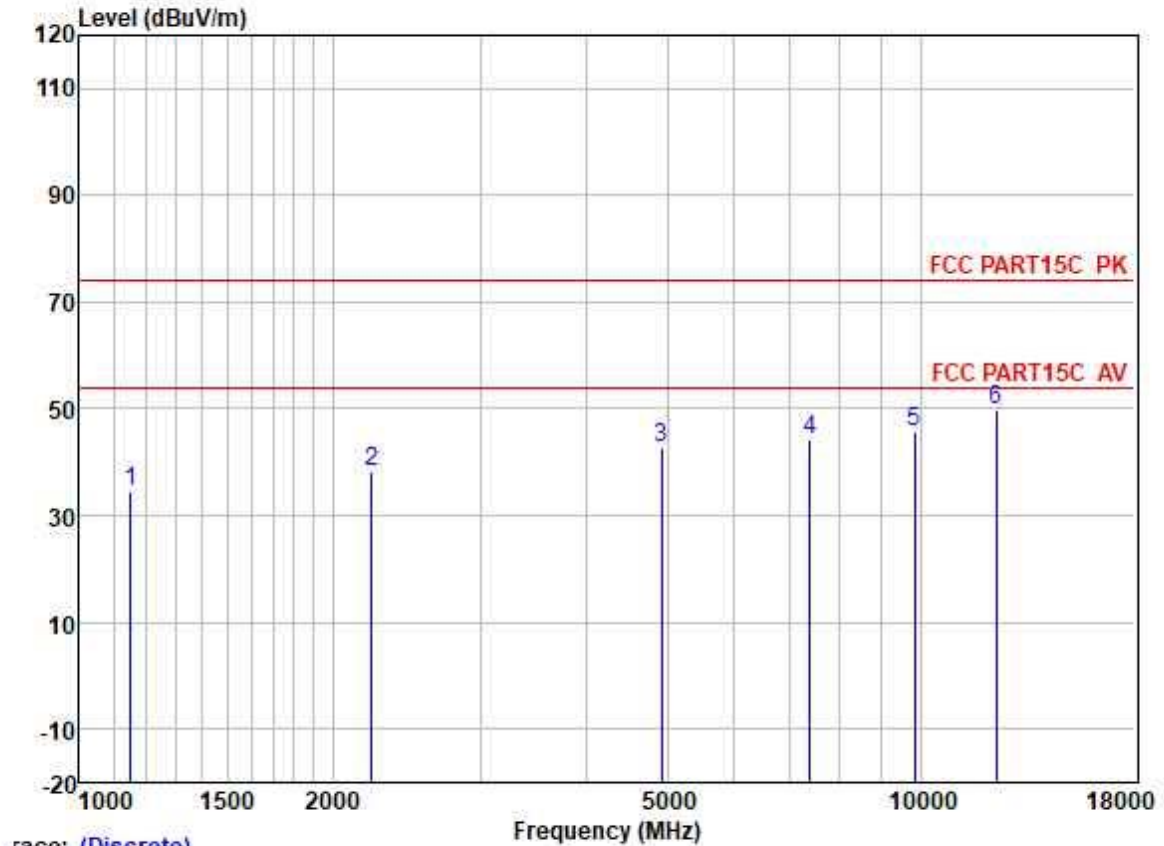


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1152.148	45.98	24.50	2.36	38.42	34.42	74.00	-39.58	VERTICAL	Peak
2	2226.950	46.05	26.76	3.23	37.64	38.40	74.00	-35.60	VERTICAL	Peak
3	4924.490	42.43	31.62	5.60	36.84	42.81	74.00	-31.19	VERTICAL	Peak
4	7386.741	39.24	36.17	6.19	37.45	44.15	74.00	-29.85	VERTICAL	Peak
5	9848.603	37.69	38.58	6.99	37.41	45.85	74.00	-28.15	VERTICAL	Peak
6	12310.930	40.12	38.63	8.01	36.95	49.81	74.00	-24.19	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

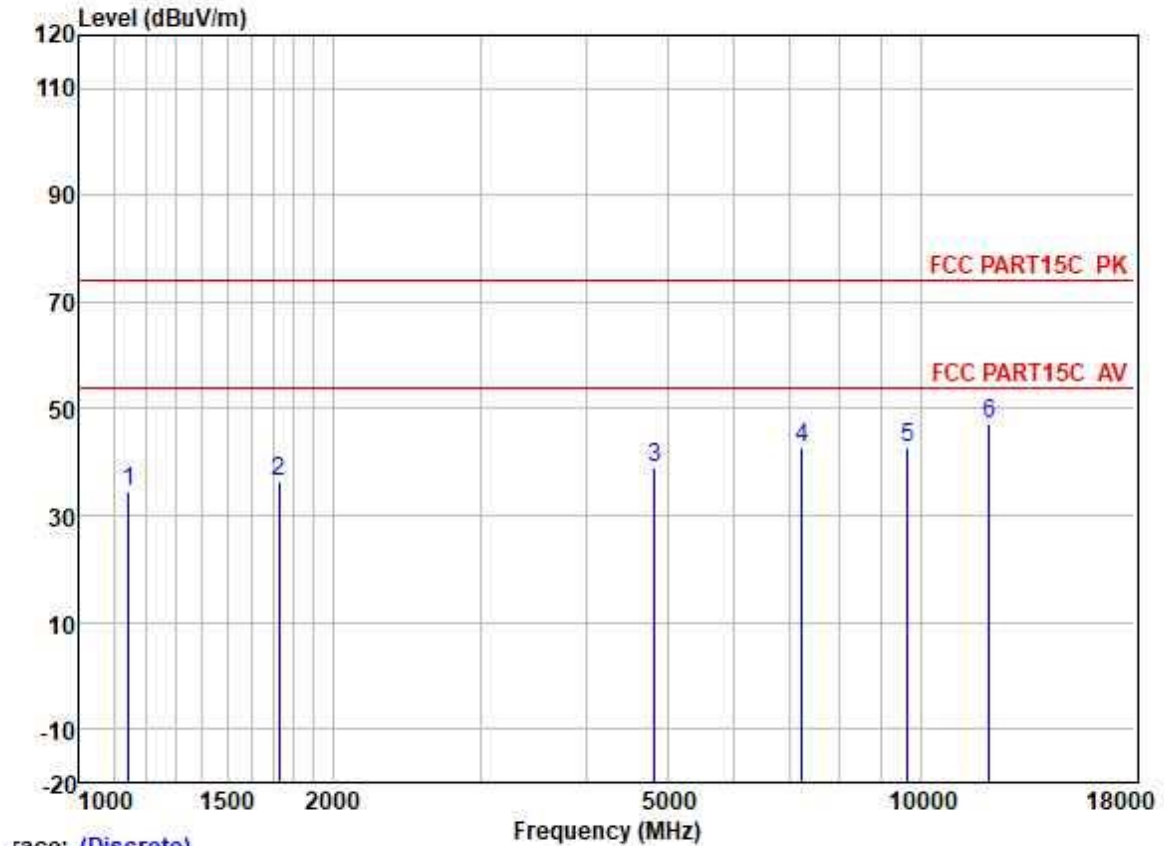


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1145.507	46.27	24.48	2.32	38.42	34.65	74.00	-39.35	VERTICAL	Peak
2	1726.818	45.45	25.78	2.84	37.87	36.20	74.00	-37.80	VERTICAL	Peak
3	4824.728	38.89	31.45	5.42	36.83	38.93	74.00	-35.07	VERTICAL	Peak
4	7236.454	38.33	35.70	6.03	37.39	42.67	74.00	-31.33	VERTICAL	Peak
5	9648.832	34.69	38.40	7.06	37.42	42.73	74.00	-31.27	VERTICAL	Peak
6	12060.740	37.09	38.88	8.17	37.08	47.06	74.00	-26.94	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

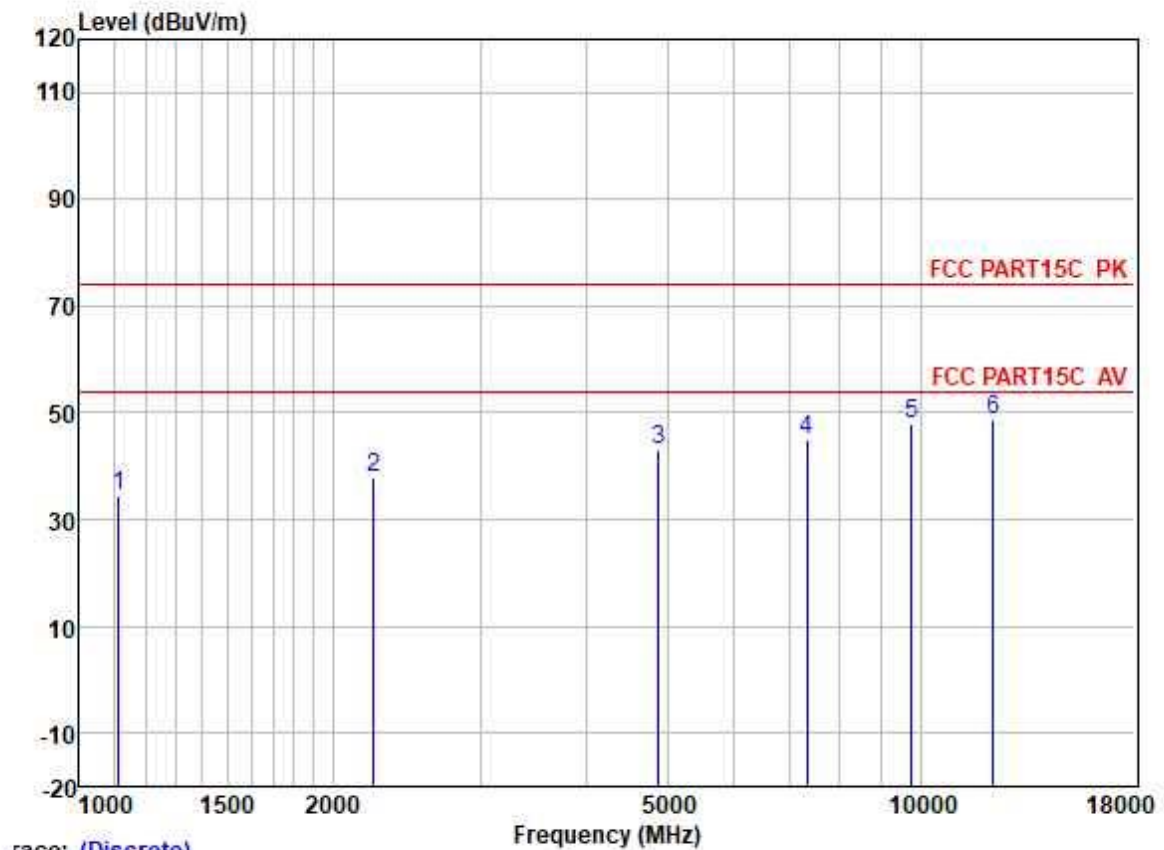


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1112.872	46.32	24.39	2.26	38.43	34.54	74.00	-39.46	VERTICAL	Peak
2	2239.861	45.26	26.84	3.24	37.64	37.70	74.00	-36.30	VERTICAL	Peak
3	4884.888	42.79	31.56	5.52	36.84	43.03	74.00	-30.97	VERTICAL	Peak
4	7326.015	40.20	36.00	6.13	37.43	44.90	74.00	-29.10	VERTICAL	Peak
5	9768.430	39.98	38.53	7.01	37.41	48.11	74.00	-25.89	VERTICAL	Peak
6	12210.580	38.80	38.74	8.08	37.00	48.62	74.00	-25.38	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

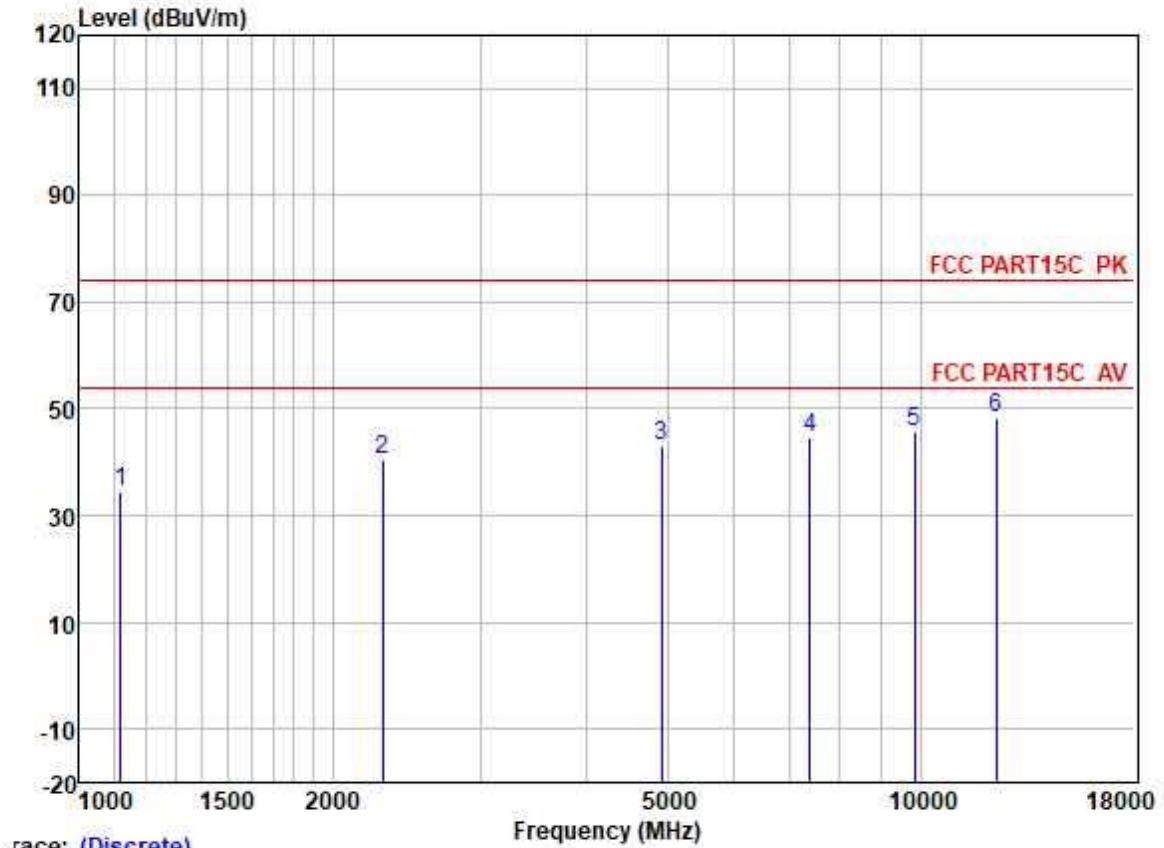


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1119.323	46.46	24.41	2.24	38.43	34.68	74.00	-39.32	VERTICAL	Peak
2	2292.257	47.80	27.08	3.30	37.62	40.56	74.00	-33.44	VERTICAL	Peak
3	4924.016	42.78	31.62	5.60	36.84	43.16	74.00	-30.84	VERTICAL	Peak
4	7386.309	39.79	36.17	6.19	37.45	44.70	74.00	-29.30	VERTICAL	Peak
5	9848.603	37.50	38.58	6.99	37.41	45.66	74.00	-28.34	VERTICAL	Peak
6	12310.760	38.74	38.63	8.01	36.95	48.43	74.00	-25.57	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

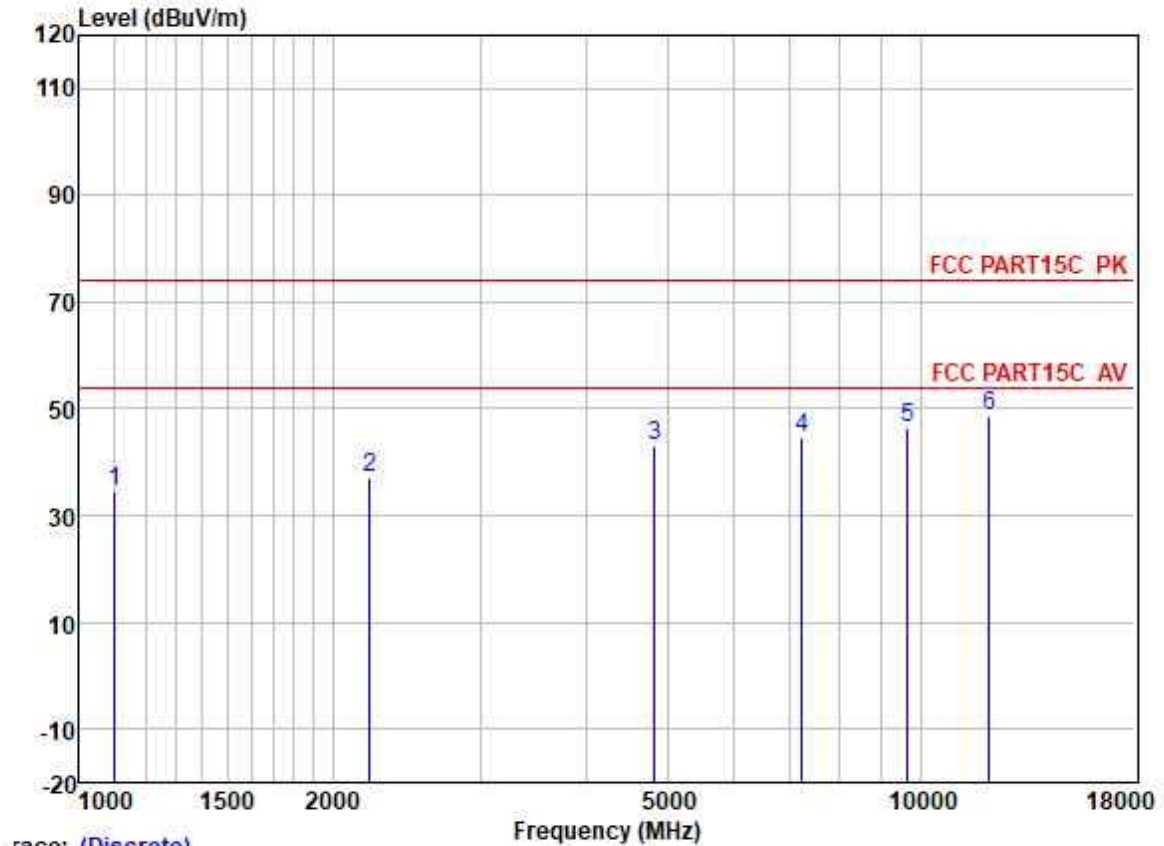


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1100.079	46.14	24.37	2.30	38.45	34.36	74.00	-39.64	VERTICAL	Peak
2	2214.114	44.71	26.68	3.21	37.64	36.96	74.00	-37.04	VERTICAL	Peak
3	4824.975	43.05	31.45	5.42	36.83	43.09	74.00	-30.91	VERTICAL	Peak
4	7236.267	40.41	35.70	6.03	37.39	44.75	74.00	-29.25	VERTICAL	Peak
5	9648.221	38.45	38.40	7.06	37.42	46.49	74.00	-27.51	VERTICAL	Peak
6	12060.850	38.55	38.88	8.17	37.08	48.52	74.00	-25.48	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

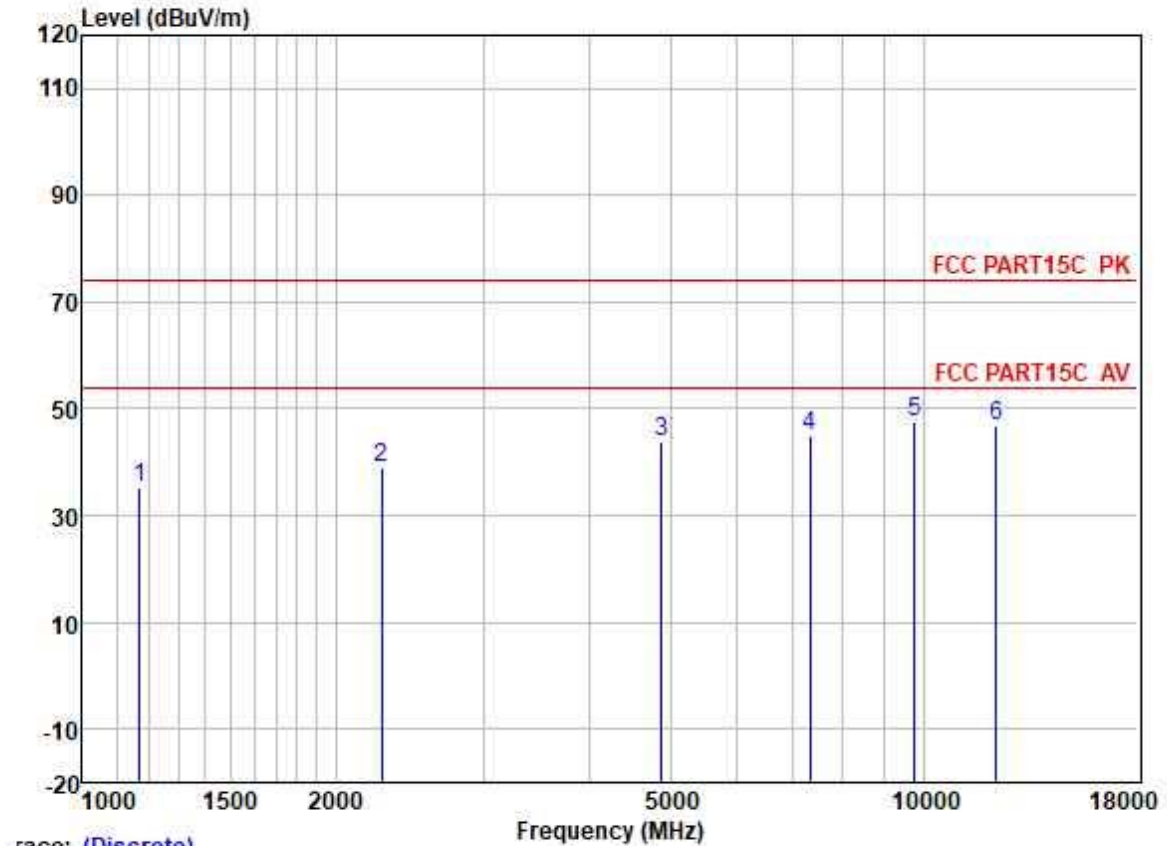


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1168.920	46.60	24.55	2.39	38.40	35.14	74.00	-38.86	VERTICAL	Peak
2	2265.907	46.45	26.98	3.27	37.63	39.07	74.00	-34.93	VERTICAL	Peak
3	4884.276	43.69	31.56	5.52	36.84	43.93	74.00	-30.07	VERTICAL	Peak
4	7326.015	40.18	36.00	6.13	37.43	44.88	74.00	-29.12	VERTICAL	Peak
5	9768.430	39.58	38.53	7.01	37.41	47.71	74.00	-26.29	VERTICAL	Peak
6	12210.710	37.11	38.74	8.08	37.00	46.93	74.00	-27.07	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

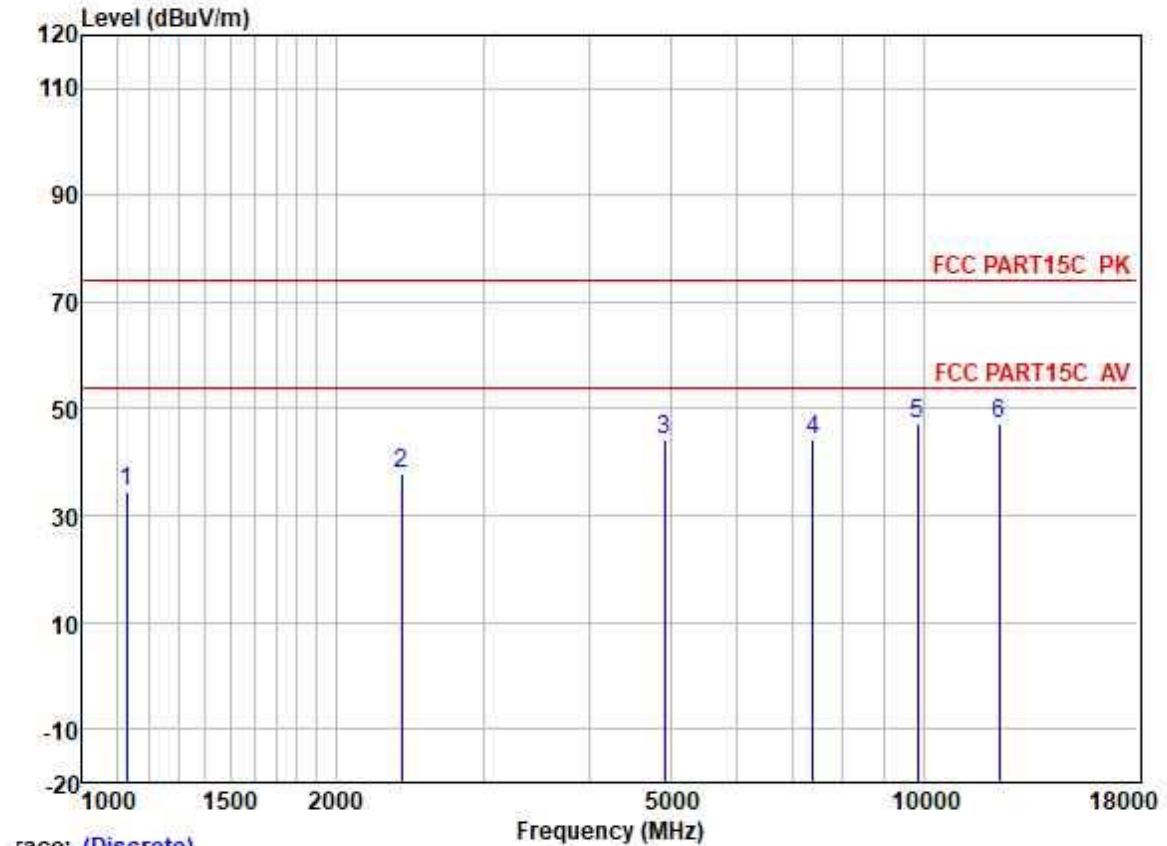


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1129.072	46.20	24.43	2.20	38.43	34.40	74.00	-39.60	VERTICAL	Peak
2	2393.824	44.77	27.34	3.49	37.59	38.01	74.00	-35.99	VERTICAL	Peak
3	4924.515	43.70	31.62	5.60	36.84	44.08	74.00	-29.92	VERTICAL	Peak
4	7386.070	39.37	36.17	6.19	37.45	44.28	74.00	-29.72	VERTICAL	Peak
5	9848.018	39.06	38.58	6.99	37.41	47.22	74.00	-26.78	VERTICAL	Peak
6	12310.710	37.59	38.63	8.01	36.95	47.28	74.00	-26.72	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

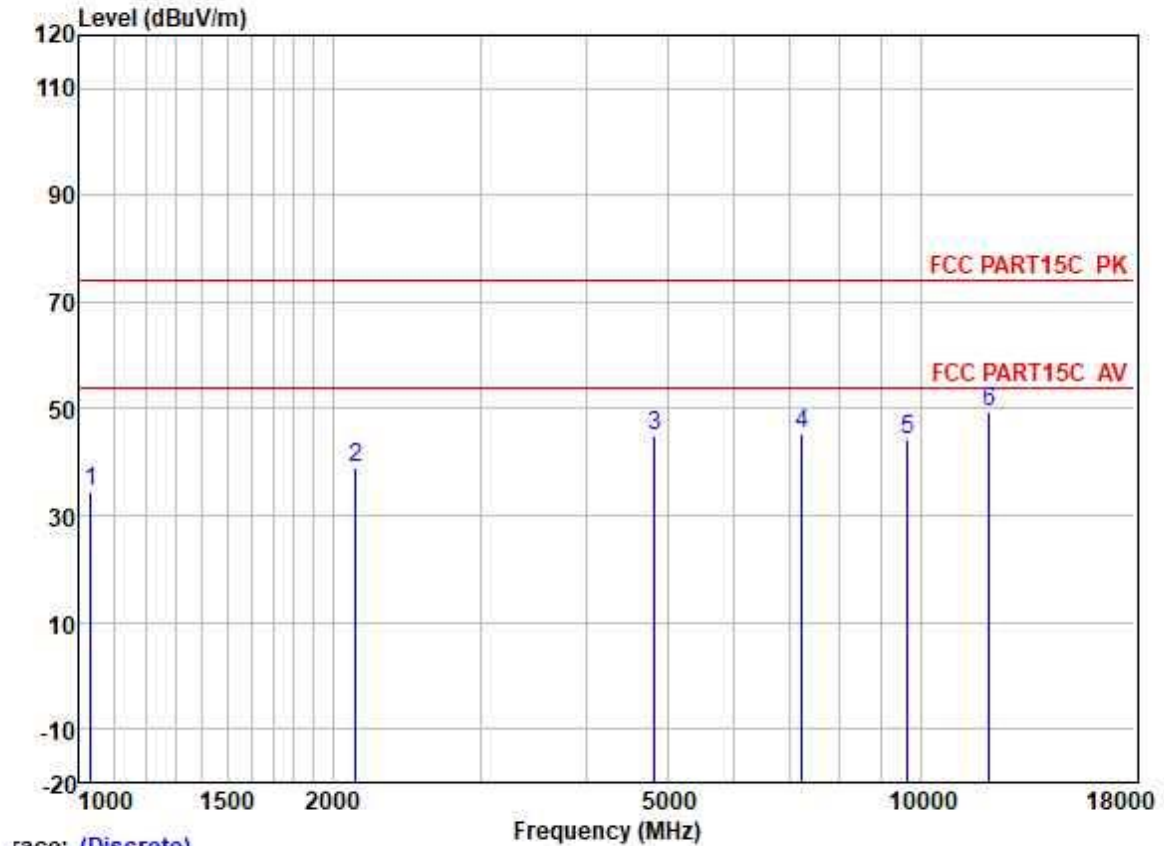


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1032.305	46.23	24.25	2.34	38.49	34.33	74.00	-39.67	VERTICAL	Peak
2	2132.462	47.13	26.37	3.17	37.67	39.00	74.00	-35.00	VERTICAL	Peak
3	4824.993	45.03	31.47	5.44	36.83	45.11	74.00	-28.89	VERTICAL	Peak
4	7236.144	41.11	35.70	6.03	37.39	45.45	74.00	-28.55	VERTICAL	Peak
5	9648.149	36.32	38.40	7.06	37.42	44.36	74.00	-29.64	VERTICAL	Peak
6	12060.700	39.60	38.88	8.17	37.08	49.57	74.00	-24.43	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

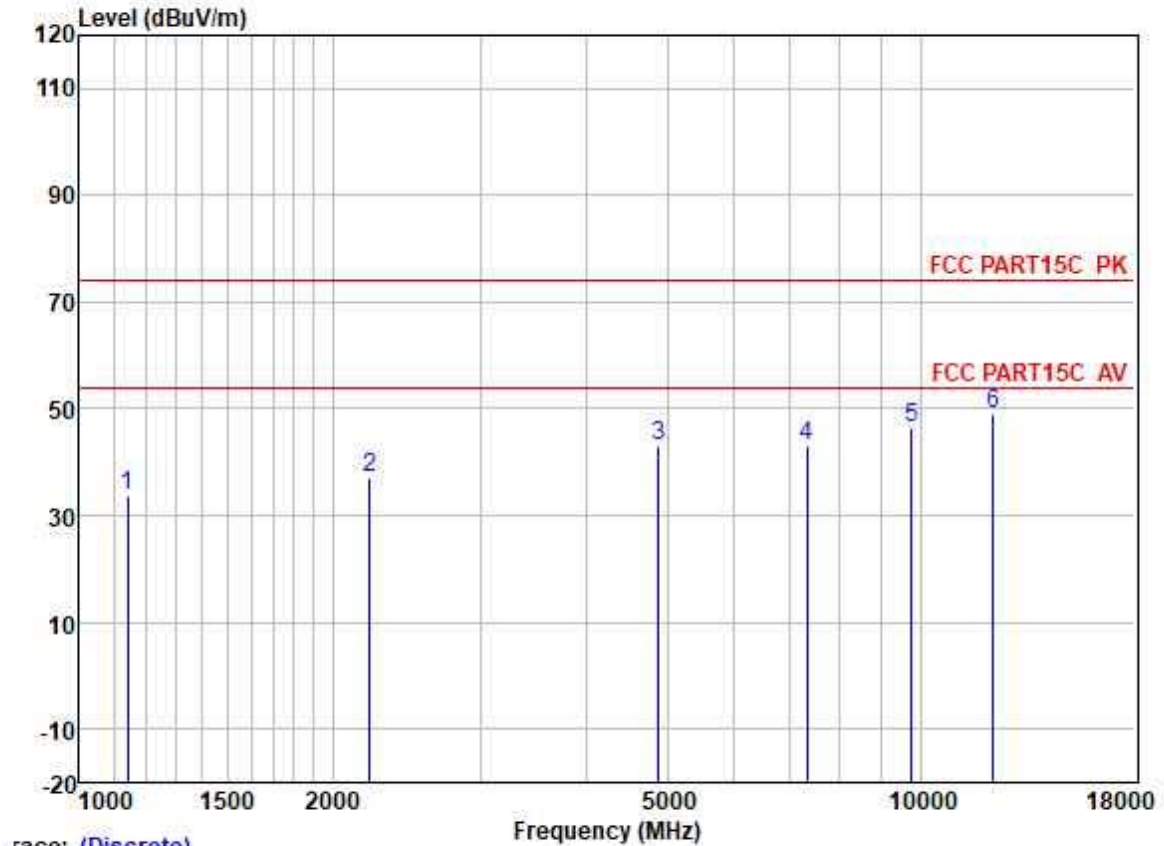


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1142.201	45.32	24.47	2.30	38.42	33.67	74.00	-40.33	VERTICAL Peak
2	2214.114	44.74	26.68	3.21	37.64	36.99	74.00	-37.01	VERTICAL Peak
3	4884.515	42.69	31.56	5.52	36.84	42.93	74.00	-31.07	VERTICAL Peak
4	7326.888	38.36	36.00	6.13	37.43	43.06	74.00	-30.94	VERTICAL Peak
5	9768.221	38.29	38.53	7.01	37.41	46.42	74.00	-27.58	VERTICAL Peak
6	12210.390	39.07	38.74	8.08	37.00	48.89	74.00	-25.11	VERTICAL Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

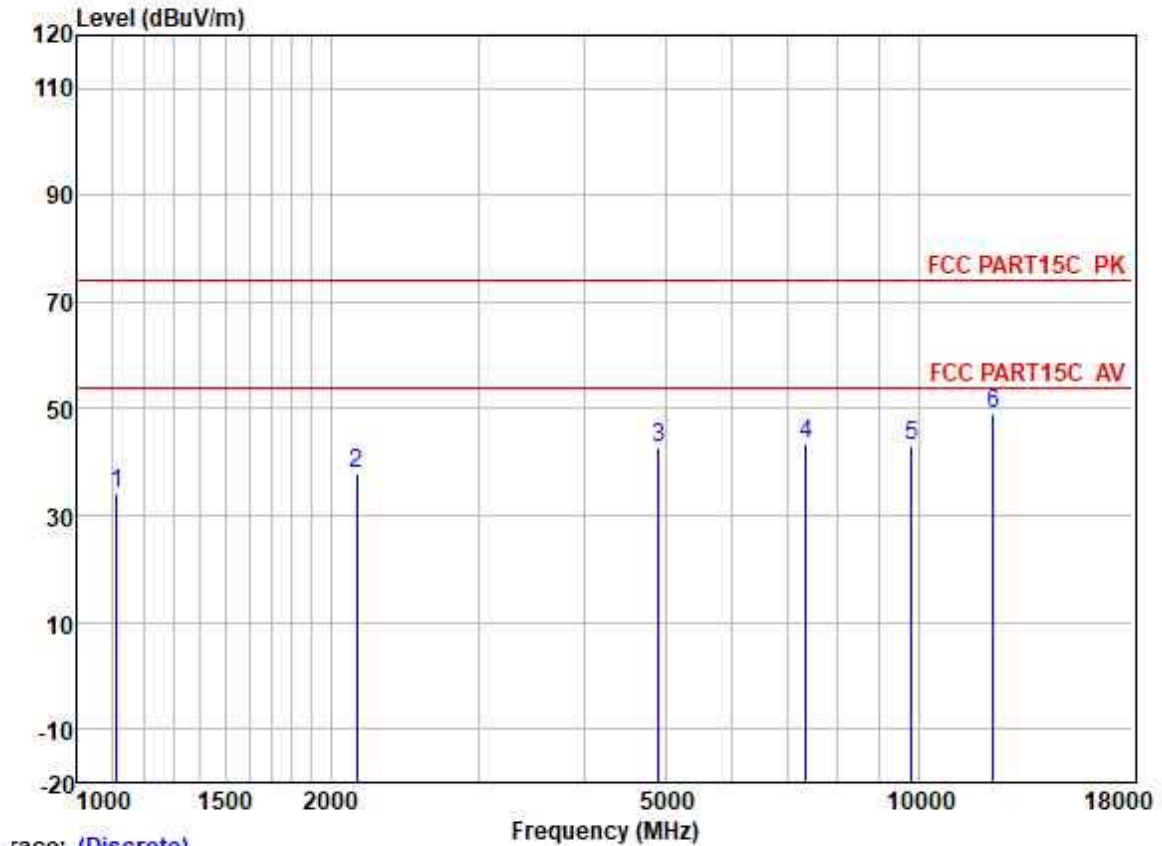


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1112.872	46.02	24.39	2.26	38.43	34.24	74.00	-39.76	VERTICAL	Peak
2	2151.034	46.00	26.43	3.18	37.66	37.95	74.00	-36.05	VERTICAL	Peak
3	4904.300	42.61	31.58	5.55	36.84	42.90	74.00	-31.10	VERTICAL	Peak
4	7356.349	38.73	36.06	6.15	37.44	43.50	74.00	-30.50	VERTICAL	Peak
5	9808.577	35.04	38.56	7.00	37.41	43.19	74.00	-30.81	VERTICAL	Peak
6	12260.330	39.41	38.70	8.06	36.98	49.19	74.00	-24.81	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

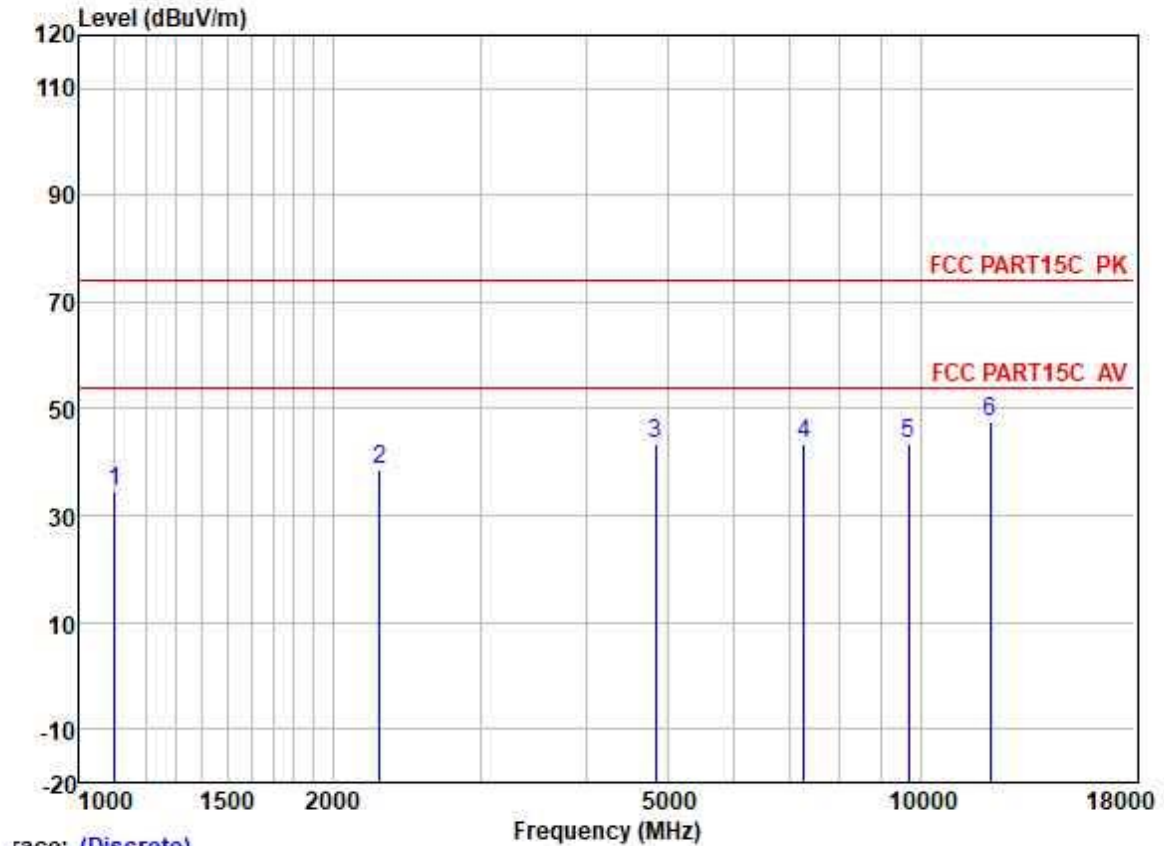


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1100.079	46.15	24.37	2.30	38.45	34.37	74.00	-39.63	VERTICAL	Peak
2	2272.466	46.13	27.01	3.28	37.63	38.79	74.00	-35.21	VERTICAL	Peak
3	4844.016	43.36	31.50	5.45	36.84	43.47	74.00	-30.53	VERTICAL	Peak
4	7266.070	39.15	35.78	6.06	37.41	43.58	74.00	-30.42	VERTICAL	Peak
5	9688.689	35.46	38.44	7.04	37.42	43.52	74.00	-30.48	VERTICAL	Peak
6	12110.700	37.81	38.83	8.14	37.05	47.73	74.00	-26.27	VERTICAL	Peak

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

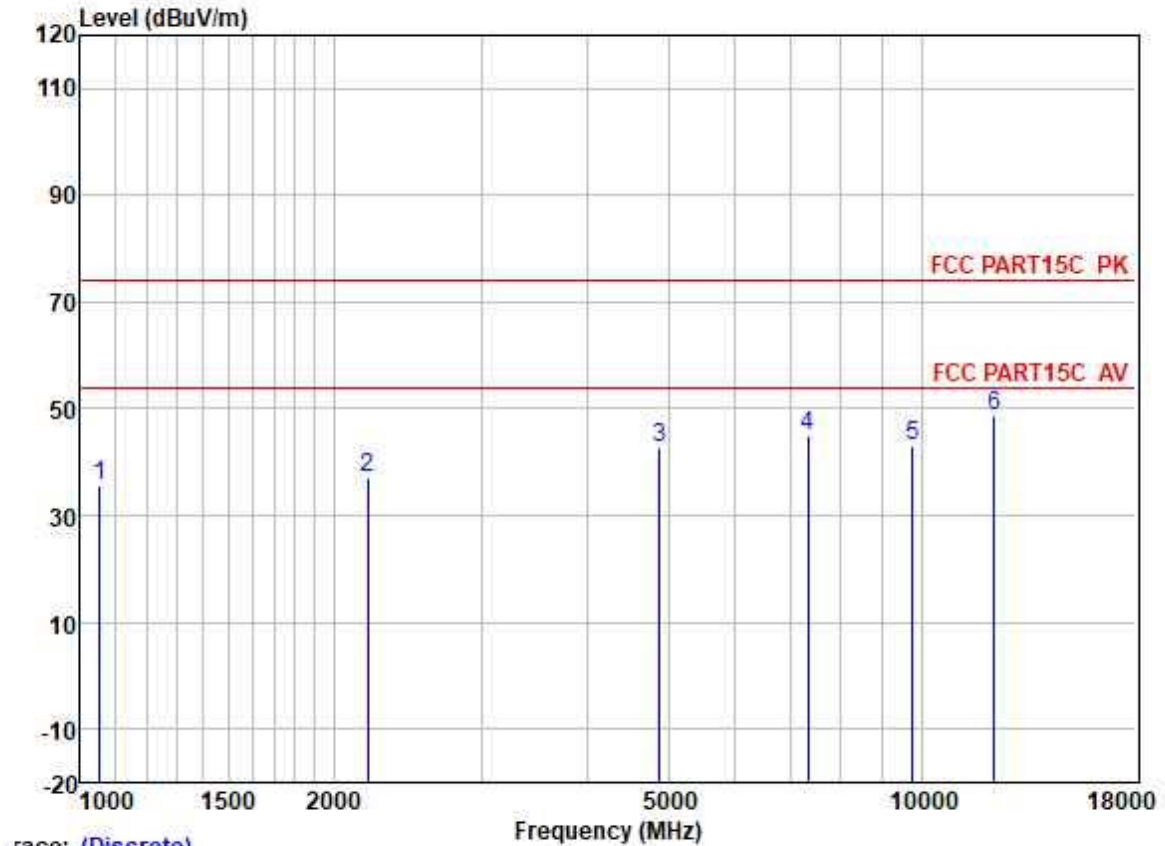


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1053.404	47.37	24.28	2.40	38.47	35.58	74.00	-38.42	VERTICAL	Peak
2	2194.998	45.04	26.59	3.20	37.65	37.18	74.00	-36.82	VERTICAL	Peak
3	4884.110	42.56	31.56	5.52	36.84	42.80	74.00	-31.20	VERTICAL	Peak
4	7326.267	40.18	36.00	6.13	37.43	44.88	74.00	-29.12	VERTICAL	Peak
5	9768.689	35.06	38.53	7.01	37.41	43.19	74.00	-30.81	VERTICAL	Peak
6	12210.420	39.04	38.74	8.08	37.00	48.86	74.00	-25.14	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

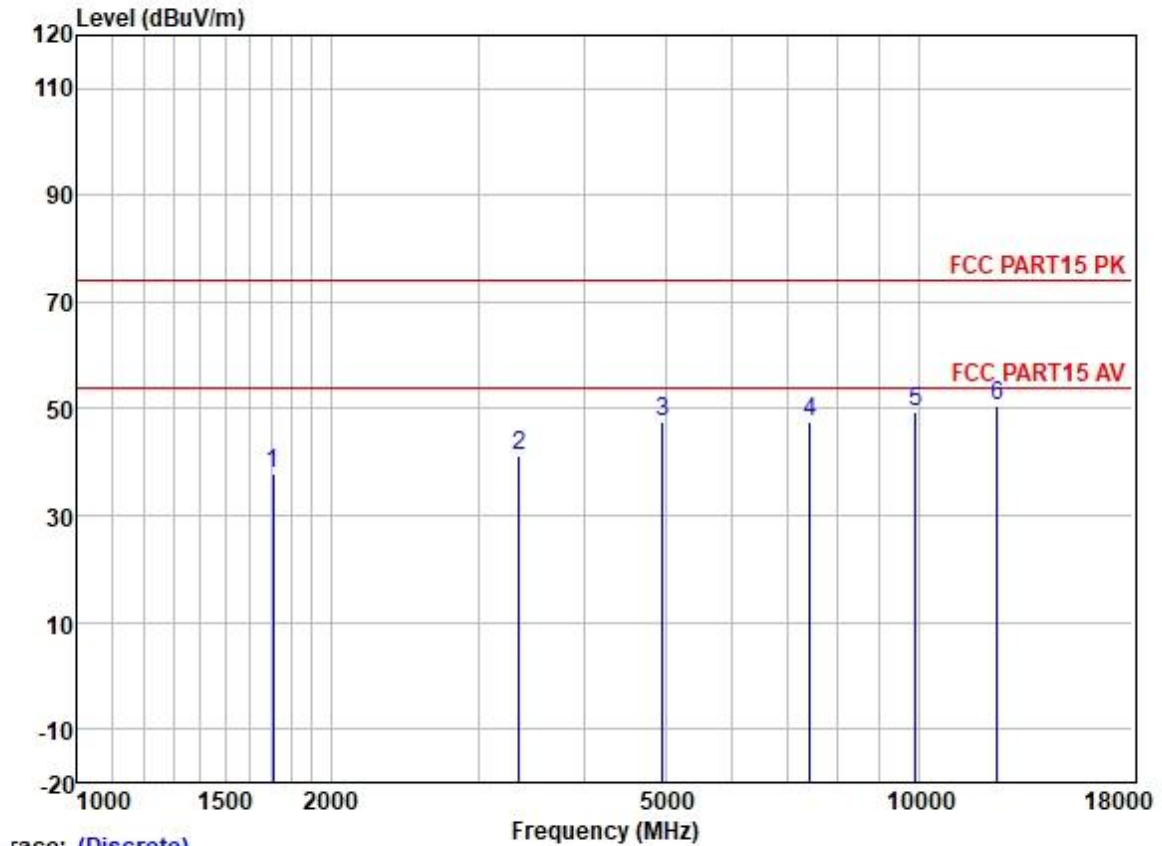


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1706.968	47.05	25.73	2.81	37.89	37.70	74.00	-36.30	HORIZONTAL	Peak
2	3347.371	45.21	28.80	4.08	37.01	41.08	74.00	-32.92	HORIZONTAL	Peak
3	4960.307	47.01	31.65	5.65	36.84	47.47	74.00	-26.53	HORIZONTAL	Peak
4	7440.063	42.43	36.27	6.22	37.47	47.45	74.00	-26.55	HORIZONTAL	Peak
5	9920.788	41.38	38.65	6.96	37.40	49.59	74.00	-24.41	HORIZONTAL	Peak
6	12400.400	41.06	38.57	7.97	36.88	50.72	74.00	-23.28	HORIZONTAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

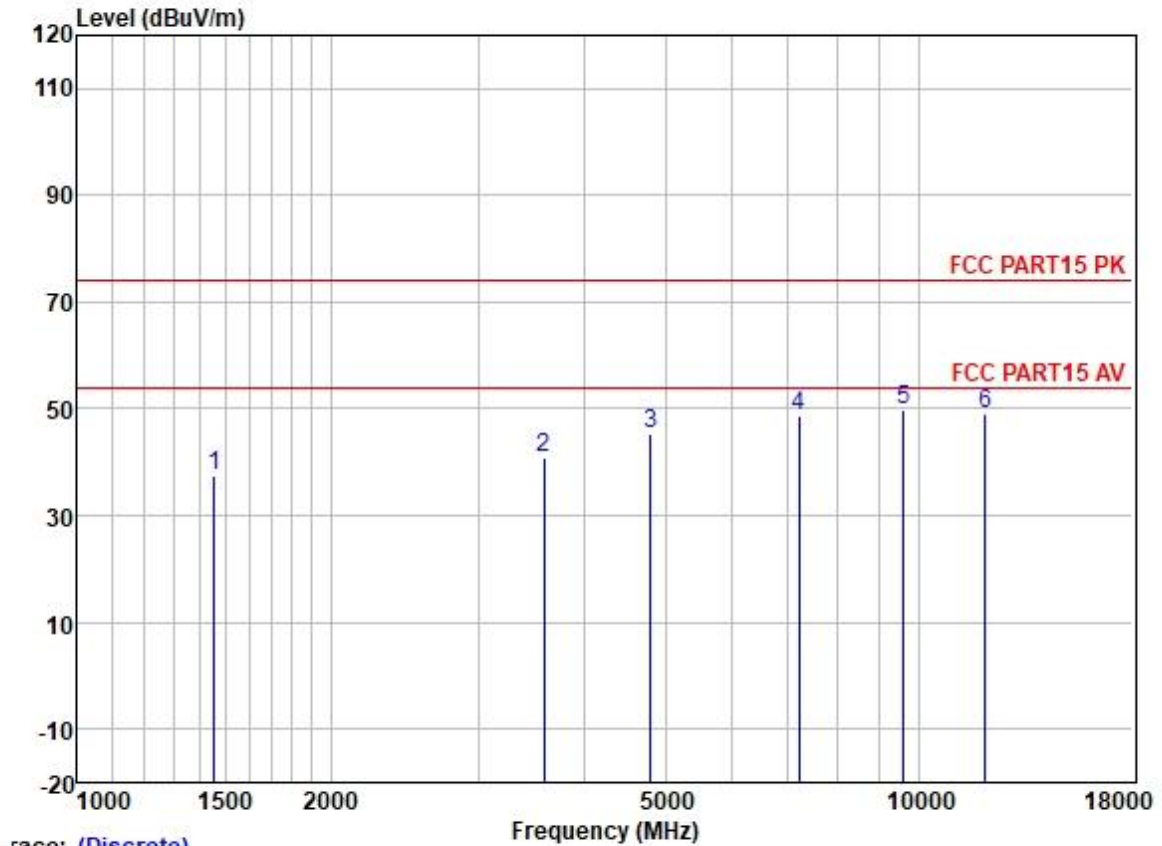

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1456.081	47.60	25.46	2.72	38.17	37.61	74.00	-36.39	HORIZONTAL	Peak
2	3587.818	44.35	29.02	4.49	36.91	40.95	74.00	-33.05	HORIZONTAL	Peak
3	4804.190	45.45	31.42	5.40	36.83	45.44	74.00	-28.56	HORIZONTAL	Peak
4	7206.015	44.54	35.54	5.98	37.38	48.68	74.00	-25.32	HORIZONTAL	Peak
5	9608.818	41.94	38.37	7.07	37.42	49.96	74.00	-24.04	HORIZONTAL	Peak
6	12010.260	38.96	38.90	8.19	37.10	48.95	74.00	-25.05	HORIZONTAL	Peak


Test Mode: 04; Polarity: Horizontal; Modulation:GFSK; ; Channel:middle

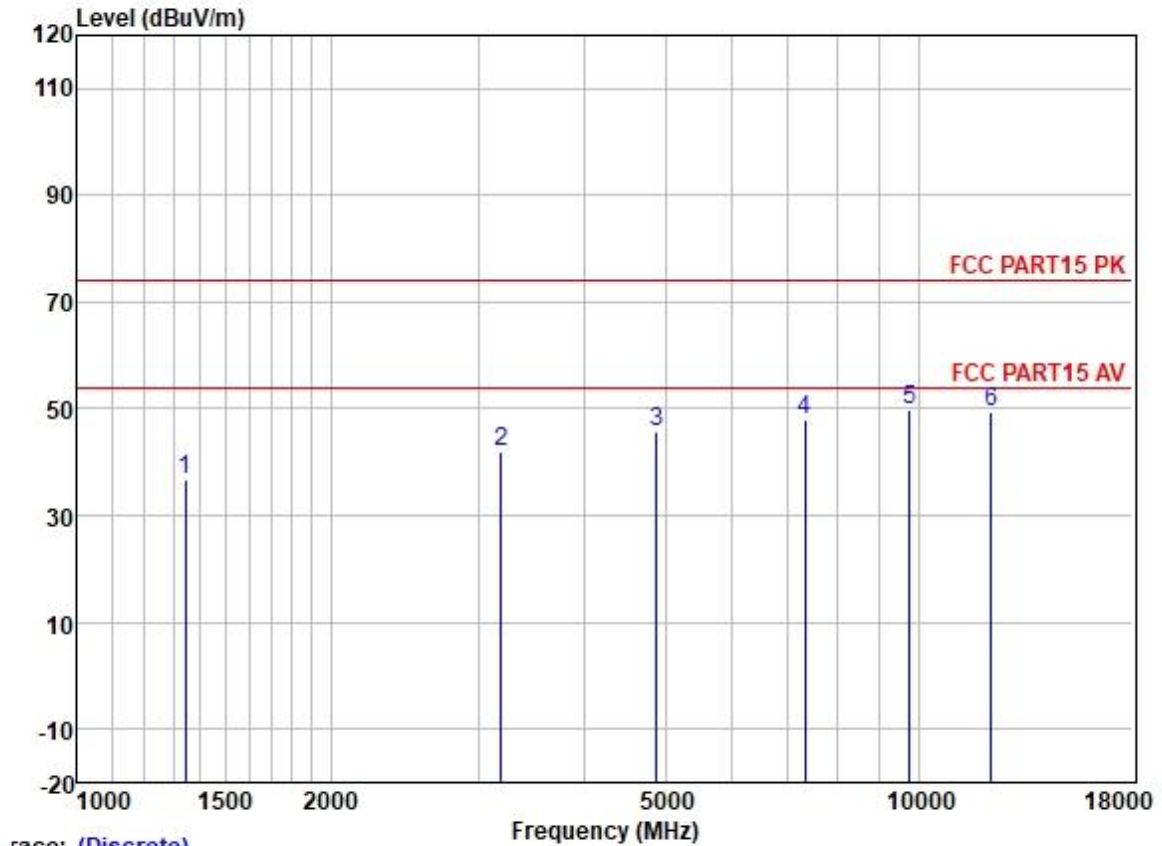

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1342.882	47.19	25.30	2.60	38.27	36.82	74.00	-37.18	HORIZONTAL	Peak
2	3186.869	46.60	28.57	3.99	37.10	42.06	74.00	-31.94	HORIZONTAL	Peak
3	4884.517	45.44	31.56	5.52	36.84	45.68	74.00	-28.32	HORIZONTAL	Peak
4	7326.167	43.28	36.00	6.13	37.43	47.98	74.00	-26.02	HORIZONTAL	Peak
5	9768.461	41.73	38.53	7.01	37.41	49.86	74.00	-24.14	HORIZONTAL	Peak
6	12210.840	39.62	38.74	8.08	37.00	49.44	74.00	-24.56	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:GFSK; ; Channel:High

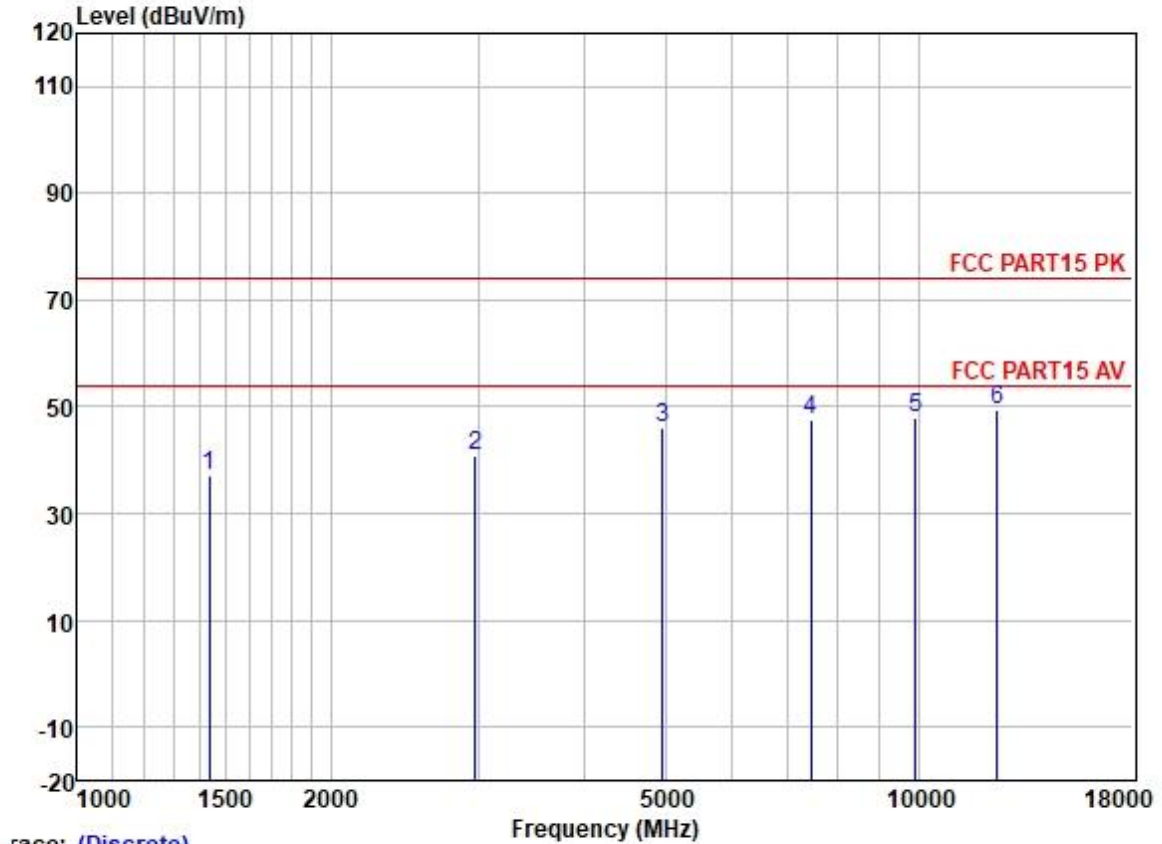

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1435.189	47.38	25.44	2.67	38.20	37.29	74.00	-36.71	VERTICAL	Peak
2	2973.293	46.05	28.38	3.78	37.28	40.93	74.00	-33.07	VERTICAL	Peak
3	4960.797	45.53	31.65	5.65	36.84	45.99	74.00	-28.01	VERTICAL	Peak
4	7440.762	42.39	36.27	6.22	37.47	47.41	74.00	-26.59	VERTICAL	Peak
5	9920.420	39.62	38.65	6.96	37.40	47.83	74.00	-26.17	VERTICAL	Peak
6	12400.520	39.76	38.57	7.97	36.88	49.42	74.00	-24.58	VERTICAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

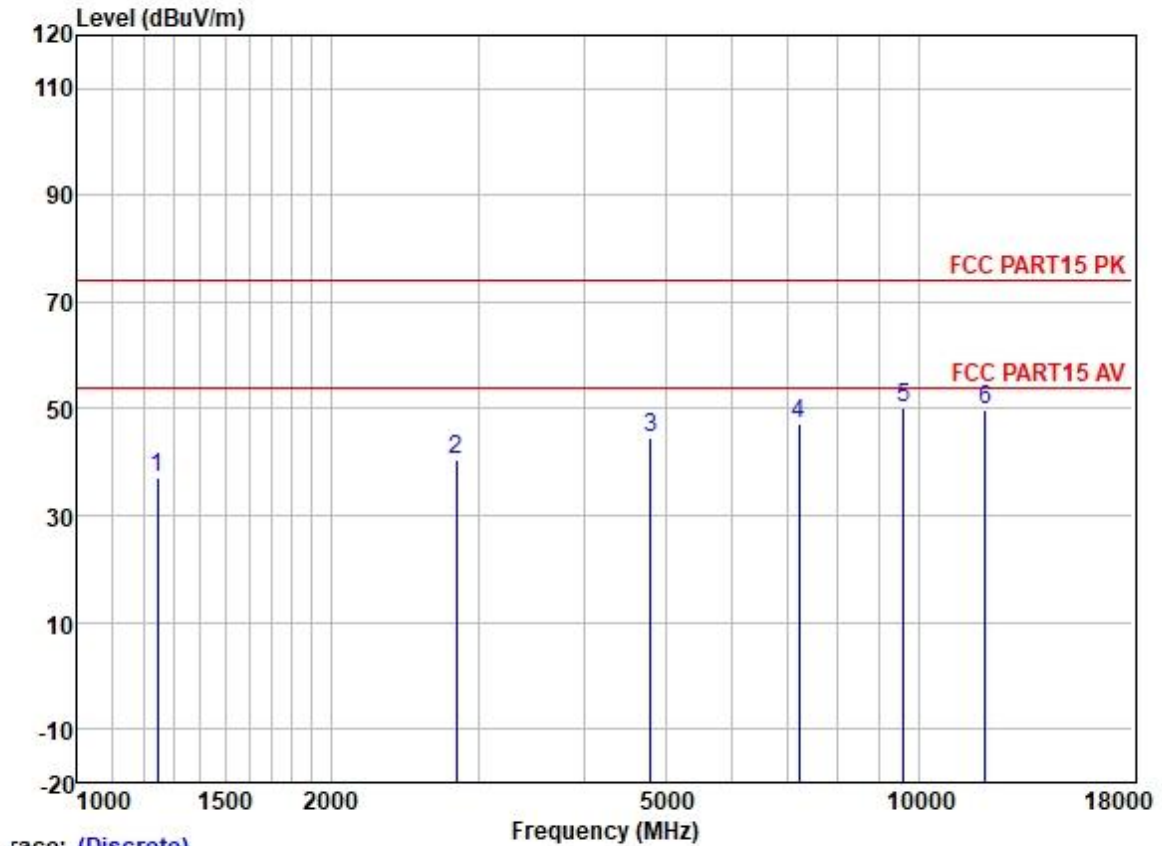

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1245.663	47.97	25.00	2.33	38.35	36.95	74.00	-37.05	VERTICAL	Peak
2	2822.558	45.96	28.18	3.70	37.40	40.44	74.00	-33.56	VERTICAL	Peak
3	4804.751	44.58	31.42	5.40	36.83	44.57	74.00	-29.43	VERTICAL	Peak
4	7206.464	42.89	35.54	5.98	37.38	47.03	74.00	-26.97	VERTICAL	Peak
5	9608.122	42.15	38.37	7.07	37.42	50.17	74.00	-23.83	VERTICAL	Peak
6	12010.470	39.78	38.90	8.19	37.10	49.77	74.00	-24.23	VERTICAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:GFSK; ; Channel:middle

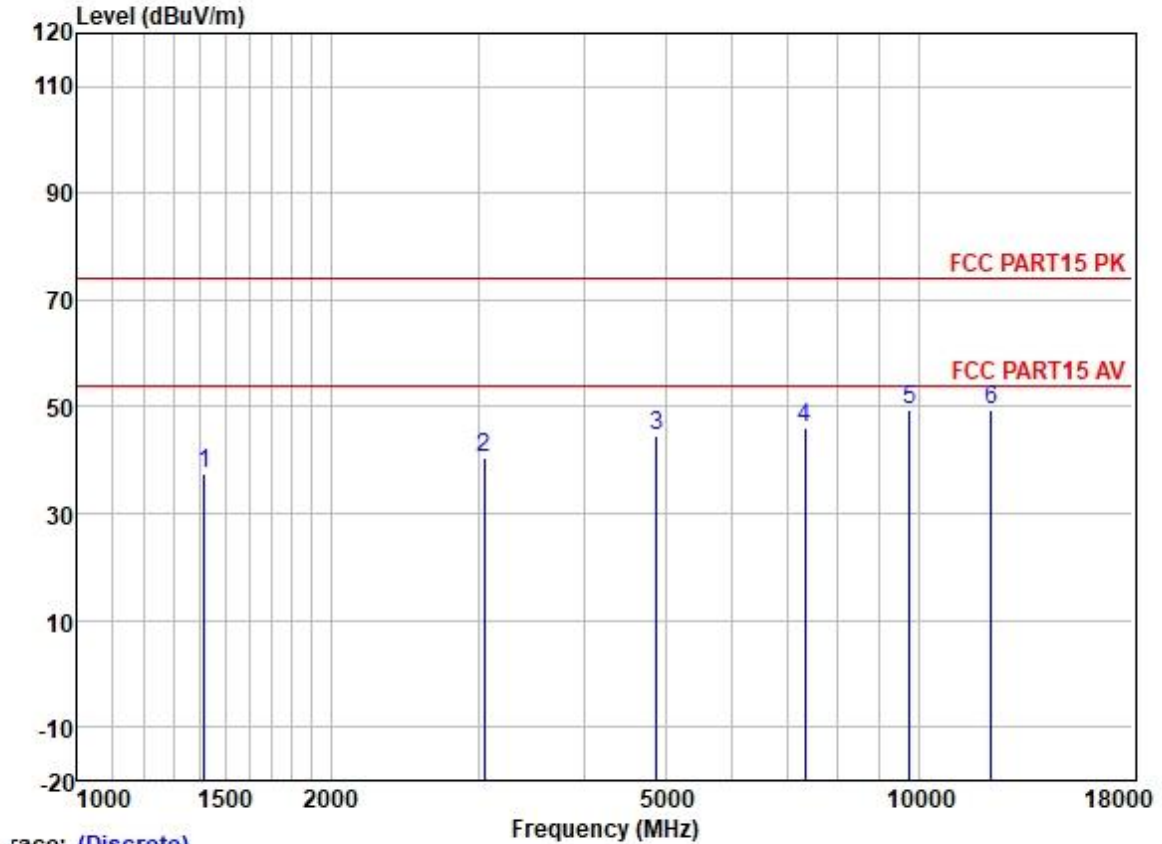

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1414.597	47.53	25.41	2.63	38.20	37.37	74.00	-36.63	VERTICAL	Peak
2	3042.846	45.25	28.43	3.84	37.20	40.32	74.00	-33.68	VERTICAL	Peak
3	4884.515	44.34	31.56	5.52	36.84	44.58	74.00	-29.42	VERTICAL	Peak
4	7326.626	41.49	36.00	6.13	37.43	46.19	74.00	-27.81	VERTICAL	Peak
5	9768.052	41.28	38.53	7.01	37.41	49.41	74.00	-24.59	VERTICAL	Peak
6	12210.000	39.50	38.74	8.08	37.00	49.32	74.00	-24.68	VERTICAL	Peak

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR2106020533LM

9 EUT Constructional Details (EUT Photos)

Refer to external and internal photos for GZCR2106020533LM

10 Appendix


1. Bandwidth

1.1 6dB BW

1.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Ant	6dB Bandwidth (MHz)	Limit	Verdict
802.11b	SISO	2412	1	9.50	≥ 0.5	Pass
		2437	1	9.50	≥ 0.5	Pass
		2462	1	11.08	≥ 0.5	Pass
802.11g	SISO	2412	1	16.36	≥ 0.5	Pass
		2437	1	16.37	≥ 0.5	Pass
		2462	1	16.35	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	15.20	≥ 0.5	Pass
		2437	1	15.20	≥ 0.5	Pass
		2462	1	15.19	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	1	35.20	≥ 0.5	Pass
		2437	1	35.21	≥ 0.5	Pass
		2452	1	35.20	≥ 0.5	Pass
BLE 1M	SISO	2402	1	0.68	≥ 0.5	Pass
		2440	1	0.67	≥ 0.5	Pass
		2480	1	0.68	≥ 0.5	Pass

1.1.2 Test Graph

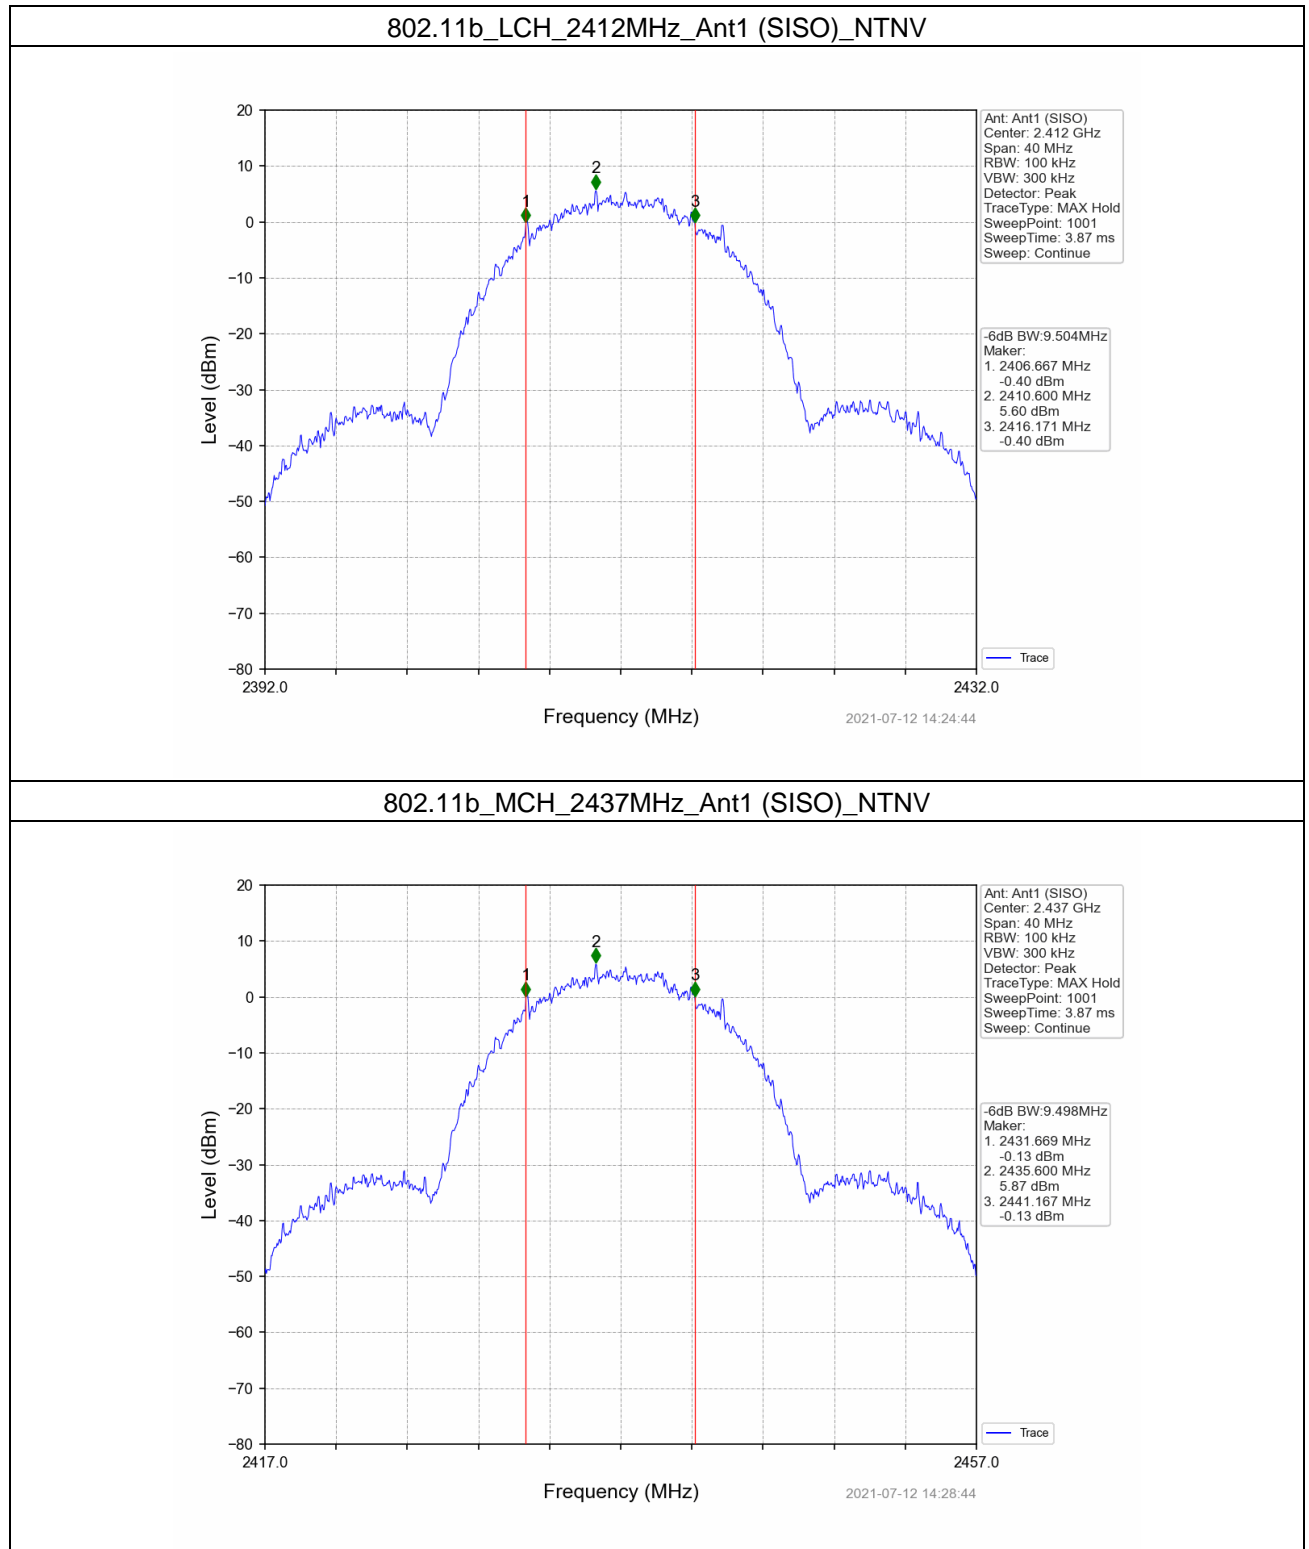


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

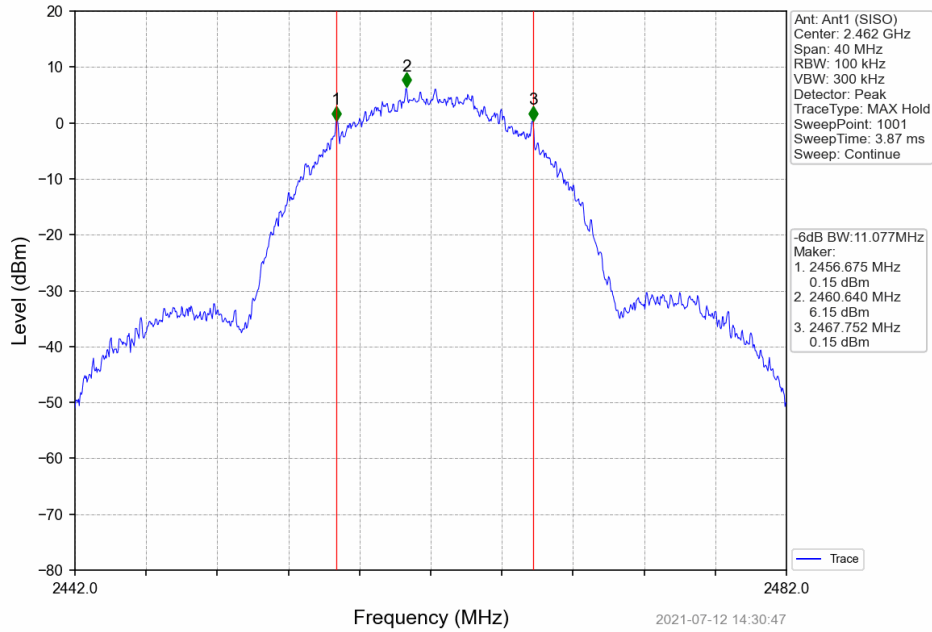


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

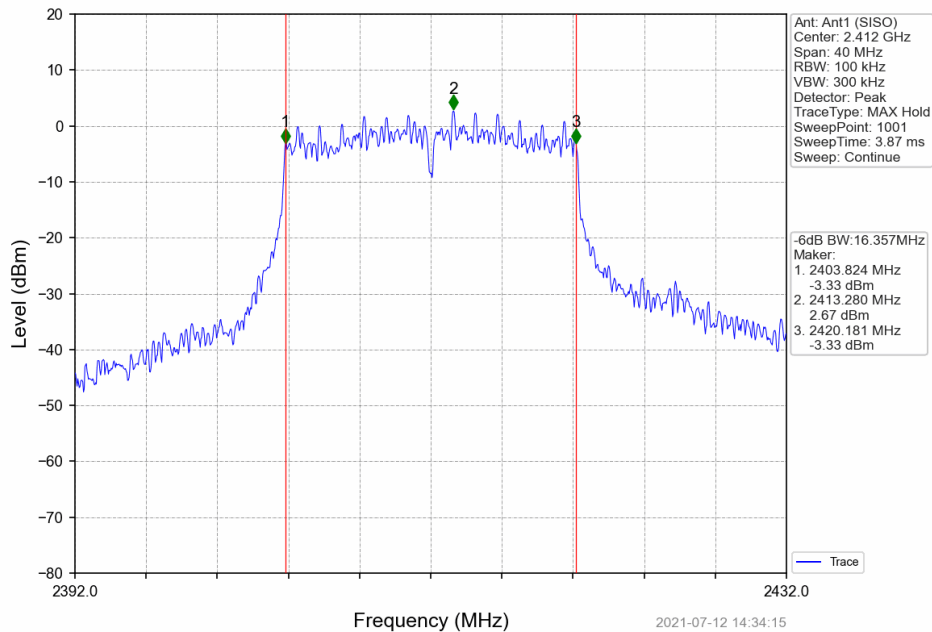

802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

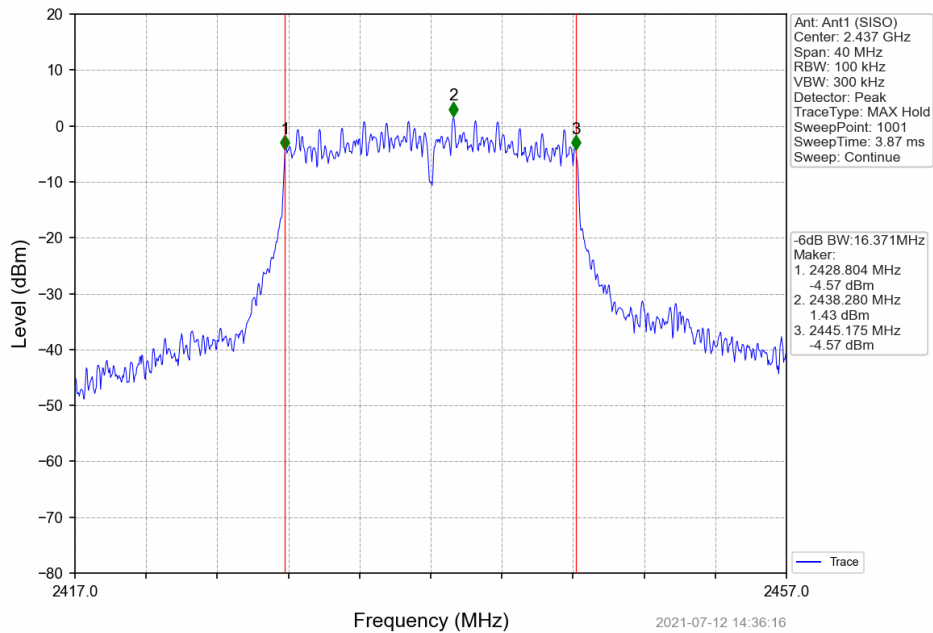

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

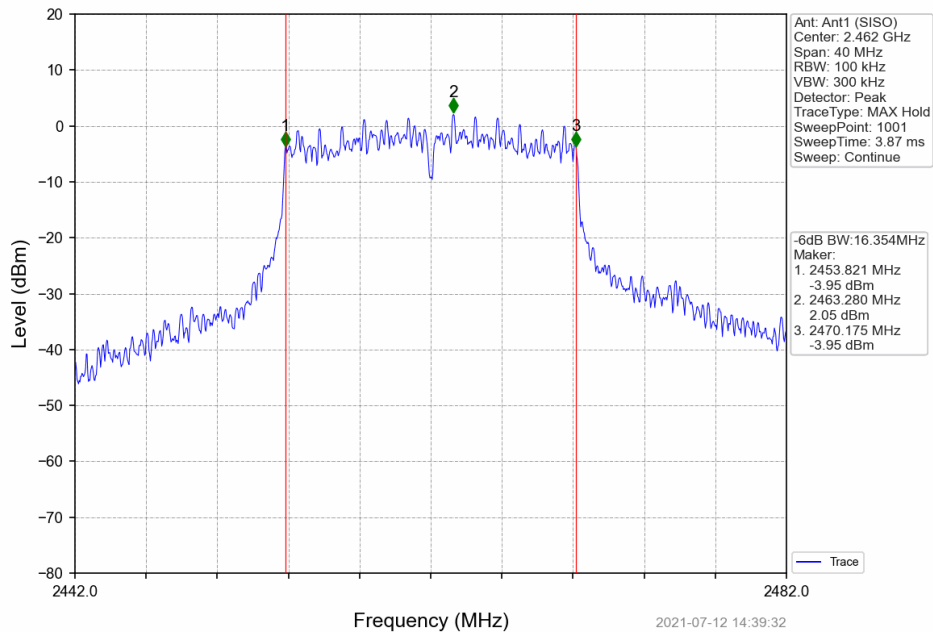

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.