



FCC TEST REPORT

CATEGORY : Portable End Product
PRODUCT NAME : WLAN 2.4G AP
FCC ID. : MQ4AP700C
FILING TYPE : Certification
BRAND NAME : Abocom
MODEL NAME : AP700C

APPLICANT : AboCom Systems Inc.
3F, No.57, Singjhous Rd., Neihu District, Taipei City114,
Taiwan (R.O.C.)
MANUFACTURER : Same as Applicant

ISSUED BY : AboCom Systems Inc.
3F, No.57, Singjhous Rd., Neihu District, Taipei City114,
Taiwan (R.O.C.)

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.

Dr. Alan Lane
Vice General Manager
Sporton International Inc.



1190
ILAC MRA



Lab Code: 200079-0



Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
1.1. Applicant.....	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test	1
1.4. Features of Equipment under Test.....	1
1.5. Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1. Description of the Test	3
2.2. Frequency Range Investigated	3
2.3. Description of Test Supporting Units.....	4
2.4. Connection Diagram of Test System	6
2.5. Test Software	7
3. Test Location and Standards	8
3.1. Test Location.....	8
3.2. Test Conditions	8
3.3. Standards for Methods of Measurement.....	8
3.4. DoC Statement.....	8
4. List of Measurements.....	9
4.1. Summary of the Test Results.....	9
5. Test Result	10
5.1. Test of 6dB Spectrum Bandwidth (DSSS System)	10
5.2. Test of Maximum Peak Output Power	13
5.3. Test of Peak Power Spectral Density.....	14
5.4. Test of Band Edges Emission	17
5.5. Test of AC Power Line Conducted Emission	20
5.6. Test of Spurious Radiated Emission	24
5.7. Antenna Requirements	31
6. List of Measuring Equipments Used	32
Appendix A. Photographs of EUT.....	A1 ~ A6



History of this test report

No additional attachment.

Additional attachment were issued as following record:



1. General Description of Equipment under Test

1.1. Applicant

AboCom Systems Inc.

3F, No.57, Singjhoug, Jihu Rd., Neihu District, Taipei City114, Taiwan (R.O.C.)

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

This product is a WLAN AP. The technical data has been listed on section "Feature of Equipment under Test".

1.4. Features of Equipment under Test

ITEM	DESCRIPTION
Type of Modulation	DSSS (CCK / DQPSK / DBPSK),
Number of Channels	11
Frequency Band	2400MHz ~ 2483.5MHz
Carrier Frequency of Each Channel	Please reference table below.
Channel Bandwidth	22 MHz
Output Power	16.8 dBm (peak)
Antenna Type / Gain	Dipole Antenna / 2.5dBi
Function Type	Transceiver
Power Rating (DC/AC , Voltage)	5 VDC
Temperature Range (Operating)	0 ~ 55



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412 MHz	5	2432 MHz	9	2452 MHz
2	2417 MHz	6	2437 MHz	10	2457 MHz
3	2422 MHz	7	2442 MHz	11	2462 MHz
4	2427 MHz	8	2447 MHz		



2. Test Configuration of the Equipment under Test

2.1. Description of the Test

- a. During testing, the equipment was placed on a non-conducting support.
- b. The following test modes were performed:
 - Mode 1 : CH 01 2412MHz
 - Mode 2 : CH 06 2437MHz
 - Mode 3 : CH 11 2462MHz
- c. Spurious emission below 1GHz is independent of channel selection, so only Channel 11 with CCK modulation was tested.
- d. For spurious emission above 1GHz, lowest, middle and highest channel with 11Mbps data rate was tested.
- e. The EUT has been programmed to continuously transmit or receive during testing. The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2001.
- f. The configuration is operated in a manner which tends to maximize its emission characteristics in a typical application.
- g. 3 meters measurement distance in semi-anechoic chamber was used in this test.

2.2. Frequency Range Investigated

- a. Conducted power line test: from 150 kHz to 30 MHz
- b. Radiated emission test: from 30 MHz to 25000 MHz



2.3. Description of Test Supporting Units

Support Unit 1. – PC (COMPAQ)

FCC ID : N/A
Model No. : D380mx
Serial No. : SP0003
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity.

Support Unit 2. -- Monitor (VIEWSOINC)

FCC ID : N/A
Model No. : VCDTS21553-3P
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0007
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – PS/2 Keyboard (LOGITECH)

FCC ID : N/A
Model No. : Y-SJ17
Serial No. : SP0052
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 4. – USB Mouse (LOGITECH)

FCC ID : N/A
Model No. : M-S34
Serial No. : SP0108
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.




FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

Support Unit 5. -- Printer (EPSON) – for local workstation

FCC ID : N/A
Model No. : STYLUS COLOR 680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0046
Data Cable : Shielded, 360 degree via metal backshells, 1.35m

2.4. Connection Diagram of Test System

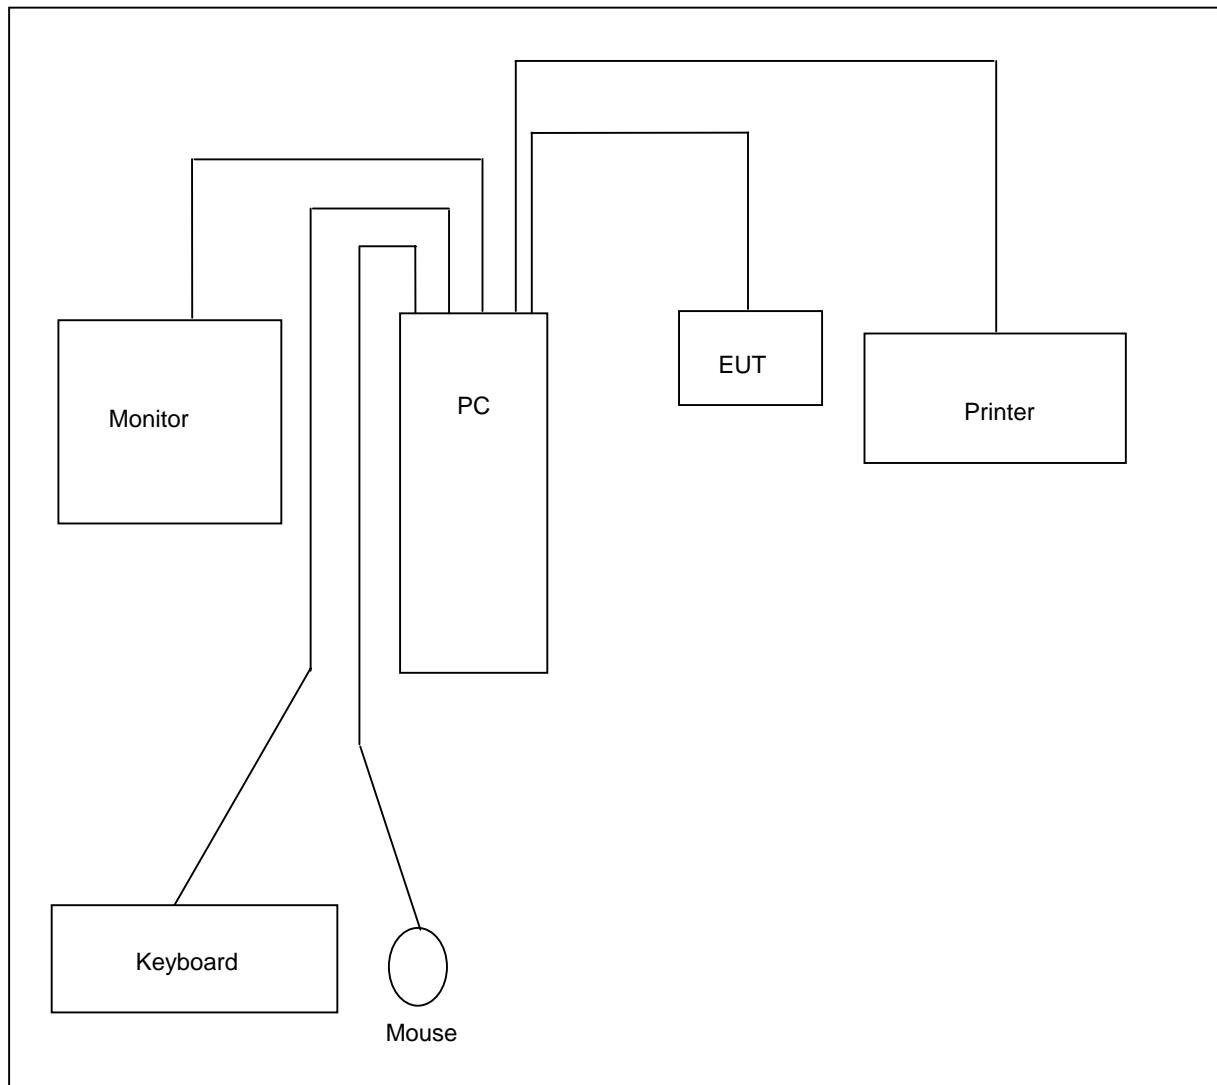



2.5. Test Software

There are 2 softwares may be used in the testing.

- a. Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.
- b. "H" Pattern Generator: Except Access Point, the supporting equipment such as monitor or printer is always available. Under testing, these supporting equipment has to also under working condition. "H" Pattern Generator is able to continuously transmitting "H" character to those supporting equipments.



3. Test Location and Standards

3.1. Test Location

Test Location : Sporton Hwa Ya Testing Building

Address : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Tel: +886 3 327 3456 Fax: +886 3 318 0055

Test Site No. : CO01-HY, 03CH03-HY

3.2. Test Conditions

Normal Voltage : 120V/60Hz

Extreme Voltage : 138V and 102V

Normal Temperature : 20

Extreme Temperature : -20 and 50

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2001

47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.



4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2			
Paragraph	FCC Rule	Description of Test	Result
5.1	15.247(a)(2)	6dB Spectrum Bandwidth (DSSS System)	Pass
5.2	15.247(b)	Maximum Peak Output Power	Pass
5.3	15.247(d)	Peak Power Spectral Density	Pass
5.4	15.247(c)	Band Edges Emission	Pass
5.5	15.107/15.207	AC Power Line Conducted Emission	Pass
5.6	15.209/15.247(c)	Spurious Radiated Emission	Pass
5.7	15.203	Antenna Requirement	Pass



5. Test Result

5.1. Test of 6dB Spectrum Bandwidth (DSSS System)


5.1.1. Measuring Instruments

Item 9 of the table on section 6.

5.1.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6dB bandwidth is defined as the spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.1.3. Test Setup Layout

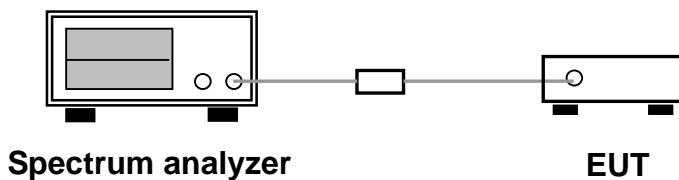

5.1.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64%
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Murray Lu


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit
			(MHz)
01	2412	8.72	0.5
06	2437	8.48	0.5
11	2462	8.68	0.5



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004


Report No.: F431216

(Channel 01) :

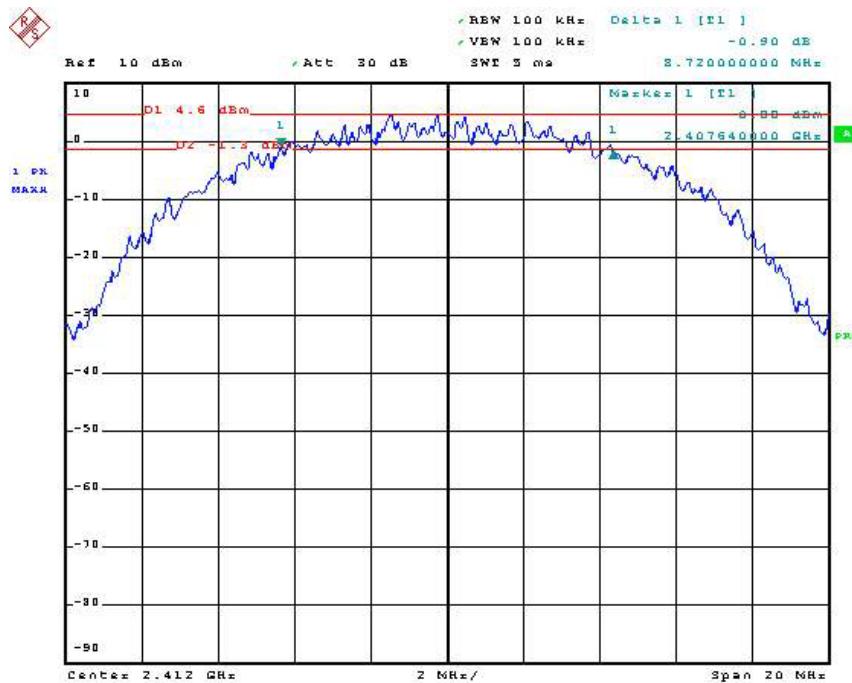

Date: 18.MAR.2004 11:44:41

(Channel 06) :

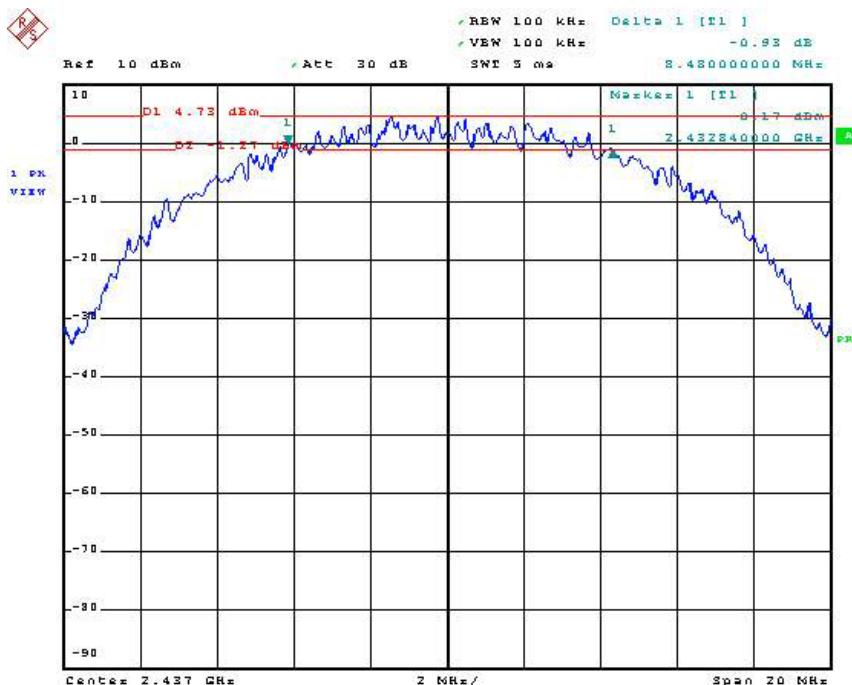

Date: 18.MAR.2004 11:46:36

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 11 of 33


Issued Date : Apr. 27, 2004



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

(Channel 11) :

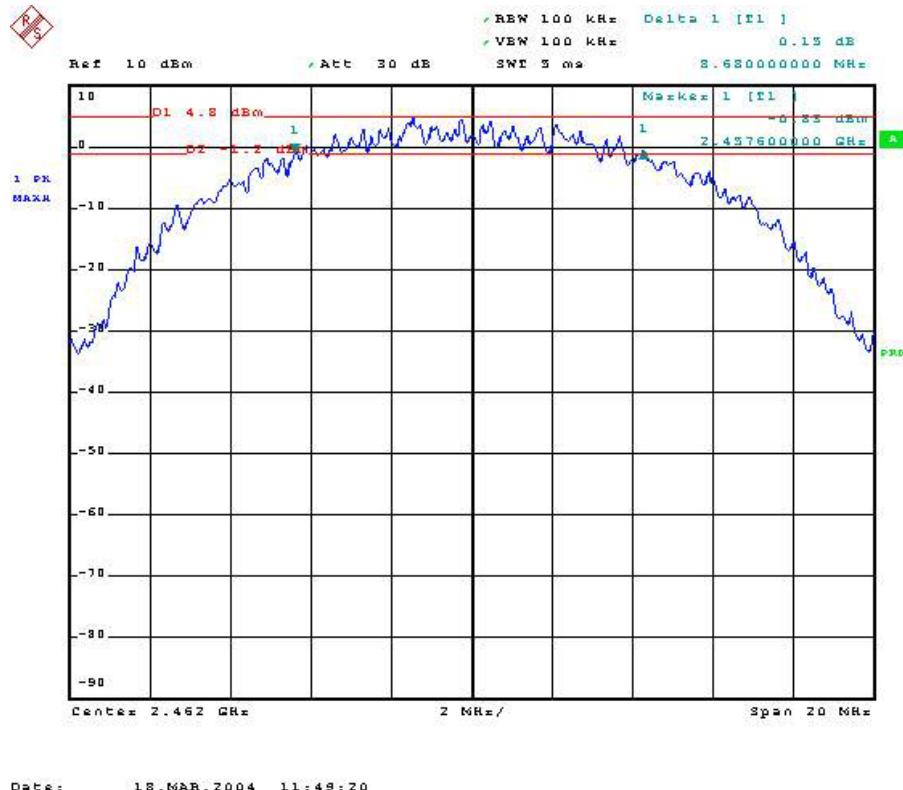

Date: 18.MAR.2004 11:49:20

Sportun International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 12 of 33

Issued Date : Apr. 27, 2004



5.2. Test of Maximum Peak Output Power


5.2.1. Measuring Instruments

Item 9 of the table on section 6.

5.2.2. Test Procedures

1. The transmitter output was connected to the vertical channel of the oscilloscope through a detector.
2. Observe the duty cycle X from the oscilloscope and the record the detected voltage level A.
3. Replace the EUT via the signal generator, calibrate the reading via the carrier frequency.
4. The duty cycle X has to be calibrated on the output power of the signal generator.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.2.3. Test Setup Layout

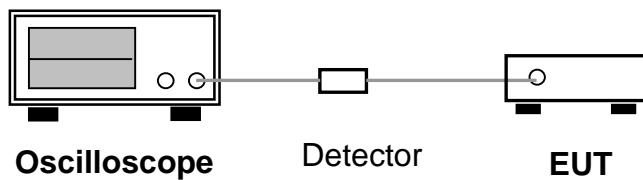

5.2.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Murray Lu

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mWatt)	Limits (dBm)
01	2412	16.5	44.668	30 dBm
06	2437	16.8	47.863	30 dBm
11	2462	16.6	45.709	30 dBm



5.3. Test of Peak Power Spectral Density


5.3.1. Measuring Instruments

Item 9 of the table on section 6.

5.3.2. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.3.3. Test Setup Layout

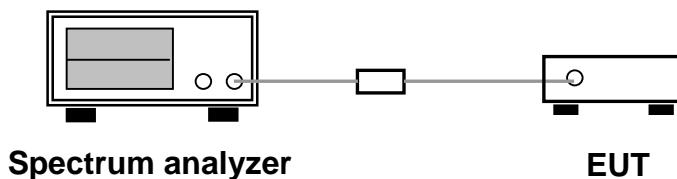

5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 64 %
- Duty Cycle of the Equipment During the Test: 100%
- Test Engineer: Murray Lu


Channel	Frequency (MHz)	Power Density (dBm)	Limits	
			(dBm)	(dBm)
01	2412	-8.39		8
06	2437	-8.35		8
11	2462	-8.22		8



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004


Report No.: F431216

(Channel 01) :

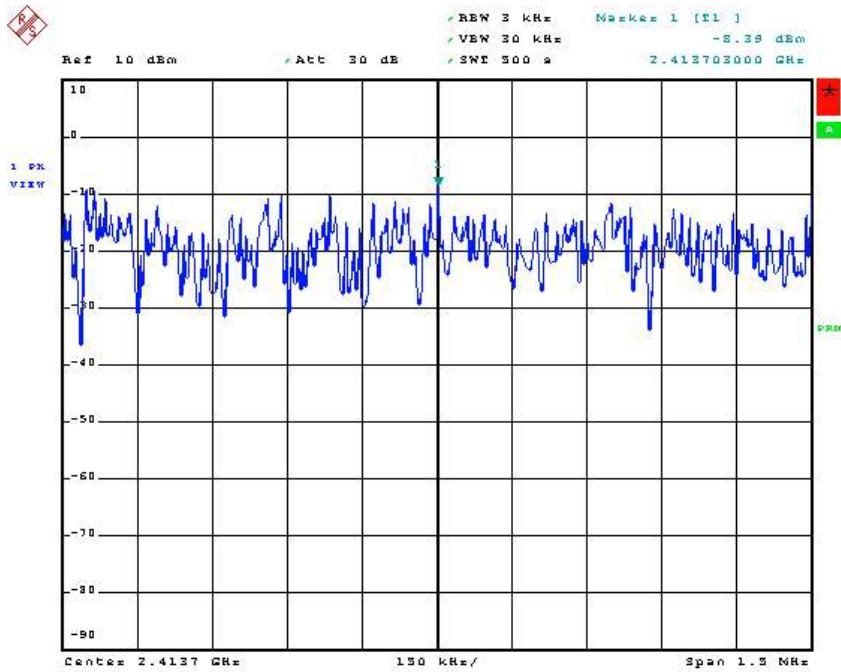

Date: 18.MAR.2004 11:32:33

(Channel 06) :

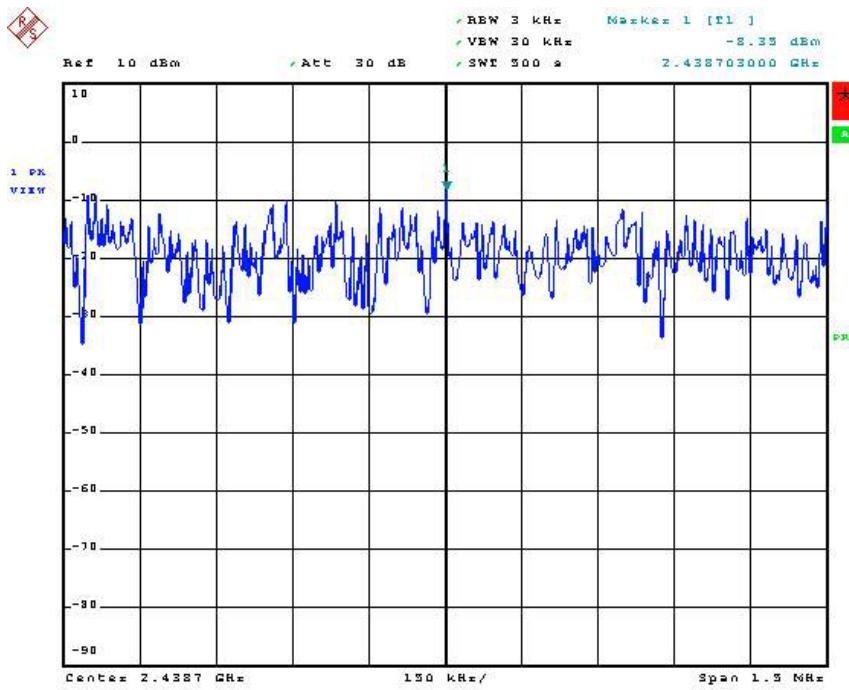

Date: 18.MAR.2004 11:30:36

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 15 of 33


Issued Date : Apr. 27, 2004



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

(Channel 11) :

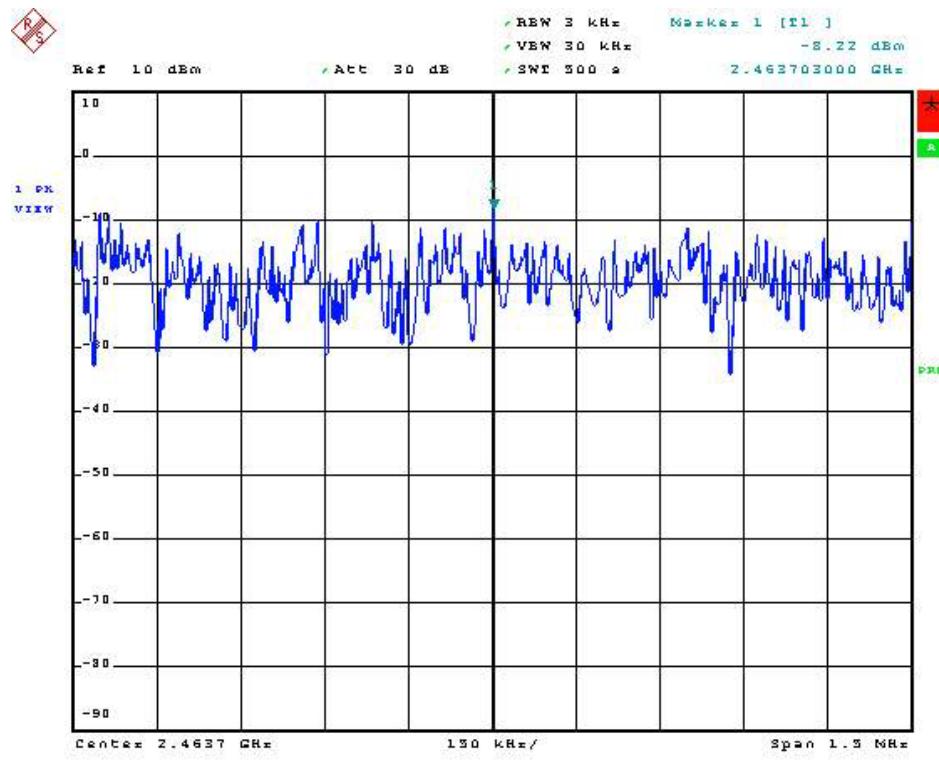

Date: 18.MAR.2004 11:27:22

Sportun International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 16 of 33

Issued Date : Apr. 27, 2004



5.4. Test of Band Edges Emission

5.4.1. Measuring Instruments

Item 9 of the table on section 6.

5.4.2. Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.4.3. Test Result :

- Test Engineer: Murray Lu

(A) Left Edge

The band edge emission plot shows 62.24dB delta between carrier maximum power and local maximum emission in the restricted band.


CH01 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
105.06	62.24	42.82	54.00	-11.18



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

(Channel 01) :

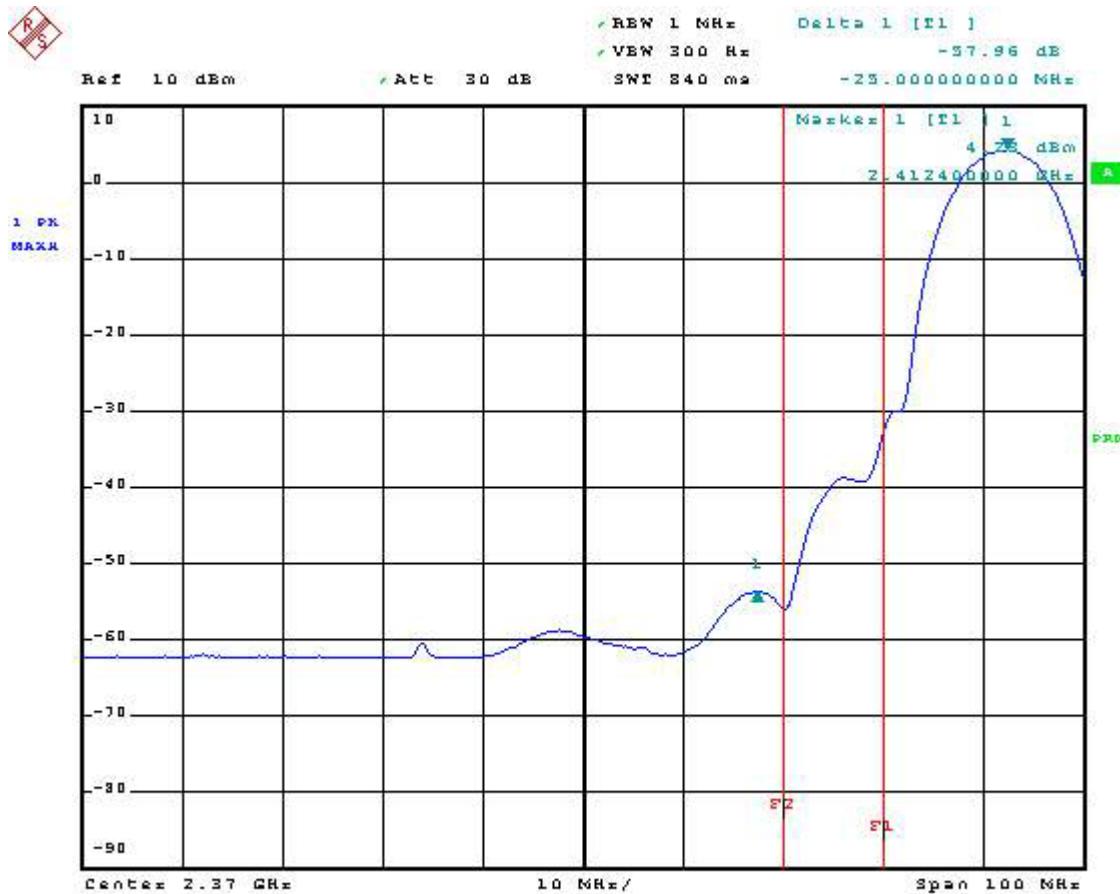

Date: 18.MAR.2004 11:12:06

Sportun International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 18 of 33

Issued Date : Apr. 27, 2004




(B) Right Edge

The band edge emission plot shows 62.35 dB delta between carrier maximum power and local maximum emission in the restricted band.

CH11 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
103.27	62.35	40.92	54.00	-13.08

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

(Channel 11) :

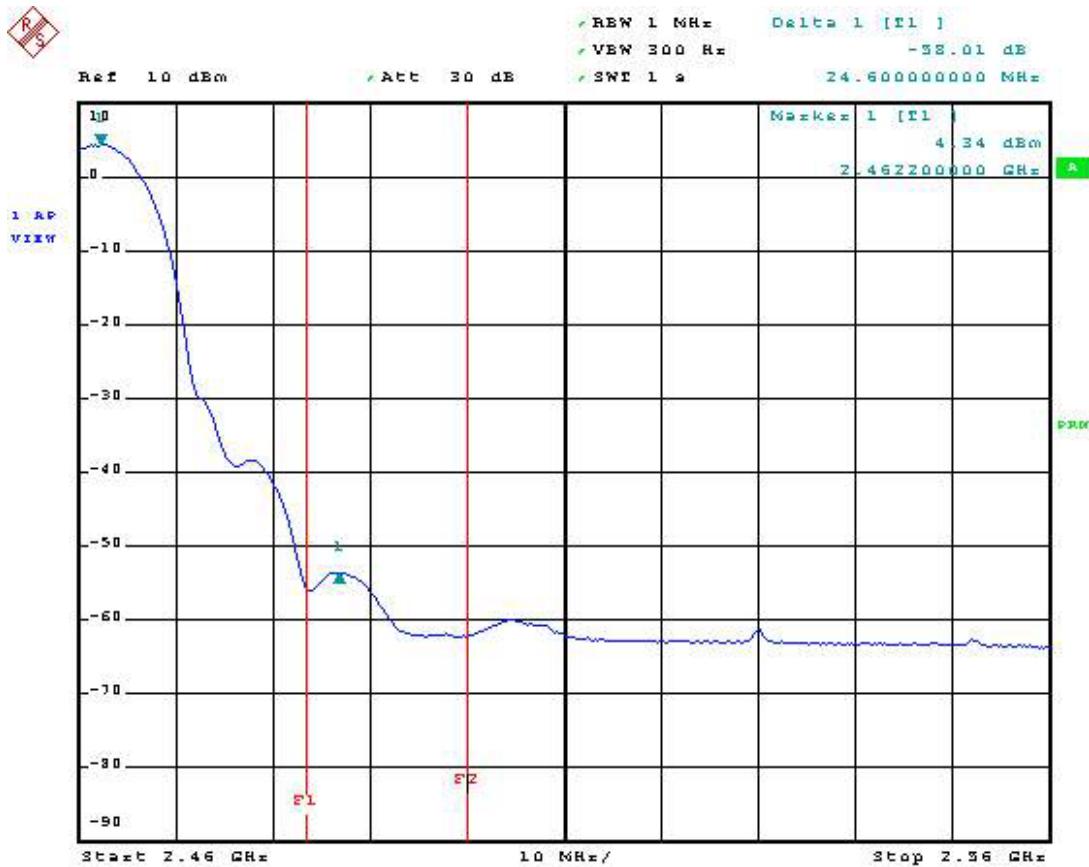

Date: 18.MAR.2004 11:20:49

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.5. Test of AC Power Line Conducted Emission

5.5.1. Measuring Instruments

Please reference item 1~7 in chapter 6 for the instruments used for testing.

5.5.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.



5.5.3. Test Result of Conducted Emission

Test Mode	RF LINK	Tested By	
Temperature / Humidity	26deg. C / 64%		Brian Lin

Line to Ground

Freq	Level	Over	Limit	Read	Probe	Cable	Remark
		MHz	dBuV	dB	dBuV	dBuV	
1	0.595	32.60	-23.40	56.00	32.49	0.10	0.01 QP
2	0.595	6.16	-39.84	46.00	6.05	0.10	0.01 Average
3	0.665	45.68	-10.32	56.00	45.57	0.10	0.01 QP
4	0.665	40.66	-5.34	46.00	40.55	0.10	0.01 Average
5	0.829	43.96	-12.04	56.00	43.84	0.10	0.02 QP
6	0.829	37.51	-8.49	46.00	37.39	0.10	0.02 Average
7	1.160	34.51	-11.49	46.00	34.39	0.10	0.02 Average
8	1.160	43.53	-12.47	56.00	43.41	0.10	0.02 QP
9	1.870	7.96	-38.04	46.00	7.82	0.10	0.04 Average
10	1.870	34.50	-21.50	56.00	34.36	0.10	0.04 QP
11	5.650	28.80	-21.20	50.00	28.58	0.14	0.08 Average
12	5.650	43.69	-16.31	60.00	43.47	0.14	0.08 QP


Neutral to Ground

Freq	Level	Over	Limit	Read	Probe	Cable	Remark
		MHz	dBuV	dB	dBuV	dBuV	
1	0.663	44.18	-11.82	56.00	44.07	0.10	0.01 QP
2	0.663	39.35	-6.65	46.00	39.24	0.10	0.01 Average
3	0.830	37.51	-8.49	46.00	37.39	0.10	0.02 Average
4	0.830	43.78	-12.22	56.00	43.66	0.10	0.02 QP
5	1.320	32.88	-13.12	46.00	32.75	0.10	0.03 Average
6	1.320	43.06	-12.94	56.00	42.93	0.10	0.03 QP
7	1.830	32.22	-13.78	46.00	32.08	0.10	0.04 Average
8	1.830	43.40	-12.60	56.00	43.26	0.10	0.04 QP
9	4.770	23.90	-22.10	46.00	23.63	0.20	0.07 Average
10	4.770	41.75	-14.25	56.00	41.48	0.20	0.07 QP
11	5.450	45.15	-14.85	60.00	44.88	0.20	0.07 QP
12	5.450	26.69	-23.31	50.00	26.42	0.20	0.07 Average


5.5.4. Photographs of Conducted Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW

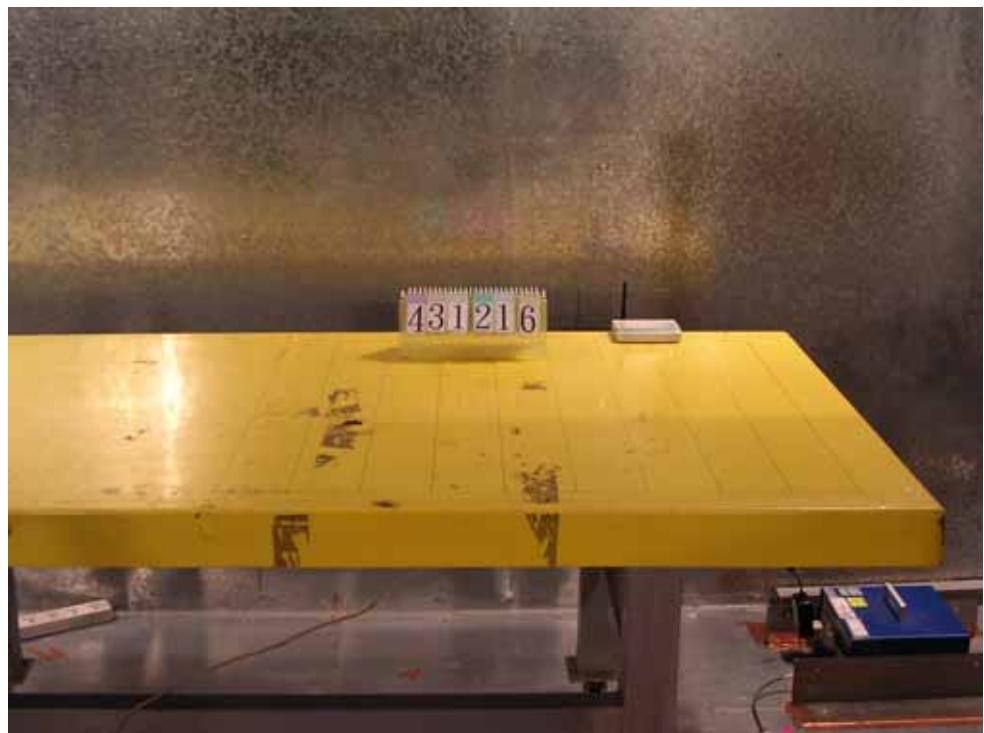

REAR VIEW

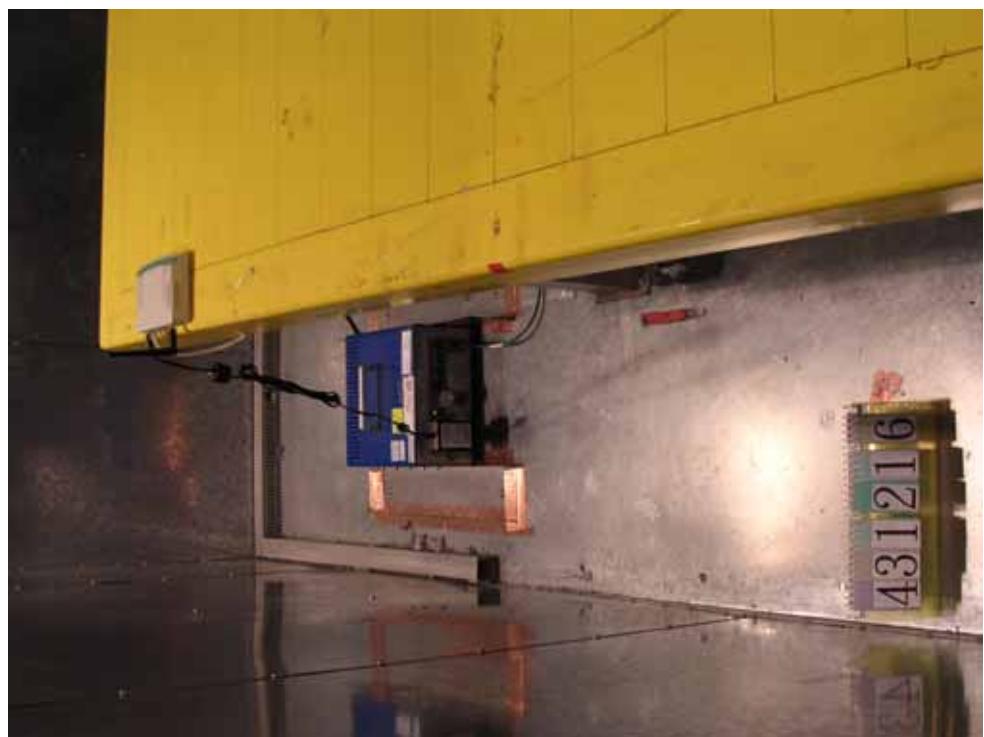



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

SIDE VIEW



SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID. : MQ4AP700C

Page No. : 23 of 33

Issued Date : Apr. 27, 2004



5.6. Test of Spurious Radiated Emission


5.6.1. Measuring Instruments

Please reference item 8~19 in chapter 6 for the instruments used for testing.

5.6.2. Test Procedures

- a) Configure the EUT according to ANSI C63.4.
- b) The EUT was placed on the top of the turn table 0.8 meter above ground.
- c) The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
- d) Power on the EUT and all the supporting units.
- e) The turn table was rotated by 360 degrees to determine the position of the highest radiation.
- f) The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- g) For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- h) Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- i) For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- j) If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
- k) For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Test Setup Layout

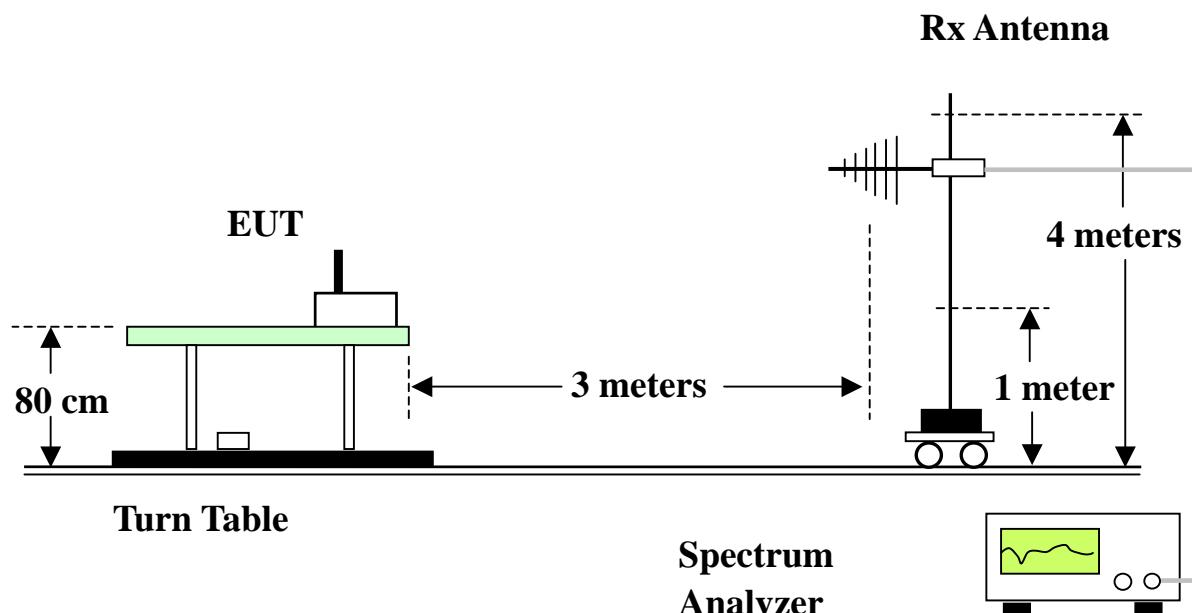



5.6.4. Test Results and Limit

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Test Mode	RF LINK	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	30MHz~1GHz	Humidity	54%		

(A) Polarization: Horizontal

Freq	Level	Over Limit		Read Line	Probe Factor	Cable Preamp		Ant	Table			
		Limit	Limit			dB	dBuV/m	dBuV	dB	dB	Pos	Pos
		MHz	dBuV/m								cm	deg
1	51.590	33.64	-6.36	40.00	50.29	10.13	1.21	27.99	QP	---	---	
2	127.070	37.12	-6.38	43.50	51.80	11.13	2.04	27.85	QP	---	---	
3 !	136.590	37.88	-5.62	43.50	52.08	11.62	2.01	27.83	QP	---	---	
1 !	204.800	42.03	-1.47	43.50	52.03	15.10	2.58	27.68	QP	100	125	
2 !	307.200	41.56	-4.44	46.00	52.15	13.63	3.12	27.34	QP	---	---	
3 !	409.600	41.55	-4.45	46.00	49.95	15.95	3.53	27.88	QP	---	---	

(B) Polarization: Vertical

Freq	Level	Over Limit		Read Line	Probe Factor	Cable Preamp		Ant	Table			
		Limit	Limit			dB	dBuV/m	dBuV	dB	dB	Pos	Pos
		MHz	dBuV/m								cm	deg
1	117.380	33.34	-10.16	43.50	48.72	10.54	1.94	27.86	QP	---	---	
2	127.070	36.53	-6.97	43.50	51.21	11.13	2.04	27.85	QP	---	---	
3 !	136.590	37.67	-5.83	43.50	51.87	11.62	2.01	27.83	QP	---	---	
1 !	204.800	40.30	-3.20	43.50	50.30	15.10	2.58	27.68	QP	---	---	
2	409.600	39.69	-6.31	46.00	48.09	15.95	3.53	27.88	QP	---	---	
3	900.000	35.95	-10.05	46.00	37.83	21.08	5.34	28.30	QP	---	---	



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216

Test Mode	Mode 1 (2412MHz)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	54%		

(A) Polarization: Horizontal

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant	Table		
		Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	1000.000	39.37	-14.63	54.00	54.26	24.10	1.11	40.10	Average	---	---
2	1232.130	39.59	-14.41	54.00	53.96	24.68	1.29	40.34	Average	---	---
3	1999.410	39.99	-14.01	54.00	51.96	27.41	1.53	40.91	Average	---	---
4	2349.690	36.39	-17.61	54.00	47.71	28.12	1.68	41.12	Average	---	---
1	2500.000	35.87	-18.13	54.00	46.78	28.44	1.85	41.20	Average	---	---
2	2507.260	37.30	-16.70	54.00	48.18	28.46	1.86	41.20	Average	---	---
1 !	7238.000	52.74	-1.26	54.00	56.62	35.89	2.93	42.70	Average	100	135

(B) Polarization: Vertical

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant	Table		
		Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	1000.000	40.63	-13.37	54.00	55.52	24.10	1.11	40.10	Average	---	---
2	1999.410	39.68	-14.32	54.00	51.65	27.41	1.53	40.91	Average	---	---
3	2366.370	46.58	-7.42	54.00	57.86	28.15	1.70	41.13	Average	---	---
1	2500.000	42.91	-11.09	54.00	53.82	28.44	1.85	41.20	Average	---	---
2	2507.260	45.41	-8.59	54.00	56.29	28.46	1.86	41.20	Average	---	---
3	2870.880	37.54	-16.46	54.00	47.19	29.60	1.95	41.20	Average	---	---
1 !	3278.000	48.64	-5.36	54.00	57.03	30.68	2.19	41.26	Average	---	---
2	4822.000	47.29	-6.71	54.00	54.13	33.06	2.47	42.37	Average	---	---
1	7238.000	59.80	-14.20	74.00	63.68	35.89	2.93	42.70	Peak	---	---
2	7238.000	41.94	-12.06	54.00	45.82	35.89	2.93	42.70	Average	---	---



Test Mode	Mode 2 (2437MHz)	Temperature	24 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	54%		

(A) Polarization: Horizontal

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant Pos	Table Pos	
		Line	Limit	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	1000.000	39.33	-14.67	54.00	54.22	24.10	1.11	40.10	Average	---
2	1232.130	39.66	-14.34	54.00	54.03	24.68	1.29	40.34	Average	---
3	1999.410	40.52	-13.48	54.00	52.49	27.41	1.53	40.91	Average	---
4	2355.250	36.09	-17.91	54.00	47.39	28.13	1.69	41.12	Average	---
1	2500.000	36.93	-17.07	54.00	47.84	28.44	1.85	41.20	Average	---
2	2529.990	37.22	-16.78	54.00	48.02	28.53	1.87	41.20	Average	---
1	3038.000	45.57	-8.43	54.00	54.61	30.10	2.07	41.21	Average	---
2	4972.000	45.00	-9.00	54.00	51.71	33.37	2.50	42.58	Average	---
1	7313.000	52.35	-1.65	54.00	55.78	36.08	3.10	42.61	Average	100
1	7313.000	52.35	-1.65	54.00	55.78	36.08	3.10	42.61	Average	137

(B) Polarization: Vertical

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant Pos	Table Pos	
		Line	Limit	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	1000.000	39.79	-14.21	54.00	54.68	24.10	1.11	40.10	Average	---
2	1999.410	39.72	-14.28	54.00	51.69	27.41	1.53	40.91	Average	---
3	2355.250	44.37	-9.63	54.00	55.67	28.13	1.69	41.12	Average	---
1	2500.000	43.03	-30.97	74.00	53.94	28.44	1.85	41.20	Peak	---
2	2507.260	44.86	-9.14	54.00	55.74	28.46	1.86	41.20	Average	---
3	2540.830	45.31	-8.69	54.00	56.06	28.57	1.88	41.20	Average	---
1	3038.000	46.44	-7.56	54.00	55.48	30.10	2.07	41.21	Average	---
2	4876.000	48.62	-5.38	54.00	55.37	33.17	2.52	42.44	Average	---
1	7310.000	57.47	-16.53	74.00	60.86	36.07	3.15	42.61	Peak	---
2	7310.000	41.54	-12.46	54.00	44.93	36.07	3.15	42.61	Average	---



Test Mode	Mode 3 (2462MHz)	Temperature	27 deg. C	Tested By	Steve Chen
Freq. Range	1GHz~25GHz	Humidity	63%		

(A) Polarization: Horizontal

	Freq	Over Level	Limit	Limit	Read Line	Probe Level	Cable Factor	Preamp Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m		dB	dBuV/m	dBuV	dB	dB		cm	deg
1	1000.000	41.02	-12.98	54.00	55.91	24.10	1.11	40.10	Average	---	---
2	1230.740	44.21	-9.79	54.00	58.59	24.68	1.28	40.34	Average	---	---
3	1999.410	42.80	-11.20	54.00	54.77	27.41	1.53	40.91	Average	---	---
4	2376.100	39.27	-14.73	54.00	50.52	28.17	1.71	41.13	Average	---	---
1	2500.000	40.67	-13.33	54.00	51.58	28.44	1.85	41.20	Average	---	---
2	2501.580	42.77	-11.23	54.00	53.68	28.44	1.85	41.20	Average	---	---
1 !	3326.000	50.35	-3.65	54.00	58.66	30.80	2.16	41.27	Average	---	---
1 !	7385.000	51.64	-2.36	54.00	55.12	36.25	2.79	42.52	Average	---	---

(B) Polarization: Vertical

	Freq	Over Level	Limit	Limit	Read Line	Probe Level	Cable Factor	Preamp Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m		dB	dBuV/m	dBuV	dB	dB		cm	deg
1	1097.300	35.61	-18.39	54.00	50.23	24.36	1.23	40.21	Average	---	---
2	1232.130	35.55	-18.45	54.00	49.92	24.68	1.29	40.34	Average	---	---
3	2333.010	42.97	-11.03	54.00	54.30	28.08	1.70	41.11	Average	---	---
1	2500.000	44.90	-9.10	54.00	55.81	28.44	1.85	41.20	Average	---	---
2	2507.260	47.96	-6.04	54.00	58.84	28.46	1.86	41.20	Average	---	---
3	2567.690	45.15	-8.85	54.00	55.81	28.65	1.89	41.20	Average	---	---
4	2970.040	43.25	-10.75	54.00	52.26	29.91	2.28	41.20	Average	---	---
1	2500.000	44.90	-9.10	54.00	55.81	28.44	1.85	41.20	Average	---	---
2	2507.260	47.96	-6.04	54.00	58.84	28.46	1.86	41.20	Average	---	---
3	2567.690	45.15	-8.85	54.00	55.81	28.65	1.89	41.20	Average	---	---
4	2970.040	43.25	-10.75	54.00	52.26	29.91	2.28	41.20	Average	---	---
1	3326.000	47.99	-6.01	54.00	56.30	30.80	2.16	41.27	Average	---	---
2	4926.000	45.84	-8.16	54.00	52.60	33.28	2.47	42.51	Average	---	---
1 !	7385.000	52.88	-1.12	54.00	56.36	36.25	2.79	42.52	Average	100	135


5.6.5 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

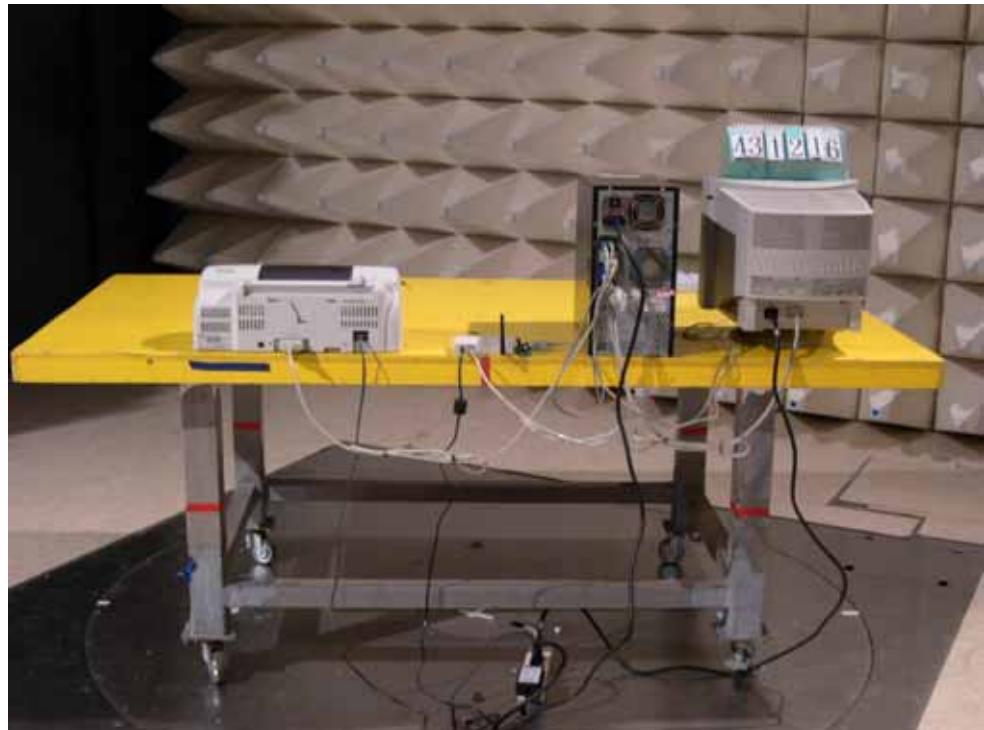



5.7. Antenna Requirements

5.7.1. Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Antenna Connected Construction

The antenna used in this product is printed Dipole antenna, and the antenna connector is inverted-SMA.



6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
2	LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 30, 2003	Conduction (CO01-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 30, 2003	Conduction (CO01-HY)
4	EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
5	EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
6	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Dec. 24, 2003	Conduction (CO01-HY)
7	50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
8	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
9	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 24, 2003	Radiation (03CH03-HY)
10	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 24, 2003	Radiation (03CH03-HY)
11	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
12	Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Jul. 23, 2003	Radiation (03CH03-HY)
13	Horn Antenna	COM-POWER	3115	6741	1GHz – 18GHz	Apr. 07, 2004	Radiation (03CH03-HY)
14	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
15	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
16	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
17	Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
18	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

Calibration Interval of instruments listed above is one year.



FCC ID: MQ4AP700C
Issued on Apr. 27, 2004

Report No.: F431216


Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
19	Spectrum analyzer	R&S	FSP7	838858/014	9KHZ~7GHZ	Sep. 03, 2003	Conducted
20	Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
21	Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
22	Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
23	AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
24	AC power source	G.W.	GPC-6030D	C671845	DC 1V~60V	Nov. 06, 2003	Conducted
25	Temp. and	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted
26	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz~7GHz	Jan. 01, 2004	Conducted
27	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz~1GHz	Jan. 01, 2004	Conducted

Calibration Interval of instruments listed above is one year.

APPENDIX A. Photographs of EUT






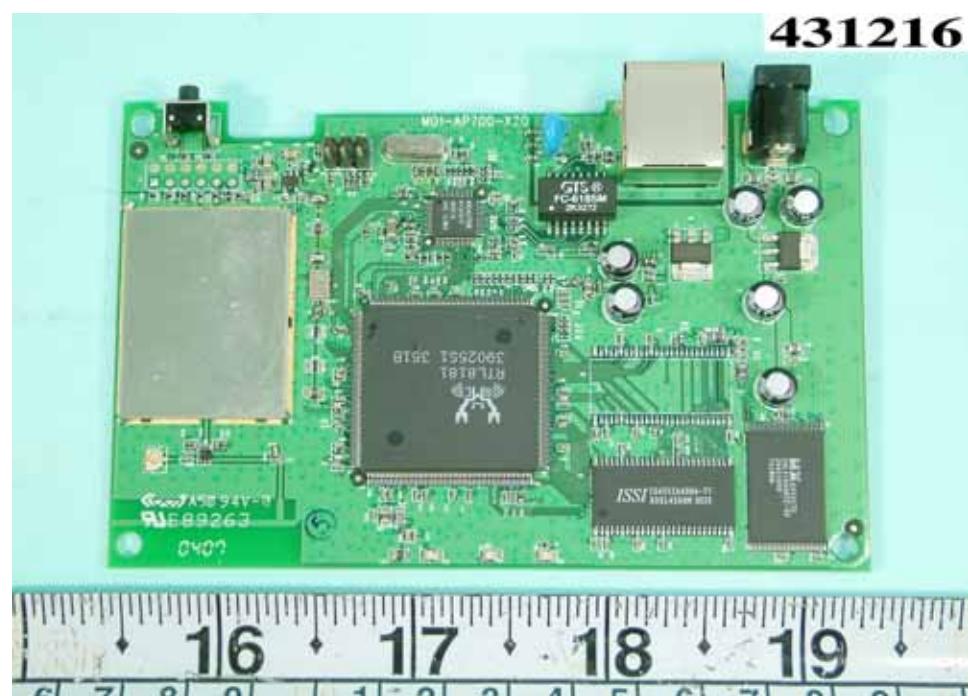




431216

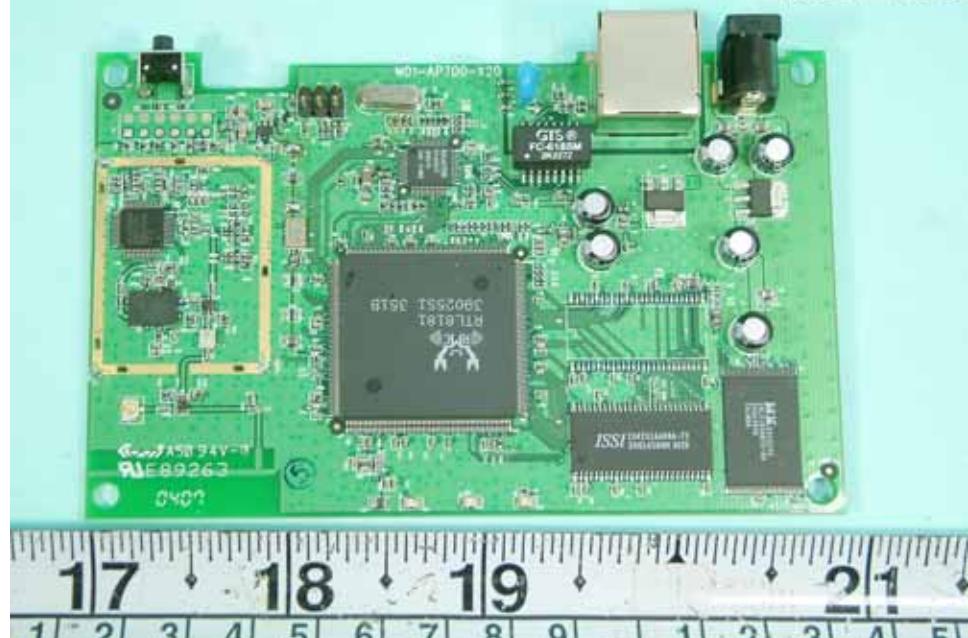

431216

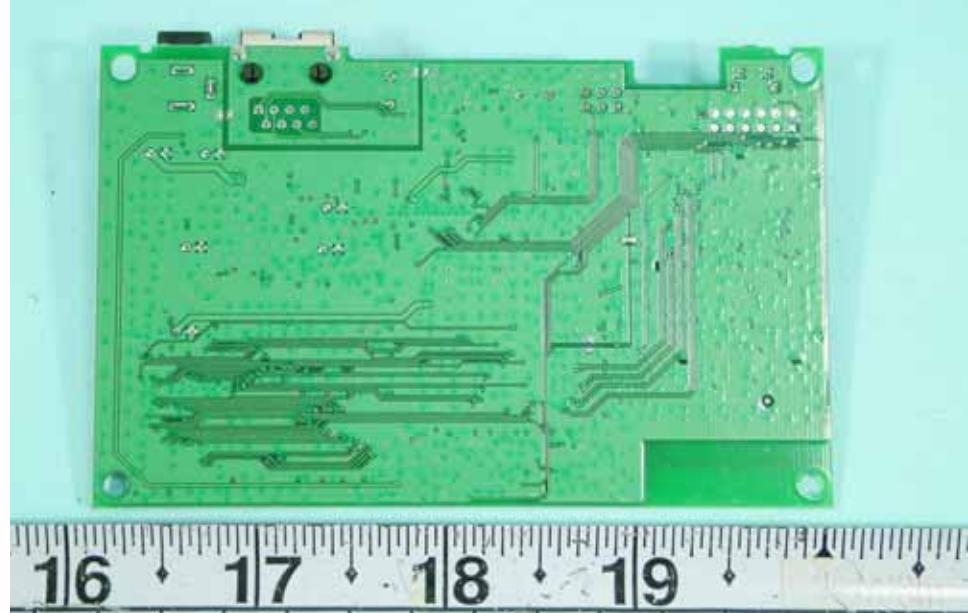





REPORT NO. : F431216

431216

