



# FCC TEST REPORT

**REPORT NO. :** RF940421L02

**MODEL NO. :** BSR202

**RECEIVED :** Apr. 20, 2005

**TESTED :** Apr. 29 ~ May 03, 2005

**ISSUED :** May 04, 2005

**APPLICANT :** AboCom Systems, Inc.

**ADDRESS :** 1F, No.21, Yanfa 2nd Rd., SBIP, Hsinchu City 300,  
Taiwan, R.O.C.

**ISSUED BY :** Advance Data Technology Corporation

**LAB ADDRESS :** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang  
244, Taipei Hsien, Taiwan, R.O.C.

**TEST LOCATION :** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agency. The test results in the report only apply to the tested sample.



## TABLE OF CONTENTS

|       |   |    |
|-------|---|----|
| 1     | CERTIFICATION .....                                     | 5  |
| 2     | SUMMARY OF TEST RESULTS .....                           | 6  |
| 2.1   | MEASUREMENT UNCERTAINTY.....                            | 6  |
| 3     | GENERAL INFORMATION.....                                | 7  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                        | 7  |
| 3.2   | DESCRIPTION OF TEST MODES.....                          | 8  |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST .....                | 9  |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... | 10 |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS .....          | 11 |
| 3.4   | DESCRIPTION OF SUPPORT UNITS .....                      | 11 |
| 4     | TEST PROCEDURES AND RESULTS .....                       | 12 |
| 4.1   | CONDUCTED EMISSION MEASUREMENT .....                    | 12 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT.....           | 12 |
| 4.1.2 | TEST INSTRUMENTS.....                                   | 12 |
| 4.1.3 | TEST PROCEDURES .....                                   | 13 |
| 4.1.4 | DEVIATION FROM TEST STANDARD .....                      | 13 |
| 4.1.5 | TEST SETUP.....   | 14 |
| 4.1.6 | EUT OPERATING CONDITIONS .....                          | 14 |
| 4.1.7 | TEST RESULTS .....                                      | 15 |
| 4.2   | NUMBER OF HOPPING FREQUENCY USED .....                  | 21 |
| 4.2.1 | LIMIT OF HOPPING FREQUENCY USED .....                   | 21 |
| 4.2.2 | TEST INSTRUMENTS.....                                   | 21 |
| 4.2.3 | TEST PROCEDURES .....                                   | 22 |
| 4.2.4 | DEVIATION FROM TEST STANDARD .....                      | 22 |
| 4.2.5 | TEST SETUP.....   | 22 |
| 4.2.6 | TEST RESULTS .....                                      | 22 |
| 4.3   | DWELL TIME ON EACH CHANNEL .....                        | 24 |
| 4.3.1 | LIMIT OF DWELL TIME USED.....                           | 24 |
| 4.3.2 | TEST INSTRUMENTS.....                                   | 24 |
| 4.3.3 | TEST PROCEDURES .....                                   | 25 |
| 4.3.4 | DEVIATION FROM TEST STANDARD .....                      | 25 |

|       |   |    |
|-------|---|----|
| 4.3.5 | TEST SETUP.....                                       | 25 |
| 4.3.6 | TEST RESULTS .....                                    | 26 |
| 4.4   | CHANNEL BANDWIDTH.....                                | 30 |
| 4.4.1 | LIMITS OF CHANNEL BANDWIDTH .....                     | 30 |
| 4.4.2 | TEST INSTRUMENTS.....                                 | 30 |
| 4.4.3 | TEST PROCEDURE.....                                   | 31 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                    | 31 |
| 4.4.5 | TEST SETUP.....                                       | 31 |
| 4.4.6 | EUT OPERATING CONDITION .....                         | 31 |
| 4.4.7 | TEST RESULTS .....                                    | 32 |
| 4.5   | HOPPING CHANNEL SEPARATION .....                      | 35 |
| 4.5.1 | LIMIT OF HOPPING CHANNEL SEPARATION .....             | 35 |
| 4.5.2 | TEST INSTRUMENTS.....                                 | 35 |
| 4.5.3 | TEST PROCEDURES .....                                 | 36 |
| 4.5.4 | DEVIATION FROM TEST STANDARD .....                    | 36 |
| 4.5.5 | TEST SETUP.....                                       | 36 |
| 4.5.6 | TEST RESULTS .....                                    | 37 |
| 4.6   | MAXIMUM PEAK OUTPUT POWER .....                       | 40 |
| 4.6.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT ..... | 40 |
| 4.6.2 | INSTRUMENTS.....                                      | 40 |
| 4.6.3 | TEST PROCEDURES .....                                 | 41 |
| 4.6.4 | DEVIATION FROM TEST STANDARD .....                    | 41 |
| 4.6.5 | TEST SETUP.....                                       | 41 |
| 4.6.6 | EUT OPERATING CONDITION .....                         | 41 |
| 4.6.7 | TEST RESULTS .....                                    | 42 |
| 4.7   | RADIATED EMISSION MEASUREMENT .....                   | 45 |
| 4.7.1 | LIMITS OF RADIATED EMISSION MEASUREMENT.....          | 45 |
| 4.7.2 | TEST INSTRUMENTS.....                                 | 46 |
| 4.7.3 | TEST PROCEDURES .....                                 | 47 |
| 4.7.4 | DEVIATION FROM TEST STANDARD .....                    | 47 |
| 4.7.5 | TEST SETUP.....                                       | 48 |
| 4.7.6 | EUT OPERATING CONDITIONS .....                        | 48 |

|       |   |    |
|-------|---|----|
| 4.7.7 | TEST RESULTS .....                            | 49 |
| 4.8   | BAND EDGES MEASUREMENT .....                  | 54 |
| 4.8.1 | LIMITS OF BAND EDGES MEASUREMENT .....        | 54 |
| 4.8.2 | TEST INSTRUMENTS.....                         | 54 |
| 4.8.3 | TEST PROCEDURE.....                           | 54 |
| 4.8.4 | DEVIATION FROM TEST STANDARD .....            | 54 |
| 4.8.5 | EUT OPERATING CONDITION .....                 | 54 |
| 4.8.6 | TEST RESULTS .....                            | 55 |
| 4.9   | ANTENNA REQUIREMENT .....                     | 58 |
| 4.9.1 | STANDARD APPLICABLE .....                     | 58 |
| 4.9.2 | ANTENNA CONNECTED CONSTRUCTION .....          | 58 |
| 5     | PHOTOGRAPHS OF THE TEST CONFIGURATION.....    | 59 |
| 6     | INFORMATION ON THE TESTING LABORATORIES ..... | 62 |



## 1 CERTIFICATION

**PRODUCT** : Bluetooth Stereo Receiver

**BRAND NAME** : AboCom

**MODEL NO.** : BSR202

**APPLICANT** : AboCom Systems, Inc.

**TESTED** : Apr. 29 ~ May 03, 2005

**TEST SAMPLE** : ENGINEERING SAMPLE

**STANDARDS** : FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4:2003

The above equipment (model: BSR202) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : *Suntee Liu* , **DATE** : May 04, 2005  
( Suntee Liu )

**TECHNICAL  
ACCEPTANCE** : *Gary Chang* , **DATE** : May 04, 2005  
Responsible for RF ( Gary Chang )

**APPROVED BY** : *Cody Chang* , **DATE** : May 04, 2005  
( Cody Chang / Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C |   |        |  |
|--|---|--------|--|
| Standard Section                         | Test Type and Limit   | Result | REMARK   |
| 15.207                                   | AC Power Conducted Emission   | PASS   | Meet the requirement of limit<br>Minimum passing margin is<br>-18.42dB at 0.216MHz |
| 15.247(a)(1) (iii)                       | Number of Hopping Frequency<br>Used Spec.: At least 15 channels   | PASS   | Meet the requirement of limit  |
| 15.247(a)(1) (iii)                       | Dwell Time on Each Channel<br>Spec. : Max. 0.4 second within 31.6 second  | PASS   | Meet the requirement of limit  |
| 15.247(a)(1)                             | Hopping Channel Separation<br>Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater<br>Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS   | Meet the requirement of limit  |
| 15.247(b)                                | Maximum Peak Output Power<br>Spec.: max. 30dBm  | PASS   | Meet the requirement of limit  |
| 15.247(d)                                | Transmitter Radiated Emissions<br>Spec.: Table 15.209   | PASS   | Meet the requirement of limit<br>Minimum passing margin is<br>-5.17dB at 951.40MHz |
| 15.247(d)                                | Band Edge Measurement   | PASS   | Meet the requirement of limit  |

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT         | FREQUENCY       | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz~30MHz      | 2.44 dB     |
| Radiated emissions  | 30MHz ~ 200MHz  | 3.55 dB     |
|                     | 200MHz ~1000MHz | 3.58 dB     |
|                     | 1GHz ~ 18GHz    | 1.10 dB     |
|                     | 18GHz ~ 40GHz   | 0.91 dB     |

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |   |
|------------------------------|---|
| <b>PRODUCT</b>               | Bluetooth Stereo Receiver   |
| <b>MODEL NO.</b>             | BSR202  |
| <b>POWER SUPPLY</b>          | 3.7Vdc from polymer lithium ion battery<br>5Vdc from host equipment |
| <b>MODULATION TYPE</b>       | GFSK  |
| <b>MODULATION TECHNOLOGY</b> | FHSS  |
| <b>FREQUENCY RANGE</b>       | 2402 MHz ~ 2480 MHz   |
| <b>NUMBER OF CHANNEL</b>     | 79  |
| <b>OUTPUT POWER</b>          | 1.153mW   |
| <b>ANTENNA TYPE</b>          | PIFA antenna with antenna gain 1.93dBi                              |
| <b>DATA CABLE</b>            | 1.05 m shielded USB cable without core                              |
| <b>I/O PORT</b>              | USB, audio output   |

**NOTE:**

1. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES


Operated in 2400 ~ 2483.5MHz Band:

79 channels are provided to this EUT.


| Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0       | 2402           | 20      | 2422           | 40      | 2442           | 60      | 2462           |
| 1       | 2403           | 21      | 2423           | 41      | 2443           | 61      | 2463           |
| 2       | 2404           | 22      | 2424           | 42      | 2444           | 62      | 2464           |
| 3       | 2405           | 23      | 2425           | 43      | 2445           | 63      | 2465           |
| 4       | 2406           | 24      | 2426           | 44      | 2446           | 64      | 2466           |
| 5       | 2407           | 25      | 2427           | 45      | 2447           | 65      | 2467           |
| 6       | 2408           | 26      | 2428           | 46      | 2448           | 66      | 2468           |
| 7       | 2409           | 27      | 2429           | 47      | 2449           | 67      | 2469           |
| 8       | 2410           | 28      | 2430           | 48      | 2450           | 68      | 2470           |
| 9       | 2411           | 29      | 2431           | 49      | 2451           | 69      | 2471           |
| 10      | 2412           | 30      | 2431           | 50      | 2452           | 70      | 2472           |
| 11      | 2413           | 31      | 2433           | 51      | 2453           | 71      | 2473           |
| 12      | 2414           | 32      | 2434           | 52      | 2454           | 72      | 2474           |
| 13      | 2415           | 33      | 2435           | 53      | 2455           | 73      | 2475           |
| 14      | 2416           | 34      | 2436           | 54      | 2456           | 74      | 2476           |
| 15      | 2417           | 35      | 2437           | 55      | 2457           | 75      | 2477           |
| 16      | 2418           | 36      | 2438           | 56      | 2458           | 76      | 2478           |
| 17      | 2419           | 37      | 2439           | 57      | 2459           | 77      | 2479           |
| 18      | 2420           | 38      | 2440           | 58      | 2460           | 78      | 2480           |
| 19      | 2421           | 39      | 2441           | 59      | 2461           |         |                |

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

For USB charging mode

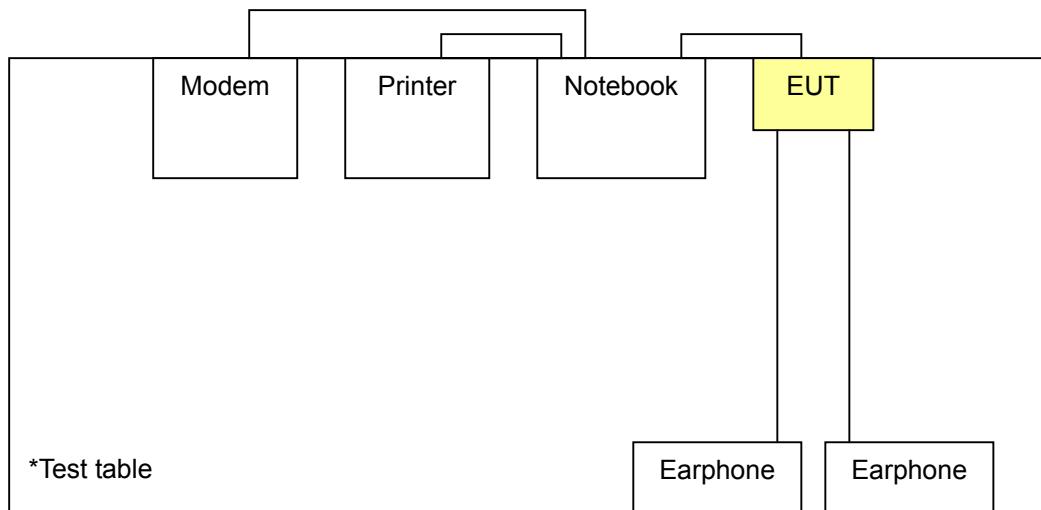

For battery mode

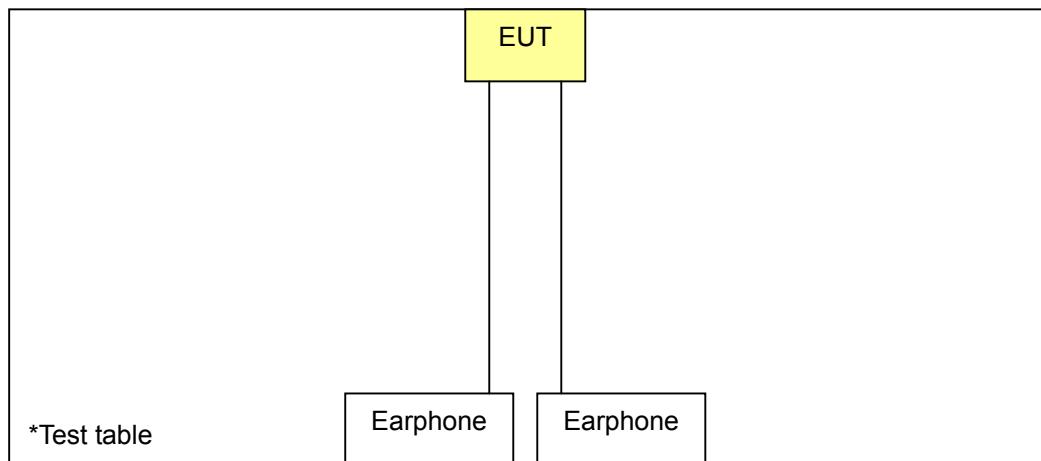

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT<br>Configure<br>Mode | Applicable to |       |        |        | Description       |
|--------------------------|---------------|-------|--------|--------|-------------------|
|                          | PLC           | RE<1G | RE≥1G  | APCM   |                   |
| A                        | x             | X     | Note 1 | Note 2 | Battery mode      |
| B                        | x             | X     | Note 1 | Note 2 | USB charging mode |

Where PLC: Power Line Conducted Emission

RE&lt;1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note 1: No effect on Radiated Emission above 1GHz.

Note 2: Conducted RF measurement is independent of USB cable.

#### Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.

Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>Configure<br>Mode | Available<br>Channel | Tested<br>Channel | Modulation<br>Technology | Modulation<br>Type | Packet Type | Position |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-------------|----------|
| B                        | 0 ~ 78               | 0, 39, 78         | FHSS                     | GFSK               | DH5         | Z        |

#### Radiated Emission Test (Below 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.

Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>Configure<br>Mode | Available<br>Channel | Tested<br>Channel | Modulation<br>Technology | Modulation<br>Type | Packet Type | Position |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-------------|----------|
| A                        | 0 ~ 78               | 0, 39, 78         | FHSS                     | GFSK               | DH5         | Z        |
| B                        | 0 ~ 78               | 0, 39, 78         | FHSS                     | GFSK               | DH5         | Z        |

#### Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.

Following channel(s) was (were) selected for the final test as listed below.

| EUT<br>Configure<br>Mode | Available<br>Channel | Tested<br>Channel | Modulation<br>Technology | Modulation<br>Type | Packet Type | Position |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-------------|----------|
| B                        | 0 ~ 78               | 0, 39, 78         | FHSS                     | GFSK               | DH5         | Z        |

#### Bandedge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.

Following channel(s) was (were) selected for the final test as listed below.

| Available<br>Channel | Tested<br>Channel | Modulation<br>Technology | Modulation<br>Type | Packet Type | Position |
|----------------------|-------------------|--------------------------|--------------------|-------------|----------|
| 0 ~ 78               | 0, 39, 78         | FHSS                     | GFSK               | DH5         | Z        |

**Antenna Port Conducted Measurement:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and XYZ axis.

Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type | Position |
|-------------------|----------------|-----------------------|-----------------|-------------|----------|
| 0 ~ 78            | 0, 39, 78      | FHSS                  | GFSK            | DH5         | Z        |

**3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a Bluetooth Stereo Receiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (Section 15.247)****ANSI C63.4:2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

**3.4 DESCRIPTION OF SUPPORT UNITS**

| NO. | PRODUCT           | BRAND   | MODEL NO. | SERIAL NO.  | FCC ID           |
|-----|-------------------|---------|-----------|-------------|------------------|
| 1   | NOTEBOOK COMPUTER | DELL    | PP05L     | 12130898320 | E2K24CLNS        |
| 2   | MODEM             | ACEEX   | 1414V/3   | 0401008248  | IFAXDM1414       |
| 3   | PRINTER           | EPSON   | LQ-300+   | DCGY047265  | FCC DoC Approved |
| 4   | EARPHONE          | PHILIPS | SBC HL125 | H2-010073   | NA               |
| 5   | EARPHONE          | PHILIPS | SBC HL125 | H2-010074   | NA               |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1   | NA  |
| 2   | 1.2 shielded cable                                  |
| 3   | 1.2 shielded cable                                  |
| 4   | 1.2 shielded cable                                  |
| 5   | 1.2 shielded cable                                  |

**NOTE:** All power cords of the above support units are nonshielded (1.8m).

## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER       | MODEL NO.   | SERIAL NO.     | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ | ESCS30      | 100288         | Nov. 06, 2005    |
| RF signal cable<br>Woken         | 5D-FB       | Cable-HyC02-01 | Jan. 09, 2006    |
| LISN<br>ROHDE & SCHWARZ          | ESH2-Z5     | 100100         | Jan. 20, 2006    |
| LISN<br>ROHDE & SCHWARZ          | ESH3-Z5     | 100311         | Jan. 20, 2006    |
| Software<br>ADT                  | ADT_Cond_V3 | NA             | NA               |

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 3.
3. The VCCI Site Registration No. is C-2047.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

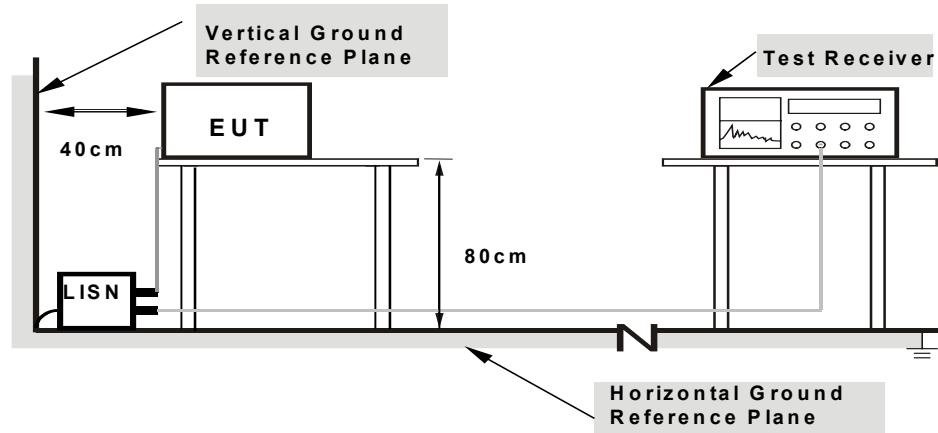

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to the notebook and powered by USB interface.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook sent "H" messages to its screen.
- d. The notebook sent "H" messages to the printer and the printer printed them out.
- e. The notebook sent "H" messages to the modem.
- f. The EUT sent audio messages to the earphones.
- g. Steps c ~ f were repeated.

#### 4.1.7 TEST RESULTS


##### Conducted Worst-Case Data

|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 0                         | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 1        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.205          | 0.10                    | 41.97         | -   | 42.07          | -   | 63.42     | 53.42 | -21.35 | -   |
| 2  | 0.330          | 0.10                    | 28.31         | -   | 28.41          | -   | 59.46     | 49.46 | -31.05 | -   |
| 3  | 1.754          | 0.20                    | 31.03         | -   | 31.23          | -   | 56.00     | 46.00 | -24.77 | -   |
| 4  | 4.164          | 0.20                    | 27.68         | -   | 27.88          | -   | 56.00     | 46.00 | -28.12 | -   |
| 5  | 10.512         | 0.31                    | 34.62         | -   | 34.93          | -   | 60.00     | 50.00 | -25.07 | -   |
| 6  | 16.348         | 0.51                    | 29.02         | -   | 29.53          | -   | 60.00     | 50.00 | -30.47 | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

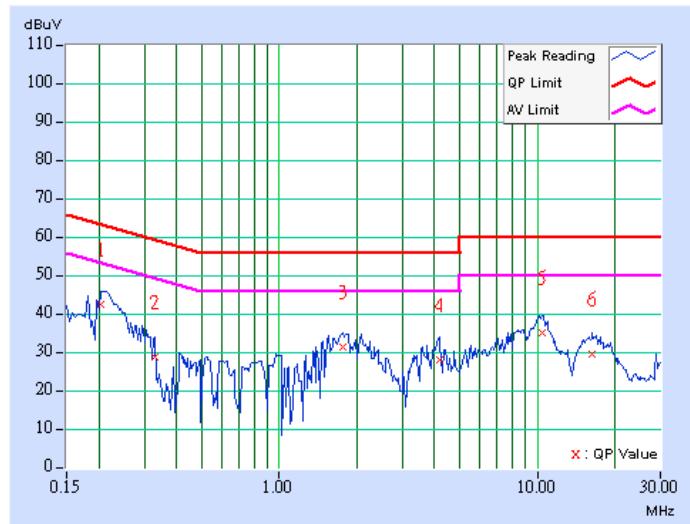


|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 0                         | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 2        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit        |              | Margin        |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|--------------|--------------|---------------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)]    |              | (dB)          |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.         | AV.          | Q.P.          | AV. |
| 1  | 0.189          | 0.10                    | 36.77         | -   | 36.87          | -   | 64.08        | 54.08        | -27.21        | -   |
| 2  | <b>0.216</b>   | <b>0.10</b>             | <b>44.44</b>  | -   | <b>44.54</b>   | -   | <b>62.96</b> | <b>52.96</b> | <b>-18.42</b> | -   |
| 3  | 1.625          | 0.20                    | 32.46         | -   | 32.66          | -   | 56.00        | 46.00        | -23.34        | -   |
| 4  | 3.793          | 0.20                    | 27.63         | -   | 27.83          | -   | 56.00        | 46.00        | -28.17        | -   |
| 5  | 10.578         | 0.41                    | 35.08         | -   | 35.49          | -   | 60.00        | 50.00        | -24.51        | -   |
| 6  | 16.445         | 0.59                    | 28.63         | -   | 29.22          | -   | 60.00        | 50.00        | -30.78        | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

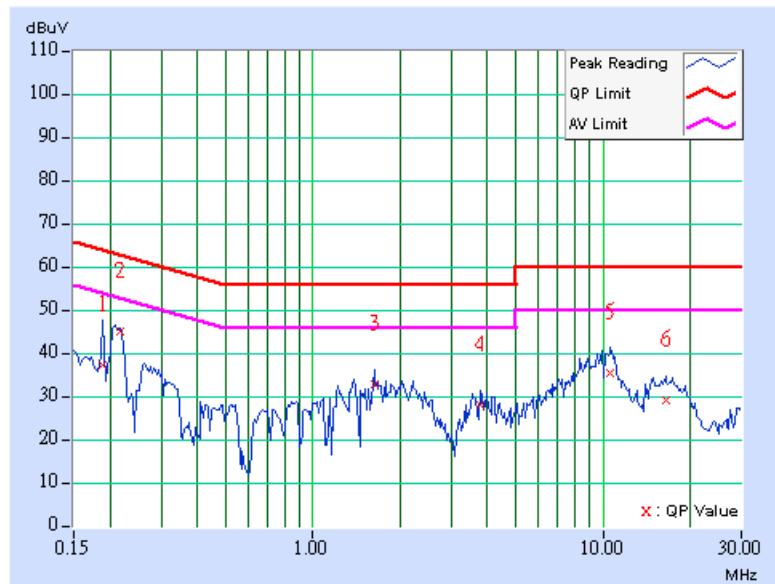


|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 39                        | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 1        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.181          | 0.10                    | 43.18         | -   | 43.28          | -   | 64.43     | 54.43 | -21.15 | -   |
| 2  | 0.306          | 0.10                    | 31.40         | -   | 31.50          | -   | 60.07     | 50.07 | -28.57 | -   |
| 3  | 1.691          | 0.20                    | 30.68         | -   | 30.88          | -   | 56.00     | 46.00 | -25.12 | -   |
| 4  | 3.930          | 0.20                    | 27.63         | -   | 27.83          | -   | 56.00     | 46.00 | -28.17 | -   |
| 5  | 10.309         | 0.31                    | 34.69         | -   | 35.00          | -   | 60.00     | 50.00 | -25.00 | -   |
| 6  | 16.105         | 0.49                    | 28.98         | -   | 29.47          | -   | 60.00     | 50.00 | -30.53 | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

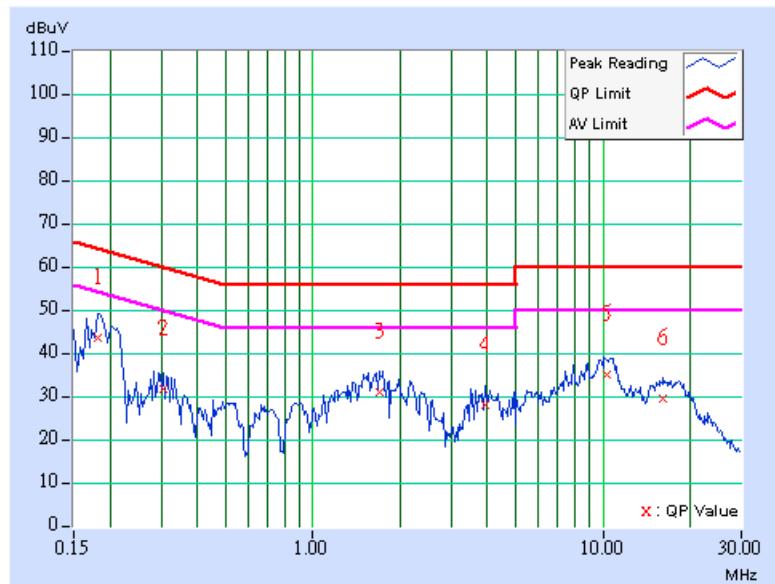


|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 39                        | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 2        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.181          | 0.10                    | 43.18         | -   | 43.28          | -   | 64.43     | 54.43 | -21.15 | -   |
| 2  | 0.236          | 0.10                    | 32.88         | -   | 32.98          | -   | 62.24     | 52.24 | -29.26 | -   |
| 3  | 1.555          | 0.20                    | 31.26         | -   | 31.46          | -   | 56.00     | 46.00 | -24.54 | -   |
| 4  | 3.754          | 0.20                    | 26.56         | -   | 26.76          | -   | 56.00     | 46.00 | -29.24 | -   |
| 5  | 10.738         | 0.41                    | 35.17         | -   | 35.58          | -   | 60.00     | 50.00 | -24.42 | -   |
| 6  | 16.566         | 0.59                    | 28.65         | -   | 29.24          | -   | 60.00     | 50.00 | -30.76 | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

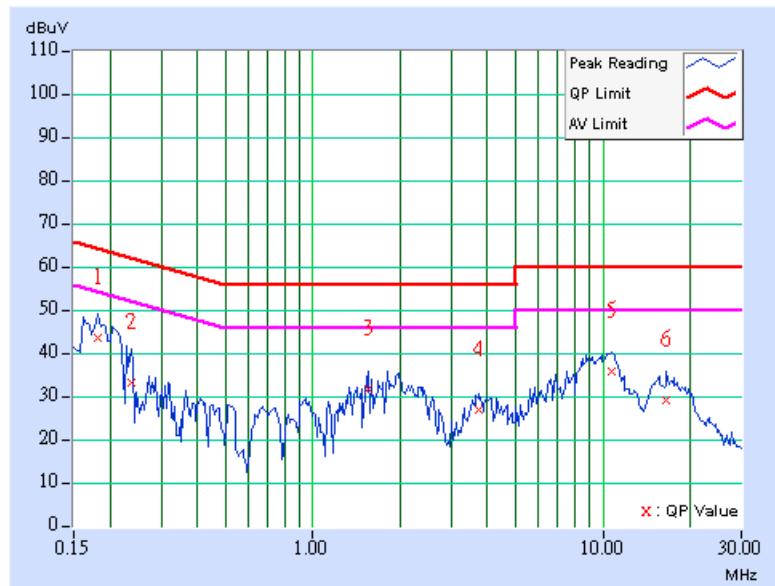


|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 78                        | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 1        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.181          | 0.10                    | 43.00         | -   | 43.10          | -   | 64.43     | 54.43 | -21.33 | -   |
| 2  | 0.209          | 0.10                    | 42.95         | -   | 43.05          | -   | 63.26     | 53.26 | -20.21 | -   |
| 3  | 1.898          | 0.20                    | 29.73         | -   | 29.93          | -   | 56.00     | 46.00 | -26.07 | -   |
| 4  | 4.285          | 0.20                    | 26.51         | -   | 26.71          | -   | 56.00     | 46.00 | -29.29 | -   |
| 5  | 10.262         | 0.31                    | 35.03         | -   | 35.34          | -   | 60.00     | 50.00 | -24.66 | -   |
| 6  | 17.969         | 0.64                    | 28.51         | -   | 29.15          | -   | 60.00     | 50.00 | -30.85 | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

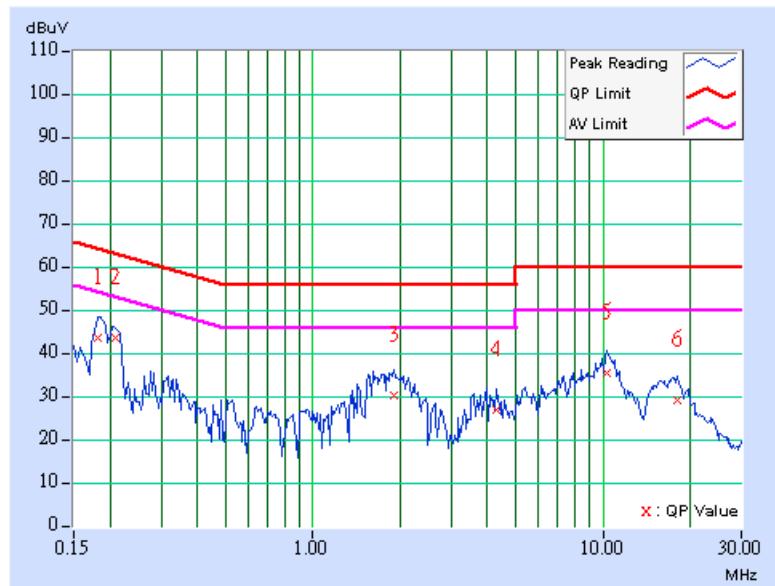


|                                 |                           |                             |               |
|---------------------------------|---------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver | <b>MODEL</b>                | BSR202        |
| <b>CHANNEL</b>                  | 78                        | <b>6dB BANDWIDTH</b>        | 9 kHz         |
| <b>MODULATION TYPE</b>          | GFSK                      | <b>PHASE</b>                | Line 2        |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22deg. C, 62%RH, 991hPa   | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>TESTED BY</b>                | Brad Wu                   |                             |               |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.181          | 0.10                    | 43.14         | -   | 43.24          | -   | 64.43     | 54.43 | -21.19 | -   |
| 2  | 0.209          | 0.10                    | 43.03         | -   | 43.13          | -   | 63.26     | 53.26 | -20.13 | -   |
| 3  | 1.836          | 0.20                    | 31.95         | -   | 32.15          | -   | 56.00     | 46.00 | -23.85 | -   |
| 4  | 3.859          | 0.20                    | 26.15         | -   | 26.35          | -   | 56.00     | 46.00 | -29.65 | -   |
| 5  | 10.531         | 0.41                    | 35.85         | -   | 36.26          | -   | 60.00     | 50.00 | -23.74 | -   |
| 6  | 16.762         | 0.61                    | 28.52         | -   | 29.13          | -   | 60.00     | 50.00 | -30.87 | -   |

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

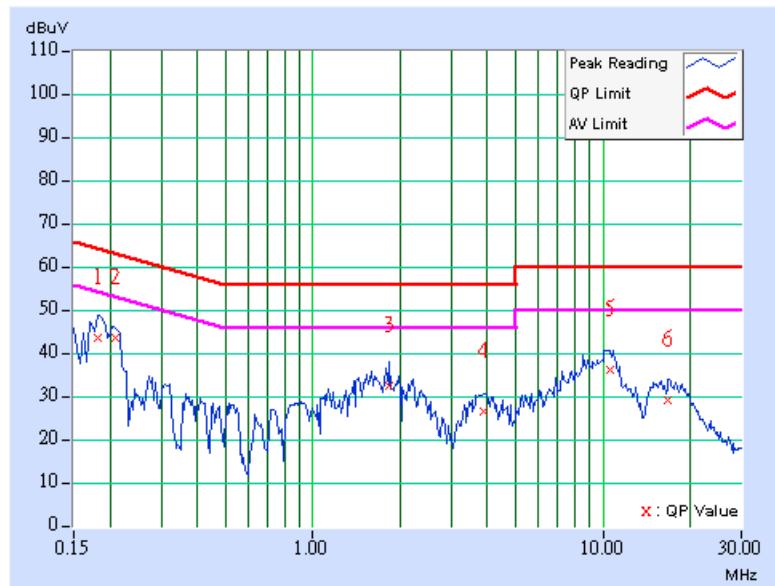

## 4.2 NUMBER OF HOPPING FREQUENCY USED

### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channel frequencies, and should be equally spaced.

### 4.2.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2005    |

**NOTE:**

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.2.4 DEVIATION FROM TEST STANDARD



No deviation

#### 4.2.5 TEST SETUP

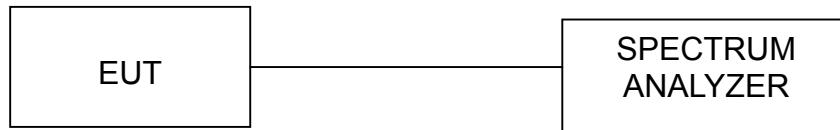

#### 4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

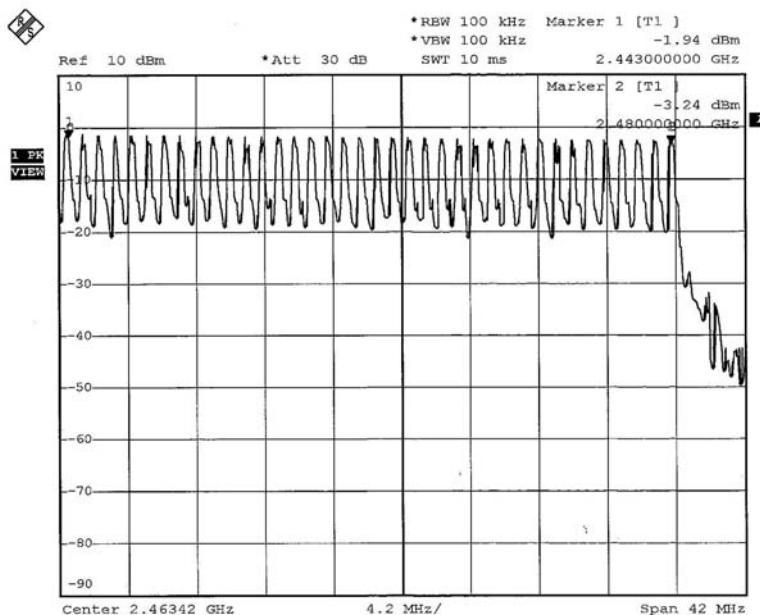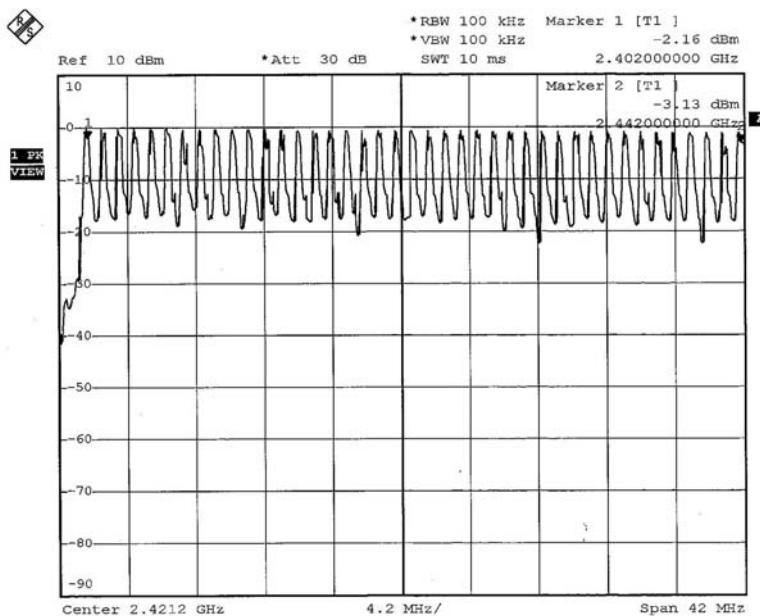

## 4.3 DWELL TIME ON EACH CHANNEL

### 4.3.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2005    |

**NOTE:**

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP





## 4.3.6 TEST RESULTS



| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--|------------------------------------|---------------|--------------|
| DH1  | 50 (times / 5 sec) *6.32=316.00 times            | 0.444                              | 140.30        | 400          |
| DH3  | 22 (times / 5 sec) *6.32=139.04 times            | 1.744                              | 242.49        | 400          |
| DH5  | 17 (times / 5 sec) *6.32=107.44 times            | 3.080                              | 330.92        | 400          |

Test plots of the transmitting time slot are shown on next 3 pages.



DH1

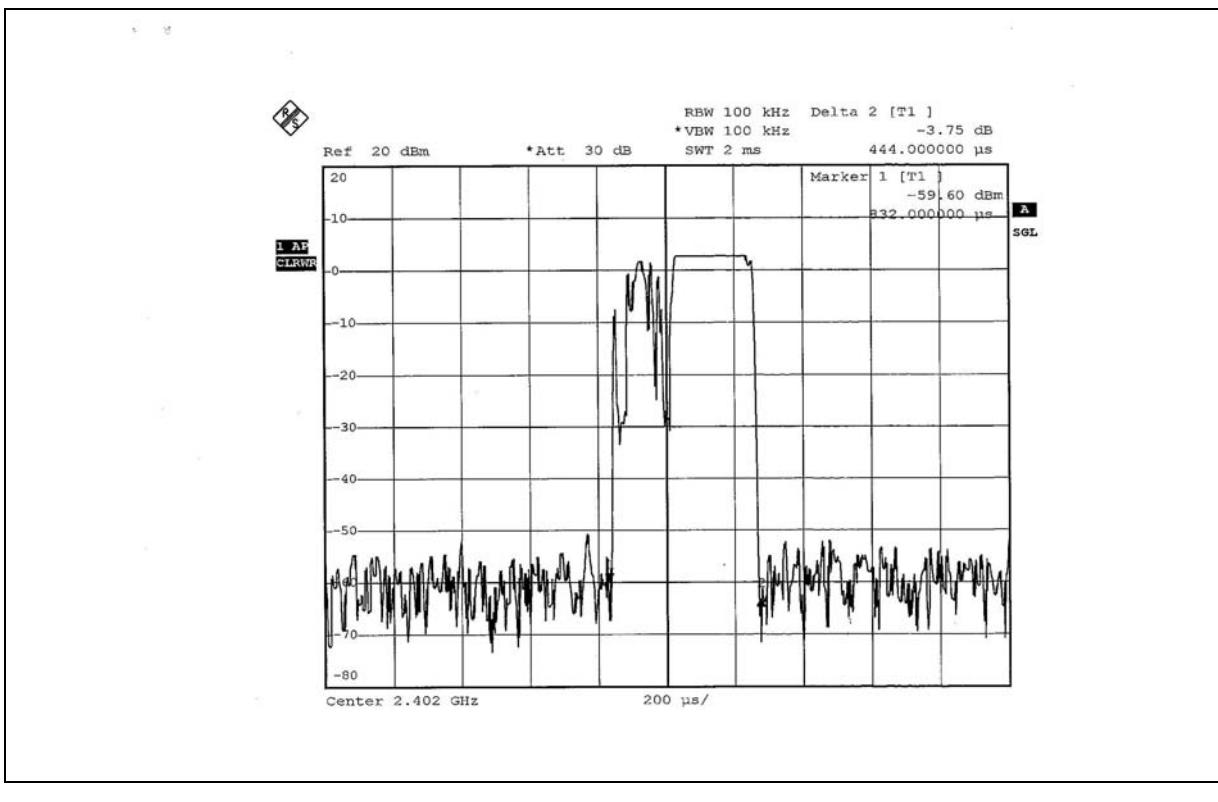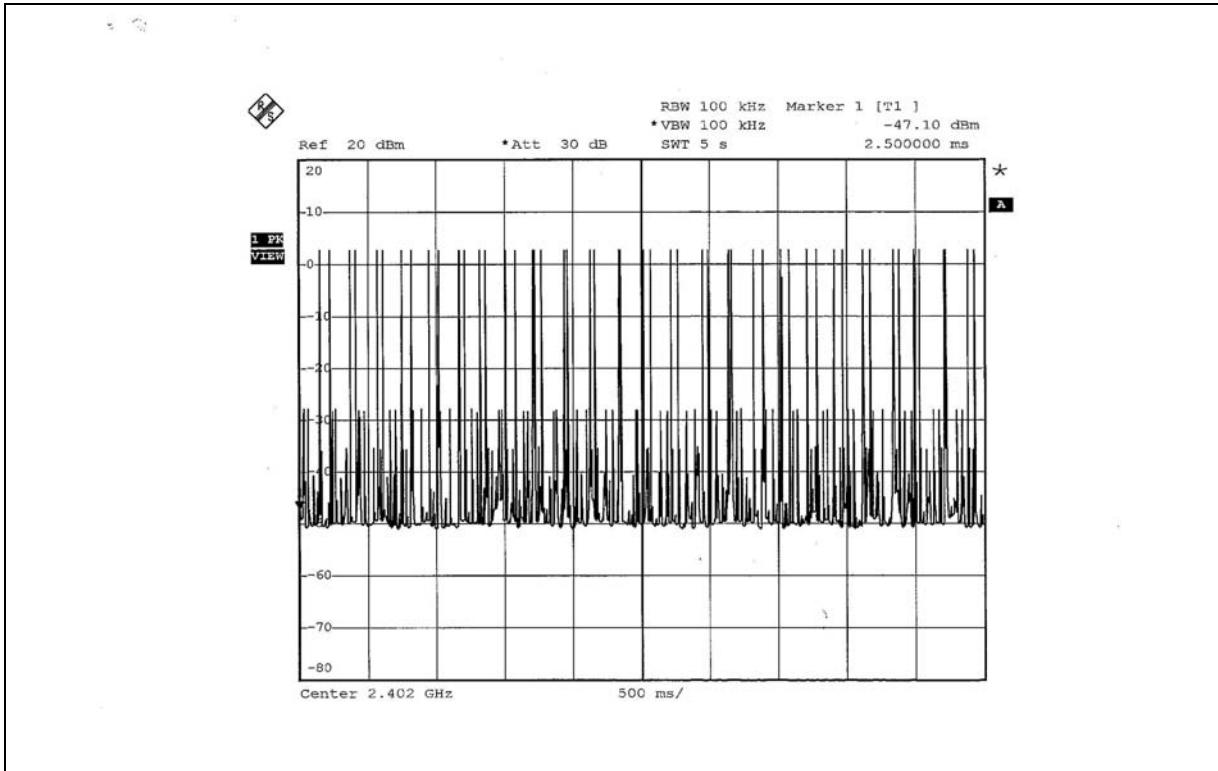

DH3

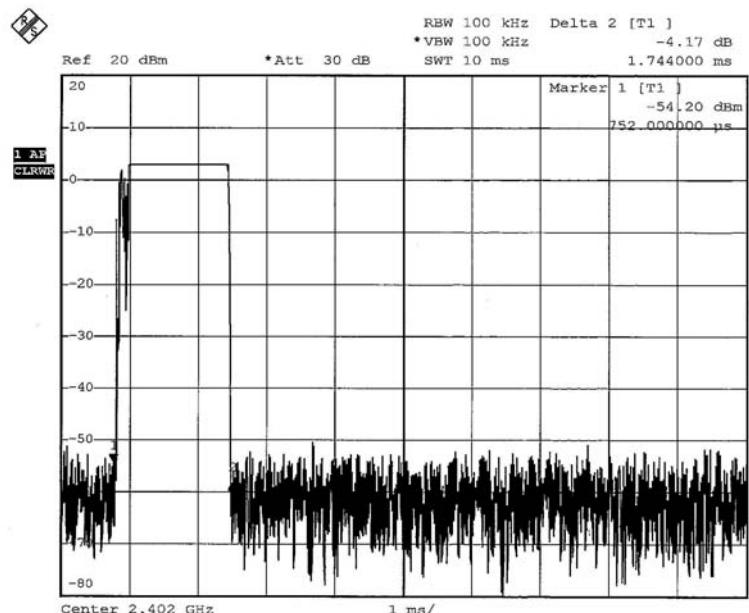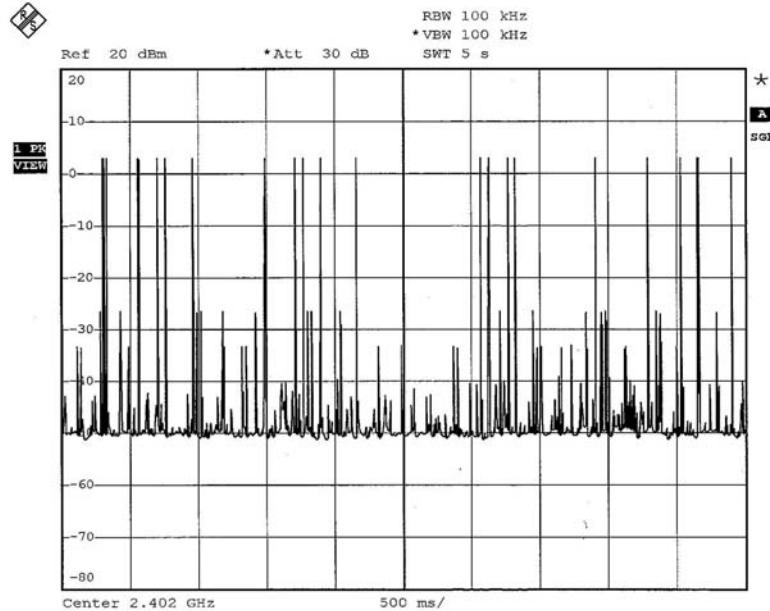

DH5

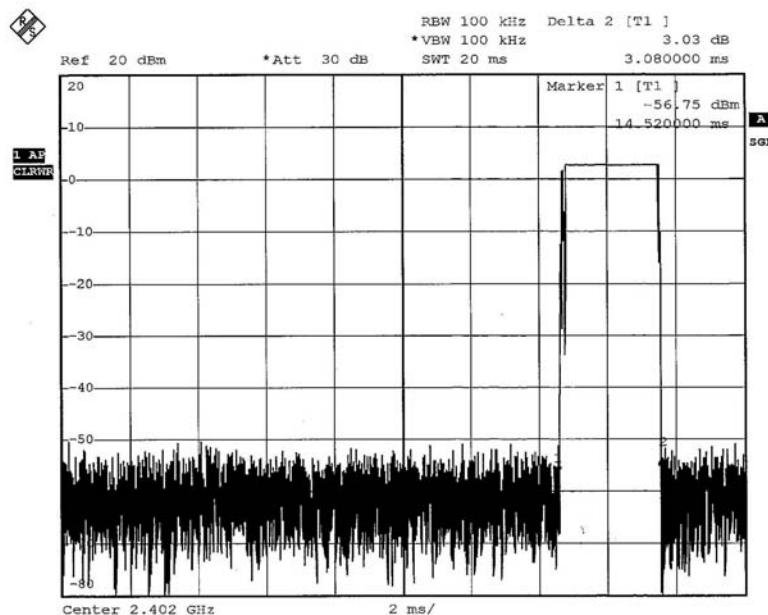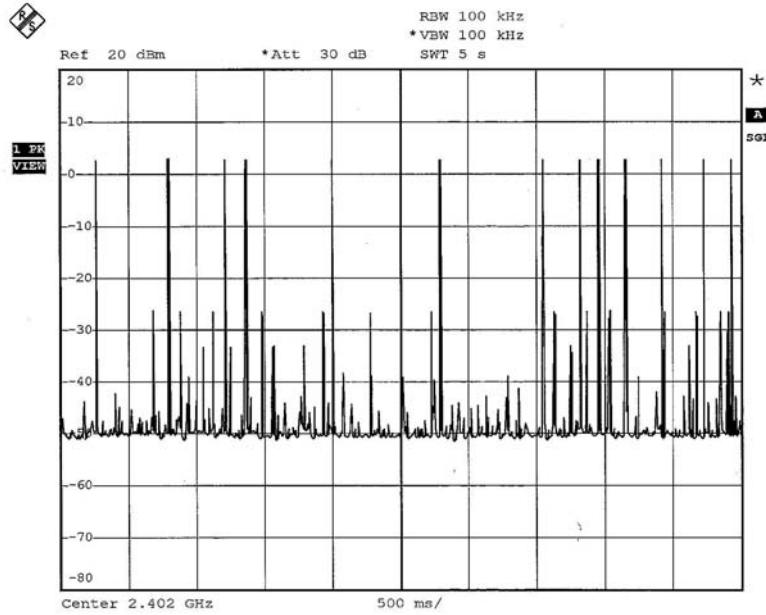

## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, the 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.4.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2005    |

**NOTE:**

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

FCC ID: MQ4BSR202




#### 4.4.7 TEST RESULTS


|                                 |                            |                             |               |
|---------------------------------|----------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver  | <b>MODEL</b>                | BSR202        |
| <b>MODULATION TYPE</b>          | GFSK                       | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 54% RH, 991 hPa | <b>TESTED BY</b>            | Gary Chang    |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>20dB BANDWIDTH (MHz)</b> | <b>More Than 25kHz</b> |
|----------------|--------------------------------|-----------------------------|------------------------|
| 0              | 2402                           | 1.026                       | Yes                    |
| 39             | 2441                           | 1.029                       | Yes                    |
| 78             | 2480                           | 1.029                       | Yes                    |


## Channel 0

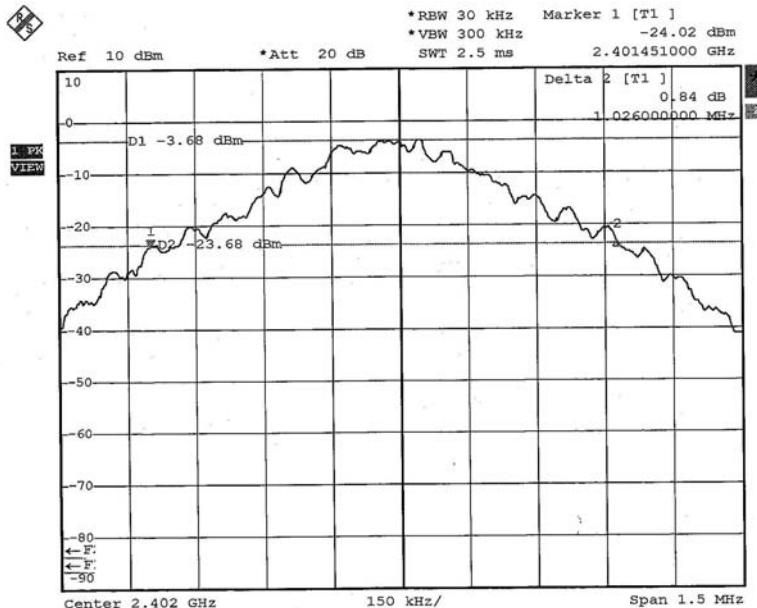

## Channel 39

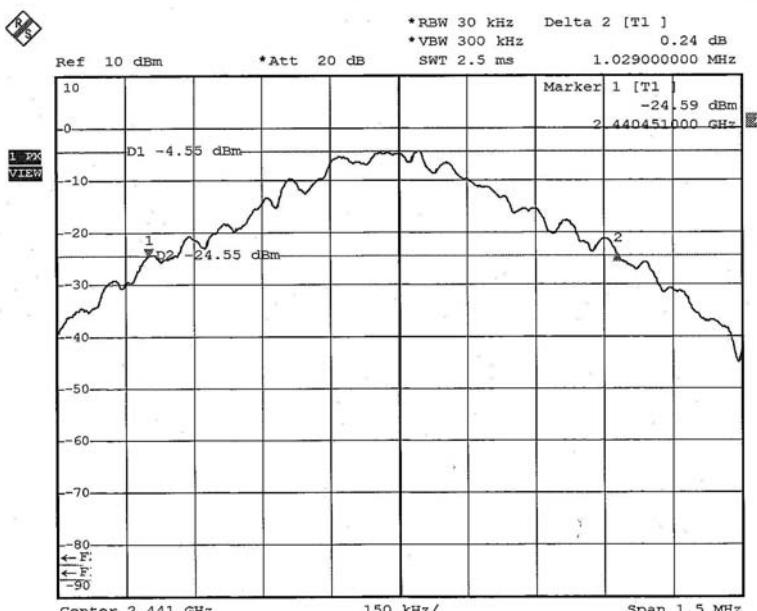

## Channel 78

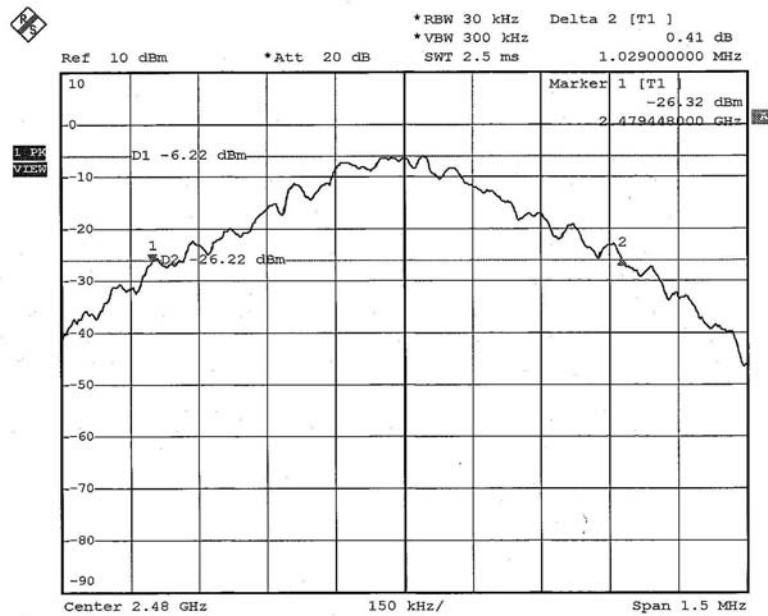

## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-thirds 20dB bandwidth (whichever is greater).

### 4.5.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2005    |

#### NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP




## 4.5.6 TEST RESULTS

|                                 |                            |                             |               |
|---------------------------------|----------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver  | <b>MODEL</b>                | BSR202        |
| <b>MODULATION TYPE</b>          | GFSK                       | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 22 deg. C, 57% RH, 991 hPa | <b>TESTED BY</b>            | Brad Wu       |


| Channel | Frequency (MHz) | Adjacent Channel Separation (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|-----------------------------------|---------------------|-------------|
| 0       | 2402            | 1.010                             | 0.840               | PASS        |
| 39      | 2441            | 1.000                             | 0.860               | PASS        |
| 78      | 2480            | 1.145                             | 0.860               | PASS        |

The minimum limit is 20dB bandwidth. Test results please refer to next 2 pages.


## Channel 0

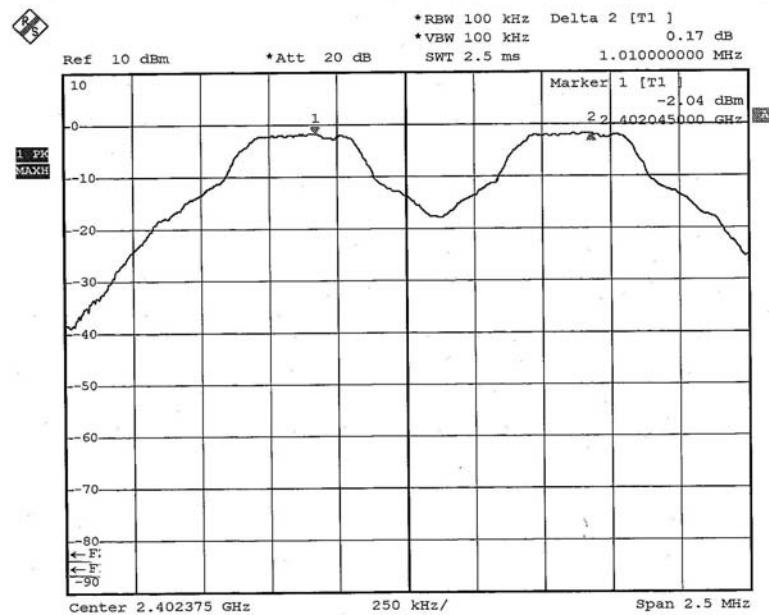

## Channel 39

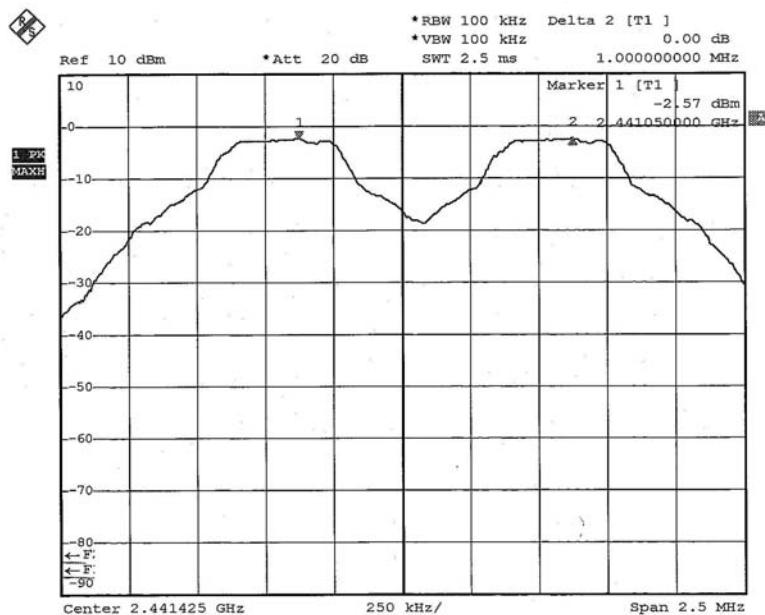

## Channel 78

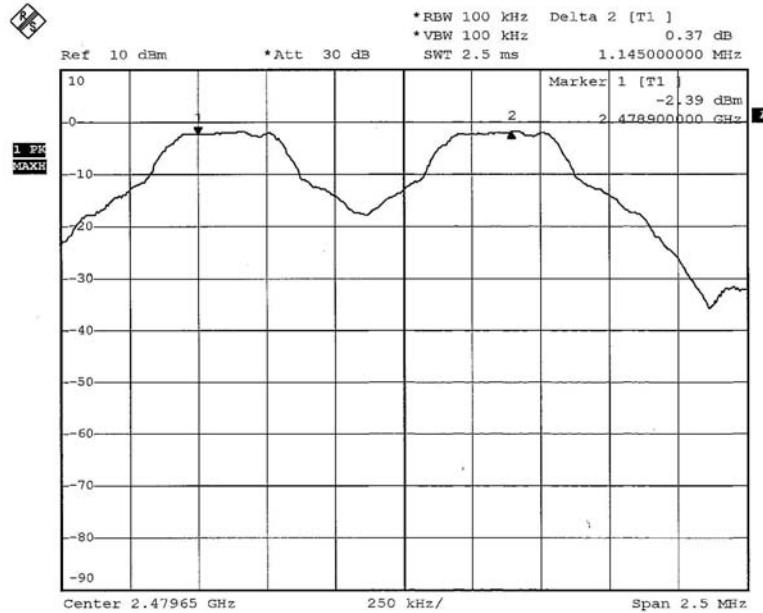

## 4.6 MAXIMUM PEAK OUTPUT POWER

### 4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.6.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYER           | FSEK30    | 100049     | Aug. 12, 2005    |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

## 4.6.7 TEST RESULTS


|                                 |                            |                             |               |
|---------------------------------|----------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver  | <b>MODEL</b>                | BSR202        |
| <b>MODULATION TYPE</b>          | GFSK                       | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 54% RH, 991 hPa | <b>TESTED BY</b>            | Brad Wu       |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-----------|
| 0       | 2402                    | 1.153                  | 0.62                    | 30                     | PASS      |
| 39      | 2441                    | 0.652                  | -1.86                   | 30                     | PASS      |
| 78      | 2480                    | 0.450                  | -3.47                   | 30                     | PASS      |


## Channel 0

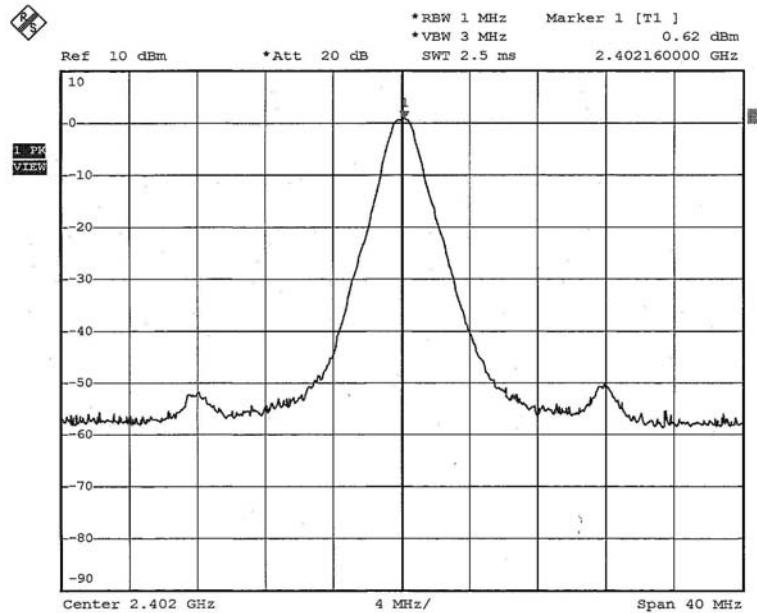

## Channel 39

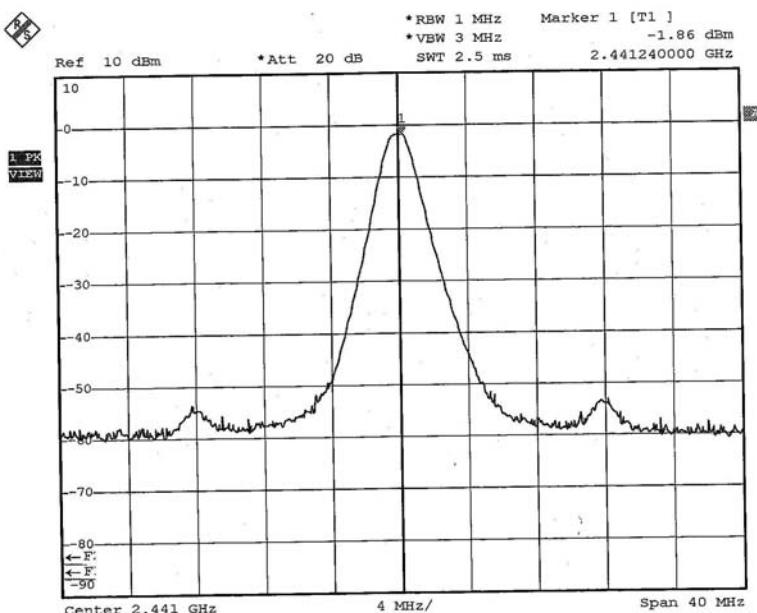

## Channel 78

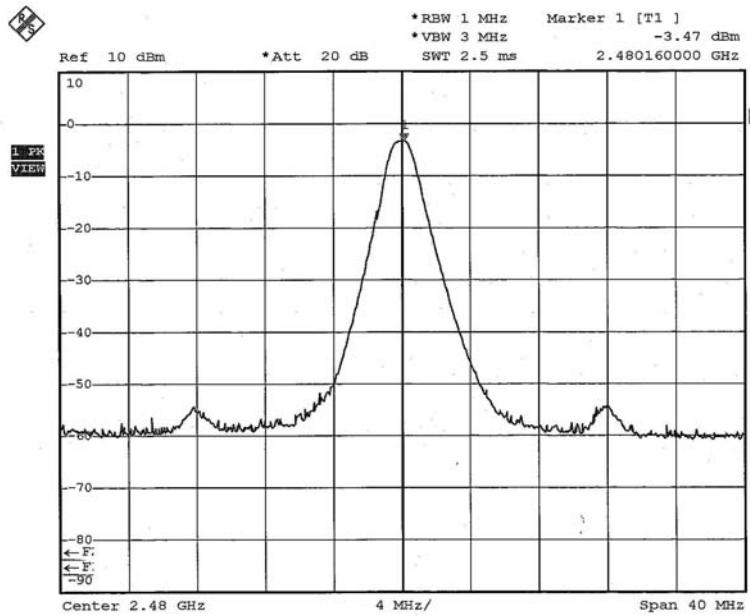

## 4.7 RADIATED EMISSION MEASUREMENT

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER              | MODEL NO.          | SERIAL NO.  | CALIBRATED UNTIL |
|---|--------------------|-------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ        | ESI7               | 100033      | Jun. 08, 2005    |
| Spectrum Analyzer<br>ROHDE & SCHWARZ    | FSP40              | 100040      | Jun. 03, 2005    |
| BILOG Antenna<br>SCHWARZBECK            | VULB9168           | 9168-160    | Jun. 01, 2005    |
| HORN Antenna<br>SCHWARZBECK             | 9120D              | 9120D-408   | Jan. 17, 2006    |
| HORN Antenna<br>SCHWARZBECK             | BBHA 9170          | BBHA9170243 | Jan. 23, 2006    |
| Preamplifier<br>Agilent                 | 8447D              | 2944A10633  | Nov. 09, 2005    |
| Preamplifier<br>Agilent                 | 8449B              | 3008A01964  | Nov. 06, 2005    |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104       | 218183/4    | Jan. 26, 2006    |
| RF signal cable<br>HUBER+SUHNNER        | SUCOFLEX 104       | 218195/4    | Jan. 26, 2006    |
| Software<br>ADT.                        | ADT_Radiated_V5.14 | NA          | NA               |
| Antenna Tower<br>inn-co GmbH            | MA 4000            | 013303      | NA               |
| Antenna Tower Controller<br>inn-co GmbH | CO2000             | 017303      | NA               |
| Turn Table<br>ADT.                      | TT100.             | TT93021703  | NA               |
| Turn Table Controller<br>ADT.           | SC100.             | SC93021703  | NA               |

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The VCCI Site Registration No. is R-237.
5. The IC Site Registration No. is IC4924-3.

#### 4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.

#### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.7.5 TEST SETUP

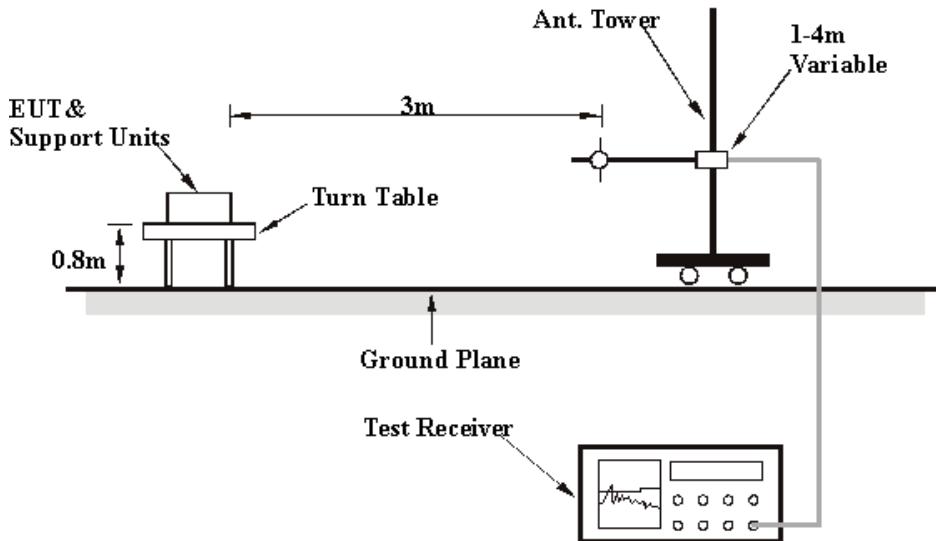

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITIONS

For battery mode:

- The EUT sent audio messages to the earphones.

For USB charging mode:

- Connected the EUT to the notebook and powered by USB interface.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook sent "H" messages to its screen.
- The notebook sent "H" messages to the printer and the printer printed them out.
- The notebook sent "H" messages to the modem.
- The EUT sent audio messages to the earphones.
- Steps c ~ f were repeated.

#### 4.7.7 TEST RESULTS

##### Below 1GHz Worst-Case Data (Battery mode)

|                                 |                            |                             |                |
|---------------------------------|----------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver  | <b>MODEL</b>                | BSR202         |
| <b>CHANNEL</b>                  | 78                         | <b>FREQUENCY RANGE</b>      | Below 1 GHz    |
| <b>MODULATION TYPE</b>          | GFSK                       | <b>DETECTOR FUNCTION</b>    | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 69% RH, 991 hPa | <b>INPUT POWER (SYSTEM)</b> | 120 Vac, 60 Hz |
| <b>TEST MODE</b>                | A                          | <b>TESTED BY</b>            | Morgan Chen    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.   | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | 101.92      | 18.63 QP                | 43.50          | -24.87      | 1.50 H             | 25                   | 7.13             | 11.49                    |
| 2   | 226.33      | 28.07 QP                | 46.00          | -17.93      | 1.25 H             | 94                   | 15.40            | 12.68                    |
| 3   | 255.49      | 22.00 QP                | 46.00          | -24.00      | 1.25 H             | 115                  | 8.30             | 13.71                    |
| 4   | 290.48      | 26.99 QP                | 46.00          | -19.01      | 1.00 H             | 100                  | 12.14            | 14.86                    |
| 5   | 319.64      | 23.21 QP                | 46.00          | -22.79      | 1.00 H             | 91                   | 7.74             | 15.47                    |
| 6   | 515.97      | 24.63 QP                | 46.00          | -21.37      | 1.50 H             | 97                   | 5.03             | 19.60                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.   | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1   | 150.52      | 15.49 QP                | 43.50          | -28.01      | 1.50 V             | 334                  | 0.49             | 15.00                    |
| 2   | 222.44      | 19.61 QP                | 46.00          | -26.39      | 1.25 V             | 58                   | 7.17             | 12.44                    |
| 3   | 298.26      | 19.00 QP                | 46.00          | -27.00      | 1.00 V             | 61                   | 4.00             | 15.00                    |
| 4   | 514.03      | 20.57 QP                | 46.00          | -25.43      | 1.50 V             | 49                   | 1.01             | 19.56                    |
| 5   | 739.52      | 23.69 QP                | 46.00          | -22.31      | 1.25 V             | 328                  | -0.32            | 24.00                    |
| 6   | 774.51      | 24.66 QP                | 46.00          | -21.34      | 1.00 V             | 337                  | 0.24             | 24.43                    |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

**Below 1GHz Worst-Case Data (USB charging mode)**

|                                 |                            |                             |                |
|---------------------------------|----------------------------|-----------------------------|----------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver  | <b>MODEL</b>                | BSR202         |
| <b>CHANNEL</b>                  | 78                         | <b>FREQUENCY RANGE</b>      | Below 1 GHz    |
| <b>MODULATION TYPE</b>          | GFSK                       | <b>DETECTOR FUNCTION</b>    | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 69% RH, 991 hPa | <b>INPUT POWER (SYSTEM)</b> | 120 Vac, 60 Hz |
| <b>TEST MODE</b>                | B                          | <b>TESTED BY</b>            | Morgan Chen    |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 115.53      | 29.02 QP                | 43.50          | -14.48      | 1.25 H             | 61                   | 16.12            | 12.91                    |
| 2   | 177.74      | 27.97 QP                | 43.50          | -15.53      | 1.00 H             | 85                   | 14.40            | 13.57                    |
| 3   | 210.78      | 25.60 QP                | 43.50          | -17.90      | 1.25 H             | 31                   | 13.50            | 12.09                    |
| 4   | 576.23      | 29.72 QP                | 46.00          | -16.28      | 1.25 H             | 94                   | 8.69             | 21.03                    |
| 5   | 731.74      | 34.03 QP                | 46.00          | -11.97      | 1.00 H             | 259                  | 10.23            | 23.79                    |
| 6   | 865.87      | 27.80 QP                | 46.00          | -18.20      | 1.00 H             | 358                  | 2.51             | 25.29                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz)   | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB)  | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|---------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 113.59        | 23.16 QP                | 43.50          | -20.34       | 1.00 V             | 166                  | 10.45            | 12.70                    |
| 2   | 566.51        | 28.14 QP                | 46.00          | -17.86       | 1.00 V             | 124                  | 7.38             | 20.76                    |
| 3   | 599.56        | 26.98 QP                | 46.00          | -19.02       | 1.00 V             | 97                   | 5.30             | 21.68                    |
| 4   | 731.74        | 28.94 QP                | 46.00          | -17.06       | 1.00 V             | 142                  | 5.14             | 23.79                    |
| 5   | 865.87        | 31.08 QP                | 46.00          | -14.92       | 1.00 V             | 265                  | 5.79             | 25.29                    |
| 6   | <b>951.40</b> | <b>40.83 QP</b>         | <b>46.00</b>   | <b>-5.17</b> | <b>1.25 V</b>      | <b>10</b>            | <b>14.34</b>     | <b>26.49</b>             |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

**1 ~ 25GHz Worst-Case Data**

|                                 |                               |                             |                          |
|---------------------------------|-------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver     | <b>MODEL</b>                | BSR202                   |
| <b>CHANNEL</b>                  | 0                             | <b>FREQUENCY RANGE</b>      | 1 ~ 25 GHz               |
| <b>MODULATION TYPE</b>          | GFSK                          | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 69% RH,<br>991 hPa | <b>INPUT POWER (SYSTEM)</b> | 120 Vac, 60 Hz           |
| <b>TESTED BY</b>                | Morgan Chen                   |                             |                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.  | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1  | 1201.00        | 38.25 PK                      | 74.00             | -35.75         | 1.00 H                   | 325                        | 10.68                  | 27.57                          |
| 2  | 2390.00        | 40.88 PK                      | 74.00             | -33.12         | 1.22 H                   | 5                          | 9.56                   | 31.32                          |
| 3  | *2402.00       | 89.88 PK                      | -                 | -              | 1.22 H                   | 5                          | 58.51                  | 31.37                          |
| 3  | *2402.00       | 59.88 AV                      | -                 | -              | 1.22 H                   | 5                          | 28.51                  | 31.37                          |
| 4  | 4804.00        | 45.78 PK                      | 74.00             | -28.22         | 1.00 H                   | 256                        | 9.03                   | 36.75                          |
| 5  | 7206.00        | 51.58 PK                      | 74.00             | -22.42         | 1.45 H                   | 360                        | 9.06                   | 42.52                          |
| 5  | 7206.00        | 21.58 AV                      | 54.00             | -32.42         | 1.45 H                   | 360                        | -20.94                 | 42.52                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.  | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1  | 1201.00        | 37.99 PK                      | 74.00             | -36.01         | 1.00 V                   | 36                         | 10.42                  | 27.57                          |
| 2  | 2390.00        | 37.53 PK                      | 74.00             | -36.47         | 1.24 V                   | 324                        | 6.21                   | 31.32                          |
| 3  | *2402.00       | 93.53 PK                      | -                 | -              | 1.23 V                   | 4                          | 62.16                  | 31.37                          |
| 3  | *2402.00       | 63.53 AV                      | -                 | -              | 1.23 V                   | 4                          | 32.16                  | 31.37                          |
| 4  | 4804.00        | 44.95 PK                      | 74.00             | -29.05         | 1.35 V                   | 355                        | 8.20                   | 36.75                          |
| 5  | 7206.00        | 50.98 PK                      | 74.00             | -23.02         | 1.42 V                   | 296                        | 8.46                   | 42.52                          |
| 5  | 7206.00        | 20.98 AV                      | 54.00             | -33.02         | 1.42 V                   | 296                        | -21.54                 | 42.52                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on  $0.625*5$  per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
7. Average value = peak reading  $-20\log(\text{duty cycle})$

|                                 |  |                               |                             |                          |
|---------------------------------|--|-------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      |  | Bluetooth Stereo Receiver     | <b>MODEL</b>                | BSR202                   |
| <b>CHANNEL</b>                  |  | 39                            | <b>FREQUENCY RANGE</b>      | 1 ~ 25 GHz               |
| <b>MODULATION TYPE</b>          |  | GFSK                          | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> |  | 23 deg. C, 69% RH,<br>991 hPa | <b>INPUT POWER (SYSTEM)</b> | 120 Vac, 60 Hz           |
| <b>TESTED BY</b>                |  | Morgan Chen                   |                             |                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.  | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1  | 1220.00        | 38.07 PK                      | 74.00             | -35.93         | 1.00 H                   | 340                        | 10.46                  | 27.62                          |
| 2  | *2441.00       | 97.34 PK                      | -                 | -              | 1.00 H                   | 3                          | 65.80                  | 31.54                          |
| 2  | *2441.00       | 67.34 AV                      | -                 | -              | 1.00 H                   | 3                          | 35.80                  | 31.54                          |
| 3  | 4882.00        | 46.54 PK                      | 74.00             | -27.46         | 1.22 H                   | 0                          | 9.57                   | 36.98                          |
| 4  | 7323.00        | 52.58 PK                      | 74.00             | -21.42         | 1.21 H                   | 290                        | 9.76                   | 42.83                          |
| 4  | 7323.00        | 22.58 AV                      | 54.00             | -31.42         | 1.21 H                   | 290                        | -20.25                 | 42.83                          |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |                |                               |                   |                |                          |                            |                        |                                |
|--|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.  | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1  | 1220.00        | 38.01 PK                      | 74.00             | -35.99         | 1.00 V                   | 25                         | 10.39                  | 27.62                          |
| 2  | *2441.00       | 92.87 PK                      | -                 | -              | 1.32 V                   | 136                        | 61.33                  | 31.54                          |
| 2  | *2441.00       | 62.87 AV                      | -                 | -              | 1.32 V                   | 136                        | 31.33                  | 31.54                          |
| 3  | 4882.00        | 45.12 PK                      | 74.00             | -28.88         | 1.45 V                   | 325                        | 8.14                   | 36.98                          |
| 4  | 7323.00        | 51.34 PK                      | 74.00             | -22.66         | 1.59 V                   | 360                        | 8.51                   | 42.83                          |
| 4  | 7323.00        | 21.34 AV                      | 54.00             | -32.66         | 1.59 V                   | 360                        | -21.49                 | 42.83                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625\*5 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
7. Average value = peak reading – $20\log(\text{duty cycle})$

|                                 |                               |                             |                          |
|---------------------------------|-------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Bluetooth Stereo Receiver     | <b>MODEL</b>                | BSR202                   |
| <b>CHANNEL</b>                  | 78                            | <b>FREQUENCY RANGE</b>      | 1 ~ 25 GHz               |
| <b>MODULATION TYPE</b>          | GFSK                          | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 23 deg. C, 69% RH,<br>991 hPa | <b>INPUT POWER (SYSTEM)</b> | 120 Vac, 60 Hz           |
| <b>TESTED BY</b>                | Morgan Chen                   |                             |                          |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.   | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1   | 1240.00        | 37.03 PK                      | 74.00             | -36.97         | 1.30 H                   | 358                        | 9.36                   | 27.67                          |
| 2   | 2480.00        | 96.39 PK                      | 74.00             | 22.39          | 1.15 H                   | 5                          | 64.69                  | 31.70                          |
| 2   | *2480.00       | 66.39 AV                      | -                 | -              | 1.15 H                   | 5                          | 34.69                  | 31.70                          |
| 3   | *2483.50       | 41.39 PK                      | -                 | -              | 1.15 H                   | 5                          | 9.67                   | 31.72                          |
| 4   | 4960.00        | 45.25 PK                      | 74.00             | -28.75         | 1.05 H                   | 324                        | 8.03                   | 37.22                          |
| 5   | 7440.00        | 51.12 PK                      | 74.00             | -22.88         | 1.14 H                   | 341                        | 8.03                   | 43.09                          |
| 5   | 7440.00        | 21.12 AV                      | 54.00             | -32.88         | 1.14 H                   | 341                        | -21.97                 | 43.09                          |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| No.   | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
| 1   | 1240.00        | 35.85 PK                      | 74.00             | -38.15         | 1.02 V                   | 356                        | 8.18                   | 27.67                          |
| 2   | *2480.00       | 91.89 PK                      | -                 | -              | 1.32 V                   | 6                          | 60.19                  | 31.70                          |
| 2   | *2480.00       | 61.89 AV                      | -                 | -              | 1.32 V                   | 6                          | 30.19                  | 31.70                          |
| 3   | 2483.50        | 38.89 PK                      | 74.00             | -35.11         | 1.32 V                   | 6                          | 7.17                   | 31.72                          |
| 4   | 4960.00        | 44.12 PK                      | 74.00             | -29.88         | 1.12 V                   | 347                        | 6.90                   | 37.22                          |
| 5   | 7440.00        | 49.25 PK                      | 74.00             | -24.75         | 1.08 V                   | 325                        | 6.16                   | 43.09                          |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625\*5 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
7. Average value = peak reading – $20\log(\text{duty cycle})$

## 4.8 BAND EDGES MEASUREMENT

### 4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.8.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2005    |

**NOTE:**

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

##### **NOTE 1:**



The band edge emission plot on page 55 shows 47.82dBc between carrier maximum power and local maximum emission in restrict band (2.3996GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.7.7 is 93.53dBuV/m (Peak), so the maximum field strength in restrict band is  $93.53 - 47.82 = 45.71$  dBuV/m which is under 74 dBuV/m limit.



The band edge emission plot on page 55 shows 47.82dBc between carrier maximum power and local maximum emission in restrict band (2.3996GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.7.7 is 63.53dBuV/m (Average), so the maximum field strength in restrict band is  $63.53 - 47.82 = 15.71$  dBuV/m which is under 54 dBuV/m limit.

##### **NOTE 2:**

The band edge emission plot on page 56 shows 53.77dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.7 is 96.39dBuV/m (Peak), so the maximum field strength in restrict band is  $96.39 - 53.77 = 42.62$  dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot on page 56 shows 53.77dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.7 is 66.39dBuV/m (Average), so the maximum field strength in restrict band is  $66.39 - 53.77 = 12.62$  dBuV/m which is under 54 dBuV/m limit.

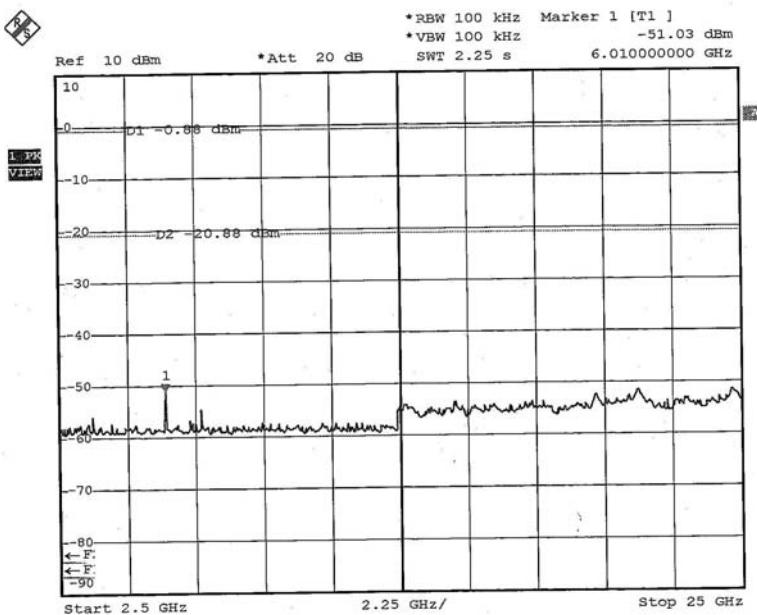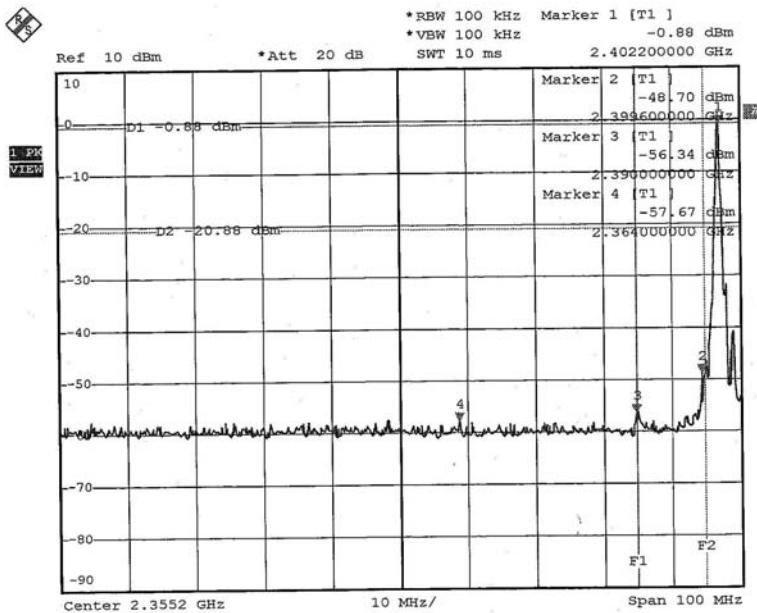

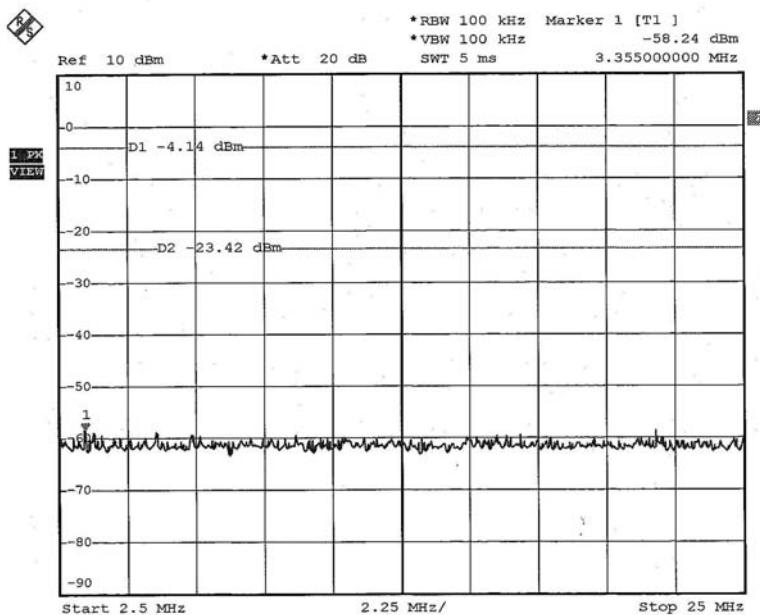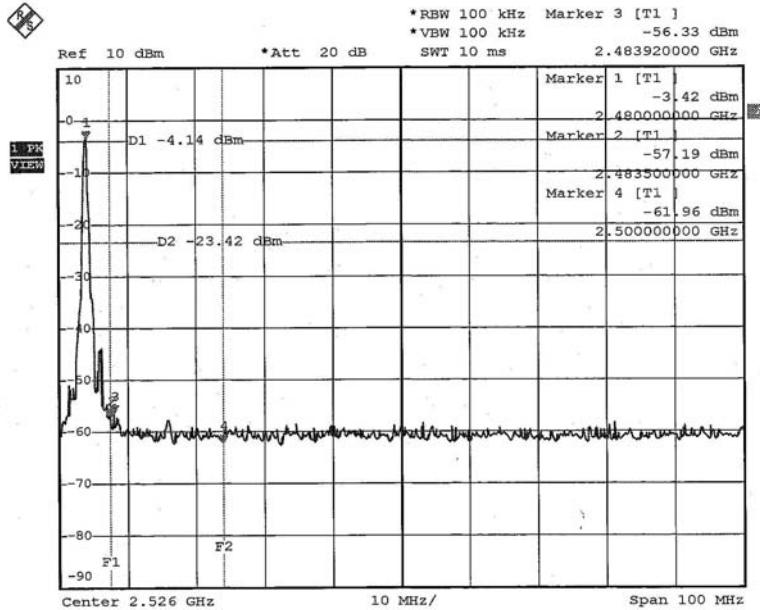

## 4.9 ANTENNA REQUIREMENT

### 4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 4.9.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is PIFA antenna without antenna connector. The maximum gain of this antenna is 1.93dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION



Conducted Emission Test

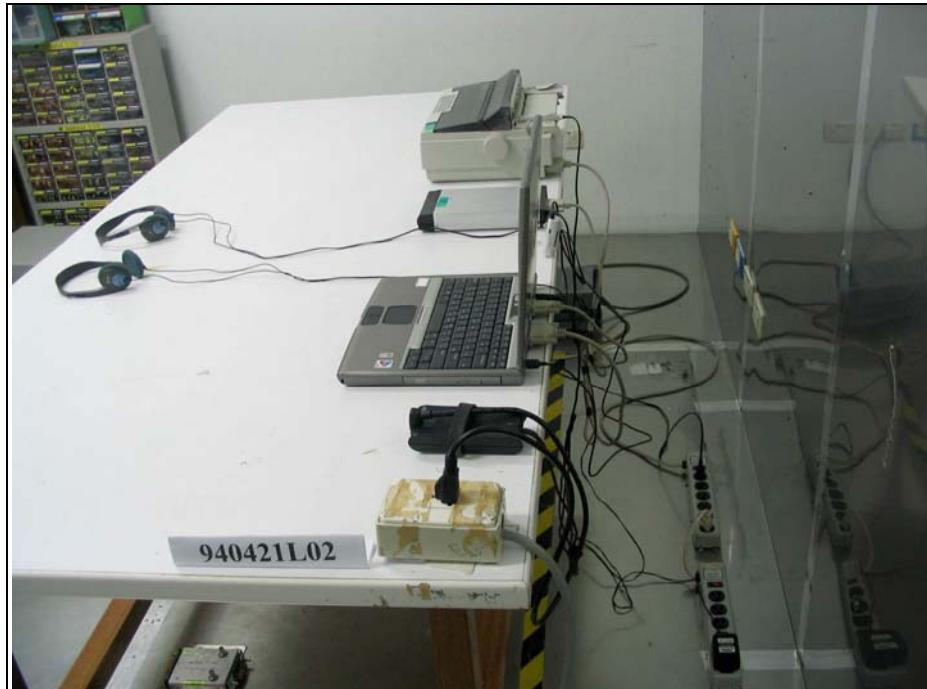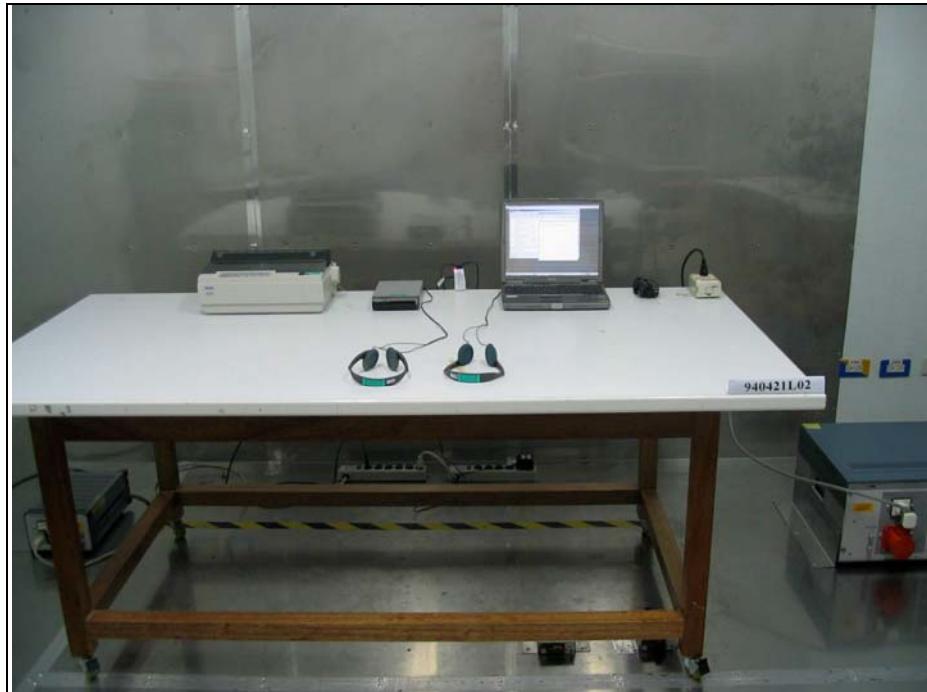

Radiated Emission Test  
(For test mode A)

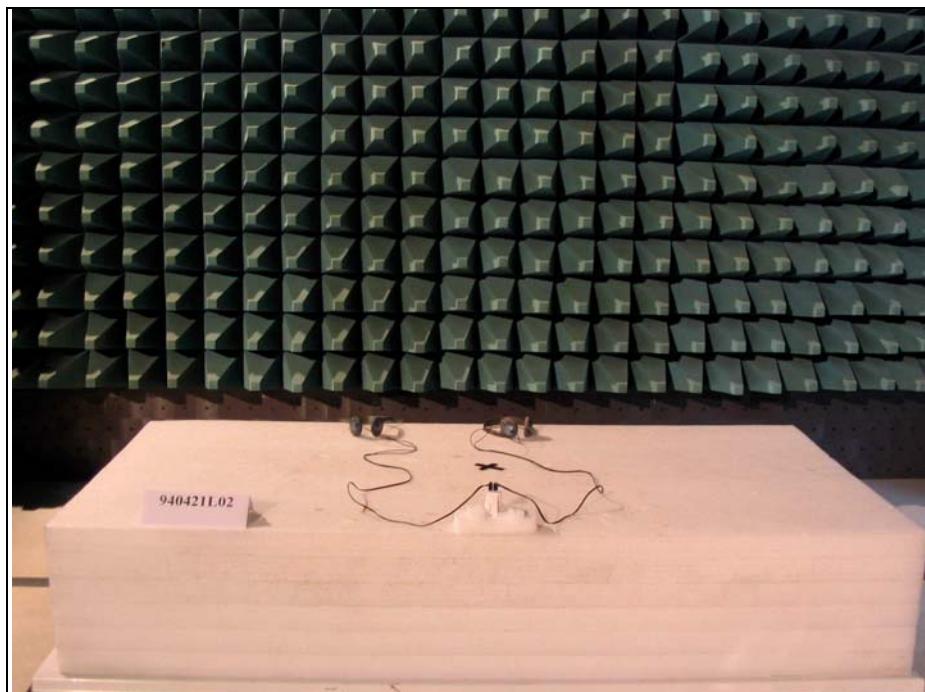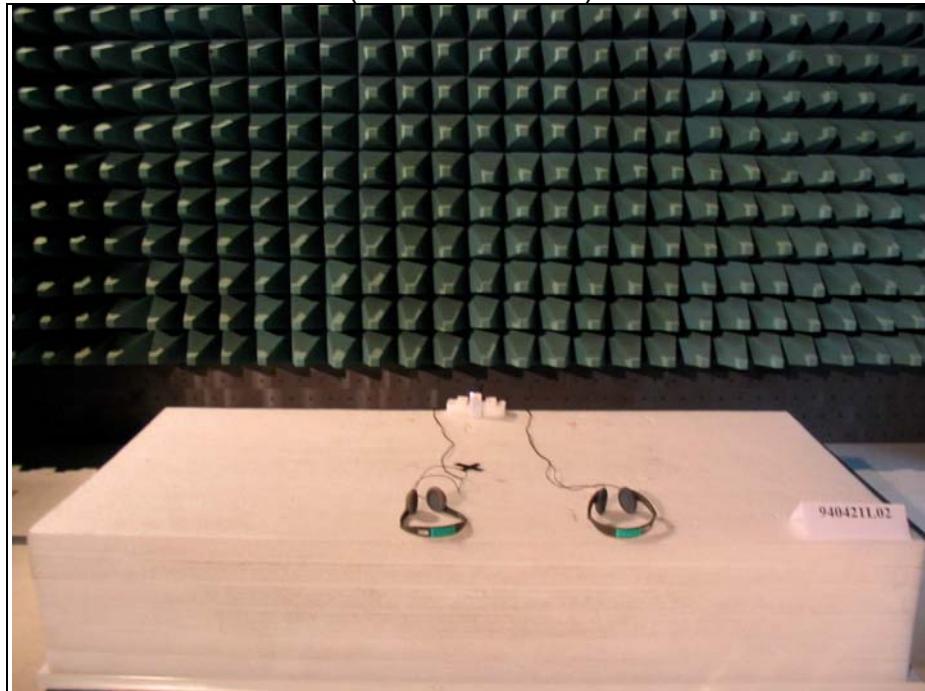

Radiated Emission Test  
(For test mode B)

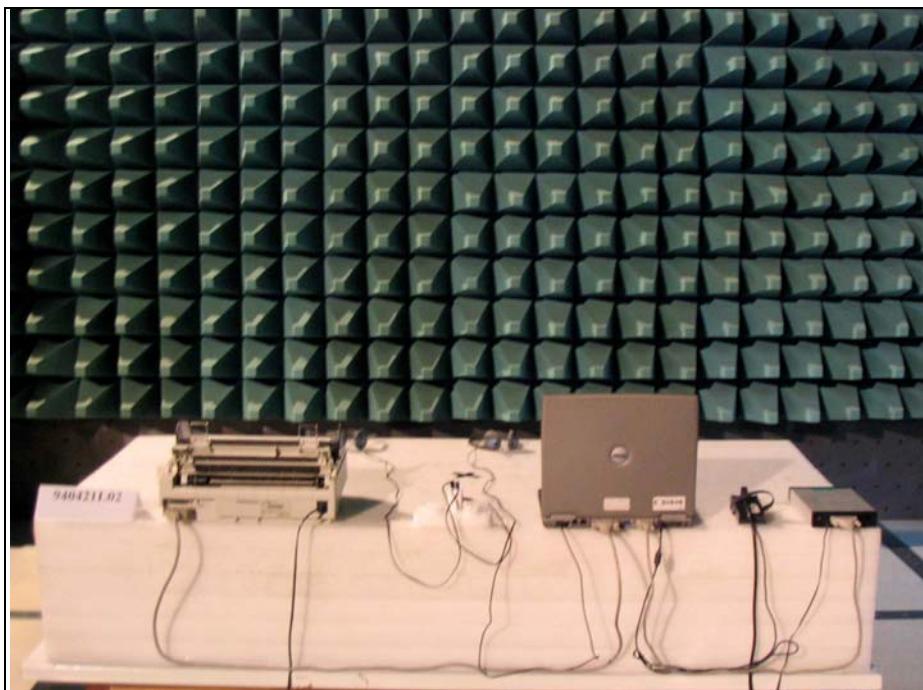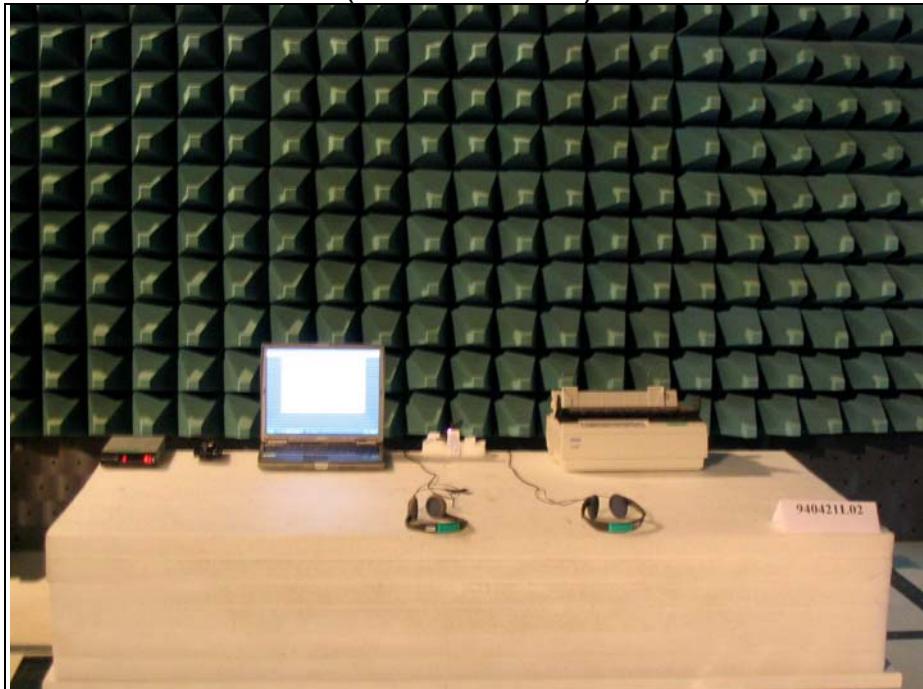

## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

|                    |                       |
|--------------------|-----------------------|
| <b>USA</b>         | FCC, NVLAP, UL, A2LA  |
| <b>Germany</b>     | TUV Rheinland         |
| <b>Japan</b>       | VCCI                  |
| <b>Norway</b>      | NEMKO                 |
| <b>Canada</b>      | INDUSTRY CANADA , CSA |
| <b>R.O.C.</b>      | CNLA, BSMI, DGT       |
| <b>Netherlands</b> | Telefication          |
| <b>Singapore</b>   | PSB , GOST-ASIA(MOU)  |
| <b>Russia</b>      | CERTIS(MOU)           |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26052943

### **Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343  
Fax: 886-3-5935342

### **Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232  
Fax: 886-3-3185050

### **Linko RF Lab**

Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.