



Test Report

For

Applicant : AboCom Systems, Inc.

Equipment Type : CompactFlash Size 10/100 Fast Ethernet LAN Card

Model : CFE100

FCC ID : MQ4CFE100

Report No. : 99CH010FI

Test Report Certification


QuieTek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859
E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : AboCom Systems, Inc.
Address : 1F, No.21, R&D Road II, Science-Based Industrial Park,
Hsin-Chu , Taiwan, R.O.C.
Equipment Type : CompactFlash Size 10/100 Fast Ethernet LAN Card
Model : CFE100
FCC ID. : MQ4CFE100
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : DC 3.3V/ 5V
Classification : Class B
Test Result : Complied
Test Date : December 6, 1999
Report No. : 99CH010FI



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Erin Lan	Test Engineer: Sean Chang	Approved: Gene Chang
-------------------------	---------------------------	----------------------



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Tested System Details.....	5
1.3 EUT Configuration.....	7
1.4 EUT Exercise Software	8
1.5 Test performed.....	8
1.6 Test Facility	9
2. CONDUCTED EMISSION	10
2.1 Test Equipment List.....	10
2.2 Test Setup	10
2.3 Limits	10
2.4 Test Procedure	11
2.5 Test Results	11
3. RADIATED EMISSION.....	12
3.1 Test Equipment.....	12
3.2 Test Setup	12
3.3 Limits	13
3.4 Test Procedure	13
3.5 Test Results	13
4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	14
5. ATTACHMENT	15

ATTACHMENT 1: SUMMARY OF TEST RESULTS

ATTACHMENT 2: EUT TEST PHOTOGRAPHS

ATTACHMENT 3: EUT DETAILED PHOTOGRAPHS



1. General Information

1.1 EUT Description

Applicant : AboCom Systems, Inc.

Address : 1F, No.21, R&D Road II, Science-Based Industrial Park, Hsin-Chu , Taiwan, R.O.C.

Equipment Type : CompactFlash Size 10/100 Fast Ethernet LAN Card

Model : CFE100

FCC ID : MQ4CFE100

Operation Voltage : DC 3.3V/ 5V

Remark : 1. The EUT is a **CompactFlash Size 10/100 Fast Ethernet LAN Card**.
2. Both transmission speed were tested individually.
3. QuieTek had verified both construction and function in typical operation, then shown in this test report.

1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Notebook PC

Model Number : ARMADA M300
Serial Number : 1J99CYB5A98K
Manufacturer : COMPAQ
Floppy Disk Driver : COMPAQ COMPUTER, M/N:PP2056, S/N:NA

CompactFlash Size 10/100 Fast Ethernet LAN Card (EUT)

Model Number : CFE100
Serial Number : N/A
FCC ID : DoC
Manufacturer : AboCom
Power Adapter : COMPAQ COMPUTER, M/N:ADP-50UB
S/N:W5T993056255
Cable In: Shielded, 1.8m
Cable Out: Non-shielded, 1.8m, a ferrite core bonded.

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8D003312
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.6m
Power Cord : Shielded, 1.8m

1.2.3 Modem

Model Number : 1414
Serial Number : 980033041
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, M/N: SCP41-91000A
Cable Output : Shielded, 1.5m

1.2.4 Video Camera

Model Number : Wcam 3X
Serial Number : N/A
FCC ID : DoC
Manufacturer : Mustek
Data Cable (USB) : Shielded, 1.5m

1.2.5 Telephone Cable(For connecting between EUT and Modem): Non-shielded, 2.0m**1.2.6 Lan Cable** : Non-shielded, 15m**Partner PC System****1.2.7 Host Personal Computer**

Model Number : VE 5/200 SERIES 4
Serial Number : SG80700316
FCC ID : DoC
Manufacturer : HP
Power Cord : Non-shielded, 1.8m

1.2.8 Monitor

Model Number : G585
Serial Number : FK8B39883
FCC ID : DoC
Manufacturer : GENUINE
Data Cable : Shielded, 1.5m
Power Cord : Non-shielded, 1.8m


1.2.9 Keyboard

Model Number : 6311-TW2C
Serial Number : N/A
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m

1.2.10 Mouse

Model Number : M-S34
Serial Number : LZB75078478
FCC ID : DZL211029
Manufacturer : HP
Data Cable : Shielded, 1.8m

1.3 EUT Configuration

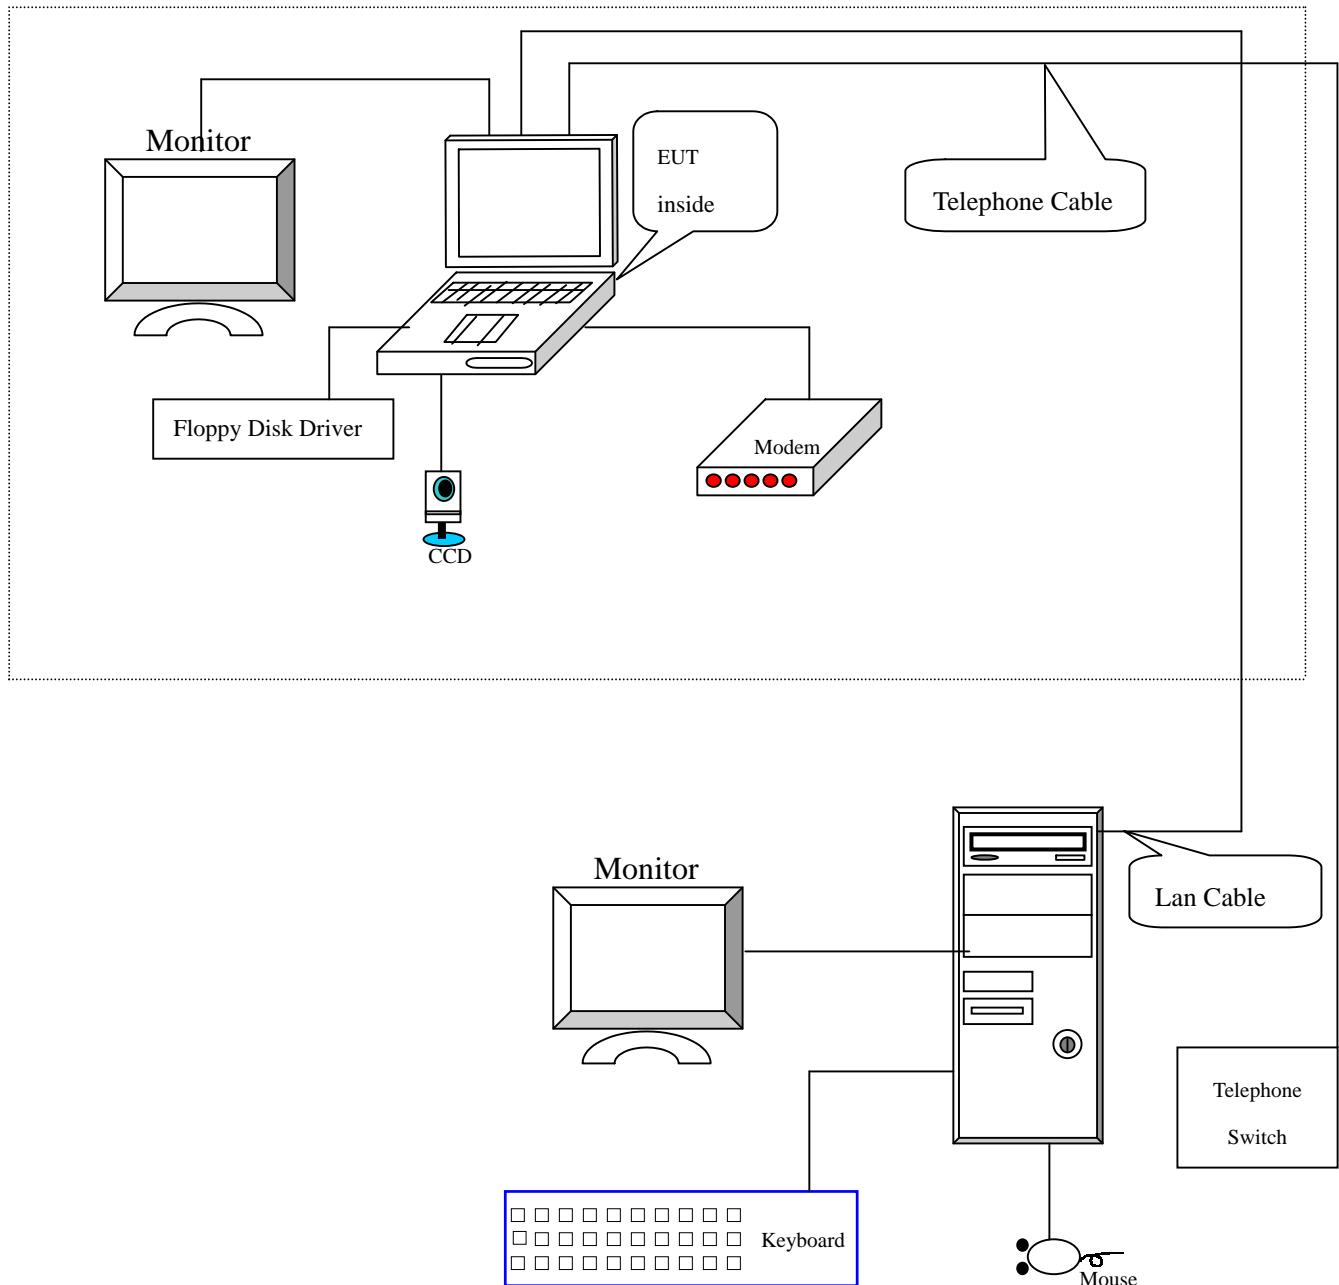

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Personal Computer reads data from disk.
- 1.4.4 Data will be transmitted between Notebook and partner PC through EUT.
- 1.4.5 The transmission status will be shown on the monitor.
- 1.4.6 Repeat the above procedure 1.4.4 to 1.4.5

1.5 Test performed

Conducted emissions were invested over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were invested over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of **10 meters** .



1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2

September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No. : 413-99-LAB11

December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835

January 04, 1999 Accreditation on TUV Rheinland
Certificate No.: I9865712-9901

Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.

2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1999	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1999	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1999	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2		N/A
5	N0.2 Shielded Room				N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

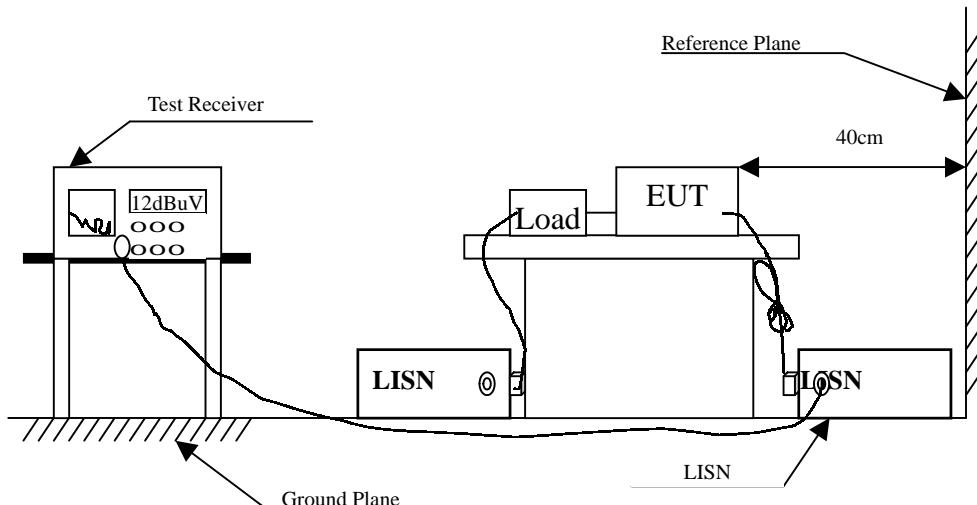

2.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency	Class A		Class B		Frequency	Class A		Class B	
	MHz	QP	AV	MHz	AV	MHz	uV	dBuV	uV
0.15 - 0.50	79	66	66-56	56-46	0.45-1.705	1000	60.0	250	48.0
0.50-5.0	73	60	56	46	1.705-30	3000	69.5	250	48.0
5.0 - 30	73	60	60	50					

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1999
		Pre-Amplifier	HP	8447D/3307A01812	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1999
		Pre-Amplifier	HP	8447D/3307A01814	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2.. Mark “X” test instruments are used to measure the final test results.

3.2 Test Setup

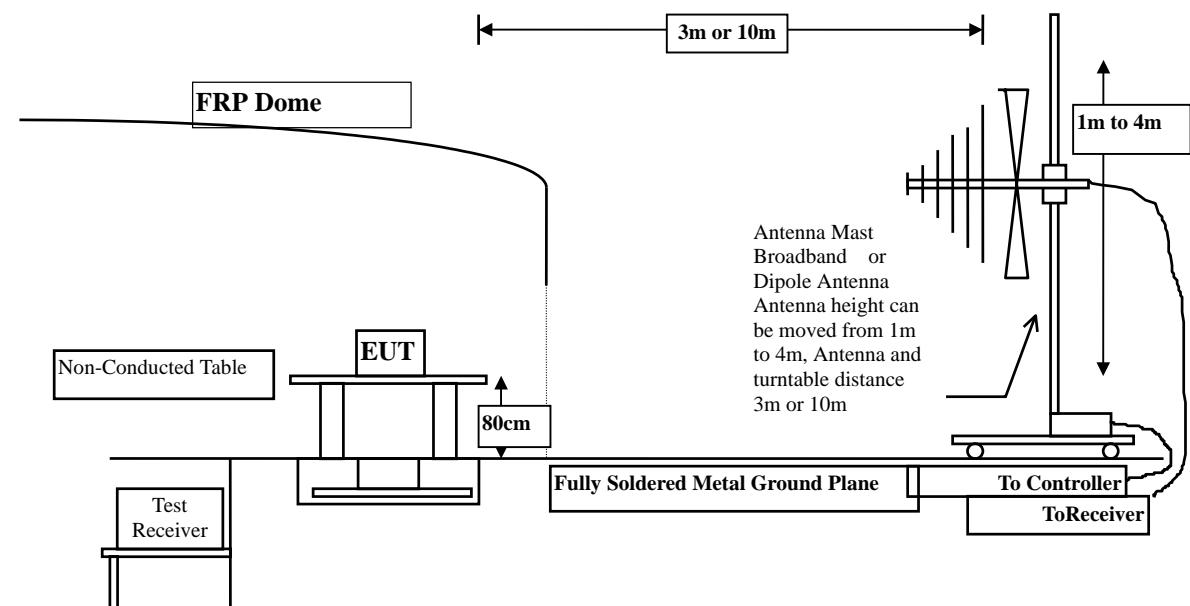

3.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV	dBuV	uV	dBuV
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Line Voltage (dBuV) = $20 \log_{10}$ RF Line Voltage (uV)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 10 meters .

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in Attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.



4. EMI Reduction Method During Compliance Testing

No modification was made during testing.

5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 9
Attachment 2: EUT Test Photographs	Number of Pages: 4
Attachment 3: EUT Detailed Photographs	Number of Pages: 6

