



FCC RADIO TEST REPORT

Applicant's company	AboCom Systems, Inc
Applicant Address	No.77, Yu-Yih Rd., Chu-Nan, Miao-Lih Country 35059, Taiwan R.O.C.
FCC ID	MQ4WM2504
Manufacturer's company	AboCom Systems, Inc
Manufacturer Address	No.77, Yu-Yih Rd., Chu-Nan, Miao-Lih Country 35059, Taiwan R.O.C.

Product Name	Wireless 802.11b/g Mini PCI Card
Brand Name	AboCom
Model Name	WM2504
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jan. 30, 2008
Final Test Date	Feb. 19, 2008
Submission Type	Original Equipment



Statement

Test result included is only for the 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	6
3.9. Test Configurations	7
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Maximum Peak Output Power Measurement	14
4.3. Power Spectral Density Measurement	19
4.4. 6dB Spectrum Bandwidth Measurement	24
4.5. Radiated Emissions Measurement	29
4.6. Band Edge Emissions Measurement	47
4.7. Antenna Requirements	52
5. LIST OF MEASURING EQUIPMENTS	53
6. TEST LOCATION.....	54
7. TAF CERTIFICATE OF ACCREDITATION	55
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A8
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~C3



History of This Test Report

Original Issue Date: Feb. 20, 2008

Report No.: FR813014

■ No additional attachment.

Additional attachment were issued as following record:



Report No.: FR813014

Certificate No.: CB9702005

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless 802.11b/g Mini PCI Card
Brand Name : AboCom
Model Name : WM2504
Applicant : AboCom Systems, Inc
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 30, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that appears to read "Wayne Hsu" followed by the date "20.2.08".

Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.75 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	7.63 dB
4.3	15.247(e)	Power Spectral Density	Complies	18.73 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	2.91 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.18 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 14.48 MHz ; 11g: 16.34 MHz
Conducted Output Power	11b: 21.21 dBm ; 11g: 22.37 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	JOYMAX	TWX-241XRSXX	Dipole Antenna	Reversed-SMA	2	TX/RX
2	JOYMAX	TWX-241XRSXX	Dipole Antenna	Reversed-SMA	2	TX/RX

Note:


The EUT has two antennas.

Both Ant. 1 & Ant. 2 could transmit/receive. Ant. 1 & Ant. 2 couldn't transmit simultaneously.

The EUT supports the antenna with TX/RX diversity function.

Due to Ant. 1 & Ant. 2 are identical and the "Ant. 2" generated higher output power than "Ant. 1".

All the test were base on this setting and recorded in this report.

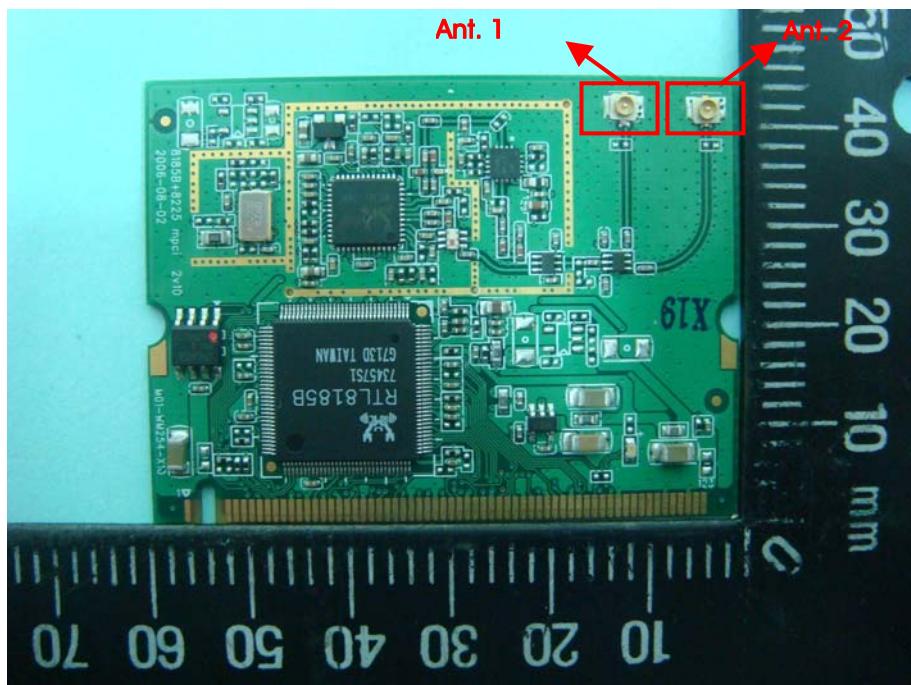

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	2
Maximum Peak Conducted Output Power	11b/BPSK	1 Mbps	1/6/11	NA
	11g/BPSK	6 Mbps	1/6/11	NA
Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK	1 Mbps	1/6/11	NA
	11g/BPSK	6 Mbps	1/6/11	NA
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	2
Radiated Emissions 1GHz~10 th Harmonic	11b/BPSK	1 Mbps	1/6/11	2
	11g/BPSK	6 Mbps	1/6/11	2
Band Edge Emissions	11b/BPSK	1 Mbps	1/11	2
	11g/BPSK	6 Mbps	1/11	2

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	E2K24GBRL
Modem	ACEEX	DM1414	IFAXDM1414
Mouse	QSKY	Lx-619B	DoC
Printer	EPSON	LQ-300+	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g

Test Software Version	REALTEK		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	11	12	12
IEEE 802.11g	18	18	18

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. The programs were executed as follows :
- b. Turn on the power of all equipment.
- c. The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- d. The NB sends " H " messages to the printer, then the printer prints them on the paper.
- e. The NB sends " H " messages to the modem.
- f. Repeat the steps from b to e.


Executed "ping.exe" to link with the remote workstation to receive and transmit signal by LAN and WLAN.

Executed "REALTEK" to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration



Test configuration: 30MHz~1GHz

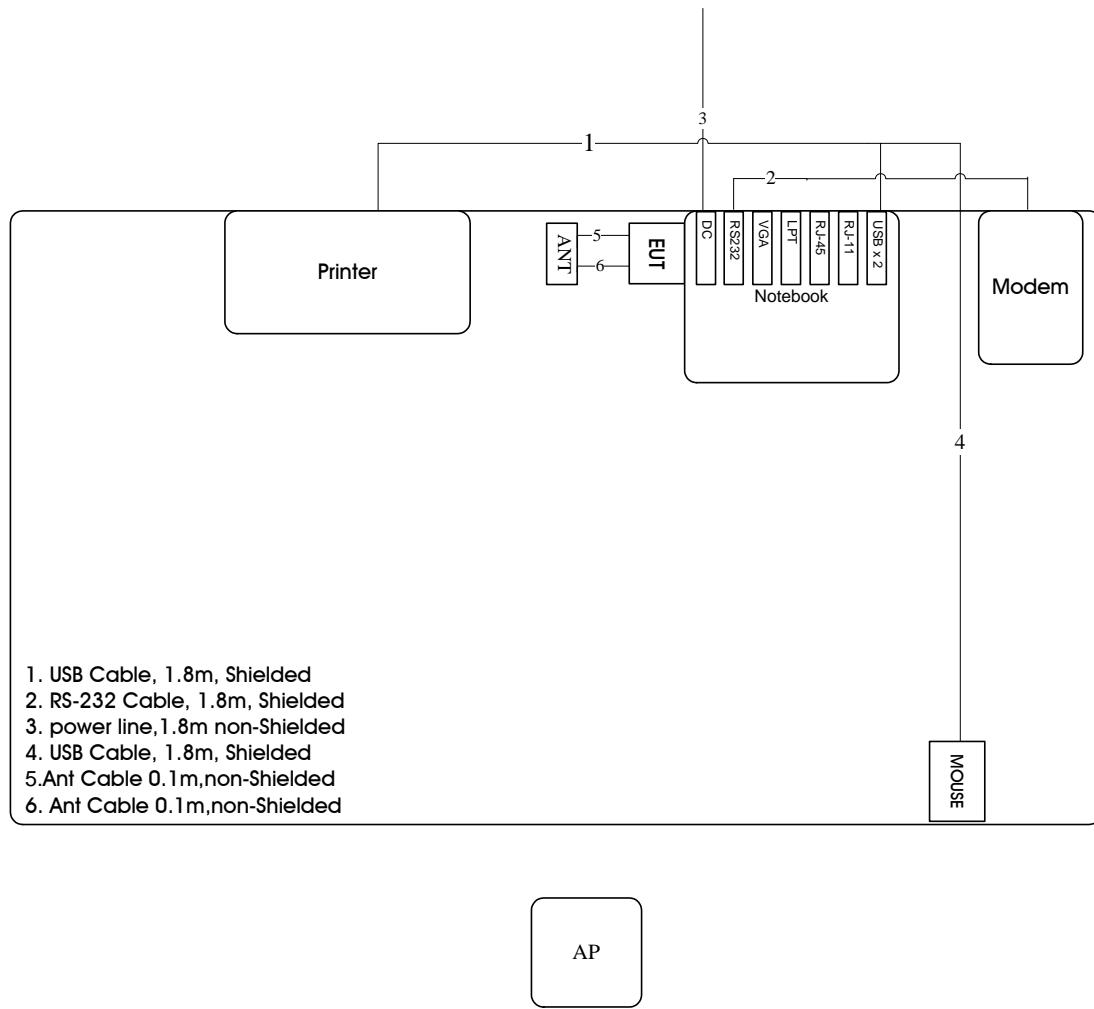

Test configuration: Above 1GHz

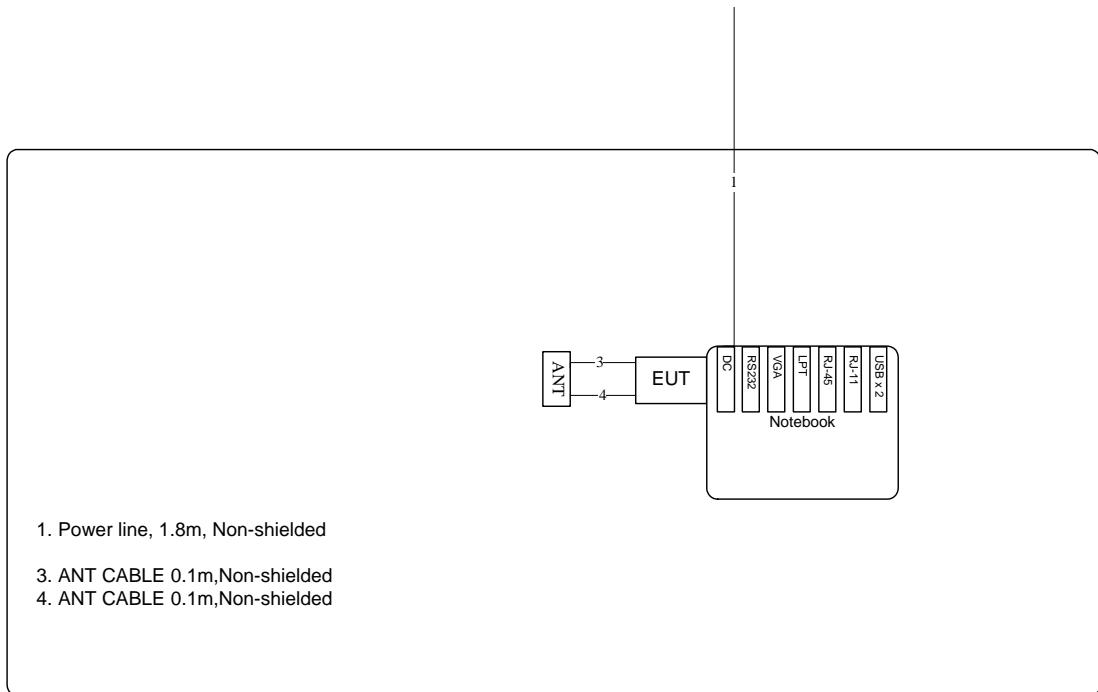

3.9.2. AC Power Line Conduction Emissions Test Configuration

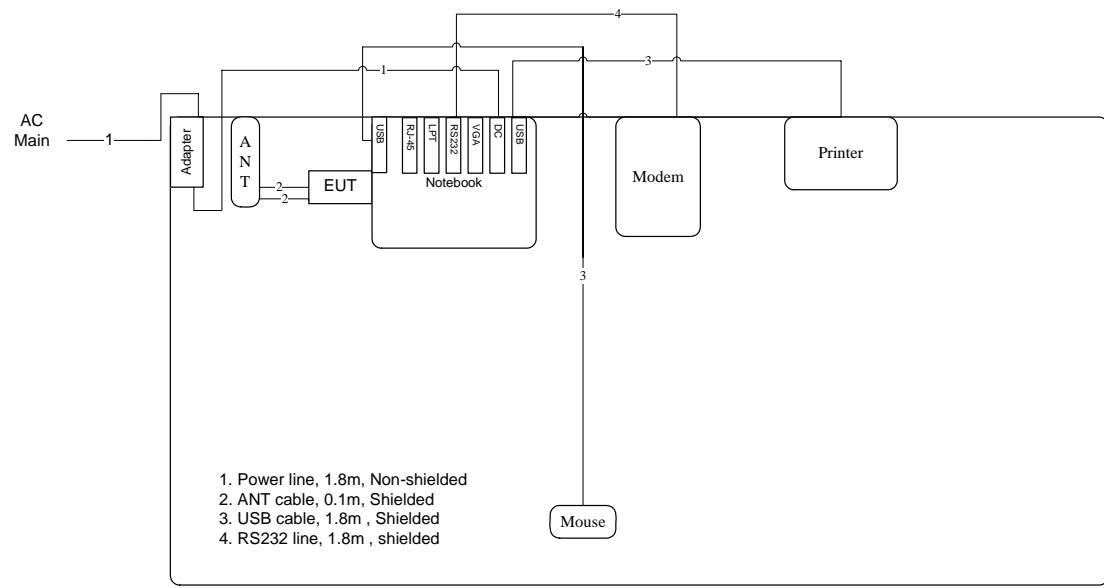

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

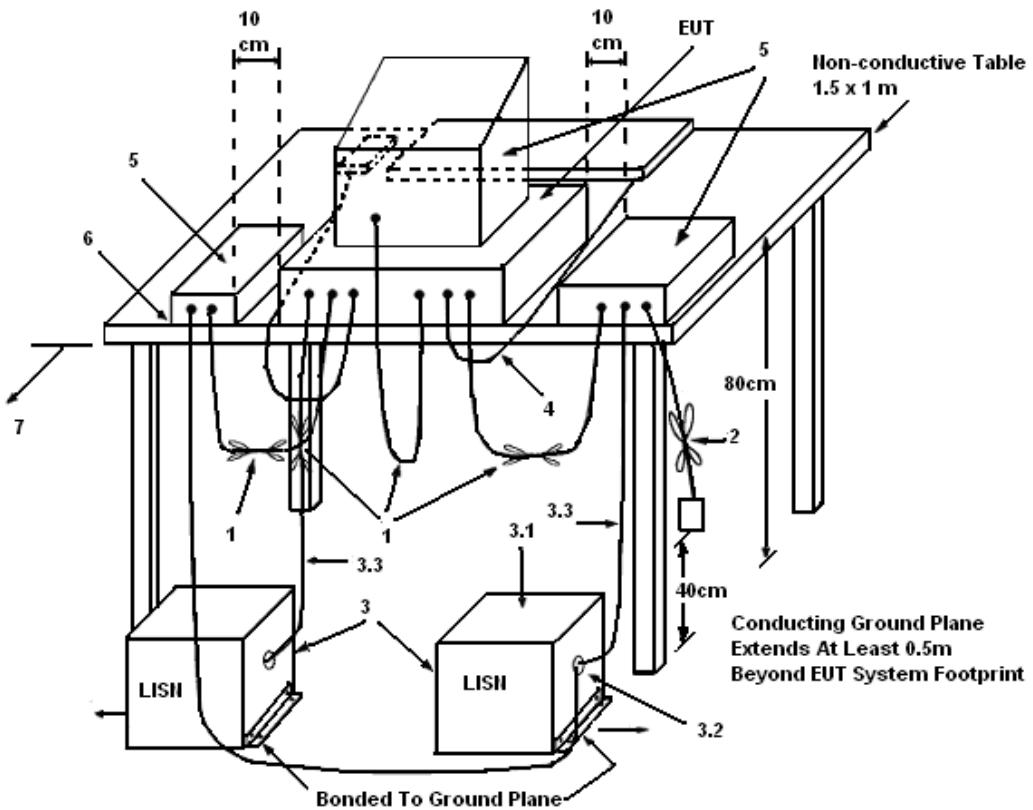

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Johnson Chang	Phase	Line
Configuration	Normal Link		

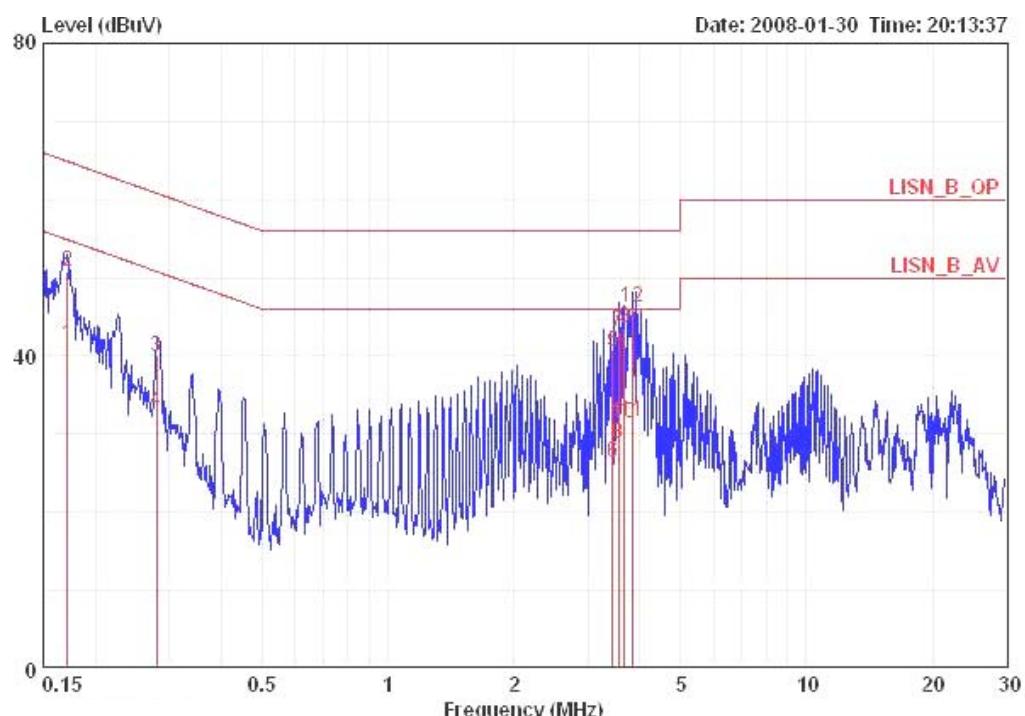

	Freq	Over Limit		Read Line	LISN Level Factor	Cable Loss	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dB	dB	
1	0.17125	41.43	-13.47	54.90	41.08	0.15	0.20 AVERAGE	LINE
2	0.17125	50.72	-14.18	64.90	50.37	0.15	0.20 QP	LINE
3	0.28029	40.00	-20.81	60.81	39.70	0.10	0.20 QP	LINE
4	0.28029	32.97	-17.84	50.81	32.67	0.10	0.20 AVERAGE	LINE
5	3.440	40.61	-15.39	56.00	40.32	0.00	0.29 QP	LINE
6	3.440	26.30	-19.70	46.00	26.01	0.00	0.29 AVERAGE	LINE
7	3.557	43.07	-12.93	56.00	42.77	0.00	0.30 QP	LINE
8	3.557	28.84	-17.16	46.00	28.54	0.00	0.30 AVERAGE	LINE
9	3.667	43.56	-12.44	56.00	43.26	0.00	0.30 QP	LINE
10	3.667	31.30	-14.70	46.00	31.00	0.00	0.30 AVERAGE	LINE
11	3.840	31.68	-14.32	46.00	31.38	0.00	0.30 AVERAGE	LINE
12	3.840	46.13	-9.87	56.00	45.83	0.00	0.30 QP	LINE

Temperature	23°C	Humidity	54%
Test Engineer	Johnson Chang	Phase	Neutral
Configuration	Normal Link		

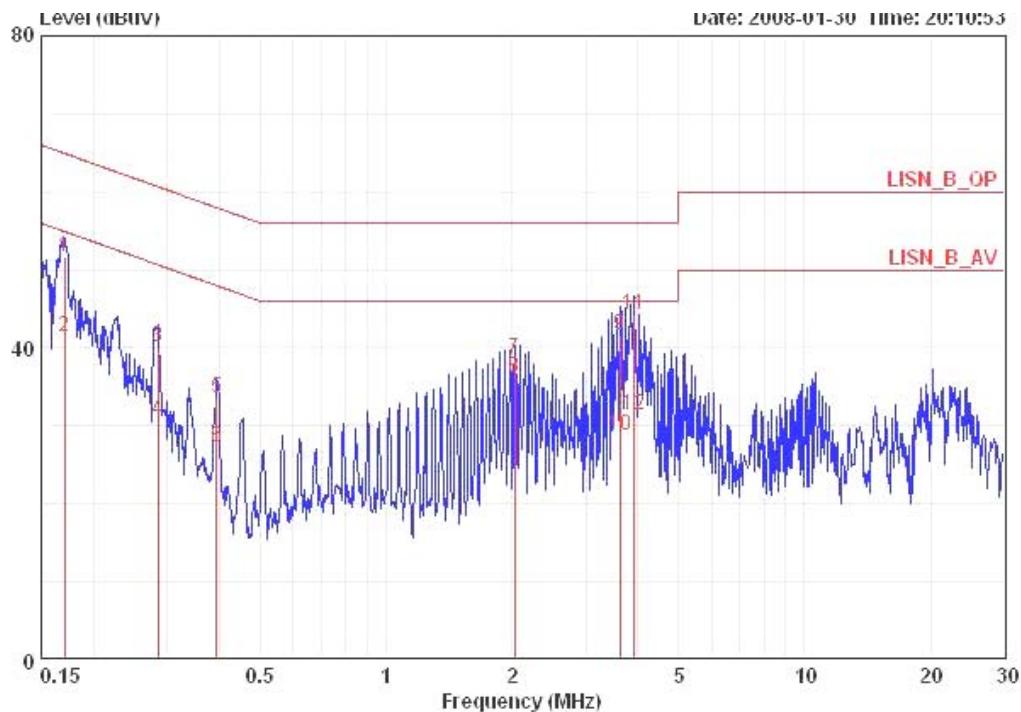

Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
		Limit	Line	Level	Factor	Loss		
MHz	dBuV	dB	dBuV	dBuV		dB		
1	0.17034	51.69	-13.25	64.94	51.24	0.25	0.20 QP	NEUTRAL
2	0.17034	41.34	-13.60	54.94	40.89	0.25	0.20 AVERAGE	NEUTRAL
3	0.28478	40.12	-20.56	60.68	39.77	0.15	0.20 QP	NEUTRAL
4	0.28478	30.78	-19.90	50.68	30.43	0.15	0.20 AVERAGE	NEUTRAL
5	0.39344	33.57	-24.42	57.99	33.27	0.10	0.20 QP	NEUTRAL
6	0.39344	27.27	-20.72	47.99	26.97	0.10	0.20 AVERAGE	NEUTRAL
7	2.033	38.61	-17.39	56.00	38.31	0.10	0.20 QP	NEUTRAL
8	2.033	36.25	-9.75	46.00	35.95	0.10	0.20 AVERAGE	NEUTRAL
9	3.615	41.67	-14.33	56.00	41.27	0.10	0.30 QP	NEUTRAL
10	3.615	28.70	-17.30	46.00	28.30	0.10	0.30 AVERAGE	NEUTRAL
11	3.895	44.16	-11.84	56.00	43.76	0.10	0.30 QP	NEUTRAL
12	3.895	31.40	-14.60	46.00	31.00	0.10	0.30 AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	PEAK
Trace	MAX HOLD
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.

4.2.4. Test Setup Layout

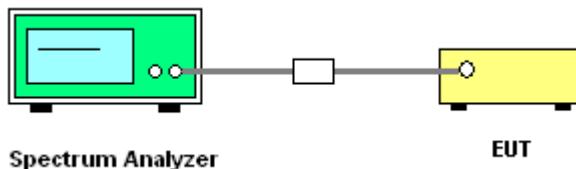

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	23°C	Humidity	62%
Test Engineer	Jacky Ho	Configurations	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.87	30.00	Complies
6	2437 MHz	21.21	30.00	Complies
11	2462 MHz	21.19	30.00	Complies

Configuration IEEE 802.11g


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.20	30.00	Complies
6	2437 MHz	22.37	30.00	Complies
11	2462 MHz	22.30	30.00	Complies

Channel Output Power Plot on Configuration IEEE 802.11b / 2412 MHz




Date: 18.FEB.2008 19:09:04

Channel Output Power Plot on Configuration IEEE 802.11b / 2437 MHz

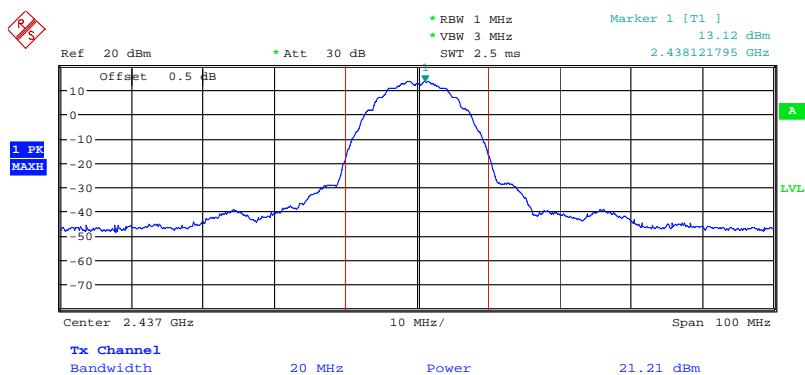


Date: 18.FEB.2008 19:09:42

Channel Output Power Plot on Configuration IEEE 802.11b / 2462 MHz

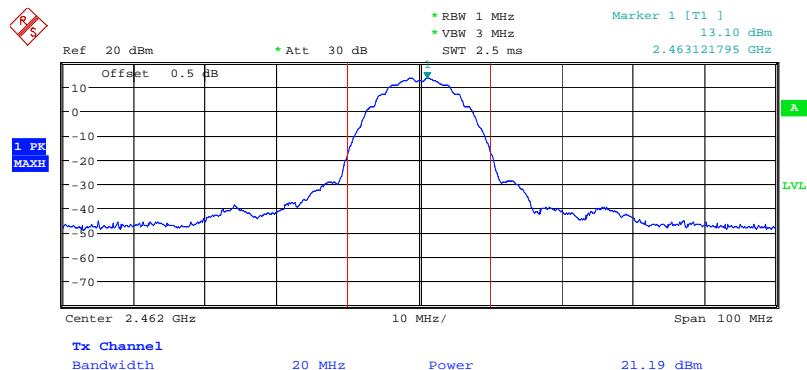

Date: 18.FEB.2008 19:10:01

Channel Output Power Plot on Configuration IEEE 802.11g / 2412 MHz

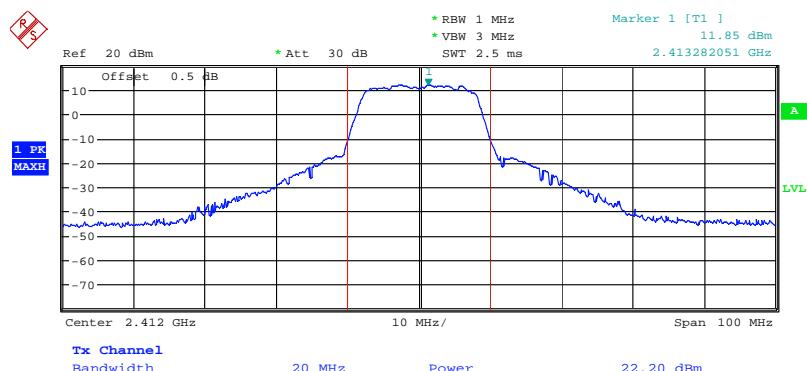


Date: 18.FEB.2008 19:11:39

Channel Output Power Plot on Configuration IEEE 802.11g / 2437 MHz



Date: 18.FEB.2008 19:11:17

Channel Output Power Plot on Configuration IEEE 802.11g / 2462 MHz

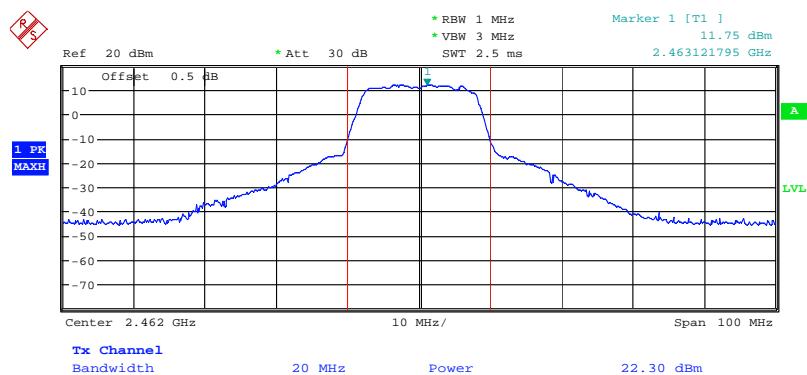

Date: 18.FEB.2008 19:10:56

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

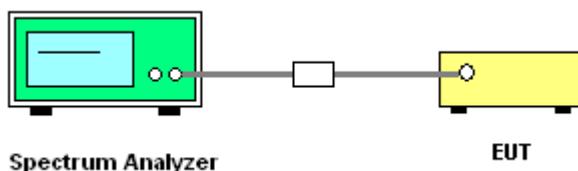

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	62%
Test Engineer	Jacky Ho	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-11.05	8.00	Complies
6	2437 MHz	-10.73	8.00	Complies
11	2462 MHz	-10.90	8.00	Complies

Configuration IEEE 802.11g


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-11.36	8.00	Complies
6	2437 MHz	-11.18	8.00	Complies
11	2462 MHz	-11.22	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

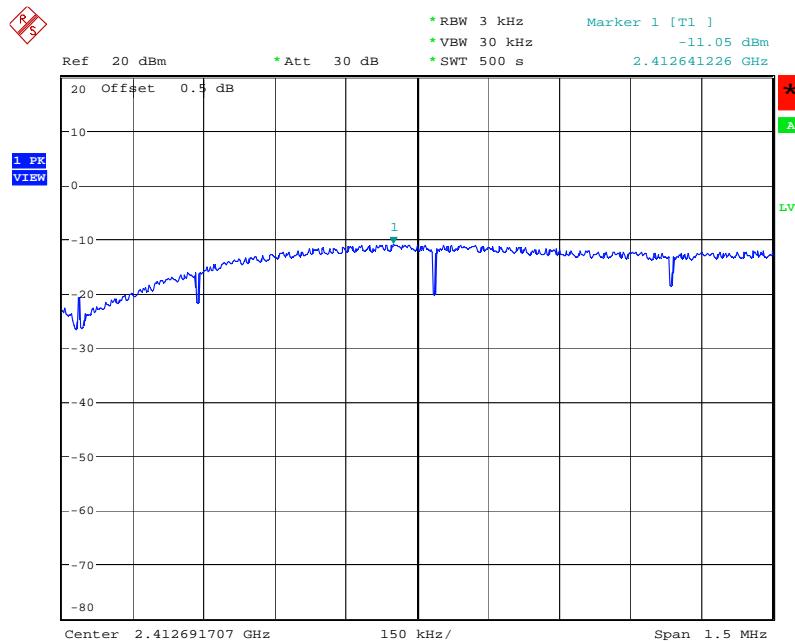


Date: 18.FEB.2008 19:06:38

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

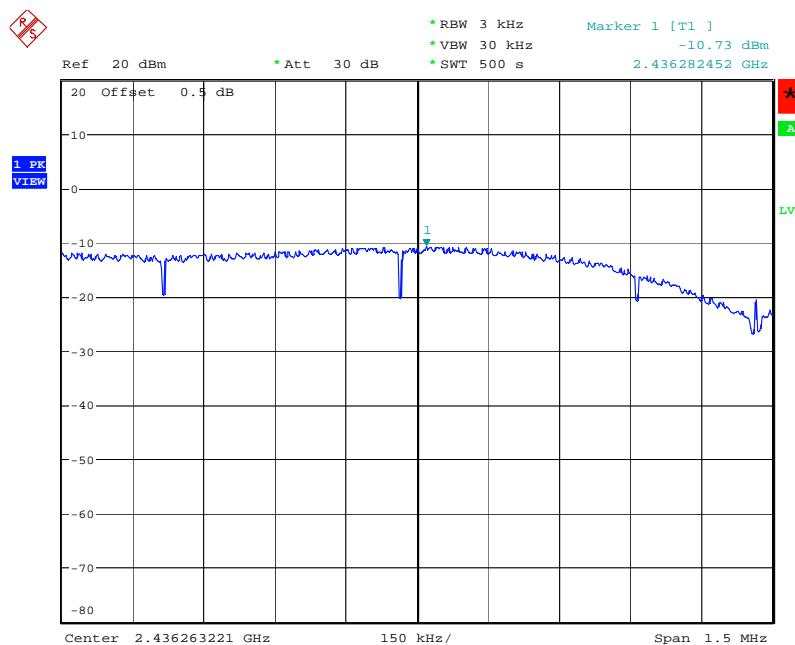


Date: 18.FEB.2008 19:05:26

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

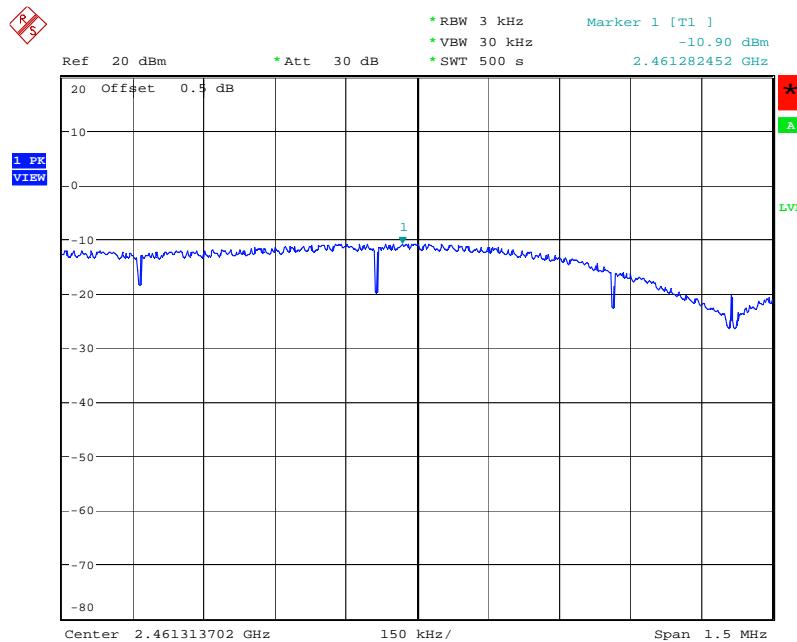


Date: 18.FEB.2008 19:04:23

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

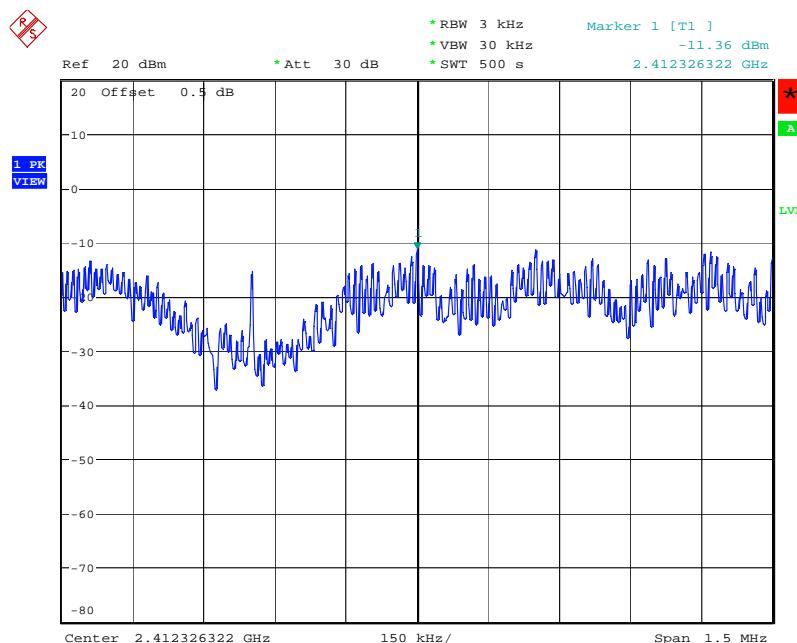


Date: 18.FEB.2008 19:00:07

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

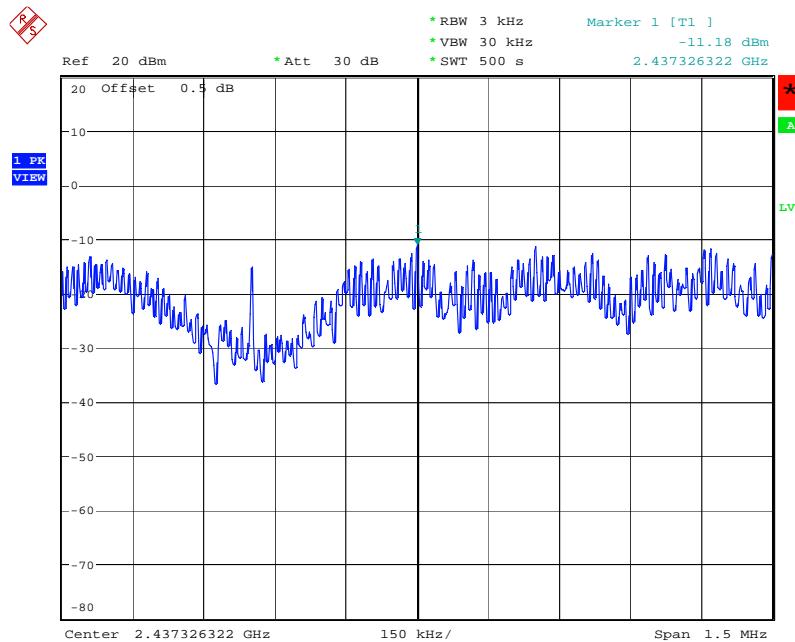

Date: 18.FEB.2008 19:01:40

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

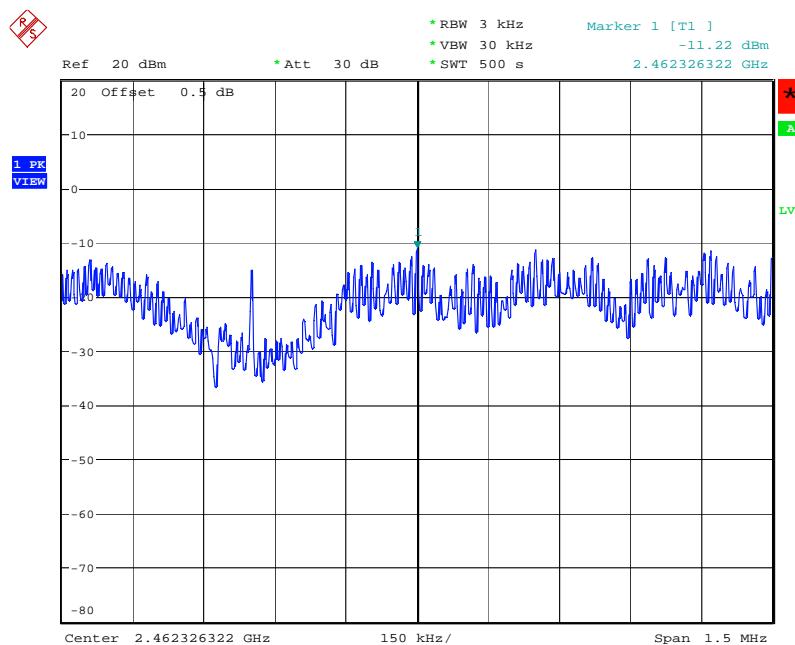

Date: 18.FEB.2008 19:02:52

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

3. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
4. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
5. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

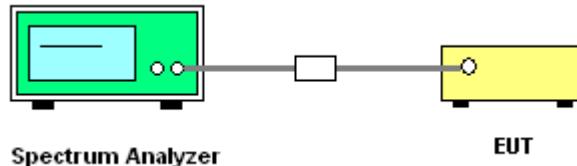

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	23°C	Humidity	62%
Test Engineer	Jacky Ho	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.03	14.42	500	Complies
6	2437 MHz	10.09	14.48	500	Complies
11	2462 MHz	10.03	14.48	500	Complies

Configuration IEEE 802.11g


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.44	16.31	500	Complies
6	2437 MHz	16.44	16.31	500	Complies
11	2462 MHz	16.47	16.34	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

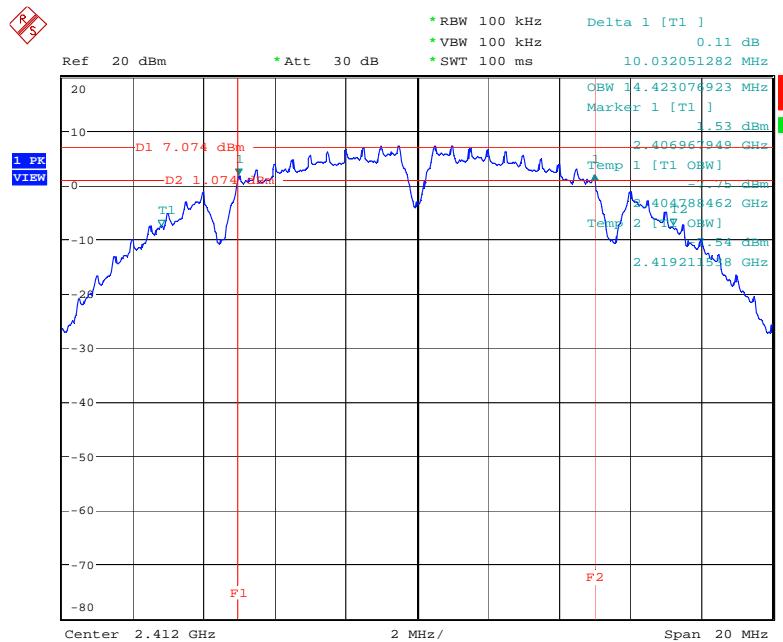


Date: 18.FEB.2008 19:06:12

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

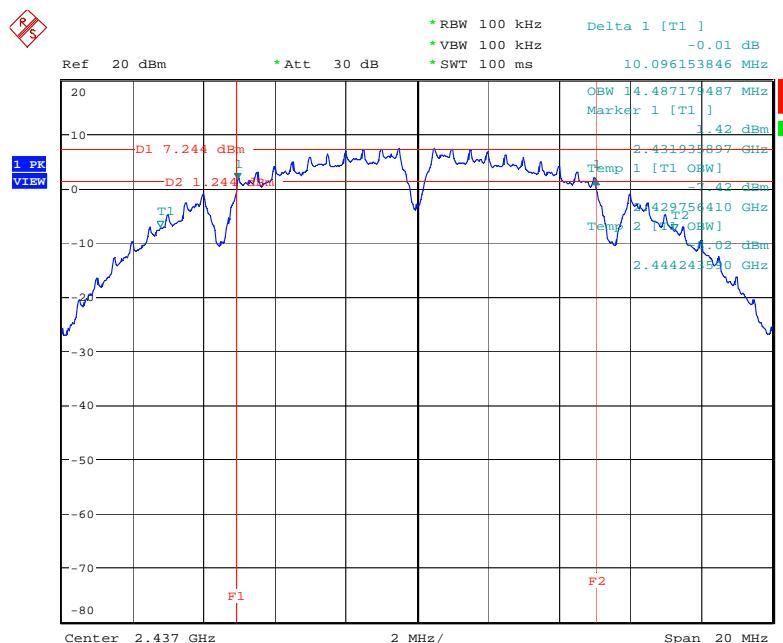


Date: 18.FEB.2008 19:05:10

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

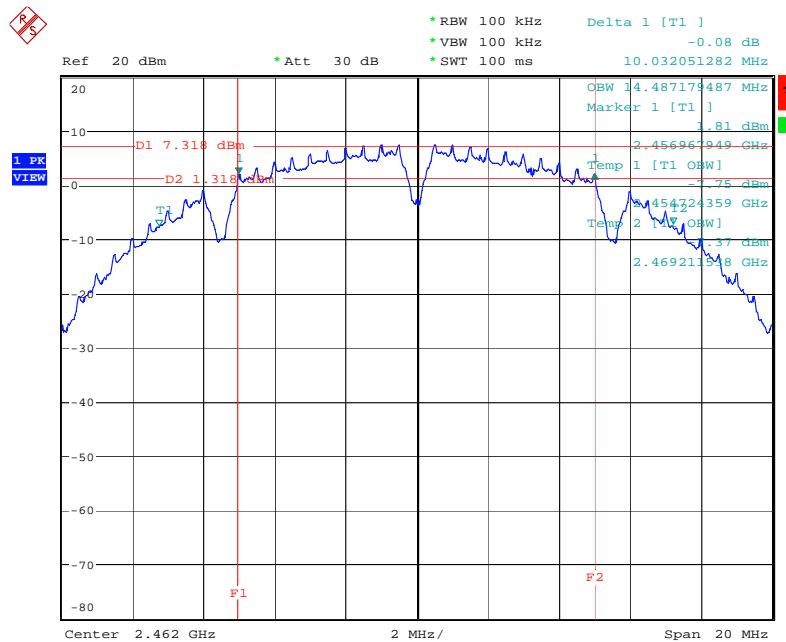


Date: 18.FEB.2008 19:04:07

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

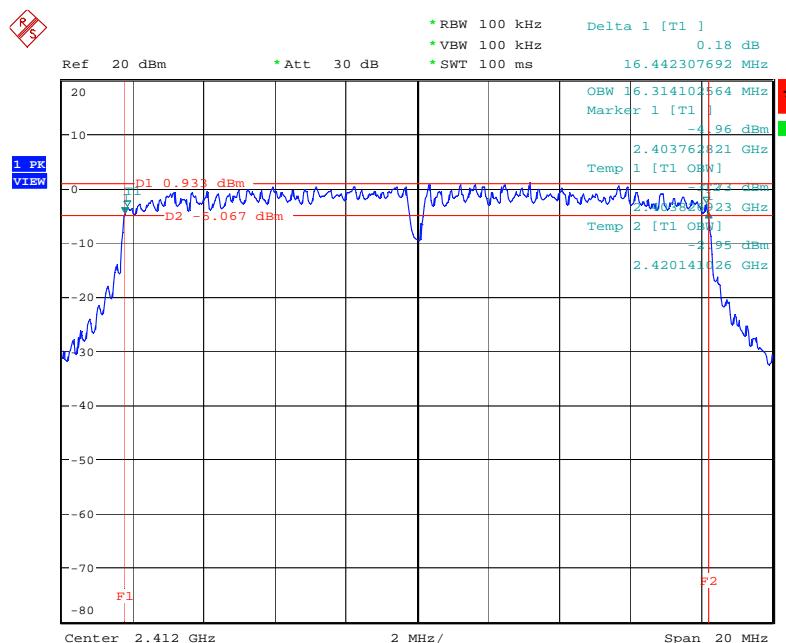


Date: 18.FEB.2008 18:59:41

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

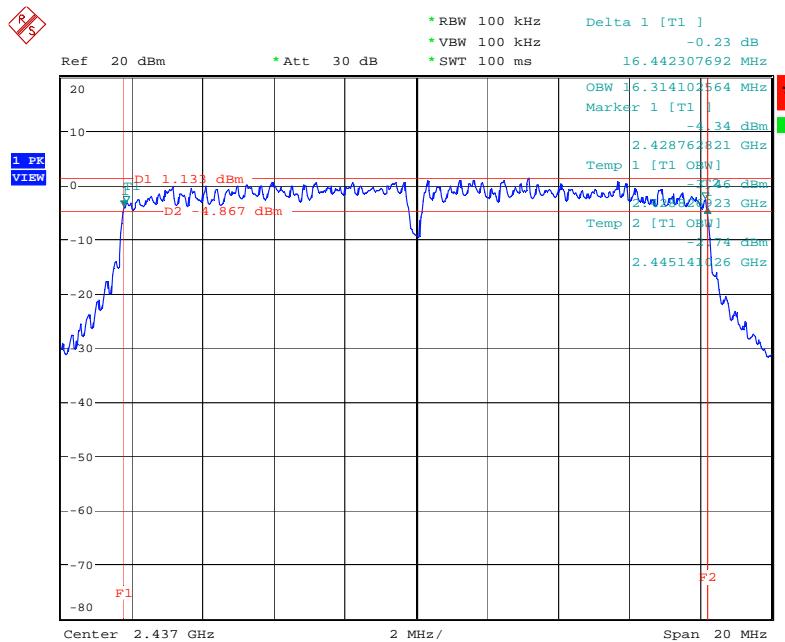

Date: 18.FEB.2008 19:01:24

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

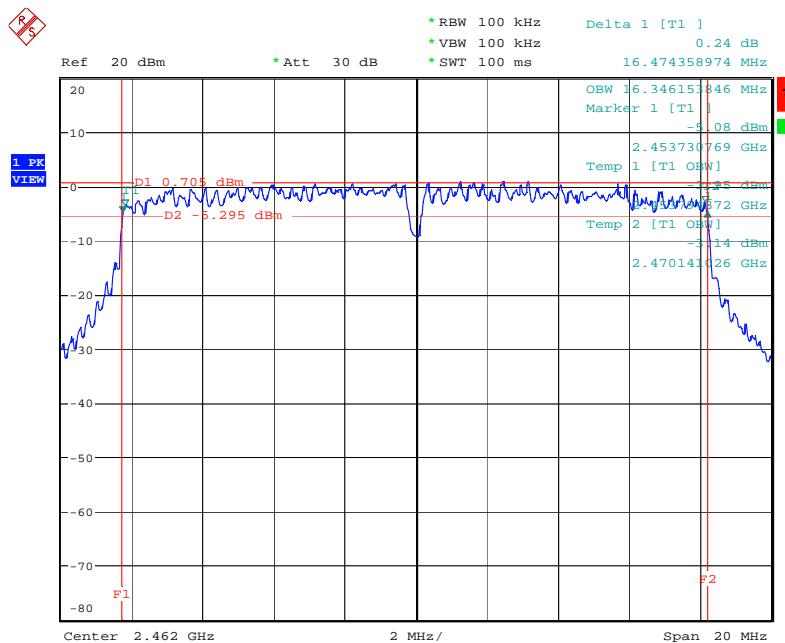

Date: 18.FEB.2008 19:02:36

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

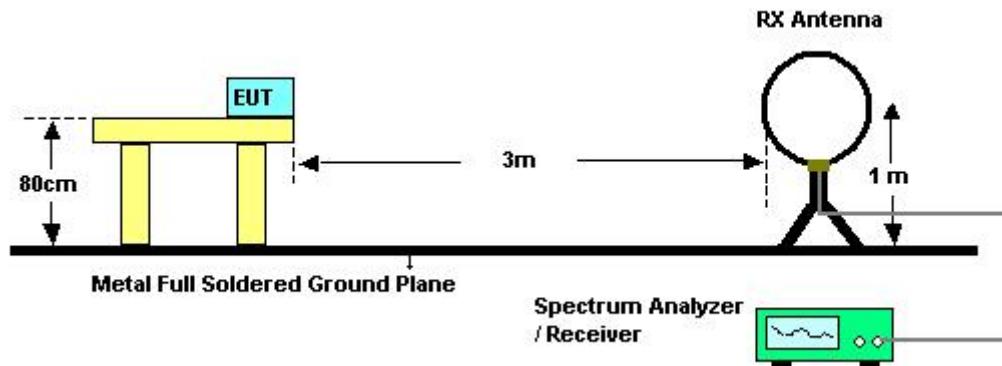

For radiated emissions above 30MHz

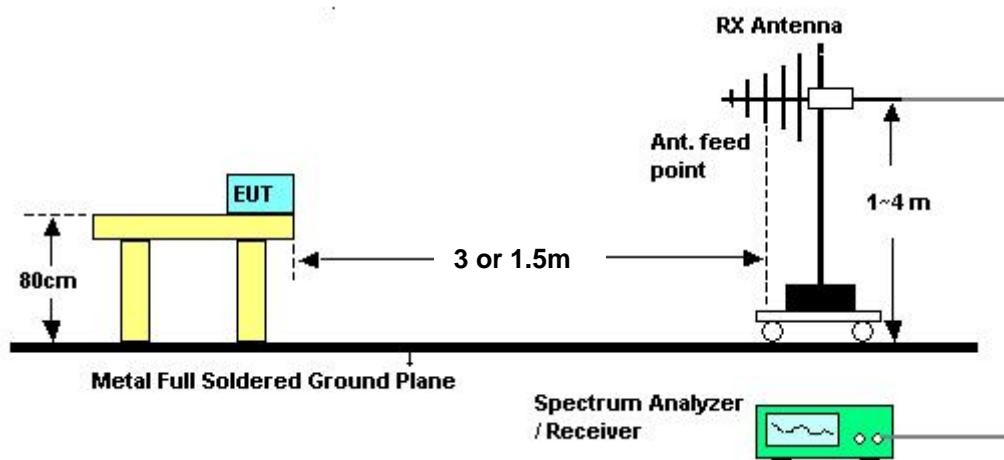

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	Normal link

Horizontal

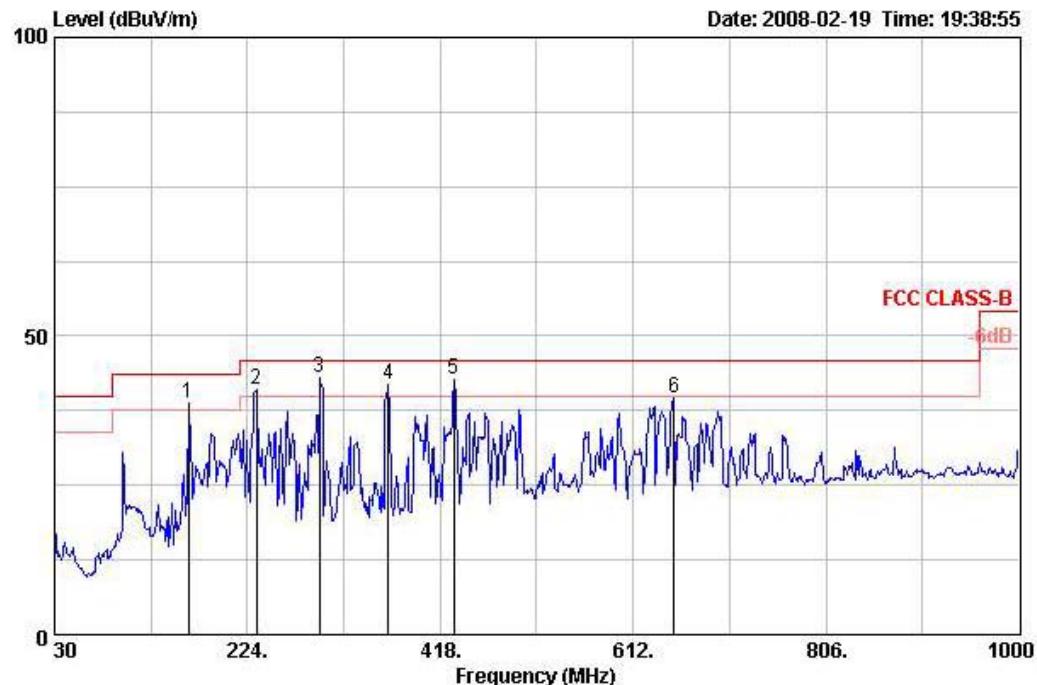

Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant		
		Limit	Line	Level	Factor	Factor	Loss			Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	164.830	38.64	-4.86	43.50	55.53	8.85	27.27	1.52 Peak	0	100	HORIZONTAL
2 @	232.730	41.03	-4.97	46.00	56.30	9.93	27.03	1.83 Peak	0	100	HORIZONTAL
3 @	296.750	42.98	-3.02	46.00	54.96	12.84	26.91	2.09 QP	233	105	HORIZONTAL
4 @	365.620	41.94	-4.06	46.00	52.48	14.58	27.36	2.23 Peak	0	100	HORIZONTAL
5 @	431.580	42.73	-3.27	46.00	51.62	16.38	27.76	2.49 Peak	0	100	HORIZONTAL
6	652.740	39.55	-6.45	46.00	45.13	18.98	28.05	3.49 Peak	0	100	HORIZONTAL

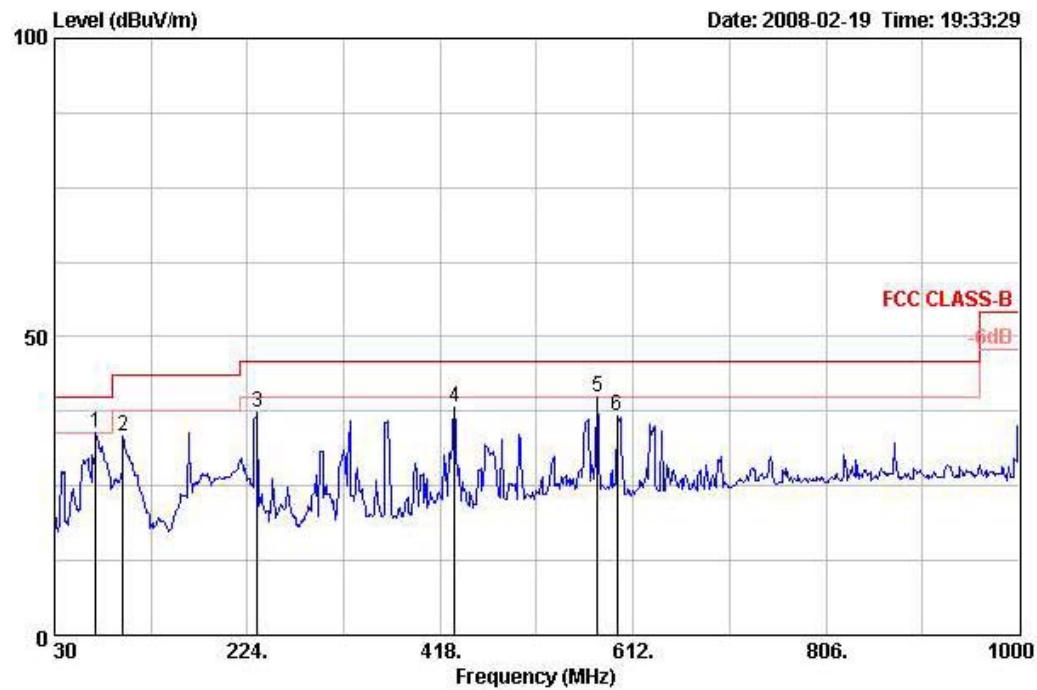Vertical


Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Table	Ant	
		Limit	Line	Level	Factor	Factor	Loss			Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm	Pol/Phase
1	71.710	33.90	-6.10	40.00	55.42	5.35	27.71	0.84	Peak	0 400 VERTICAL
2	98.870	33.29	-10.21	43.50	49.62	10.10	27.61	1.18	Peak	0 400 VERTICAL
3	233.700	37.20	-8.80	46.00	52.36	10.04	27.03	1.83	Peak	0 400 VERTICAL
4	432.550	38.07	-7.93	46.00	46.96	16.37	27.76	2.50	Peak	0 400 VERTICAL
5	576.110	39.91	-6.09	46.00	46.48	18.68	28.10	2.85	Peak	0 400 VERTICAL
6	595.510	36.75	-9.25	46.00	43.52	18.44	28.10	2.89	Peak	0 400 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 1

Horizontal

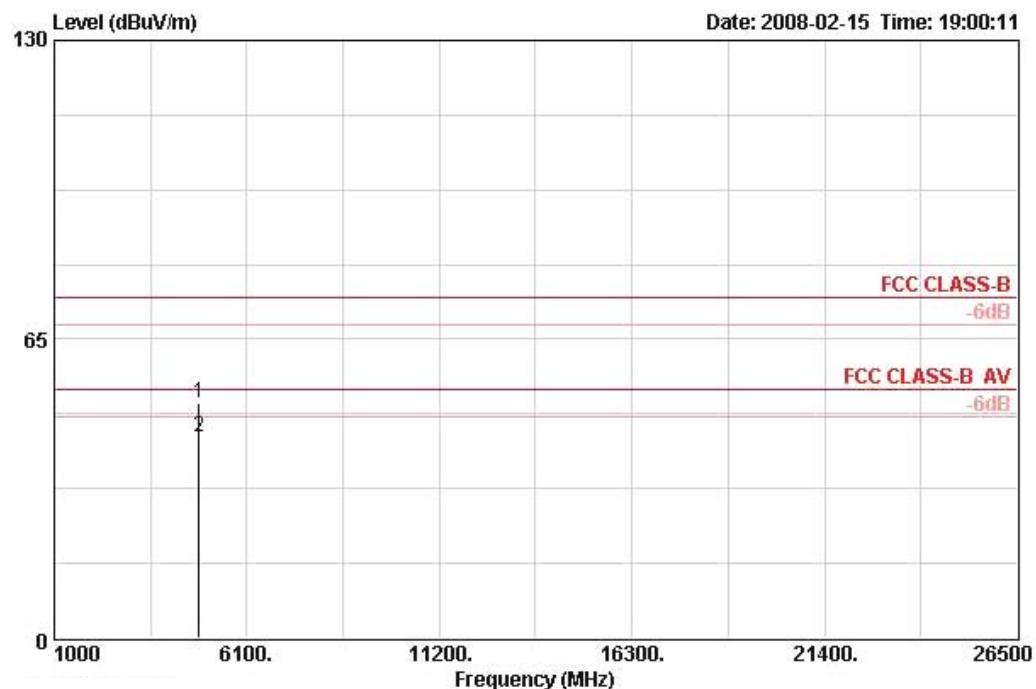

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	Pos	Pos	Pol/Phase
		Limit	Line	Level	Factor	Cable	Loss						
1	4823.860	51.27	-22.73	74.00	46.98	33.06	6.40	35.16 PERK	100	80	HORIZONTAL		
2	4823.950	43.82	-10.18	54.00	39.53	33.06	6.40	35.16 AVERAGE	100	80	HORIZONTAL		

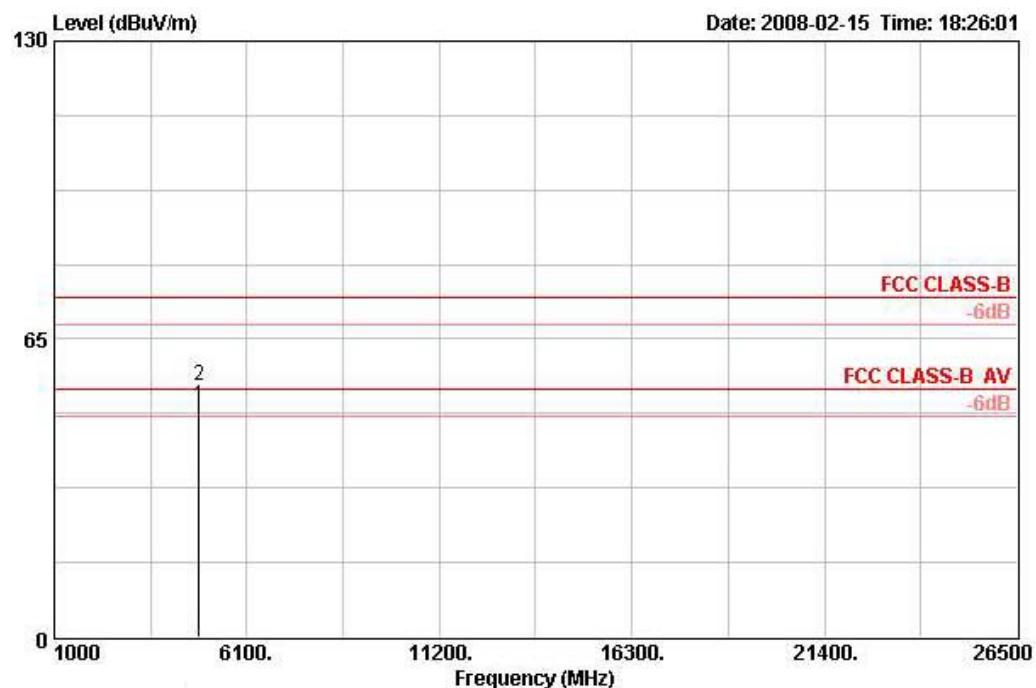
Vertical


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4823.970	50.31	-3.69	54.00	46.02	33.06	6.40	35.16 RVERAGE	100	79 VERTICAL
2	4823.990	54.74	-19.26	74.00	50.46	33.06	6.40	35.16 PERK	100	79 VERTICAL




Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 6

Horizontal

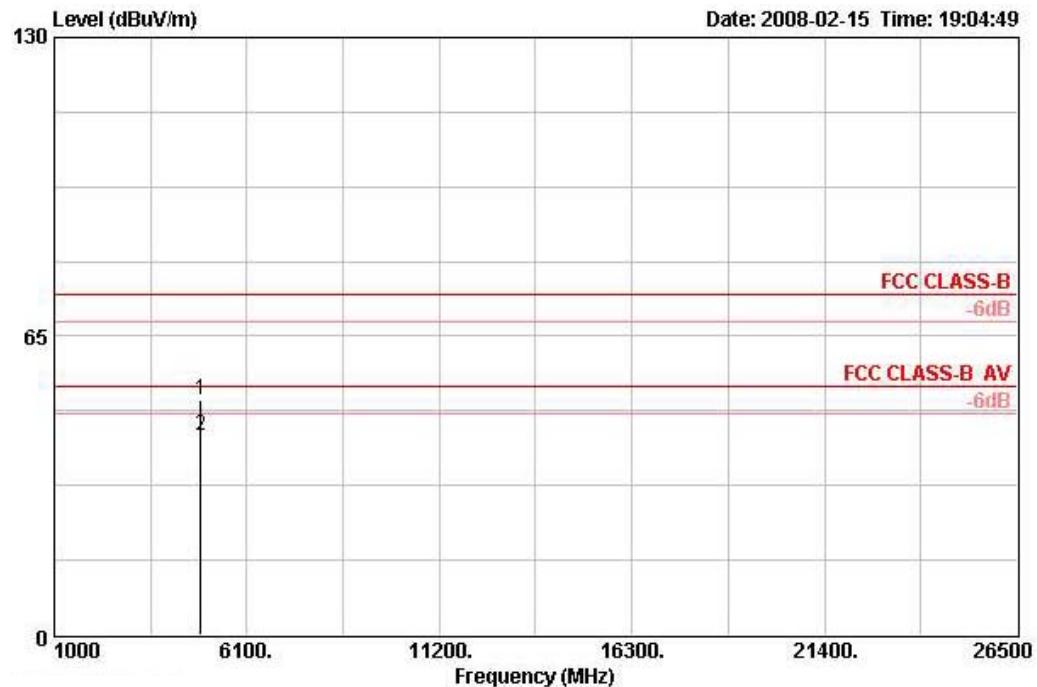

Freq	Level	Over	Limit	ReadAntenna		Cable	Preamp	Remark	Ant	Table		
		Limit	Line	Level	Factor	Loss	Factor			Pos	Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg		
1	4873.690	51.17	-22.83	74.00	46.75	33.16	6.42	35.15	PEAK	100	81	HORIZONTAL
2	4873.970	43.31	-10.69	54.00	38.88	33.16	6.42	35.15	AVERAGE	100	81	HORIZONTAL

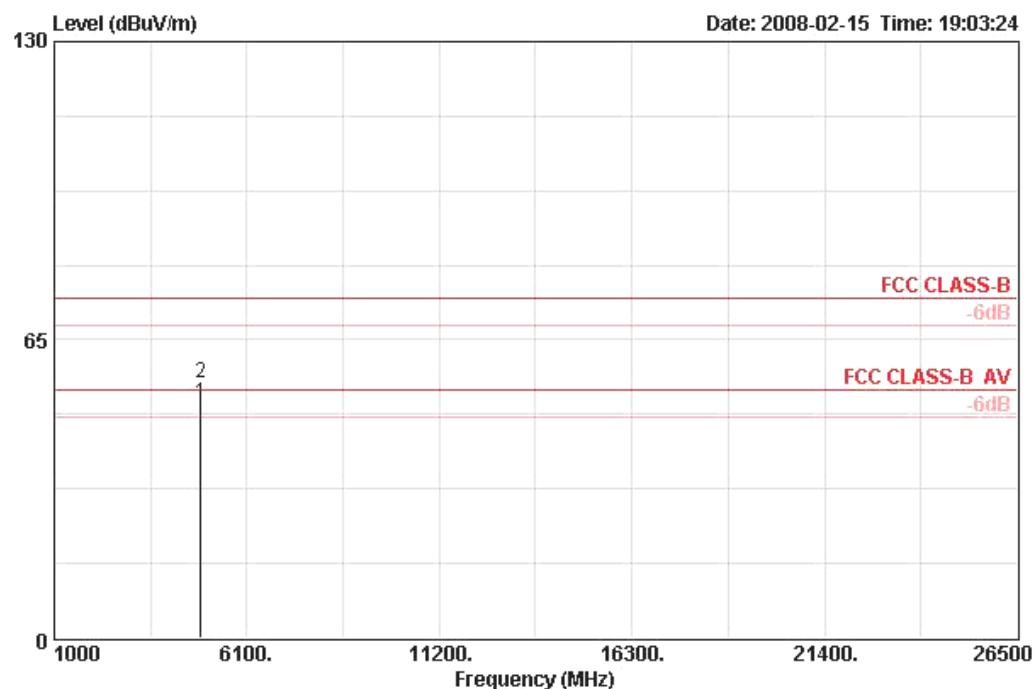
Vertical


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pos	Pol/Phase
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	4873.950	51.09	-2.91	54.00	46.67	33.16	6.42	AVERAGE	100	349	VERTICAL
2	4874.140	55.37	-18.63	74.00	50.95	33.16	6.42	PEAK	100	349	VERTICAL




Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 11

Horizontal

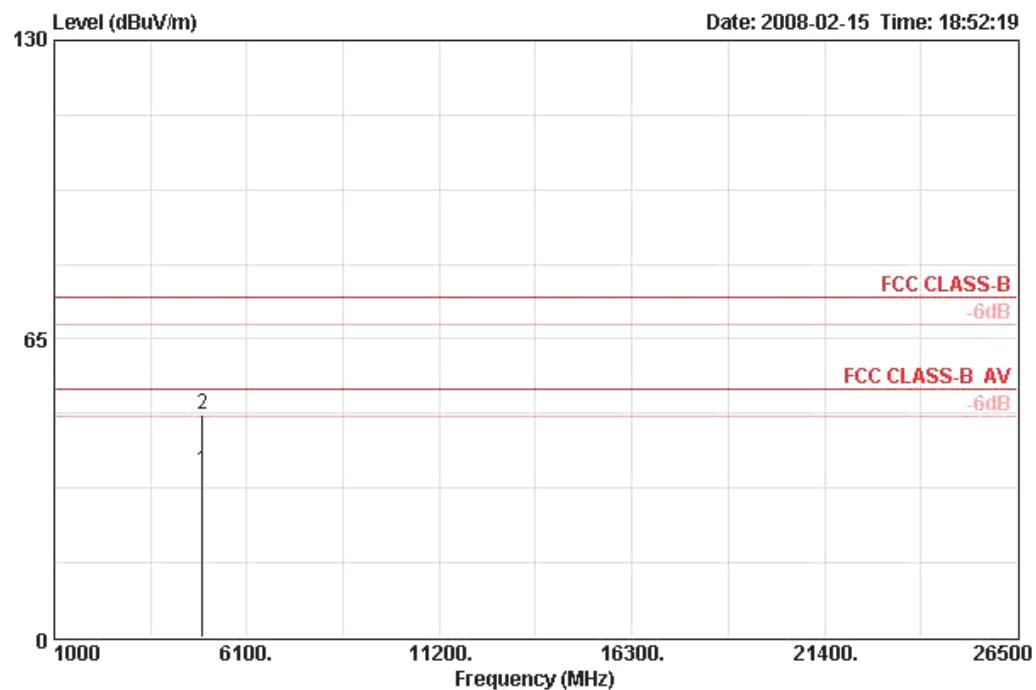


Freq	Level	Over	Limit	Read		Antenna	Cable	Preamp		Ant	Table
		Limit	Line	Level	Factor	Loss	Factor	Remark	Pos		Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.910	36.34	-17.66	54.00	31.78	33.26	6.44	35.14	AVERAGE	100	85 HORIZONTAL
2	4924.170	48.33	-25.67	74.00	43.77	33.26	6.44	35.14	PEAK	100	85 HORIZONTAL

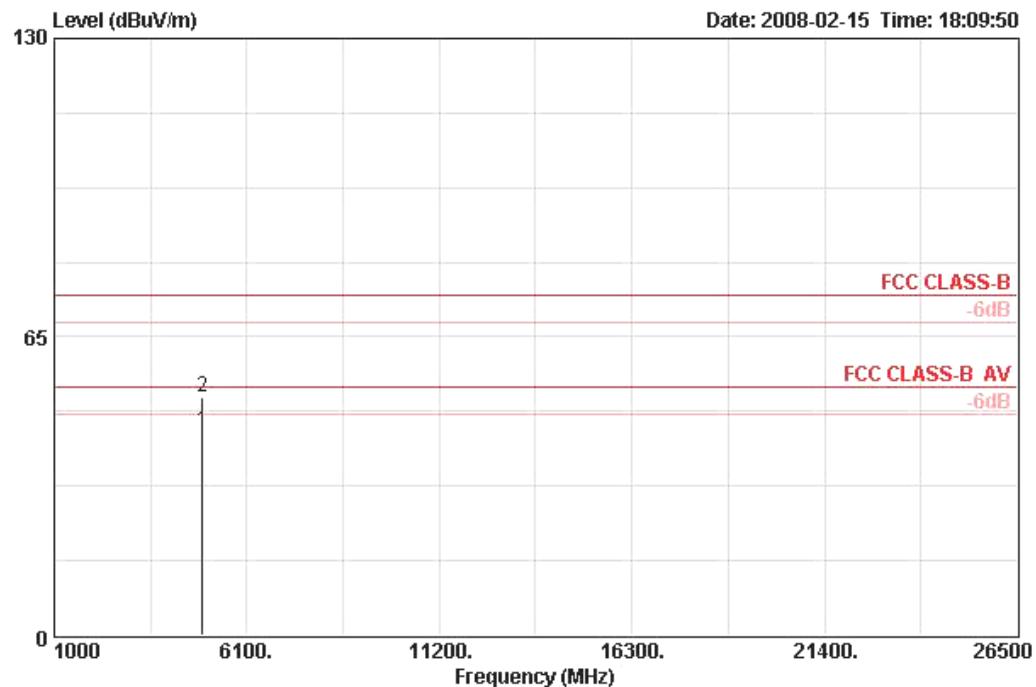Vertical


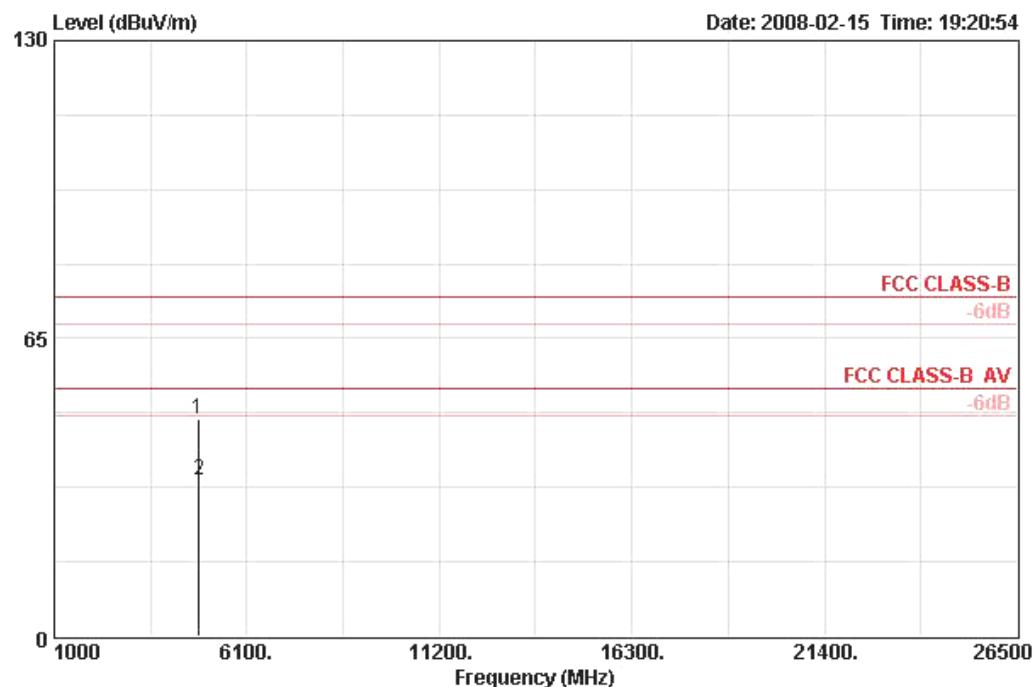
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
		Limit	Line	Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.930	44.50	-9.50	54.00	39.94	33.26	6.44	35.14 AVERAGE	100	274	VERTICAL
2	4924.010	51.99	-22.01	74.00	47.43	33.26	6.44	35.14 PEAK	100	274	VERTICAL

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11g CH 1

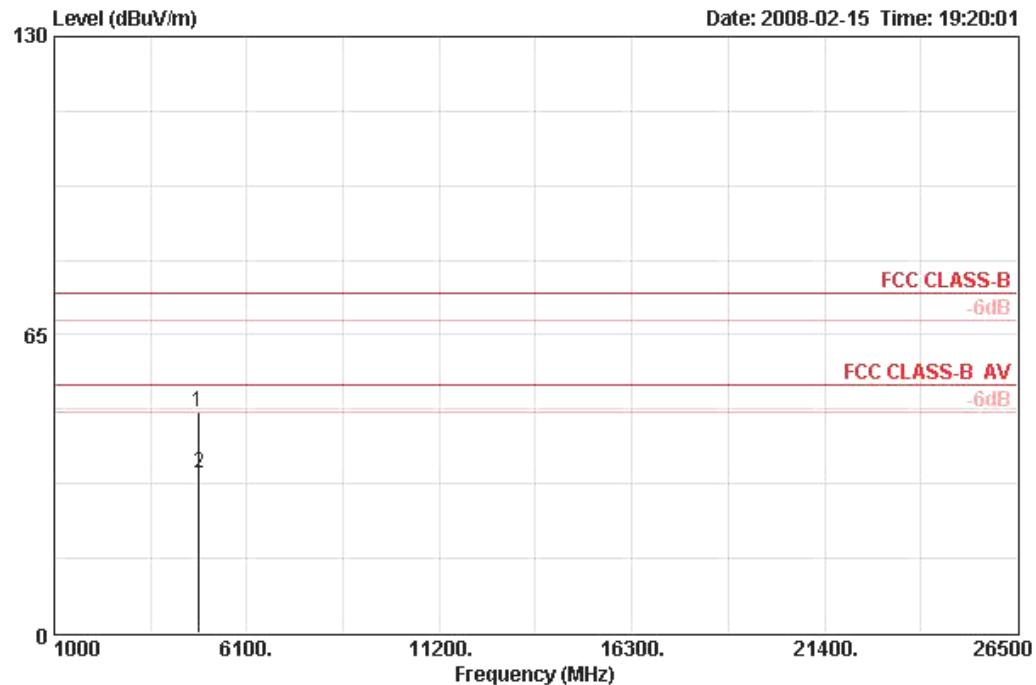Horizontal


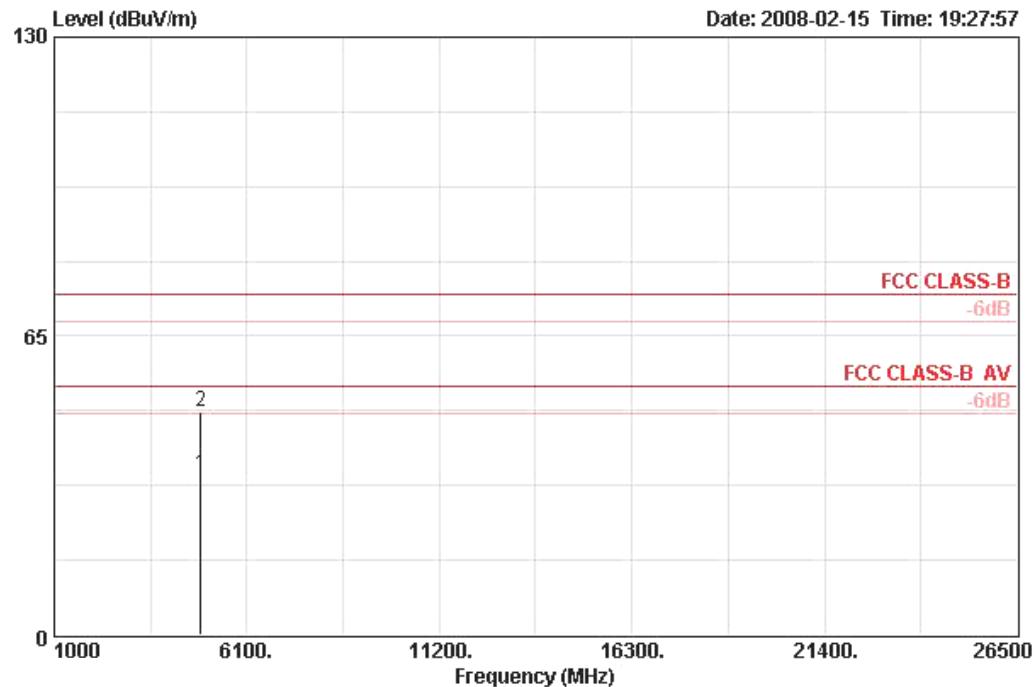
Freq	Level	Over Limit	Limit	Read		Ant	Table
				Antenna	Line		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg
1	4822.610	47.99	-26.01	74.00	43.70	33.06	6.40
2	4826.450	34.83	-19.17	54.00	30.55	33.06	6.40
						35.16	PERK
						35.16	AVERAGE
							100
							0 HORIZONTAL
							100
							12 HORIZONTAL

Vertical




Freq	Level	Over Limit	Limit Line	Read		Ant	Table Pos	Pos	Table Pol/Phase
				Antenna Level	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4822.430	47.35	-26.65	74.00	43.06	33.06	6.40	35.16	PEAK
2	4824.740	34.20	-19.80	54.00	29.92	33.06	6.40	35.16	AVERAGE
								100	282 VERTICAL
								100	282 VERTICAL

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11g CH 6


Horizontal


Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Antenna	Line			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4872.390	34.97	-19.03	54.00	30.55	33.16	6.42	35.15	AVERAGE
2	4874.600	48.42	-25.58	74.00	43.99	33.16	6.42	35.15	PEAK
								100	0 HORIZONTAL
								100	0 HORIZONTAL

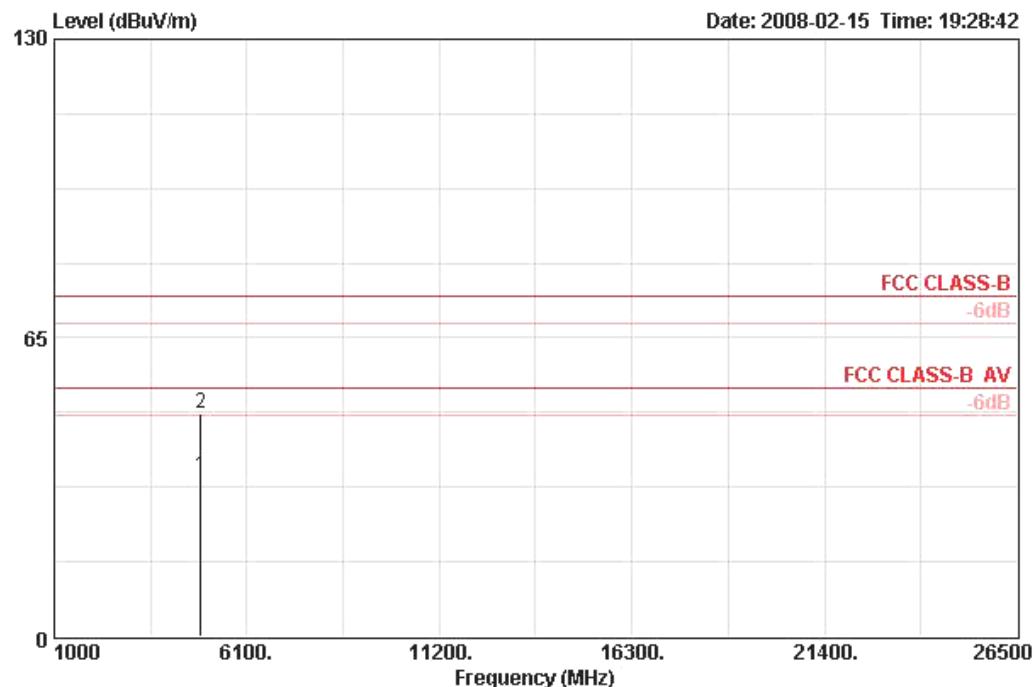
Vertical


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark	Ant Pos	Table Pos	Table Pol/Phase	
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm
1	4872.700	34.93	-19.07	54.00	30.50	33.16	6.42	35.15	AVERAGE	100	360	VERTICAL
2	4874.450	48.45	-25.55	74.00	44.03	33.16	6.42	35.15	PERK	100	360	VERTICAL

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11g CH 11

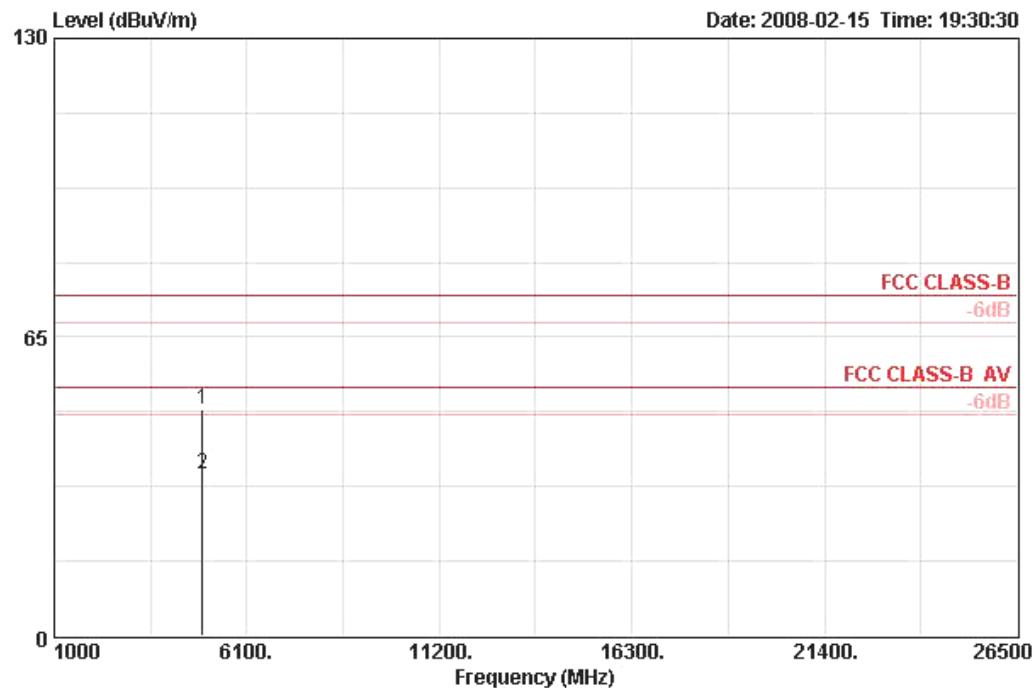Horizontal


Freq	Level	Over Limit	Limit Line	Read		Ant	Table Pos	Table Pos	Table Pol/Phase
				Antenna Level	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4925.460	49.43	-24.57	74.00	44.87	33.26	6.44	35.14	PERK
2	4925.900	35.34	-18.66	54.00	30.78	33.26	6.44	35.14	AVERAGE
								100	132 HORIZONTAL
								100	204 HORIZONTAL

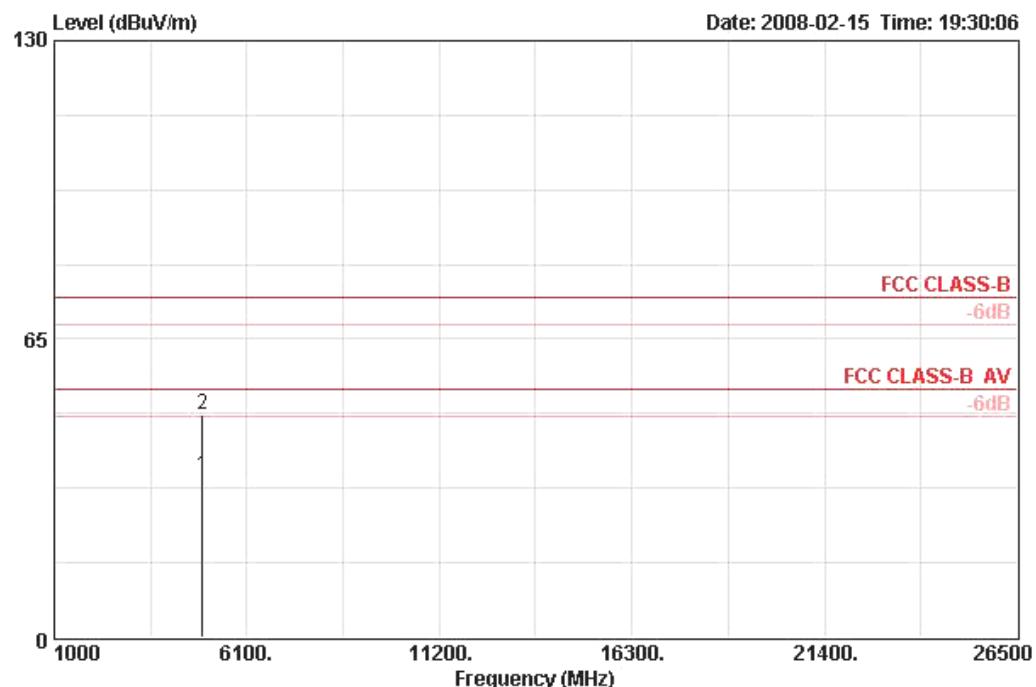Vertical


Freq	Level	Over Limit	Limit Line	Read	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4925.110	35.30	-18.70	54.00	30.74	33.26	6.44	35.14 AVERAGE	100	317 VERTICAL
2	4926.430	48.70	-25.30	74.00	44.14	33.26	6.44	35.14 PEAK	100	360 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 1, 6, 11

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Line	Level	Factor	Loss	Factor	Remark		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2385.800	60.63	-13.37	74.00	28.33	28.17	4.13	0.00	PERK	107	71 VERTICAL
2 !	2386.200	51.58	-2.42	54.00	19.28	28.17	4.13	0.00	AVERAGE	107	71 VERTICAL
3 over	2412.800	104.75			72.39	28.21	4.15	0.00	AVERAGE	107	71 VERTICAL
4 over	2413.000	108.61			76.25	28.21	4.15	0.00	PERK	107	71 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Line	Level	Factor	Loss	Factor	Remark		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2436.200	108.71			76.29	28.25	4.18	0.00	AVERAGE	103	251 VERTICAL
2 over	2436.200	112.47			80.04	28.25	4.18	0.00	PERK	103	251 VERTICAL

Item 1, 2 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Line	Level	Factor	Loss	Factor	Remark		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 over	2461.200	115.73			83.21	28.32	4.20	0.00	PERK	107	16 VERTICAL
2 @	2461.200	111.97			79.45	28.32	4.20	0.00	AVERAGE	107	16 VERTICAL
3 !	2487.300	53.82	-0.18	54.00	21.23	28.36	4.23	0.00	AVERAGE	107	16 VERTICAL
4	2487.700	61.95	-12.05	74.00	29.33	28.40	4.23	0.00	PERK	107	16 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11g CH 1, 6, 11

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 !	2389.000	68.52	-5.48	74.00	36.21	28.17	4.13	0.00	PERK	106	362 VERTICAL
2 !	2390.000	52.29	-1.71	54.00	19.96	28.17	4.15	0.00	AVERAGE	106	362 VERTICAL
3 over	2415.600	99.73			67.34	28.21	4.18	0.00	AVERAGE	106	362 VERTICAL
4 over	2416.000	109.89			77.50	28.21	4.18	0.00	PERK	106	362 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 over	2434.200	111.01			78.58	28.25	4.18	0.00	PERK	105	230 VERTICAL
2 over	2435.400	101.04			68.62	28.25	4.18	0.00	AVERAGE	105	230 VERTICAL

Item 1, 2 are the fundamental frequency at 2437 MHz.

Channel 11


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 over	2459.200	103.24			70.72	28.32	4.20	0.00	AVERAGE	104	364 VERTICAL
2 over	2463.400	113.40			80.88	28.32	4.20	0.00	PERK	104	364 VERTICAL
3 !	2483.500	52.16	-1.84	54.00	19.57	28.36	4.23	0.00	AVERAGE	104	364 VERTICAL
4 !	2483.500	69.49	-4.51	74.00	36.91	28.36	4.23	0.00	PERK	104	364 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

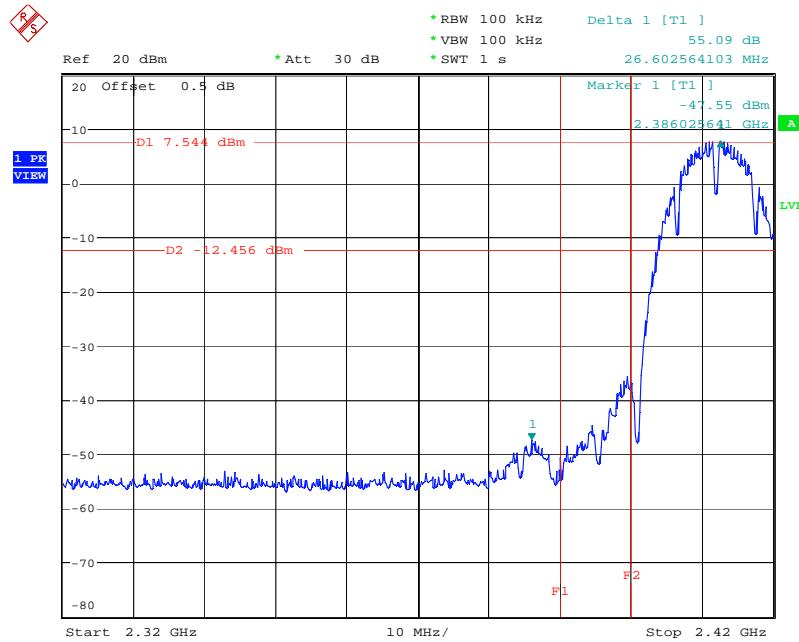For Emission not in Restricted Band
Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz


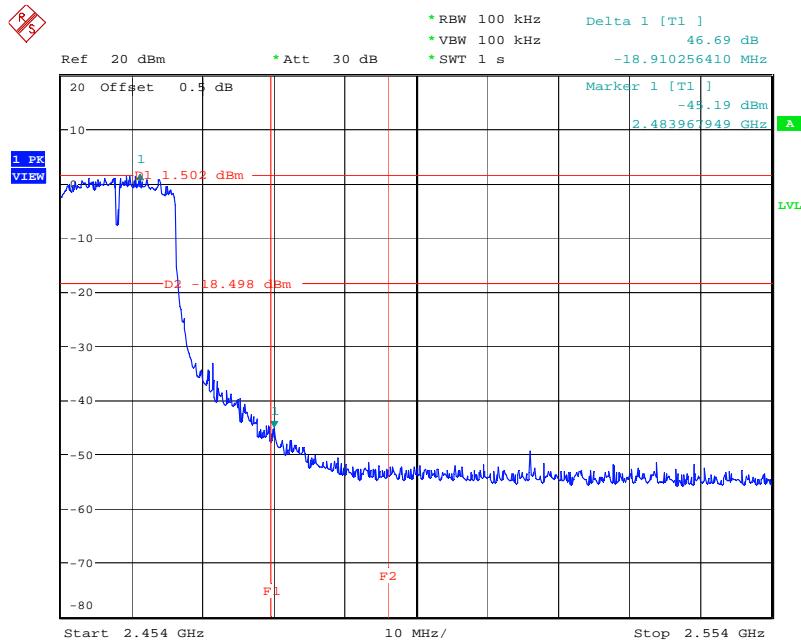
Date: 18.FEB.2008 19:06:46

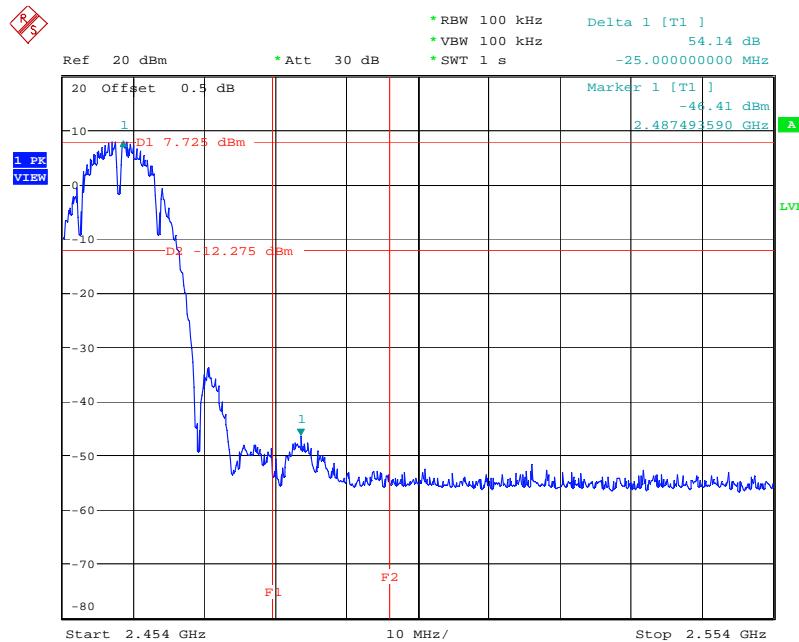High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz


Date: 18.FEB.2008 19:04:31

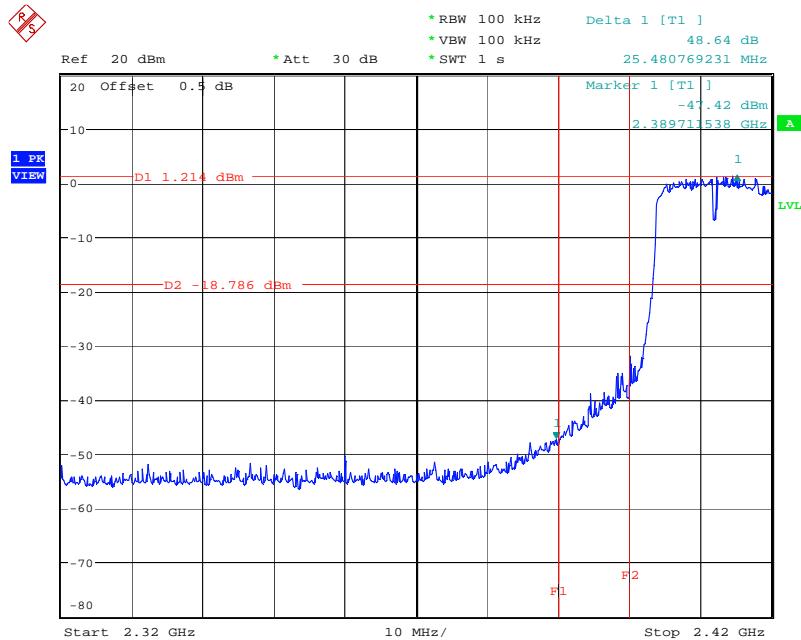Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz


Date: 18.FEB.2008 19:00:15

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz


Date: 18.FEB.2008 19:03:00

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan 14 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.18.2008	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Jan. 14, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 04, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 04, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	:	ISO/IEC 17025:2005
Accreditation Number	:	1190
Originally Accredited	:	December 15, 2003
Effective Period	:	January 10, 2007 to January 09, 2010
Accredited Scope	:	Testing Field, see described in the Appendix
Specific Accreditation Program	:	Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.