

#SPYCLU2 Morse Code Transmitter

1. OPEN THE BATTERY COVER AND SNAP IN A 9V BATTERY.
2. TURN THE "ON/OFF" SWITCH TO "ON" POSITION.
3. PRESS THE "PUSH TO TALK" BUTTON, AND PRESS THE "MORSE CODE" BUTTON AT THE SAME TIME TO TRANSMIT MORSE CODES.
4. RELEASE "PUSH TO TALK" BUTTON FOR RECEIVING MORSE CODES.
5. TURN THE "ON/OFF" SWITCH TO "OFF" POSITION AFTER USING.

MODE D'EMPLOI:

1. OUVRIR LE COUVERCLE DES PILES ET INSTALLER UNE PILE 9 VOLTS.
2. METS L'INTERRUPTEUR "MARCHE/ARRET" SUR LA POSITION "MARCHE".
3. APPUIE SUR LE BOUTON "POUSSE POUR PARLER", APPUIE SUR LE "BOUTON CODE MORSE" EN MEME TEMPS POUR TRANSMETTRE EN MORSE.
4. LACHE LE BOUTON "POUSSE POUR PARLER" POUR RECEVOIR OU LE CODE MORSE.
5. METS L'INTERRUPTEUR "MARCHE/ARRET" SUR LA POSITION "ARRET" APRES UTILISATION.


MADE IN CHINA
FABRIQUE EN CHINE

- DO NOT MIX OLD AND NEW BATTERIES.
- DO NOT MIX ALKALINE, STANDARD (CARBON-ZINC) OR RECHARGEABLE (NICKEL-CADMIUM) BATTERIES.
- NON-RECHARGEABLE BATTERIES ARE NOT TO BE RECHARGED.
- RECHARGEABLE BATTERIES ARE TO BE REMOVED FROM THE TOY BEFORE BEING CHARGED (IF REMOVABLE).
- RECHARGEABLE BATTERIES ARE ONLY TO BE CHARGED UNDER ADULT SUPERVISION (IF REMOVABLE).
- DIFFERENT TYPES OF BATTERIES OR NEW AND USED BATTERIES ARE NOT TO BE MIXED.
- ONLY BATTERIES OF THE SAME OR EQUIVALENT TYPE AS RECOMMENDED ARE TO BE USED.
- BATTERIES ARE TO BE INSERTED WITH THE CORRECT POLARITY.
- EXHAUSTED BATTERIES ARE TO BE REMOVED FROM THE TOY.
- THE SUPPLY TERMINALS ARE TO BE SHORT CIRCUITED.
- THE PACKAGING HAS TO BE KEPT SINCE IT CONTAINS IMPORTANT INFORMATION.
- DO NOT USE RECHARGEABLE BATTERIES.

WARNING:
DO NOT TOUCH OR MODIFY THE INTERNAL COMPONENTS
OTHER THAN REPLACING THE BATTERY.

ATTENTION:
NE PAS TOUCHER OU MODIFIER LES COMPOSANTS
INTERNES EN DEHORS DU CHANGEMENT DES PILES.
REQUIRES 2-9 VOLT ALKALINE BATTERIES (NOT INCLUDED)
FONCTIONNE AVEC 2 PILES ALCALINES DE 9 VOLTS (NON FOURNIES)

**MODIFICATIONS NOT AUTHORIZED BY THE MANUFACTURER
MAY VOID USERS AUTHORITY TO OPERATE THIS DEVICE.**

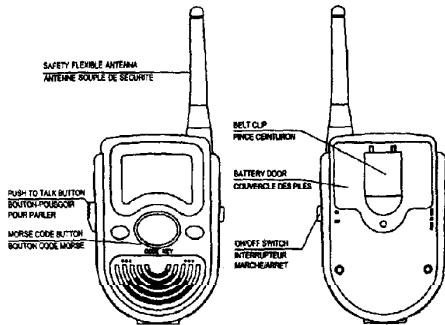

FOR CHILDREN AGES 5 AND UP



HOW TO CHANGE THE BATTERY
1. USE A SCREW DRIVER OPEN THE BAT. COVER (SEE FIG.1)
2. SNAP IN A 9V BATTERY WITH CORRECT POLARITY, AND PLACE INTO THE BAT. COMPARTMENT. (SEE. FIG.2)
3. CLOSE THE BAT. COVER AND USE A SCREW DRIVER TO PLACE THE SCREW ON POSITION. (SEE. FIG.3)

