

Circuit Description of WT-357

RECEIVER:


Signal from antenna, then frequency 49.860MHz selected by the core T1, high frequency amplified and demodulated at Q1, then sent to IC1 by C13 R7 C6 to be audio amplified, then make the speaker work.

SEND:

Sound from MIC, Audio amplified at IC1, then modulate the signal 49.860MHz at high frequency oscillator Q1, then sent by the antenna.

Only watch function.

WT-357

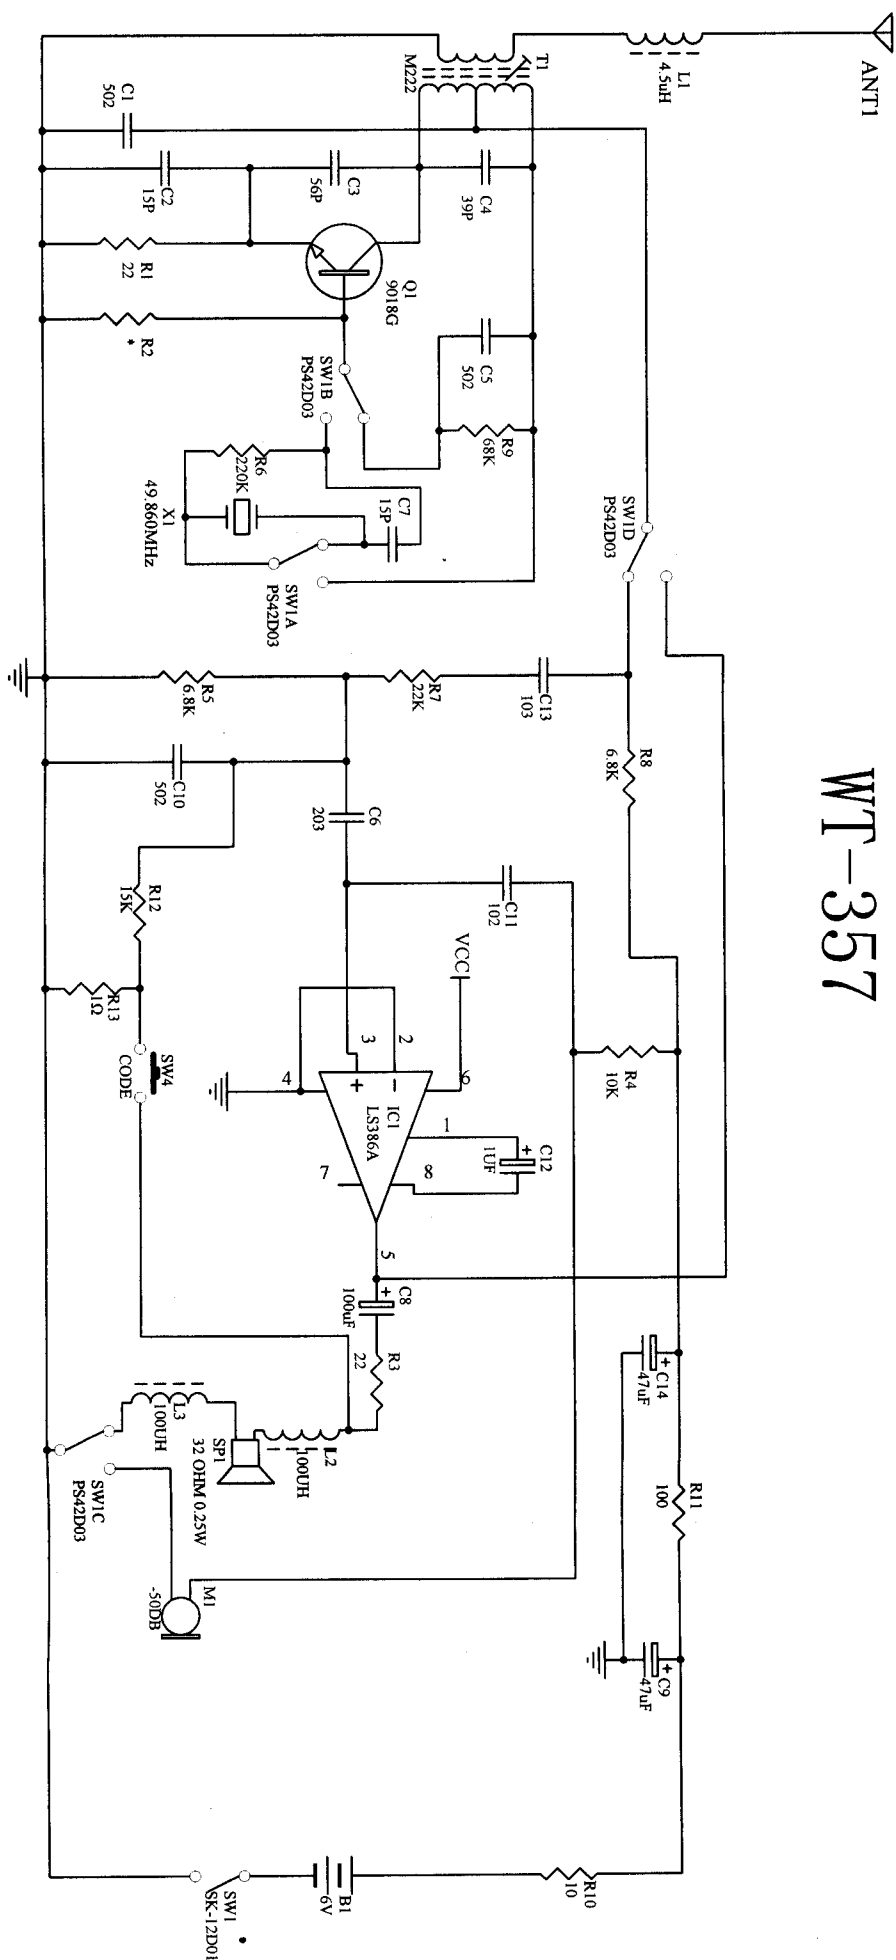

Title	Number	Revision	File
Size: A4	WT-357-1.SCH	Sheet 0 of 0	WT-357-1.SCH
Date: 20-Dec-2003	Time: 14:09:18		
Error: D:\DESIGN EXPLORER			