

## FCC Test Report (NFC)

**Report No.:** RF190111E01-1

**FCC ID:** MQT-FD150

**Test Model:** FD150

**Series Model:** xCL\_WT-50

**Received Date:** Jan. 11, 2019

**Test Date:** Feb. 13 to 15, 2019

**Issued Date:** Feb. 23, 2019

**Applicant:** XAC AUTOMATION CORP.

**Address:** 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK, HSINCHU, TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.

**FCC Registration / Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1      Certificate of Conformity.....</b>	<b>4</b>
<b>2      Summary of Test Results .....</b>	<b>5</b>
2.1    Measurement Uncertainty .....	5
2.2    Modification Record .....	5
<b>3      General Information.....</b>	<b>6</b>
3.1    General Description of EUT (NFC) .....	6
3.2    Description of Test Modes .....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3    Description of Support Units .....	10
3.3.1 Configuration of System under Test .....	11
3.4    General Description of Applied Standards .....	12
<b>4      Test Types and Results .....</b>	<b>13</b>
4.1    Radiated Emission Measurement .....	13
4.1.1 Limits of Radiated Emission Measurement.....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results .....	18
4.2    Conducted Emission Measurement .....	29
4.2.1 Limits of Conducted Emission Measurement.....	29
4.2.2 Test Instruments .....	29
4.2.3 Test Procedures.....	30
4.2.4 Deviation from Test Standard .....	30
4.2.5 Test Setup.....	31
4.2.6 EUT Operating Conditions.....	31
4.2.7 Test Results .....	32
4.3    Frequency Stability .....	34
4.3.1 Limits of Frequency Stability Measurement .....	34
4.3.2 Test Setup.....	34
4.3.3 Test Instruments .....	34
4.3.4 Test Procedure .....	34
4.3.5 Deviation from Test Standard .....	34
4.3.6 EUT Operating Conditions.....	35
4.3.7 Test Result.....	35
4.4    20dB Bandwidth .....	36
4.4.1 Limits of 20dB bandwidth Measurement .....	36
4.4.2 Test Setup.....	36
4.4.3 Test Instruments .....	36
4.4.4 Test Procedures.....	36
4.4.5 Deviation from Test Standard .....	36
4.4.6 EUT Operating Conditions.....	36
4.4.7 Test Results .....	37
<b>5      Pictures of Test Arrangements.....</b>	<b>38</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>39</b>

### Release Control Record

Issue No.	Description	Date Issued
RF190111E01-1	Original release.	Feb. 23, 2019

## 1 Certificate of Conformity

**Product:** Terminal

**Brand:** XAC,First Data

**Test Model:** FD150

**Series Model:** xCL\_WT-50

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** XAC AUTOMATION CORP.

**Test Date:** Feb. 13 to 15, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.225)

47 CFR FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Feb. 23, 2019

Cindy Hsin / Specialist

**Approved by :**  , **Date:** Feb. 23, 2019

May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	PASS	Meet the requirement of limit. Minimum passing margin is -14.83dB at 0.15781MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -75.82dB at 13.56MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	PASS	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	PASS	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -2.6dB at 43.80MHz.
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions	Below 30MHz	3.0 dB
	30MHz ~ 1GHz	5.1 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT (NFC)

Product	Terminal
Brand	XAC,First Data
Test Model	FD150
Series Model	xCL_WT-50
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	ASK
Transfer Rate	Refer to Note
Operating Frequency	13.56MHz
Number of Channel	1
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1 (option)
Data Cable Supplied	NA

Note:

1. WLAN and NFC technology can't transmit at same time.
2. All models are listed as below.

Brand	Model	Remark
XAC	xCL_WT-50	Different appearance
First Data	FD150	For marketing purpose

From the above models, model: **FD150** was selected as representative model for the test and its data was recorded in this report.

3. The EUT must be supplied with a power adapter (option) as following table:

Brand	Model No.	Spec.
DELTA	ADP-36PH B	Input: 100-240Vac, 1A, 50-60Hz Output: 12Vdc, 3A AC Input cable: Unshielded, 1m DC Output cable: Unshielded, 1.8m with one core

4. The antennas provided to the EUT, please refer to the following table:

WLAN					
Brand	Model	Antenna Net Gain (dBi)	Frequency range (MHz)	Antenna Type	Connector Type
ACX	AT3216	1.5	2400~2500	Chip	none
NFC					
Brand	Model	Antenna Net Gain (dBi)	Frequency range (MHz)	Antenna Type	Connector Type
XAC	FD100GT	13	13.56	Wire	none

5. The EUT has one types according to NFC technology as following table:

Mode	Type	Modulation	Data Rate
Active	A	100%, ASK	106 kbit/s

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

One channel was provided to this EUT:

Channel	Frequency (MHz)
1	13.56

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE	PLC	FS	EB	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz  
**FS**: Frequency Stability

**PLC**: Power Line Conducted Emission  
**EB**: 20dB Bandwidth measurement

#### Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

#### Frequency Stability:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

#### 20dB Bandwidth:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested By
RE	23deg. C, 66%RH	120Vac, 60Hz	Steven Chiang
	22deg. C, 71%RH	120Vac, 60Hz	Steven Chiang
PLC	24deg. C, 76%RH	120Vac, 60Hz	Andy Ho
FS	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin
EB	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	SAM Card	NA	NA	NA	NA	Supplied by client
B.	SAM Card	NA	NA	NA	NA	Supplied by client
C.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
D.	Laptop	DELL	P66F	CQNLPC2	FCC DoC	Provided by Lab
E.	Telephone	DAISHO	DS-03	NA	NA	Provided by Lab
F.	Easy Card	NA	NA	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	0.3	Yes	0	Supplied by client (for RF Setup)
2.	USB Cable	1	0.1	Yes	0	Provided by Lab
3.	RS232 Cable	1	1.6	No	0	Supplied by client
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	RJ-11 Cable	1	1.8	No	0	Provided by Lab
6.	DC Cable	1	1.8	No	1	Supplied by client
7.	AC Cable	1	1	No	0	Supplied by client
8.	Mini USB Cable	1	1.1	Yes	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

### 3.3.1 Configuration of System under Test

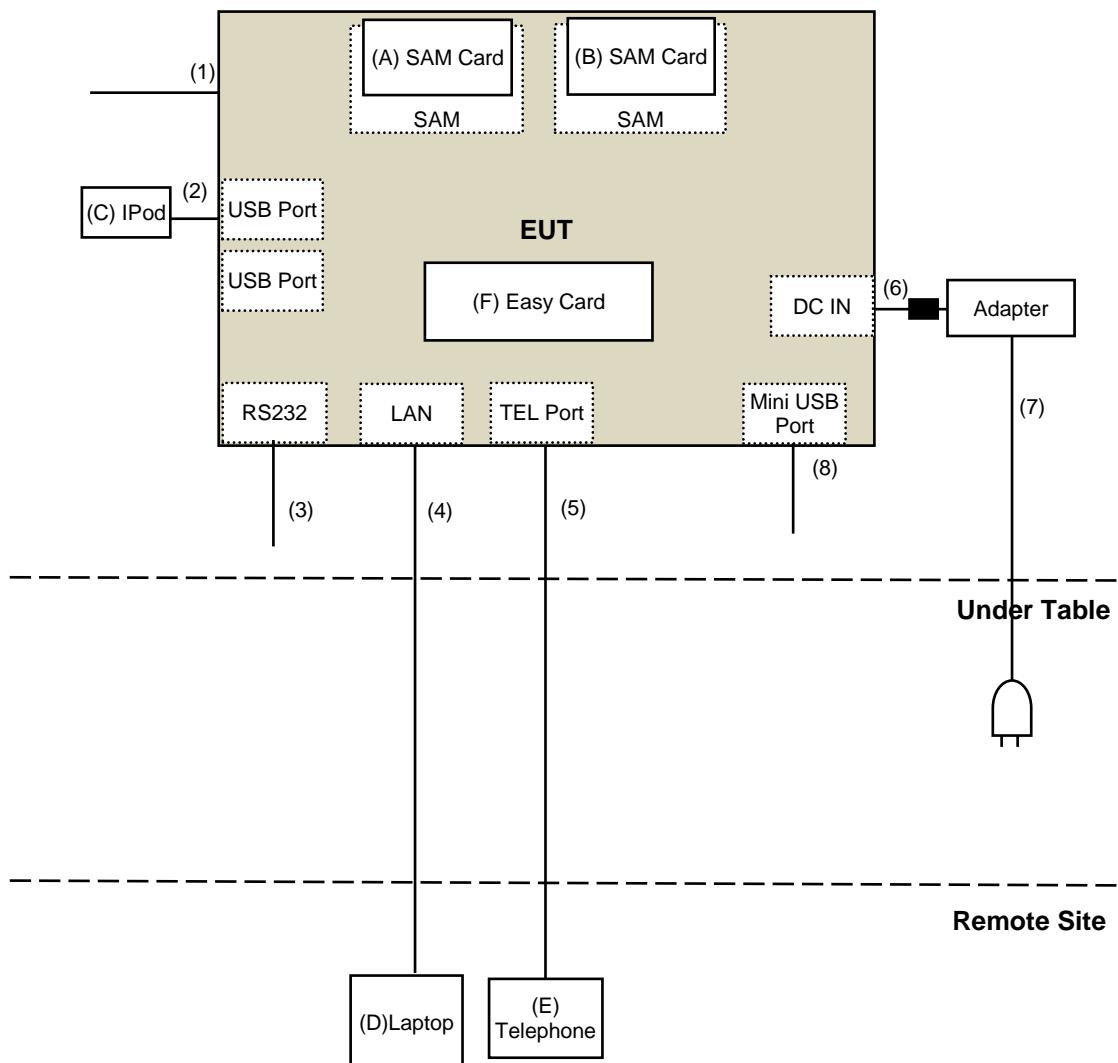

### **3.4 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.225)**

**FCC Part 15, Subpart C (15.215)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>UV</sub>/m) = 20 log Emission level (uV/m).
3. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
4. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

##### For emissions (Below 30MHz)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2018	July 11, 2019
Pre-Amplifier EMCI	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Software	ADT_Radiated V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA

##### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The CANADA Site Registration No. is 20331-1
4. Loop antenna was used for all emissions below 30 MHz.
5. Tested Date: Feb. 13, 2019

**For other test items:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2018	July 11, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2018	Nov. 25, 2019
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. Tested Date: Feb. 14, 2019

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak or Average Detects Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

##### For Radiated emission below 30MHz

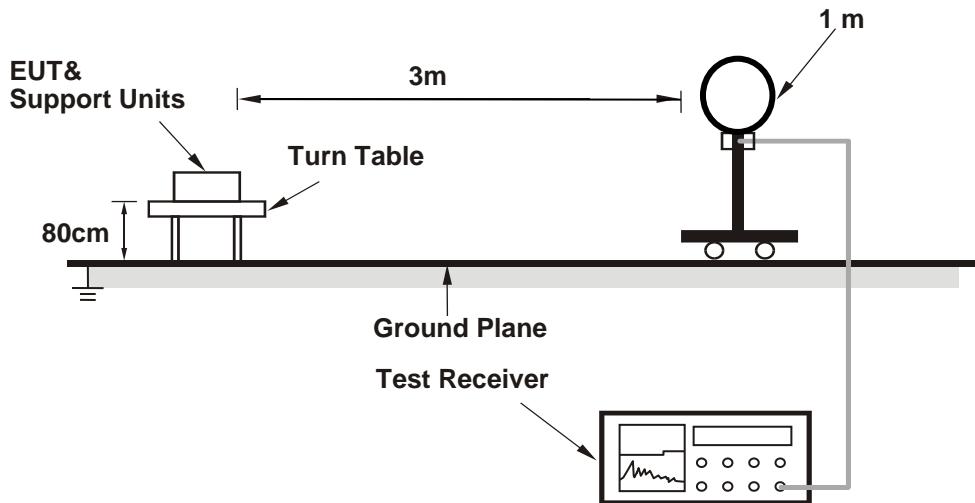

##### For Radiated emission 30MHz to 1GHz

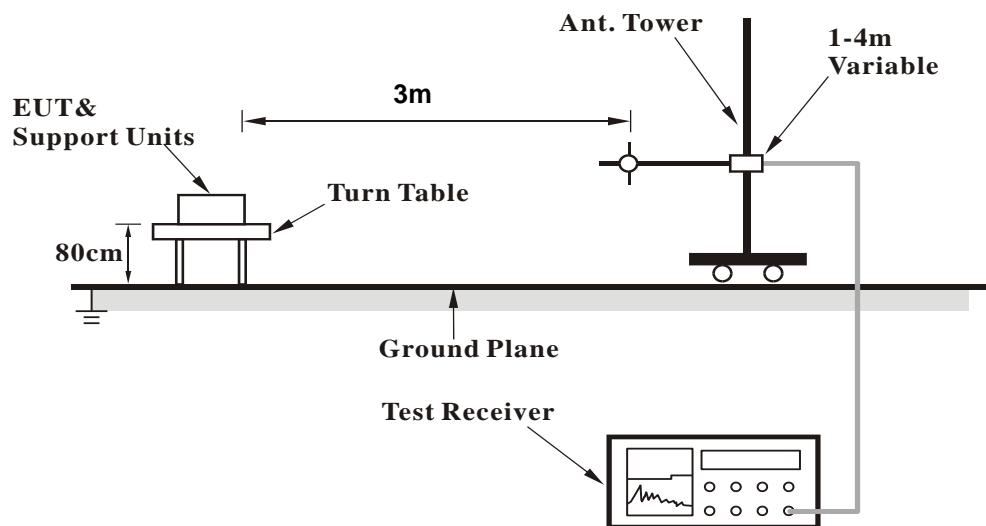

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Type A

Frequency Range	13.110 ~ 14.010MHz	Detector Function	Quasi-Peak
-----------------	--------------------	-------------------	------------

Antenna Polarity & Test Distance: Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.332	35.04 QP	80.50	-45.46	1.00	245	38.44	-3.40
2	13.447	36.80 QP	90.47	-53.67	1.00	360	40.21	-3.41
<b>3</b>	<b>*13.560</b>	<b>48.18 QP</b>	<b>124.00</b>	<b>-75.82</b>	<b>1.00</b>	<b>348</b>	<b>51.61</b>	<b>-3.43</b>
4	13.637	35.35 QP	90.47	-55.12	1.00	360	38.80	-3.45
5	13.796	34.84 QP	80.50	-45.66	1.00	130	38.32	-3.48


**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula
6. " \* ": Fundamental frequency.

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

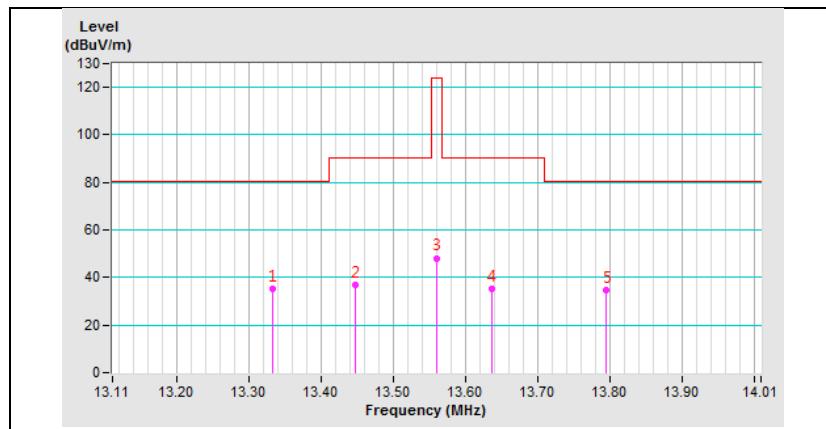

Frequency Range	13.110 ~ 14.010MHz	Detector Function	Quasi-Peak
-----------------	--------------------	-------------------	------------

Antenna Polarity & Test Distance: Perpendicular at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.375	34.81 QP	80.50	-45.69	1.00	229	38.22	-3.41
2	13.446	34.92 QP	90.47	-55.55	1.00	117	38.33	-3.41
3	*13.561	41.70 QP	124.00	-82.30	1.00	82	45.13	-3.43
4	13.618	35.18 QP	90.47	-55.29	1.00	115	38.63	-3.45
5	13.713	34.65 QP	80.50	-45.85	1.00	214	38.12	-3.47


**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula
6. " \* ": Fundamental frequency.

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

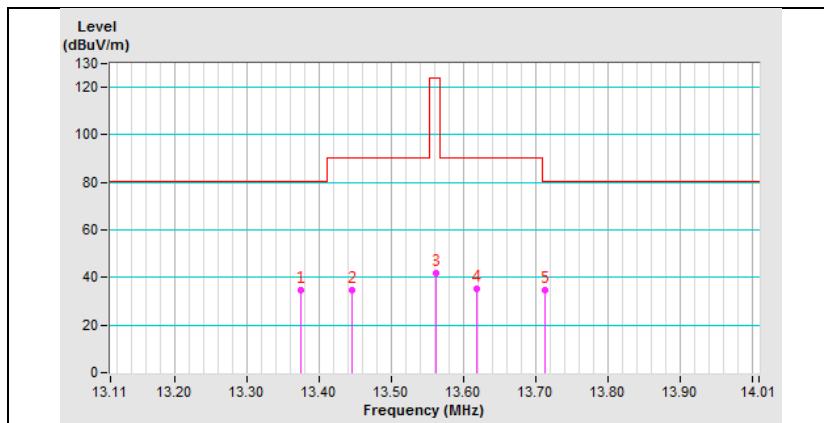

Frequency Range	13.110 ~ 14.010MHz	Detector Function	Quasi-Peak
-----------------	--------------------	-------------------	------------

Antenna Polarity & Test Distance: Ground Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.377	35.65 QP	80.50	-44.85	1.00	237	39.06	-3.41
2	13.498	35.22 QP	90.47	-55.25	1.00	1	38.64	-3.42
3	*13.560	47.17 QP	124.00	-76.83	1.00	360	50.60	-3.43
4	13.656	35.35 QP	90.47	-55.12	1.00	16	38.81	-3.46
5	13.773	35.04 QP	80.50	-45.46	1.00	360	38.52	-3.48


**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula
6. " \* ": Fundamental frequency.

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

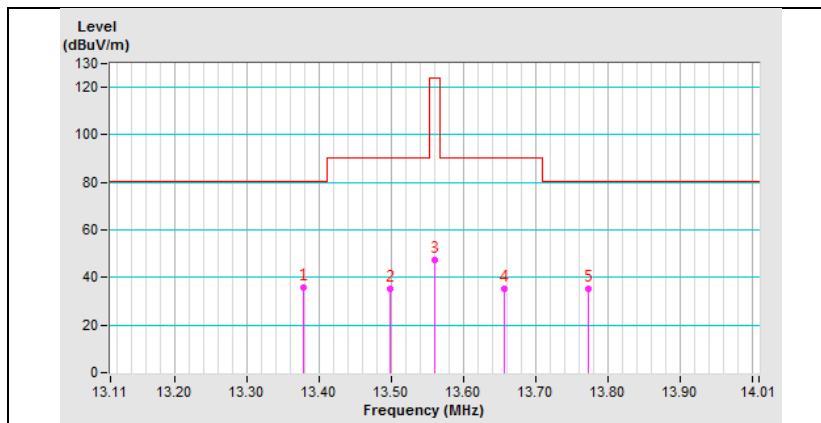


Frequency Range	9kHz ~ 0.15MHz	Detector Function	Average
-----------------	----------------	-------------------	---------

Antenna Polarity & Test Distance: Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.021	46.21 AV	121.15	-74.94	1.00	273	14.62	31.59
2	0.034	42.92 AV	116.96	-74.04	1.00	288	16.22	26.70
3	0.050	47.12 AV	113.62	-66.50	1.00	0	24.17	22.95
4	0.064	41.73 AV	111.47	-69.74	1.00	157	20.63	21.10
5	0.076	38.89 AV	109.98	-71.09	1.00	144	19.36	19.53
6	0.119	33.13 AV	106.09	-72.96	1.00	85	17.54	15.59

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

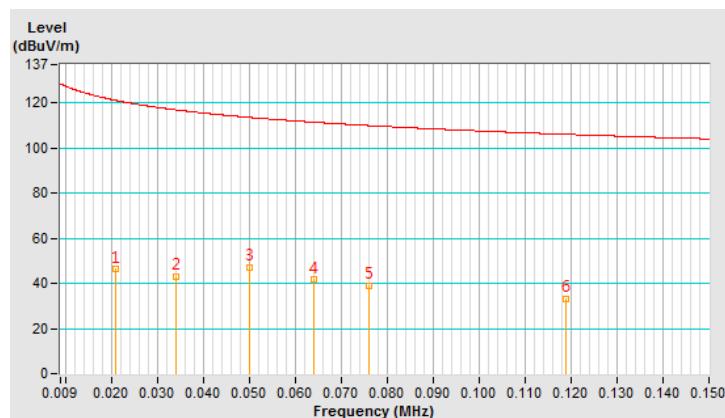


Frequency Range	9kHz ~ 0.15MHz	Detector Function	Quasi-Peak (QP) Average (AV)
-----------------	----------------	-------------------	---------------------------------

Antenna Polarity & Test Distance: Perpendicular at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.032	40.70 AV	117.49	-76.79	1.00 V	10	13.53	27.17
2	0.051	36.48 AV	113.44	-76.96	1.00 V	221	13.66	22.82
3	0.073	39.65 AV	110.33	-70.68	1.00 V	358	19.73	19.92
4	0.107	33.18 QP	107.01	-73.83	1.00 V	322	17.09	16.09
5	0.123	30.84 AV	105.80	-74.96	1.00 V	234	15.42	15.42
6	0.137	29.98 AV	104.87	-74.89	1.00 V	255	15.13	14.85

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

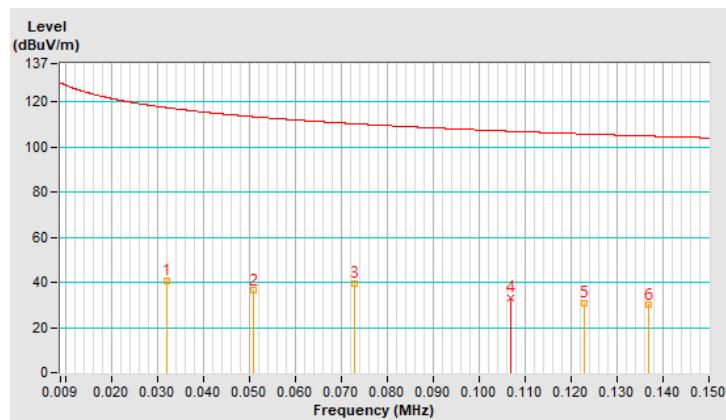


Frequency Range	9kHz ~ 0.15MHz	Detector Function	Average
-----------------	----------------	-------------------	---------

Antenna Polarity & Test Distance: Ground Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.027	46.98 AV	118.96	-71.98	1.00	104	18.02	28.96
2	0.045	45.22 AV	114.53	-69.31	1.00	322	21.11	24.11
3	0.059	43.98 AV	112.18	-68.20	1.00	105	22.22	21.76
4	0.087	36.18 AV	108.81	-72.63	1.00	107	18.10	18.08
5	0.121	31.41 AV	105.94	-74.53	1.00	342	15.90	15.51
6	0.139	29.53 AV	104.74	-75.21	1.00	143	14.77	14.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

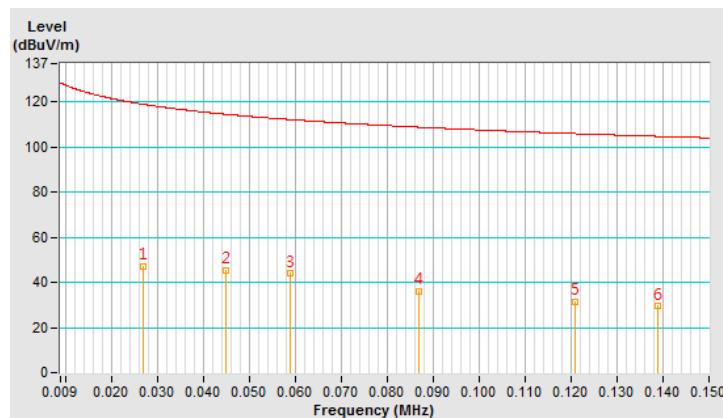


Frequency Range	0.15MHz ~ 30MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

Antenna Polarity & Test Distance: Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.431	19.55 QP	69.50	-49.95	1.00	360	23.11	-3.56
2	10.050	16.95 QP	69.50	-52.55	1.00	214	19.77	-2.82
3	12.747	19.43 QP	69.50	-50.07	1.00	271	22.72	-3.29
4	14.408	19.05 QP	69.50	-50.45	1.00	294	22.63	-3.58
5	23.131	21.23 QP	69.50	-48.27	1.00	192	25.32	-4.09
6	24.352	26.57 QP	69.50	-42.93	1.00	206	30.48	-3.91

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

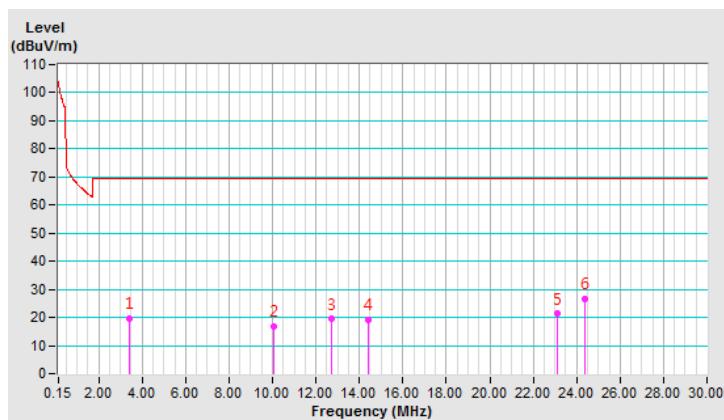


Frequency Range	0.15MHz ~ 30MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

Antenna Polarity & Test Distance: Perpendicular at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.717	18.24 QP	69.50	-51.26	1.00	4	21.81	-3.57
2	7.484	15.96 QP	69.50	-53.54	1.00	268	19.20	-3.24
3	11.832	18.23 QP	69.50	-51.27	1.00	169	21.36	-3.13
4	19.842	14.42 QP	69.50	-55.08	1.00	174	18.95	-4.53
5	23.127	19.71 QP	69.50	-49.79	1.00	134	23.80	-4.09
6	23.864	20.41 QP	69.50	-49.09	1.00	206	24.39	-3.98

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

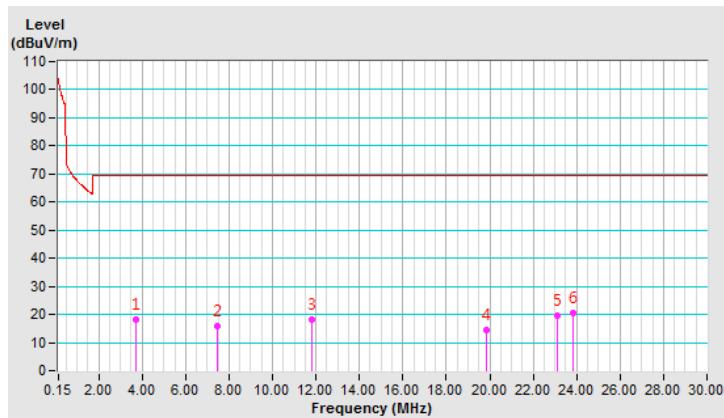


Frequency Range	0.15MHz ~ 30MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

Antenna Polarity & Test Distance: Ground Parallel at 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.575	20.38 QP	69.50	-49.12	1.00	208	23.94	-3.56
2	7.788	16.28 QP	69.50	-53.22	1.00	0	19.47	-3.19
3	12.441	19.63 QP	69.50	-49.87	1.00	88	22.87	-3.24
4	19.341	15.48 QP	69.50	-54.02	1.00	234	19.93	-4.45
5	23.129	21.70 QP	69.50	-47.80	1.00	118	25.79	-4.09
6	24.350	25.30 QP	69.50	-44.20	1.00	135	29.21	-3.91

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

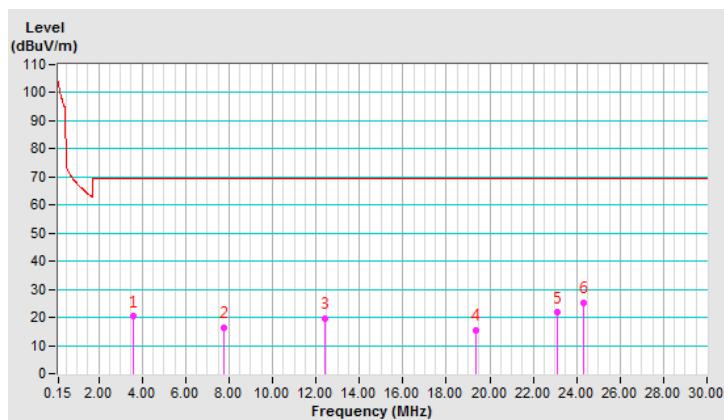


Frequency Range	30MHz ~ 1000MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.03	34.9 QP	40.0	-5.1	3.00 H	4	48.4	-13.5
2	101.90	36.5 QP	43.5	-7.0	2.00 H	103	48.7	-12.2
3	189.86	35.6 QP	43.5	-7.9	1.00 H	83	45.9	-10.3
4	250.02	36.4 QP	46.0	-9.6	1.00 H	154	45.3	-8.9
5	375.02	43.2 QP	46.0	-2.8	1.00 H	43	48.4	-5.2
6	500.04	37.1 QP	46.0	-8.9	1.00 H	360	39.1	-2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

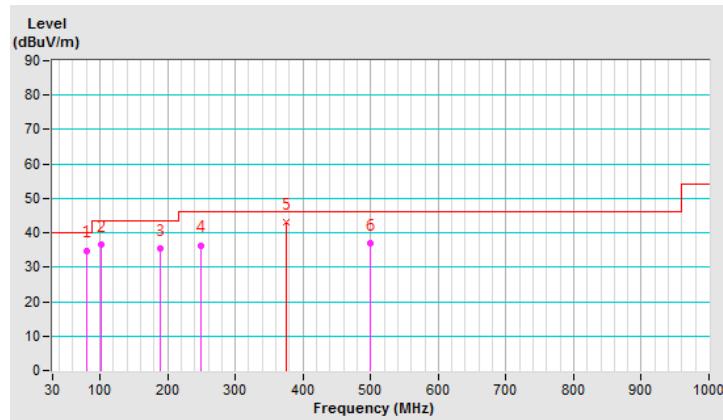


Frequency Range	30MHz ~ 1000MHz	Detector Function	Quasi-Peak
-----------------	-----------------	-------------------	------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.80	37.4 QP	40.0	-2.6	1.00 V	334	46.6	-9.2
2	66.33	36.6 QP	40.0	-3.4	1.00 V	179	46.7	-10.1
3	77.21	34.7 QP	40.0	-5.3	1.00 V	140	47.6	-12.9
4	98.43	33.8 QP	43.5	-9.7	1.00 V	26	46.5	-12.7
5	375.03	39.1 QP	46.0	-6.9	1.00 V	360	44.3	-5.2
6	500.04	35.7 QP	46.0	-10.3	2.00 V	354	37.7	-2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

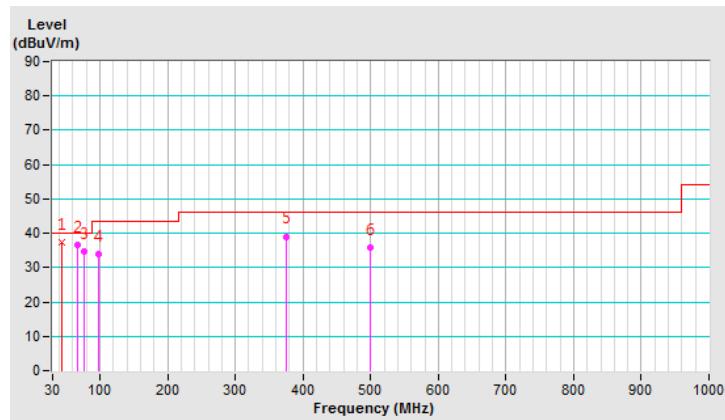

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Feb. 15, 2019

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

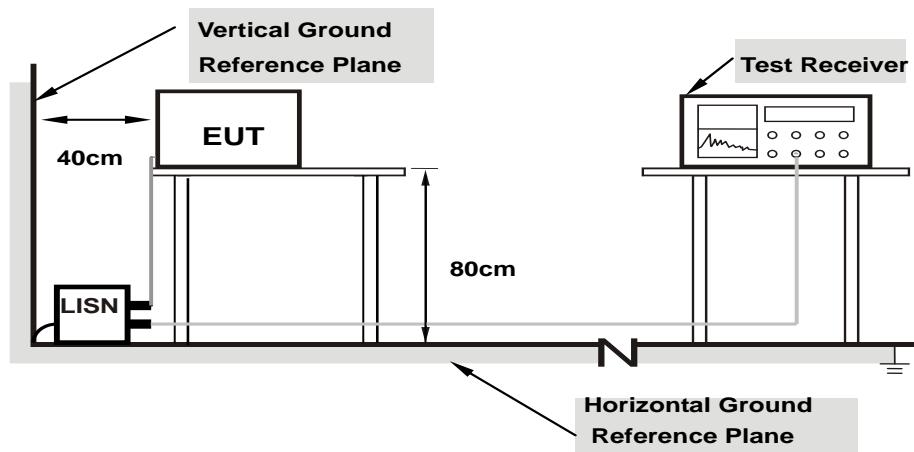

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions


Same as 4.1.6.

#### 4.2.7 Test Results

Phase		Line (L)		Detector Function		Quasi-Peak (QP) / Average (AV)				
No	Freq.	Corr.	Reading Value	Emission Level		Limit		Margin		
		Factor	[dB (uV)]	[dB (uV)]		[dB (uV)]		(dB)		
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.02	38.60	20.48	48.62	30.50	66.00	56.00	-17.38	-25.50
2	0.17734	10.03	35.64	17.66	45.67	27.69	64.61	54.61	-18.94	-26.92
3	0.25938	10.05	24.36	6.72	34.41	16.77	61.45	51.45	-27.04	-34.68
4	0.38828	10.07	22.06	13.52	32.13	23.59	58.10	48.10	-25.97	-24.51
5	15.49609	10.83	21.11	16.94	31.94	27.77	60.00	50.00	-28.06	-22.23
6	21.66406	11.09	24.30	21.83	35.39	32.92	60.00	50.00	-24.61	-17.08

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

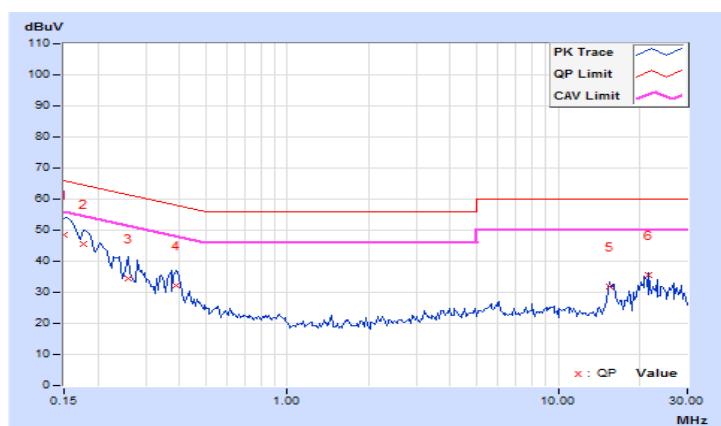

Phase	Neutral (N)		Detector Function		Quasi-Peak (QP) / Average (AV)			
-------	-------------	--	-------------------	--	--------------------------------	--	--	--

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	<b>0.15781</b>	<b>9.93</b>	<b>40.82</b>	<b>22.94</b>	<b>50.75</b>	<b>32.87</b>	<b>65.58</b>	<b>55.58</b>	<b>-14.83</b>	<b>-22.71</b>
2	0.18125	9.94	36.68	19.67	46.62	29.61	64.43	54.43	-17.81	-24.82
3	0.20469	9.94	32.32	15.39	42.26	25.33	63.42	53.42	-21.16	-28.09
4	0.23594	9.94	27.32	10.30	37.26	20.24	62.24	52.24	-24.98	-32.00
5	0.39609	9.96	22.00	13.27	31.96	23.23	57.93	47.93	-25.97	-24.70
6	21.66406	10.89	24.48	21.95	35.37	32.84	60.00	50.00	-24.63	-17.16

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




## 4.3 Frequency Stability

### 4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 4.3.2 Test Setup

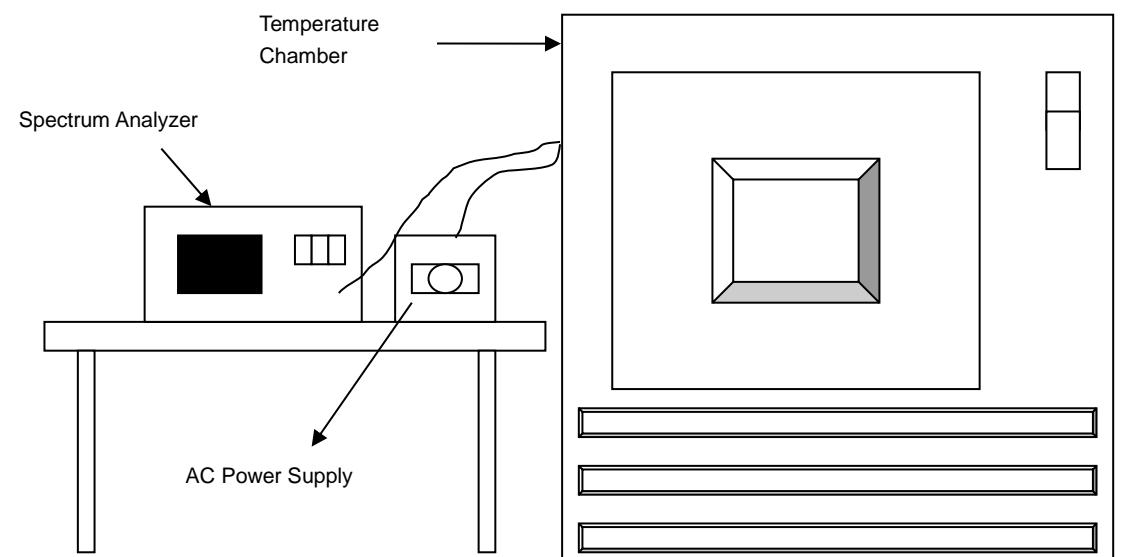

### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

#### 4.3.7 Test Result

Frequency Stability Versus Temp.									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.55993	-0.00052	13.55992	-0.00059	13.55992	-0.00059	13.55994	-0.00044
40	120	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044
30	120	13.55998	-0.00015	13.55998	-0.00015	13.55997	-0.00022	13.55999	-0.00007
20	120	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015
10	120	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55995	-0.00037
0	120	13.55995	-0.00037	13.55996	-0.00029	13.55994	-0.00044	13.55994	-0.00044
-10	120	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56006	0.00044
-20	120	13.55996	-0.00029	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
-30	120	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56003	0.00022


Frequency Stability Versus Voltage									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015
	120	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015
	102	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015

## 4.4 20dB Bandwidth

### 4.4.1 Limits of 20dB BANDWIDTH Measurement

The 20dB bandwidth shall be specified in operating frequency band.

### 4.4.2 Test Setup

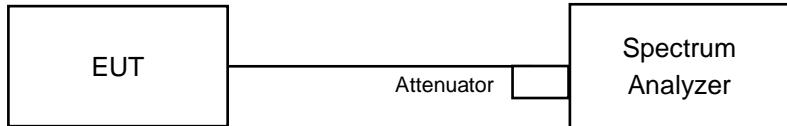

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.4.5 Deviation from Test Standard

No deviation.


### 4.4.6 EUT Operating Conditions

Same as Item 4.1.6.

#### 4.4.7 Test Results

##### Type A

20dBc Point (Low) (MHz)	20dBc Point (High) (MHz)	Operating Frequency Band (MHz)	Pass/Fail
13.34	13.77	13.11 – 14.01	Pass

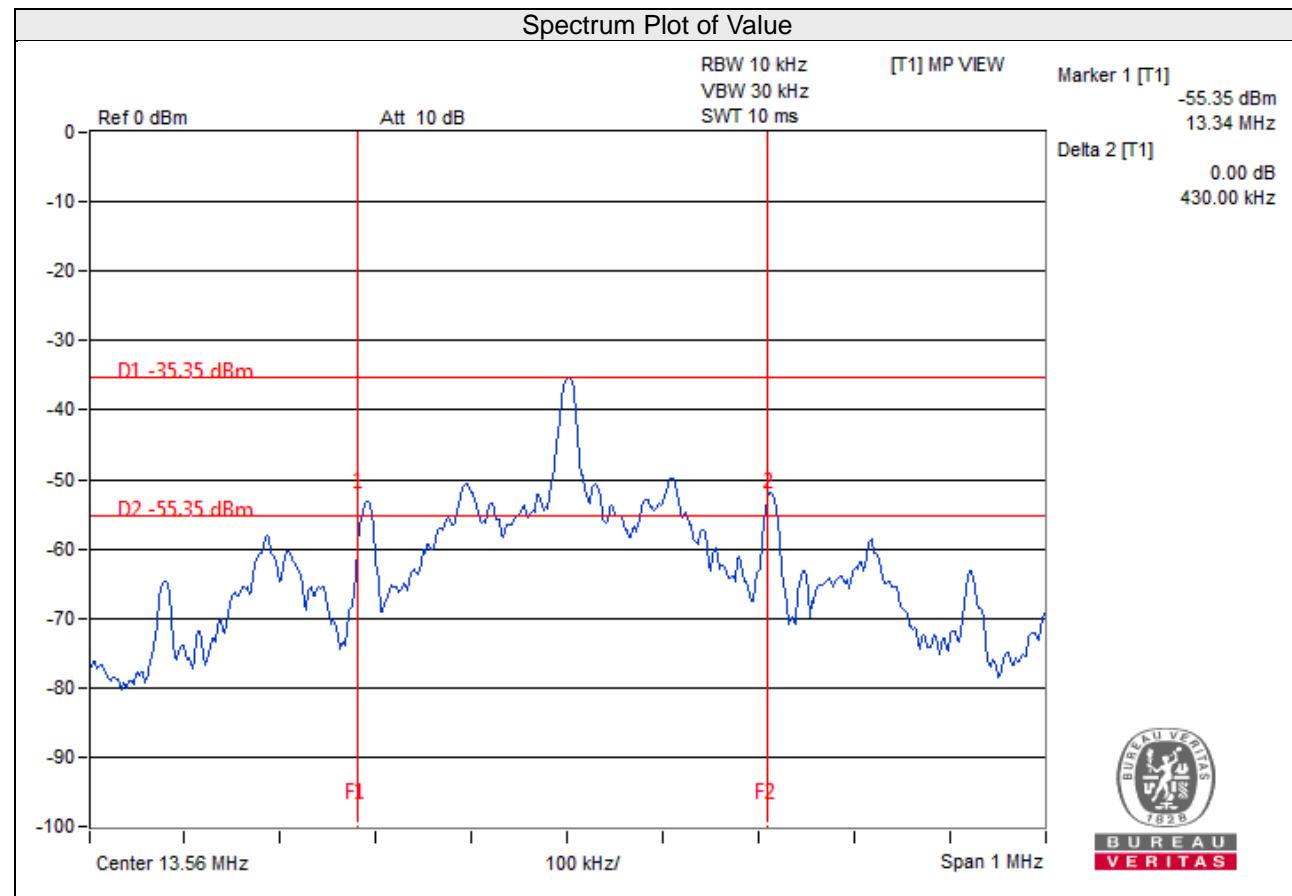

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---