


SCALE 3/2


P/N 189260000

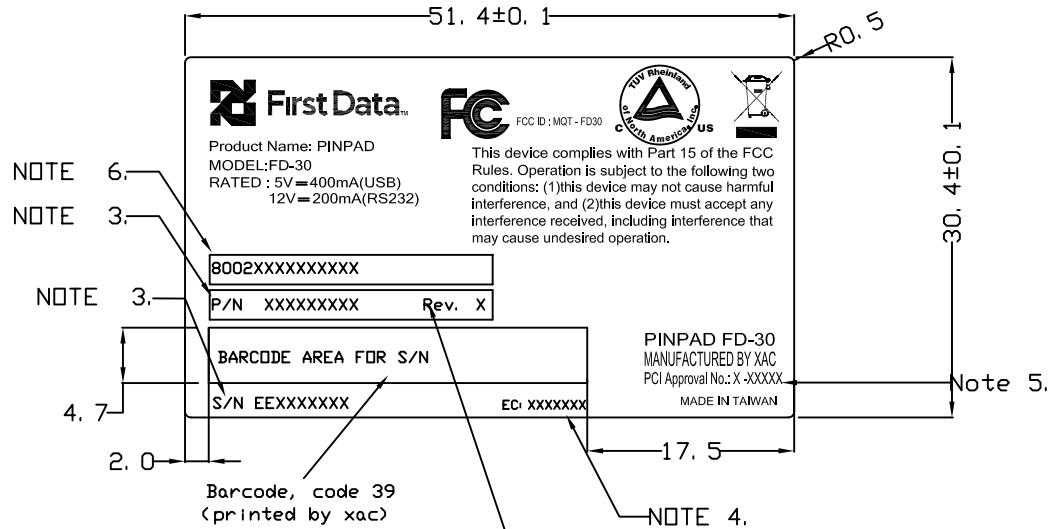


NOTES

- 1.) PRINTED BY XAC
THE FONT SIZE IS APPROXIMATELY 1.5MM IN HEIGHT WITH ARIAL NORMAL STYLE.
ALL TEXT PRINTED ON PRODUCTION LINE MUST BE CORRECT AND LEGIBLE.
- 2.) LABEL MARKING TO COMPLY WITH UL'S RECOGNIZED COMPONENT MARKING AND LABELING SYSTEMS. ALL LABEL MATERIAL AND ADHESIVE MUST BE UL COMPLIANT/CERTIFIED.
- 3.) 'P/N', 'REV.', 'S/N', ARE PRINTED BY XAC
P/N: XXXXXXXX
SERIAL NUMBER: XXXXXXXX(9 DIGITS)
1st Digit: Product model identifier; A,B,C,D,E, etc.; X=FD-30
2nd Digit: Configuration variables will be specified by the build requisition form submitted to the vendor with go ahead Sub-Po.
E= FD-10C first production configuration.
3rd Digit: Build Year; 6=2006, 7=2007, 8=2008, 9=2009, etc. following.
4th Digit: Build Month; 1~9, A~C=Jan. ~Dec.
5th to 9th Digits: Serial number sequence; Resets By The Month.
- 4.) EC: YYMMDD(7 DIGITS) , PRINTED BY XAC
YY: STAND FOR YEAR(00~99), EX: 06(2006), 07(2007), etc.
MM: STAND FOR MONTH(01~12), EX: 01(JANUARY), 02(FEBRUARY), etc.
DD: STAND FOR DATE(01~31)
S: STAND FOR SERIAL NUMBER(1~9), FOR XAC SHIPPING CONTROL
- 5.) For PCI PED Approval Number
- 6.) For Hardware Version Number (PCI Requirement), PRINTED BY XAC
Please refer to 8002 PINPAD Model Number Description

LINER, ROLL TYPE (NOTE 5)

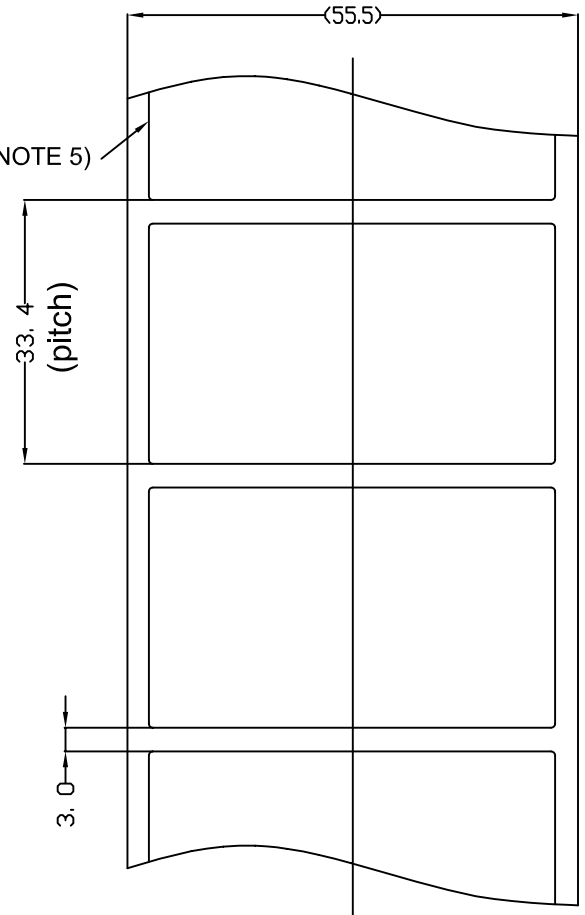

LABEL AND LINER ASS'Y

					UNLESS OTHERWISE SPECIFIED TOLERANCES ARE :	MODEL NO 8002R				 XAC Automation Corp.	
					X. ±0.35 ANGLE ±0.5° .X ±0.20 RADIUS R0.5 .XX ±0.10 .XXX±0.05	APPROVED	DATE	DO NOT SCALE DRAWING		TITLE LABEL ASS'Y RATING FD-30(ROHS)	
						CHECKED	DATE				
								THIRD ANGLE PROJECTION			
REV LTR	DATE	REV. DESCRIPTION	DESIGNER	APPROVED	FINISH : SEE NOTE	DESIGNER Suechung_tsal	DATE 2009/03/26	PAPER SIZE: A4		DWG NO. 189260000B01	VER. B01
A		B	C	D	E	F		G		H	I