



## LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.

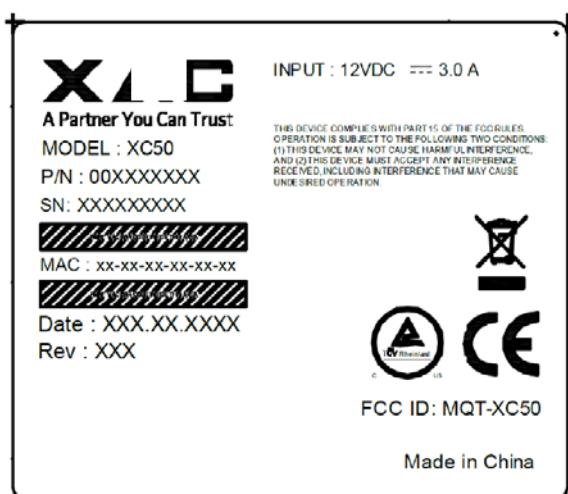

FCC ID: MQT-XC50

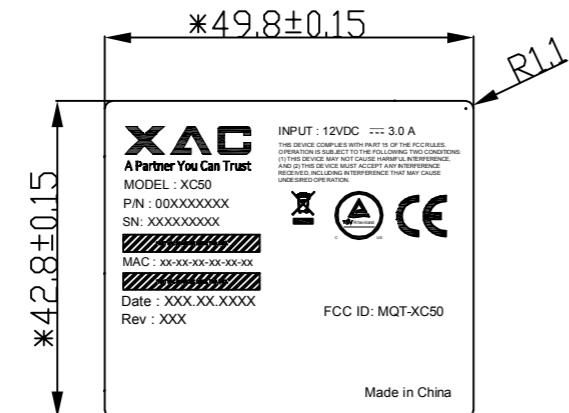

TABLE

Item	Part No.	Part Description (Model name )	FCC ID
1	002300020	XC50	MQT-XC50
2	XXXXXXX	XC50-M	XXX-XXXX
3			

## NOTES

- 1.) SURFACE MATERIAL: PET 0.05mm THK.(+/-10%) WITH BACK ACRYLIC ADHESIVE.
- 2.) PRINT: PERMANENT BLACK OPAQUE INK.
- 3.) FINISH: SURFACE WITH PET COATING.
- 4.) TOTAL THICKNESS TO BE 0.10±0.02mm.
- 5.) LINER SPEC: ROLL TYPE, GLASSING PAPER, 82 gw/m (REF.) SURFACE WITH SILICON COATING.
- 6.) LABEL MARKING TO COMPLY WITH UL'S RECOGNIZED COMPONENT MARKING AND LABELING SYSTEMS. ALL LABEL MATERIAL AND ADHESIVE MUST BE UL COMPLIANT/CERTIFIED
- 7.) FINISHED: MEET XAC's RoHS REQUIREMENT
- 8.) BLANK LABEL USE: P/N 241902000
- 9.) MODEL & P/N & INPUT TEXT HEIGHT 1.4MM
- 10.) Rev:XXX : XXX is BOM VERSION , TEXT HEIGHT 1.4MM
- 11.) CHARACTER S/N XXXXXXXXXX BY XAC, 10 DIGITS, TEXT HEIGHT=1.4MM.
- 12.) CHARACTER MAC XX-XX-XX-XX-XX-XX BY XAC, 17DIGITS, TEXT HEIGHT=1.4MM.
- 14.) TO BE PRINTED IN 3 OF 9 BARCODE SYMBOLOGY. BARCODE HIGHT 2.5MM MIN.
- 15.) DATE: XXX XX XXXX , TEXT HEIGHT 1.4MM ,PRINTING BY XAC. EX: May 18 2014
  - YEAR
  - DAY
  - MONTH

△ 2						UNLESS OTHERWISE SPECIFIED TOLERANCES ARE :	MODEL NO XC50		0 ← mm → 25	DO NOT SCALE DRAWING	XAC Automation Corp. A Partner You Can Trust
						X. ' 0.35 ANGLE ' 0.5~ .X. ' 0.20 RADIUS R0.5 .XX ' 0.10 .XXX ' 0.05	APPROVED	DATE			
△ 1						MATERIAL : SEE NOTE	CHECKED	DATE	THIRD ANGLE PROJECTION	TITLE LABEL ASS'Y RATING XC50(RoHS)	
						FINISH : SEE NOTE	DESIGNER	DATE 08/07/17			
REV LTR	DATE	EC NO.	REV. DESCRIPTION	DESIGNER	APPROVED	PAPER SIZE: A3	DWG NO. 189610000	VER. A01			