

Nemko Korea Co., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Manufacturer:****Hansol Electronics Inc.****#27-29, Hanchun-ri, Ducksan-Myun,****Jinchun-Kun, Choongbuk, Korea****Attn : Mr. S. P. Yang****Dates of Issue : October 26, 2001****Test Report No. : NK2BE617****Test Site : Nemko Korea Co., Ltd.****EMC site, Korea****FCC ID****MSAB17BF****Brand Name*****Hansol*****CONTACT PERSON****Hansol Electronics Inc.****#27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun,****Choobuk, Korea****Mr. S. P. Yang****Telephone No. : +82 43 530 8503**

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:


LCD Monitor

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Tested By : T. H. Ryu
Engineer



Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
GENERAL TEST CONDITION	5
DESCRIPTION OF TEST (Conducted Emissions)	7
DESCRIPTION OF TEST (Radiated Emissions)	8
TEST DATA (Conducted Emissions)	9
TEST DATA (Radiated Emissions)	12
PLOT OF EMISSION	15
SAMPLE CALCULATIONS	21
ACCURACY of MEASUREMENT	22
TEST EQUIPMENT	23
RECOMMENDATION/CONCLUSION	24
APPENDIX A - LABELLING REQUIREMENTS	25
APPENDIX B - CIRCUIT DIAGRAM	26
APPENDIX C - PHOTOGRAPHS of TEST SET-UP	27
APPENDIX D - EUT PHOTOGRAPHS	29
APPENDIX E - USER'S MANUAL	57
APPENDIX F - SCHEMATIC DIAGRAM	58

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

Responsible Party* :

Hansol Electronics Inc.

Contact Person :

Mr. S. P. Yang

Tel No.: +82 43 530 8503

Manufacturer :

Hansol Electronics Inc.

#27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun,
Choongbuk, Korea

Tel No.: +82 43 530 8503

- FCC ID: MSAB17BF
- Model: B17BF
- Brand Name: Hansol
- EUT Type: LCD Monitor
- Adapter Voltage: 100 - 240V AC, 60/50Hz
12V DC, 4.5A

- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: October 8, 2001 to October 11, 2001
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2BE617

** NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.*

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Hansol Electronics Inc.**

FCC ID : **MSAB17BF, LCD Monitor.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory** .

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.



Nemko Korea Co., Ltd.
OPEN AREA TEST SITE
300-2, Osan-Ri, Mohyun-Myun, Yongin-City Kyungki-Do, KOREA 449-852
Tel)+82-31-322-2333
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

TEST CONDITIONS & EUT INFORMATION

Operating During Test

The EUT was connected to PC and the monitor was displayed "H" pattern on the screen. And the EUT was set to video resolution 1280*1024, vertical refresh rate 75Hz. The "Worst Case" test mode was applied and recorded.

Support Equipment

PC	LG , Model: R70 1.8m unshielded AC power cable	S/N: 102KIO1874
Monitor	Hansol, FCC ID: MSAB17BF 1.8m unshielded AC power cable 1.5m unshielded DC cable with ferrite core 1.8m shielded D-sub cable 2.0m unshielded phone Jack with 2 ferrite core	S/N: N/A
Keyboard	HP, Model: KB-9970 1.8m shield Din cable	S/N: 1B 2800003B
PS/2 Mouse	HP, Model: M-S34 1.8m shield Din cable	S/N: LZC00454589
Speaker	Kwoonsori, Model:SPK-101 2.0m unshielded Phone Jack	S/N: N/A
Printer	HP, Model: C4562K 1.8m unshielded AC power cable 1.2m Shield D-sub cable	S/N: SG74T1C206

EUT Information

Clock	12MHz(X1), 14.316MHz(X2)
Chipset(s)	EMH1, AD9884AKS-140
Horizontal Frequency	79.9kHz(Max)
Vertical Frequency	75Hz(Max)
LCD Panel	L170E3 / Acer Display Technology Inc. HT17E11-100 / HYUNDAI LTM170EH-L01 / SAMSUNG
AC Adapter	F19603A / ILAN Electronics Ltd. EA1050A / EDAC Power Electronics., Ltd. AD-5412 / SAMSUNG
Inverter	GH018H / Green C&C Tech Co., Ltd. SIC1801 / SAMSUNG GH059A / Green C&C Tech Co., Ltd. SIC1802 / SAMSUNG
	FLI-17401 / HYNDAI FLI-17402 / HYNDAI
Main Board	H710 / Hansol
Control Board	530F / Sprite Electronics Corp.
Port(s)	VGA

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and PMM LISN L3-32 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the PMM LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

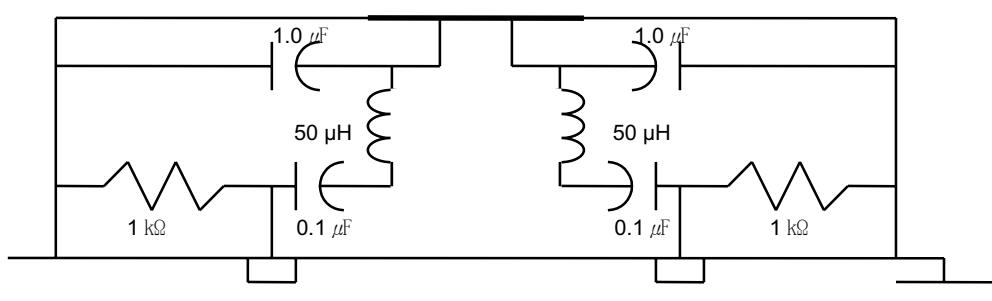


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.(Rohde Schwarz HL025) The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

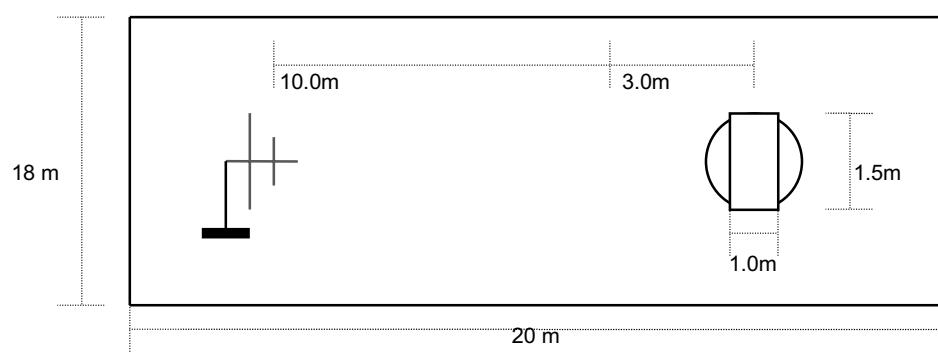


Fig. 3. Dimensions of Outdoor Test Site

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF****Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)**

FREQ (MHz)	LEVEL(dB μ V)	LINE	LIMIT(μ V)	(μ V)	MARGIN*(dB)
0.45	35.4	N	250	58.88	12.6
0.51	33.3	N	250	46.24	14.7
0.73	31.1	N	250	35.89	16.9
0.79	31.5	N	250	37.58	16.5
1.06	29.6	N	250	30.20	18.4
3.12	33.2	N	250	45.71	14.8

Table 1. Line Conducted Emissions Tabulated Data***NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250 μ V from 450 kHz to 30MHz.
4. LINE : L =Line , N = Neutral
5. AC Adapter : F19603A / ILAN Electronics Ltd.
- LCD Panel: L170E3 / Acer Display Technology Inc.
- Inverter : GH018H /Green C&C Tech Co., Ltd., SIC1801 /Samsung

(*Worst case-data recorded)


Tested by T. H. Ryu

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF****Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)**

FREQ (MHz)	LEVEL(dB μ V)	LINE	LIMIT(μ V)	(μ V)	MARGIN*(dB)
0.46	31.9	N	250	39.36	16.1
1.19	36.6	L	250	67.61	11.4
1.59	37.0	L	250	70.79	11.0
1.82	37.4	L	250	74.13	10.6
2.11	44.0	L	250	158.49	4.0
3.01	33.8	L	250	48.98	14.2

Table 2. Line Conducted Emissions Tabulated Data****NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250 μ V from 450 kHz to 30MHz.
4. LINE : L =Line , N = Neutral

**5.AC Adapter : EA1050A / EDAC Power Electronics., Ltd.

LCD Panel: HT17E11-100 / Hyundai

Inverter : GH059A /Green C&C Tech Co., Ltd., SIC1802 /Samsung

(*Worst case-data recorded)

by he
Tested by T. H. Ryu

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF****Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)**

FREQ (MHz)	LEVEL(dB μ V)	LINE	LIMIT(μ V)	(μ V)	MARGIN*(dB)
0.58	38.2	L	250	81.28	9.8
0.64	37.9	N	250	78.52	10.1
1.02	37.3	N	250	73.28	10.7
1.41	38.0	L	250	79.43	10.0
2.24	38.4	L	250	83.18	9.6
2.62	38.2	L	250	81.28	9.8

Table 3. Line Conducted Emissions Tabulated Data*****NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250 μ V from 450 kHz to 30MHz.

4. LINE : L =Line , N = Neutral

***5.AC Adapter : AD-5412 / Samsung

LCD Panel: LTM170EH-L01 / Samsung

Inverter : FLI-17401 /Hyundai, FLI-17402 /Hyundai (*Worst case-data recorded)

by hy
Tested by T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF

Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)

Frequency (MHz)	Reading (dB μ V)	Pol (H/V)	AF+CL+Amp (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
127.97	40.2	H	-16.1	24.1	43.5	19.4
249.22	33.6	H	-12.5	21.1	46.0	24.9
404.22	33.6	H	-8.6	25.0	46.0	21.0
540.22	35.7	H	-5.2	30.5	46.0	15.5
675.05	21.8	H	-1.6	20.2	46.0	25.8
773.99	24.7	H	1.0	25.6	46.0	20.4

Table 4. Radiated Measurements at 3meters*

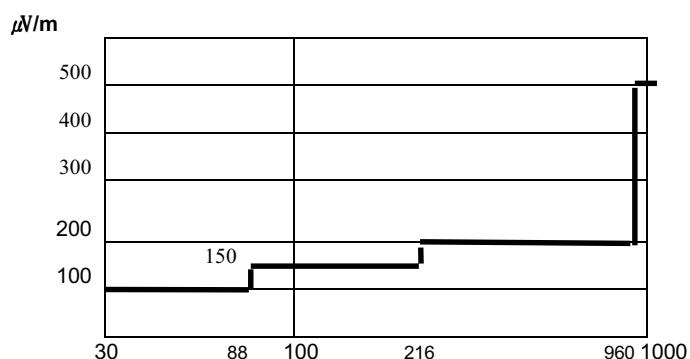


Fig. 4. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. Pol. H =Horizontal V=Vertical
2. AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

*4.AC Adapter : F19603A / ILAN Electronics Ltd.

LCD Panel: L170E3 / Acer Display Technology Inc.

Inverter : GH018H /Green C&C Tech Co., Ltd., SIC1801 /Samsung(*Worst case-data recorded)

leg ha

Tested by T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF

Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)

Frequency (MHz)	Reading (dB μ V)	Pol (H/V)	AF+CL+Amp (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
133.38	39.1	H	-15.2	23.9	43.5	19.6
229.53	28.4	H	-13.0	15.4	46.0	30.6
250.02	42.5	H	-12.5	30.0	46.0	16.0
499.48	31.5	H	-6.3	25.2	46.0	20.8
540.22	32.8	H	-5.2	27.6	46.0	18.4
675.05	27.1	H	-1.6	25.5	46.0	20.5

Table 5. Radiated Measurements at 3meters**

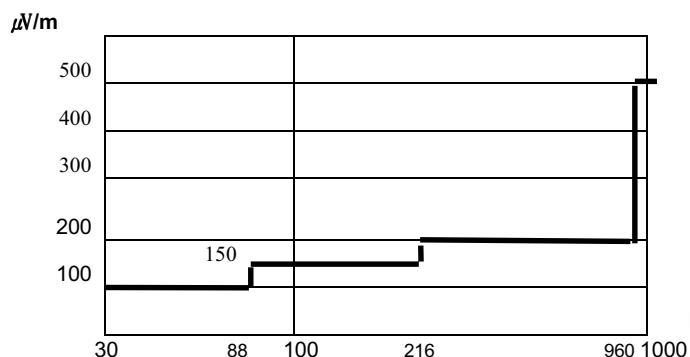


Fig. 4. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.
Above 1GHz the limit is 500 μ V/m.

NOTES:

1. Pol. H =Horizontal V=Vertical
2. AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

**4.AC Adapter : EA1050A / EDAC Power Electronics., Ltd.

LCD Panel: HT17E11-100 / Hyundai

Inverter : GH059A /Green C&C Tech Co., Ltd., SIC1802 /Samsung(*Worst case-data recorded)

kg ha

Tested by T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF

Test Mode : Display "H" pattern on the screen
(video resolution 1280*1024, vertical refresh rate 75Hz)

Frequency (MHz)	Reading (dB μ V)	Pol (H/V)	AF+CL+Amp (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
127.97	36.2	H	-16.1	20.1	43.5	23.4
249.22	29.9	H	-12.5	17.4	46.0	28.6
405.39	30.1	H	-8.6	21.5	46.0	24.5
452.92	35.0	H	-7.4	27.6	46.0	18.4
540.22	30.4	H	-5.2	25.2	46.0	20.8
646.92	29.8	H	-2.3	27.5	46.0	18.5

Table 6. Radiated Measurements at 3meters***

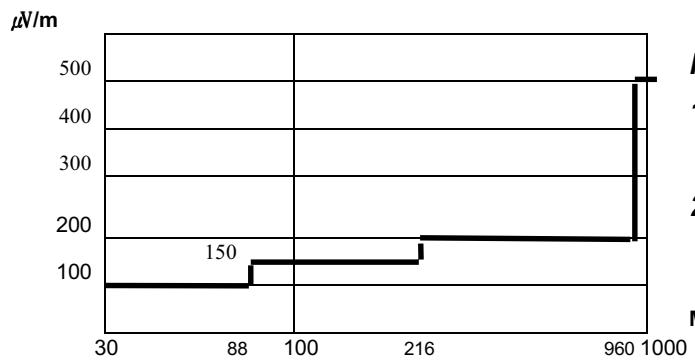


Fig. 4. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.
Above 1GHz the limit is 500 μ V/m.

NOTES:

1. Pol. H =Horizontal V=Vertical
2. AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

***4.AC Adapter : AD-5412 / Samsung

LCD Panel: LTM170EH-L01 / Samsung


Inverter : FLI-17401 /Hyundai, FLI-17402 /Hyundai (*Worst case-data recorded)

leg ha

Tested by T. H. Ryu


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line, Page 9)

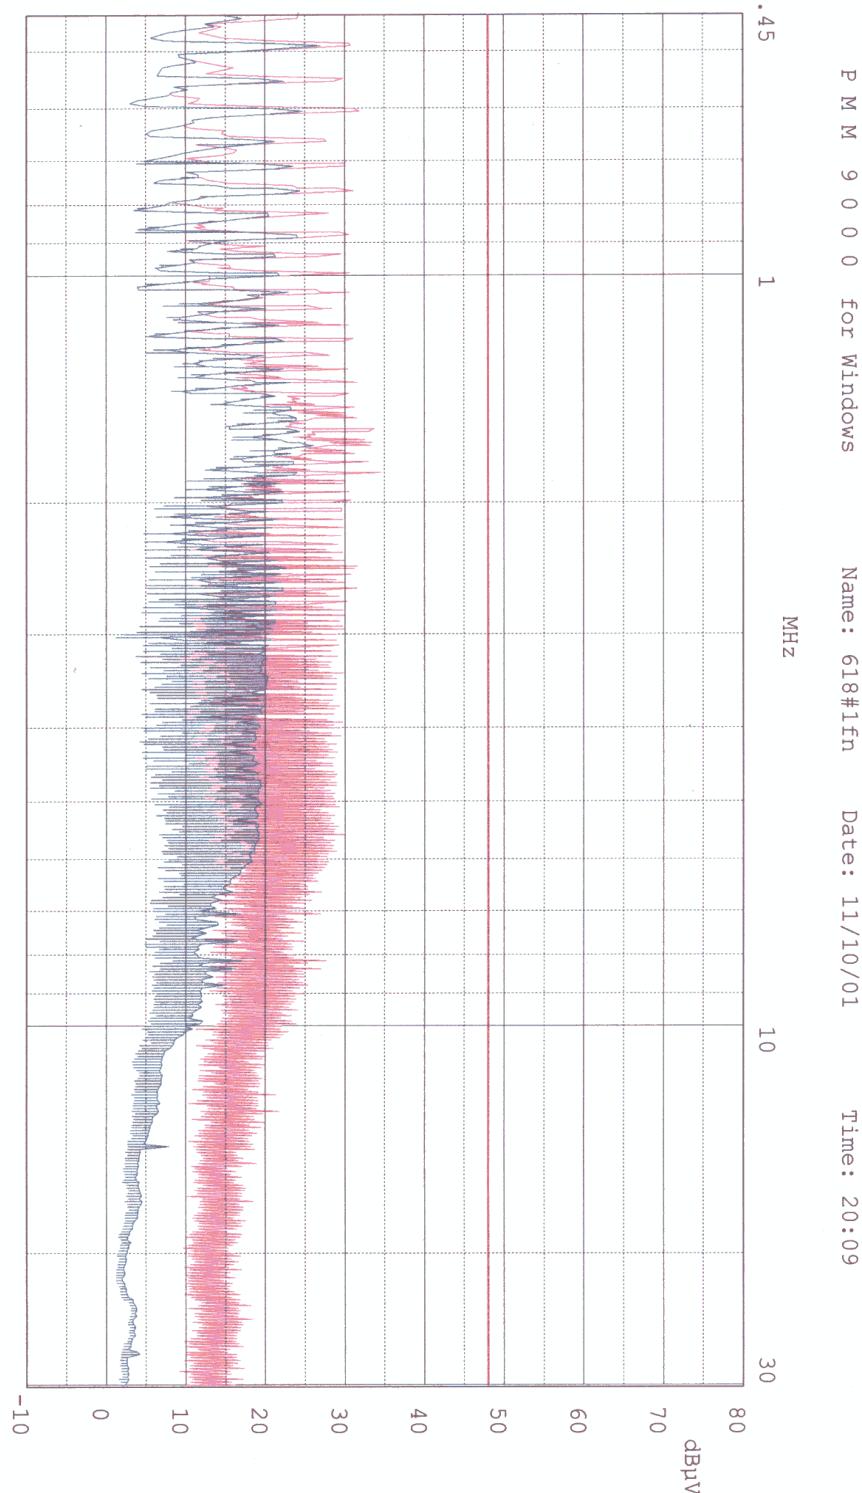


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral, Page 9)

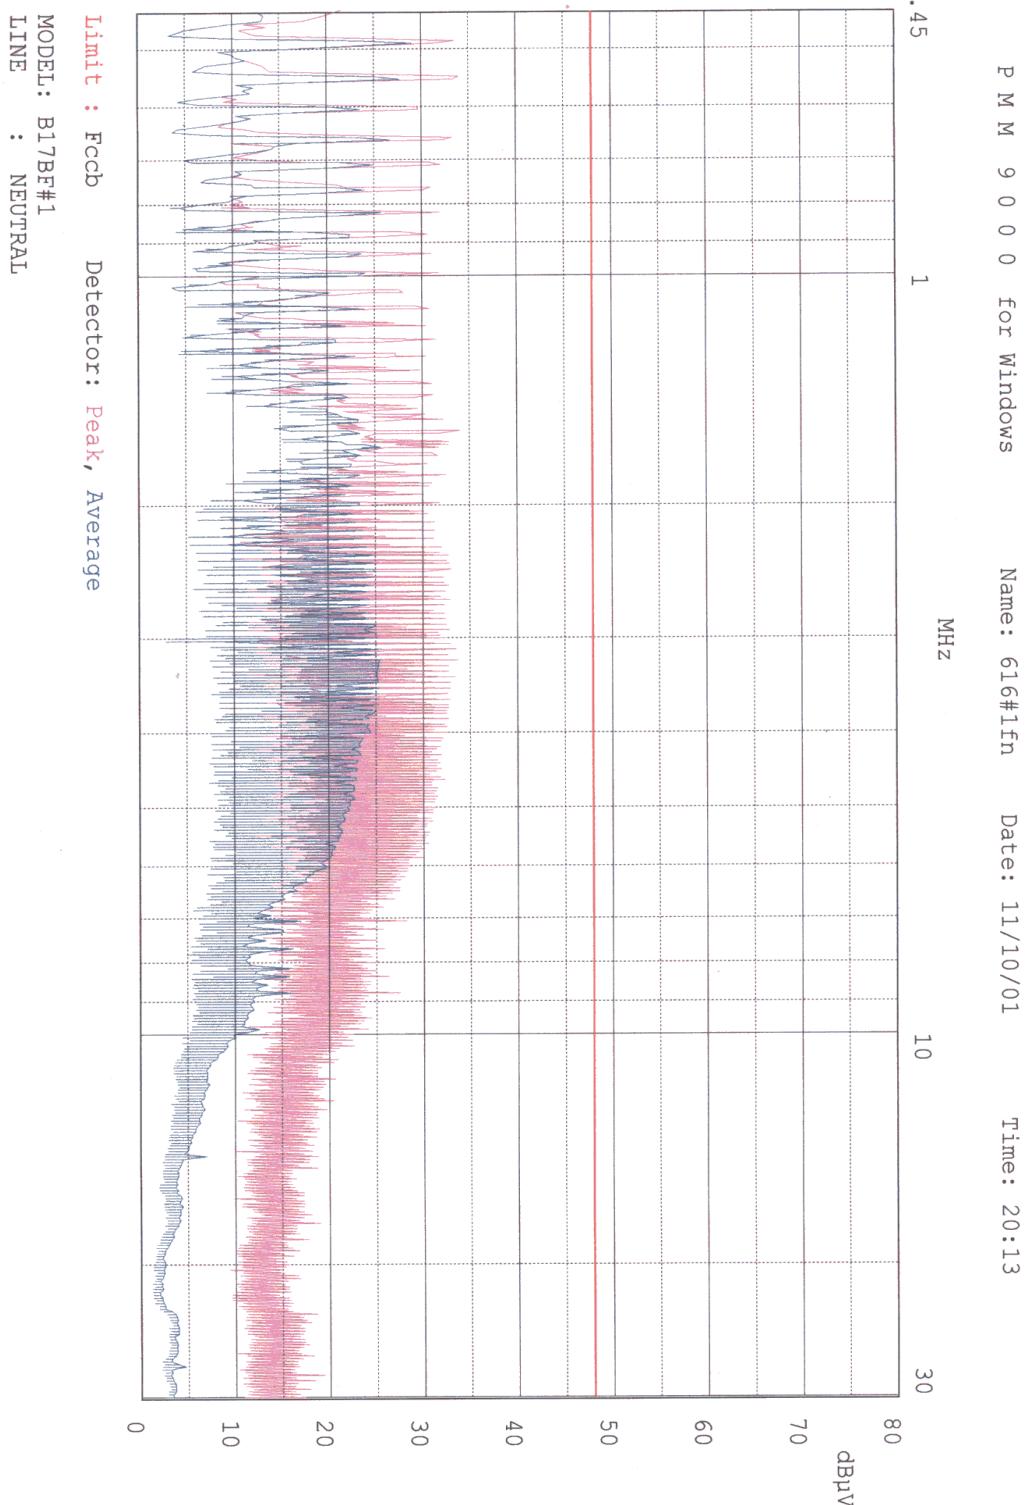


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line, Page 10)

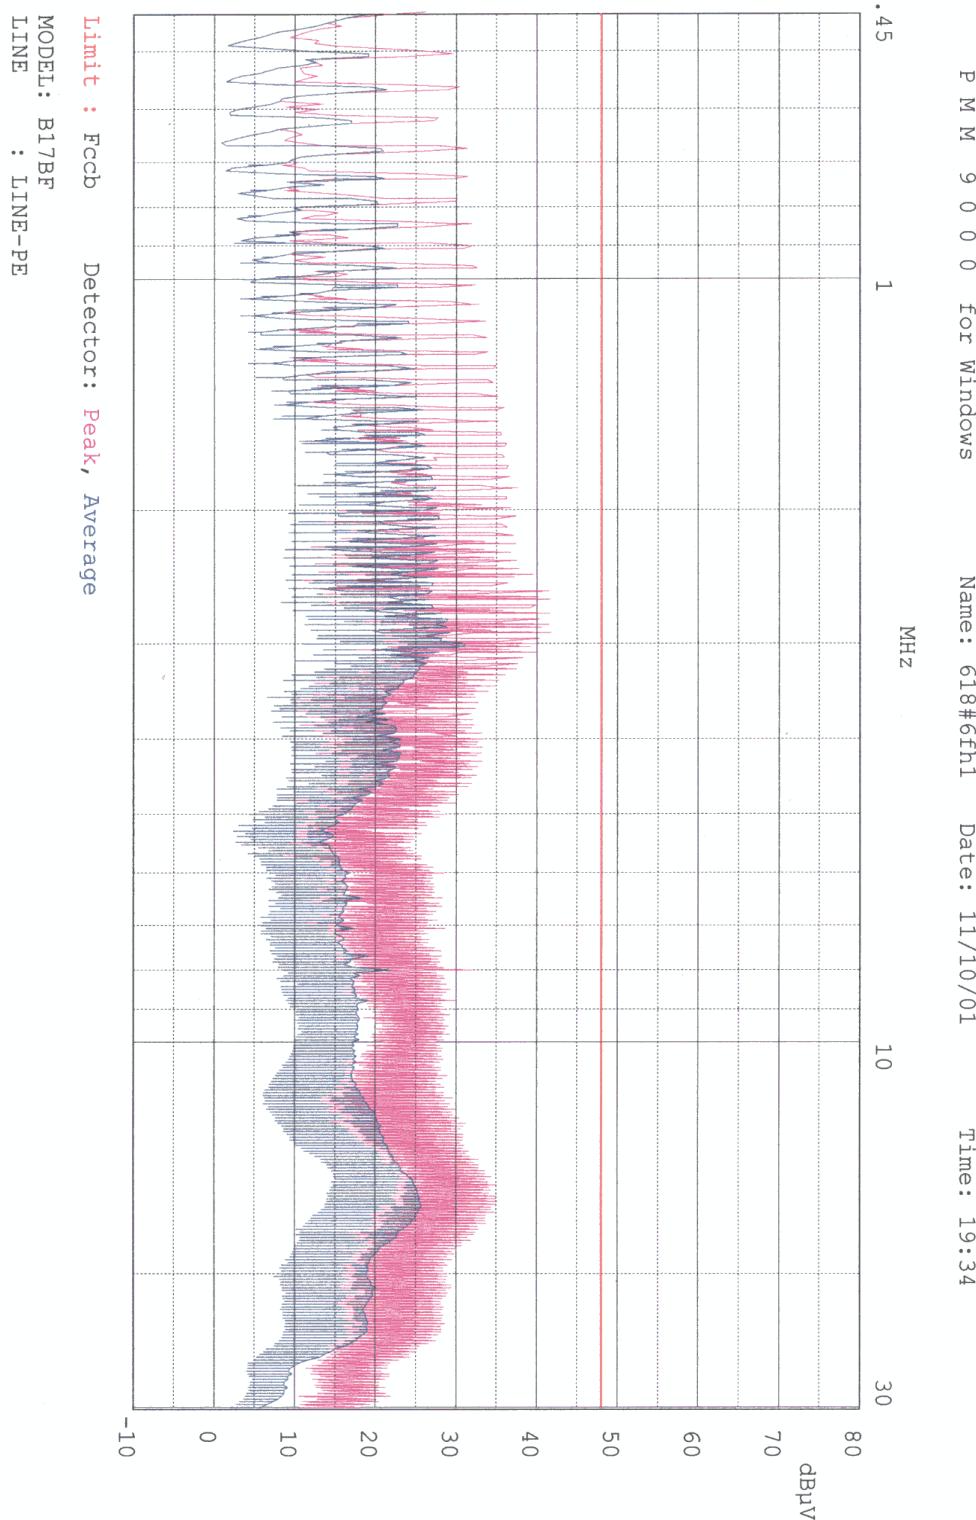

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral, Page 10)

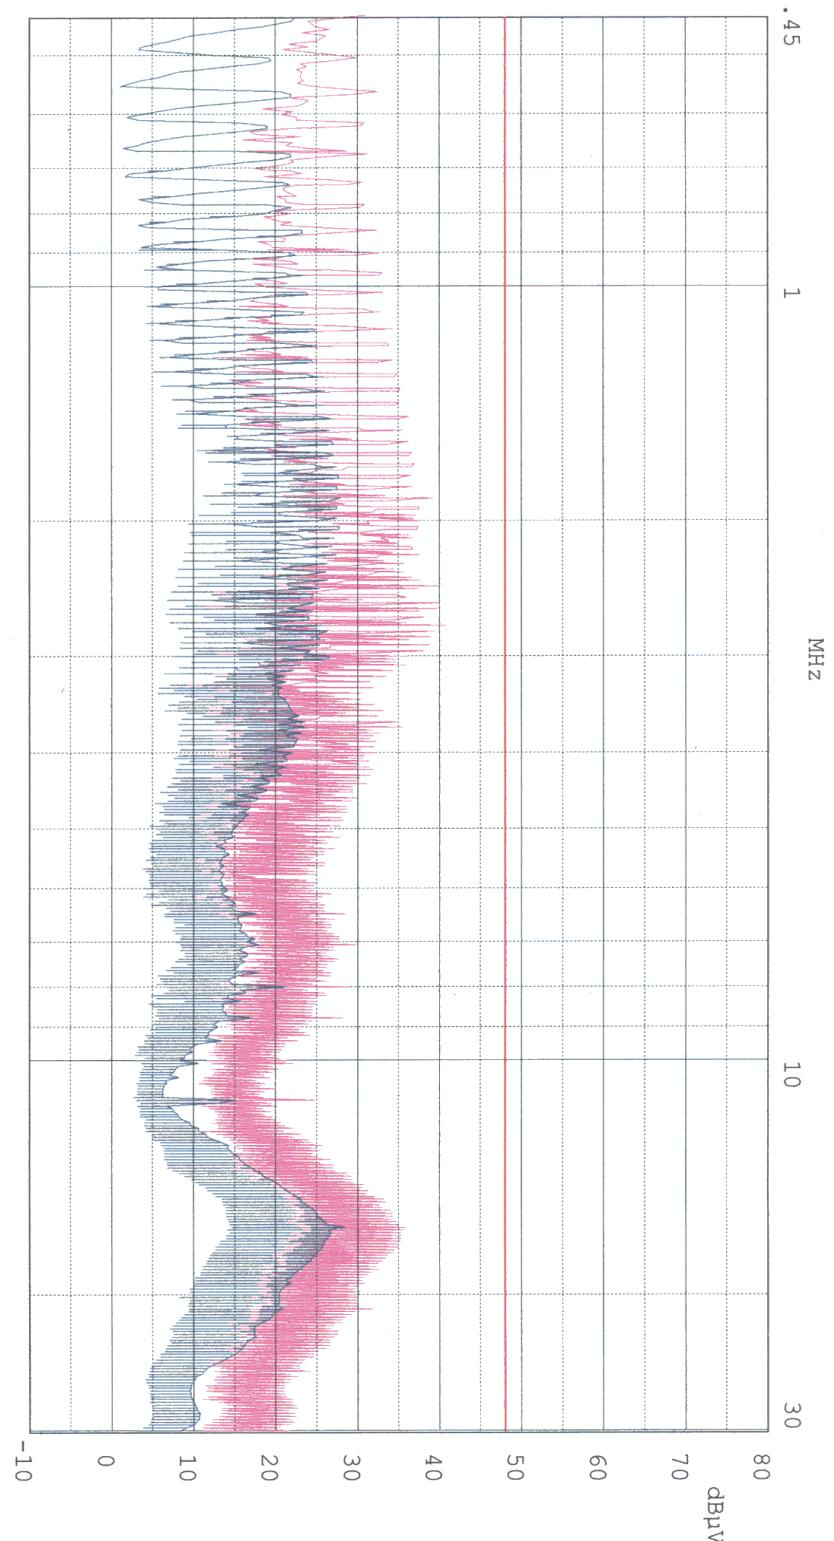


Limit : FCCb Detector: Peak, Average

MODEL: B17BF
LINE : NEUTRAL


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line, Page 11)

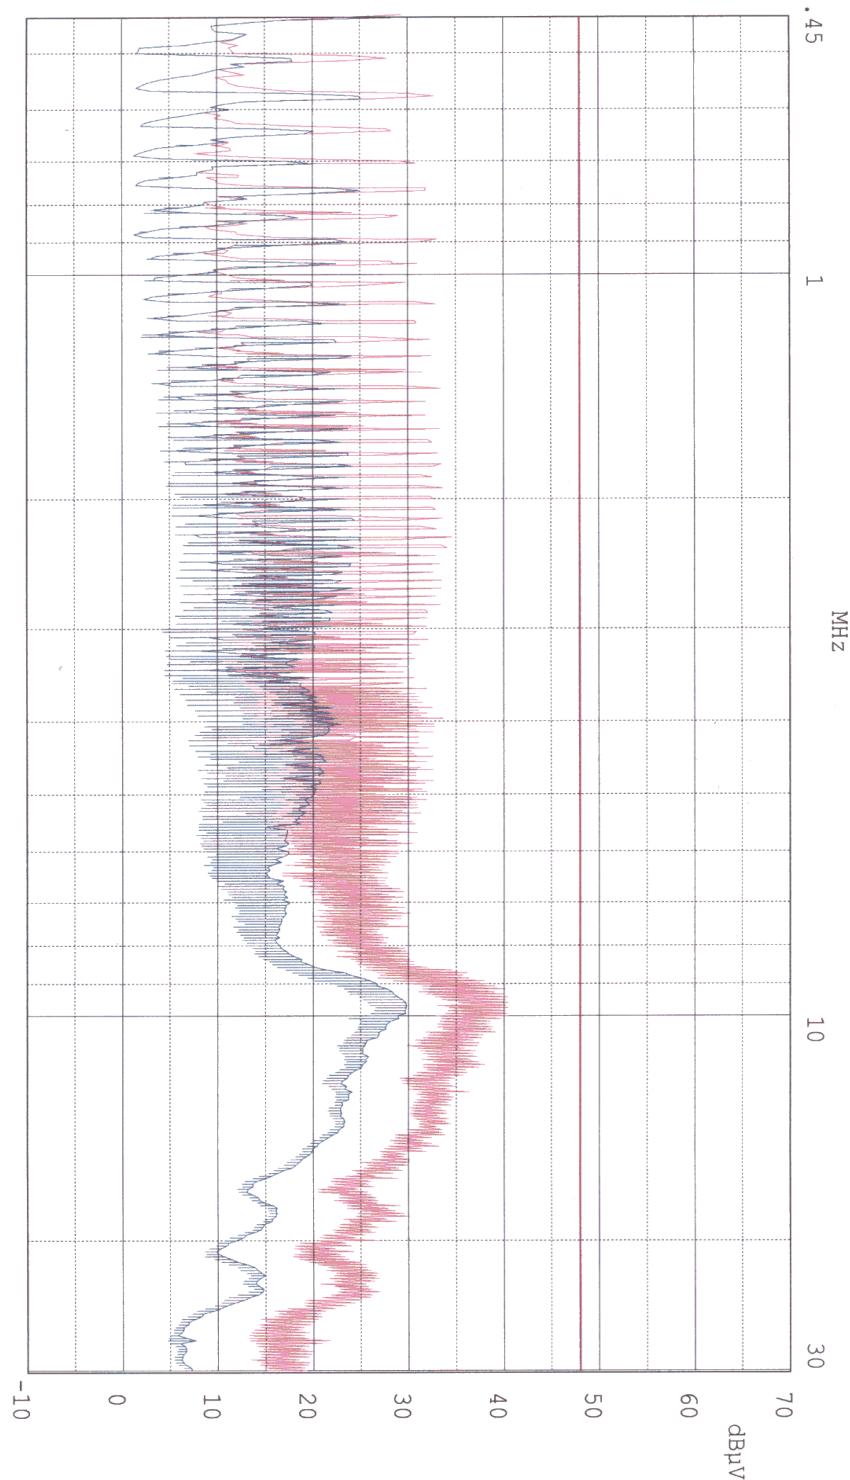

PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Neutral, Page 11)

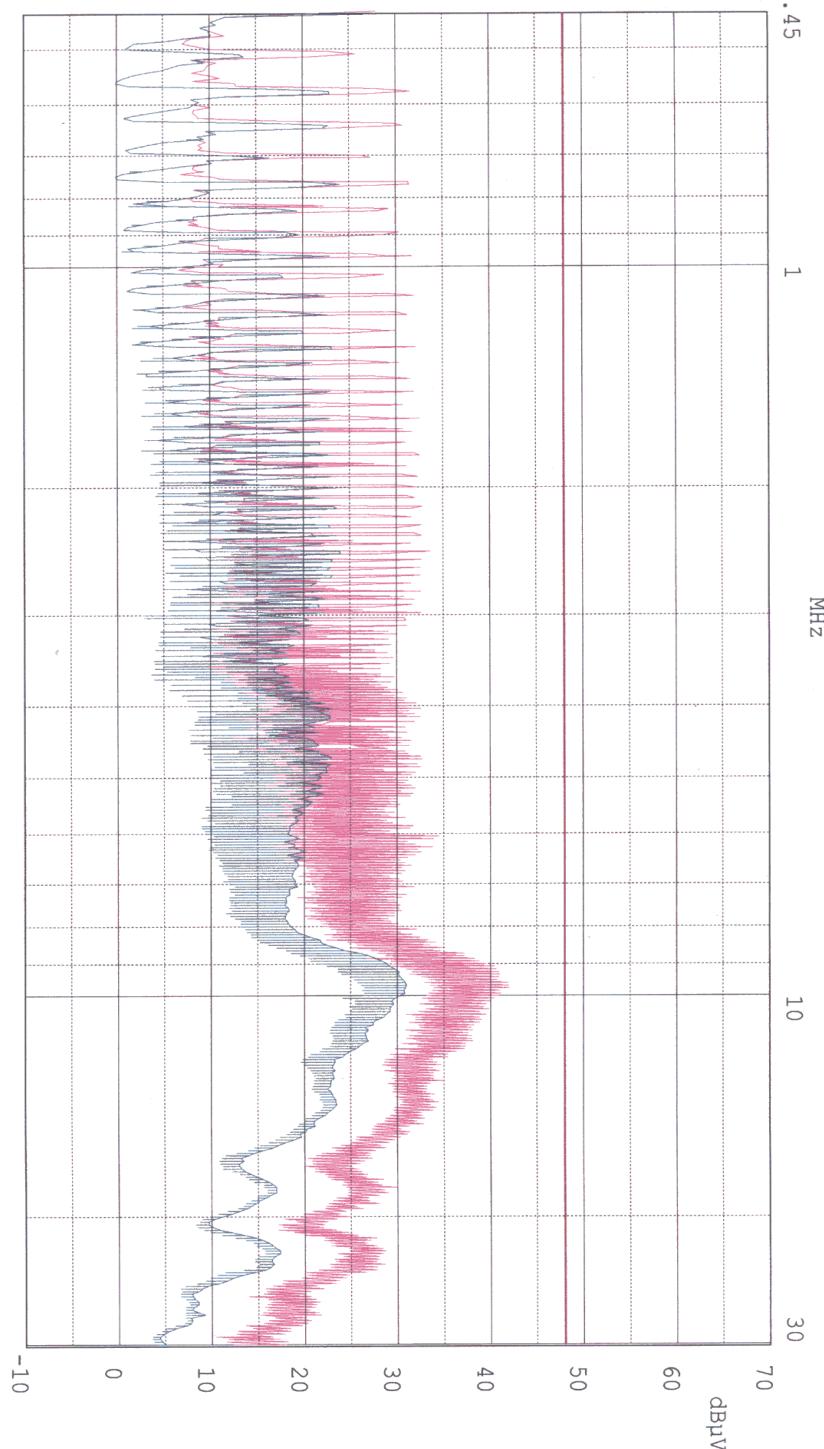

SAMPLE CALCULATIONS

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

EX. 1.

@20.3 MHz

Class B limit = 250 $\mu\text{V} = 48.0 \text{ dB } \mu\text{V}$ Reading = 40.8 dB μV (calibrated level)

$$10^{(40.8/20)} = 109.64 \text{ } \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

7.2 dB below limit**EX. 2.**

@57.7 MHz

Class B limit = 100 $\mu\text{V}/\text{m} = 40.0 \text{ dB } \mu\text{V}/\text{m}$ Reading = 19.1 dB μV (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB $\mu\text{V}/\text{m}$

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

10.78 dB below the limit

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

1. Radiation Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch: Receiver VRC $r_i=0.3$ Antenna VRC $r_R=0.1(B_i)0.4(L_p)$ Uncertainty Limits $20\log(1+/-r_i r_R)$	U-Shaped	+ 0.25 / - 0.26
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

2. Conducted Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch: Receiver VRC $r_i=0.3$ LISN vrc $r_g=0.1$ Uncertainty Limits $20\log(1+/-r_i r_R)$	U-Shaped	± 0.26
System Repeatability		
Repeatability of EUT		
Combined Standard Uncertainty		
Expended Uncertainty U		

TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2001.02
2	*Test Receiver	PMM	PMM9000	2001.06
3	*Amplifier	HP	8447F	2001.05
4	*Amplifier	HP	8447F	2001.05
5	Spectrum Analyzer	Advantest	R4136	2000.12
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2001.02
7	Log-Periodic Antenna	R & S	HL025	2001.02
8	Dipole Antenna	R & S	VHA9103	2001.05
9	Dipole Antenna	R & S	UHA9105	2001.05
10	Biconical Antenna	Schwarzbeck	VHA9103	2001.05
11	Biconical Log Antenna	ARA	LPB-2520/A	2001.01
12	Asorbing Clamp	R & S	MDS21	2001.01
13	High Voltage Probe	R & S	ESH2-Z3	2001.02
14	Signal Generater	R & S	SMP02	2001.03
15	Matching Pad	R & S	RAM358.5414.02	2001.05
16	*LISN	R & S	ESH3-Z5	2001.04
17	*LISN	PMM	L3-9103	2001.05
18	*Position Controller	EM Eng.	N/A	N/A
19	*Turn Table	EM Eng.	N/A	N/A
20	*Antenna Mast	EM Eng.	N/A	N/A
21	*Anechoic Chamber	EM Eng.	N/A	N/A
22	*Shielded Room	EM Eng.	N/A	N/A

*) Test equipment used during the test

RECOMMENDATION/CONCLUSION

The data collected shows that the **Hansol Electronics Inc.**


FCC ID : **MSAB17BF, LCD Monitor.** complies with § 15.107 ,15.109 of the FCC Rules.

The highest emission observed was at **2.11 MHz** for conducted emissions with a margin of **4.0 dB**, at **540.22 MHz** for radiated emissions with a margin of **15.5 dB**.

APPENDIX A – SAMPLE LABEL

Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

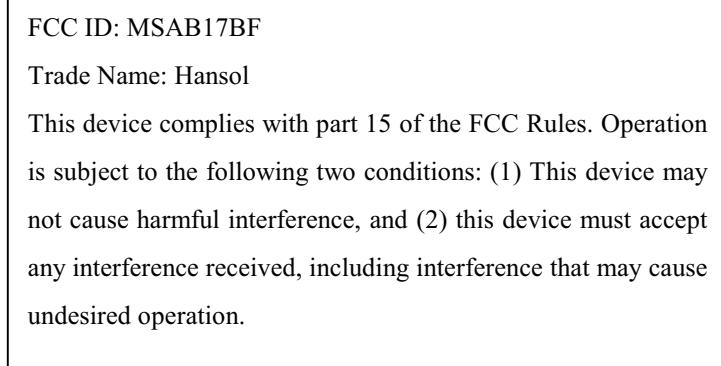

● FCC ID Location of EUT



APPENDIX B – CIRCUIT DIAGRAM

APPENDIX E – USER'S MANUAL

APPENDIX F – SCHEMATIC DIAGRAM
