



# FCC TEST REPORT

for

## 47 CFR Part 15 Subpart C

**Equipment** : 3G Smart Phone  
(GSM900/DCS1800/PCS1900/WCDMA2100/Bluetooth)  
**Trade Name** : Vodafone  
**Model No.** : VDA IV  
**FCC ID** : MSQ-1210  
**Filing Type** : Certification  
**Applicant** : **ASUSTeK computer INC.**  
No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Aug. 24, 2006 at **Sporton International Inc. LAB.**
- Report No.: FR680808, Report Version: Rev. 02.

Roy Wu  
Deputy Manager

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

***SPORTON International Inc.***

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Report Version: Rev. 01



## Table of Contents

**History of this test report.....ii**

**1. General Description of Equipment under Test.....1**

    1.1.Applicant.....1

    1.2.Manufacturer .....1

    1.3.Basic Description of Equipment under Test.....1

    1.4.Feature of Equipment under Test .....2

**2. Test Configuration of Equipment under Test .....3**

    2.1.Test Manner .....3

    2.2.Test Mode .....3

    2.3.Ancillary Equipment List.....3

    2.4.Connection Diagram of Test System .....4

**3. RF Utility .....5**

**4. General Information of Test.....6**

    4.1.Test Voltage .....6

    4.2.Standard for Methods of Measurement.....6

    4.3.Test in Compliance with .....6

    4.4.Frequency Range Investigated .....6

    4.5.Test Distance .....6

**5. Report of Measurements and Examinations .....7**

    5.1.List of Measurements and Examinations .....7

    5.2.Hopping Channel Separation .....8

    5.3.Number of Hopping Frequency .....12

    5.5 Dwell Time of Each Frequency .....18

    5.6 Output Power .....38

    5.7 100kHz Bandwidth of Frequency Band Edges .....42

    5.8 Conducted Emission .....46

    5.9 Radiated Emission Measurement .....53

    5.10 Antenna Requirements.....73

**6. List of Measuring Equipments Used .....74**

**7. Uncertainty Evaluation.....75**

**Appendix A. External Product Photograph**

**Appendix B. Internal Photograph**

**Appendix C. Setup Photograph**





# 1. General Description of Equipment under Test

## 1.1. Applicant

**ASUSTeK computer INC.**

No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

## 1.2. Manufacturer

**ASUSTeK computer INC.**

No. 5 Shing Yeh St., Kwei Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## 1.3. Basic Description of Equipment under Test

Equipment	: 3G Smart Phone (GSM900/DCS1800/PCS1900/WCDMA2100/Bluetooth)
Trade Name	: Vodafone
Model No.	: VDA IV
FCC ID	: MSQ-1210
Power Supply Type	: Switching, From battery 3.7V
AC Power Cord	: AC 120V, Wall-mount, 1.8 meter, 2 pin
Earphone	: CHM-201STV01017(TPE)(NL)
Battery	: WELLDONE, SBP-02
Adapter 1	: PI, P005WA05OW
Adapter 2	: PHIHONG, PSC05R-050PH
USB Cable	: FOXCONN - CUHD004B-S17-EF

**1.4. Feature of Equipment under Test**

Product Feature & Specification			
1. Modulation Type/Data Rate	PCS : GMSK BT : GFSK		
2. Frequency Range.	PCS : 1850.2-1909.8 MHz(Tx), 1930.2-1989.8 MHz(Rx) BT : 2400 MHz ~ 2483.5 MHz		
3. Number of Channels	BT : 79		
4. Carrier Frequency of each channel	BT : 2402+ n*1 MHz, n= 0~78		
5. Channel Spacing	BT : 1 MHz		
6. Maximum Output Power to Antenna (Normal condition)	PCS : 29.63 dBm BT : 1.67 dBm		
7. Type of Antenna Connector	N/A		
8. Antenna Type	Chip Antenna		
9. Antenna Gain	-7 dBi		
10. HW Version	1.3		
11. SW Version	2.2.0f		
12. Function Type	Transmitter		Transceiver V
13. DUT Stage	Identical Prototype		



## 2. Test Configuration of Equipment under Test

### 2.1. Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- b. For spurious emission below 1GHz, only one channel of each application was tested because it is not related to channel selection.
- c. The EUT is programmed to transmit signal continuously for all testings.
- d. Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000MHz.

### 2.2. Test Mode


Application	Bluetooth
Radiated Emission and conducted test items	Mode 1: Tx_CH00_2402 MHz Mode 2: Tx_CH39_2441 MHz Mode 3: Tx_CH78_2480 MHz
Conducted Emission	Mode 1: PCS1900 Idle Mode + BT Link + MPEG 4 + Adapter 1 Mode 2: PCS1900 Idle Mode + BT Link + MPEG 4 + USB Link Mode 3: PCS1900 Idle Mode + BT Link + MPEG 4 + Adapter 2

### 2.3. Ancillary Equipment List


Item	Equipment	Model No.	Power Cord
1.	Base Station (R&S)	CMU200	AC 100-240V
2.	Bluetooth Earphone (Engotech)	ET-BH111	N/A

### 2.4. Connection Diagram of Test System

<Phone with Adapter Mode>

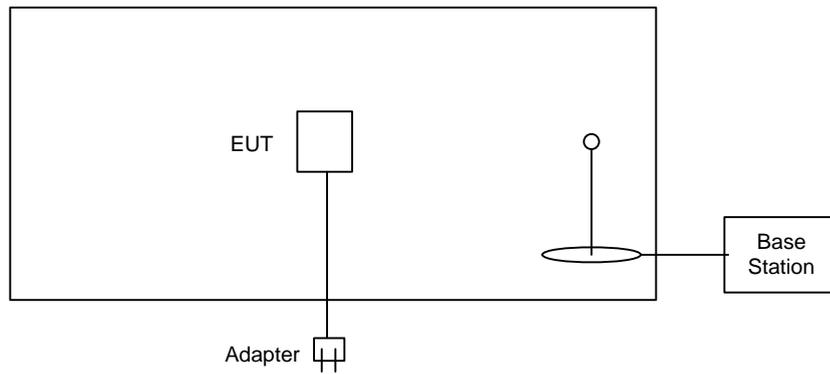

< Phone with USB Link Mode >

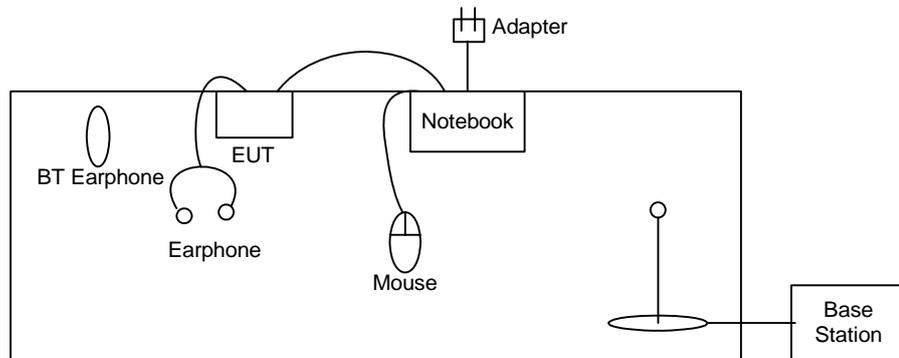



### **3. RF Utility**

The EUT is in BT link mode with BT earphone for conducted emission or in BT continuous Tx Mode controlled by RF utility and base station simulator for radiation emission and other conducted tests.



## **4. General Information of Test**

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,  
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
TEL : 886-3-327-3456  
FAX : 886-3-318-0055  
Test Site No : CO01-HY, 03CH06-HY

### **4.1. Test Voltage**

AC 120V

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-2003

### **4.3. Test in Compliance with**

47 CFR Part 15 Subpart C

### **4.4. Frequency Range Investigated**

Conduction: from 150 kHz to 30 MHz  
Radiation: from 30 MHz to 25000MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 3 m.



## 5. Report of Measurements and Examinations

### 5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
15.247(a)(1)	Hopping Channel Separation	Pass	5.2
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	5.3
15.247(a)(1)	Hopping Channel Bandwidth	Pass	5.4
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass	5.5
15.247(b)(1)	Output Power	Pass	5.6
15.247(c)	100kHz Bandwidth of Frequency Band Edges	Pass	5.7
15.207	Conducted Emission	Pass	5.8
15.209	Radiated Emission	Pass	5.9
15.203	Antenna Requirement	Pass	5.10

## 5.2. Hopping Channel Separation


### 5.2.1. Measuring Instruments :

As described in chapter 6 of this test report.

### 5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

### 5.2.3. Test Setup Layout :

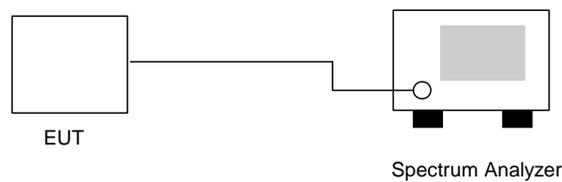

### 5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James


Channel	Frequency ( MHz )	Hopping Channel Separation ( MHz )	Limits ( MHz )	Plot Ref. No.
00	2402	1.004	0.828	Mode 1
39	2441	1.004	0.830	Mode 2
78	2480	1.004	0.830	Mode 3

Remark: Limit is the greater one of 25kHz or the 20dB bandwidth of the hopping channel.



5.2.5 Hopping Channel Separation

Mode 1: CH00 (2402MHz)

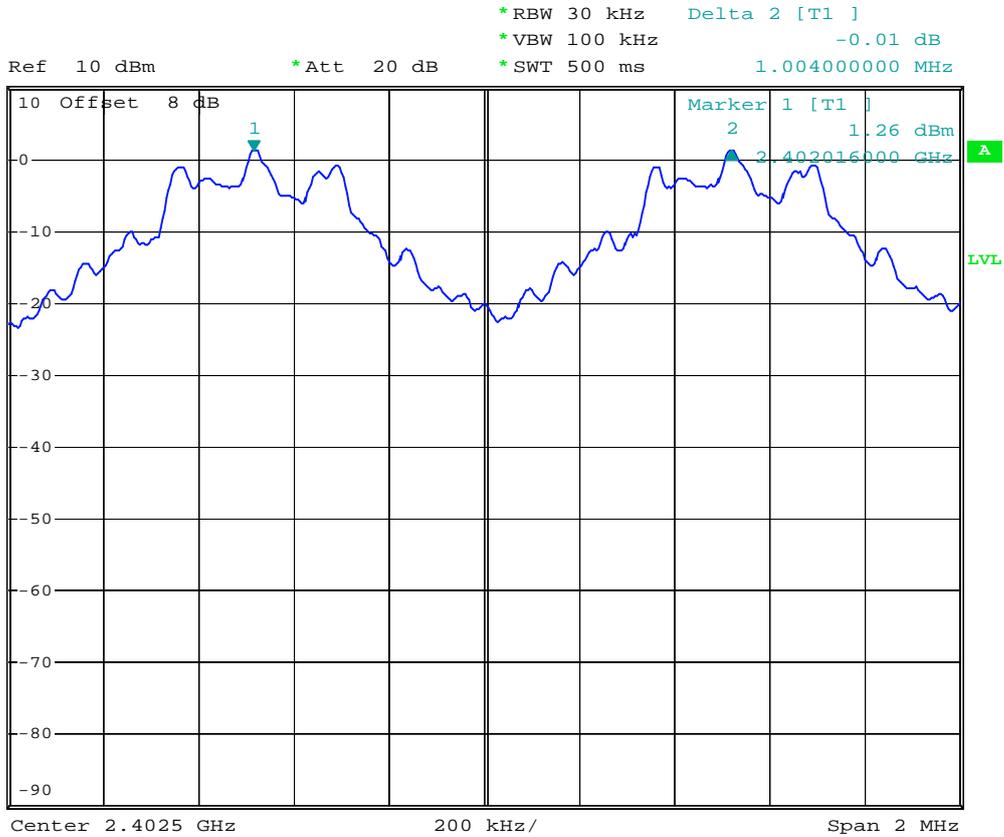

Date: 17.AUG.2006 05:09:11



Mode 2: CH39 (2441MHz)




\*RBW 30 kHz    Delta 2 [T1 ]  
 \*VBW 100 kHz    -0.07 dB  
 \*SWT 500 ms    1.004000000 MHz

Ref 10 dBm

\*Att 20 dB

1 PK  
MAXH

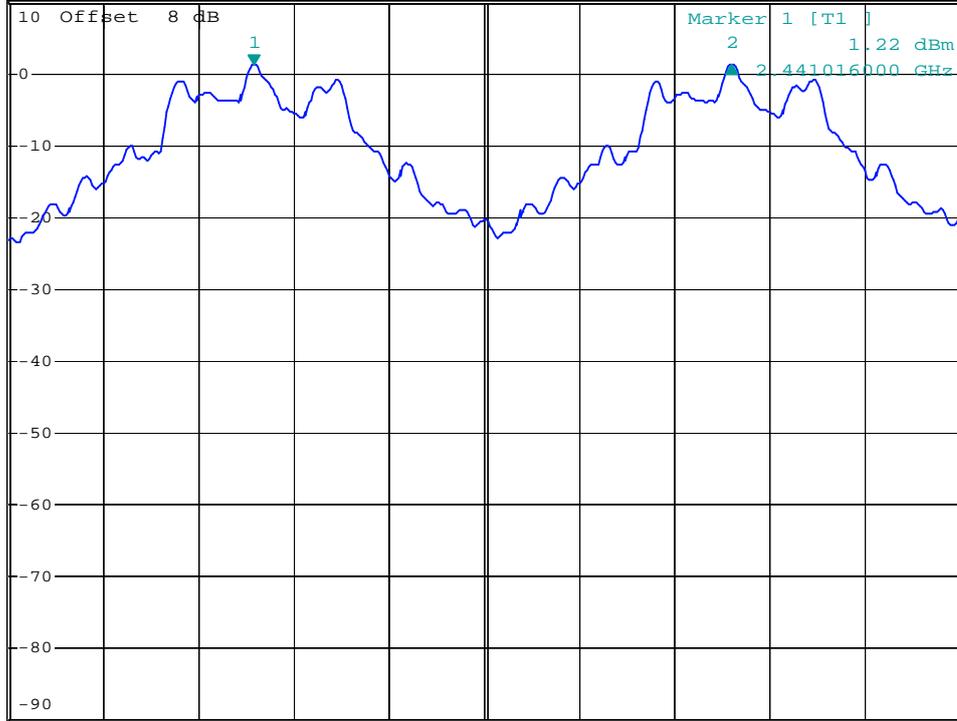

Center 2.4415 GHz

200 kHz/

Span 2 MHz

Date: 17.AUG.2006 05:06:46



Mode 3: CH78 (2480MHz)




\*RBW 30 kHz    Delta 2 [T1 ]  
 \*VBW 100 kHz    -0.03 dB  
 \*SWT 500 ms    1.004000000 MHz

Ref 10 dBm

\*Att 20 dB

1 PK  
MAXH

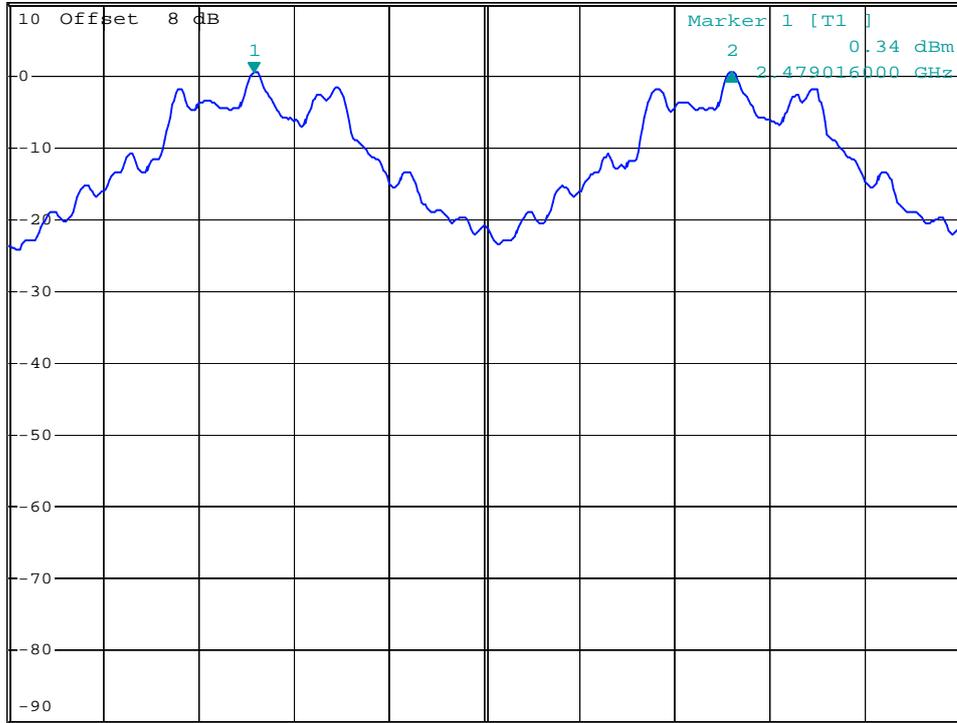

Center 2.4795 GHz

200 kHz/

Span 2 MHz

Date: 17.AUG.2006 05:05:02

**5.3. Number of Hopping Frequency**


5.3.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :

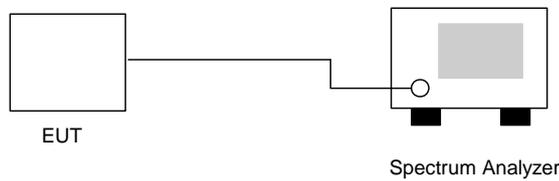


5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James

Number of Hopping Frequency (Channel)	Limits (Channel)
79	15



5.3.5 Number of Hopping Frequency

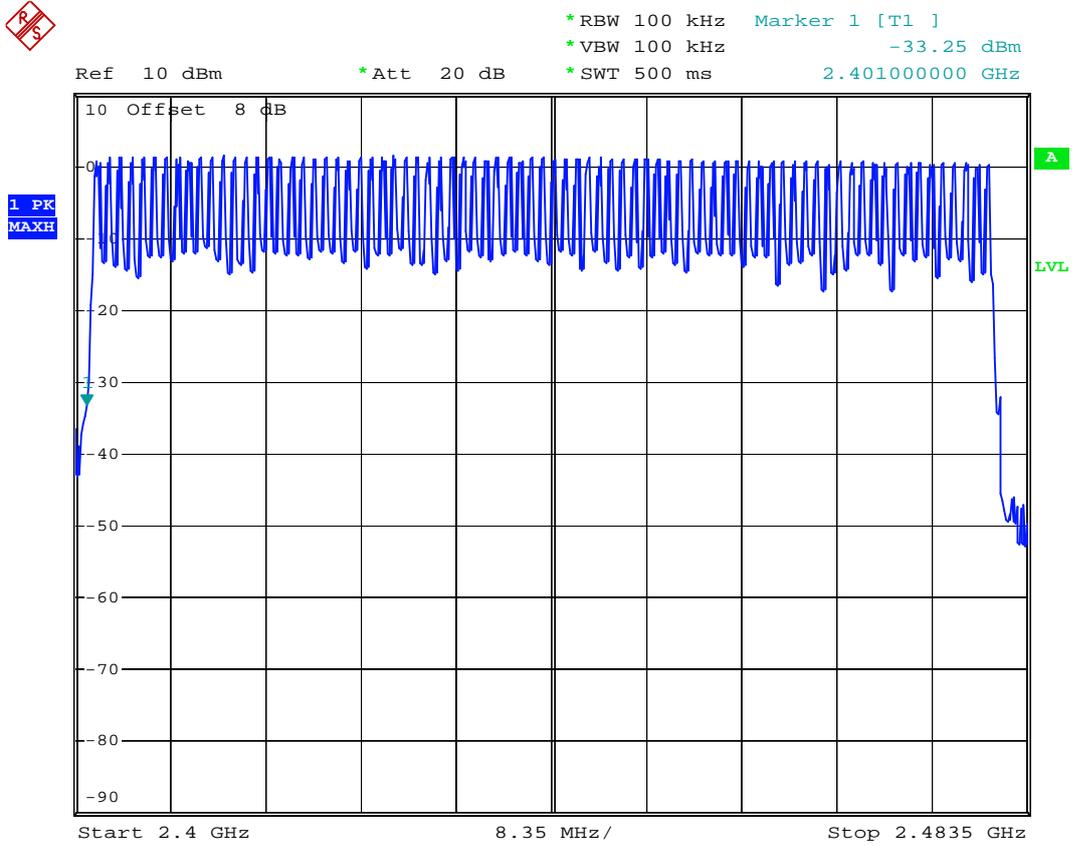

Date: 17.AUG.2006 06:13:40

### 5.4 Hopping Channel Bandwidth


#### 5.4.1 Measuring Instruments :

As described in chapter 6 of this test report.

#### 5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 300kHz.
3. The Hopping Channel bandwidth is defined as the frequency range where the power is higher than peak power minus 20dB.

#### 5.4.3 Test Setup Layout :

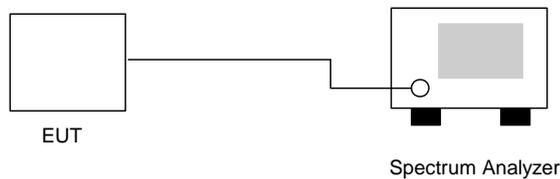

#### 5.4.4 Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.828	1.0	Mode 1
39	2441	0.830	1.0	Mode 2
78	2480	0.830	1.0	Mode 3



5.4.5 Hopping Channel Bandwidth

Mode 1: CH00 (2402MHz)

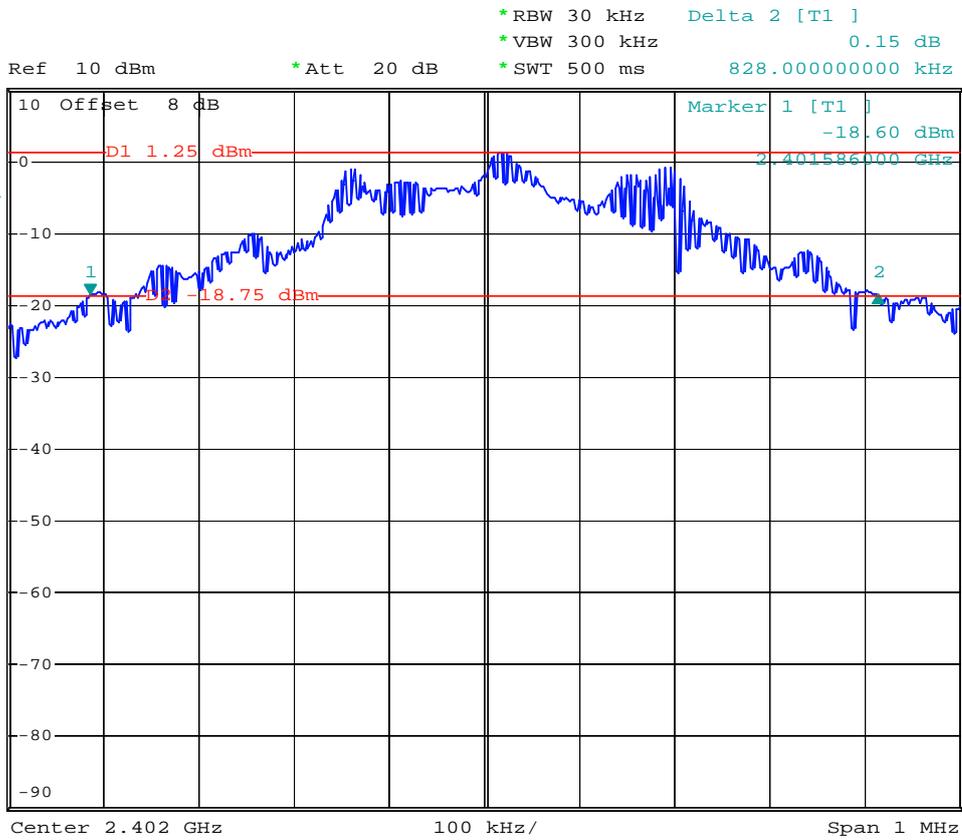

Date: 17.AUG.2006 04:58:56



Mode 2: CH39 (2441MHz)



\*RBW 30 kHz    Delta 2 [T1 ]  
 \*VBW 300 kHz    -0.09 dB  
 \*SWT 500 ms    830.000000000 kHz

Ref 10 dBm

\*Att 20 dB



Center 2.441 GHz

100 kHz/

Span 1 MHz


Date: 17.AUG.2006 04:57:42



Mode 3: CH78 (2480MHz)



Ref 10 dBm      \*Att 20 dB      \*RBW 30 kHz      Delta 2 [T1 ]  
 \*VBW 300 kHz      -0.47 dB  
 \*SWT 500 ms      830.000000000 kHz

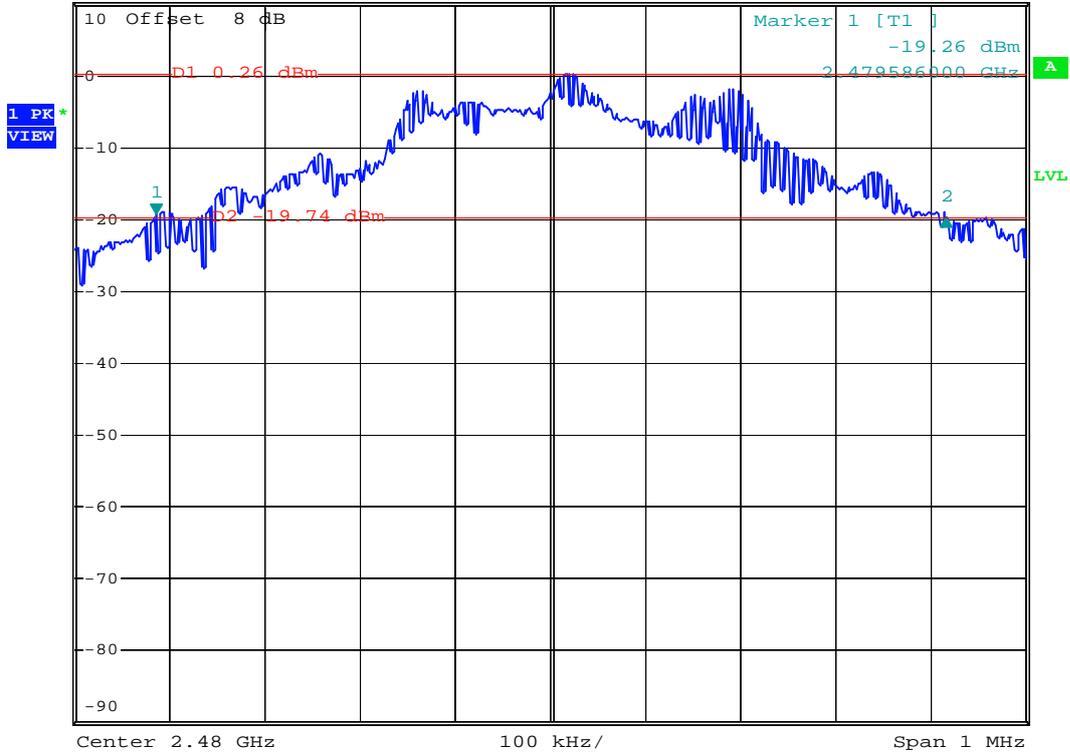

Date: 17.AUG.2006 04:55:55

### 5.5 Dwell Time of Each Frequency


#### 5.5.1 Measuring Instruments :

As described in chapter 6 of this test report.

#### 5.5.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measured and set the frequency span to zero span.
4. The equation =  $79 \times 0.4 \times (1600/79) \times t$  (t = the time duration of one single pulse )

#### 5.5.3 Test Setup Layout :

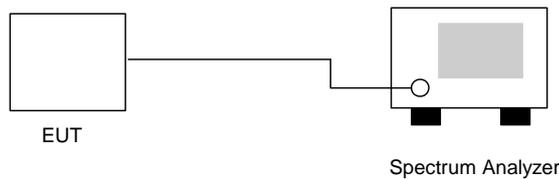

#### 5.5.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James

Ch00

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	9.1	552	0.159	0.4
DH3	4.8	1812	0.275	0.4
DH5	3.6	3092	0.352	0.4



CH39

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	8.6	552	0.150	0.4
DH3	4.6	1822	0.265	0.4
DH5	3.4	3132	0.337	0.4

CH78

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	9.2	552	0.160	0.4
DH3	5	1812	0.286	0.4
DH5	3.2	3152	0.319	0.4

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




5.5.5 Dwell Time


DH1 (CH00)



Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 3 [T1 ]      -0.82 dB  
\*VBW 1 MHz      SWT 2 ms      1.260000 ms

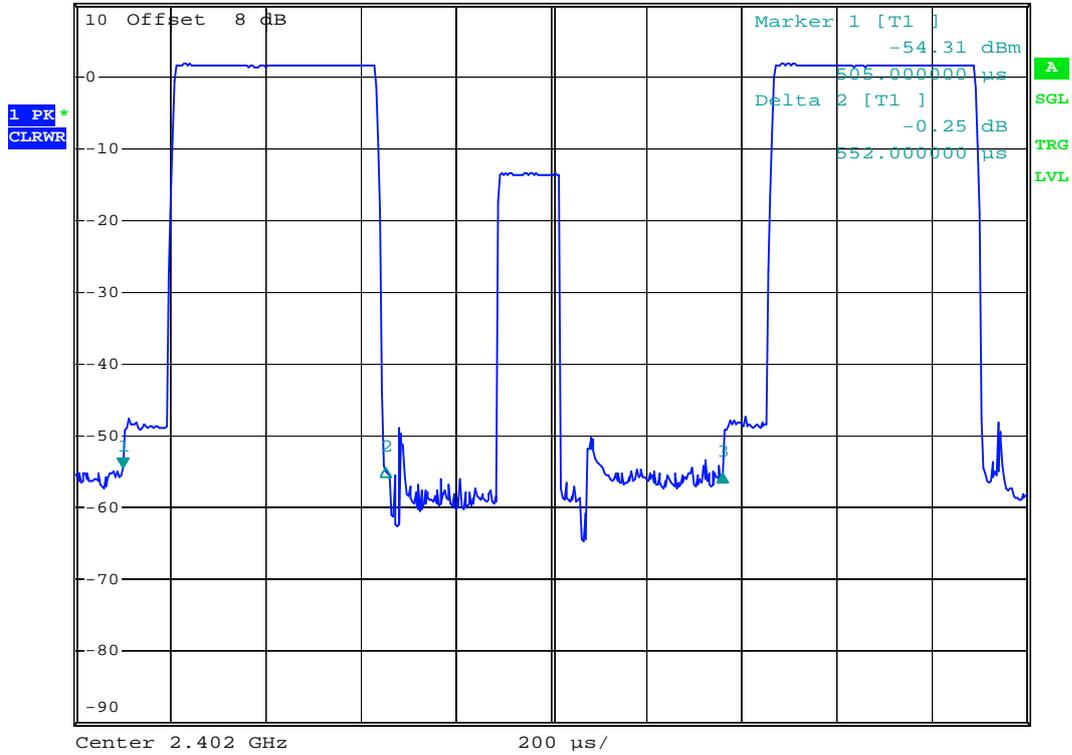

Date: 17.AUG.2006 05:12:47

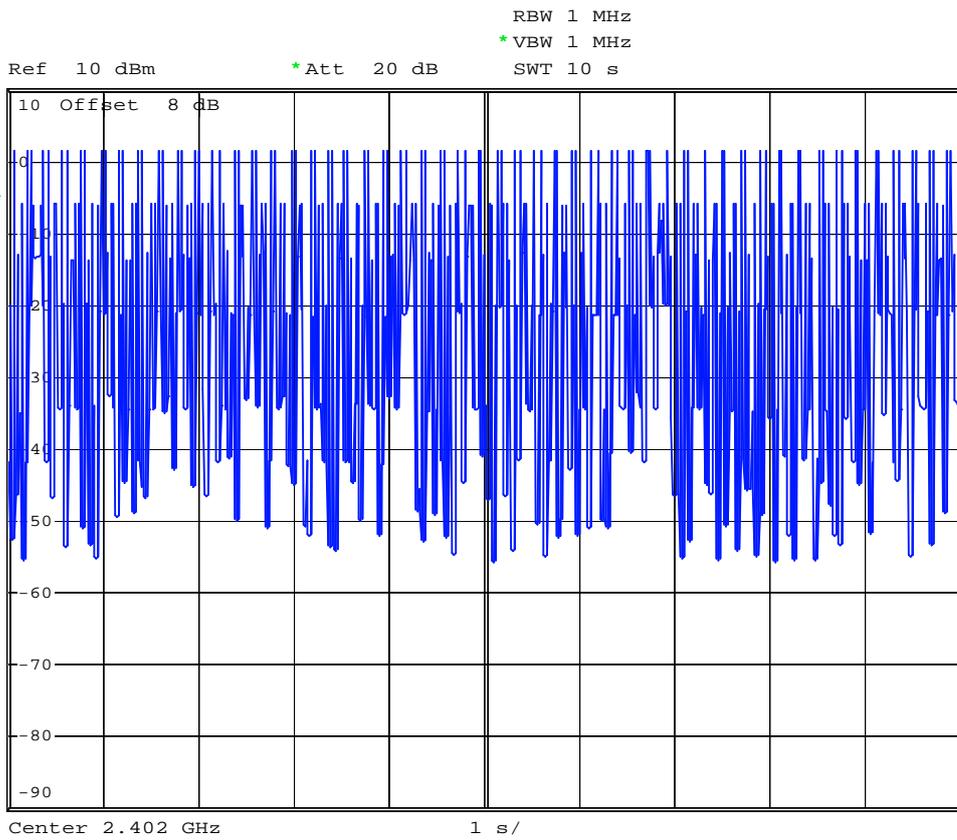


Date: 17.AUG.2006 05:30:04



DH1 (CH39)




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 3 [T1 ]      -0.06 dB  
SWT 2 ms      1.260000 ms

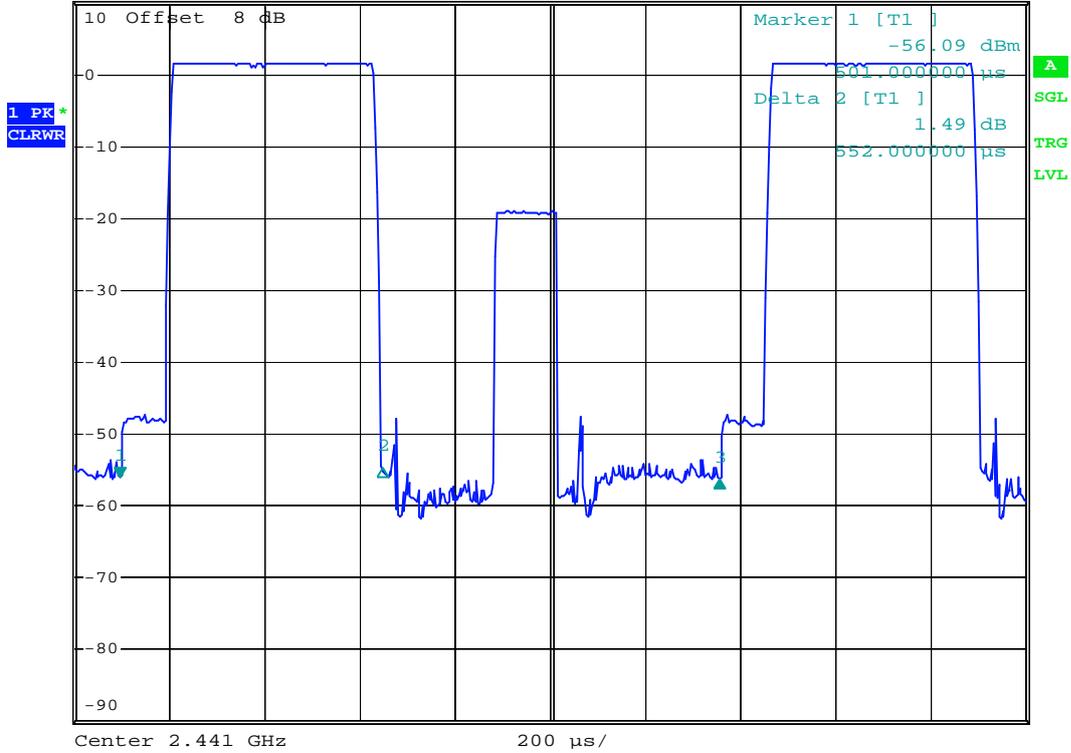

Date: 17.AUG.2006 05:13:47




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz  
\*VBW 1 MHz      SWT 10 s

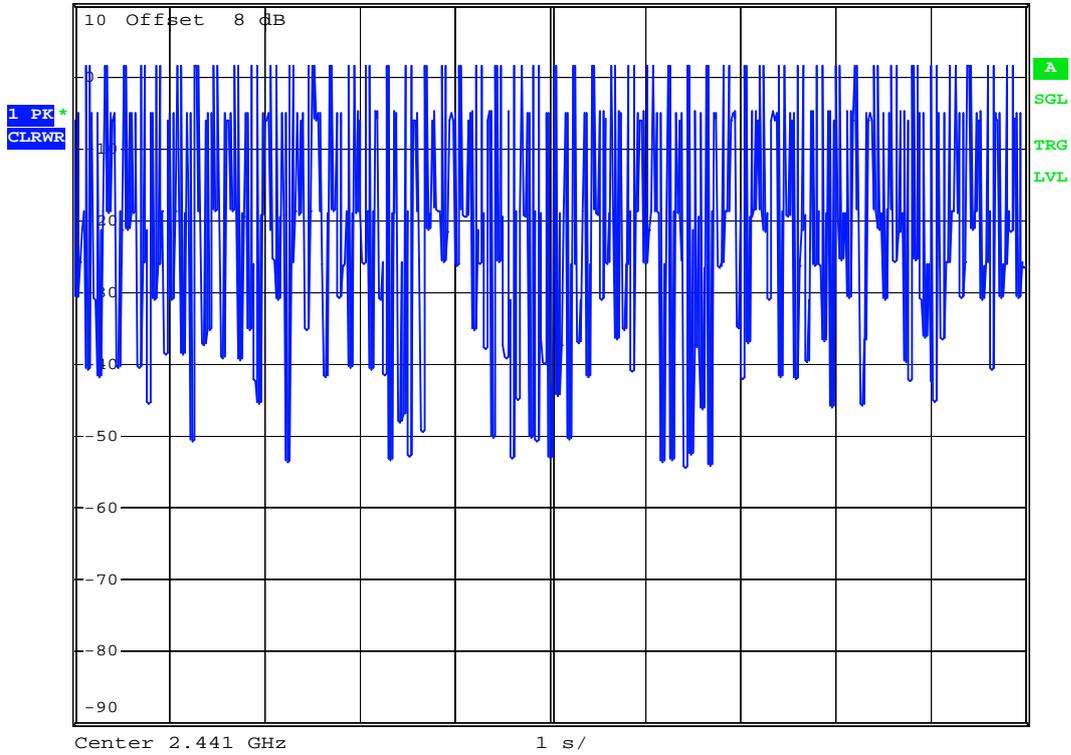


Date: 17.AUG.2006 05:31:47



DH1 (CH78)

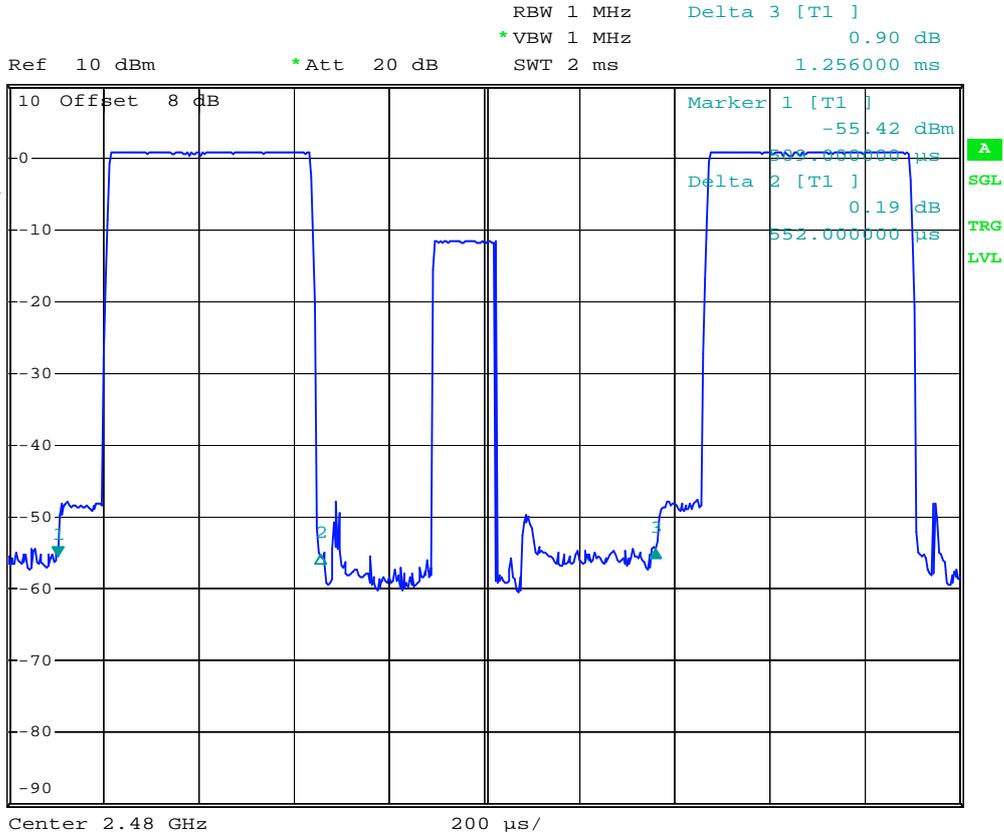


Date: 17.AUG.2006 05:15:12

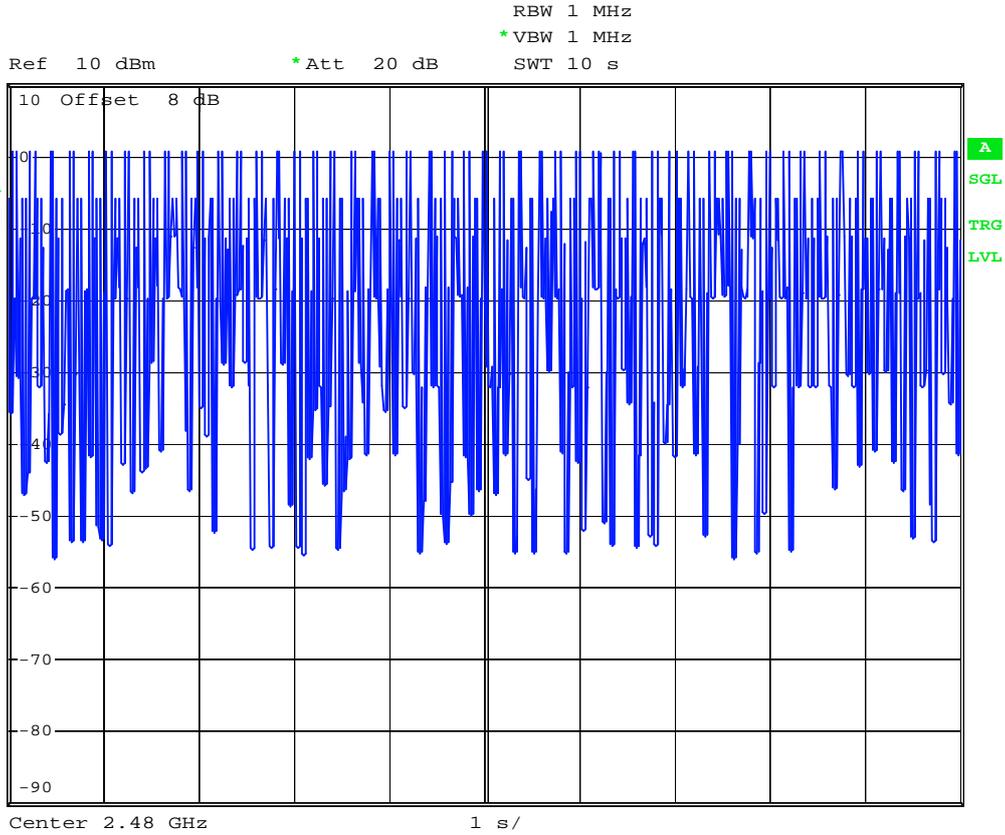

Date: 17.AUG.2006 05:32:58




DH3 (CH00)

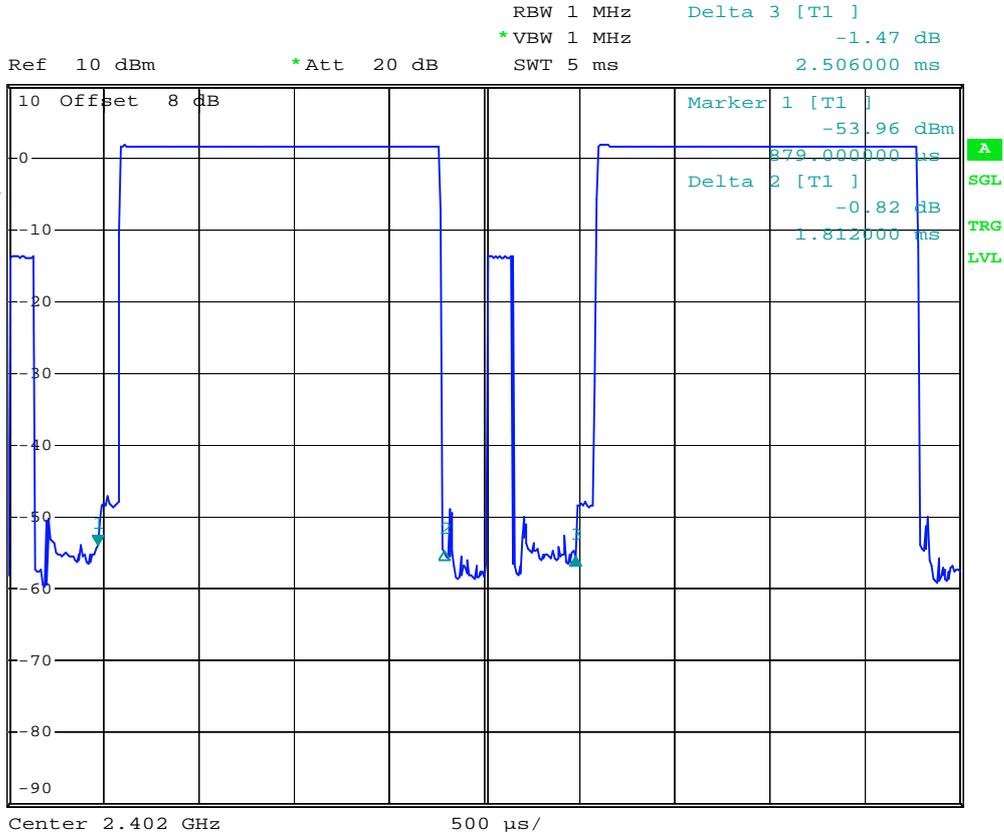

Date: 17.AUG.2006 05:21:51



RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 1 MHz      -52.38 dBm  
Ref 10 dBm      \*Att 20 dB      SWT 10 s      960.405000 ms

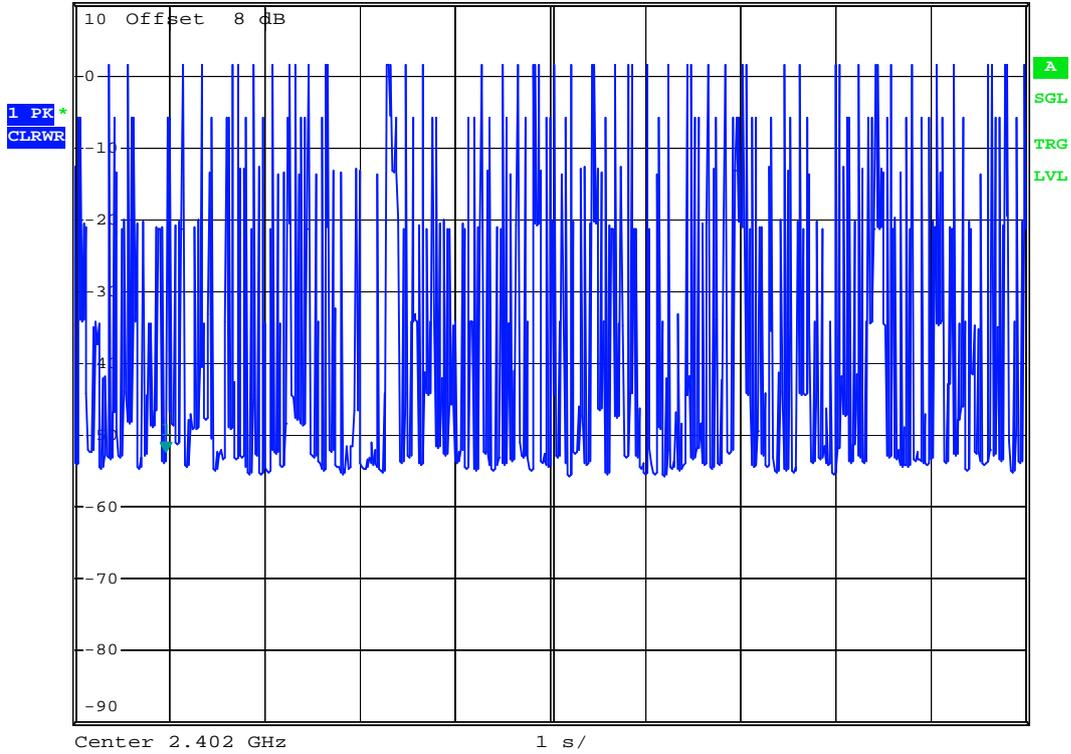


Date: 17.AUG.2006 05:37:01



DH3 (CH39)




RBW 1 MHz      Delta 3 [T1 ]  
 \*VBW 1 MHz      -0.40 dB  
 Ref 10 dBm      \*Att 20 dB      SWT 5 ms      2.506000 ms

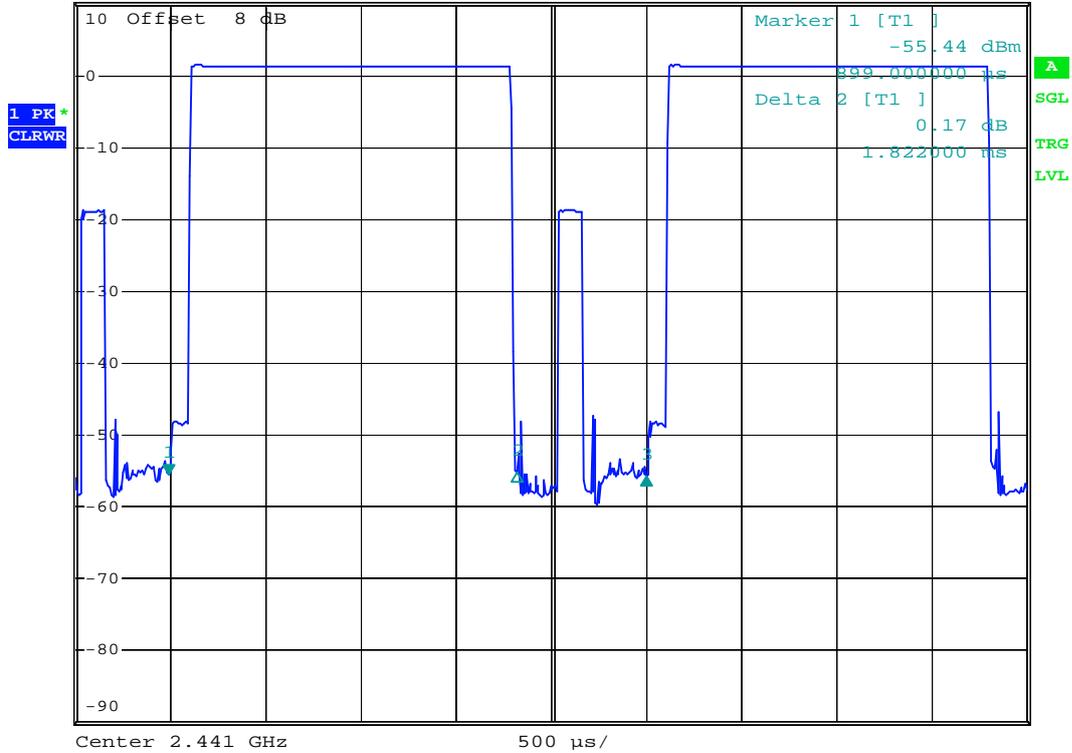

Date: 17.AUG.2006 05:20:40




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 1 MHz      -26.19 dBm  
SWT 10 s      960.405000 ms

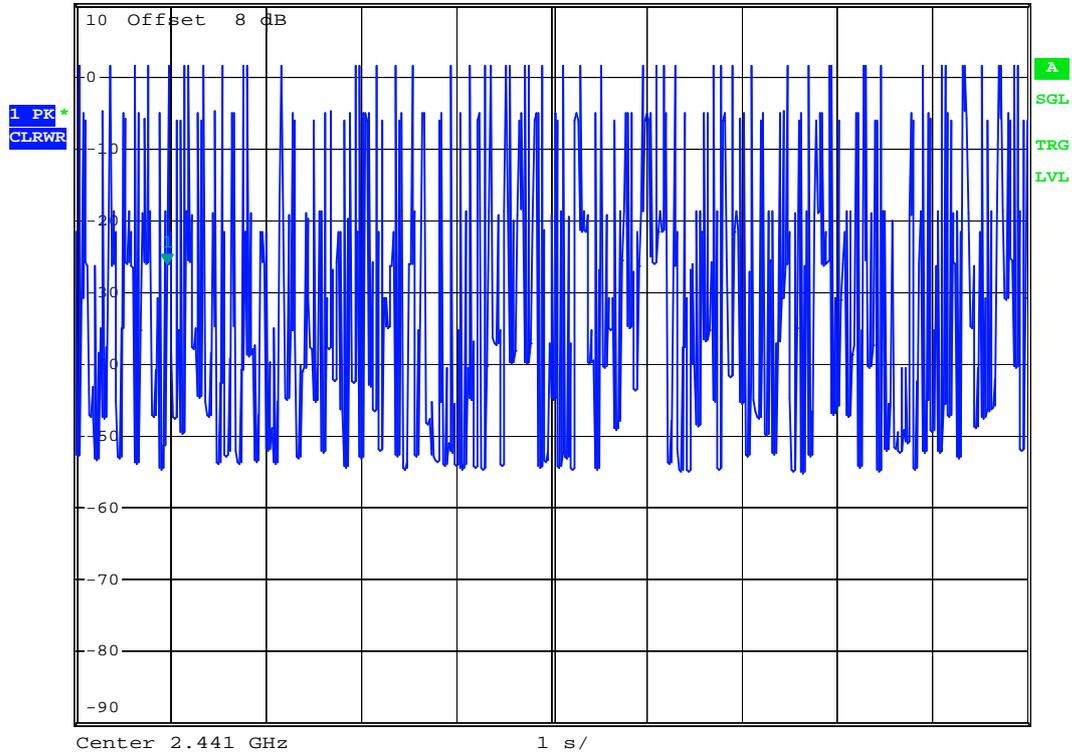

Date: 17.AUG.2006 05:36:26




DH3 (CH78)

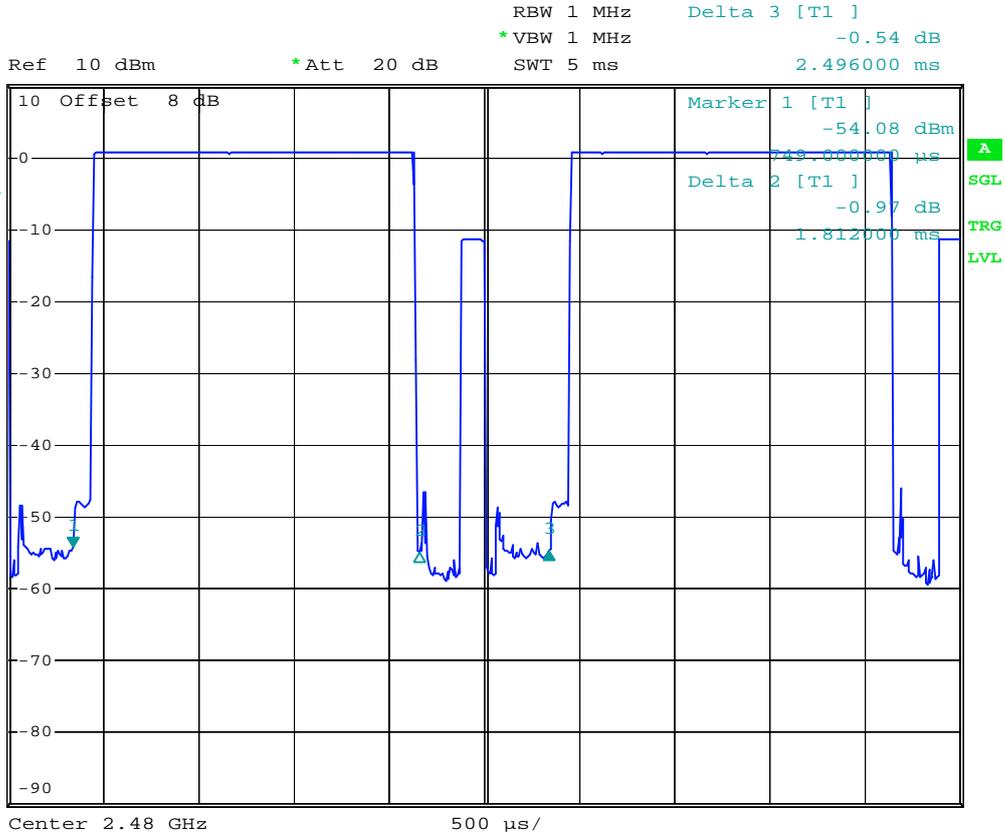

Date: 17.AUG.2006 05:17:19




RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 1 MHz      0.61 dBm  
Ref 10 dBm      \*Att 20 dB      SWT 10 s      960.405000 ms

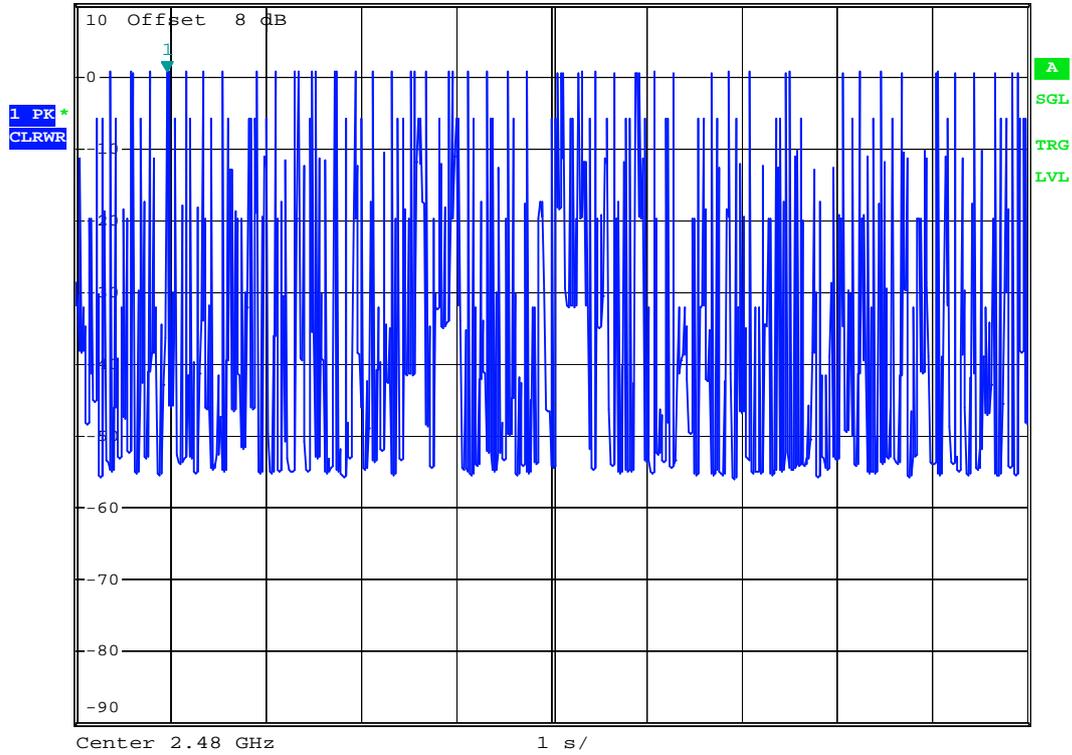


Date: 17.AUG.2006 05:35:01



DH5 (CH00)

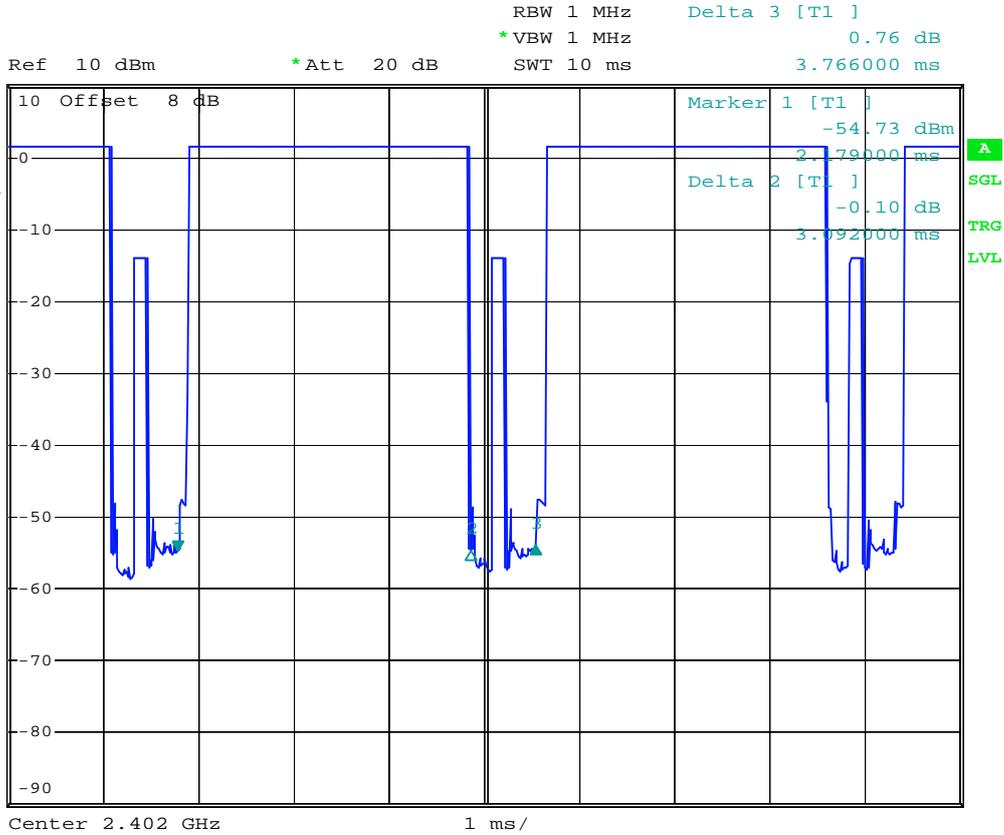

Date: 17.AUG.2006 05:22:51

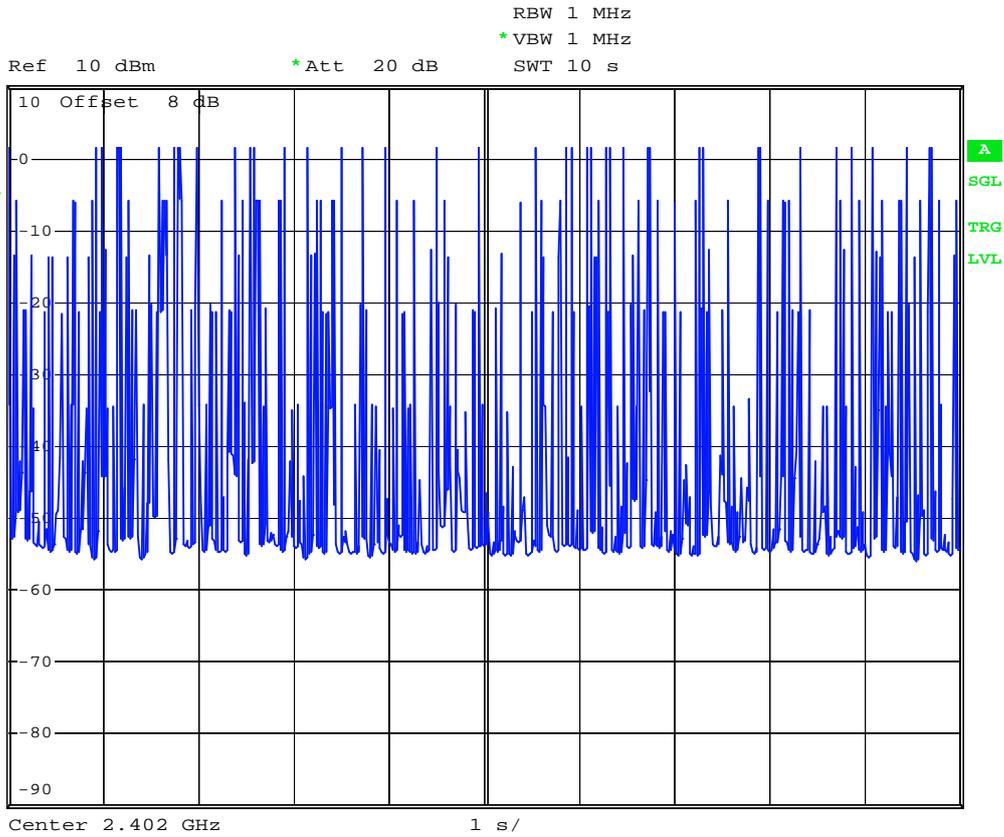


Date: 17.AUG.2006 05:29:19




DH5 (CH39)



RBW 1 MHz      Delta 3 [T1 ]  
 \*VBW 1 MHz      -0.31 dB  
 Ref 10 dBm      \*Att 20 dB      SWT 10 ms      3.766000 ms

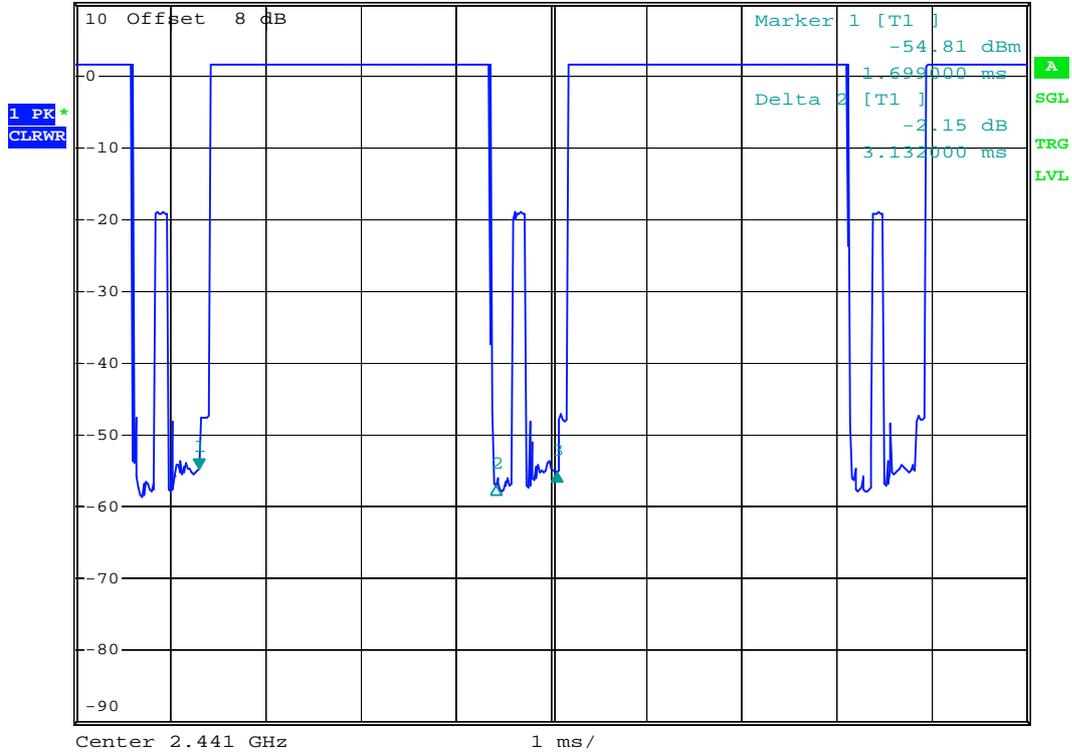

Date: 17.AUG.2006 05:23:58

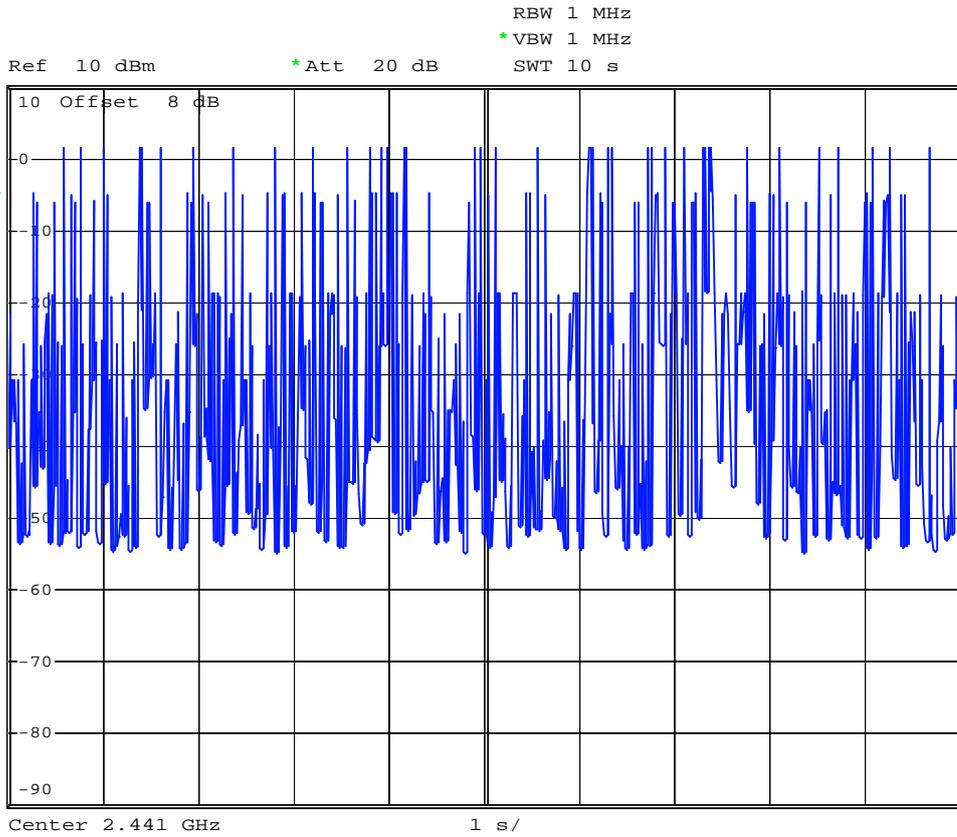


Date: 17.AUG.2006 05:28:44




DH5 (CH78)



RBW 1 MHz      Delta 3 [T1 ]  
 \*VBW 1 MHz      0.26 dB  
 Ref 10 dBm      \*Att 20 dB      SWT 10 ms      3.766000 ms

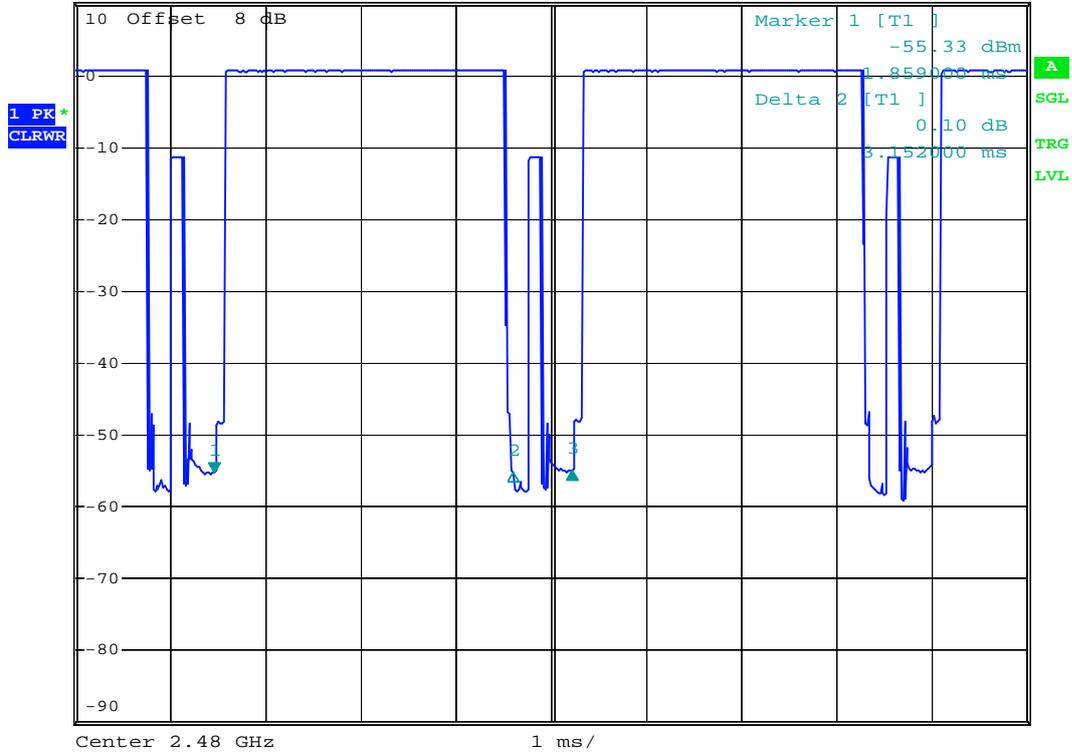

Date: 17.AUG.2006 05:25:10

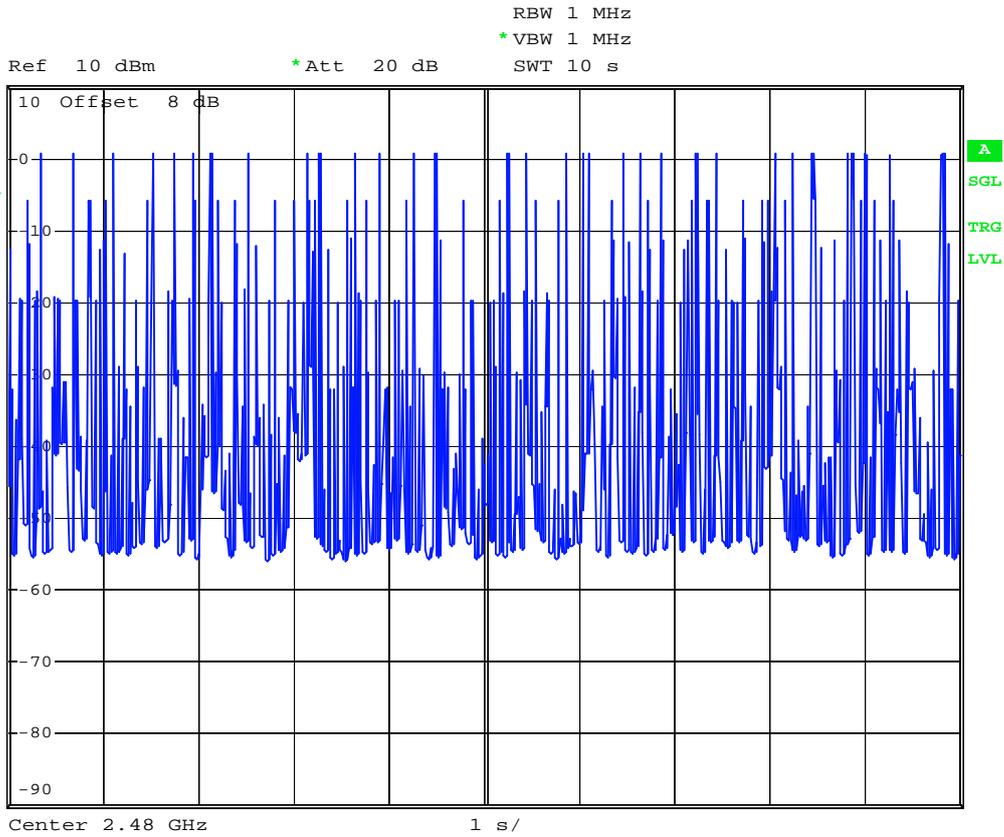

Date: 17.AUG.2006 05:28:06

## 5.6 Output Power


### 5.6.1 Measuring Instruments :

As described in chapter 6 of this test report.

### 5.6.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 3MHz and VBW to 3MHz.

### 5.6.3 Test Setup Layout :

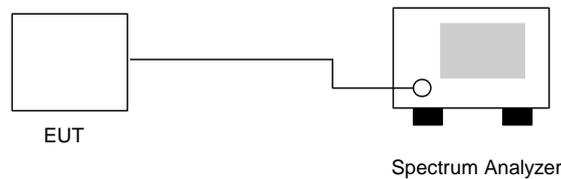

### 5.6.4 Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm )	Plot Ref. No.
00	2402	1.65	1W/30 dBm	Mode 1
39	2441	1.67	1W/30 dBm	Mode 2
78	2480	0.84	1W/30 dBm	Mode 3



5.6.5 Output Power

Mode 1: CH00 (2402MHz)

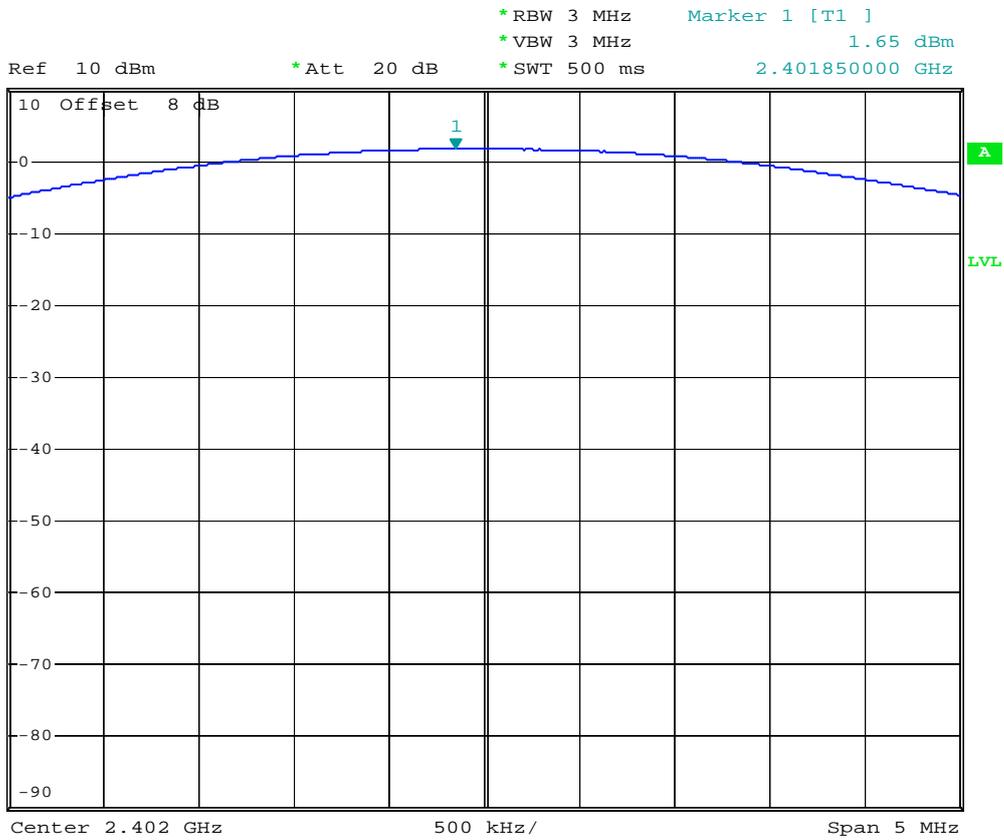


Date: 17.AUG.2006 04:52:55



Mode 2: CH39 (2441MHz)



Ref 10 dBm      \*Att 20 dB      \*RBW 3 MHz      Marker 1 [T1]      1.67 dBm  
\*VBW 3 MHz      2.440830000 GHz  
\*SWT 500 ms

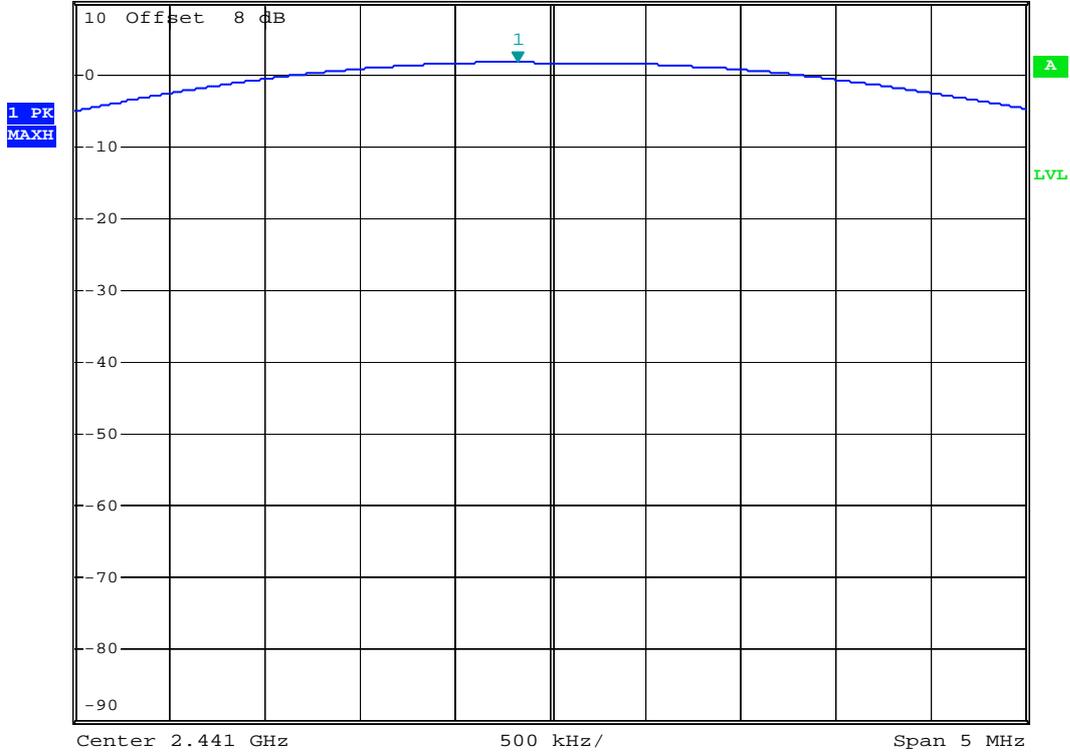


Date: 17.AUG.2006 04:52:20



Mode 3: CH78 (2480MHz)



Ref 10 dBm      \*Att 20 dB      \*RBW 3 MHz      Marker 1 [T1]      0.84 dBm  
\*VBW 3 MHz      \*SWT 500 ms      2.479810000 GHz

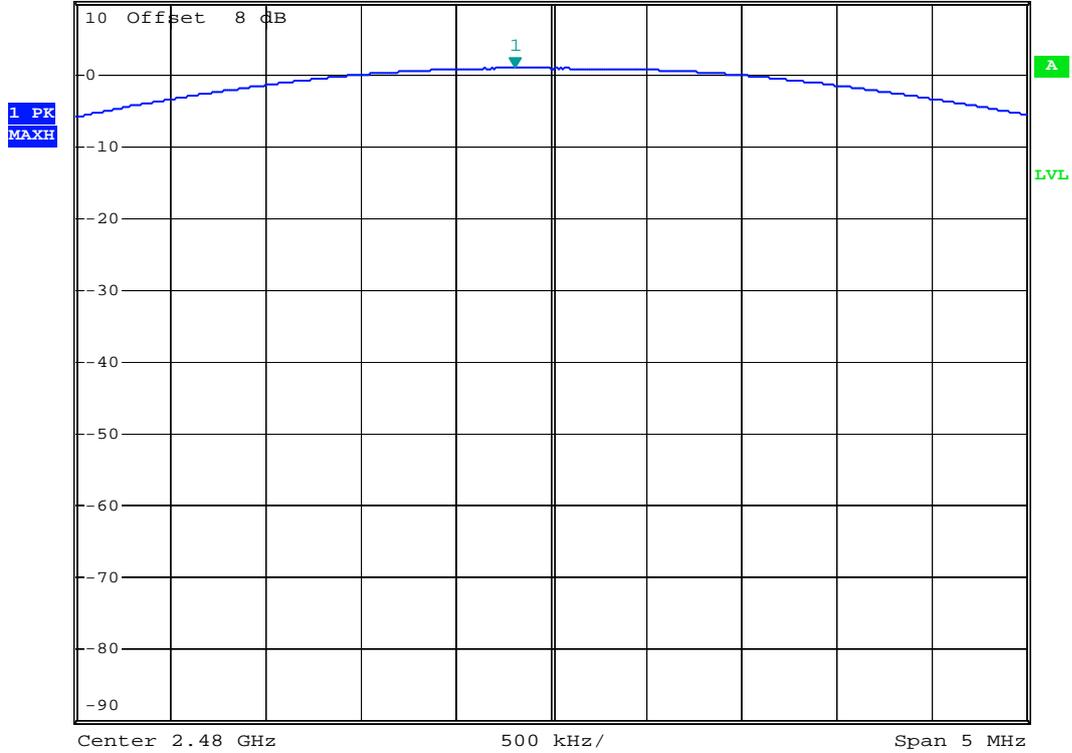

Date: 17.AUG.2006 04:49:29



### 5.7 100kHz Bandwidth of Frequency Band Edges

#### 5.7.1 Measuring Instruments :

As described in chapter 6 of this test report.

#### 5.7.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span for the conducted measurement, and RBW/VBW=1MHz/1MHz for peak measurement and RBW/VBW=1MHz/300Hz for average measurement in the radiated measurement.
3. The band edges was measured and recorded.

#### 5.7.3 Test Result :

- Temperature: 26°C
- Relative Humidity: 51%
- Test Engineer : James

Test Result in lower band (Channel 00) : PASS

Test Result in higher band(Channel 78) : PASS

#### 5.7.4 Note on Band edge Emission

##### CH00 (Horizontal)

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Detect Mode
2376.00	49.98	-24.02	74.00	50.94	30.25	4.23	35.44	100	360	Peak
2376.00	39.34	-14.66	54.00	40.30	30.25	4.23	35.44	100	90	Average

##### CH00 (Vertical)

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Detect Mode
2376.00	49.98	-24.02	74.00	50.94	30.25	4.23	35.44	100	360	Peak
2376.00	39.34	-14.66	54.00	40.30	30.25	4.23	35.44	100	90	Average



CH78 (Horizontal)

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Detect Mode
2483.50	53.41	-20.59	74.00	54.27	30.29	4.36	35.51	100	360	Peak
2483.50	44.57	-9.43	54.00	45.43	30.29	4.36	35.51	116	332	Average

CH78 (Vertical)

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Detect Mode
2483.50	55.35	-18.65	74.00	56.21	30.29	4.36	35.51	100	0	Peak
2483.50	47.46	-6.54	54.00	48.32	30.29	4.36	35.51	107	171	Average




5.7.5 Frequency Band Edge

Mode 1: CH00 (2402 MHz)



Ref 10 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -37.78 dBm  
\*SWT 500 ms      2.399600000 GHz

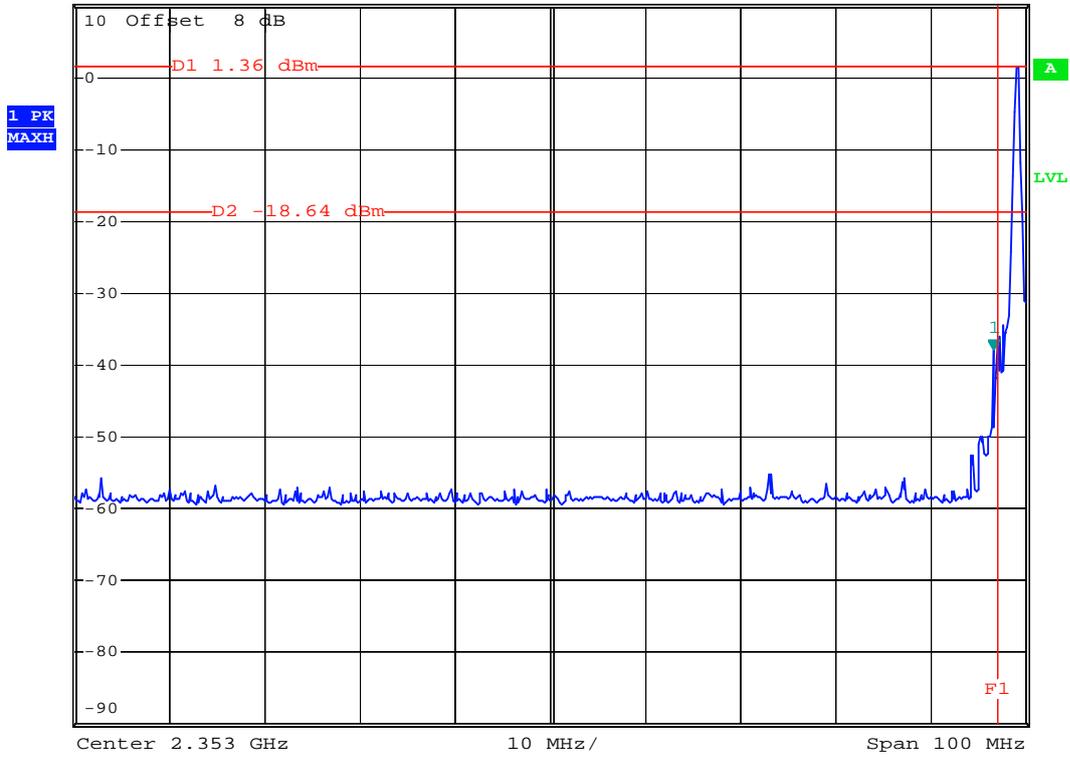

Date: 17.AUG.2006 05:00:34




Mode 3: CH78 (2480 MHz)



\*RBW 100 kHz    Marker 1 [T1 ]  
\*VBW 100 kHz                    -45.82 dBm  
\*SWT 500 ms                      2.48400000 GHz

Ref 10 dBm

\*Att 20 dB

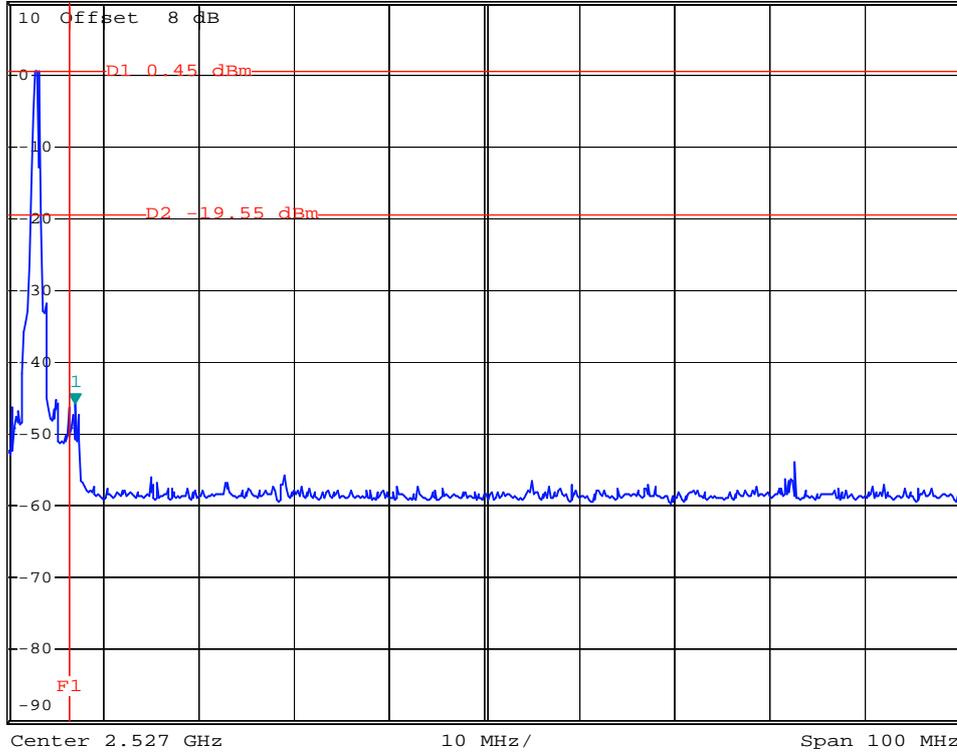

Date: 17.AUG.2006 05:02:00



## **5.8 Conducted Emission**

### **5.8.1 Measuring Instruments**

As described in chapter 6 of this test Report.

### **5.8.2 Test Procedures :**


- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power port of a line impedance stabilization network (LISN).
- c. All the support units are connected to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



5.8.3 Test Data Test Mode 1


- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer: James

The test that passed at minimum margin was marked by the frame in the following table.

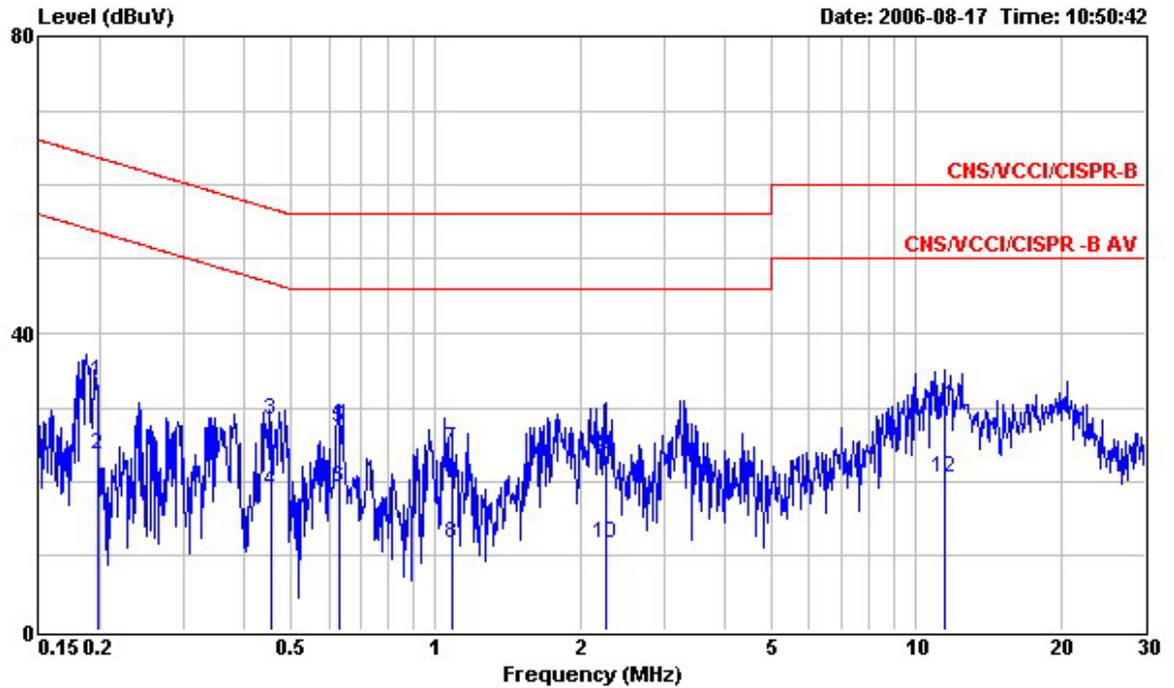

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE  
 EUT : 手持式行動電話(Bluetooth)  
 Power : 120V/60Hz  
 Model : FR680808  
 Memo : PCS 1900 IDLE+BT Link+Earphone+MPEG4  
 Memo : +Adapter  
 Memo :

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.199	33.42	-30.23	63.65	33.30	0.10	0.02	QP
2	0.199	23.71	-29.94	53.65	23.59	0.10	0.02	Average
3	0.456	28.24	-28.52	56.76	27.88	0.10	0.26	QP
4	0.456	18.73	-28.03	46.76	18.37	0.10	0.26	Average
5	0.629	27.29	-28.71	56.00	27.01	0.10	0.18	QP
6	0.629	19.18	-26.82	46.00	18.90	0.10	0.18	Average
7	1.082	24.50	-31.50	56.00	24.32	0.10	0.08	QP
8	1.082	11.65	-34.35	46.00	11.47	0.10	0.08	Average
9	2.260	23.76	-32.24	56.00	23.38	0.12	0.26	QP
10	2.260	11.71	-34.29	46.00	11.33	0.12	0.26	Average
11	11.440	30.19	-29.81	60.00	29.64	0.30	0.25	QP
12	11.440	20.58	-29.42	50.00	20.03	0.30	0.25	Average

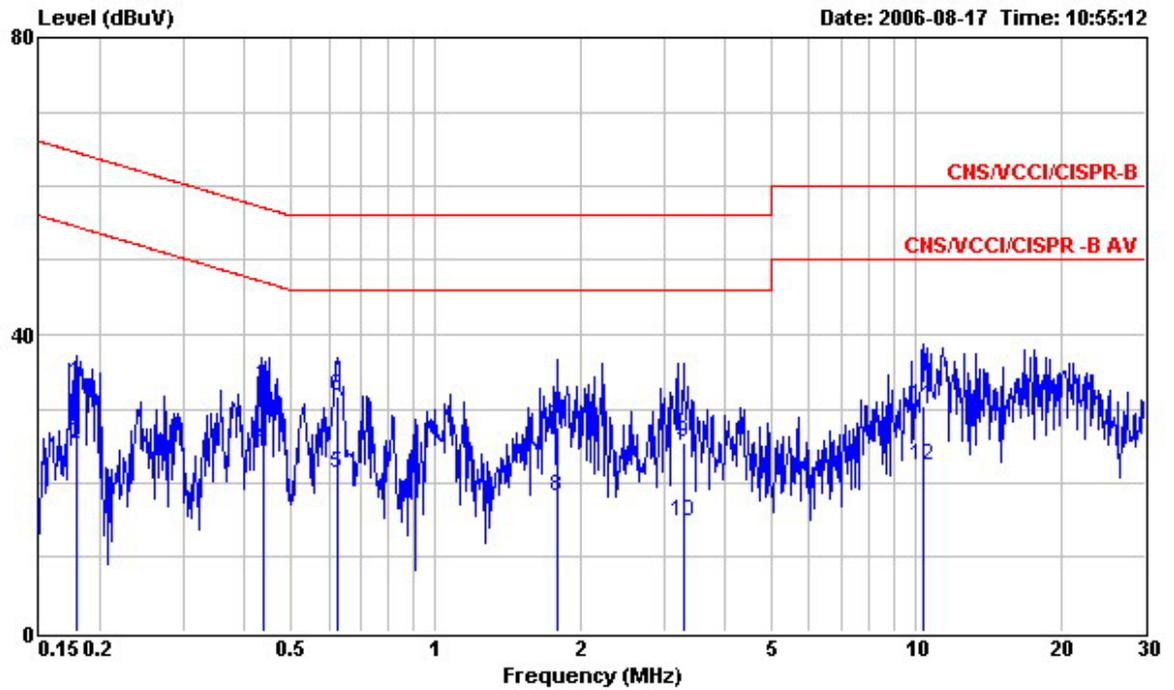

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL  
 EUT : 手持式行動電話 (Bluetooth)  
 Power : 120V/60Hz  
 Model : FR680808  
 Memo : PCS 1900 IDLE+BT Link+Earphone+MPEG4  
 Memo : +Adapter  
 Memo :


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.179	33.47	-31.07	64.54	33.35	0.10	0.02	QP
2	0.179	25.16	-29.38	54.54	25.04	0.10	0.02	Average
3	0.440	32.95	-24.10	57.05	32.58	0.10	0.27	QP
4	0.440	24.81	-22.24	47.05	24.44	0.10	0.27	Average
5	0.624	21.43	-24.57	46.00	21.15	0.10	0.18	Average
6	0.624	31.63	-24.37	56.00	31.35	0.10	0.18	QP
7	1.799	27.42	-28.58	56.00	27.09	0.10	0.23	QP
8	1.799	18.10	-27.90	46.00	17.77	0.10	0.23	Average
9	3.280	25.47	-30.53	56.00	25.12	0.10	0.25	QP
10	3.280	14.82	-31.18	46.00	14.47	0.10	0.25	Average
11	10.340	30.44	-29.56	60.00	30.00	0.21	0.23	QP
12	10.340	22.39	-27.61	50.00	21.95	0.21	0.23	Average



5.8.4 Test Data Test Mode 2


- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer: James

The test that passed at minimum margin was marked by the frame in the following table.

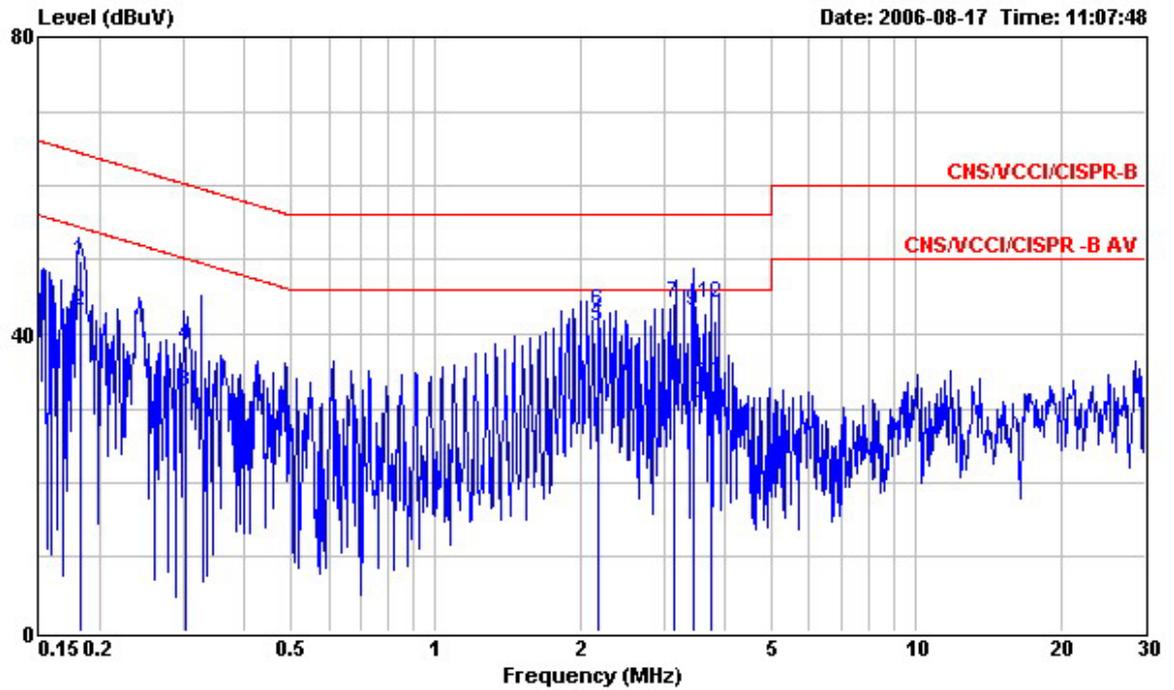

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE  
 EUT : 手持式行動電話 (Bluetooth)  
 Power : 120V/60Hz  
 Model : FR680808  
 Memo : PCS 1900 Idle+BT Link+Earphone+USB Link  
 Memo : +MPEG4  
 Memo :

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.182	49.78	-14.61	64.39	49.66	0.10	0.02	QP
2	0.182	43.00	-11.39	54.39	42.88	0.10	0.02	Average
3	0.302	32.22	-17.98	50.20	31.94	0.10	0.18	Average
4	0.302	38.49	-21.71	60.20	38.21	0.10	0.18	QP
5	2.181	40.92	-5.08	46.00	40.55	0.11	0.26	Average
6	2.181	43.16	-12.84	56.00	42.79	0.11	0.26	QP
7	3.150	44.04	-11.96	56.00	43.62	0.17	0.25	QP
8	3.150	33.88	-12.12	46.00	33.46	0.17	0.25	Average
9	3.458	43.03	-12.97	56.00	42.60	0.18	0.25	QP
10	3.458	30.60	-15.40	46.00	30.17	0.18	0.25	Average
11	3.750	33.42	-12.58	46.00	32.98	0.19	0.25	Average
12	3.750	44.23	-11.77	56.00	43.79	0.19	0.25	QP

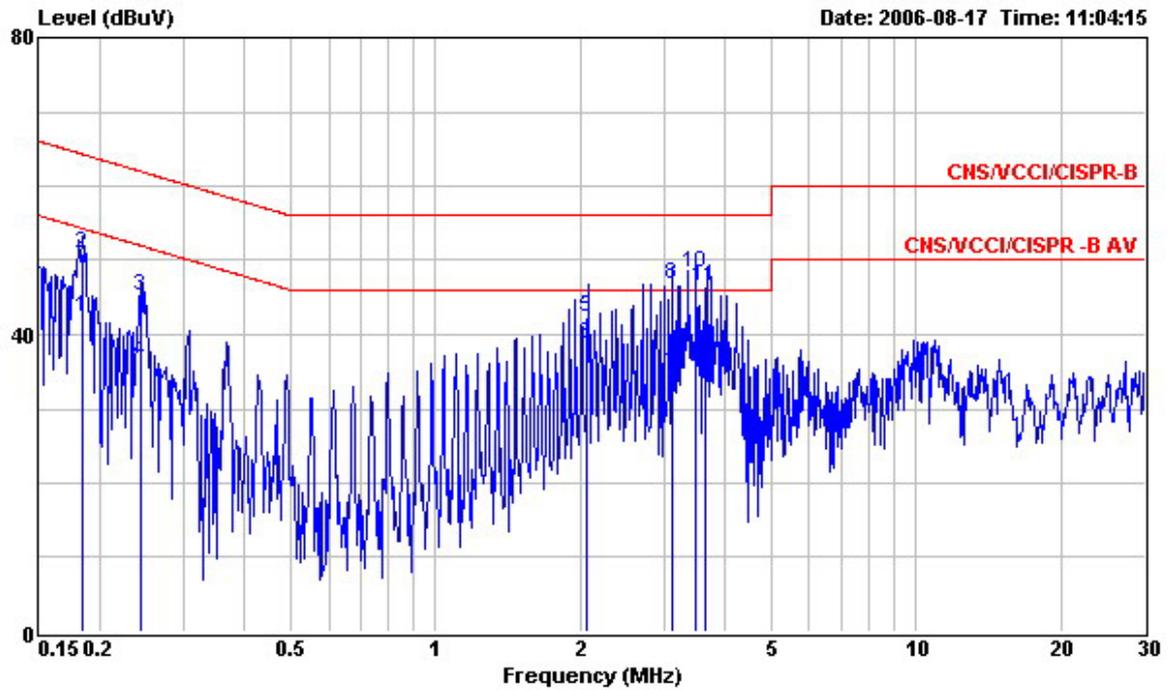

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL  
 EUT : 手持式行動電話 (Bluetooth)  
 Power : 120V/60Hz  
 Model : FR680808  
 Memo : PCS 1900 Idle+BT Link+Earphone+USB Link  
 Memo : +MPEG4  
 Memo :


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	42.37	-11.93	54.30	42.25	0.10	0.02	Average
2	0.184	50.84	-13.46	64.30	50.72	0.10	0.02	QP
3	0.244	45.16	-16.80	61.96	44.96	0.10	0.10	QP
4	0.244	36.48	-15.48	51.96	36.28	0.10	0.10	Average
5	2.071	42.21	-13.79	56.00	41.85	0.10	0.26	QP
6	2.071	38.71	-7.29	46.00	38.35	0.10	0.26	Average
7	3.111	34.50	-11.50	46.00	34.15	0.10	0.25	Average
8	3.111	46.67	-9.33	56.00	46.32	0.10	0.25	QP
9	3.476	36.12	-9.88	46.00	35.77	0.10	0.25	Average
10	3.476	48.19	-7.81	56.00	47.84	0.10	0.25	QP
11	3.655	46.37	-9.63	56.00	46.02	0.10	0.25	QP
12	3.655	34.85	-11.15	46.00	34.50	0.10	0.25	Average



5.8.5 Test Data Test Mode 3


- Temperature: 26°C
- Relative Humidity: 46%
- Test Engineer: Sam

The test that passed at minimum margin was marked by the frame in the following table.

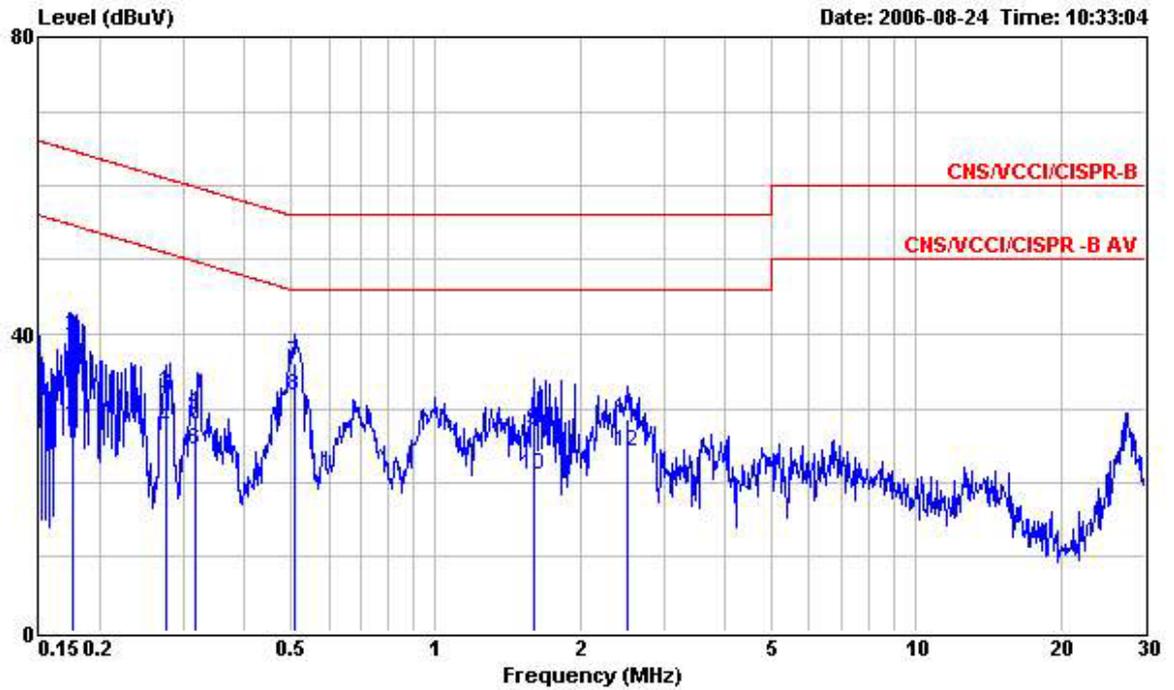

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 LINE  
 EUT : 手持式行動電話 (Bluetooth)  
 Power : 120V/60Hz  
 Model : FD681602-03  
 Memo :  
 Memo :  
 Memo :

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.176	27.84	-26.82	54.66	27.72	0.10	0.02	Average
2	0.176	39.67	-24.99	64.66	39.55	0.10	0.02	QP
3	0.276	32.08	-28.85	60.93	31.83	0.10	0.15	QP
4	0.276	27.18	-23.75	50.93	26.93	0.10	0.15	Average
5	0.316	29.09	-30.72	59.81	28.79	0.10	0.20	QP
6	0.316	24.41	-25.40	49.81	24.11	0.10	0.20	Average
7	0.510	36.13	-19.87	56.00	35.80	0.10	0.23	QP
8	0.510	31.70	-14.30	46.00	31.37	0.10	0.23	Average
9	1.603	26.93	-29.07	56.00	26.63	0.10	0.20	QP
10	1.603	20.93	-25.07	46.00	20.63	0.10	0.20	Average
11	2.500	28.66	-27.34	56.00	28.27	0.13	0.26	QP
12	2.500	24.04	-21.96	46.00	23.65	0.13	0.26	Average

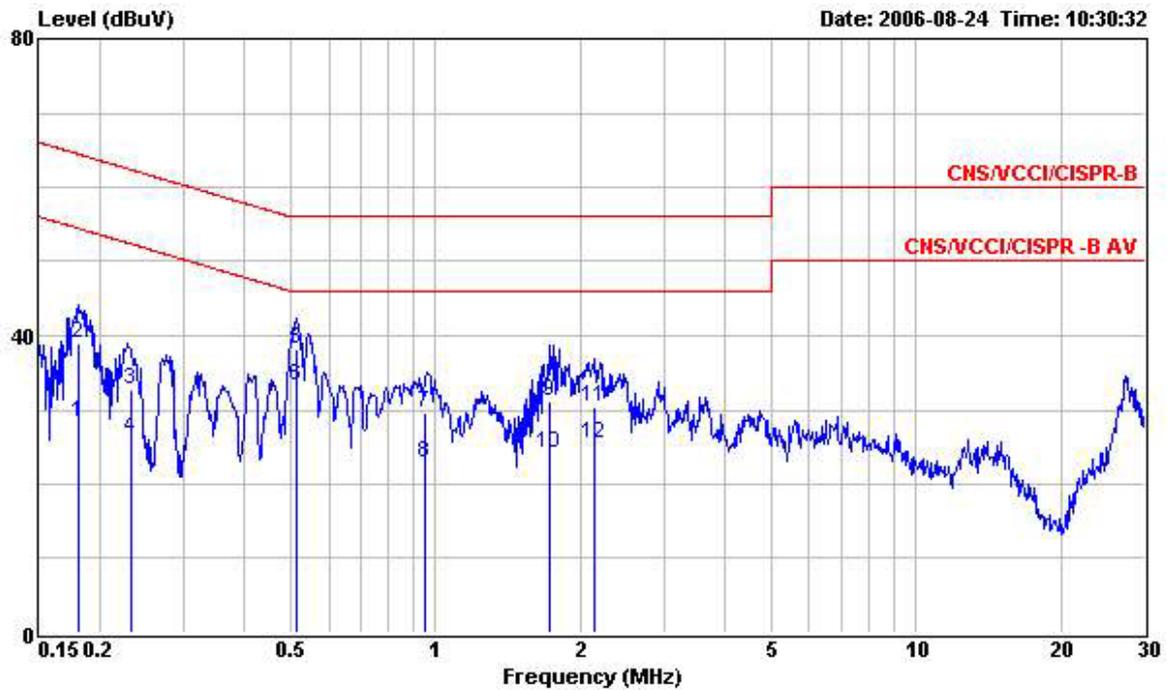

Site : CO01-HY  
 Condition : CNS/VCCI/CISPR-B 2001/004 200604 NEUTRAL  
 EUT : 手持式行動電話 (Bluetooth)  
 Power : 120V/60Hz  
 Model : FD681602-03  
 Memo :  
 Memo :  
 Memo :

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.181	28.23	-26.22	54.45	28.11	0.10	0.02	Average
2	0.181	38.83	-25.62	64.45	38.71	0.10	0.02	QP
3	0.233	32.81	-29.54	62.35	32.63	0.10	0.08	QP
4	0.233	26.19	-26.16	52.35	26.01	0.10	0.08	Average
5	0.512	38.26	-17.74	56.00	37.93	0.10	0.23	QP
6	0.512	33.20	-12.80	46.00	32.87	0.10	0.23	Average
7	0.954	29.59	-26.41	56.00	29.42	0.10	0.07	QP
8	0.954	22.82	-23.18	46.00	22.65	0.10	0.07	Average
9	1.727	31.23	-24.77	56.00	30.91	0.10	0.22	QP
10	1.727	24.28	-21.72	46.00	23.96	0.10	0.22	Average
11	2.137	30.36	-25.64	56.00	30.00	0.10	0.26	QP
12	2.137	25.43	-20.57	46.00	25.07	0.10	0.26	Average

## 5.9 Radiated Emission Measurement


### 5.9.1 Measuring Instruments

As described in chapter 6 of this Report.

### 5.9.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. For testing below 1GHz, If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 5.9.3 Typical Test Setup Layout of Radiated Emission

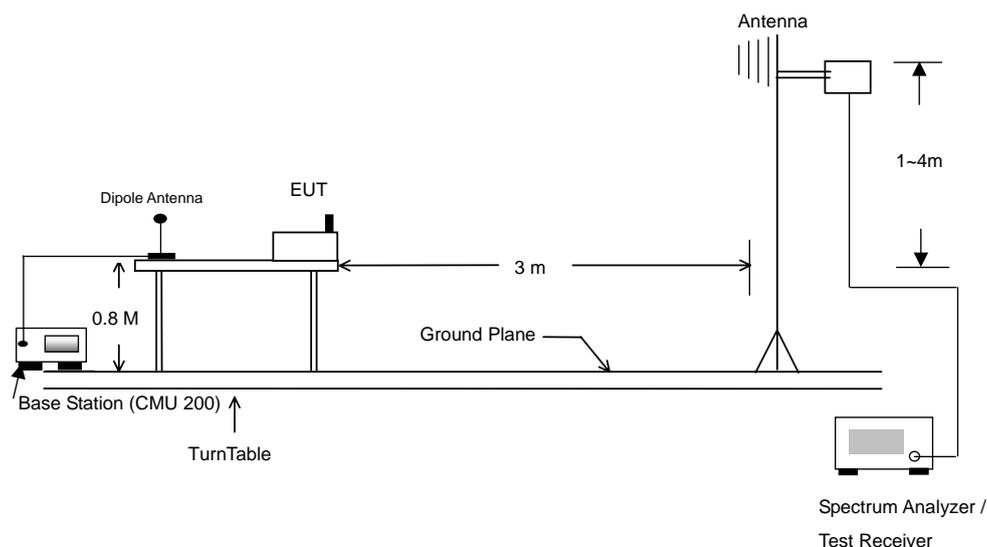




5.9.4 Test Data

- Temperature : 26 °C
- Relating Humidity : 51 %
- Test Engineer : Andrew
- Test Mode : Mode 1
- Polarization : Horizontal


The test that passed at the minimum margin was marked by the frame in the following test record

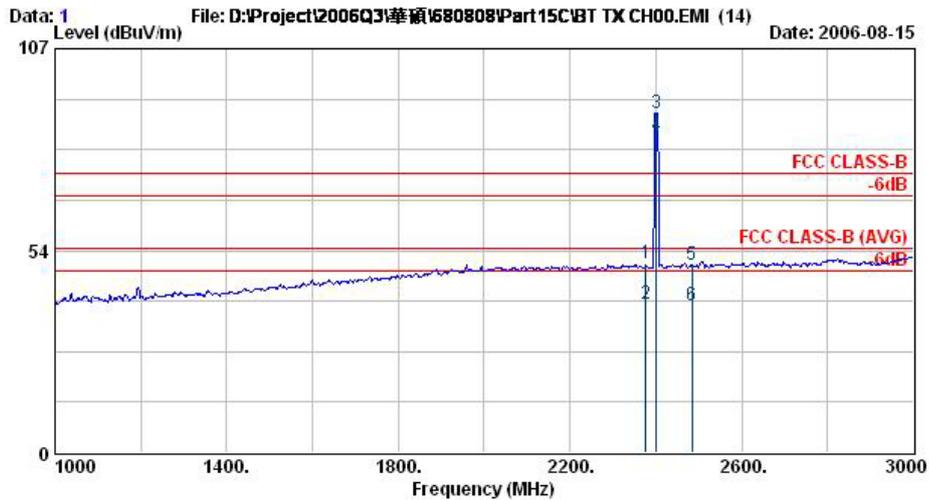

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DH5


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	49.98	-24.02	74.00	50.94	30.25	4.23	35.44	100	360	Peak
2	2376.00	39.34	-14.66	54.00	40.30	30.25	4.23	35.44	100	90	Average
3 @	2402.00	89.90			90.83	30.26	4.26	35.46	100	360	Peak
4 @	2402.00	83.81			84.75	30.26	4.26	35.46	100	90	Average
5	2484.00	49.72	-24.28	74.00	50.58	30.29	4.36	35.51	100	360	Peak
6	2484.00	39.03	-14.97	54.00	39.89	30.29	4.36	35.51	100	90	Average

Remark: #3 and #4 Fundamental Signal

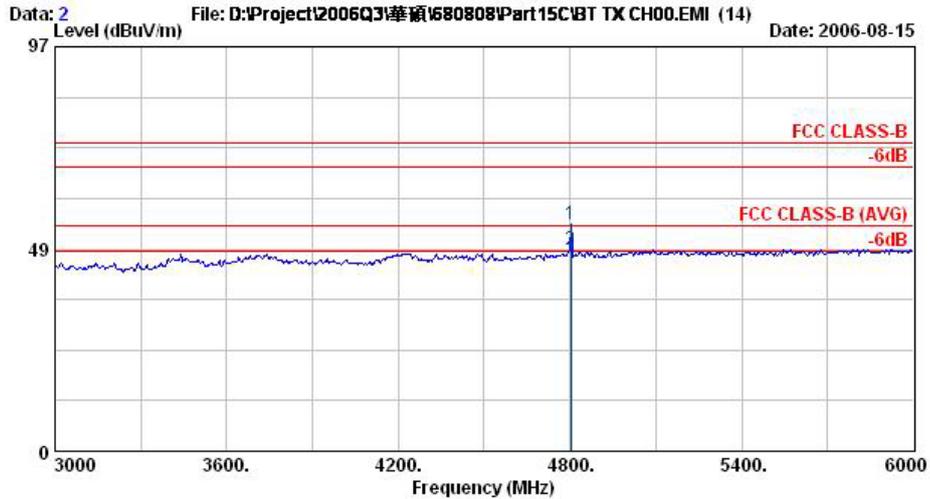


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4804.00	54.50	-19.50	74.00	51.50	32.88	6.21	36.10	200	0	Peak
2 @	4804.00	48.32	-5.68	54.00	45.32	32.88	6.21	36.10	165	346	Average

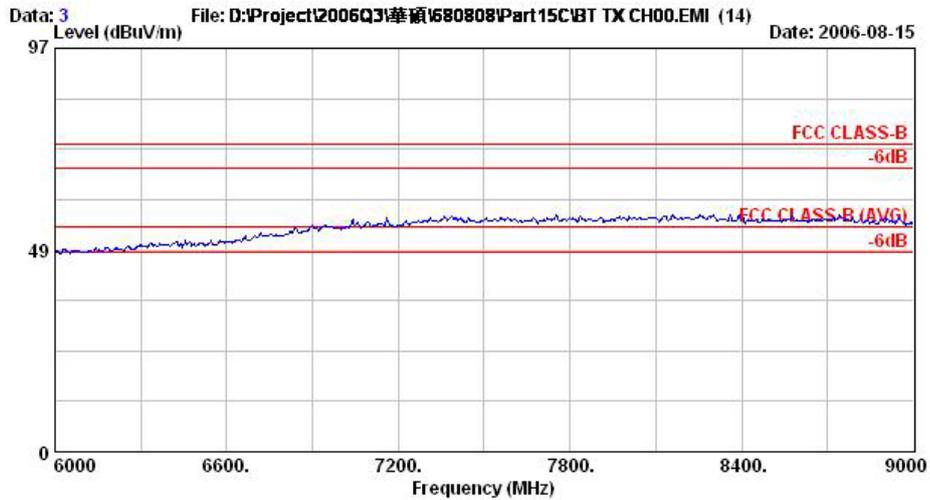

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DHS

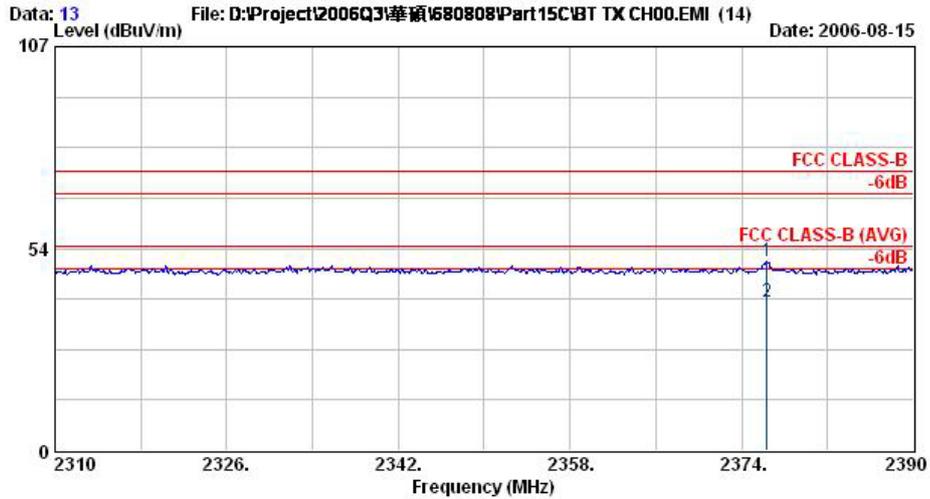


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	2376.32	49.98	-24.02	74.00	50.93	30.25	4.23	35.44	100	0 Peak
2	2376.32	39.34	-14.66	54.00	40.30	30.25	4.23	35.44	100	90 Average



- Test Mode : Mode 1
- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

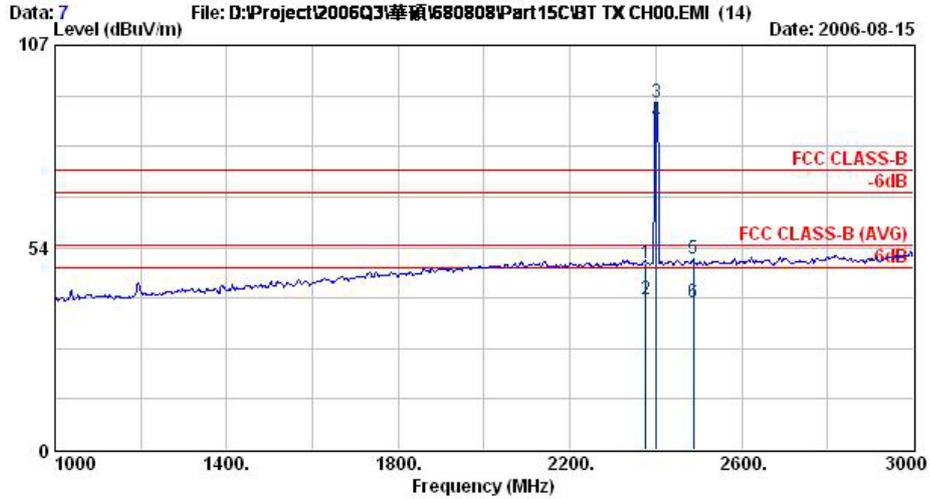

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DH5


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	49.16	-24.84	74.00	50.12	30.25	4.23	35.44	100	0	Peak
2	2376.00	39.63	-14.37	54.00	40.59	30.25	4.23	35.44	100	275	Average
3 @	2402.00	92.05			92.98	30.27	4.26	35.46	100	0	Peak
4 @	2402.00	86.63			87.57	30.26	4.26	35.46	100	275	Average
5	2488.00	50.33	-23.67	74.00	51.18	30.30	4.36	35.51	100	0	Peak
6	2488.00	39.05	-14.95	54.00	39.90	30.30	4.36	35.51	100	275	Average

Remark: #3 and #4 Fundamental Signal

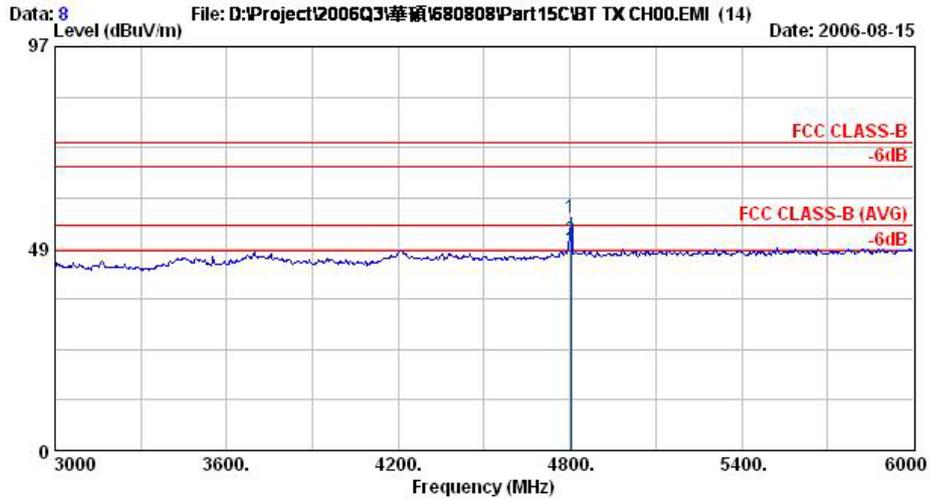


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark
1	4804.00	55.80	-18.20	74.00	52.81	32.88	6.21	36.10	200	360	Peak
2 @	4804.00	50.60	-3.40	54.00	47.60	32.88	6.21	36.10	100	159	Average

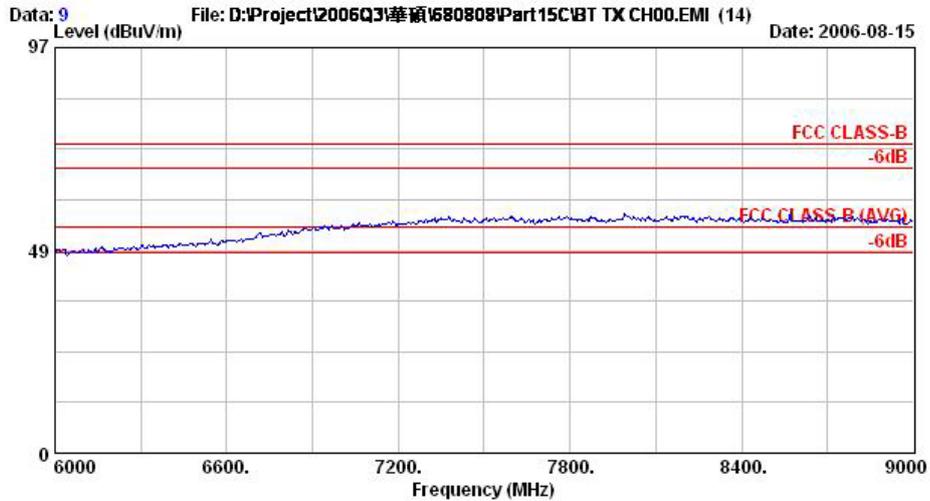

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DHS

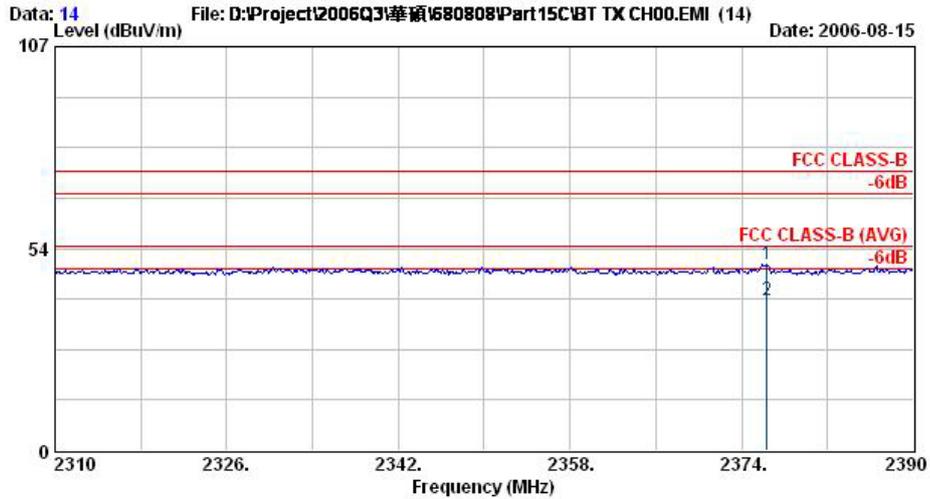


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH00,2402MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	2376.32	49.16	-24.84	74.00	50.11	30.25	4.23	35.44	100	0 Peak
2 @	2376.32	39.63	-14.37	54.00	40.59	30.25	4.23	35.44	100	274 Average




- Test Mode : Mode 2
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

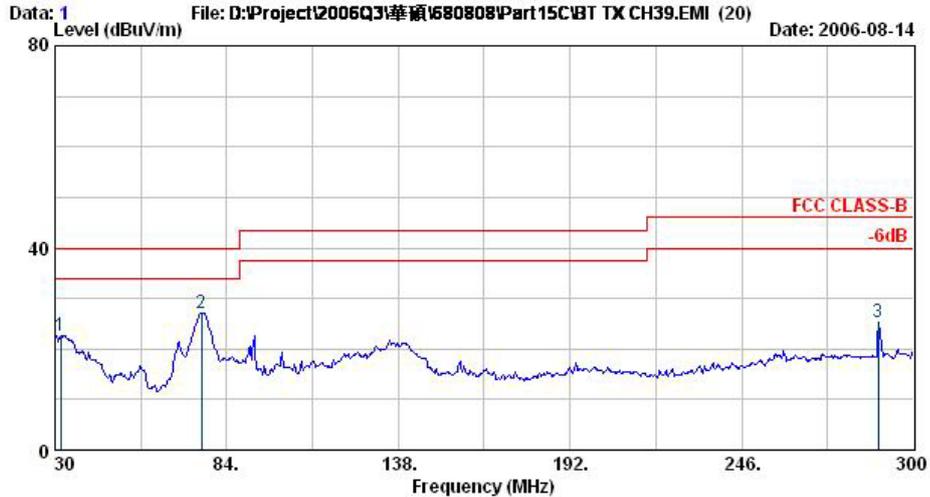


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos	
					dBuV	dB/m	dB	dB	cm	deg	
1 @	31.89	22.68	-17.32	40.00	32.27	18.07	0.97	28.63	400	0	Peak
2 @	76.17	27.16	-12.84	40.00	47.60	6.78	1.49	28.71	102	320	Peak
3 @	288.93	25.42	-20.58	46.00	38.30	12.93	3.11	28.91	400	0	Peak

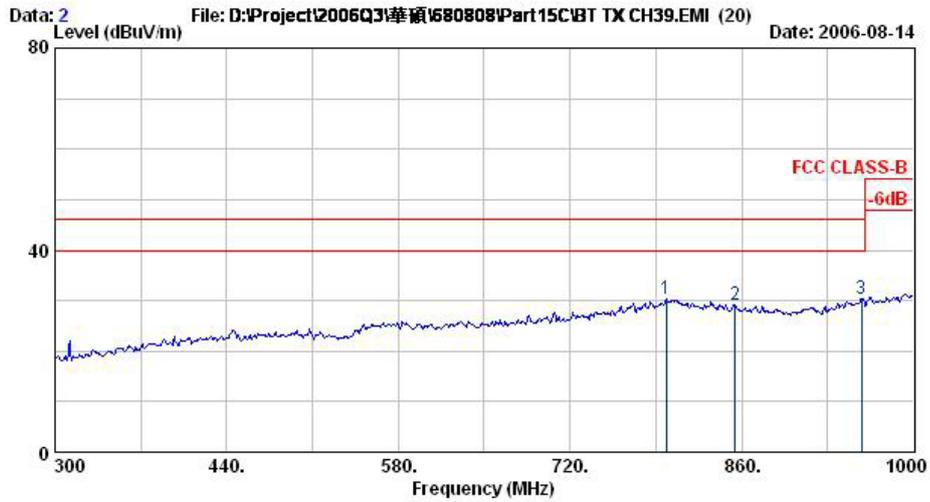


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	798.40	30.32	-15.68	46.00	31.75	21.84	5.60	28.87	100	0	Peak
2 @	854.40	29.17	-16.83	46.00	31.68	20.83	5.76	29.10	100	0	Peak
3 @	958.00	30.21	-15.80	46.00	31.31	21.71	6.05	28.87	100	0	Peak

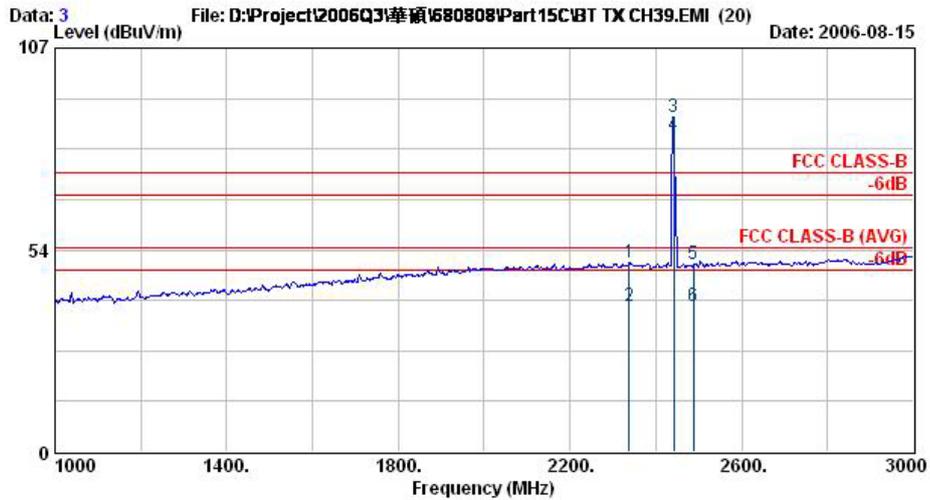


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 @	2338.00	50.14	-23.86	74.00	51.14	30.24	4.17	35.40	100	360 Peak
2 @	2338.00	38.67	-15.33	54.00	39.67	30.24	4.17	35.40	106	90 Average
3 @	2441.00	88.60	14.60	74.00	89.50	30.28	4.29	35.47	100	360 Peak
4 @	2441.00	83.97	29.97	54.00	84.86	30.28	4.33	35.49	106	90 Average
5 @	2488.00	49.80	-24.20	74.00	50.65	30.30	4.36	35.51	100	360 Peak
6 @	2488.00	38.65	-15.35	54.00	39.50	30.30	4.36	35.51	106	90 Average

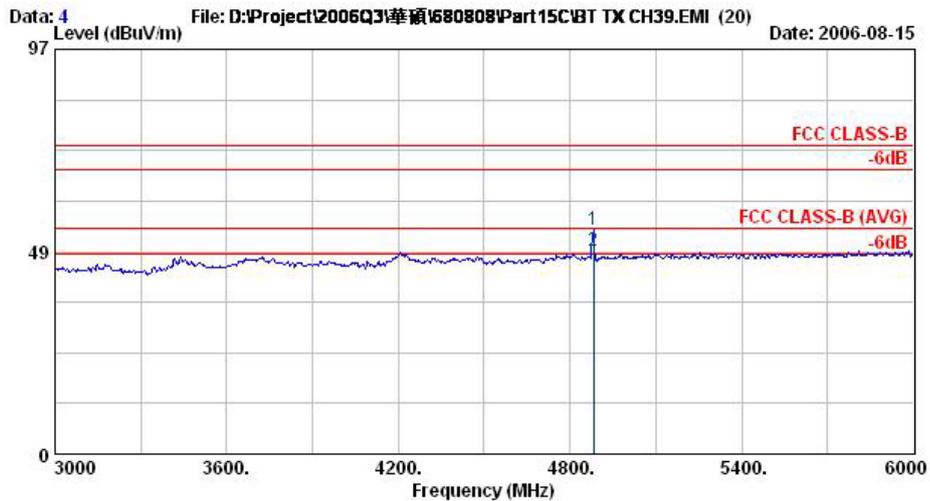

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	4882.00	53.71	-20.29	74.00	50.43	33.14	6.30	36.16	200	0	Peak
2 @	4882.00	48.85	-5.15	54.00	45.57	33.14	6.30	36.16	173	350	Average

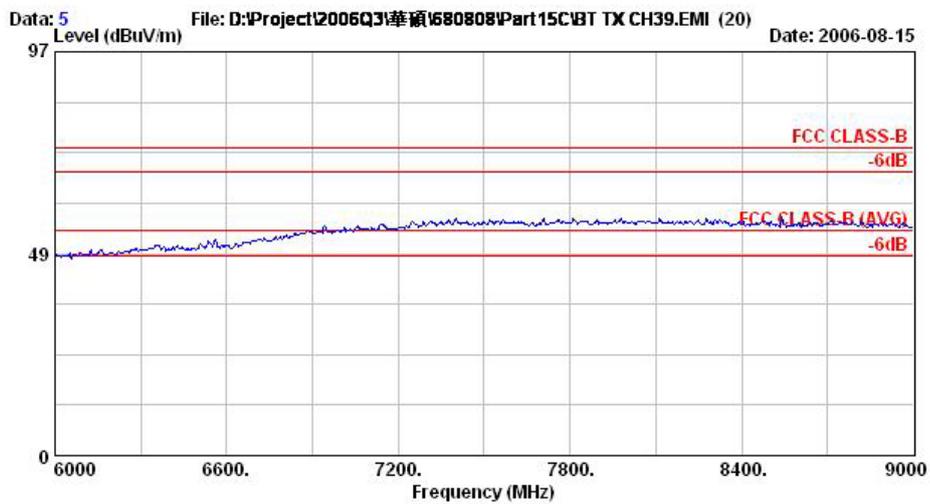


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5




- Test Mode : Mode 2
- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

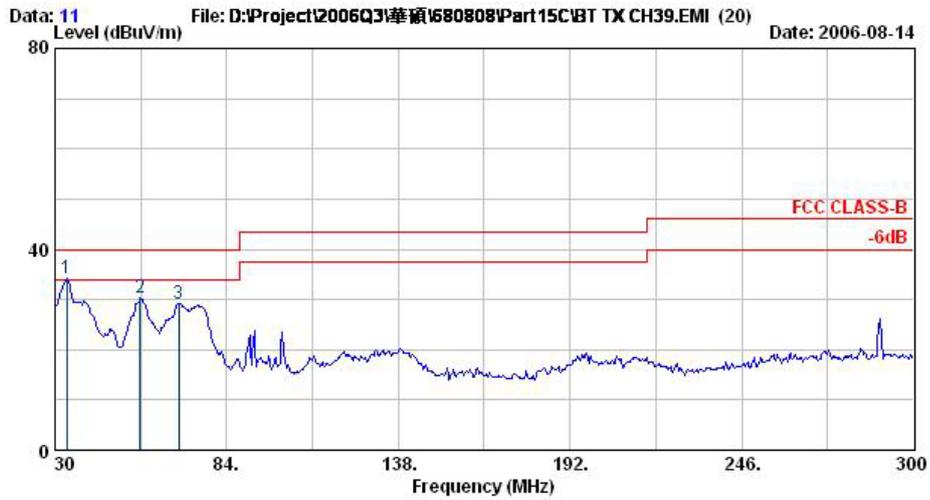


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	33.78	34.16	-5.84	40.00	44.35	17.40	1.04	28.64	125	220	Peak
2 @	56.73	30.27	-9.73	40.00	50.19	7.54	1.18	28.64	400	0	Peak
3 @	68.88	29.26	-10.74	40.00	50.30	6.29	1.34	28.68	400	0	Peak

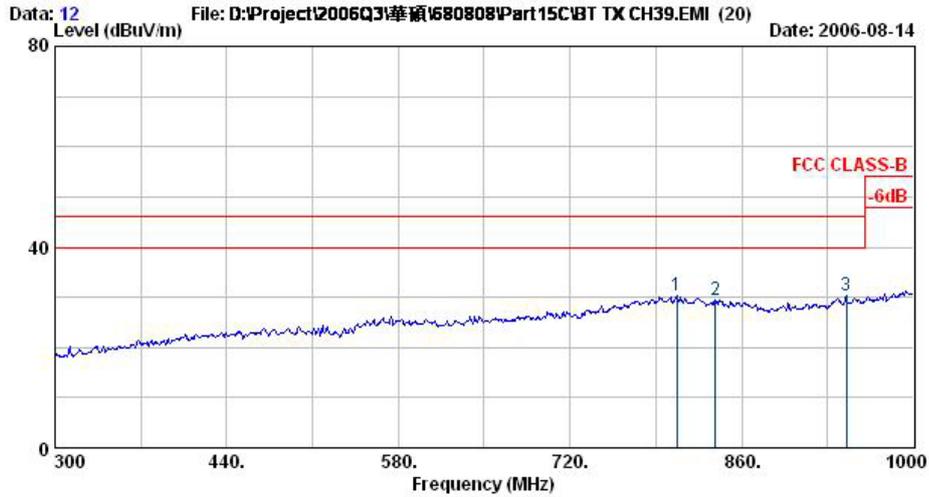


Site : 03CH06-HY  
 Condition : BI-LOG-2004-1122 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	806.80	30.28	-15.72	46.00	31.83	21.77	5.59	28.91	100	0	Peak
2 @	838.30	29.37	-16.63	46.00	31.62	21.16	5.67	29.07	100	0	Peak
3 @	945.40	30.28	-15.72	46.00	31.72	21.32	6.10	28.86	100	0	Peak

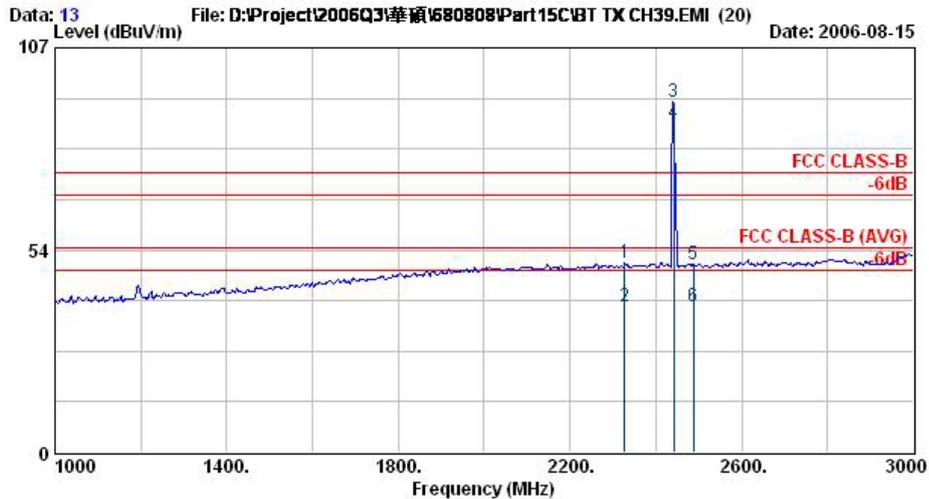


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2328.00	49.95	-24.05	74.00	50.95	30.23	4.17	35.40	100	0	Peak

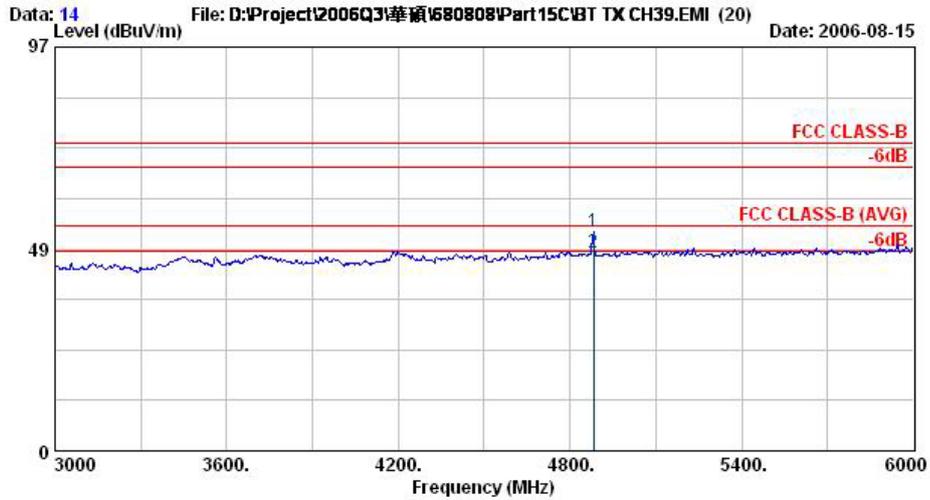

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	4882.00	52.73	-21.27	74.00	49.45	33.14	6.30	36.16	200	360	Peak
2 @	4882.00	47.57	-6.43	54.00	44.29	33.14	6.30	36.16	100	150	Average

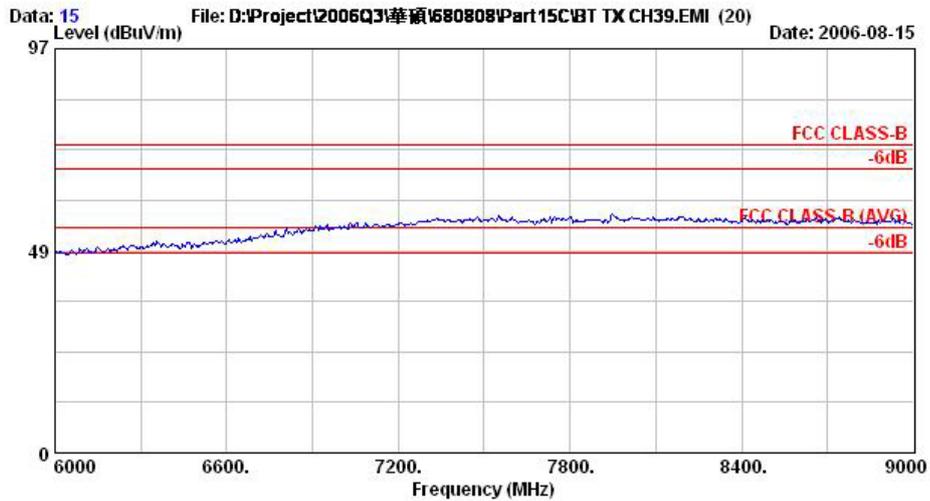


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH39,2441MHz  
 Plane : E1  
 Data Rate : DH5



- Test Mode : Mode 3
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

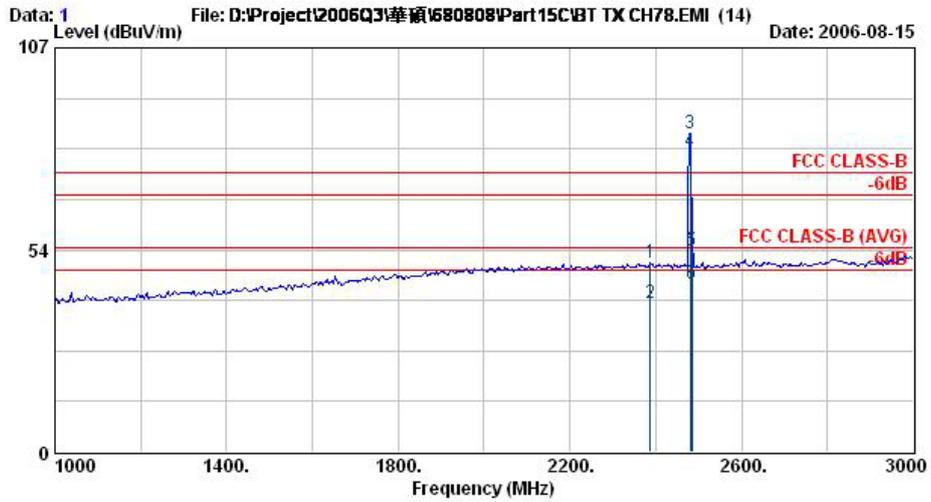

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DHS


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Pos	Pos	Remark	
					dB/m			cm	deg		
1	2388.00	50.21	-23.79	74.00	51.16	30.26	4.23	35.44	100	360	Peak
2	2388.00	39.42	-14.58	54.00	40.37	30.26	4.23	35.44	116	332	Average
3 @	2480.00	84.46			85.32	30.29	4.36	35.51	100	360	Peak
4 @	2480.00	79.46			80.32	30.29	4.36	35.51	116	332	Average
5	2483.50	53.41	-20.59	74.00	54.27	30.29	4.36	35.51	100	360	Peak
6	2483.50	44.57	-9.43	54.00	45.43	30.29	4.36	35.51	116	332	Average

Remark: #3 and #4 Fundamental Signal

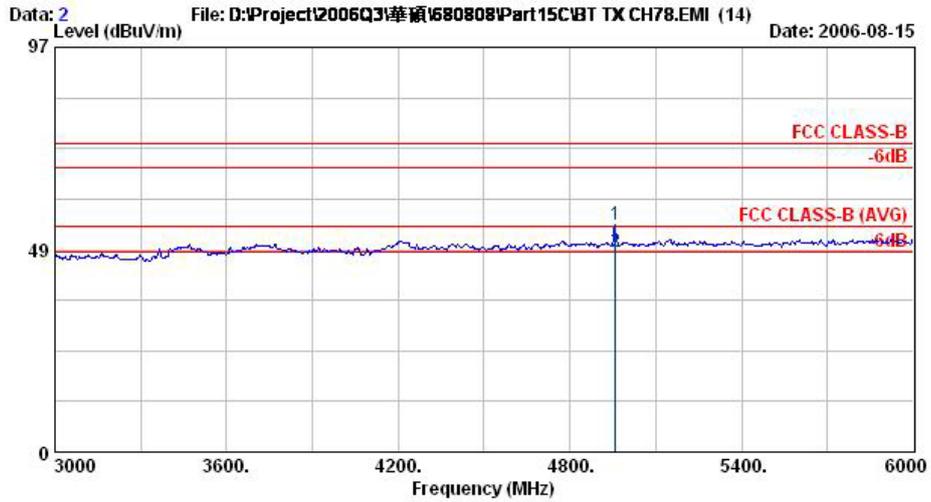


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4960.00	54.52	-19.48	74.00	50.88	33.47	6.39	36.23	200	0	Peak
2 @	4960.00	47.97	-6.03	54.00	44.34	33.47	6.39	36.23	100	21	Average

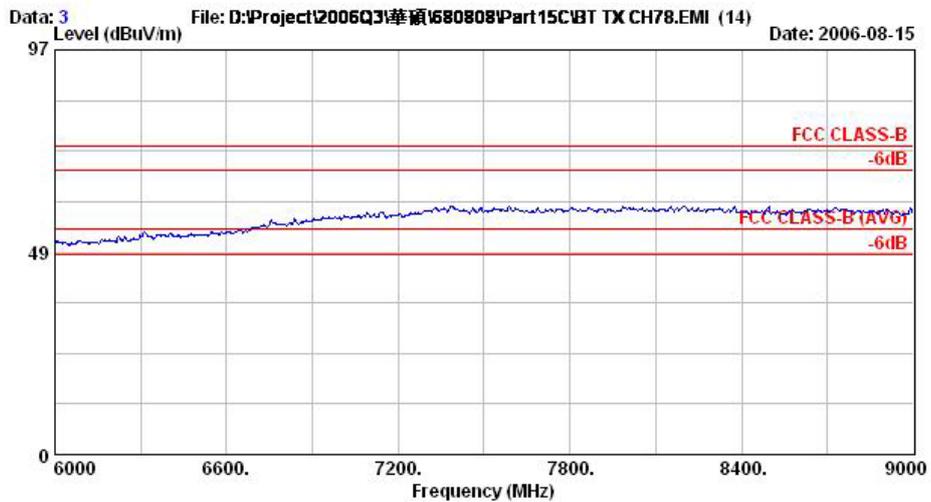

Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DH5

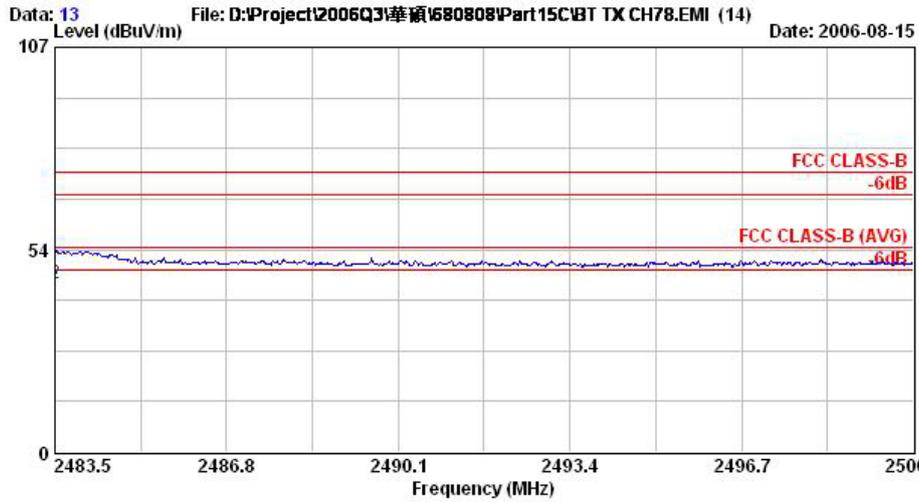


Site : 03CH06-HY  
 Condition : HF-ANT-060410 HORIZONTAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DH5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	53.41	-20.59	74.00	54.27	30.29	4.36	35.51	100	0	Peak
2	2483.50	44.57	-9.43	54.00	45.43	30.29	4.36	35.51	116	332	Average



- Test Mode : Mode 3
- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

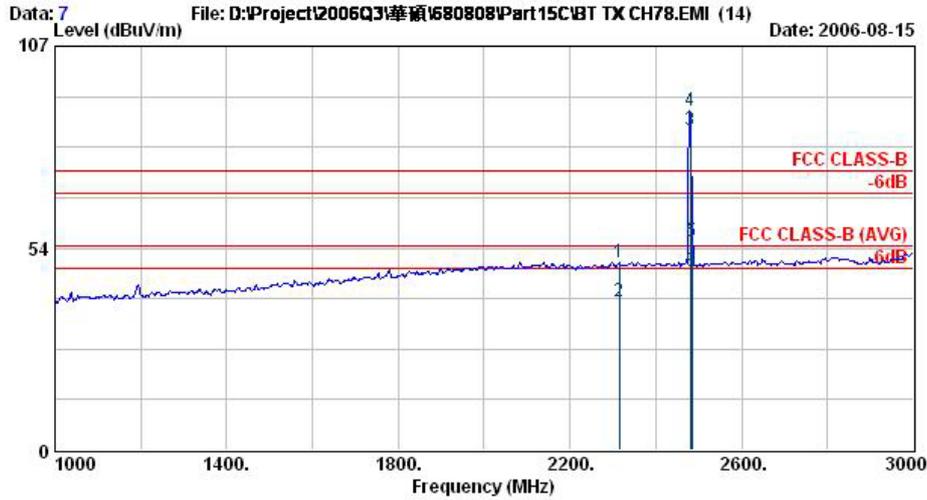


Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2314.00	49.69	-24.31	74.00	50.70	30.22	4.17	35.40	100	0	Peak
2	2314.00	39.38	-14.62	54.00	40.39	30.22	4.17	35.40	107	171	Average
3 @	2480.00	84.65			85.66	30.22	4.17	35.40	107	171	Average
4 @	2480.00	89.94			90.80	30.29	4.36	35.51	100	0	Peak
5	2483.50	55.35	-18.65	74.00	56.21	30.29	4.36	35.51	100	0	Peak
6	2483.50	47.46	-6.54	54.00	48.32	30.29	4.36	35.51	107	171	Average

Remark: #3 and #4 Fundamental Signal




Data: 8 File: D:\Project\2006Q3\華碩\680808\Part15C\BT TX CH78.EMI (14) Date: 2006-08-15

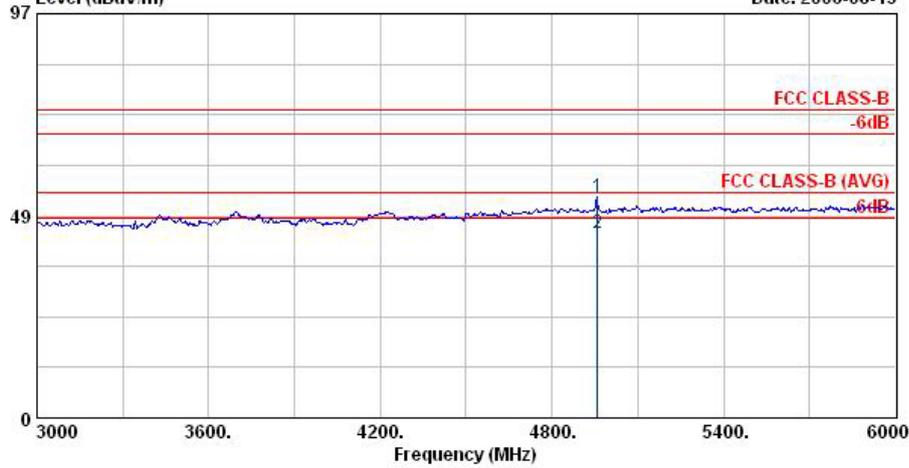

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4960.00	52.92	-21.08	74.00	49.29	33.47	6.39	36.23	200	0	Peak
2	4960.00	44.43	-9.57	54.00	40.80	33.47	6.39	36.23	100	355	Average


Data: 9 File: D:\Project\2006Q3\華碩\680808\Part15C\BT TX CH78.EMI (14) Date: 2006-08-15

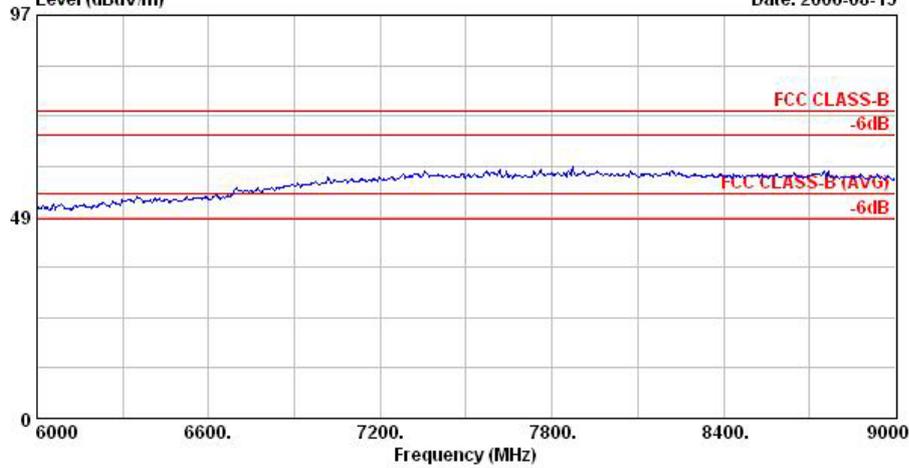

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DHS



Data: 14 File: D:\Project\2006Q3\華碩\680808\Part15C\BT TX CH78.EMI (14) Date: 2006-08-15  
 Level (dBuV/m)

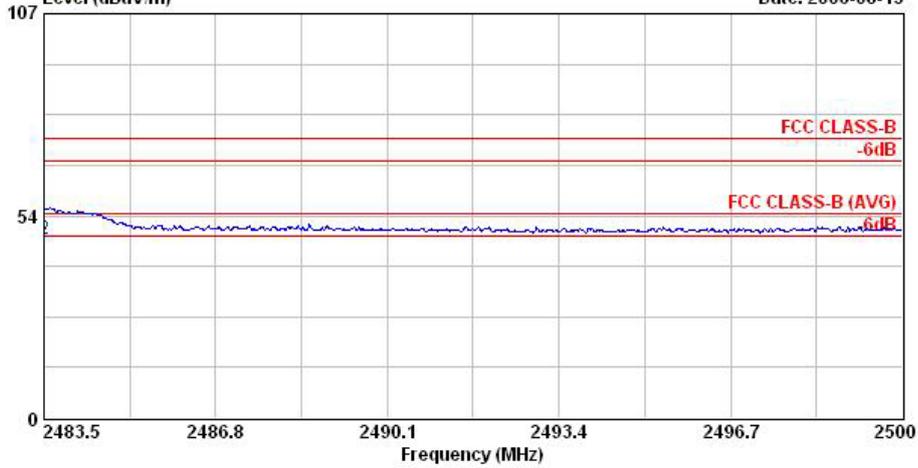

Site : 03CH06-HY  
 Condition : HF-ANT-060410 VERTICAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : FR 680808  
 Memo : BT Tx CH78,2480MHz  
 Plane : E1  
 Data Rate : DHS

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	55.35	-18.65	74.00	56.21	30.29	4.36	35.51	100	0	Peak
2 @	2483.50	47.46	-6.54	54.00	48.32	30.29	4.36	35.51	107	171	Average

Remark: There is no more obvious emission except the listings above.



## **5.10 Antenna Requirements**

### **5.10.1 Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

### **5.10.2 Antenna Connected Construction**

The antenna used in this product is a Chip antenna without connector and it is considered to meet antenna requirement of FCC.

### **5.10.3 Antenna Gain**

The antenna gain of EUT is less than 6dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



**6. List of Measuring Equipments Used**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jun. 28, 2006	Jun. 28, 2007	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/008	9kHz – 30MHz	Mar. 29, 2006	Mar. 29, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Apr. 19, 2006	Apr. 19, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 22, 2005	Dec. 22, 2006	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Dec. 22, 2005	Dec. 22, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 25, 2006	Jul. 24, 2007	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	Jun. 28, 2006	Jun. 27, 2007	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	N/A	N/A	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Nov. 22, 2004	Nov. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Feb. 1, 2005	Feb. 1, 2007	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Jul. 21, 2006	Jul. 20, 2007	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2006	Jul. 20, 2007	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)



## 7. Uncertainty Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
<b>combined standard uncertainty Uc(y)</b>	<b>1.13</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% U=2Ue(y)</b>	<b>4.72</b>				