




# FCC RADIO EXPOSURE TEST REPORT

**FCC ID** : MSQ-AXHZ00  
**Equipment** : AX6600 Tri Band WiFi Router  
**Brand Name** : ASUS  
**Model Name** : RT-AX95Q, ZenWiFi XT8, ASUS ZenWiFi XT8, XT8, ASUS ZenWiFi  
**Applicant** : ASUSTeK COMPUTER INC.  
4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan  
**Manufacturer (1)** : Compal Networking (KunShan) Co., LTD.  
No. 520, Nanbang Rd., Economic & Technical  
Development Zone Kunshan, Jiangsu Province China  
**Manufacturer (2)** : ARCADYAN TECHNOLOGY (VIETNAM) CO., LTD.  
Ba Thien Industrial Park, Ba Hien commune, Binh  
Xuyen district, Vinh Phuc Province  
**Standard** : 47 CFR Part 2.1091

The product was received on May 15, 2019, and testing was started from May 15, 2019 and completed on Aug. 16, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

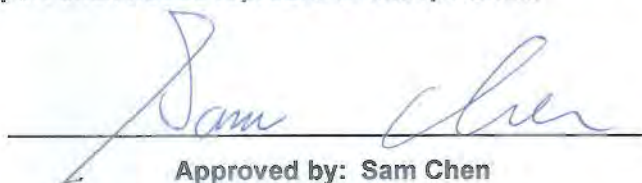

Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## **Table of Contents**

|                                                 |          |
|-------------------------------------------------|----------|
| <b>History of this test report.....</b>         | <b>3</b> |
| <b>Summary of Test Result.....</b>              | <b>4</b> |
| <b>1 General Description .....</b>              | <b>5</b> |
| 1.1 EUT General Information .....               | 5        |
| 1.2 Table for Multiple Listing .....            | 5        |
| 1.3 Table for SKU information .....             | 5        |
| 1.4 Table for EUT supports functions.....       | 6        |
| 1.5 Table for radio information .....           | 6        |
| 1.6 Testing Location .....                      | 6        |
| <b>2 Maximum Permissible Exposure .....</b>     | <b>7</b> |
| 2.1 Limit of Maximum Permissible Exposure ..... | 7        |
| 2.2 MPE Calculation Method.....                 | 8        |
| 2.3 Calculated Result and Limit.....            | 9        |

### **Photographs of EUT v01**



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB Ver1.0



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items          | Result (PASS/FAIL) | Remark |
|---------------|-----------------|---------------------|--------------------|--------|
| 2             | -               | Exposure evaluation | PASS               | -      |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Viola Huang**

# 1 General Description

## 1.1 EUT General Information

| RF General Information |                                     |                                     |                                                                                                                                                                                                         |
|------------------------|-------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Evaluation Mode        | Frequency Range (MHz)               | Operating Frequency (MHz)           | Modulation Type                                                                                                                                                                                         |
| 2.4GHz WLAN            | 2400-2483.5                         | 2412-2462                           | 802.11b: DSSS (DBPSK, DQPSK, CCK)<br>802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)<br>802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |
| 5GHz WLAN              | 5150-5250<br>5470-5725<br>5725-5850 | 5180-5240<br>5500-5720<br>5745-5825 | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)<br>802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)                                 |
| Bluetooth              | 2400-2483.5                         | 2402-2480                           | LE: GFSK                                                                                                                                                                                                |

## 1.2 Table for Multiple Listing

The five model names in the following table are all refer to the identical product.

| Brand Name | Model Name       | Description                                                                           |
|------------|------------------|---------------------------------------------------------------------------------------|
| ASUS       | RT-AX95Q         | All the models are identical, the different model names served as marketing strategy. |
|            | ZenWiFi XT8      |                                                                                       |
|            | ASUS ZenWiFi XT8 |                                                                                       |
|            | XT8              |                                                                                       |
|            | ASUS ZenWiFi     |                                                                                       |

From the above models, model: RT-AX95Q was selected as representative model for the test and its data was recorded in this report.

## 1.3 Table for SKU information

| EUT No. | SKU No. | Brand Name | P/N                   |
|---------|---------|------------|-----------------------|
| 1       | SKU 1   | NETSWAP    | NS773602 / NS771802   |
| 2       | SKU 2   | Mingtek    | HN36201CG / HN18101CG |



## 1.4 Table for EUT supports functions

| Function  | Support Type                  |
|-----------|-------------------------------|
| AP Router | Master                        |
| Bridge    | Slave without radar detection |
| Repeater  | Master                        |
| Mesh      | Master                        |

## 1.5 Table for radio information

| Radio | 2.4GHz | 5GHz              | Bluetooth |
|-------|--------|-------------------|-----------|
| 1     | V      | V (Band 1)        | X         |
| 2     | X      | V (Band 3~Band 4) | X         |
| 3     | X      | X                 | V         |

## 1.6 Testing Location

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973   |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6                                                                |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                |
| 300-1500              |                                   |                                   | F/300                                    | 6                                                                |
| 1500-100,000          |                                   |                                   | 5                                        | 6                                                                |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30                                                               |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30                                                               |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30                                                               |
| 300-1500              |                                   |                                   | F/1500                                   | 30                                                               |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30                                                               |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density



## 2.2 MPE Calculation Method

The MPE was calculated at 30 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$





## 2.3 Calculated Result and Limit

### Exposure Environment: General Population / Uncontrolled Exposure

| Mode            | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm <sup>2</sup> ) | S Limit (mW/cm <sup>2</sup> ) |
|-----------------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|
| 2.4G;D1D (2T1S) | 4.70     | 29.91       | 34.61      | 0.50           | 35.11              | 3.24340          | 30            | 0.28677                 | 1.00000                       |
| 2.4G;D1D (2T2S) | 1.82     | 29.90       | 31.72      | 0.50           | 32.22              | 1.66725          | 30            | 0.14741                 | 1.00000                       |
| 5.2G;D1D (2T1S) | 5.99     | 29.48       | 35.47      | 0.50           | 35.97              | 3.95367          | 30            | 0.34957                 | 1.00000                       |
| 5.2G;D1D (2T2S) | 3.08     | 28.41       | 31.49      | 0.50           | 31.99              | 1.58125          | 30            | 0.13981                 | 1.00000                       |
| 5.6G;D1D (4T1S) | 8.07     | 21.89       | 29.96      | 0.03           | 29.99              | 0.99770          | 30            | 0.08821                 | 1.00000                       |
| 5.6G;D1D (4T2S) | 5.22     | 23.95       | 29.17      | 0.50           | 29.67              | 0.92683          | 30            | 0.08195                 | 1.00000                       |
| 5.8G;D1D (4T1S) | 8.21     | 27.76       | 35.97      | 0.02           | 35.99              | 3.97192          | 30            | 0.35119                 | 1.00000                       |
| 5.8G;D1D (4T2S) | 5.23     | 29.97       | 35.20      | 0.50           | 35.70              | 3.71535          | 30            | 0.32850                 | 1.00000                       |
| 2.4G;BT-LE      | 2.02     | 0.72        | 2.74       | 0.50           | 3.24               | 0.00211          | 30            | 0.00019                 | 1.00000                       |

### Simultaneous Transmission Analysis

#### Test Mode 1: WLAN 2.4GHz\_Radio 1 + WLAN 5GHz\_Radio 2 + Bluetooth\_Radio 3

| Mode       | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm <sup>2</sup> ) | S Limit (mW/cm <sup>2</sup> ) | Ratio (S/Limit) |
|------------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|-----------------|
| 2.4G;BT-LE | 2.02     | 0.72        | 2.74       | 0.50           | 3.24               | 0.00211          | 30            | 0.00019                 | 1.00000                       | 0.00019         |
| 2.4G;D1D   | 4.70     | 29.91       | 34.61      | 0.50           | 35.11              | 3.24340          | 30            | 0.28677                 | 1.00000                       | 0.28677         |
| 5.8G;D1D   | 8.21     | 27.76       | 35.97      | 0.02           | 35.99              | 3.97192          | 30            | 0.35119                 | 1.00000                       | 0.35119         |
|            |          |             |            |                |                    |                  |               |                         | Sum Ratio                     | 0.63815         |
|            |          |             |            |                |                    |                  |               |                         | Ratio Limit                   | 1               |

#### Test Mode 2: WLAN 5GHz\_Radio 1 + WLAN 5GHz\_Radio 2 + Bluetooth\_Radio 3

| Mode       | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm <sup>2</sup> ) | S Limit (mW/cm <sup>2</sup> ) | Ratio (S/Limit) |
|------------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|-----------------|
| 2.4G;BT-LE | 2.02     | 0.72        | 2.74       | 0.50           | 3.24               | 0.00211          | 30            | 0.00019                 | 1.00000                       | 0.00019         |
| 5.2G;D1D   | 5.99     | 29.48       | 35.47      | 0.50           | 35.97              | 3.95367          | 30            | 0.34957                 | 1.00000                       | 0.34957         |
| 5.8G;D1D   | 8.21     | 27.76       | 35.97      | 0.02           | 35.99              | 3.97192          | 30            | 0.35119                 | 1.00000                       | 0.35119         |
|            |          |             |            |                |                    |                  |               |                         | Sum Ratio                     | 0.70095         |
|            |          |             |            |                |                    |                  |               |                         | Ratio Limit                   | 1               |

Note: The above antenna gain was declared by manufacturer.

————THE END————