




(1) EUT Photo

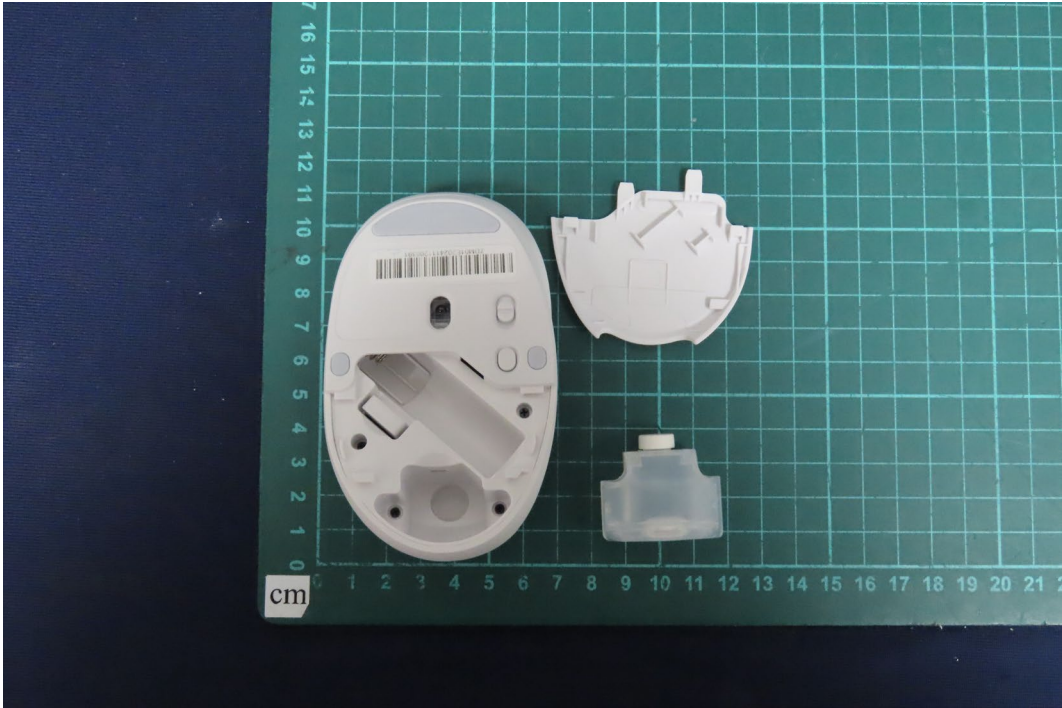

(2) EUT Photo

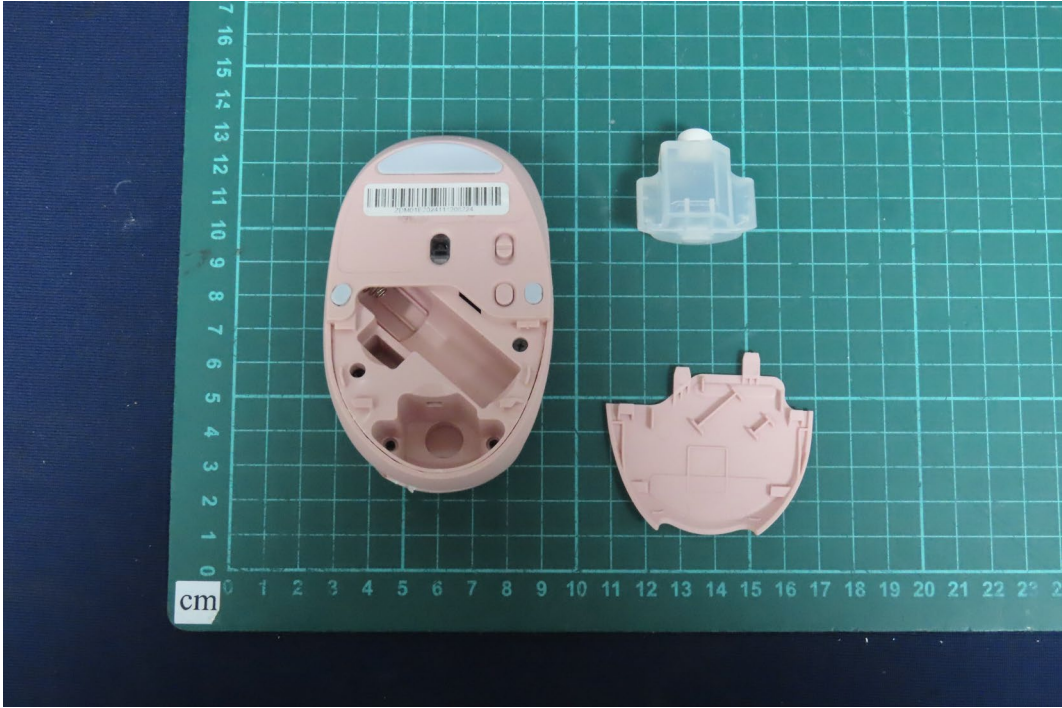

(3) EUT Photo

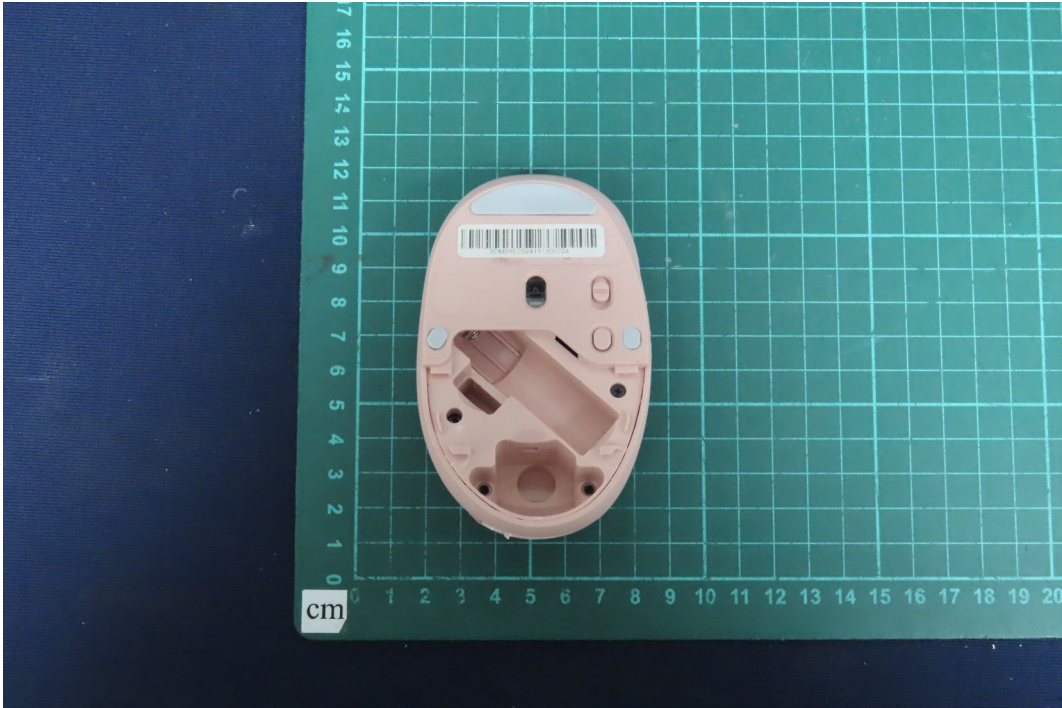


(4) EUT Photo






(5) EUT Photo

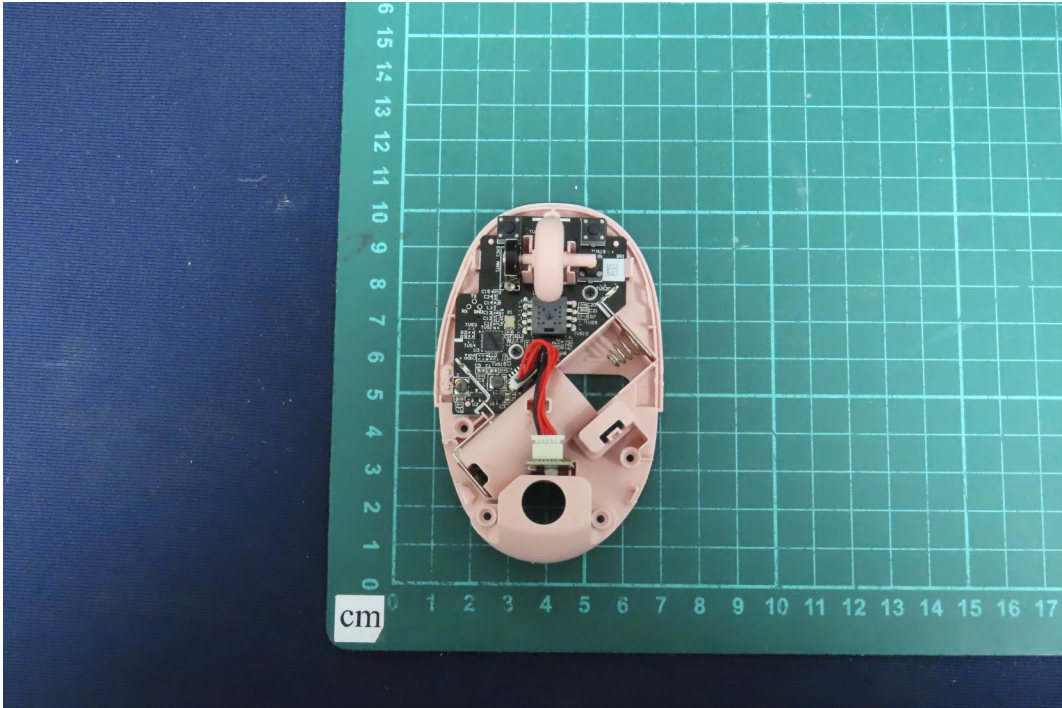


(6) EUT Photo

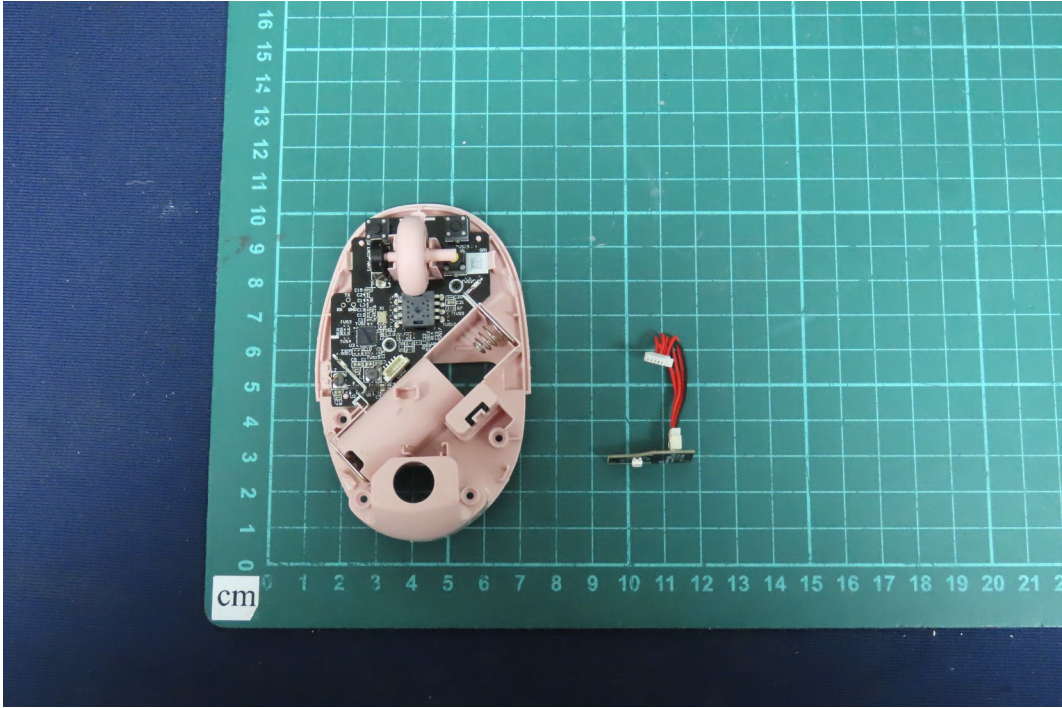


A photograph of a USB-to-serial adapter and a cable. The adapter is a small black PCB with a USB-A connector on one side and a 5-pin D-sub connector on the other. It is labeled 'CH340' and 'USB to UART'. A red and black cable is connected to the D-sub connector. The components are placed on a green grid background with a ruler showing centimeters from 0 to 11. The ruler is marked with 'cm' at the 0 cm position. The grid lines are 1 cm apart. The components are positioned between the 2 cm and 5 cm marks on the ruler.




(9) EUT Photo

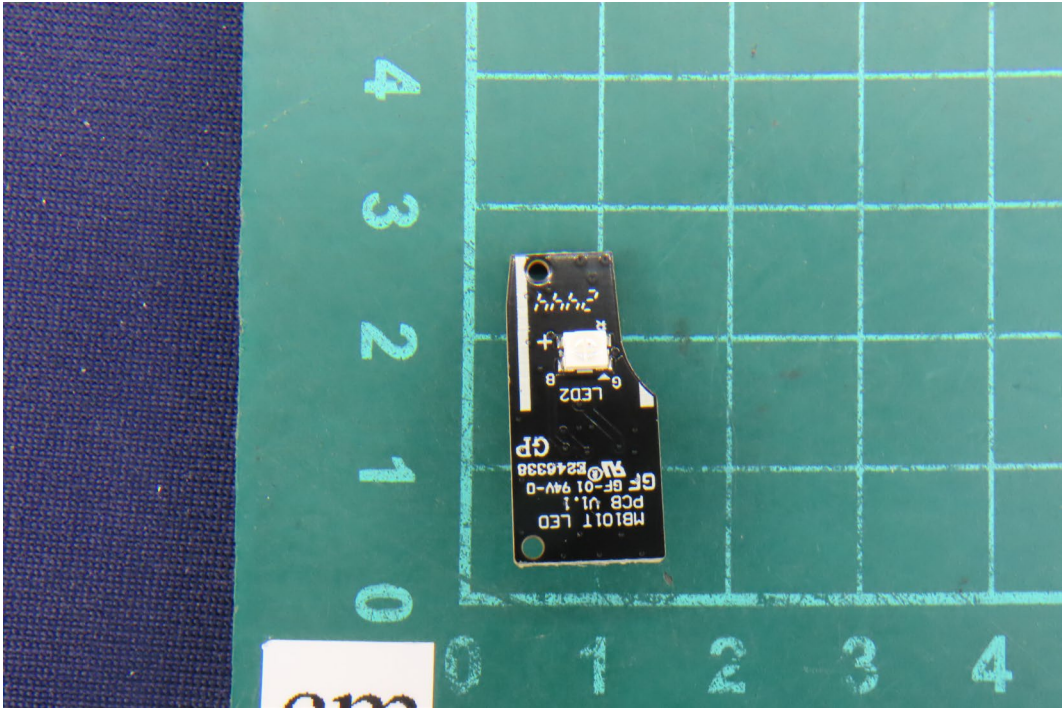


(10) EUT Photo

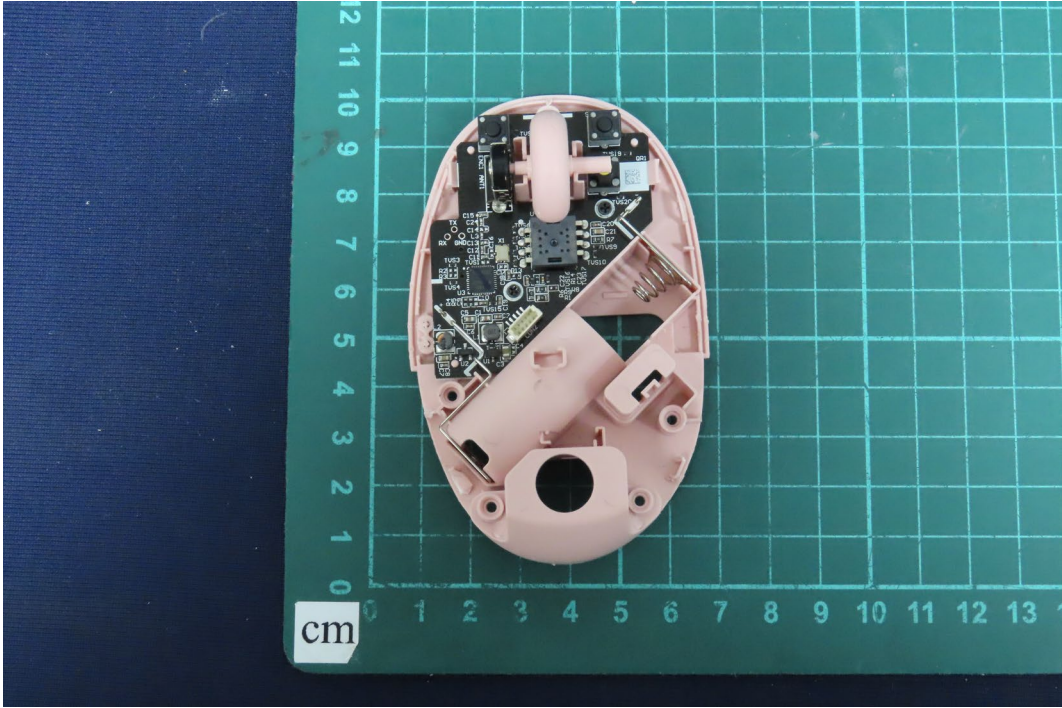

(11) EUT Photo

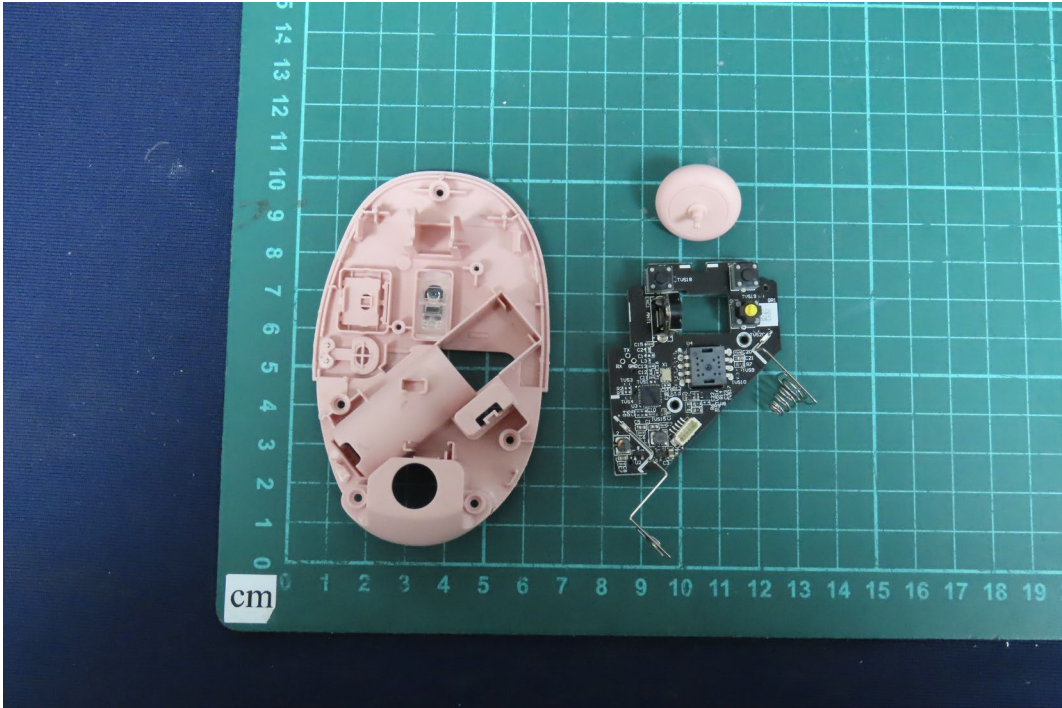


(12) EUT Photo

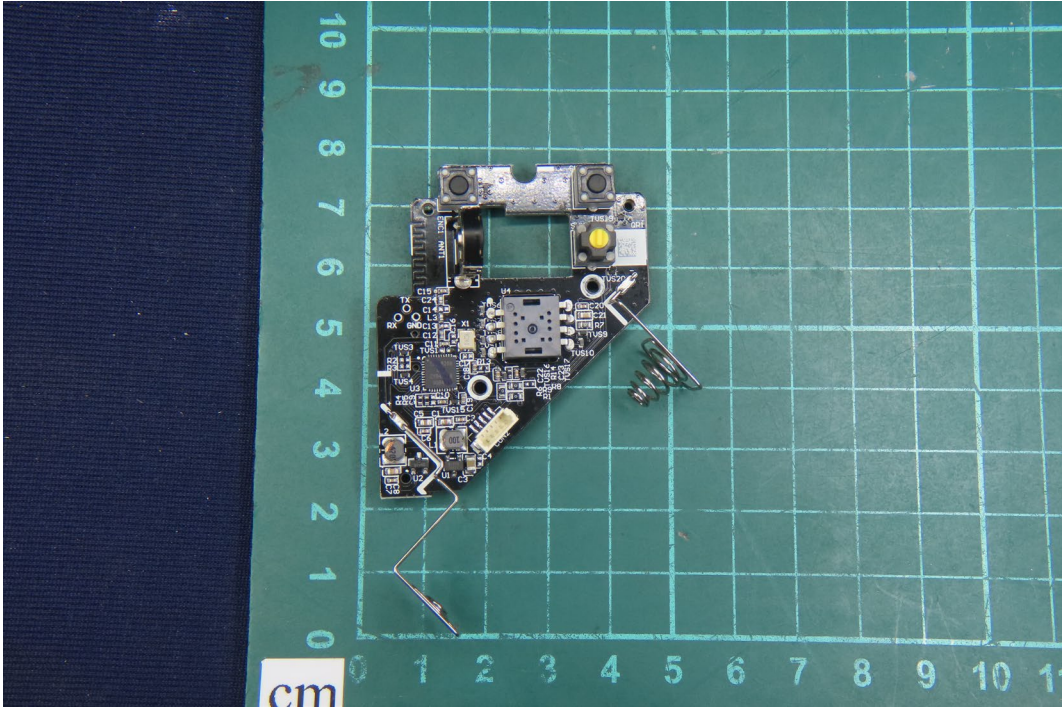




(13) EUT Photo

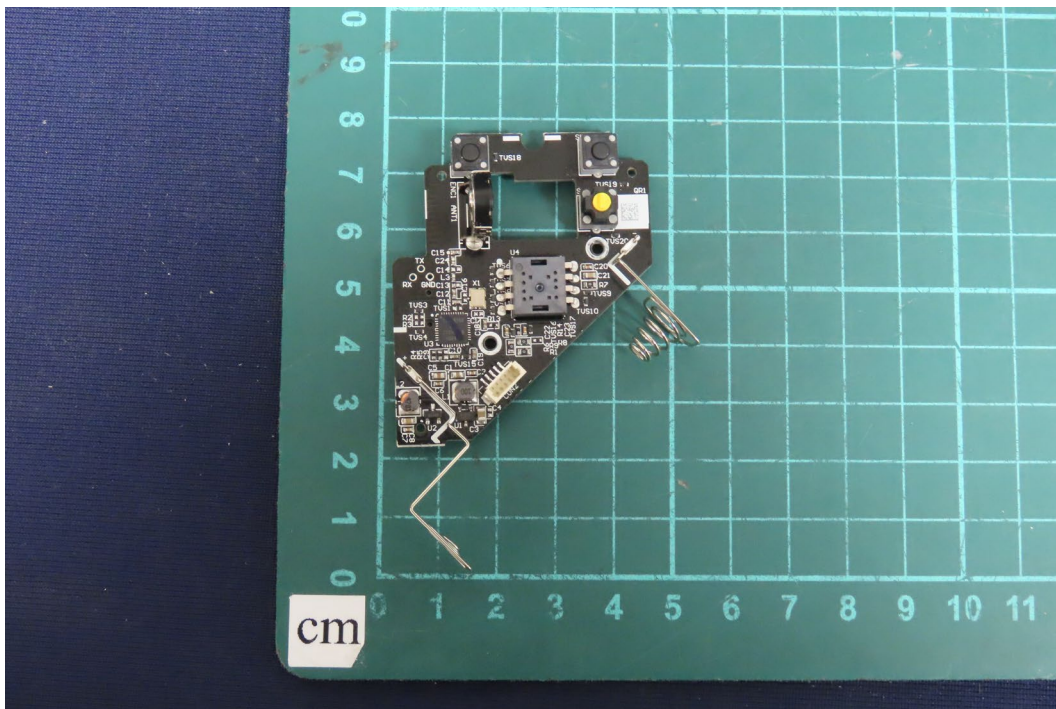

(14) EUT Photo

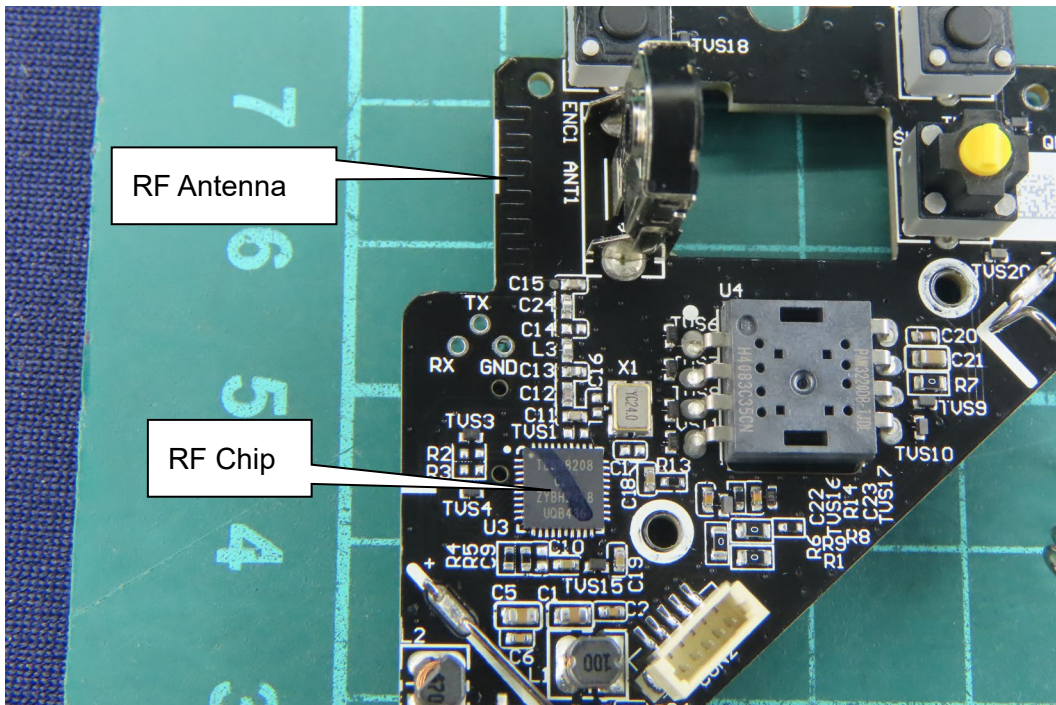

(15) EUT Photo

