

ANTENNA INFORMATION

OEM	ASUS	
ODM	Quanta	
Platform model name	RC73YA / RC73XA	
Intel platform (ex: Yes, No or NA)	No	
Platform type (ex: regular NB, convertible PC, AIO...etc)	Game console	
SAR minimum separation (mm)	FCC (1g)	1.61
	ISED (1g)	1.61
	ISED (10g)	1.61

Antenna manufacturer	Company name	AWAN
	Address	14F., No. 217, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City Taiwan
Test location	Company name	AWAN
	Address	14F., No. 217, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City Taiwan
Test Personnel	Name(Full name)	FU KUO CHAN
	E-mail	ricky@awan-ant.com
	Tel/Mobile	+886-2-8913-1939 #2686
Testing date	2025	

Antenna Part number	Main	AYP6Y-100633
	Aux	AYP6Y-100634
Antenna type (ex: PIFA, Dipole...etc)	PIFA	

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.75	1.94	1.25	2.56	3.20	3.20	2.36	2.36	2.28	1.72
Aux	1.59	1.47	1.47	1.83	2.59	2.59	2.38	1.81	2.50	1.68

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-080	115	1.13	50	I-PEX NGFF
Aux	SY113L/50-081	170	1.13	50	I-PEX NGFF

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)

Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

3. Test & System Description

3.1 Measurement Method and System


The gain measurement shall follow by following conditions:

- It is required that all the antenna gain to be measured spherically and computed by spatial average be computed of the resultant gain.
- During gain measurement, all other antennas not under test should be terminated by 50 Ohm load in end of cable.
- Space points of 3D gain measurement are increase by specific steps from Theta 0~180 degrees, and Phi, 0~360 degrees, as figure below. The increments steps are different steps are different by antenna functions.
-

Theta Start	0 degree	Phi Start	0 degree
Theta Stop	180 degree	Phi Stop	360 degree
Theta Increment	30 degree	Phi Increment	30 degree

3.2 Test setup

The testing of antenna gain should be made at a ETS qualified lab with an RF anechoic chamber with at least 5-meter separation from the receive antenna to the antenna under test. The antenna gain report from unqualified lab can't be referenced a passing. Besides, all test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer's minimum calibration requirements.

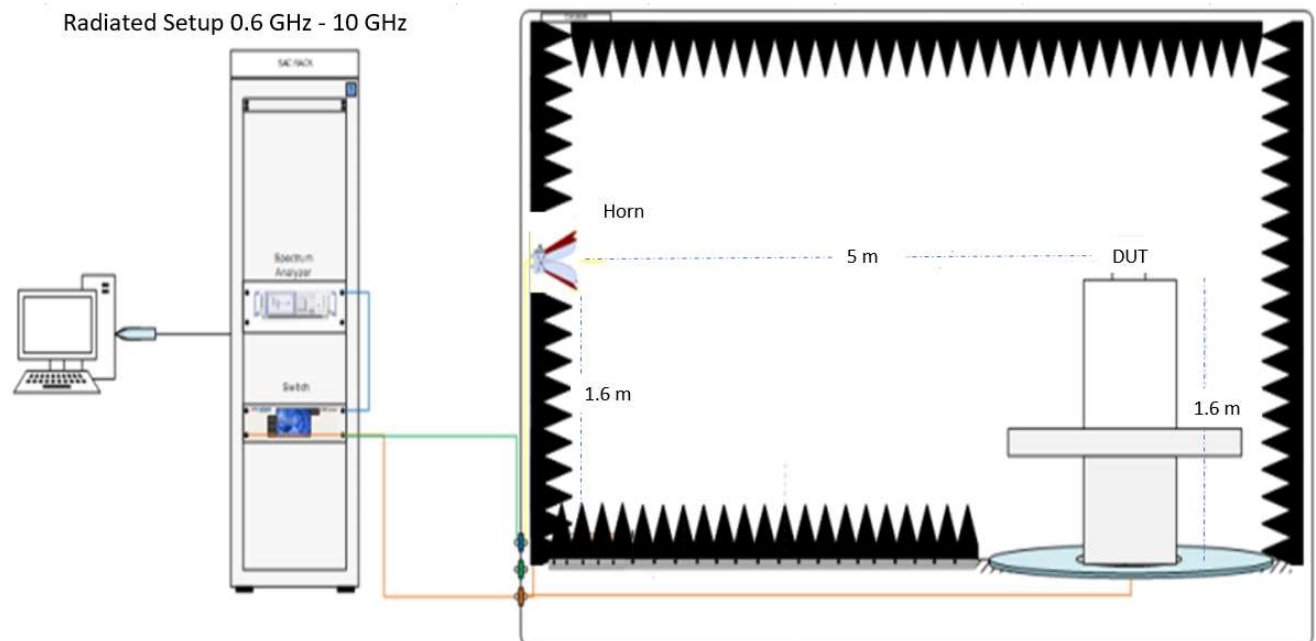

3.3Equipment list

Device	Type/Module	Serial#	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS-8500	1047	ETS-Lindgren	2024/2/21	2025/8/21
Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
Rotate controller	2090	SN 00035073	ETS-Lindgren	N/A	N/A
Horn Antenna	HAD-0710	111025-02	Bwant	2023/3/16	2025/3/16
Vector Network Analyzer	E5071C	MY46733781	Keysight	2022/1/21	2025/1/21
Cable 40cm 18 GHz	201EH012010400	201EH012010400#1	Jmtt	2024/1/22	2025/1/27
Cable 6m 18 GHz	201EH012016000	201EH012016000#3	Jmtt	2024/1/22	2025/1/22
Cable 6m 18 GHz	201EH012016000	201EH012016000#5	Jmtt	2024/1/22	2025/1/22
Cable 3.5m 18 GHz	201EH012013500	201EH012013500#3	Jmtt	2024/1/22	2025/1/22
Cable 1.5m 18 GHz	201EH012011500	201EH012011500#2	Jmtt	2024/1/22	2025/1/22

Antenna Information

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N: AYP6Y-100633) Main Antenna	AWAN	PIFA	50 ohm Coaxial length:115mm diameter: 1.13mm Low Loss Cable Connector : I-PEX NGFF	2400-2483.5	1.75	2.02	3.0	0.27
				5150-5250	1.94	2.32	3.0	0.38
				5250-5350	1.25	1.65	3.0	0.40
				5470-5725	2.56	2.96	3.0	0.40
				5725-5850	3.20	3.61	3.0	0.41
				5850-5895	3.20	3.62	3.0	0.42
				5925-6425	2.36	2.79	3.0	0.43
				6425-6525	2.36	2.80	3.0	0.44
				6525-6875	2.28	2.73	3.0	0.45
				6875-7125	1.72	2.18	3.0	0.46
(P/N: AYP6Y-100634) Aux Antenna	AWAN	PIFA	50 ohm Coaxial length:170mm diameter: 1.13mm Low Loss Cable Connector : I-PEX NGFF	2400-2483.5	1.59	1.98	3.0	0.39
				5150-5250	1.47	2.03	3.0	0.56
				5250-5350	1.47	2.06	3.0	0.59
				5470-5725	1.83	2.43	3.0	0.60
				5725-5850	2.59	3.20	3.0	0.61
				5850-5895	2.59	3.21	3.0	0.62
				5925-6425	2.38	3.01	3.0	0.63
				6425-6525	1.81	2.46	3.0	0.65
				6525-6875	2.50	3.16	3.0	0.66
				6875-7125	1.68	2.36	3.0	0.68


- 3D Antenna Peak Gain required being test in system basis.

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.75

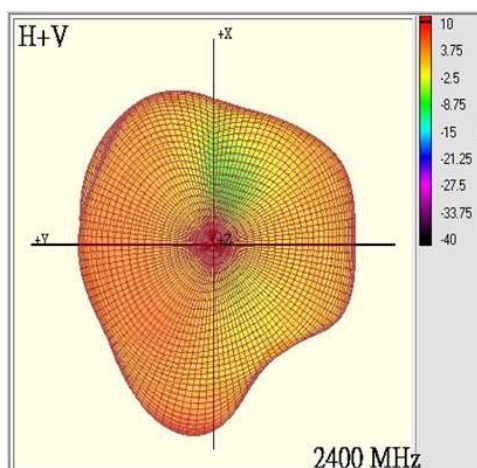


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.94

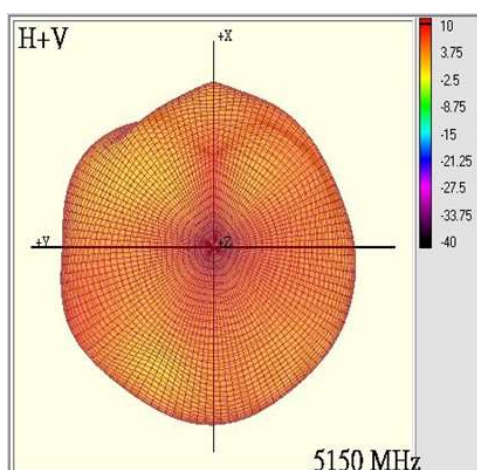


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.25

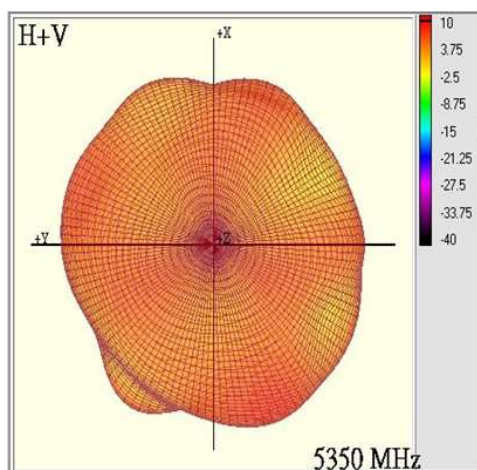


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.56

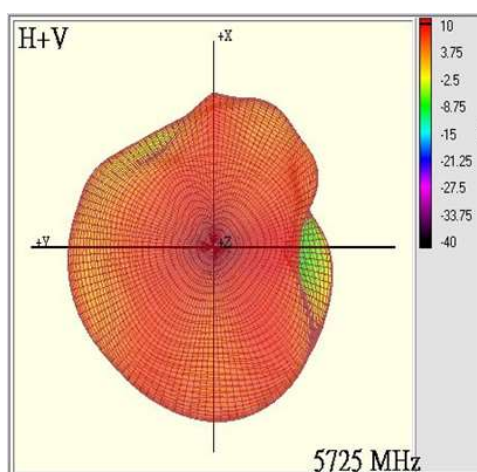


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.20

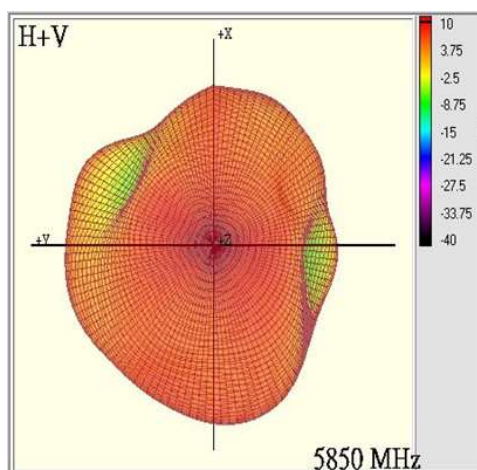


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.20

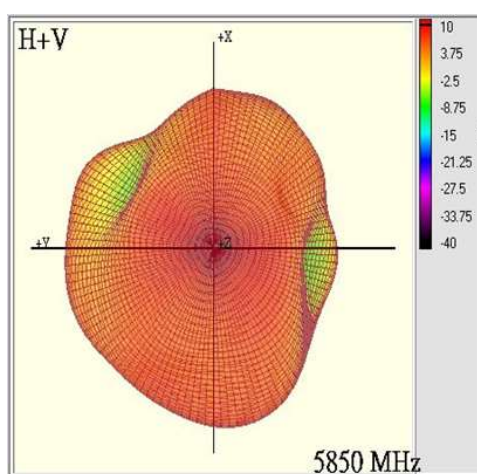


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.36

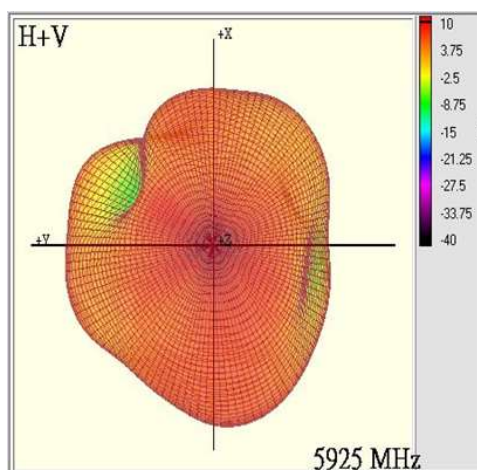


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.36

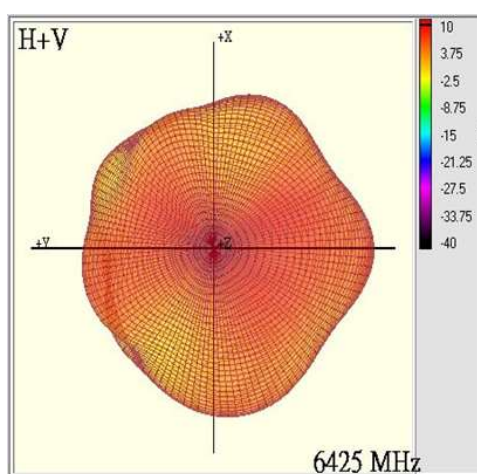


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.28

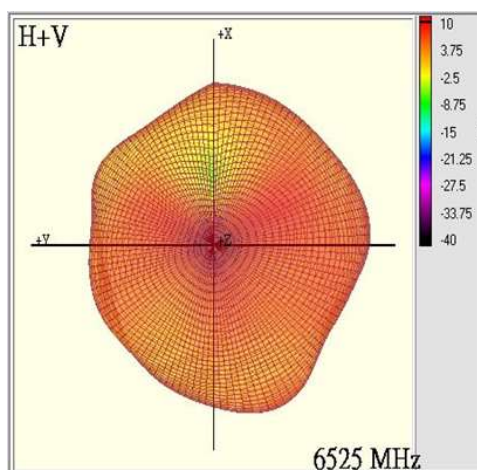

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.72

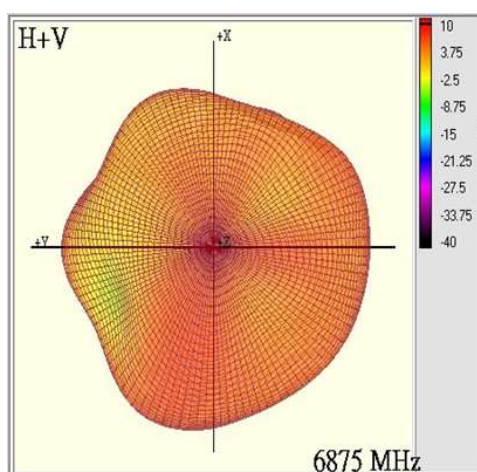

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.59

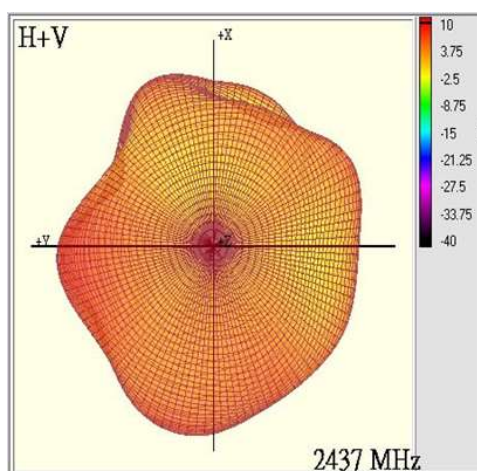


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.47

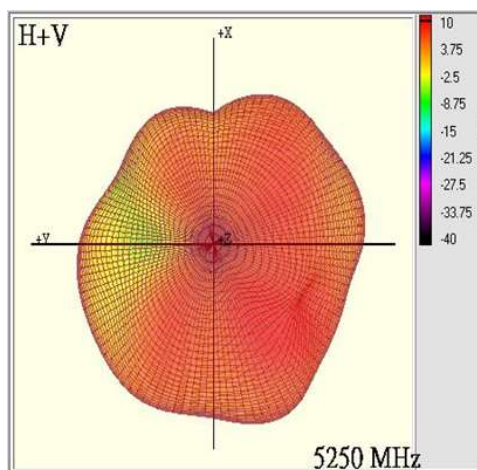


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.47

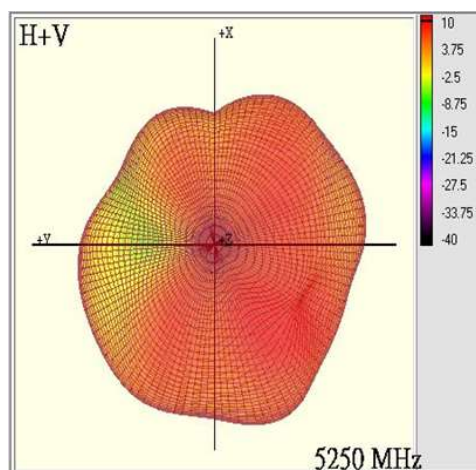


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.83

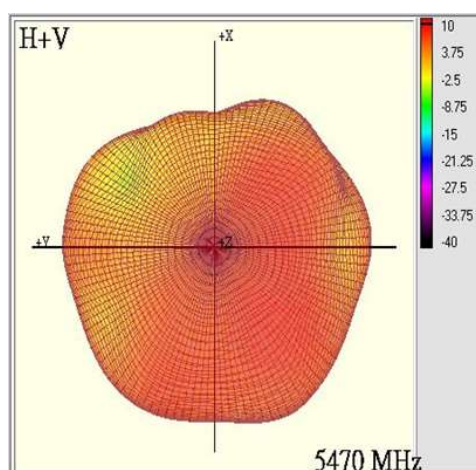


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.59

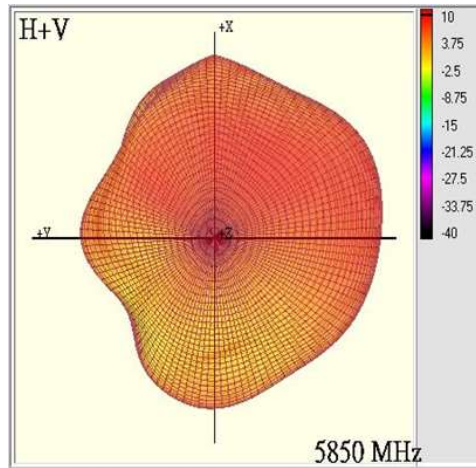


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.59

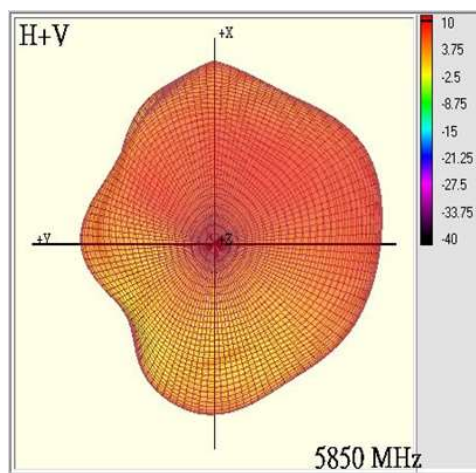


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.38

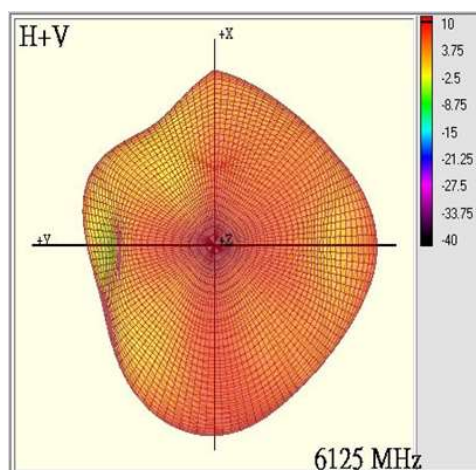


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.81

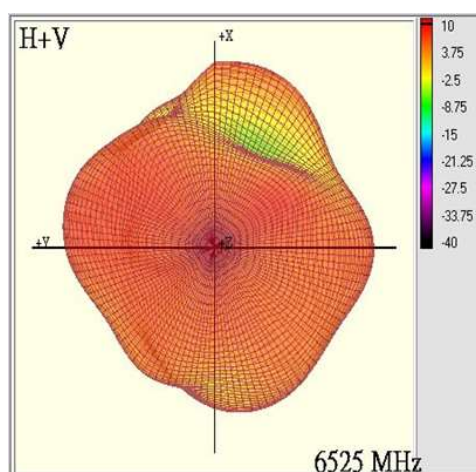


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.50

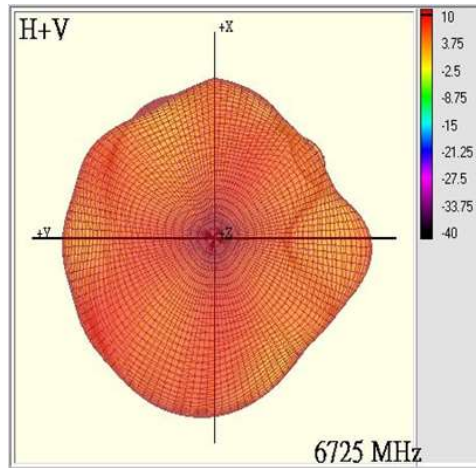

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.68

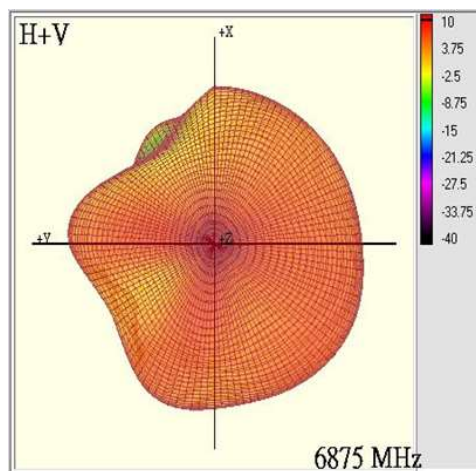

Annex A. Photographs

A.1 Setup Photo

Test Conditions
NB under test placed on a non-conductive structure at sufficient height to be in the 'quiet zone' of the chamber
The NB under test must be fully populated with a power, motherboard, hard drive, disk drives, etc... The purpose is to characterize the antennas on a fully populated customer deliverable unit.
NB's panel should be parallel with XZ-plane and face to Y-axle, see diagram below.


Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

<Front Face View>

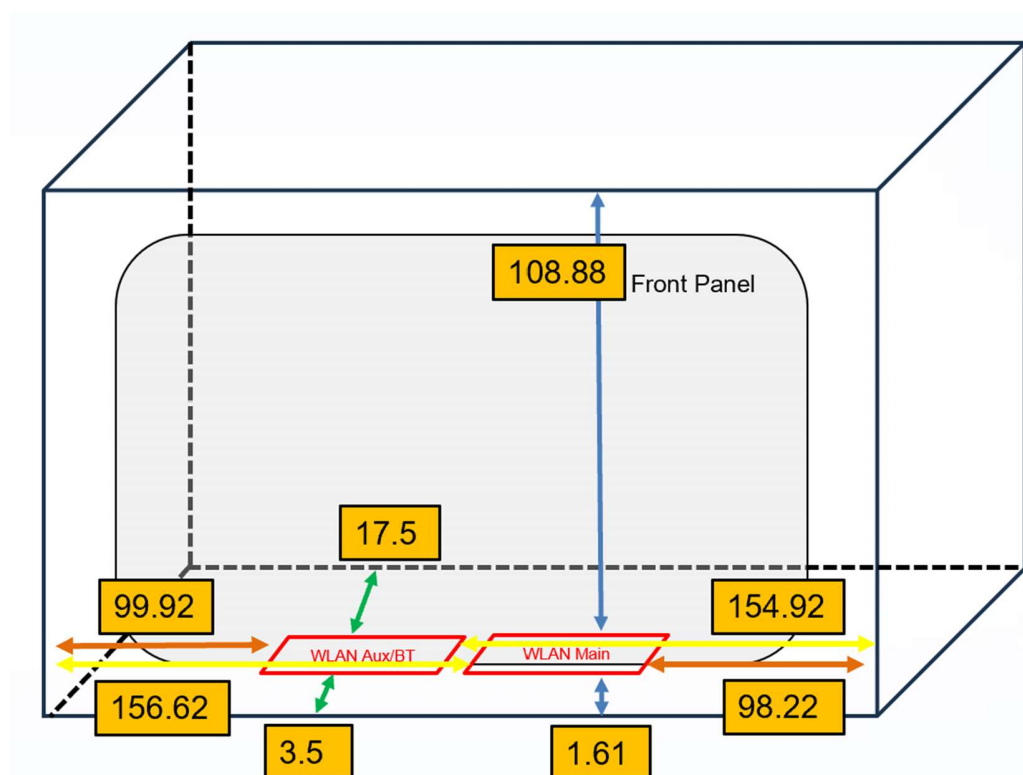


Antenna	To Bottom Side (mm)	To Top (mm)	To Left Side (mm)	To Right Side (mm)
WLAN Main Ant 0	1.61	108.88	156.62	98.22
WLAN/Aux/ Ant1	1.61	108.88	99.92	154.92

B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

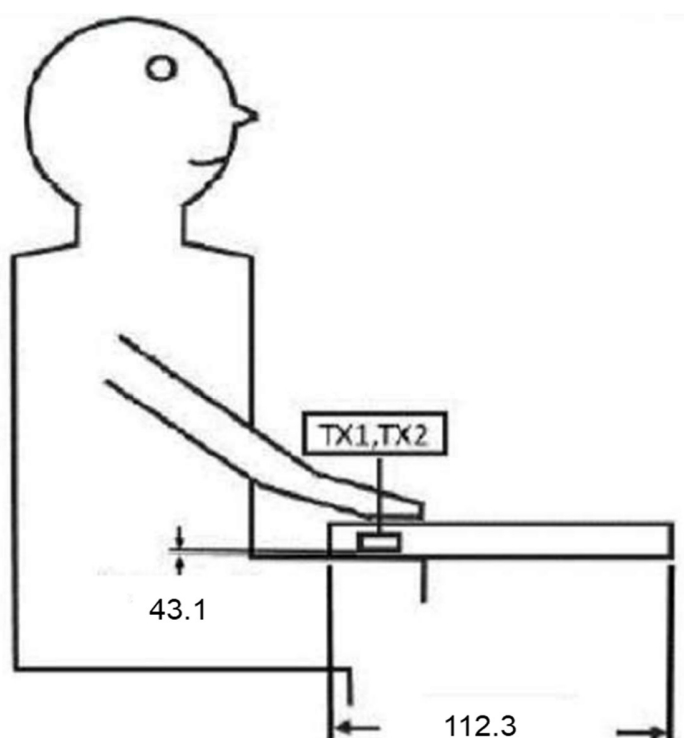

Measuring Surface	Antenna	Separation Distance(antenna-to- Surface)(mm)	1g SAR
Bottom Side	Main	43.1	FCC/ISED
	Aux	43.1	FCC/ISED