

## ***Appendix C – Highest Test Plots***

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**1\_WLAN2.4G\_802.11b\_Front Edge of laptop\_0mm\_Ch11\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10012 - CAB	2462.000, 11	6.64	1.82	41.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	1.10	<b>1.13</b>
psSAR-10g [W/kg]	0.457	<b>0.463</b>
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		79.0
Dist 3dB Peak [mm]		6.8

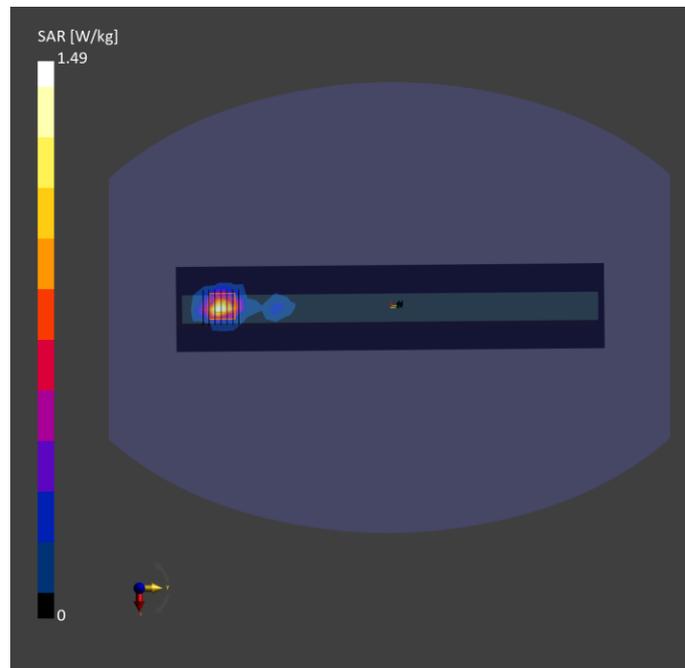

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**2\_WLAN5.3G\_802.11n\_HT40\_Front Edge of laptop\_0mm\_Ch54\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10599 - AAD	5270.000, 54	5.05	4.76	35.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.908	<b>1.08</b>
psSAR-10g [W/kg]	0.317	<b>0.322</b>
Power Drift [dB]		-0.06
TSL Correction	Positive only	Positive only
M2 / M1 [%]		61.5
Dist 3dB Peak [mm]		7.9

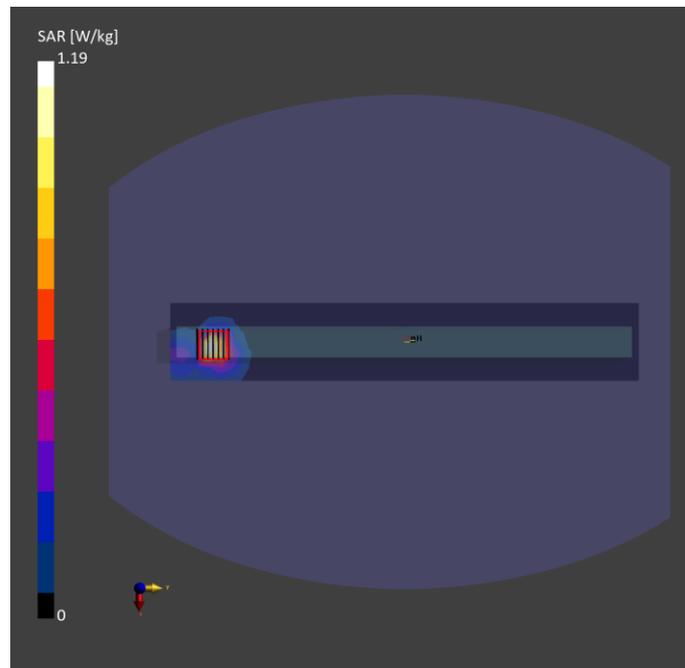

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**3\_WLAN5.6G\_802.11ac\_VHT80\_Front Edge of laptop\_0mm\_Ch138\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10544 - AAD	5690.000, 138	4.56	5.23	35.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.615	<b>0.686</b>
psSAR-10g [W/kg]	0.208	<b>0.199</b>
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.9
Dist 3dB Peak [mm]		7.3

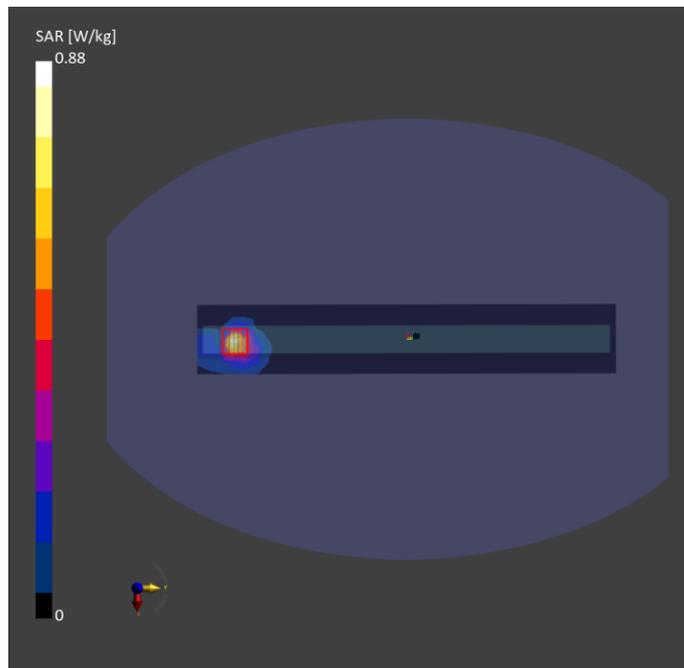

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**4\_WLAN5.8G\_802.11ac\_VHT160\_Front Edge of laptop\_0mm\_Ch163\_Ant 1\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAE	5815.000, 163	4.51	4.97	35.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.554	<b>0.686</b>
psSAR-10g [W/kg]	0.188	<b>0.211</b>
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.5
Dist 3dB Peak [mm]		7.2

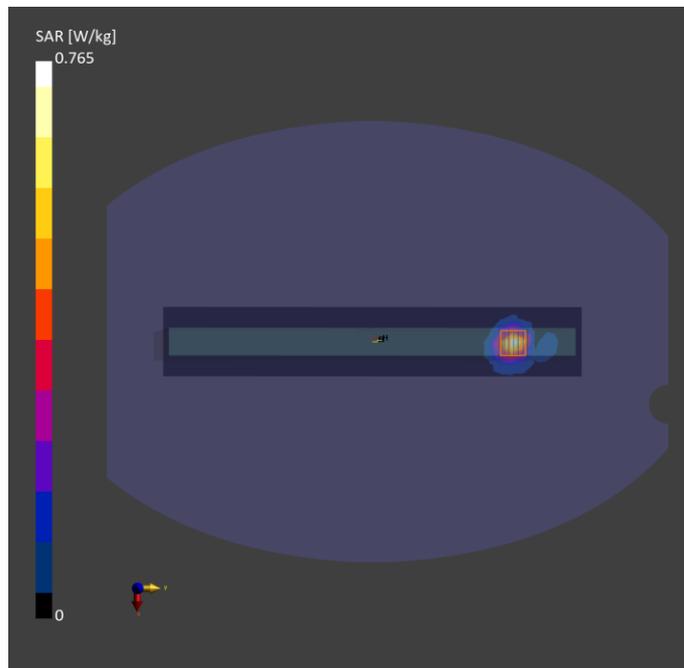

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**5\_Bluetooth\_GFSK\_Front Edge of laptop\_0mm\_Ch0\_Ant 1\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2402.000, 0	6.64	1.78	41.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.108	<b>0.111</b>
psSAR-10g [W/kg]	0.045	<b>0.045</b>
Power Drift [dB]		-0.06
TSL Correction	Positive only	Positive only
M2 / M1 [%]		49.4
Dist 3dB Peak [mm]		7.0

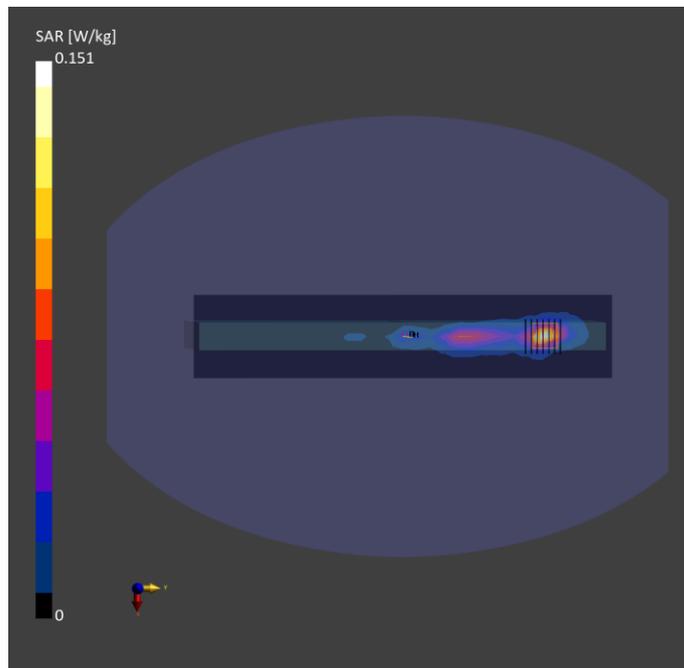

Test Date : 2025-03-05 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**6\_U-NII 5\_802.11ax HE160\_Front Edge of laptop\_0mm\_Ch15\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6025.000, 15	4.49	5.66	33.3

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	59.5 x 374.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.468	<b>0.625</b>
psSAR-10g [W/kg]	0.151	<b>0.189</b>
psAPD (1.0 cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		<b>6.25</b>
psAPD (4.0 cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		<b>4.30</b>
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.5
Dist 3dB Peak [mm]		7.6

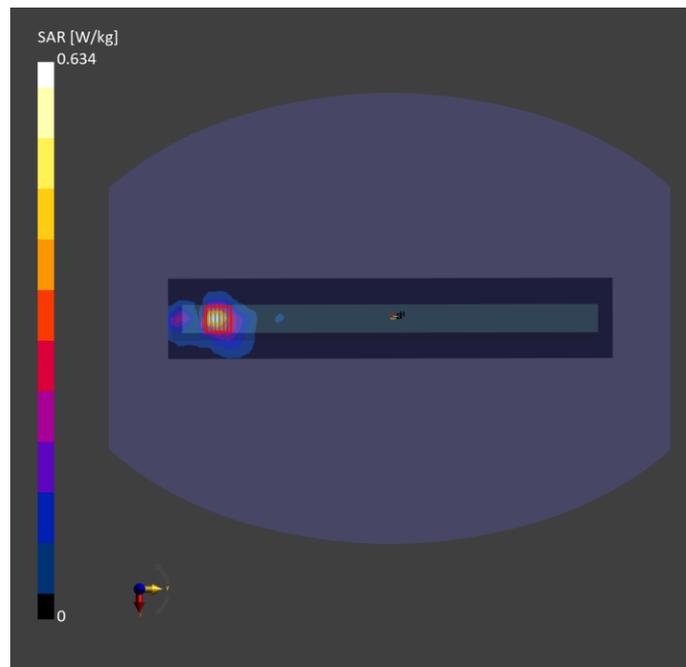

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**7\_WLAN2.4G\_802.11b\_Top Side of keyboard\_0mm\_Ch6\_Ant 1\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10012 - CAB	2437.000, 6	6.64	1.80	41.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	1.71	<b>1.93</b>
psSAR-10g [W/kg]	0.782	<b>0.850</b>
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		49.9
Dist 3dB Peak [mm]		8.6

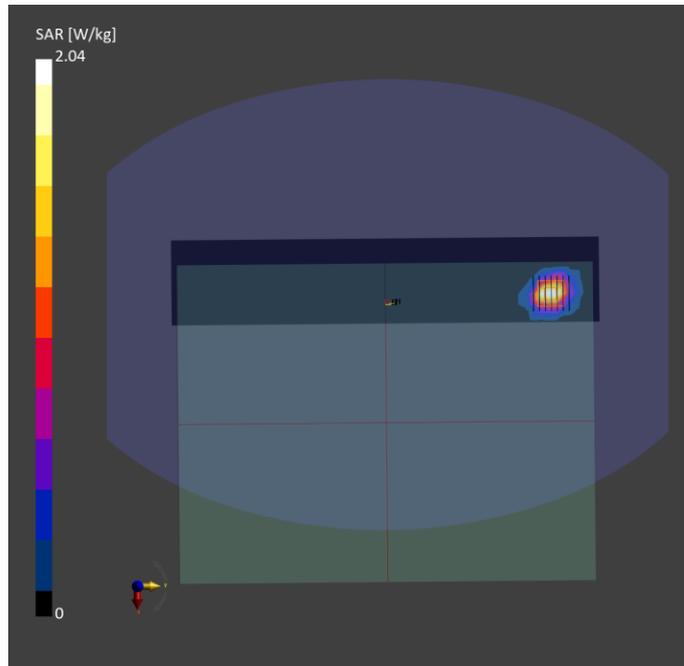

Test Date : 2025-03-08 | Ambient Temp : 22.0 °C | Tissue Temp : 21.3 °C

**Test Mode**

**8\_WLAN5.3G\_802.11n\_HT40\_Top Side of keyboard\_0mm\_Ch54\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10599 - AAD	5270.000, 54	5.05	4.87	35.4

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	2.80	<b>3.30</b>
psSAR-10g [W/kg]	0.923	<b>1.02</b>
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.2
Dist 3dB Peak [mm]		7.2

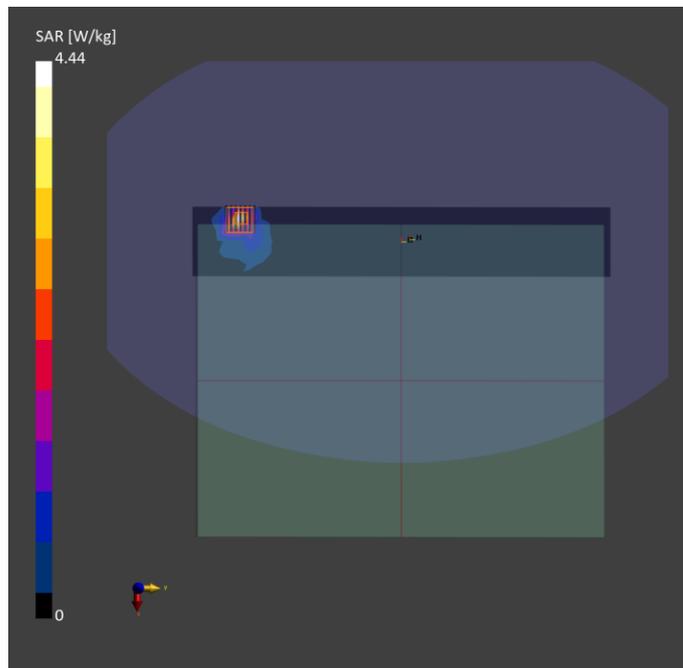

Test Date : 2025-03-08 | Ambient Temp : 22.0 °C | Tissue Temp : 21.3 °C

**Test Mode**

**9\_WLAN5.6G\_802.11ac\_VHT80\_Top Side of keyboard\_0mm\_Ch138\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10544 - AAD	5690.000, 138	4.56	5.36	35.4

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	2.23	<b>2.70</b>
psSAR-10g [W/kg]	0.733	<b>0.833</b>
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.1
Dist 3dB Peak [mm]		6.5

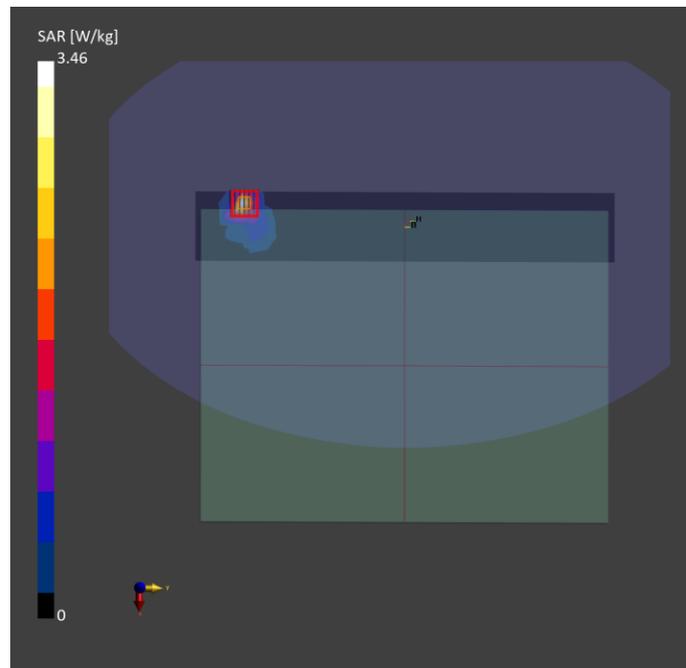

Test Date : 2025-03-08 | Ambient Temp : 22.0 °C | Tissue Temp : 21.3 °C

**Test Mode**

**10\_WLAN5.8G\_802.11ac VHT160\_Top Side of keyboard\_0mm\_Ch163\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAE	5815.000, 163	4.51	5.12	35.4

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	1.63	<b>1.89</b>
psSAR-10g [W/kg]	0.538	<b>0.578</b>
Power Drift [dB]		0.11
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.6
Dist 3dB Peak [mm]		6.5

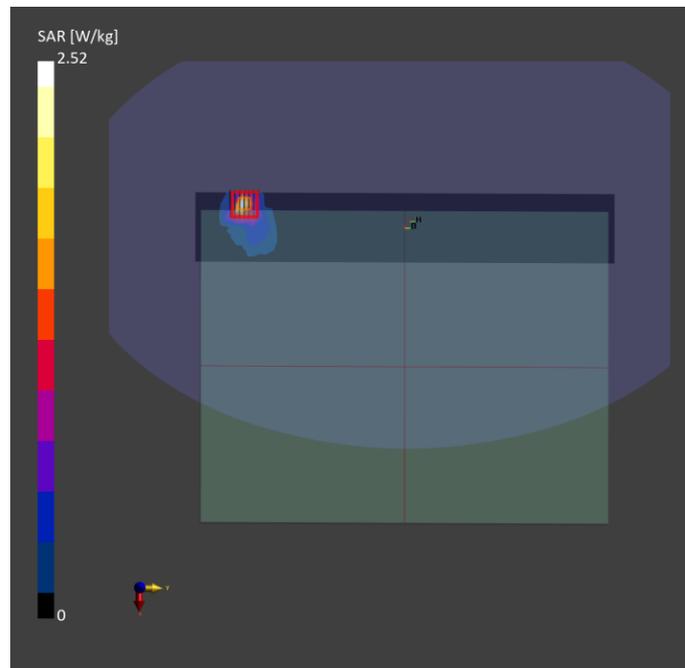

Test Date : 2025-03-07 | Ambient Temp : 22.1 °C | Tissue Temp : 21.1 °C

**Test Mode**

**11\_Bluetooth\_GFSK\_Top Side of keyboard\_0mm\_Ch0\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2402.000, 0	6.64	1.78	41.2

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.286	<b>0.299</b>
psSAR-10g [W/kg]	0.134	<b>0.121</b>
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		42.2
Dist 3dB Peak [mm]		6.5

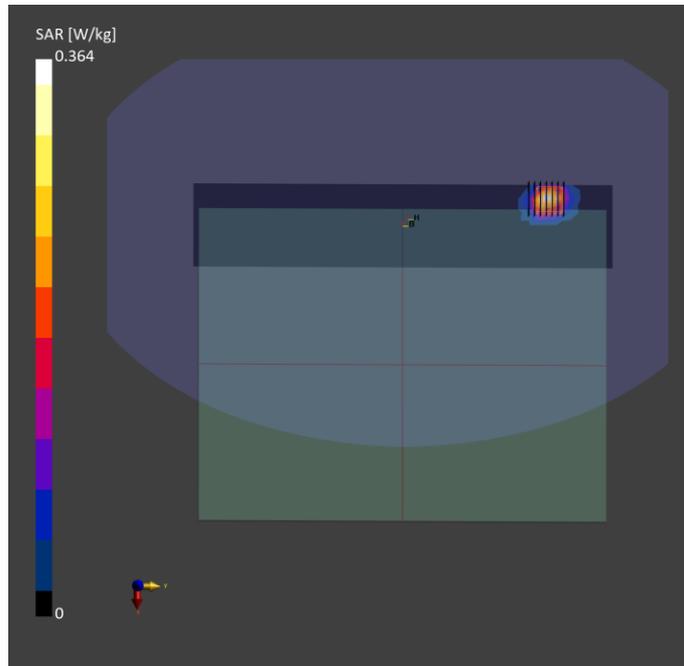

Test Date : 2025-03-06 | Ambient Temp : 22.0 °C | Tissue Temp : 21.3 °C

**Test Mode**

**12\_U-NII 5\_802.11ax HE160\_Top Side of keyboard\_0mm\_Ch15\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6025.000, 15	4.49	5.76	34.0

**Hardware Setup**


Phantom	Tissue Simulating Liquid	Probe   Calibration Date	DAE   Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
<b>Measurement Software Version</b>		16.4.0.5005	

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	59.5 x 357.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	1.37	<b>1.71</b>
psSAR-10g [W/kg]	0.437	<b>0.495</b>
psAPD (1.0 cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		<b>17.1</b>
psAPD (4.0 cm <sup>2</sup> , sq) [W/m <sup>2</sup> ]		<b>11.8</b>
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.4
Dist 3dB Peak [mm]		6.3

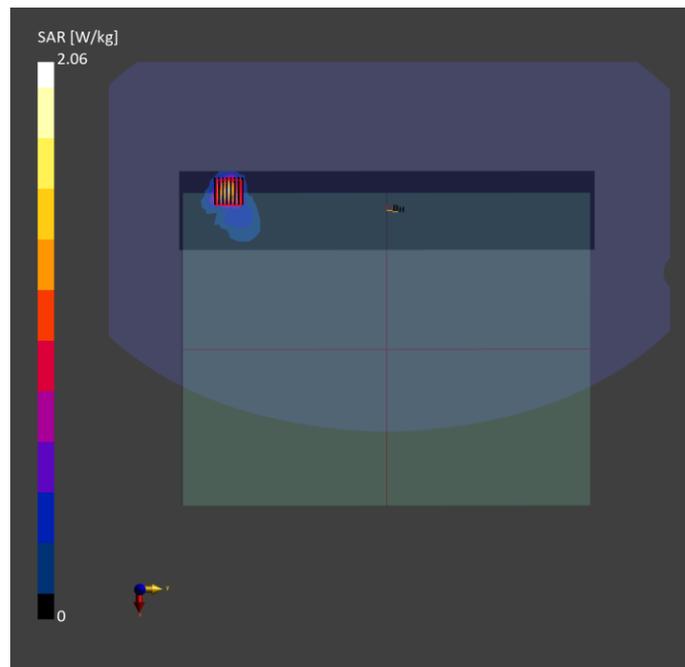

Test Date : 2025-03-05 | Ambient Temp : 22.9 °C

**Test Mode**

**13\_U-NII 5\_802.11ax HE160\_Front Edge of laptop\_2mm\_Ch15\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 10755 - AAC	6025.0, 15	1.0

**Hardware Setup**


Phantom	Medium	Probe   Calibration Date	DAE   Calibration Date
mmWave - 1102	Air	EUmmWV4 - SN9639_F1-55GHz / 2024-09-16	DAE4 Sn1742 / 2024-08-15
Measurement Software Version		V3.2.2.2358	

**Scan Setup**

	5G Scan
Grid Extents [mm]	96.0 x 96.0
Grid Steps [mm]	0.052 x 0.052
Sensor Surface [mm]	2.0

**Measurement Results**

	5G Scan
Avg. Area [cm <sup>2</sup> ]	4.00
psPD n+ [W/m <sup>2</sup> ]	<b>2.63</b>
psPD tot+ [W/m <sup>2</sup> ]	<b>3.07</b>
psPD mod+ [W/m <sup>2</sup> ]	4.12
Peak PD tot [W/m <sup>2</sup> ]	6.04
Power Drift [dB]	0.02

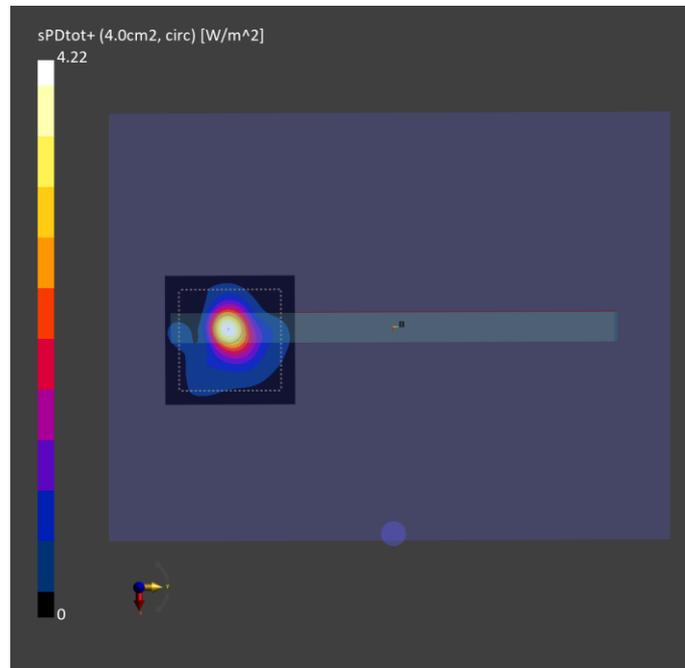

Test Date : 2025-03-07 | Ambient Temp : 22.2 °C

**Test Mode**

**14\_U-NII 5\_802.11ax HE160\_Top Side of keyboard\_2mm\_Ch15\_Ant 0\_Sample 1**

**Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
ASUS	FA608P	A004	Laptop

**Exposure Conditions**

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 10755 - AAC	6025.0, 15	1.0

**Hardware Setup**

Phantom	Medium	Probe   Calibration Date	DAE   Calibration Date
mmWave - 1102	Air	EUmmWV4 - SN9639_F1-55GHz / 2024-09-16	DAE4 Sn1742 / 2024-08-15
Measurement Software Version		V3.2.2.2358	

**Scan Setup**

	5G Scan
Grid Extents [mm]	96.0 x 96.0
Grid Steps [mm]	0.052 x 0.052
Sensor Surface [mm]	2.0

**Measurement Results**

	5G Scan
Avg. Area [cm <sup>2</sup> ]	4.00
psPD n+ [W/m <sup>2</sup> ]	<b>2.71</b>
psPD tot+ [W/m <sup>2</sup> ]	<b>6.89</b>
psPD mod+ [W/m <sup>2</sup> ]	7.98
Peak PD tot [W/m <sup>2</sup> ]	9.40
Power Drift [dB]	0.15

