


Appendix D. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	54%
Test Engineer	Jim Huang	Configurations	2.4G + 5G

Horizontal

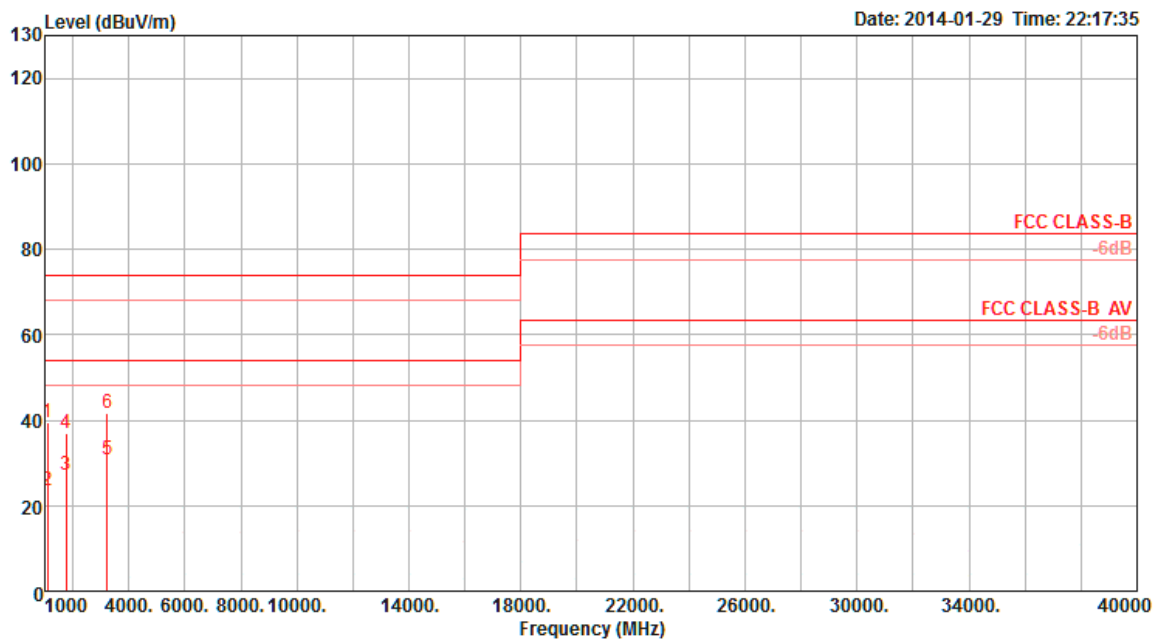

	Freq	Level	Limit	Over	ReadAntenna	Remark	T/Pos	A/Pos	Pol/Phase	Cable Preamp	Loss Factor
	MHz	dBuV/m	dBuV/m	dB	Level	Factor	deg	cm		dB	dB
1	1099.76	39.55	74.00	-34.45	49.34	24.05	98	100	HORIZONTAL	1.92	35.76
2	1100.09	23.41	54.00	-30.59	33.20	24.05	98	100	HORIZONTAL	1.92	35.76
3	1759.90	27.14	54.00	-26.86	32.52	27.05	171	100	HORIZONTAL	2.47	34.90
4	1760.01	36.95	74.00	-37.05	42.33	27.05	171	100	HORIZONTAL	2.47	34.90
5	3235.99	30.94	54.00	-23.06	32.64	29.68	134	100	HORIZONTAL	3.41	34.79
6	3236.08	41.50	74.00	-32.50	43.20	29.68	134	100	HORIZONTAL	3.41	34.79

Vertical

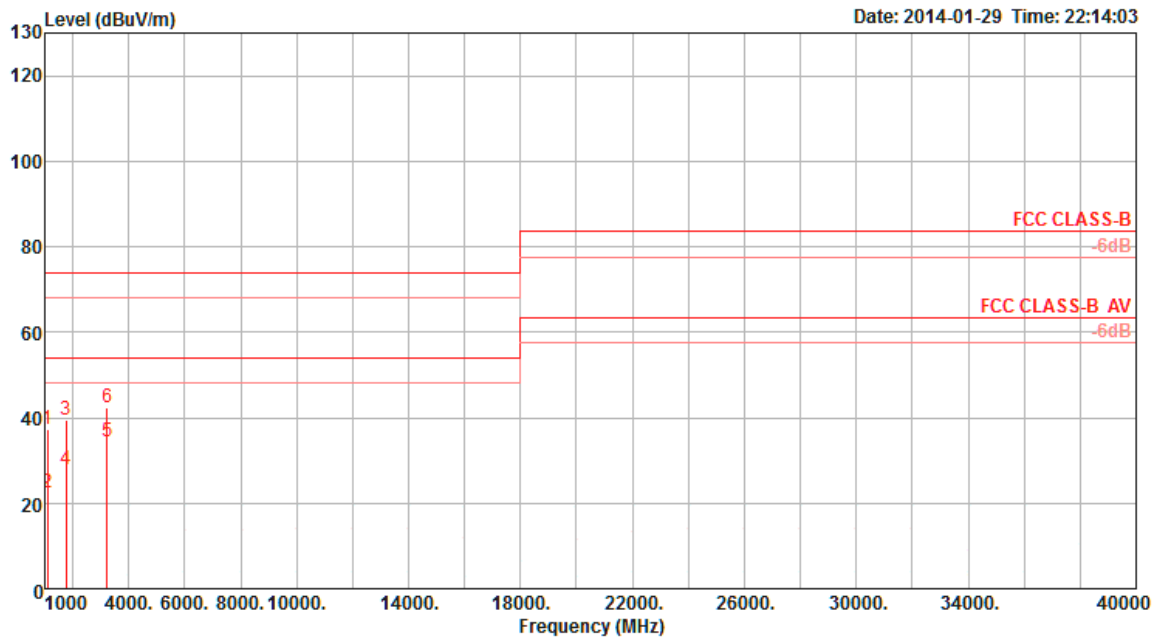

	Freq	Level	Limit	Over	ReadAntenna		T/Pos	A/Pos	Pol/Phase	Cable Preamp	
	MHz	dBuV/m	Line	Limit	Level	Factor	Remark			Loss	Factor
				dB	dBuV	dB/m		deg	cm	dB	dB
1	1099.58	37.12	74.00	-36.88	46.91	24.05	Peak	345	100	1.92	35.76
2	1100.05	22.53	54.00	-31.47	32.32	24.05	Average	345	100	1.92	35.76
3	1759.80	39.64	74.00	-34.36	45.02	27.05	Peak	352	100	2.47	34.90
4	1759.94	27.88	54.00	-26.12	33.26	27.05	Average	352	100	2.47	34.90
5	3235.98	34.55	54.00	-19.45	36.25	29.68	Average	342	100	3.41	34.79
6	3236.01	42.37	74.00	-31.63	44.07	29.68	Peak	342	100	3.41	34.79