


## Appendix B. Radiated Emission Co-location Report

# 1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	2.4G + 5G

## Horizontal

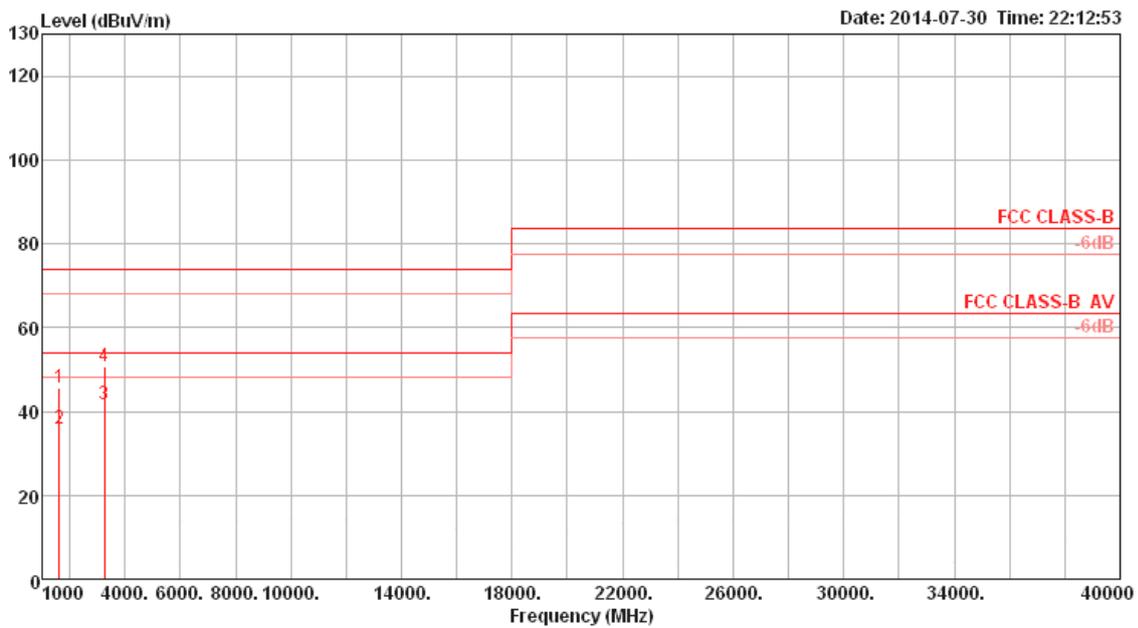

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1612.19	45.71	74.00	-28.29	51.39	3.31	25.91	34.90	Peak	112	201	HORIZONTAL
2	1612.34	35.93	54.00	-18.07	41.61	3.31	25.91	34.90	Average	112	201	HORIZONTAL
3	3245.23	41.80	54.00	-12.20	41.75	4.87	30.38	35.20	Average	103	178	HORIZONTAL
4	3245.52	50.74	74.00	-23.26	50.69	4.87	30.38	35.20	Peak	103	178	HORIZONTAL

Vertical

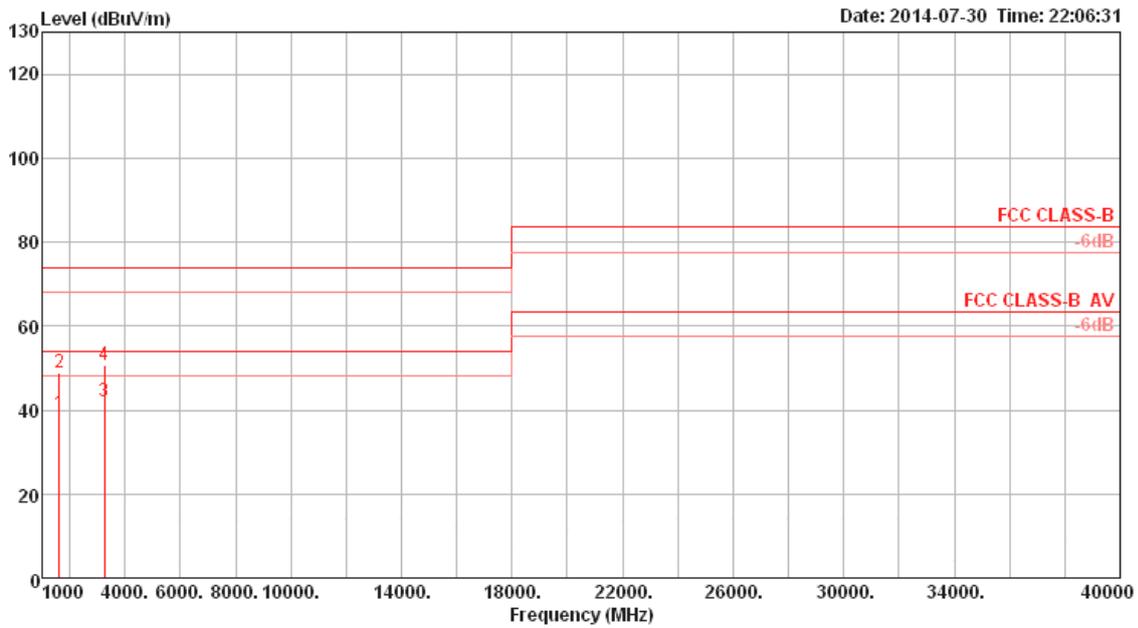

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1612.35	39.18	54.00	-14.82	44.86	3.31	25.91	34.90	105	237	VERTICAL
2	1612.73	49.01	74.00	-24.99	54.69	3.31	25.91	34.90	105	237	VERTICAL
3	3245.14	42.03	54.00	-11.97	41.98	4.87	30.38	35.20	114	132	VERTICAL
4	3245.21	50.63	74.00	-23.37	50.58	4.87	30.38	35.20	114	132	VERTICAL