



|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11n_20M (ANT0) |                 |                     |             |
|-------------------------|-----------------|---------------------|-------------|
| Channel No.             | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 149                     | 5745            | 18.636              | --          |
| 157                     | 5785            | 18.544              | --          |
| 165                     | 5825            | 19.092              | --          |


**Channel 149 (5745MHz)**

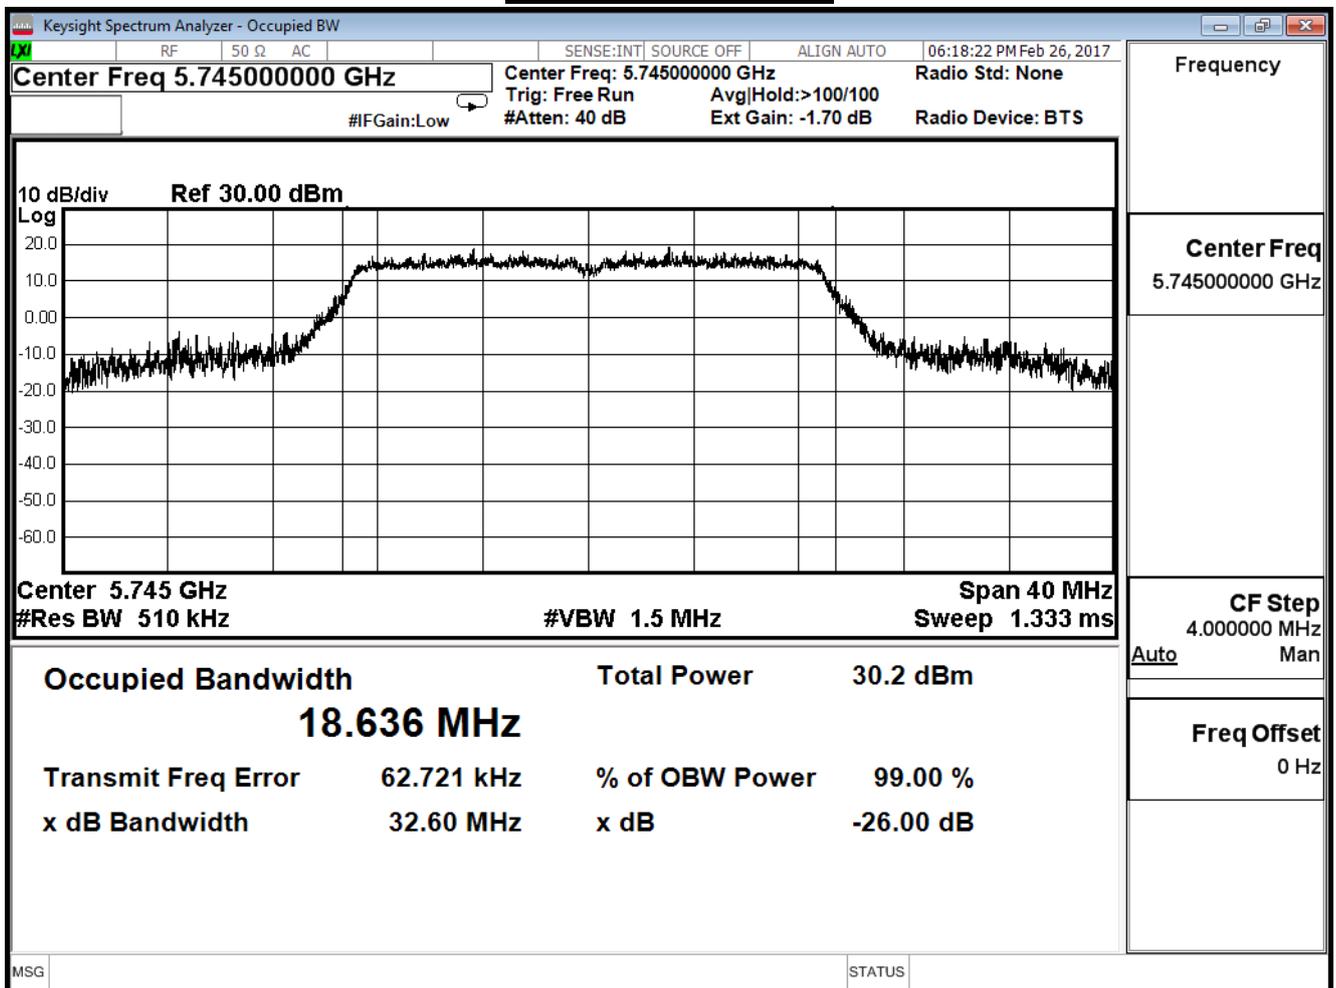

**Channel 157 (5785MHz)**

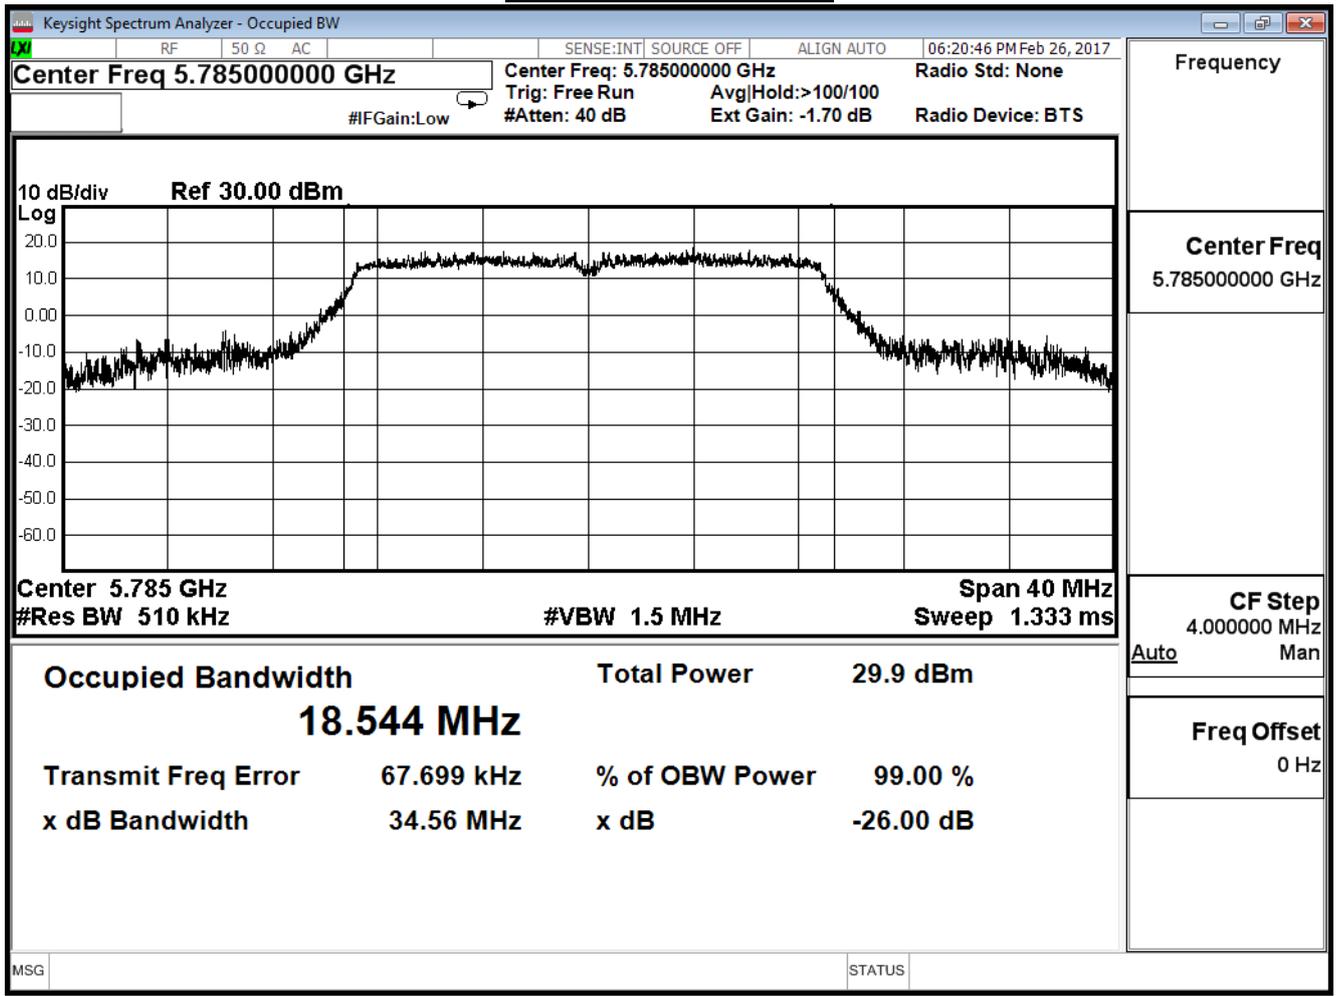

**Channel 165 (5825MHz)**

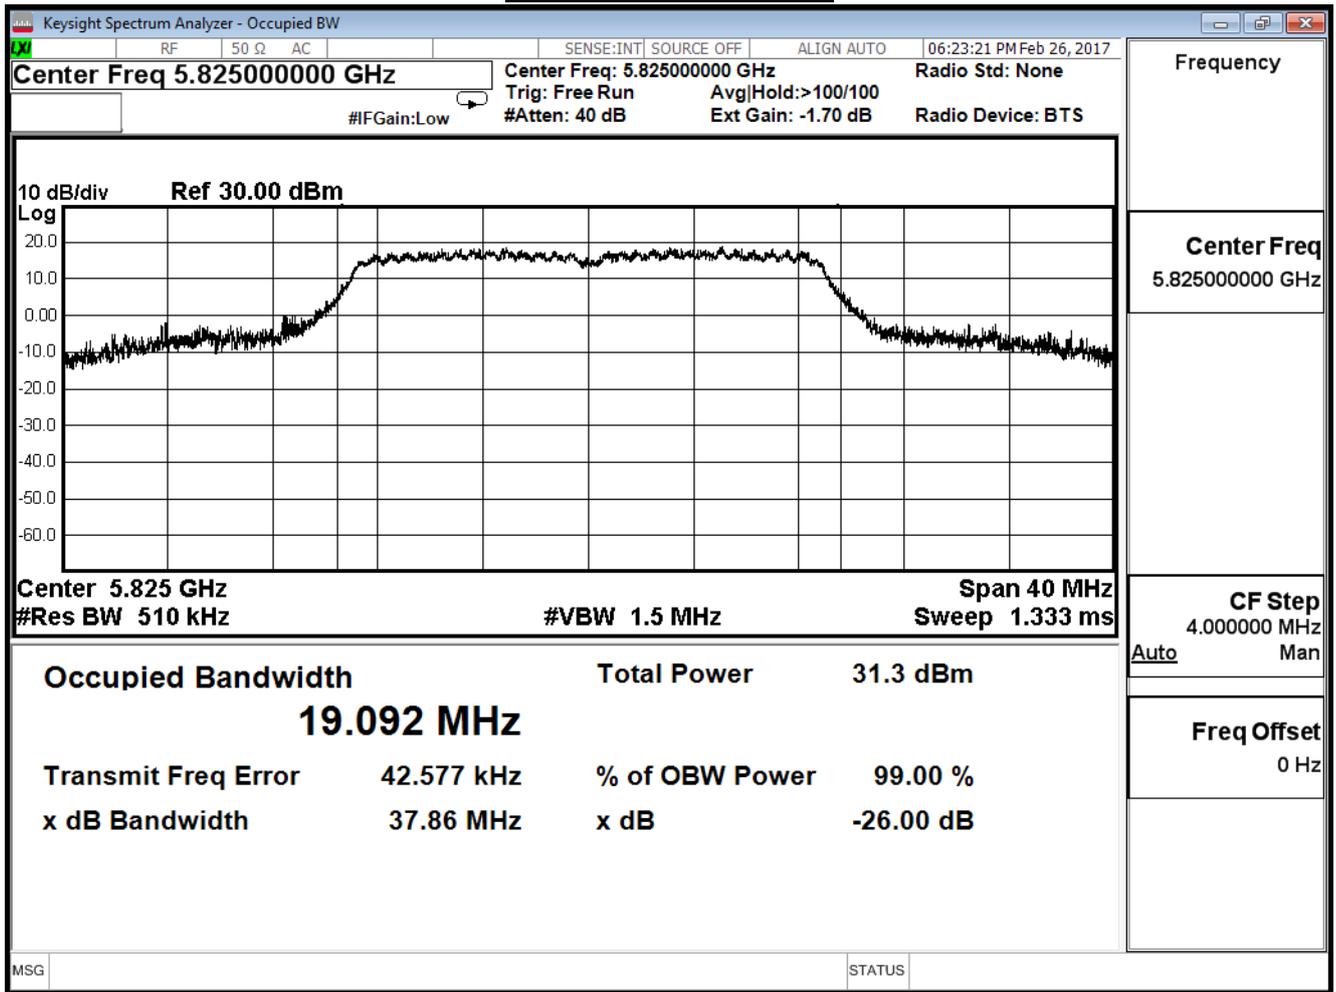


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


IEEE 802.11n\_20M (ANT1)

| Channel No. | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 149         | 5745            | 18.958              | --          |
| 157         | 5785            | 18.559              | --          |
| 165         | 5825            | 18.688              | --          |


**Channel 149 (5745MHz)**

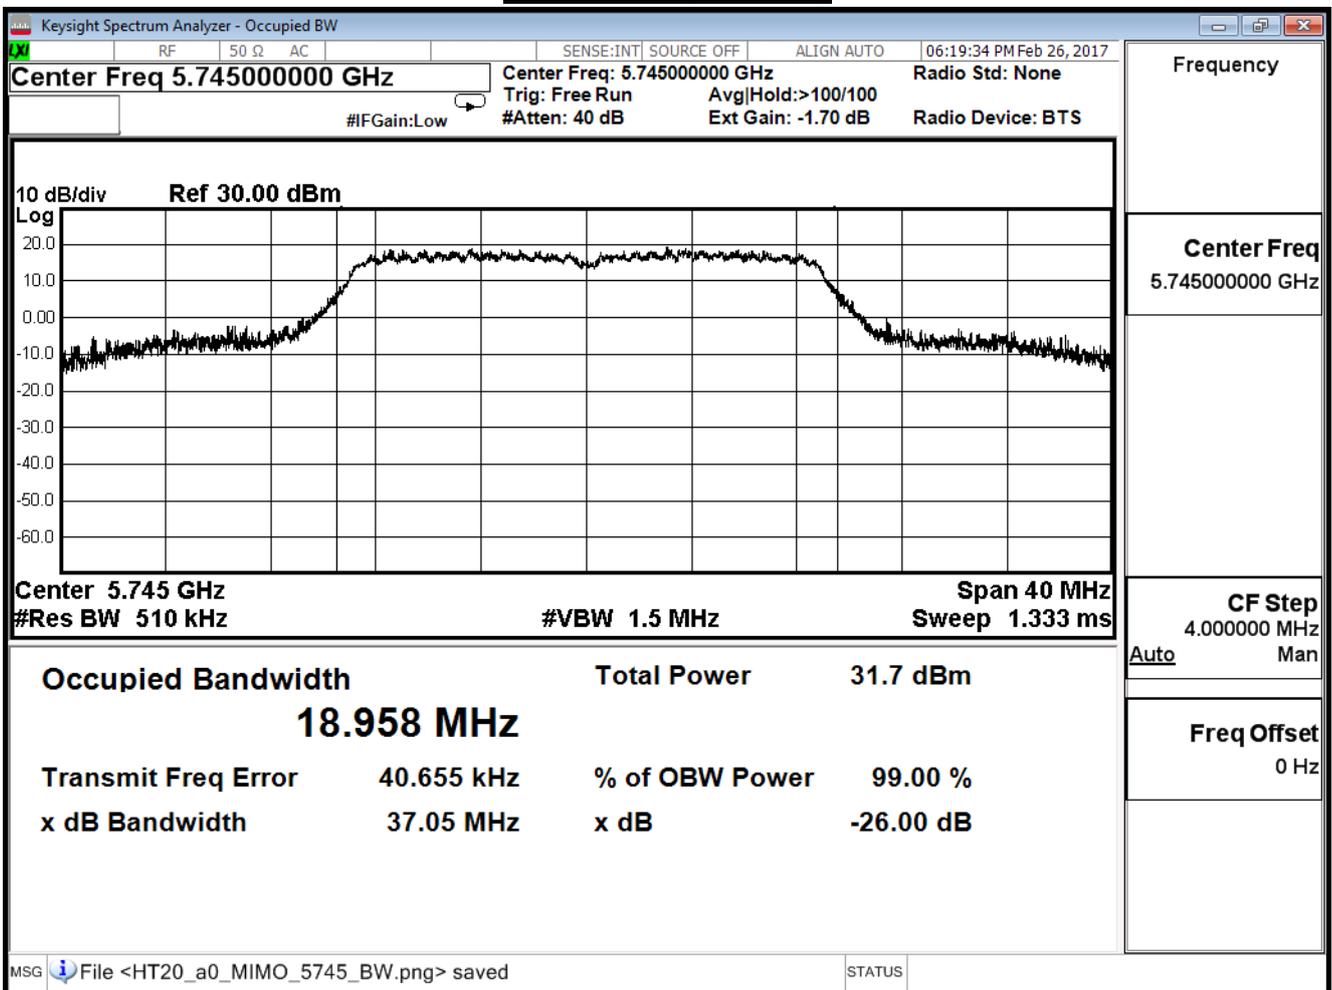

### Channel 157 (5785MHz)

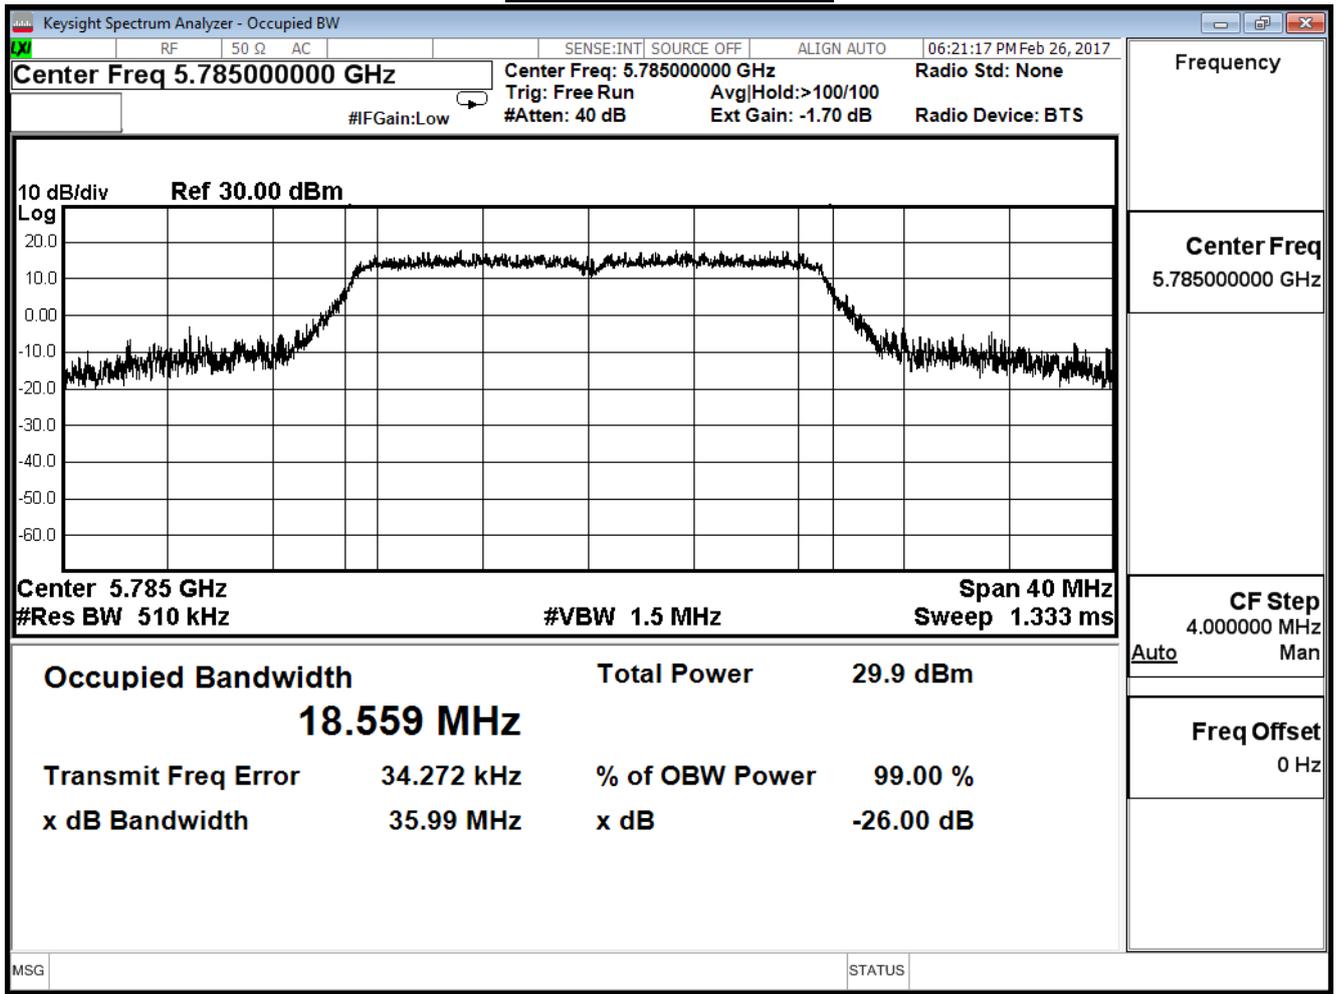

### Channel 165 (5825MHz)

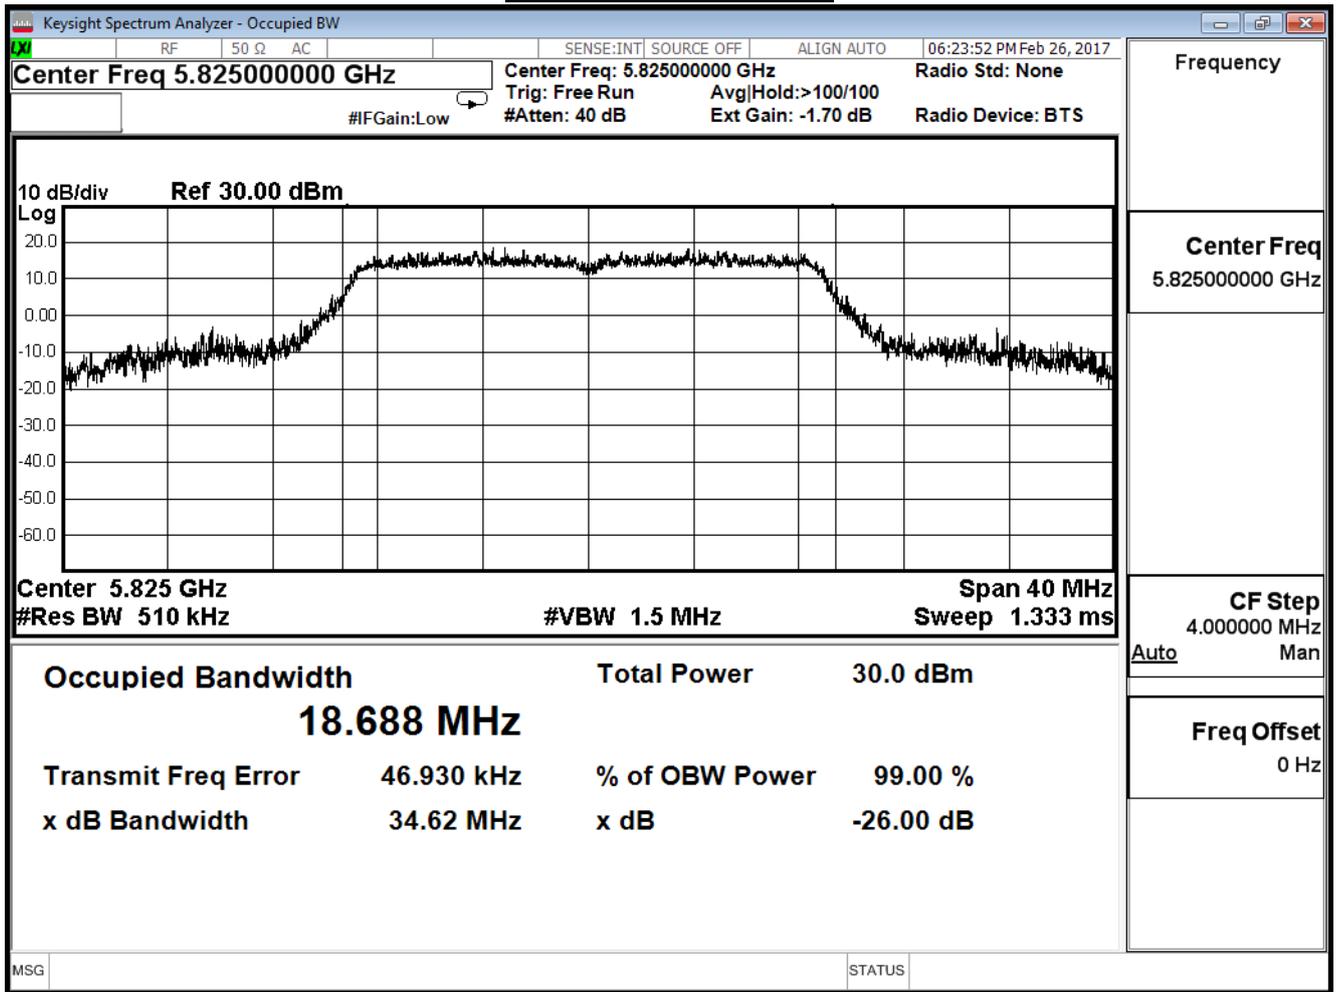


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


IEEE 802.11n\_20M (ANT2)

| Channel No. | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 149         | 5745            | 18.549              | --          |
| 157         | 5785            | 18.848              | --          |
| 165         | 5825            | 18.945              | --          |


**Channel 149 (5745MHz)**

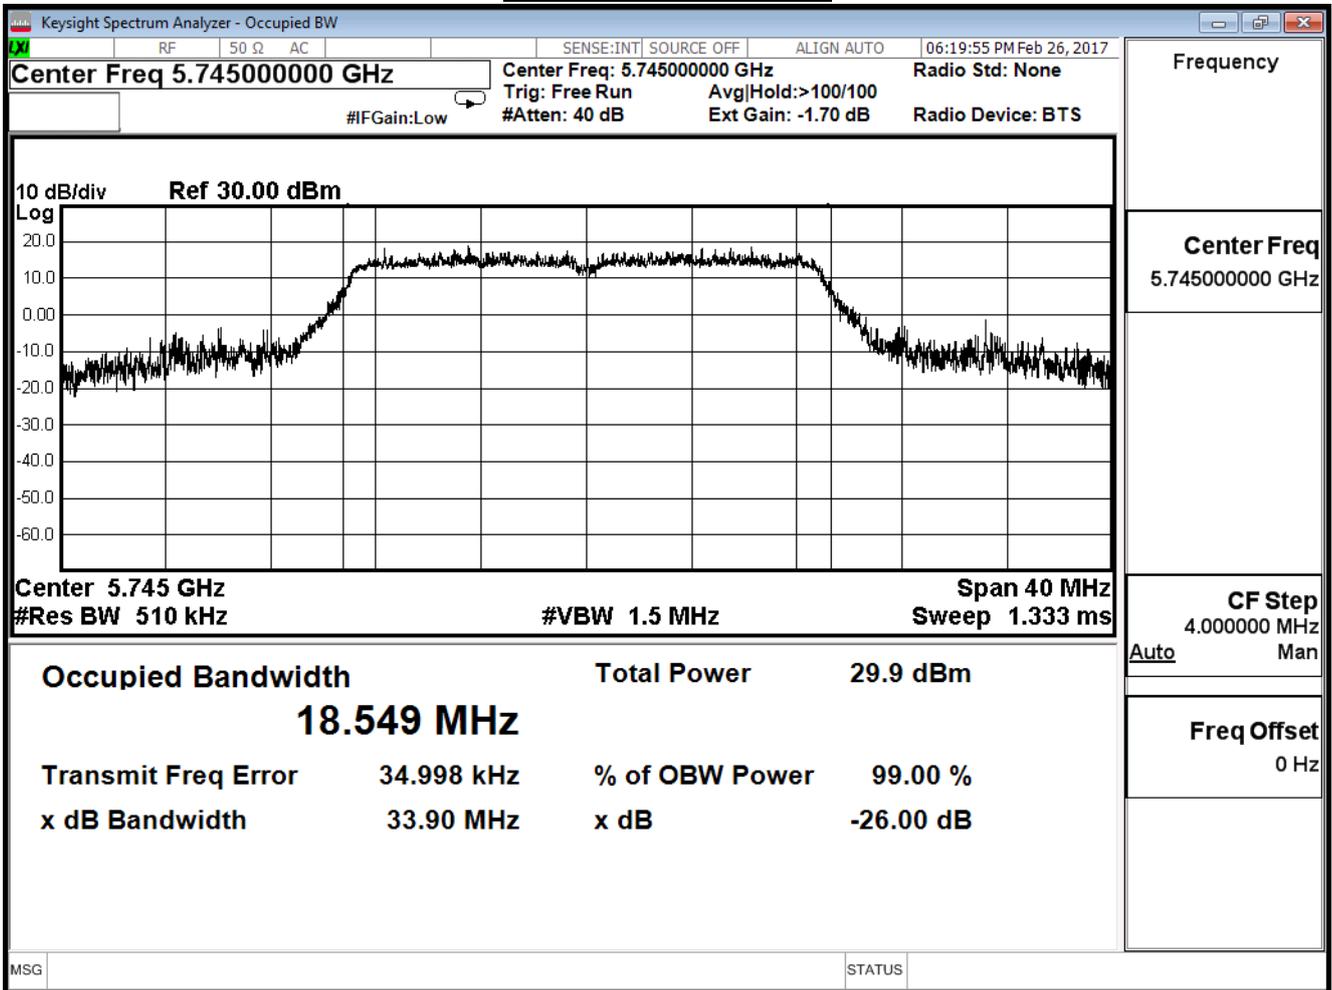

**Channel 157 (5785MHz)**

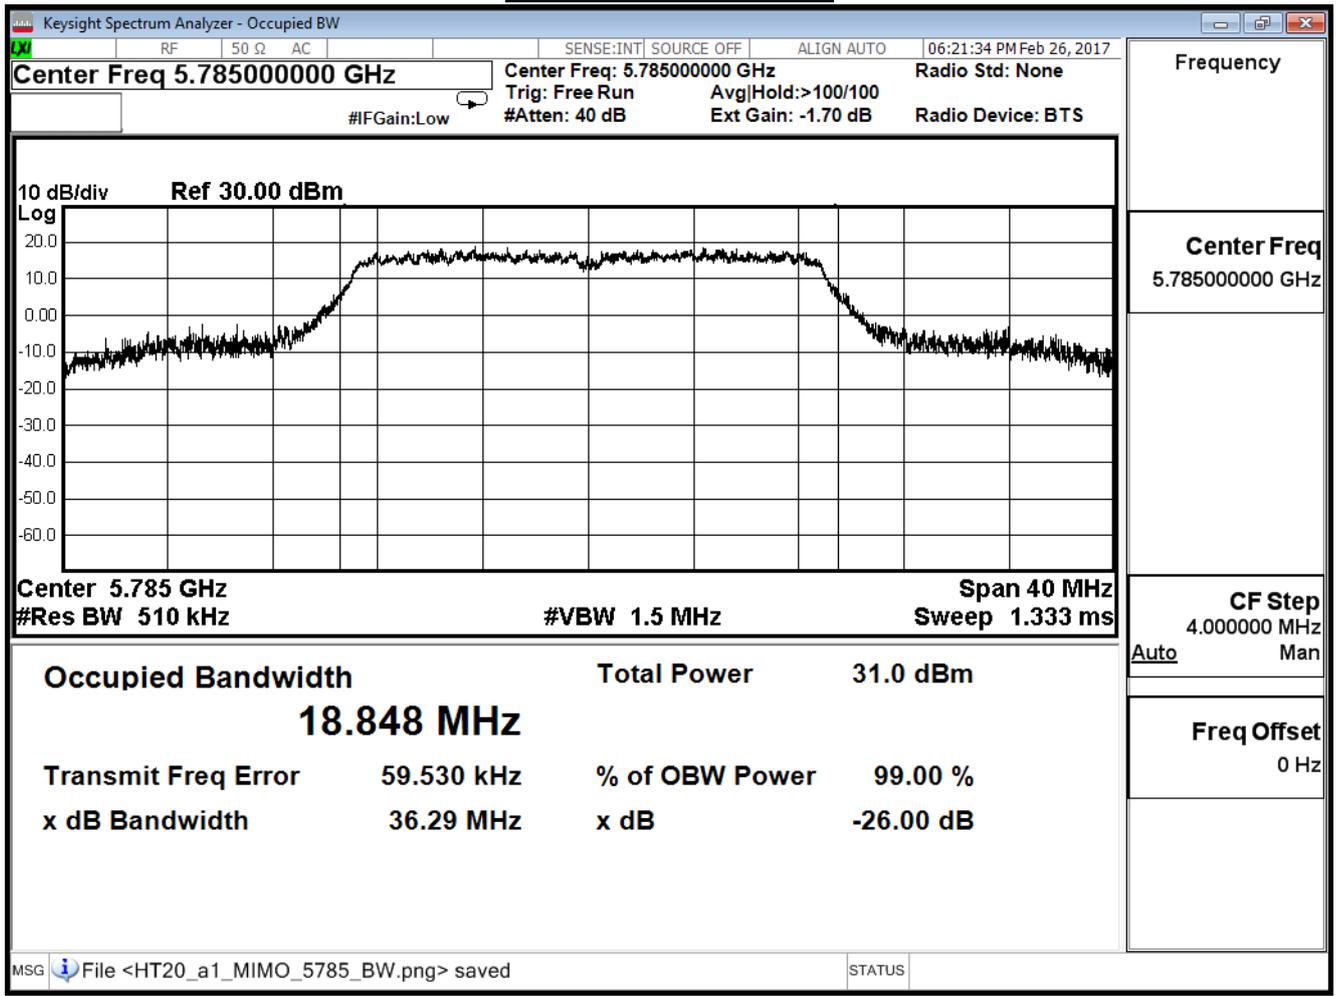

### Channel 165 (5825MHz)

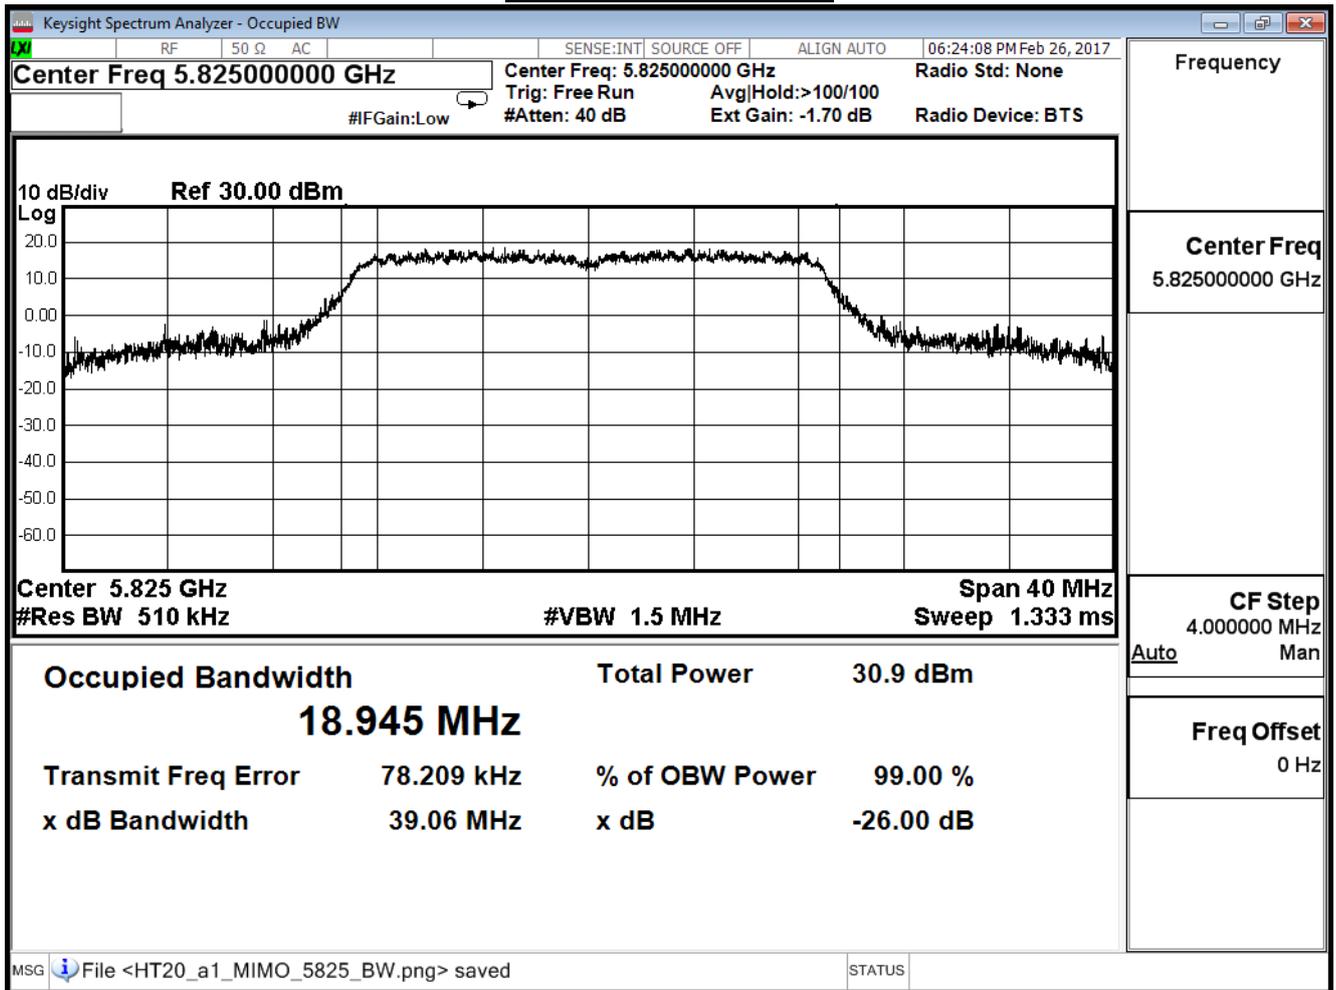


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


IEEE 802.11n\_20M (ANT3)

| Channel No. | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 149         | 5745            | 18.760              | --          |
| 157         | 5785            | 18.505              | --          |
| 165         | 5825            | 19.044              | --          |


**Channel 149 (5745MHz)**

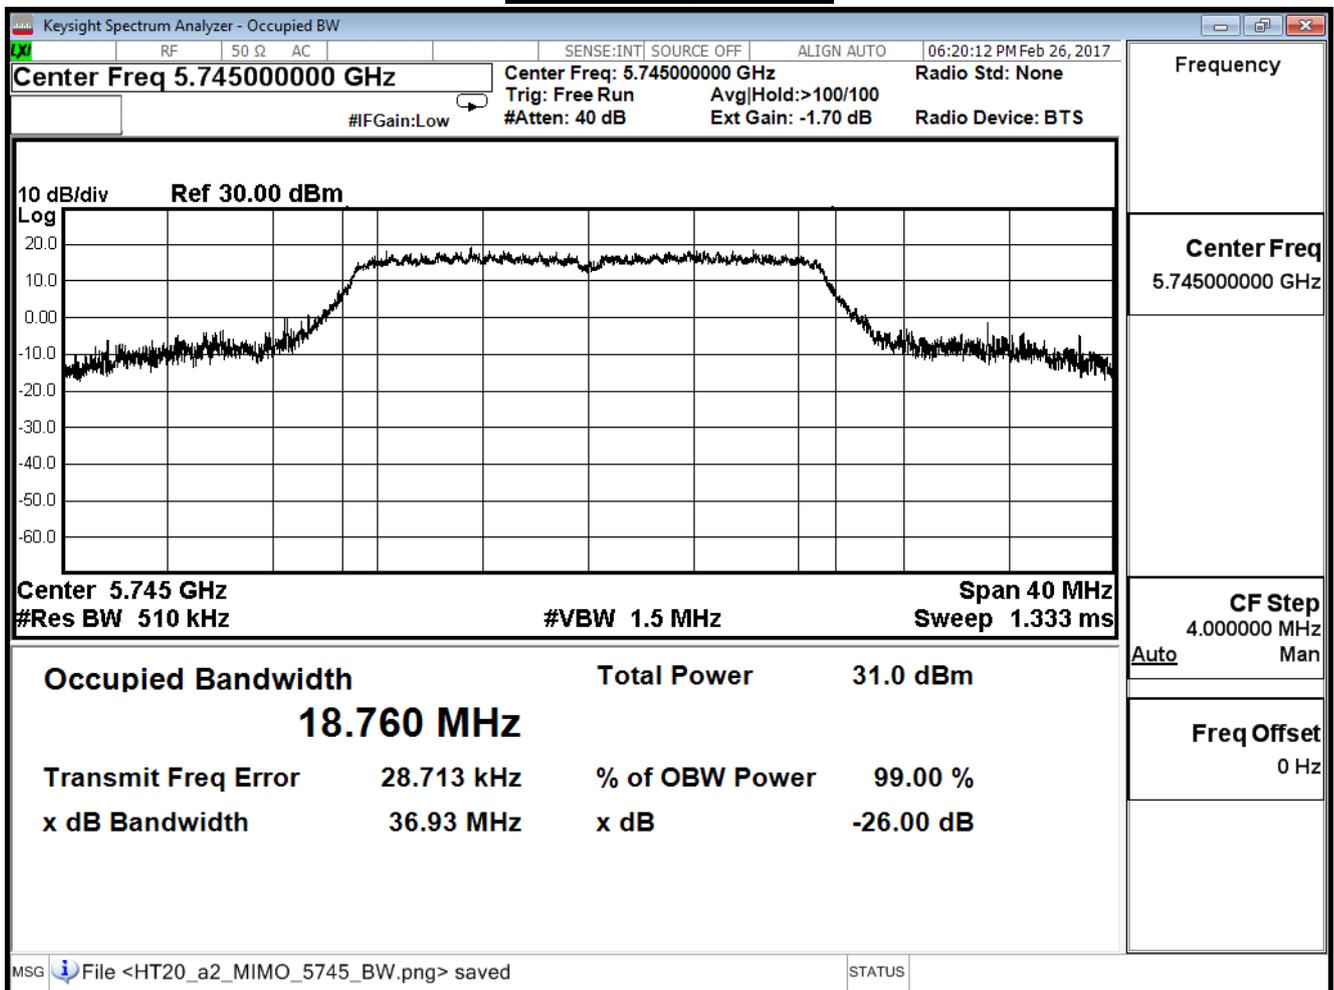

**Channel 157 (5785MHz)**

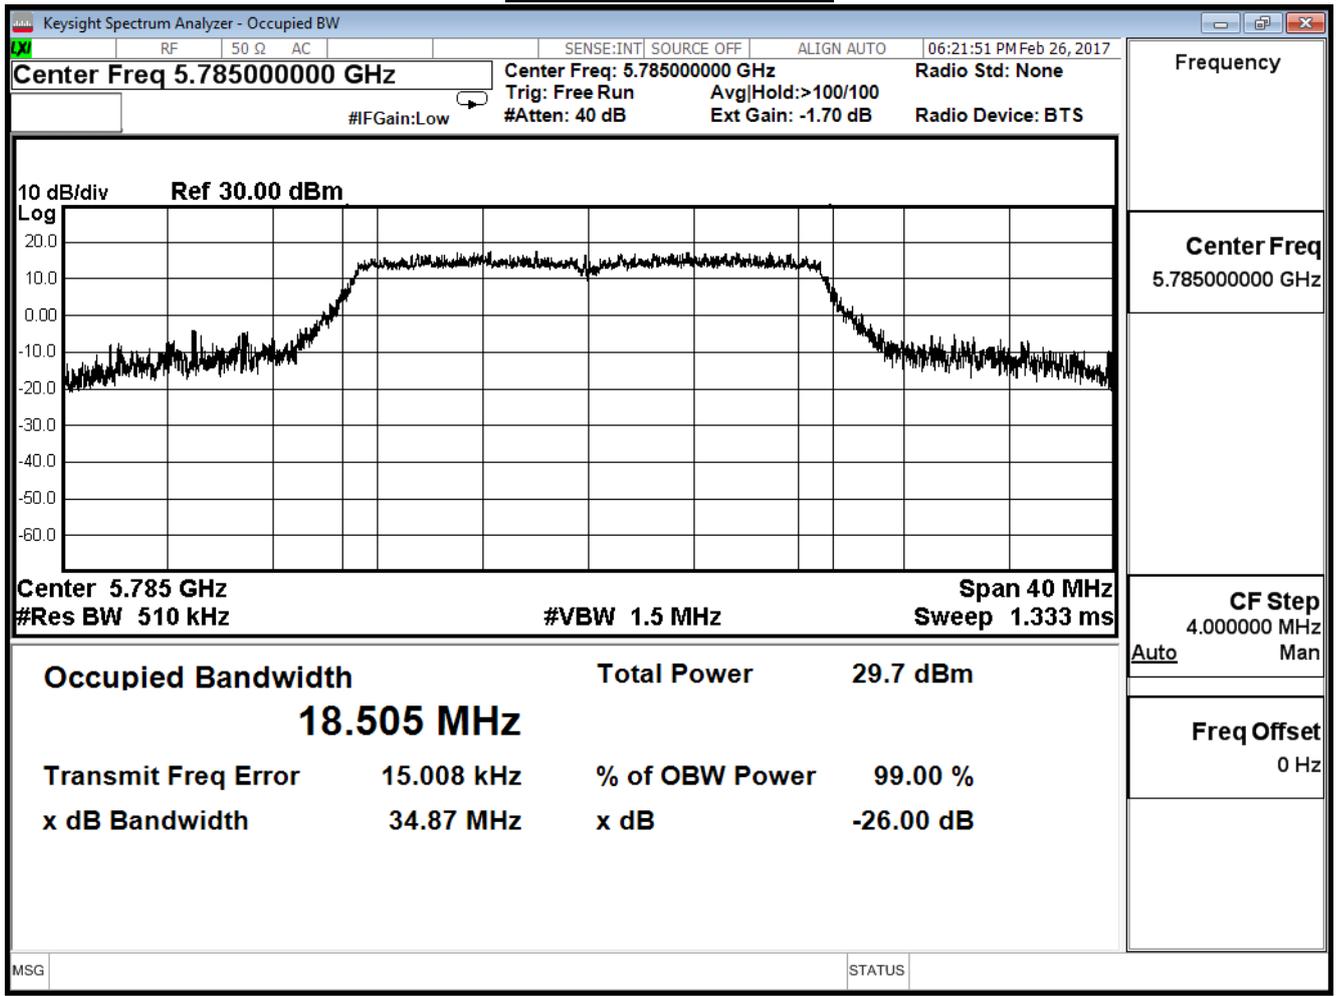


### Channel 165 (5825MHz)

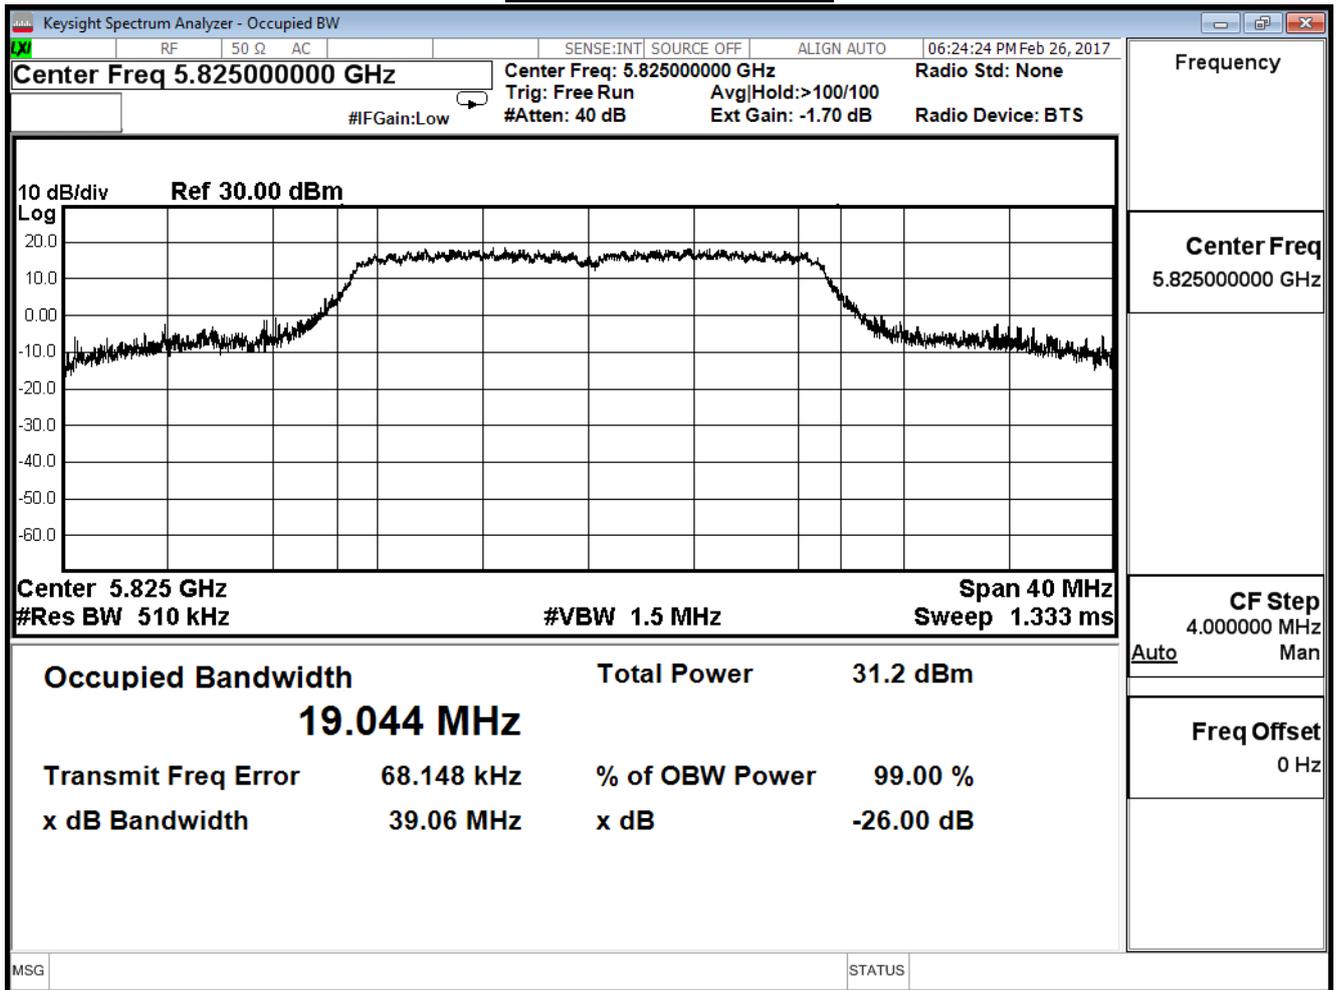


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11n_40M (ANT0) |                 |                     |             |
|-------------------------|-----------------|---------------------|-------------|
| Channel No.             | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 151                     | 5755            | 36.760              | --          |
| 159                     | 5795            | 36.549              | --          |

**Channel 151 (5755MHz)**

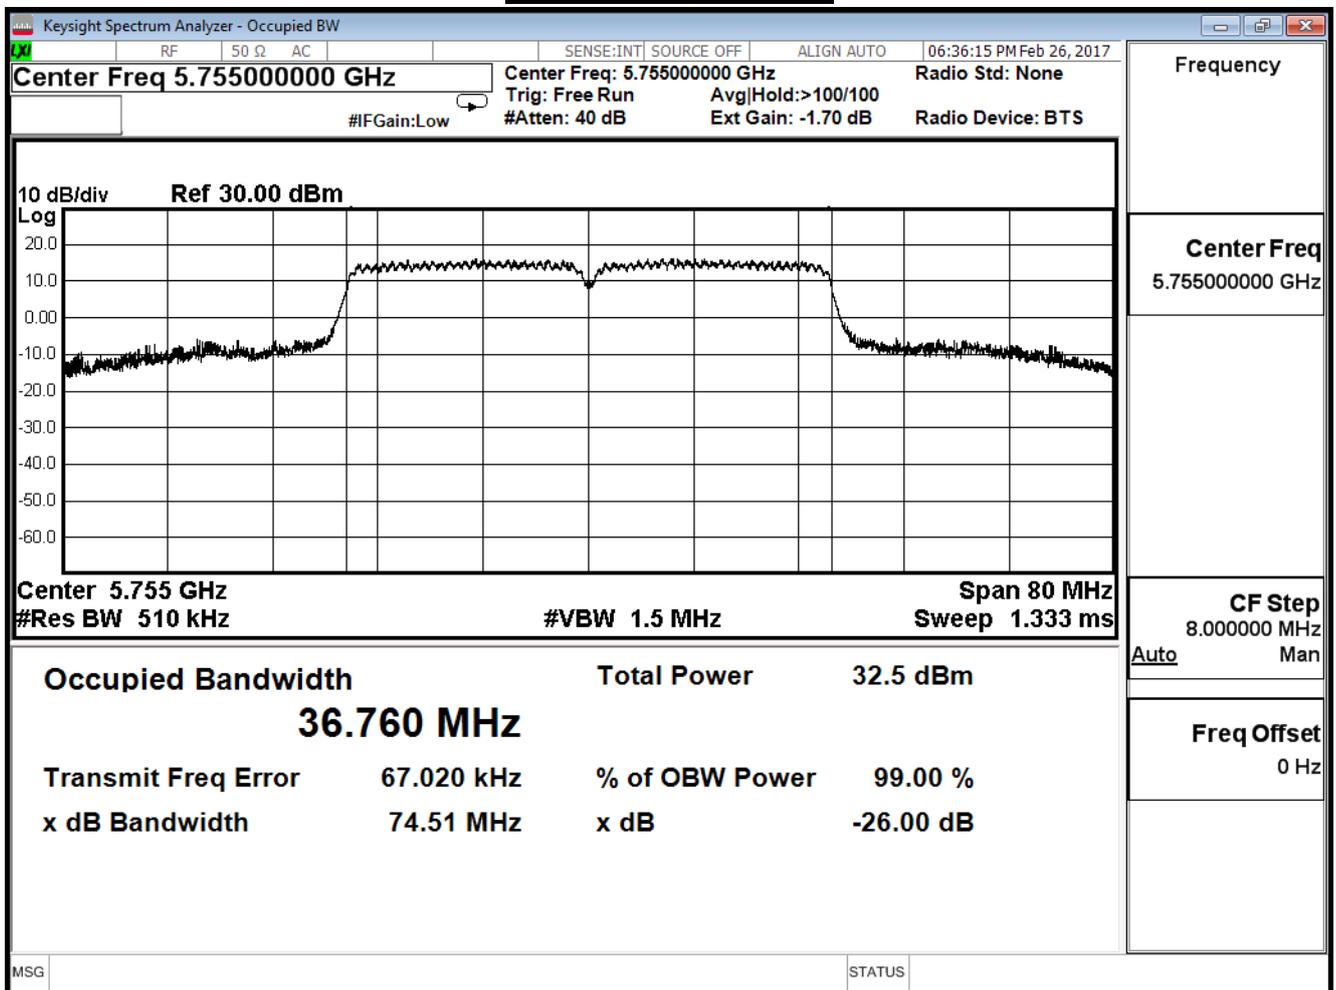

### Channel 159 (5795MHz)

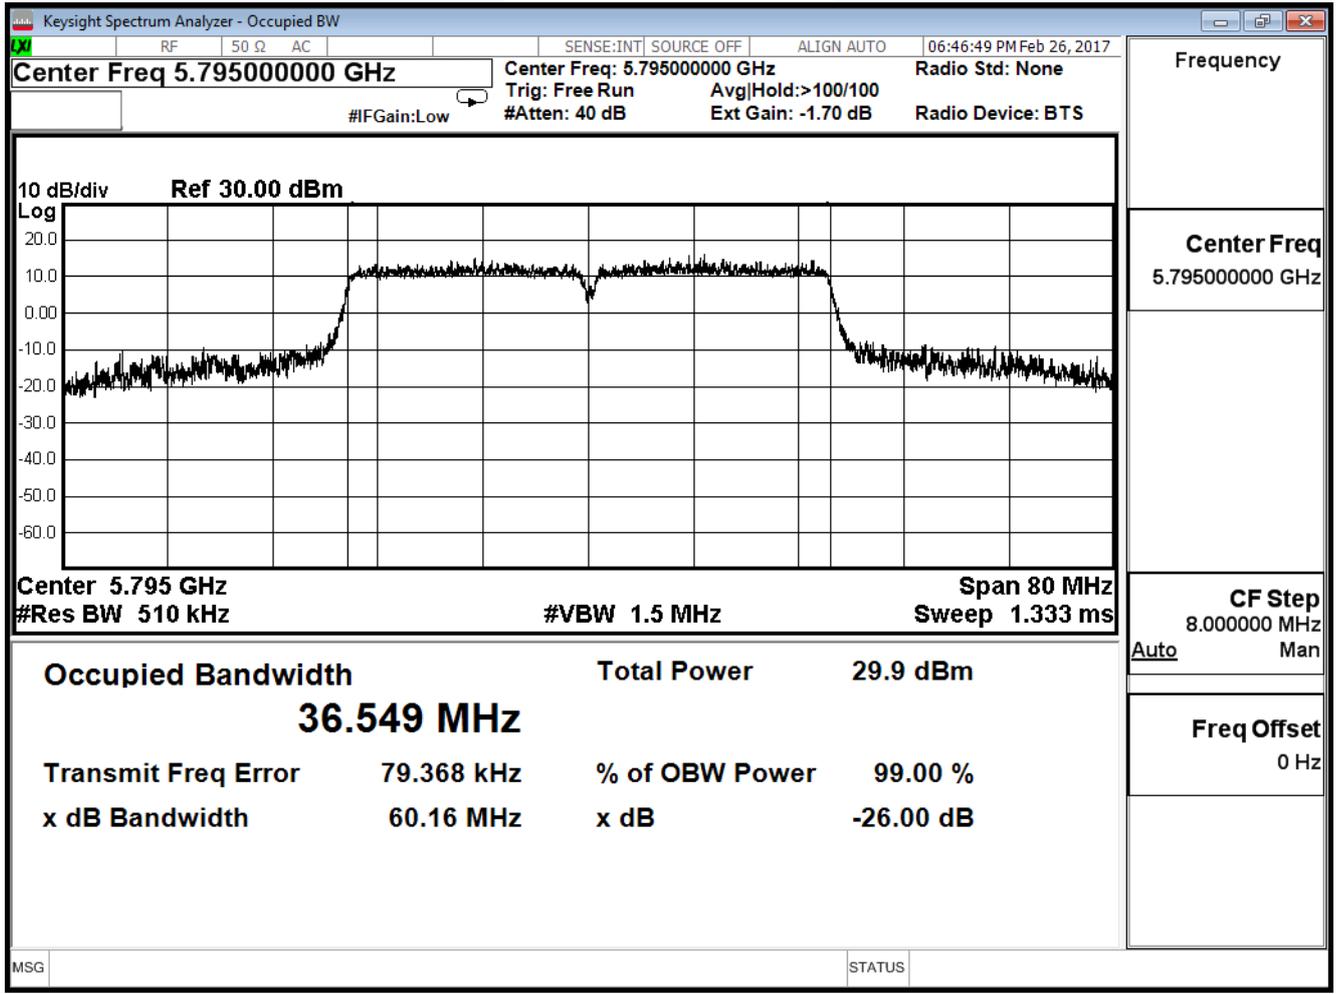


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


IEEE 802.11n\_40M (ANT1)

| Channel No. | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 151         | 5755            | 36.639              | --          |
| 159         | 5795            | 36.680              | --          |

**Channel 151 (5755MHz)**

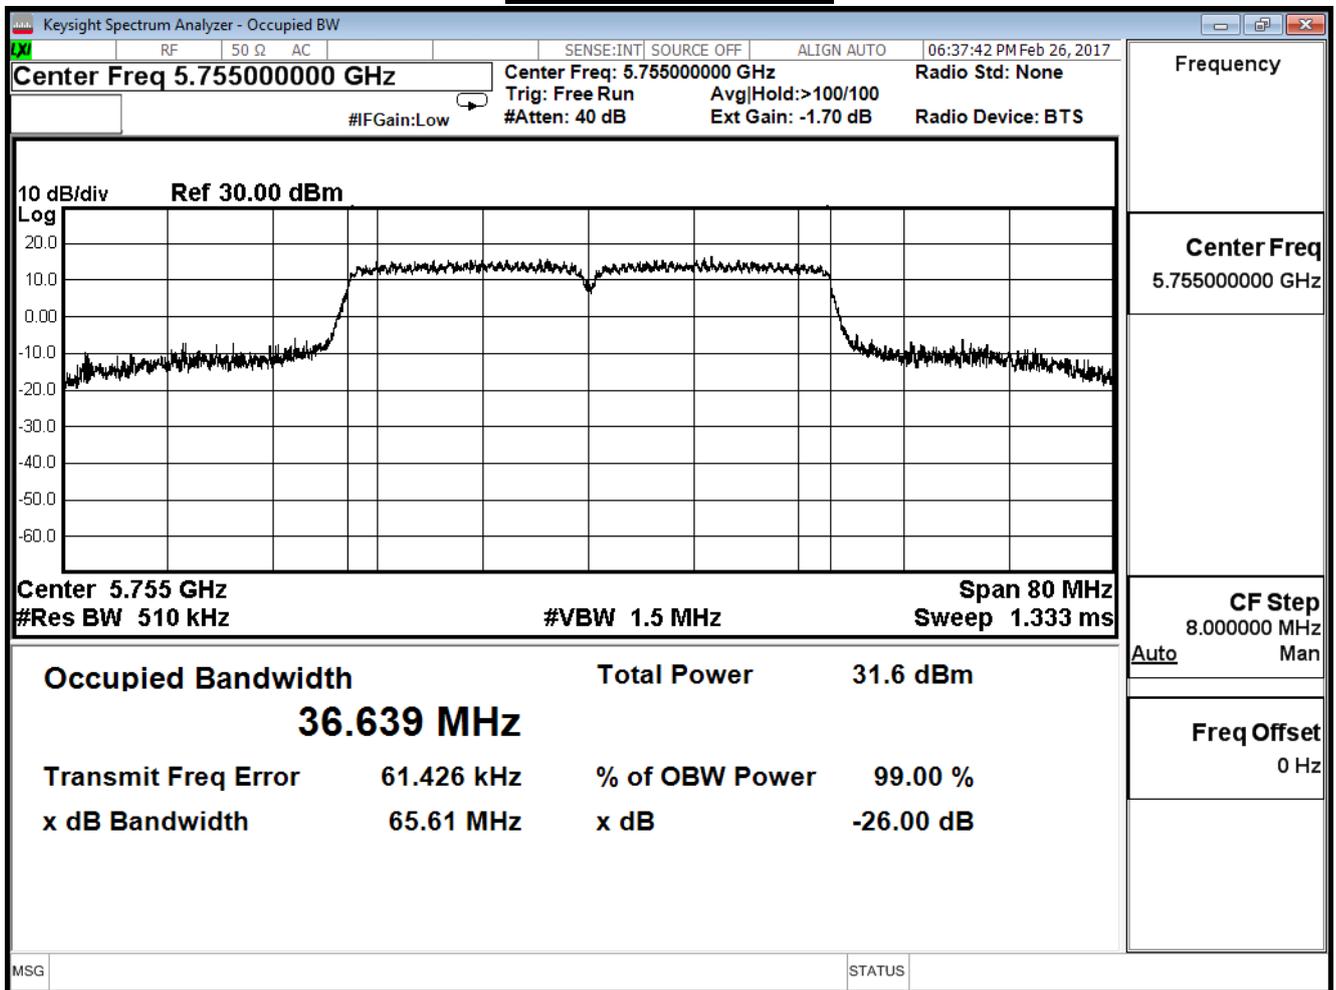


**Channel 159 (5795MHz)**

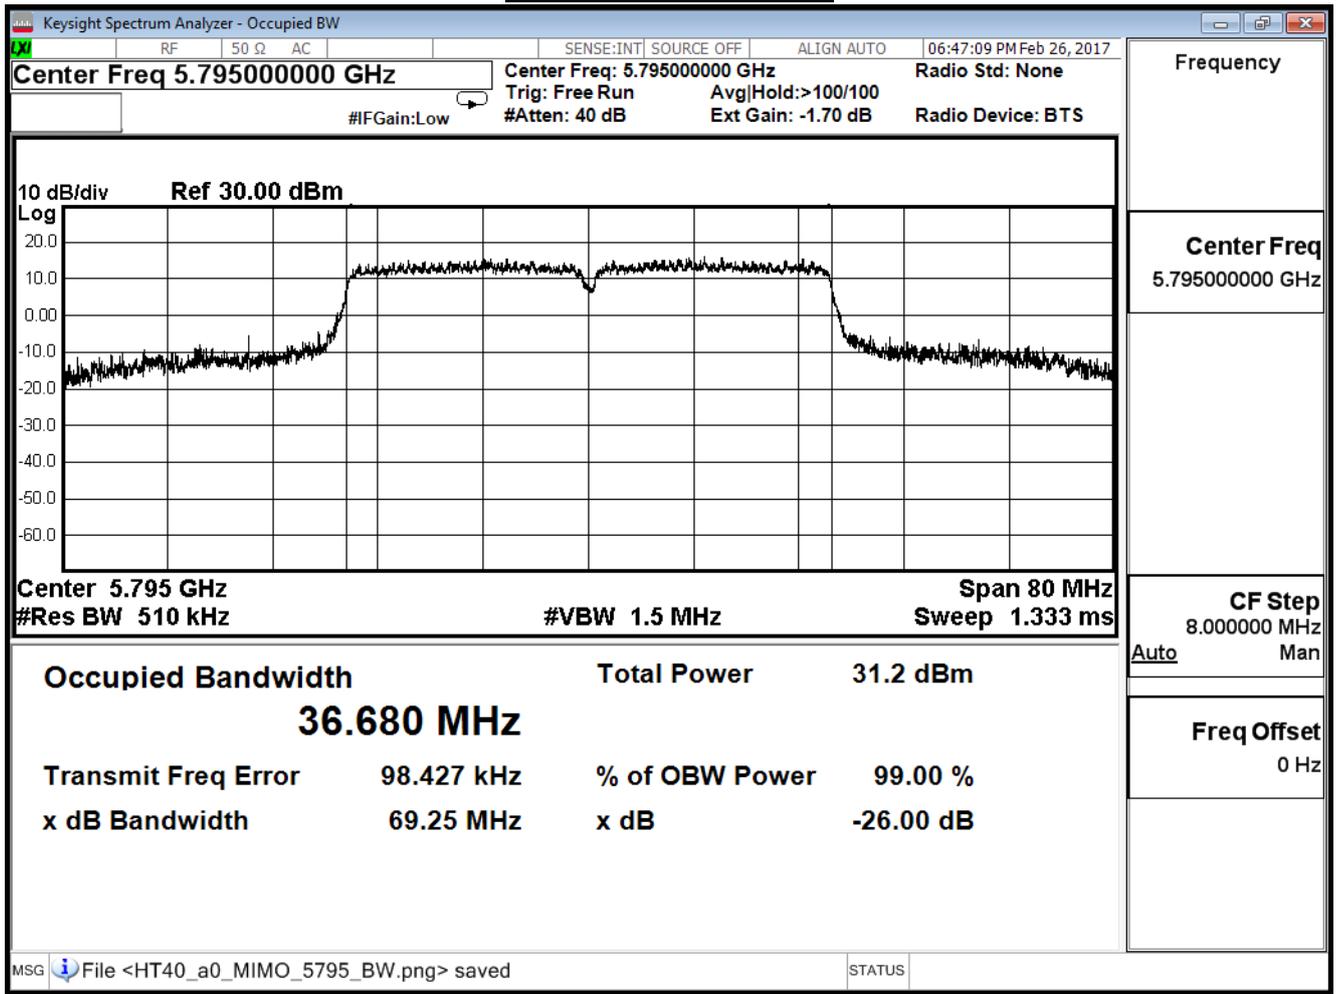


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11n_40M (ANT2) |                 |                     |             |
|-------------------------|-----------------|---------------------|-------------|
| Channel No.             | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 151                     | 5755            | 36.657              | --          |
| 159                     | 5795            | 36.730              | --          |

**Channel 151 (5755MHz)**

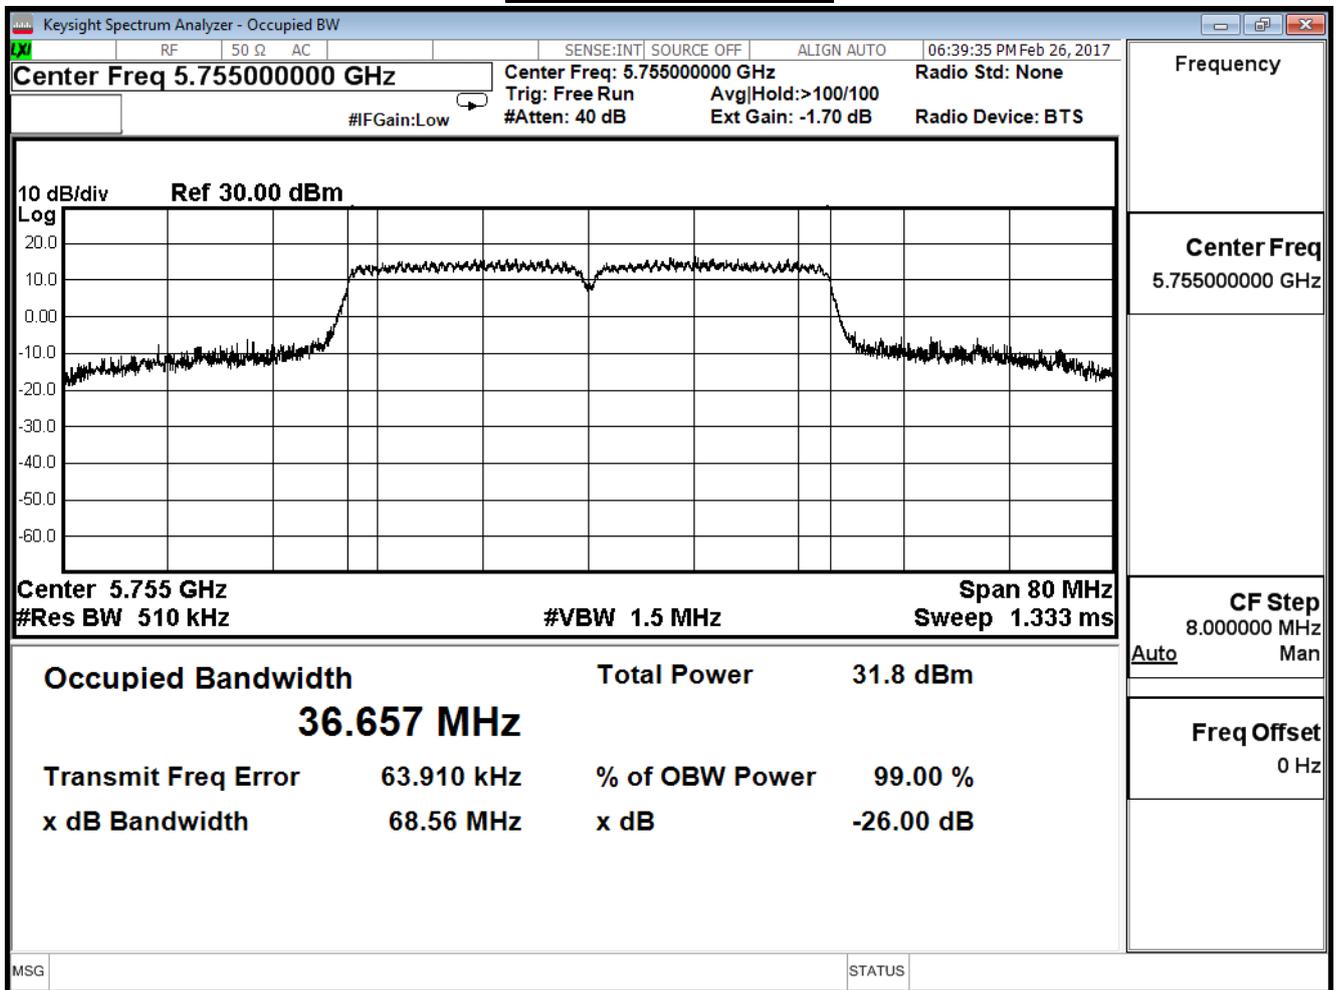

### Channel 159 (5795MHz)

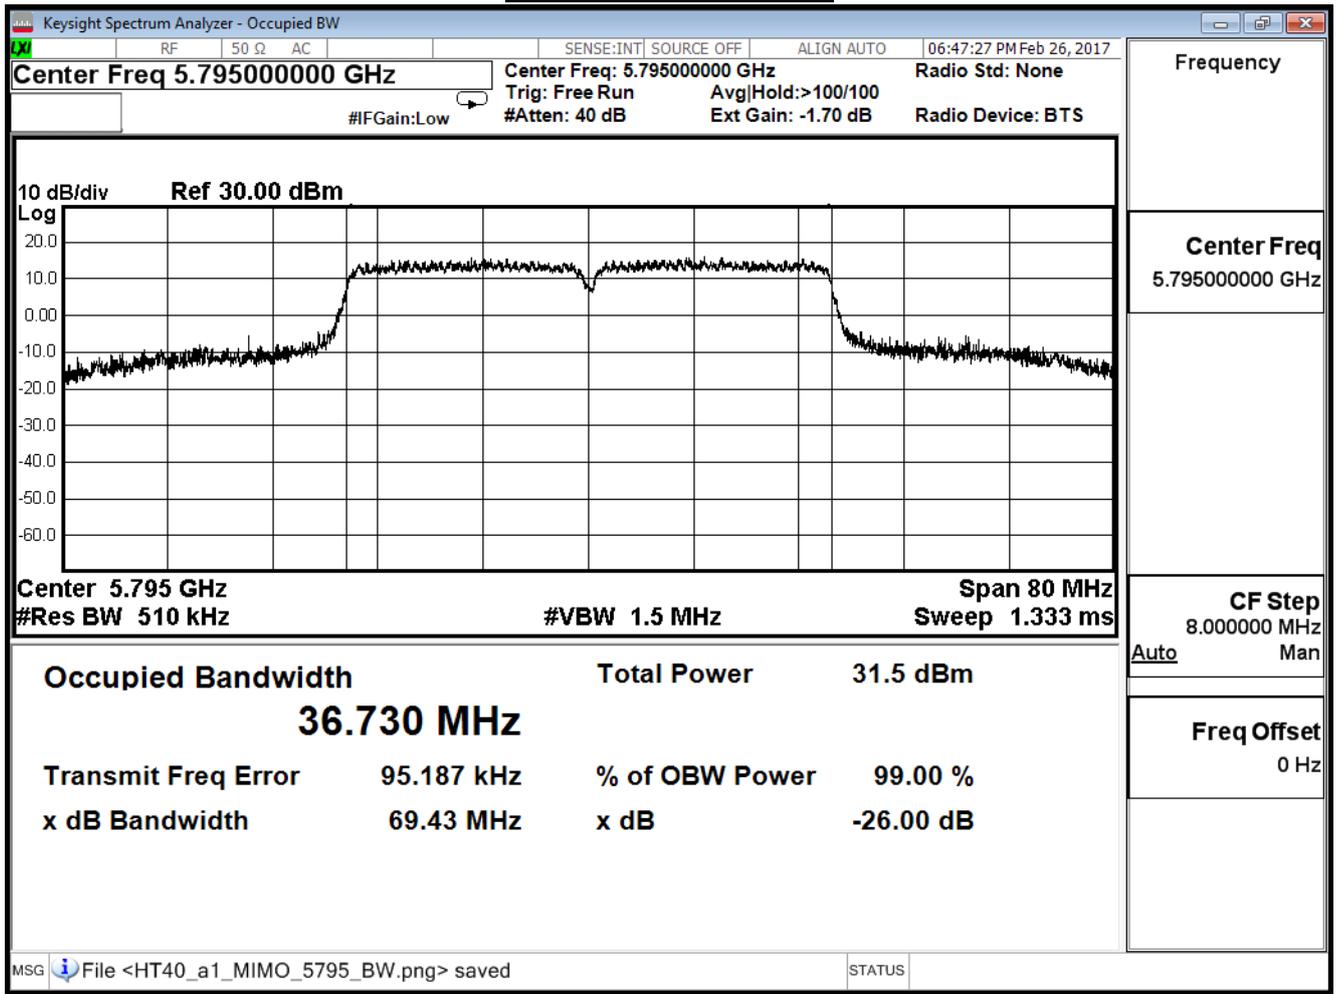


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


IEEE 802.11n\_40M (ANT3)

| Channel No. | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
|-------------|-----------------|---------------------|-------------|
| 151         | 5755            | 36.761              | --          |
| 159         | 5795            | 36.584              | --          |

**Channel 151 (5755MHz)**

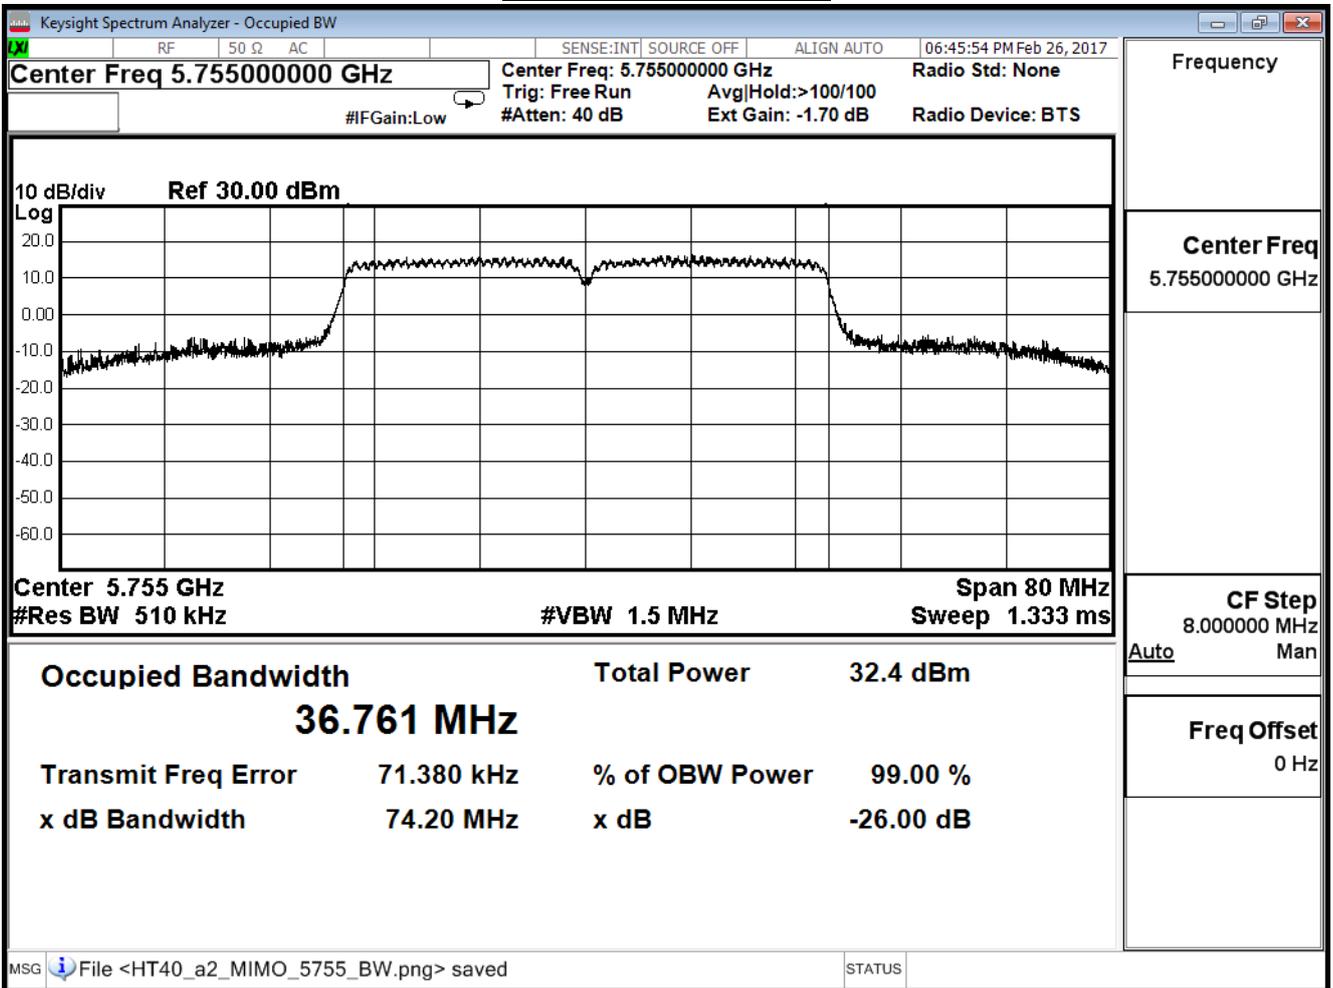


**Channel 159 (5795MHz)**

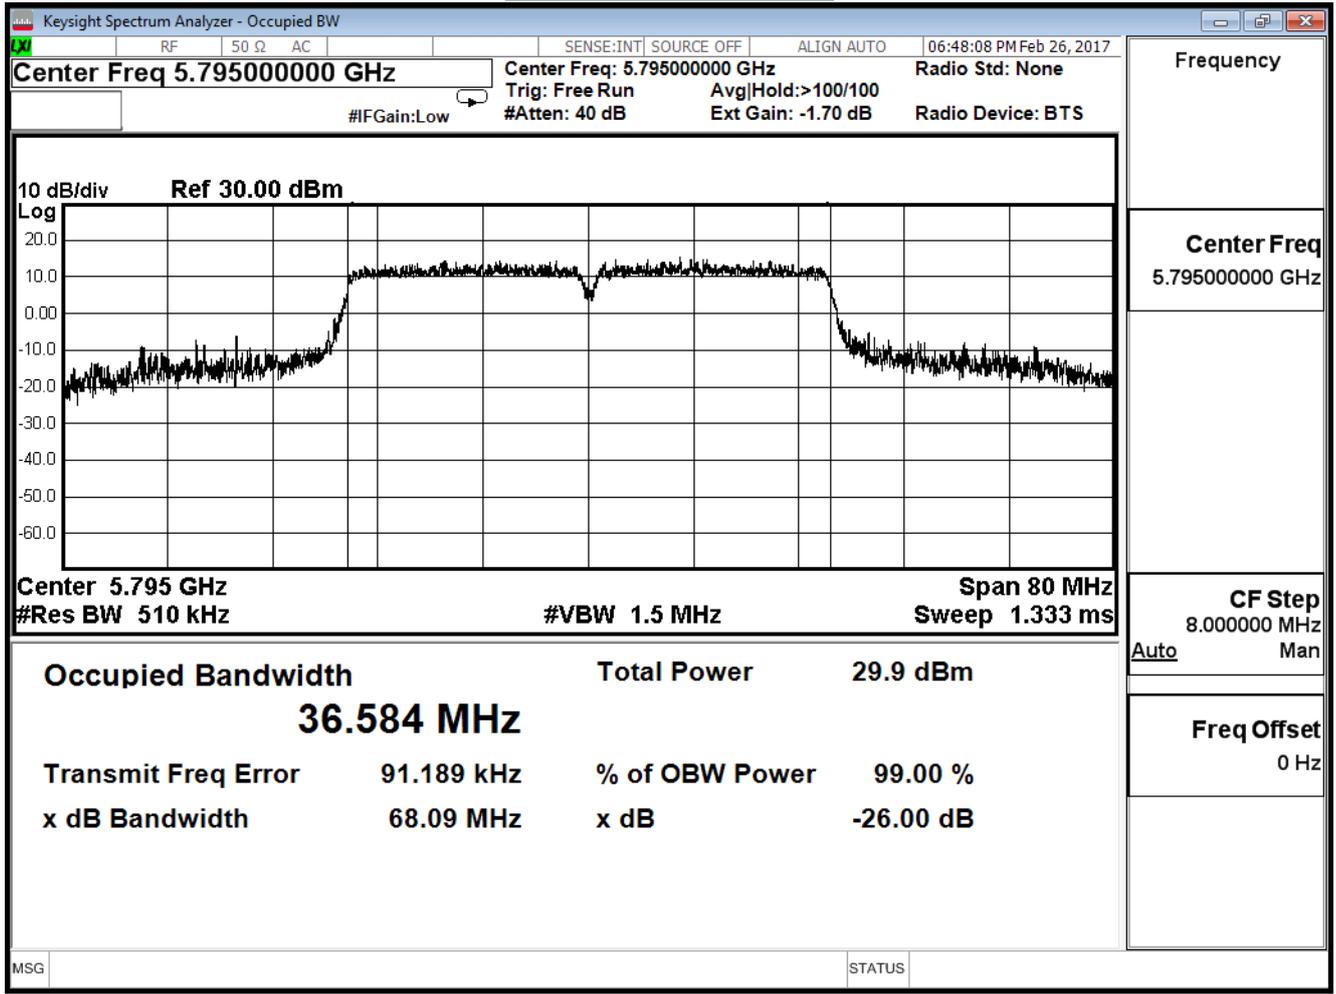

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11ac_80M (ANT0) |                 |                     |             |
|--------------------------|-----------------|---------------------|-------------|
| Channel No.              | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 155                      | 5775            | 76.111              | --          |


**Channel 155 (5775MHz)**

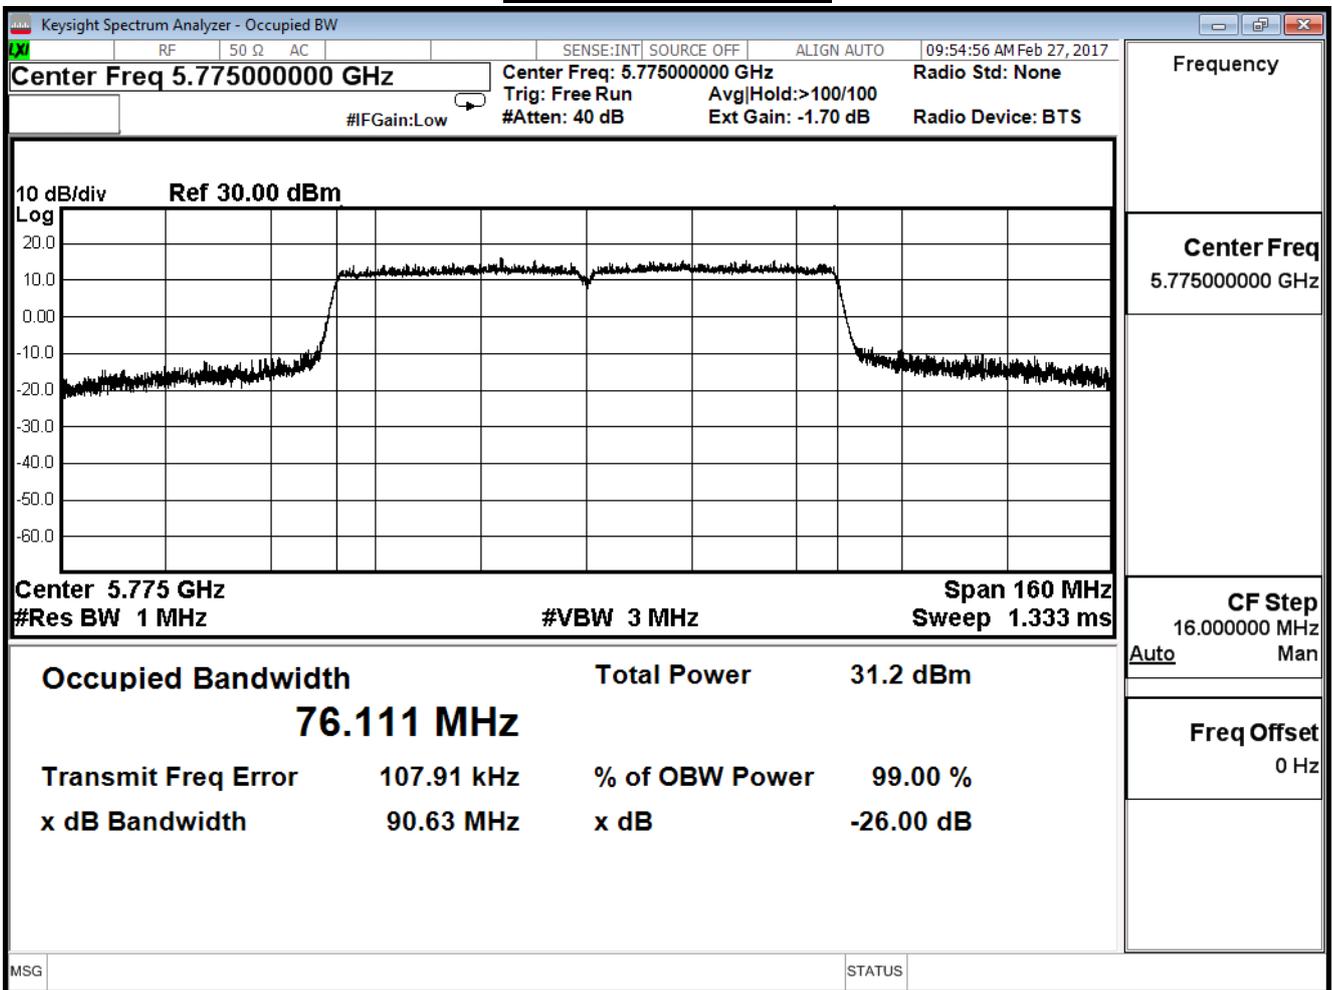

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11ac_80M (ANT1) |                 |                     |             |
|--------------------------|-----------------|---------------------|-------------|
| Channel No.              | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 155                      | 5775            | 75.969              | --          |


**Channel 155 (5775MHz)**

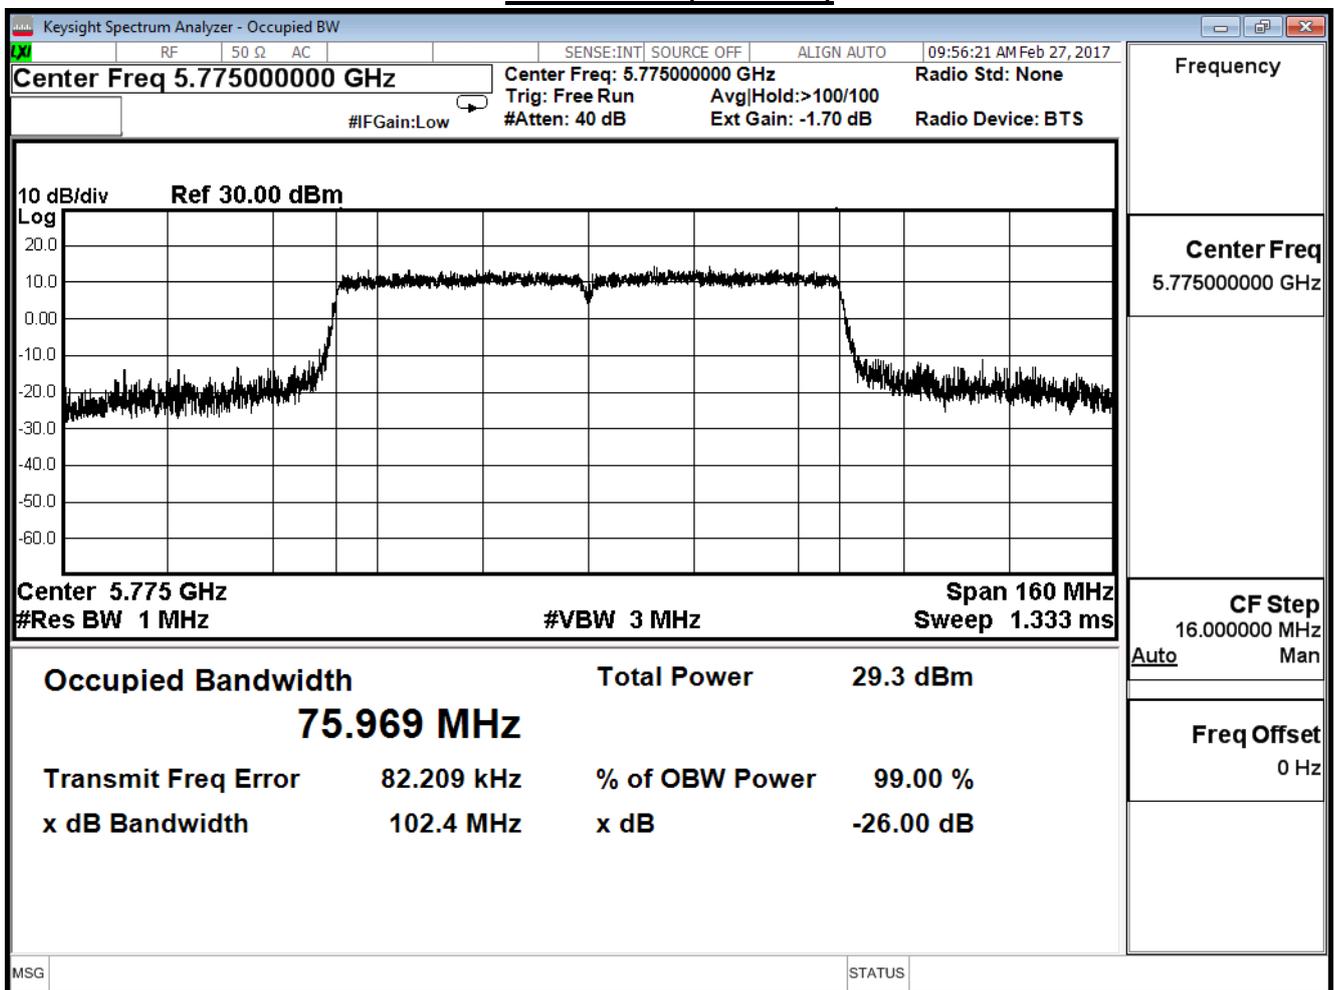

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | 99% & 26dB Bandwidth                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| IEEE 802.11ac_80M (ANT2) |                 |                     |             |
|--------------------------|-----------------|---------------------|-------------|
| Channel No.              | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 155                      | 5775            | 76.088              | --          |


**Channel 155 (5775MHz)**

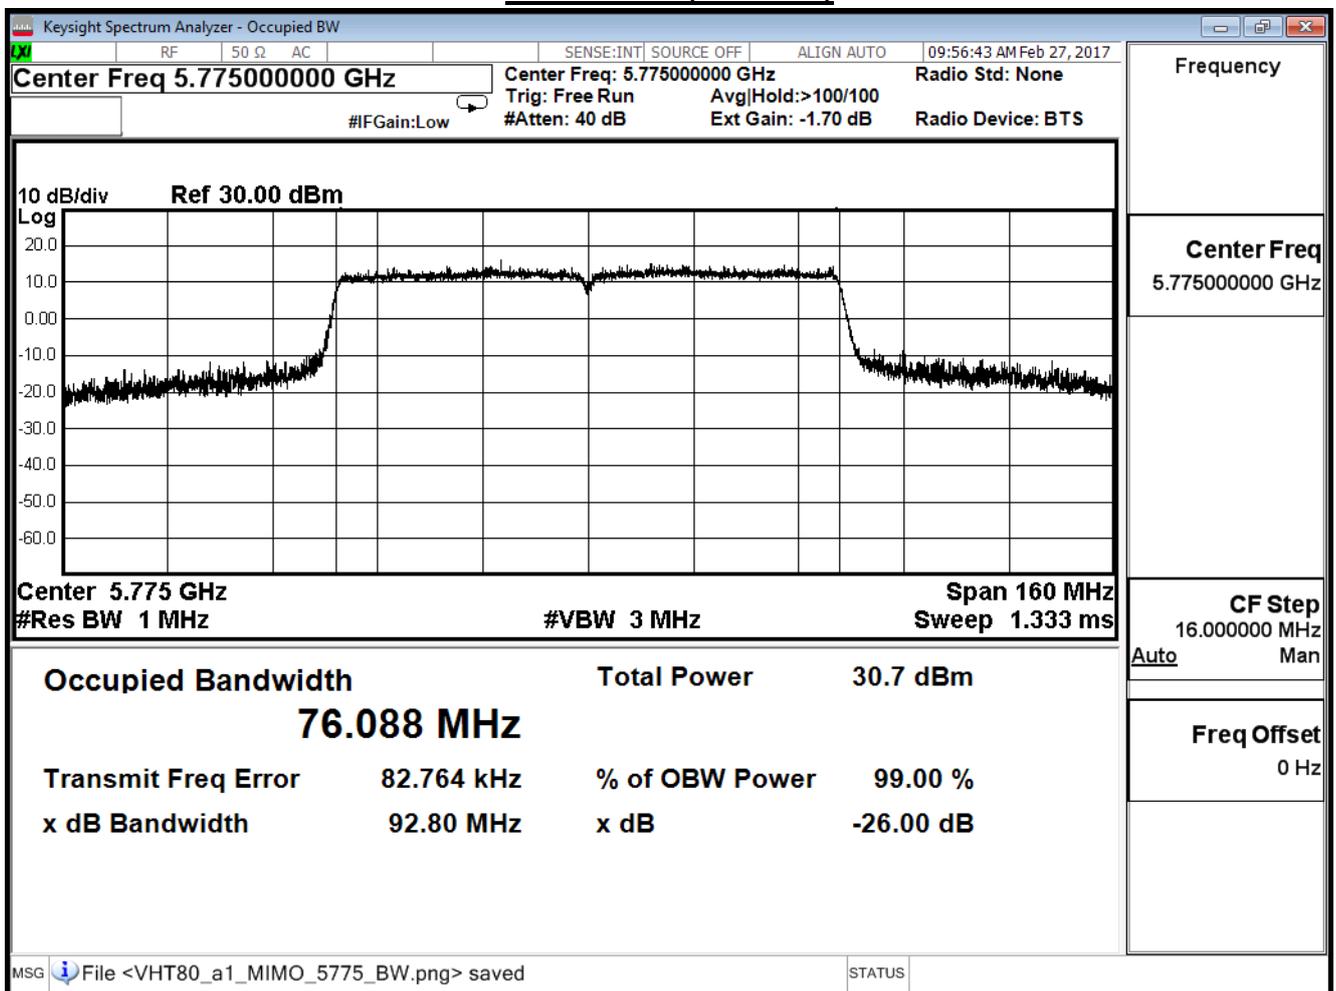

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                   |           |        |
| Test Item    | 99% & 26dB Bandwidth                                       |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_ MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26   | Test Site | SR10-H |

| IEEE 802.11ac_80M (ANT3) |                 |                     |             |
|--------------------------|-----------------|---------------------|-------------|
| Channel No.              | Frequency (MHz) | Measure Value (MHz) | Limit (MHz) |
| 155                      | 5775            | 76.008              | --          |

**Channel 155 (5775MHz)**

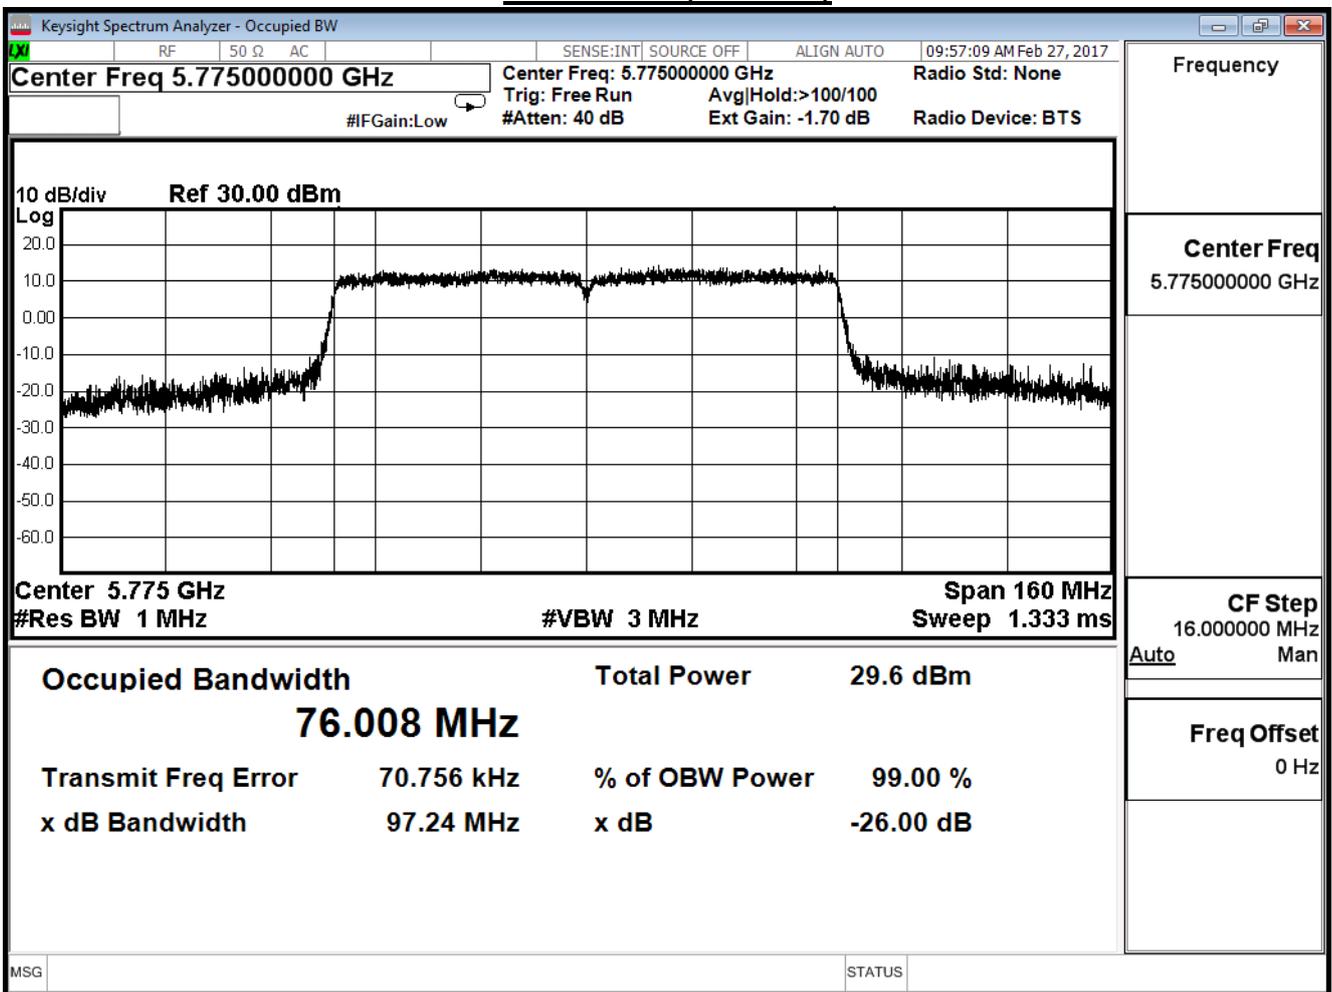


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | DTS Bandwidth                                       |           |        |
| Test Mode    | Mode 1: Tx ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11a(ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 16.340              | ≥0.5        | Pass   |
| 157         | 5785            | 16.370              | ≥0.5        | Pass   |
| 165         | 5825            | 16.360              | ≥0.5        | Pass   |


**Channel 149 (5745MHz)**

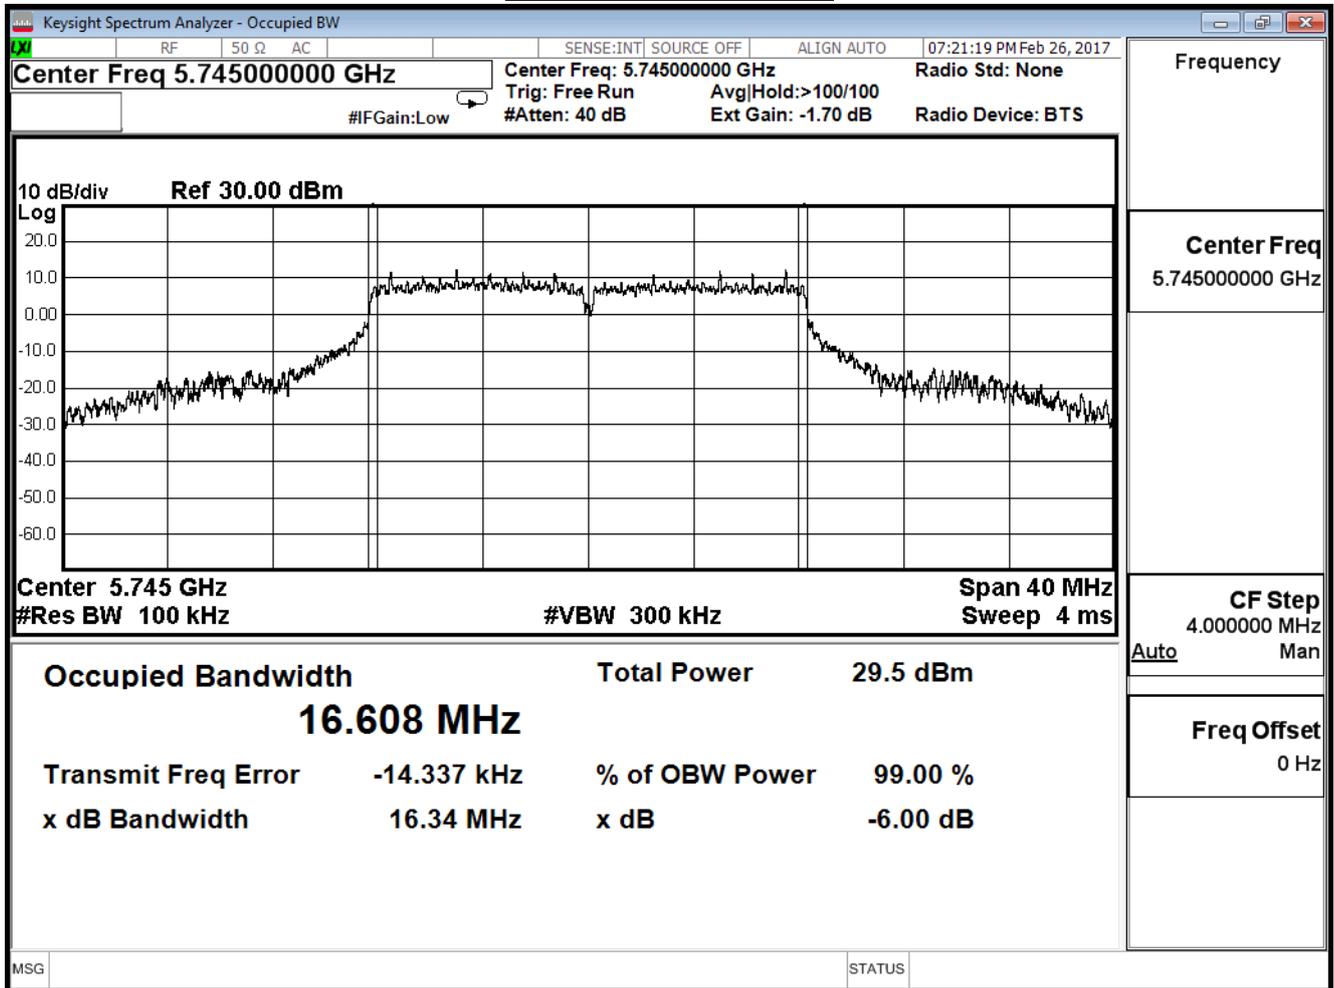

**Channel 157 (5785MHz)**

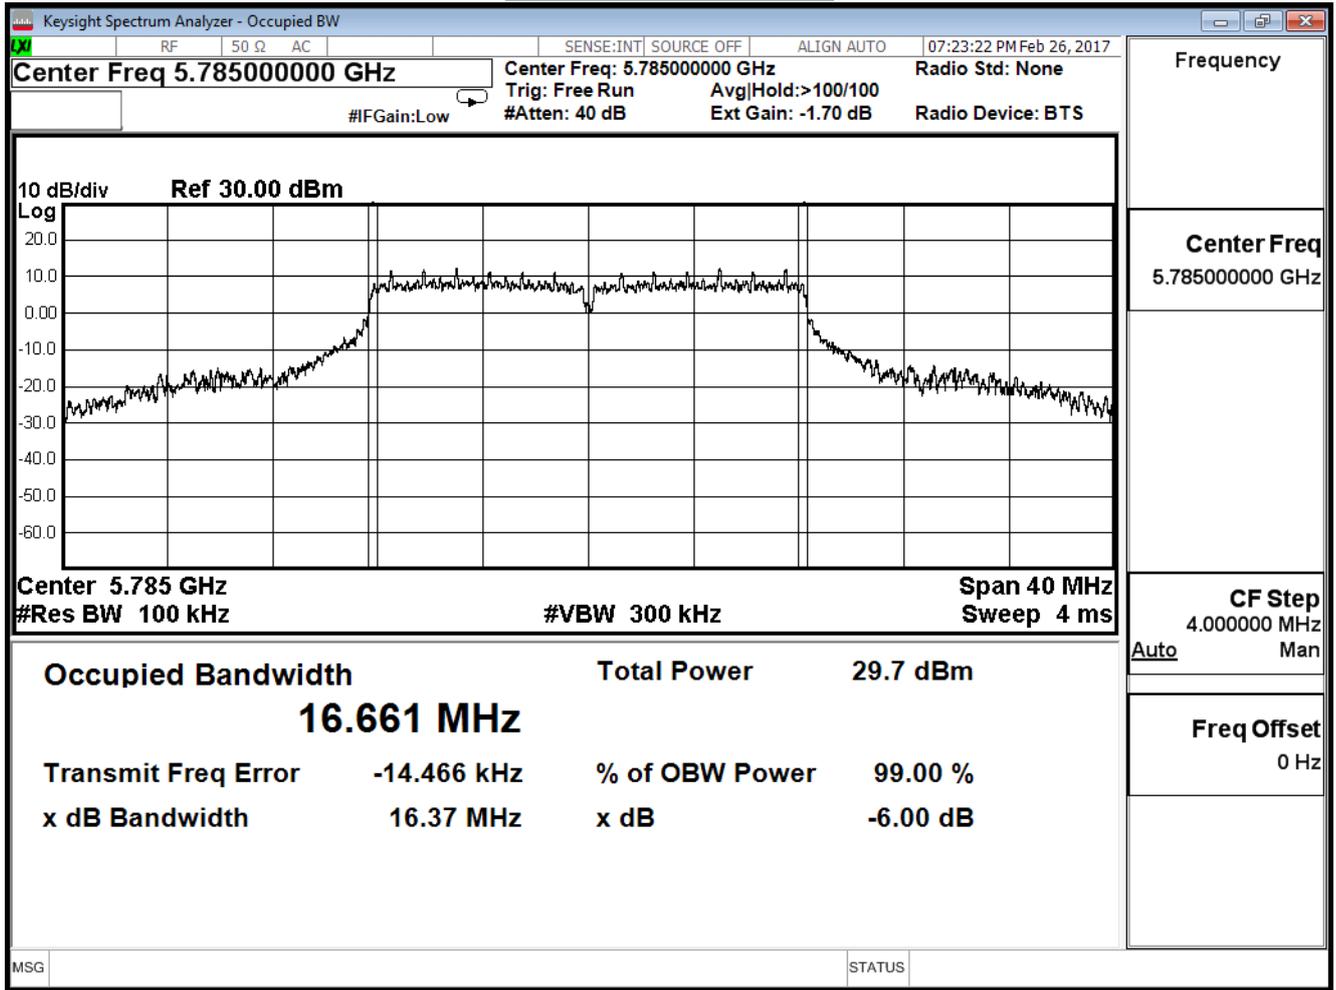

**Channel 165 (5825MHz)**

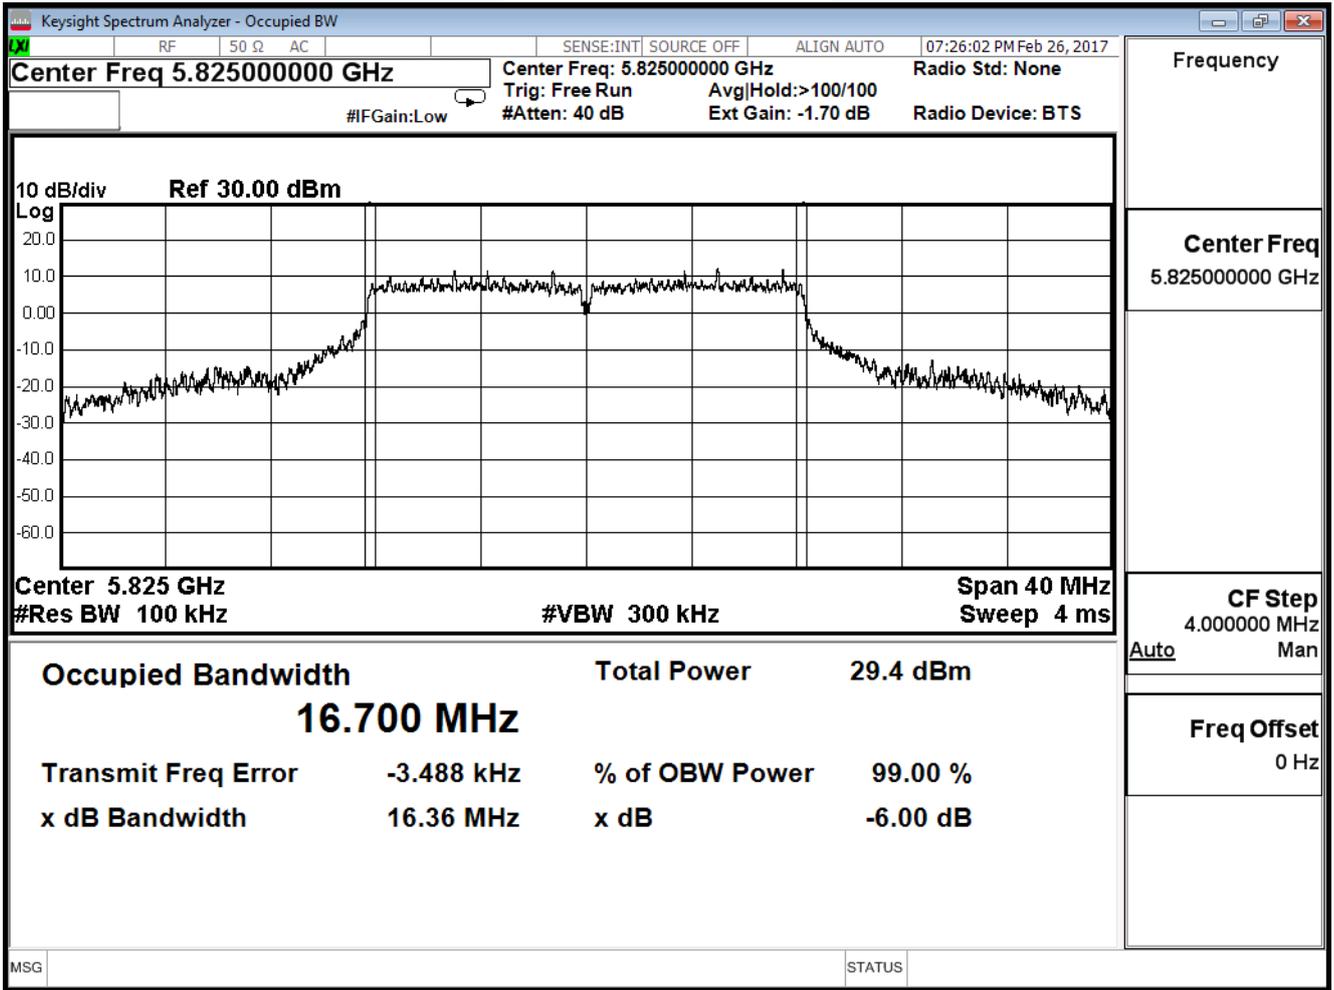


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | DTS Bandwidth                                       |           |        |
| Test Mode    | Mode 1: Tx ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11a(ANT 1)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 16.350              | ≥0.5        | Pass   |
| 157         | 5785            | 16.430              | ≥0.5        | Pass   |
| 165         | 5825            | 16.340              | ≥0.5        | Pass   |

**Channel 149 (5745MHz)**

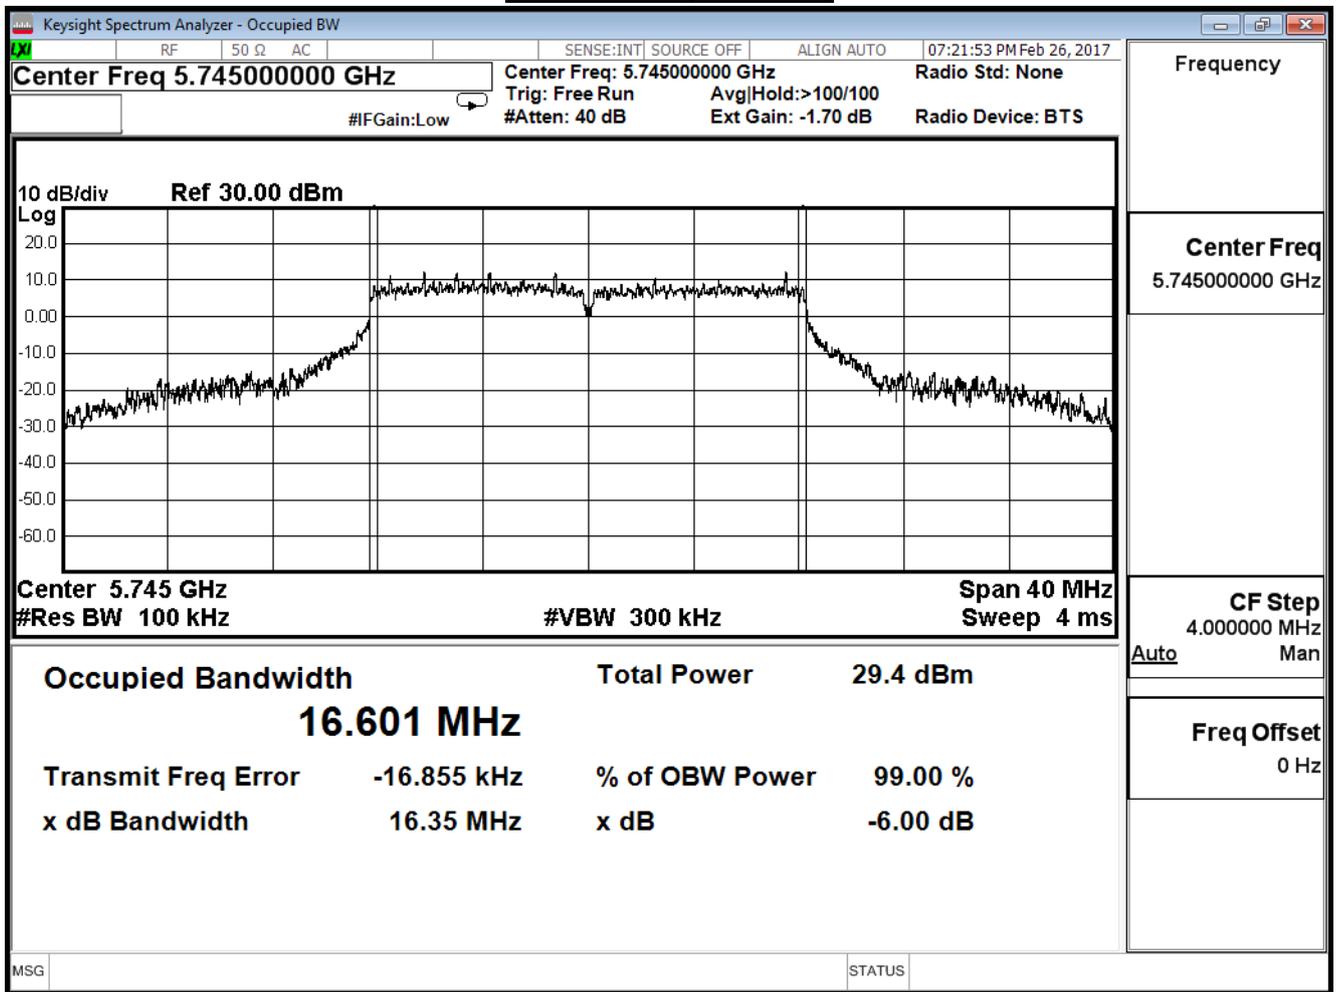

**Channel 157 (5785MHz)**

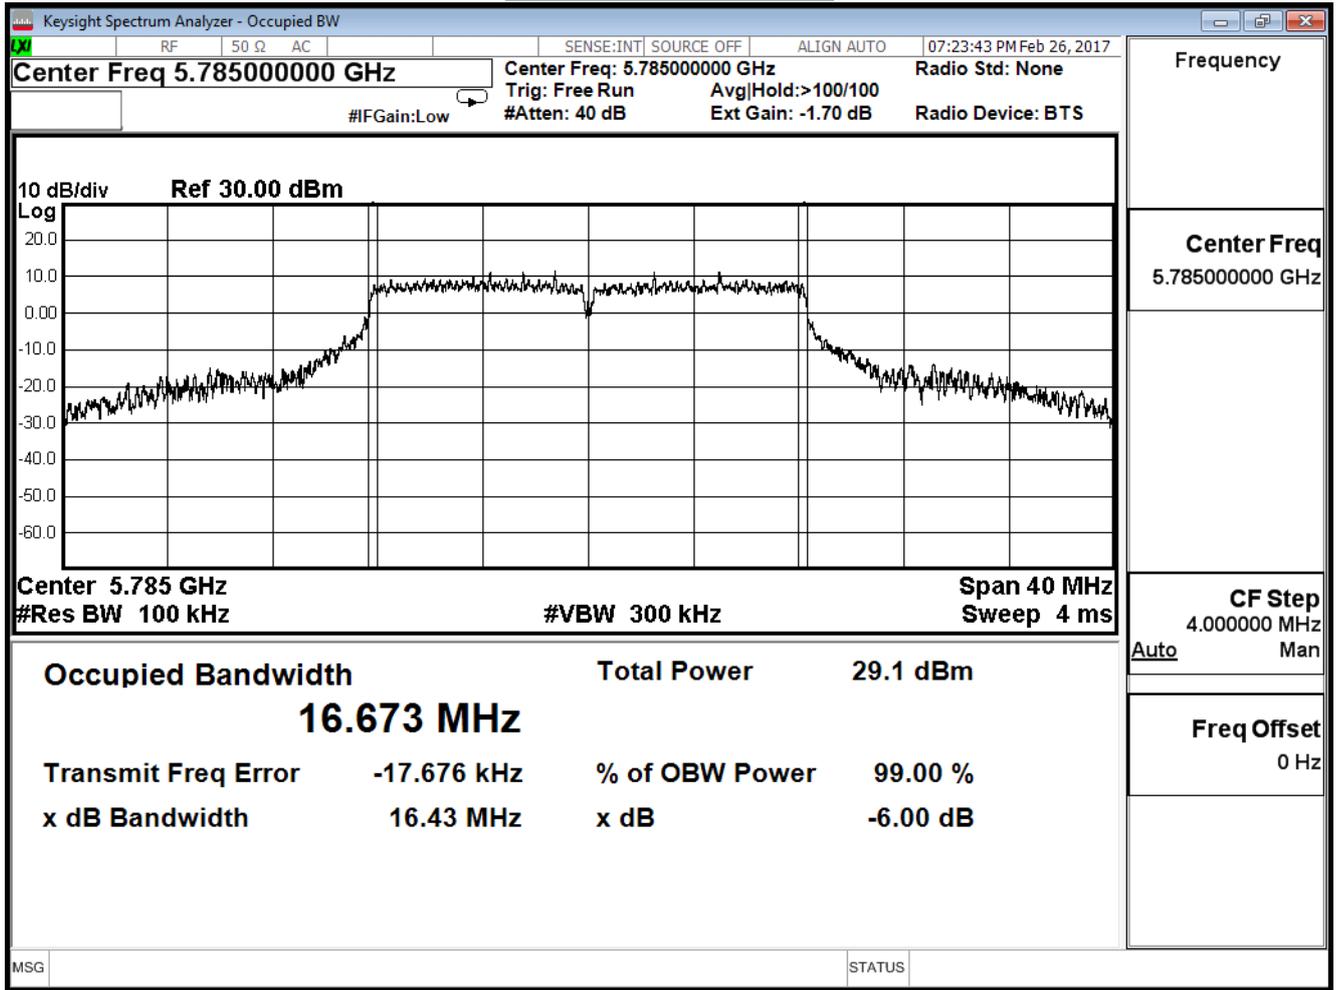




|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | DTS Bandwidth                                       |           |        |
| Test Mode    | Mode 1: Tx ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

802.11a(ANT 2)


| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 16.370              | ≥0.5        | Pass   |
| 157         | 5785            | 16.350              | ≥0.5        | Pass   |
| 165         | 5825            | 16.340              | ≥0.5        | Pass   |

**Channel 149 (5745MHz)**

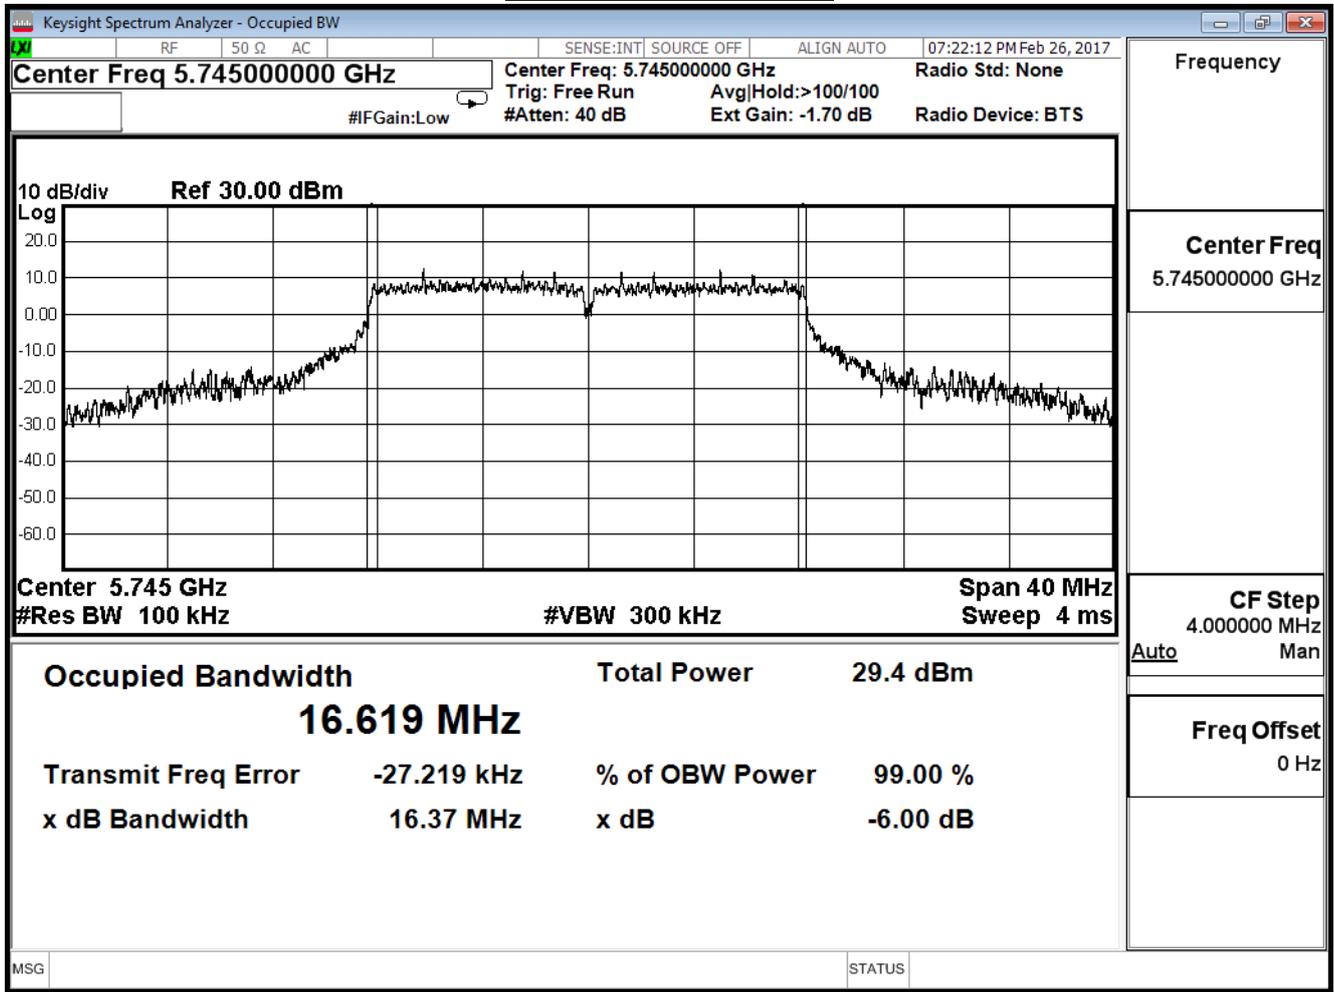



**Channel 165 (5825MHz)**

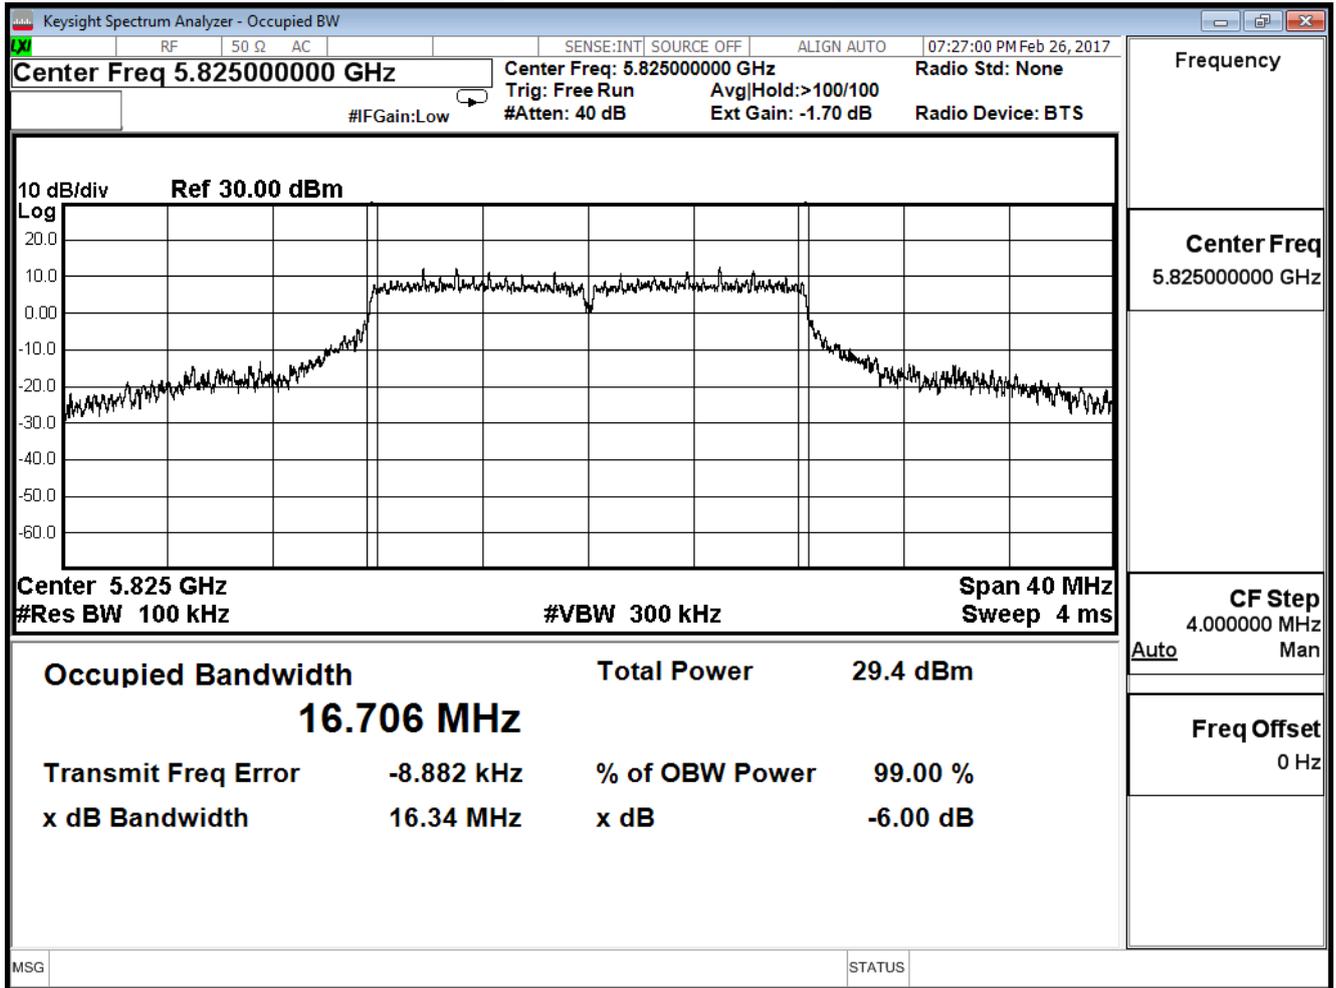


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | DTS Bandwidth                                       |           |        |
| Test Mode    | Mode 1: Tx ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11a(ANT 3)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 16.350              | ≥0.5        | Pass   |
| 157         | 5785            | 16.340              | ≥0.5        | Pass   |
| 165         | 5825            | 16.330              | ≥0.5        | Pass   |


**Channel 149 (5745MHz)**

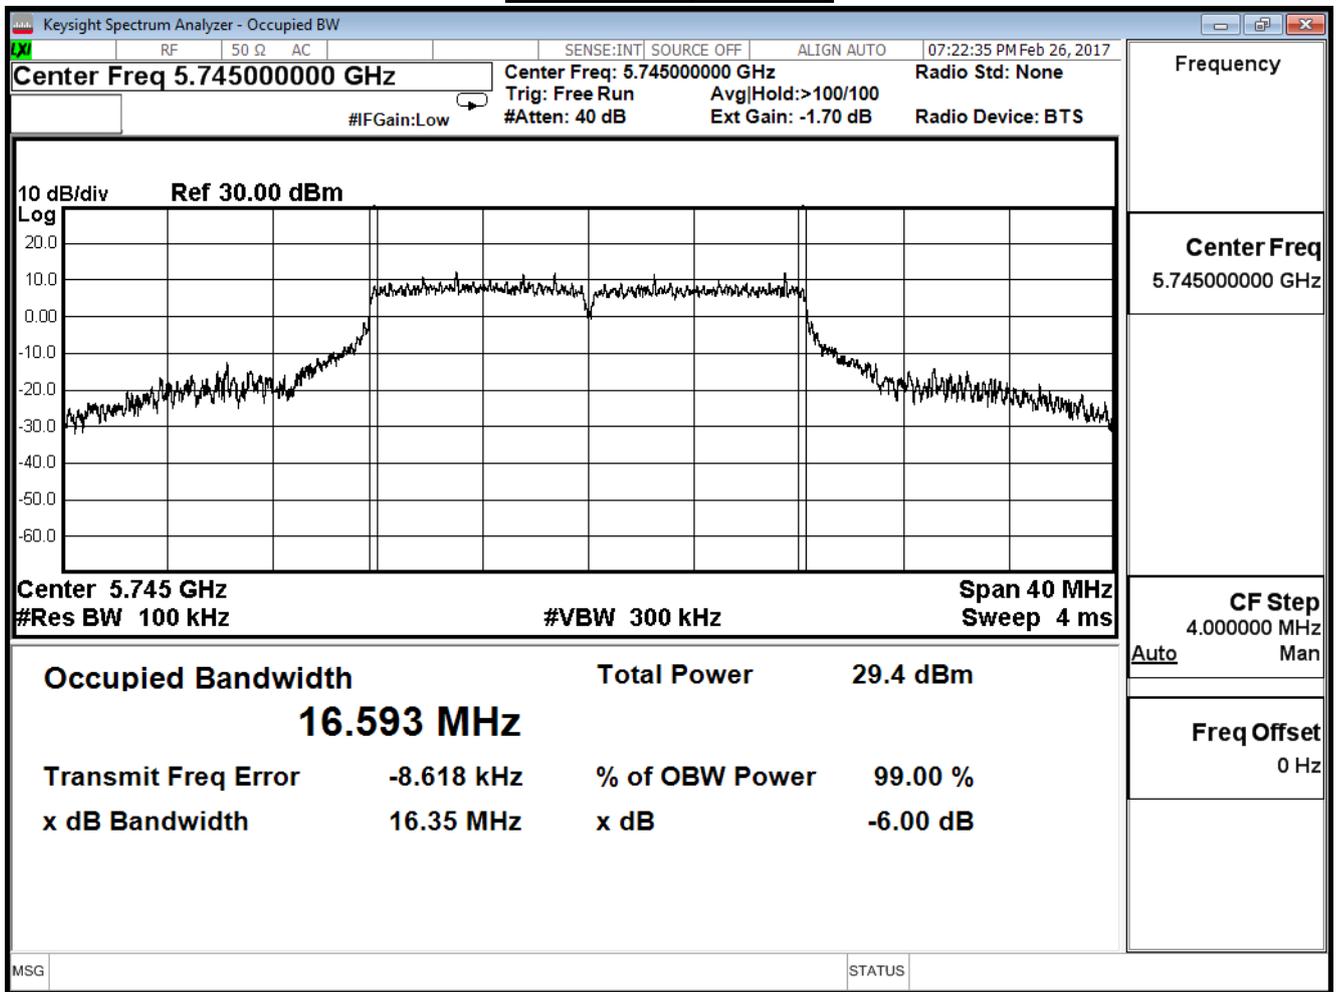

**Channel 157 (5785MHz)**

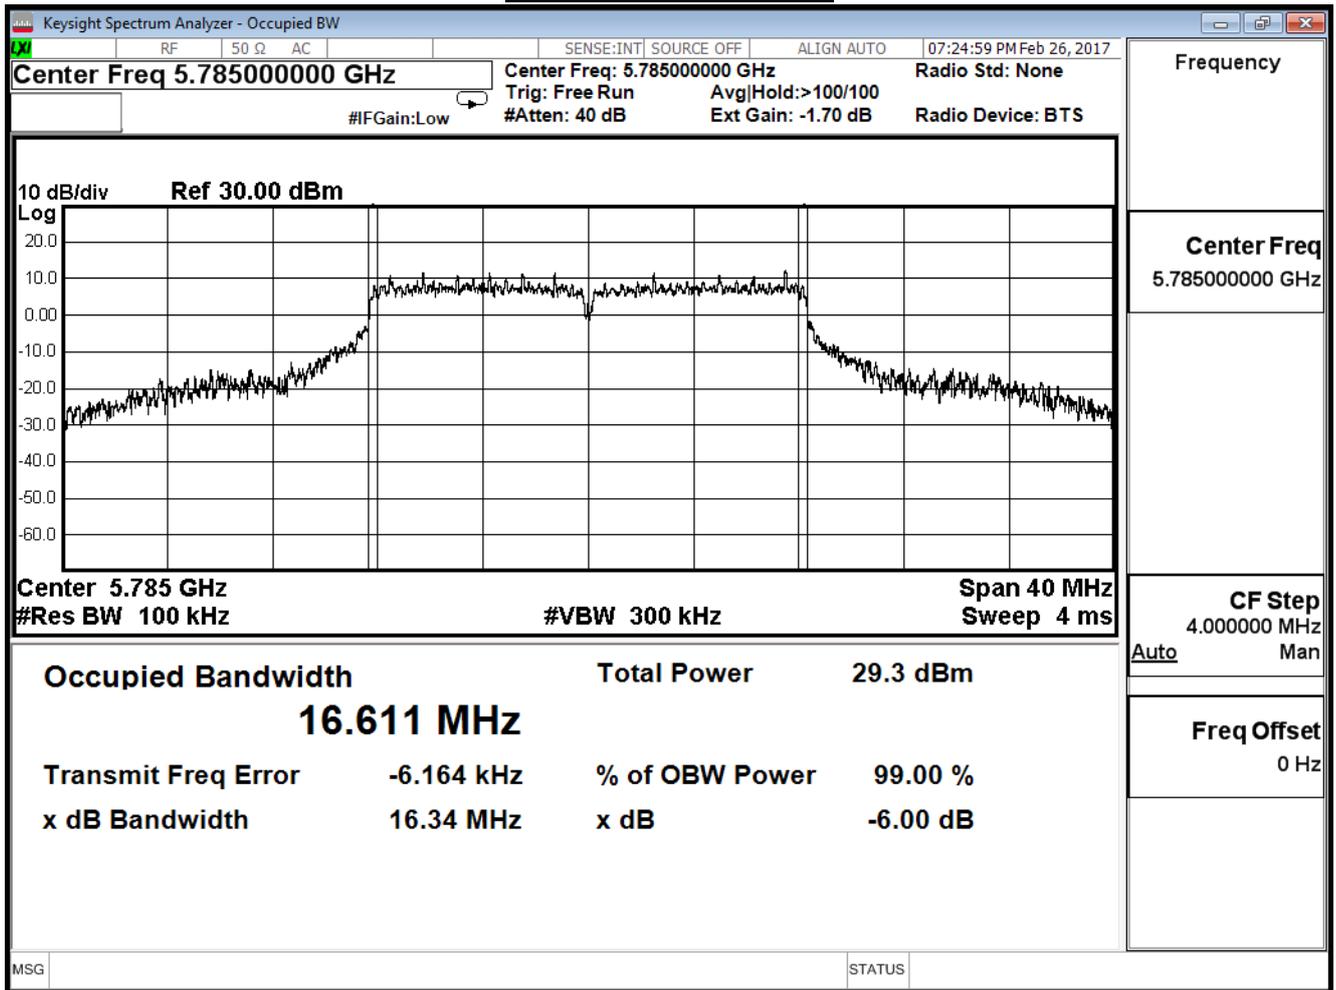


**Channel 165 (5825MHz)**

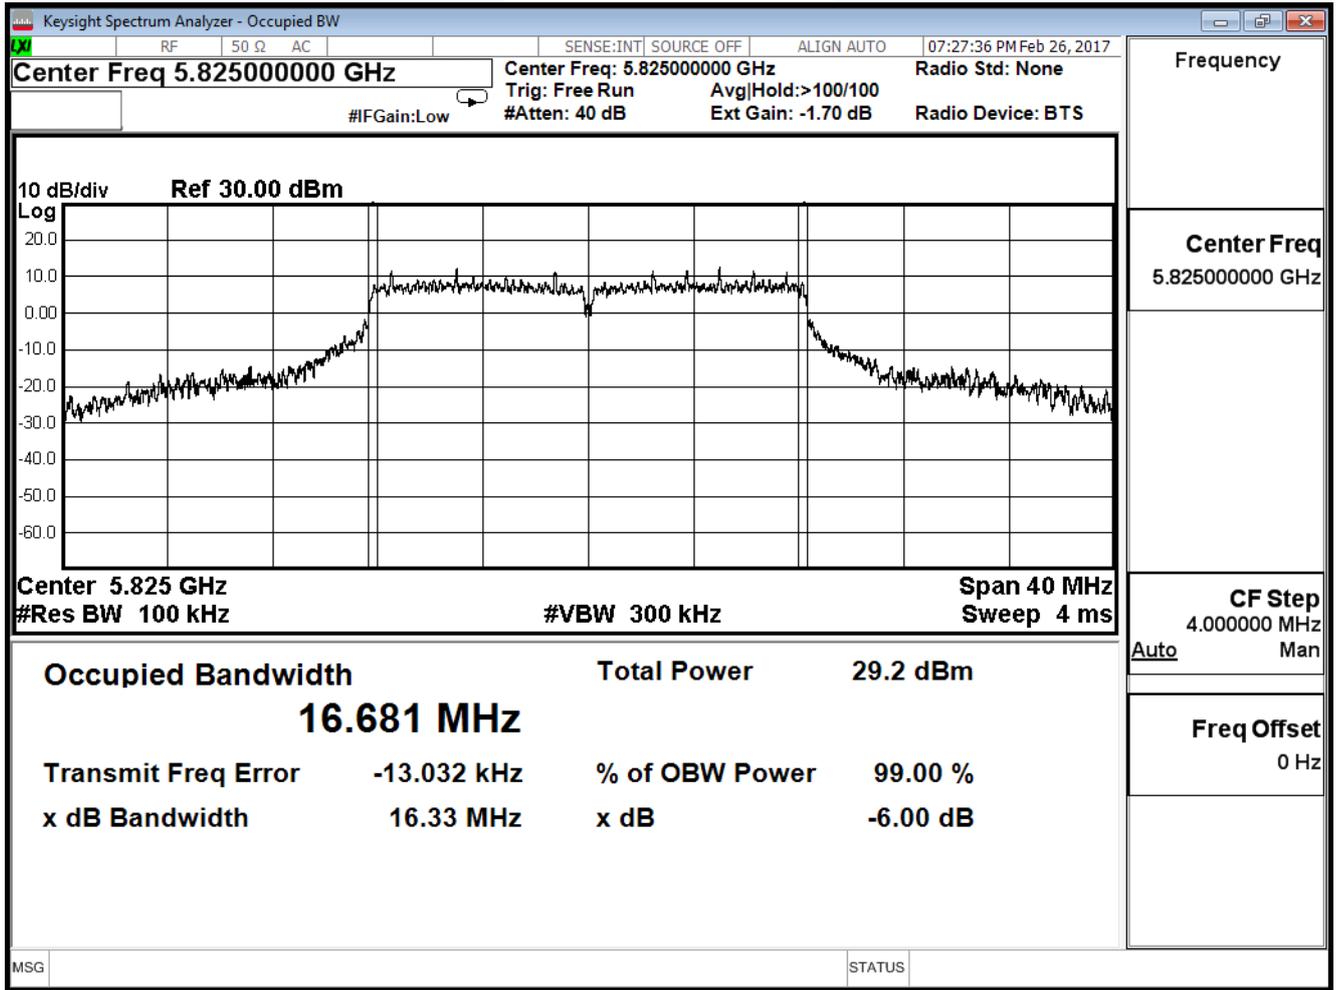


|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                   |           |        |
| Test Item    | DTS Bandwidth  |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_ MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26   | Test Site | SR10-H |

| 802.11n_20M(ANT 0) |                 |                     |             |        |
|--------------------|-----------------|---------------------|-------------|--------|
| Channel No.        | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 149                | 5745            | 17.620              | ≥0.5        | Pass   |
| 157                | 5785            | 17.590              | ≥0.5        | Pass   |
| 165                | 5825            | 17.600              | ≥0.5        | Pass   |


**Channel 149 (5745MHz)**

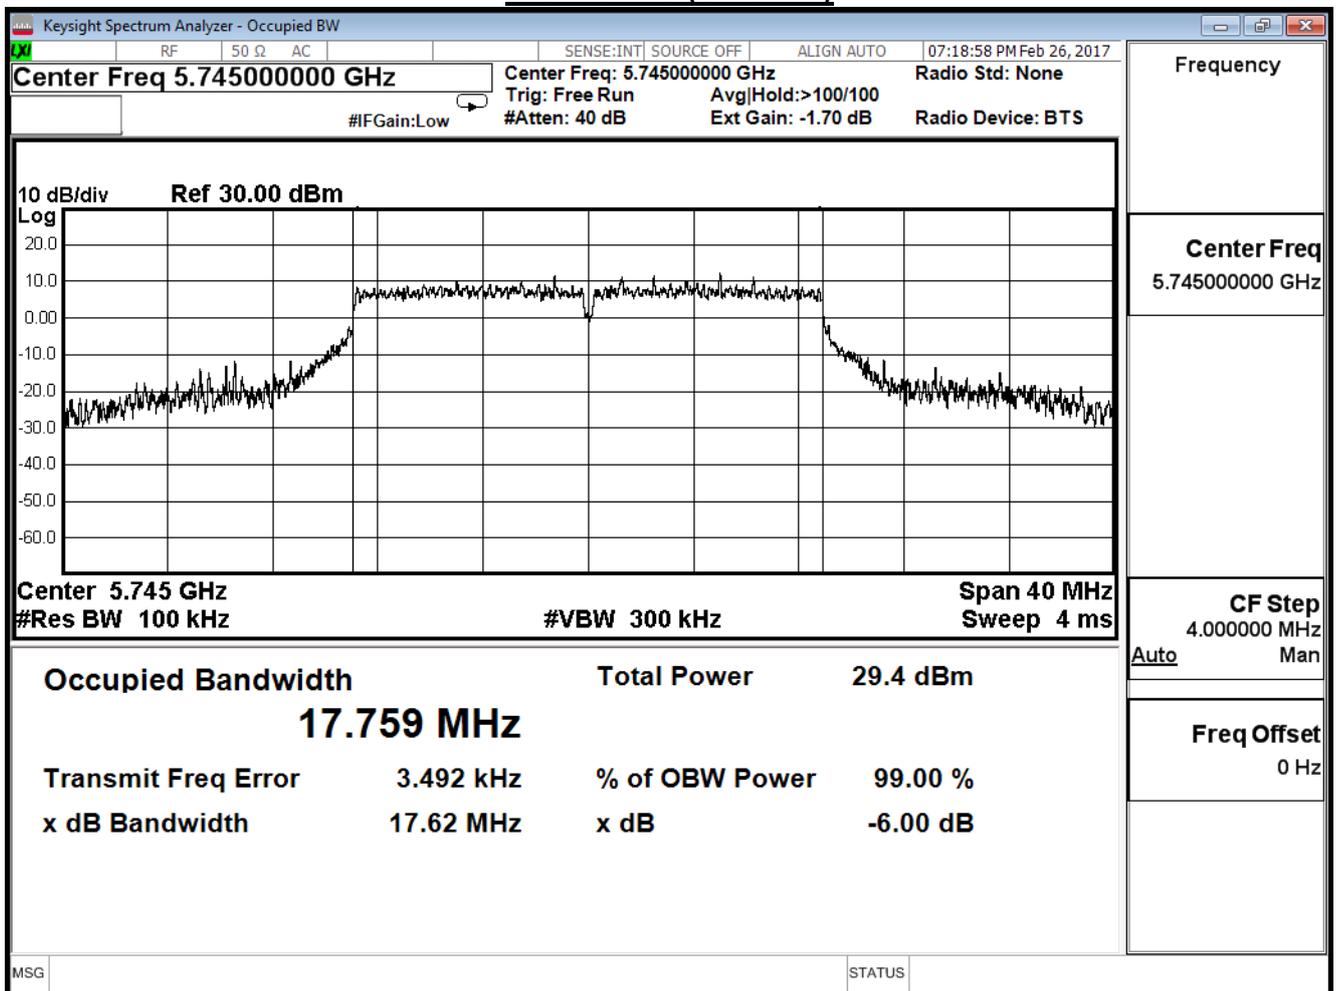

**Channel 157 (5785MHz)**

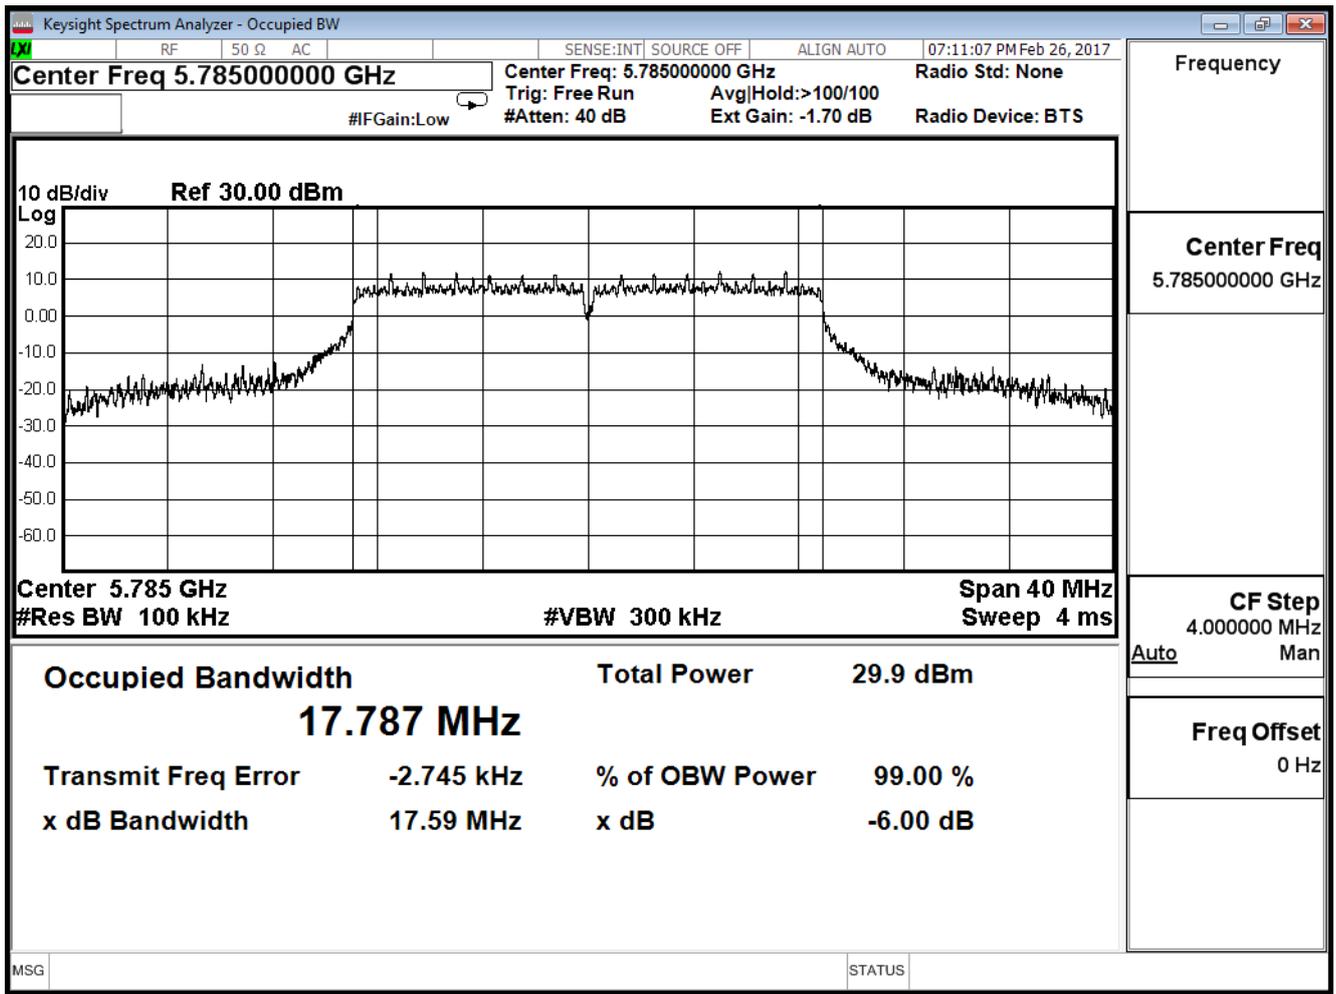


**Channel 165 (5825MHz)**

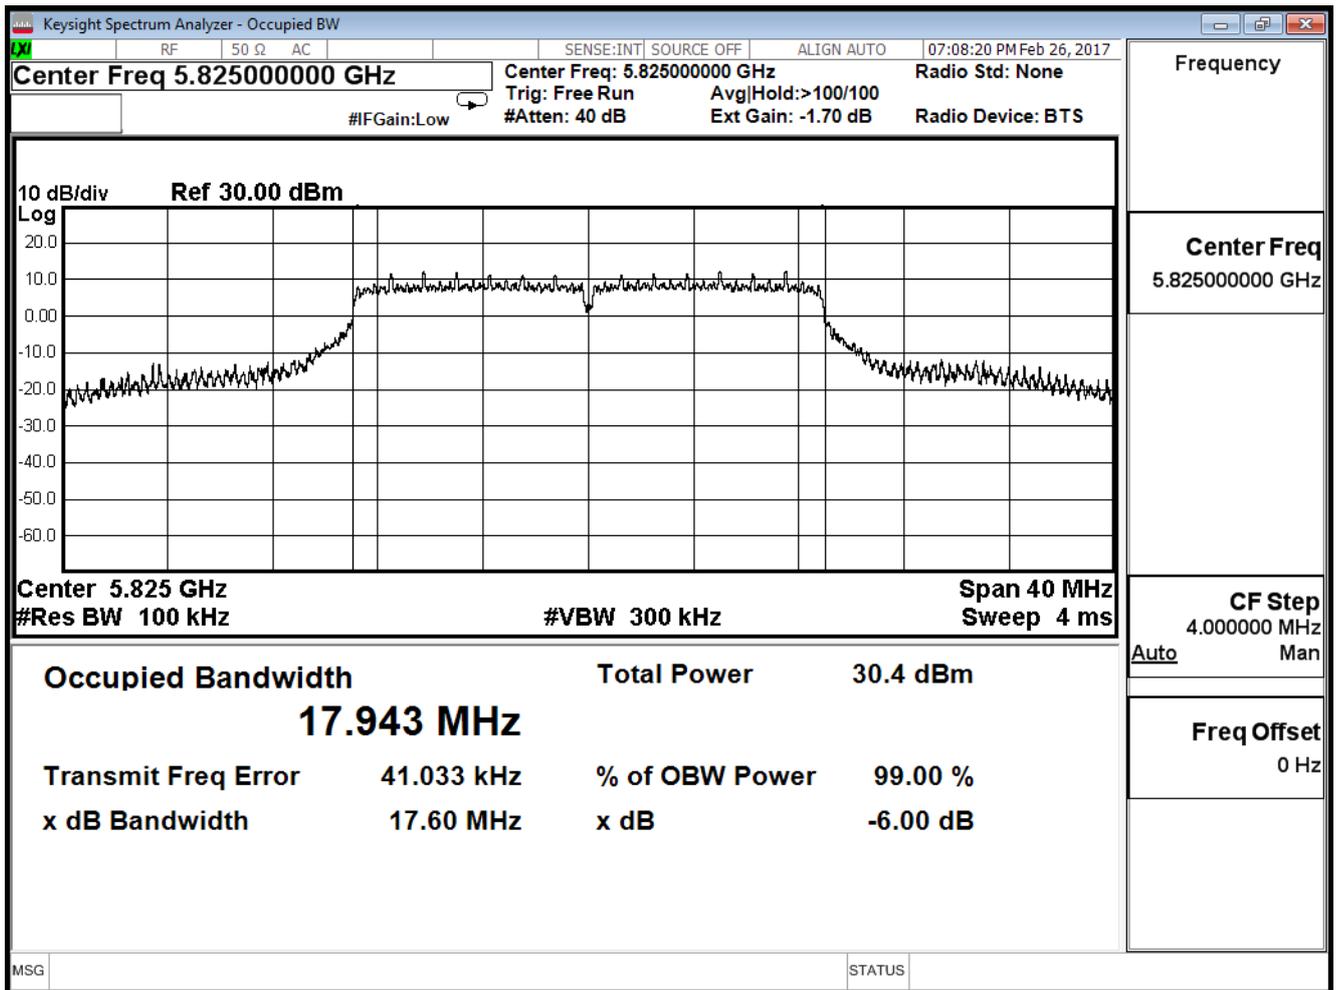


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| 802.11n_20M(ANT 1) |                 |                     |             |        |
|--------------------|-----------------|---------------------|-------------|--------|
| Channel No.        | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 149                | 5745            | 17.590              | ≥0.5        | Pass   |
| 157                | 5785            | 17.600              | ≥0.5        | Pass   |
| 165                | 5825            | 17.590              | ≥0.5        | Pass   |

**Channel 149 (5745MHz)**

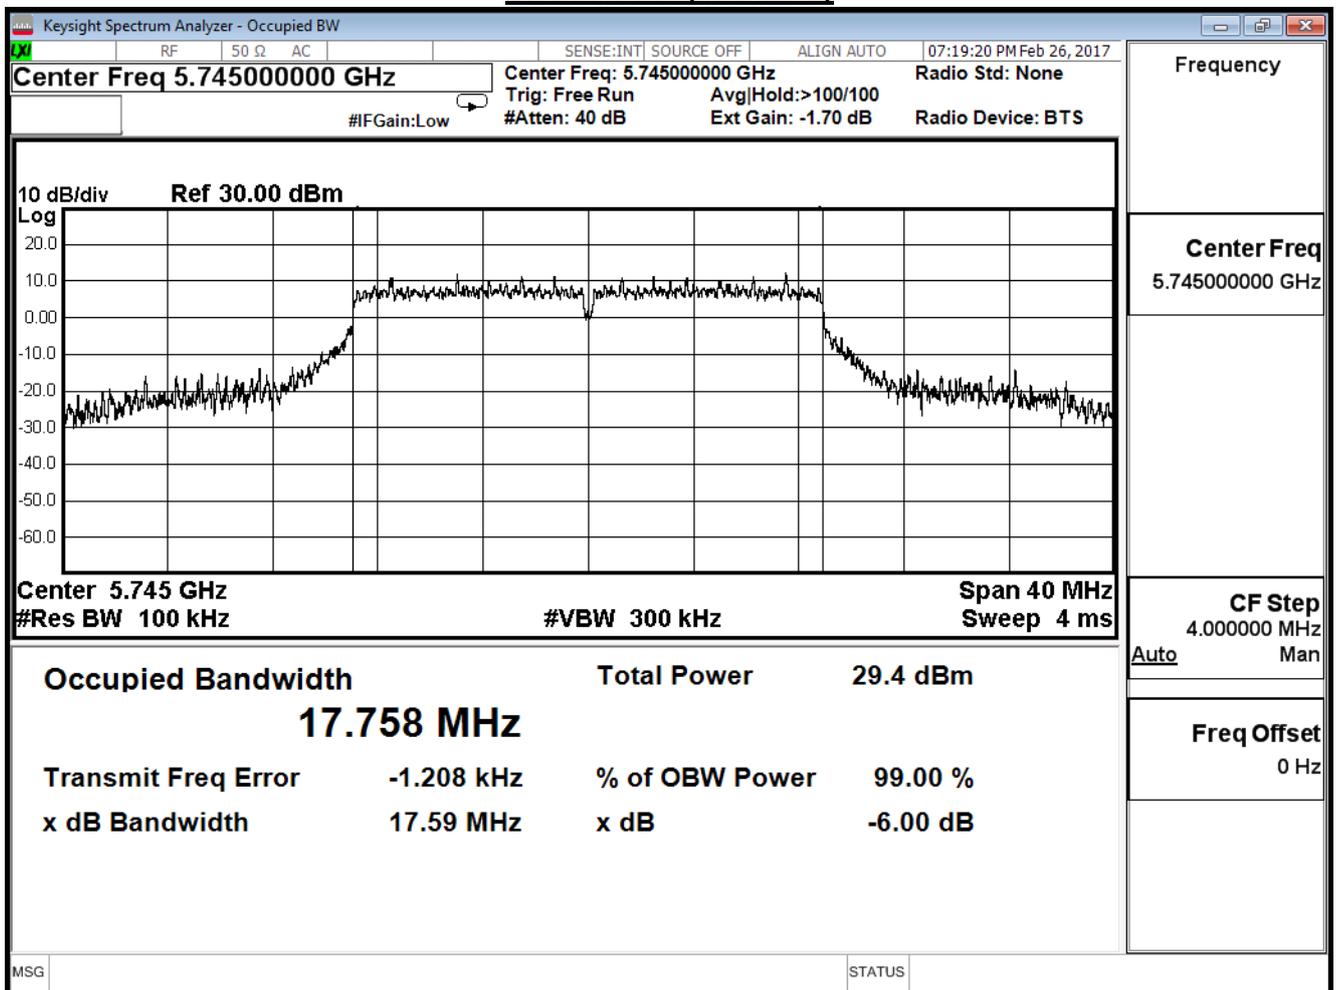

**Channel 157 (5785MHz)**

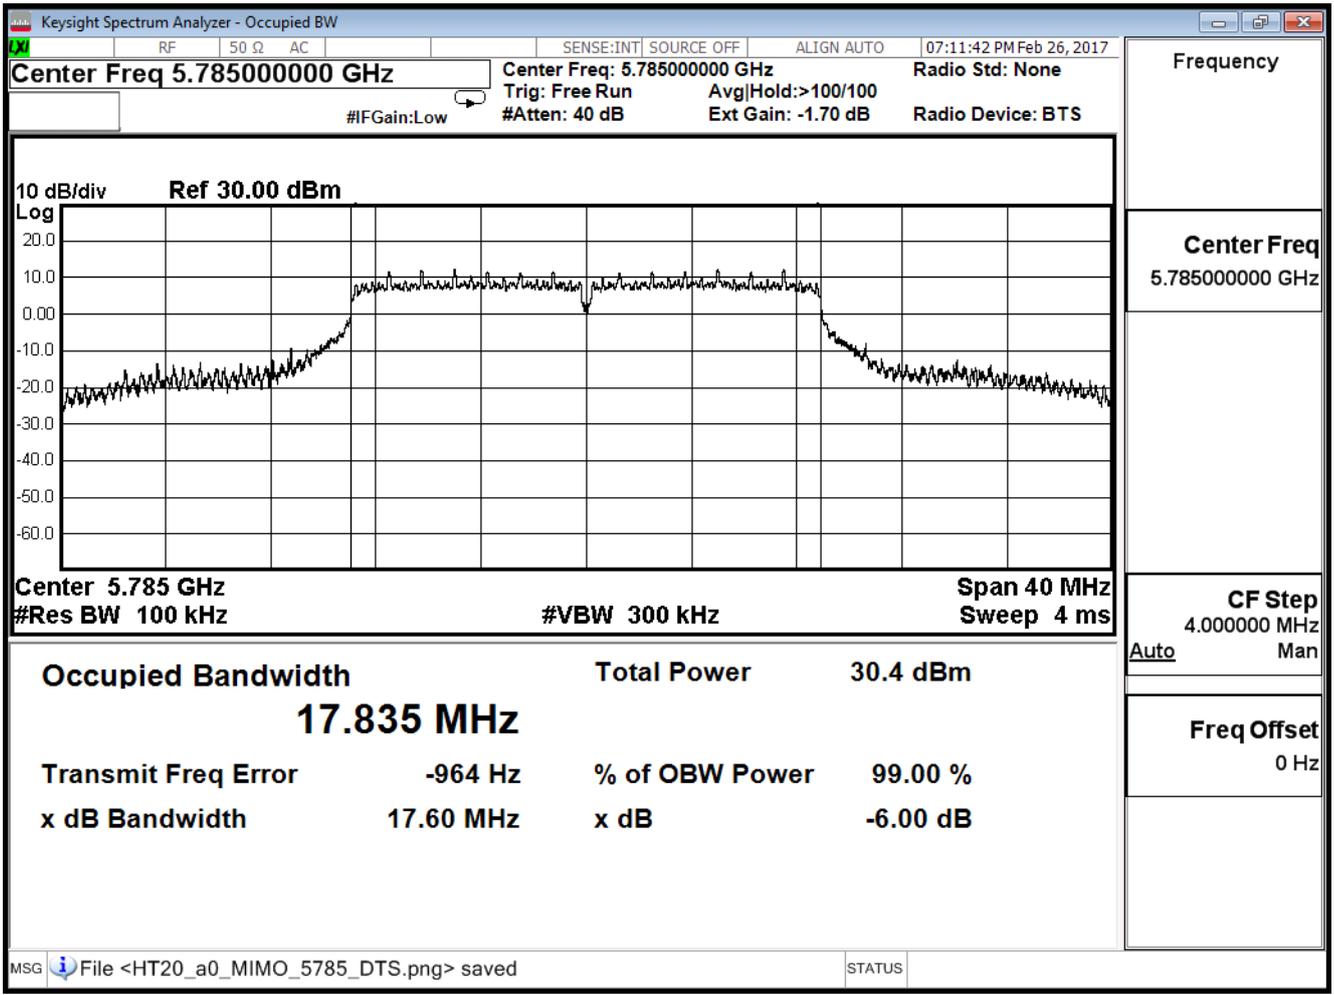




|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11n\_20M(ANT 2)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 17.590              | ≥0.5        | Pass   |
| 157         | 5785            | 17.580              | ≥0.5        | Pass   |
| 165         | 5825            | 17.570              | ≥0.5        | Pass   |


**Channel 149 (5745MHz)**

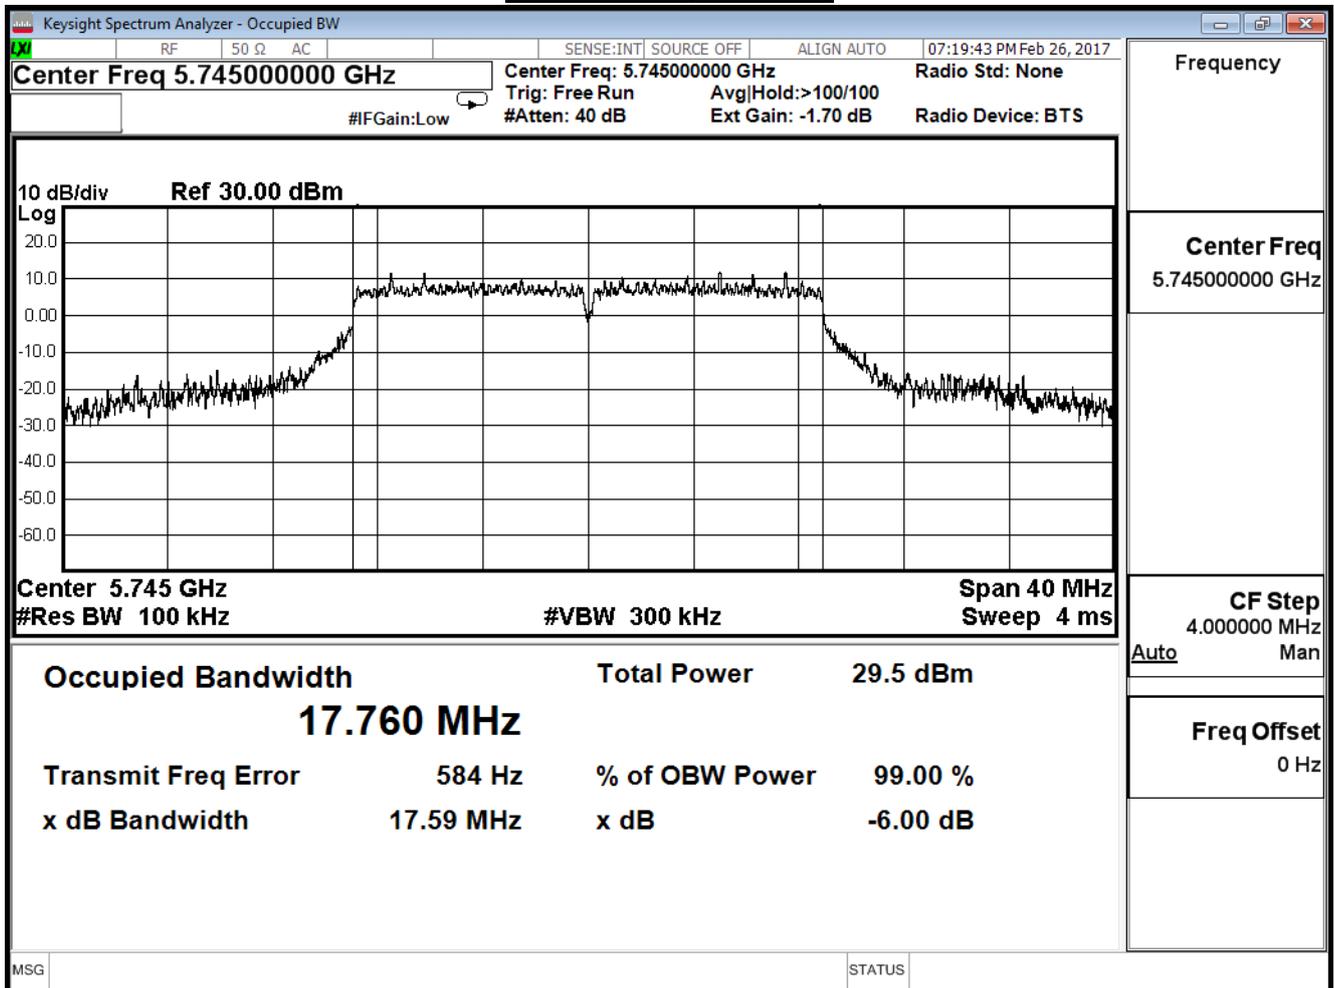

**Channel 157 (5785MHz)**

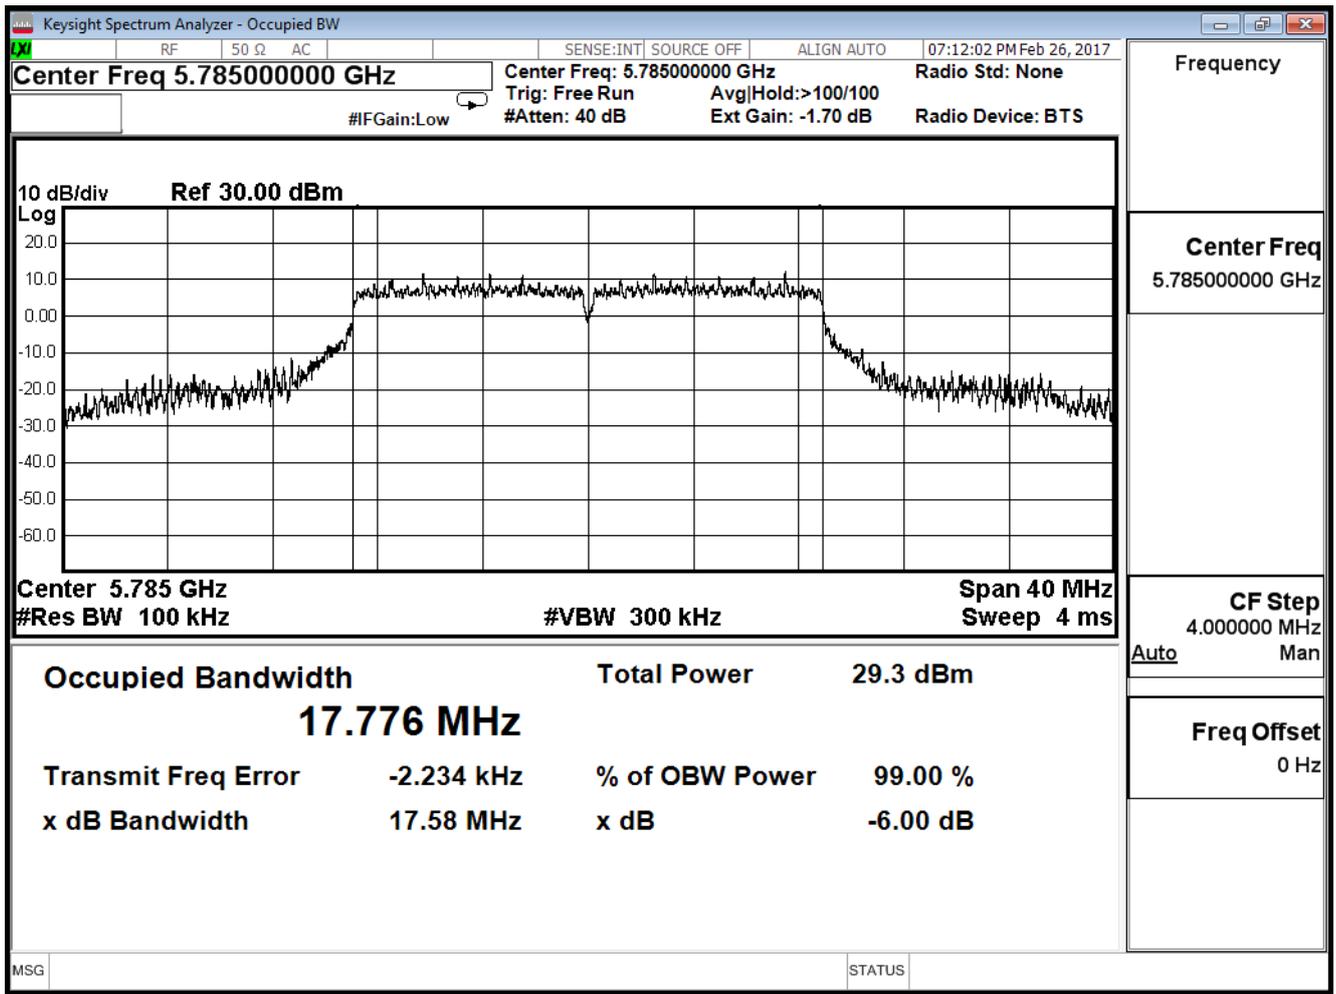

**Channel 165 (5825MHz)**

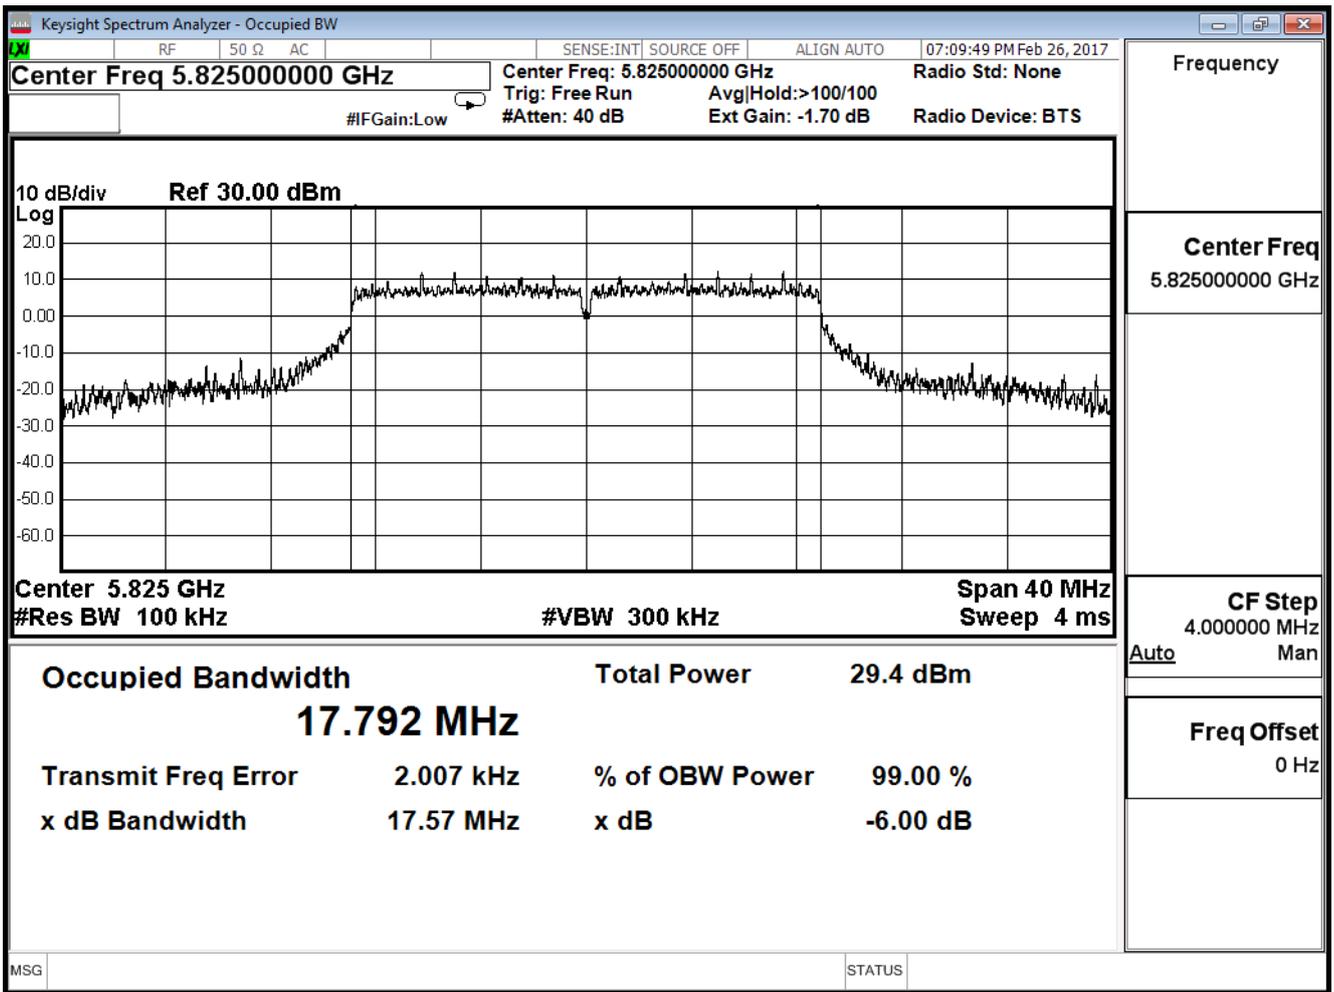


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11n\_20M(ANT 3)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 149         | 5745            | 17.600              | ≥0.5        | Pass   |
| 157         | 5785            | 17.590              | ≥0.5        | Pass   |
| 165         | 5825            | 17.610              | ≥0.5        | Pass   |


**Channel 149 (5745MHz)**

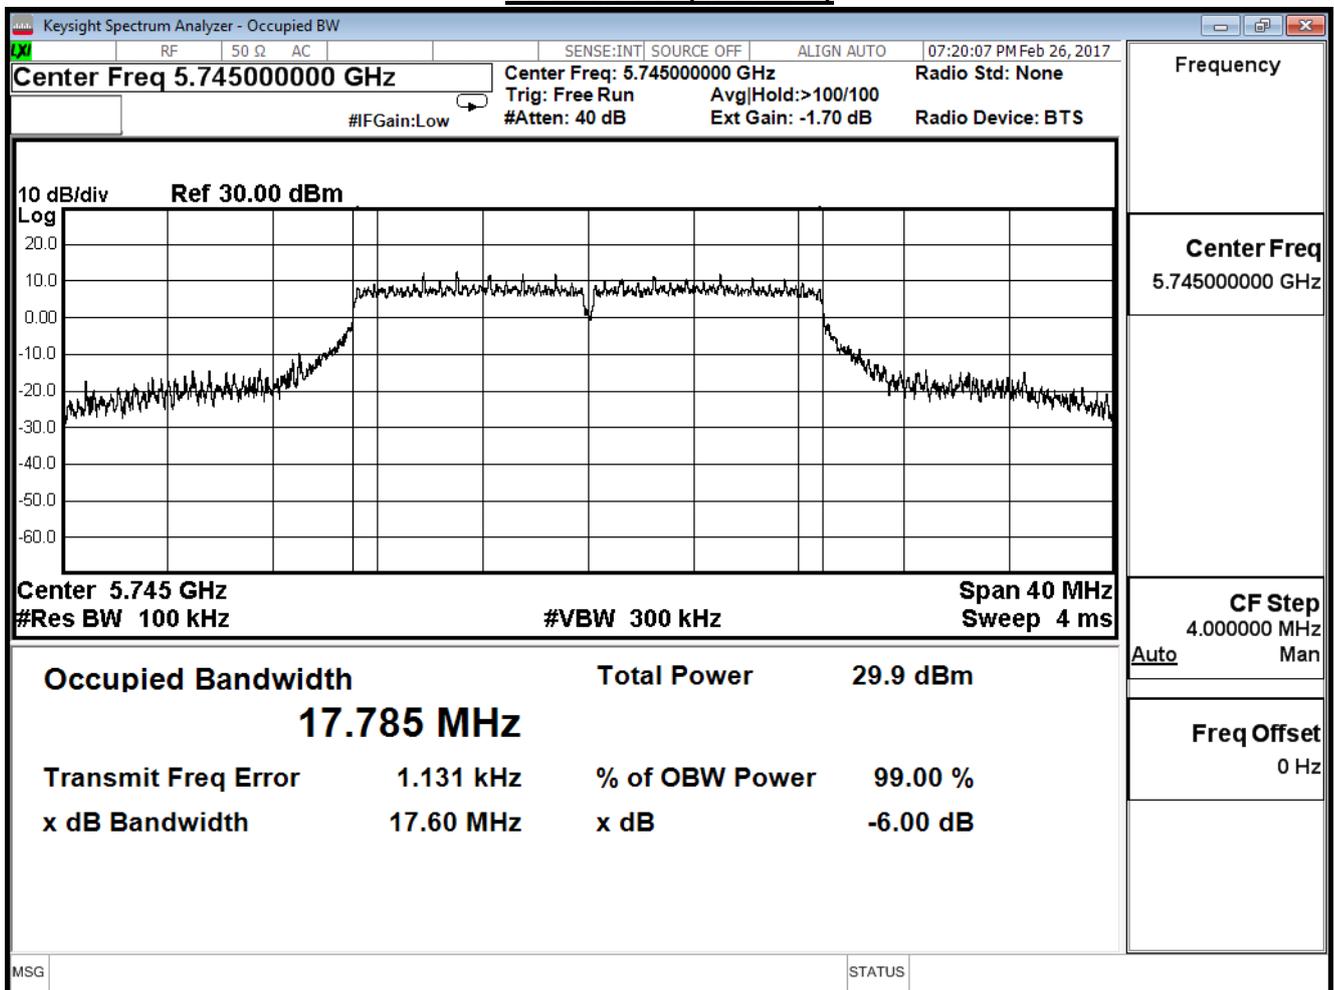

**Channel 157 (5785MHz)**

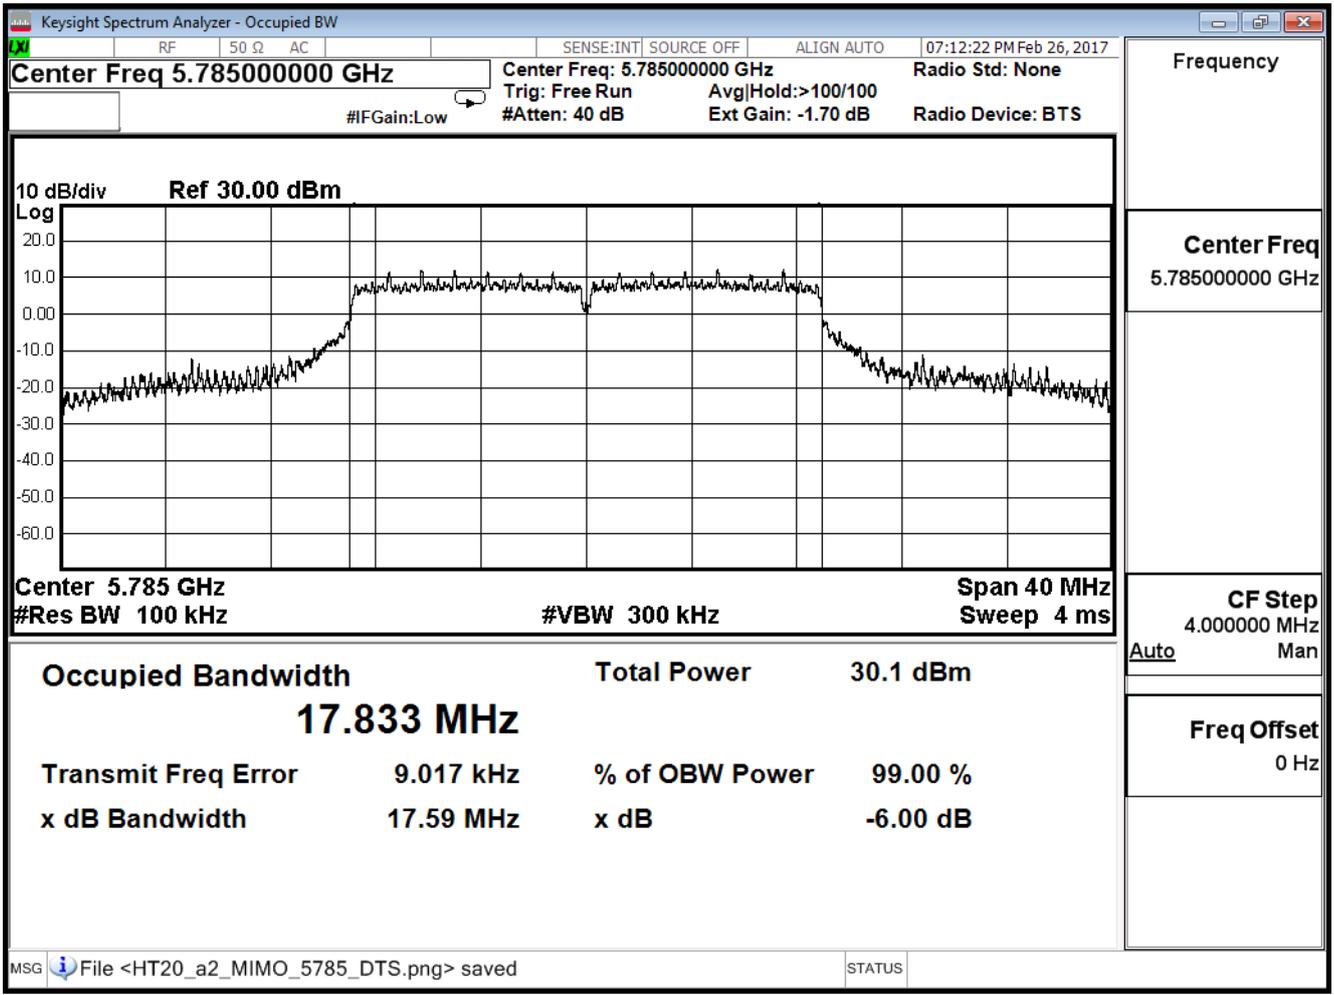

**Channel 165 (5825MHz)**

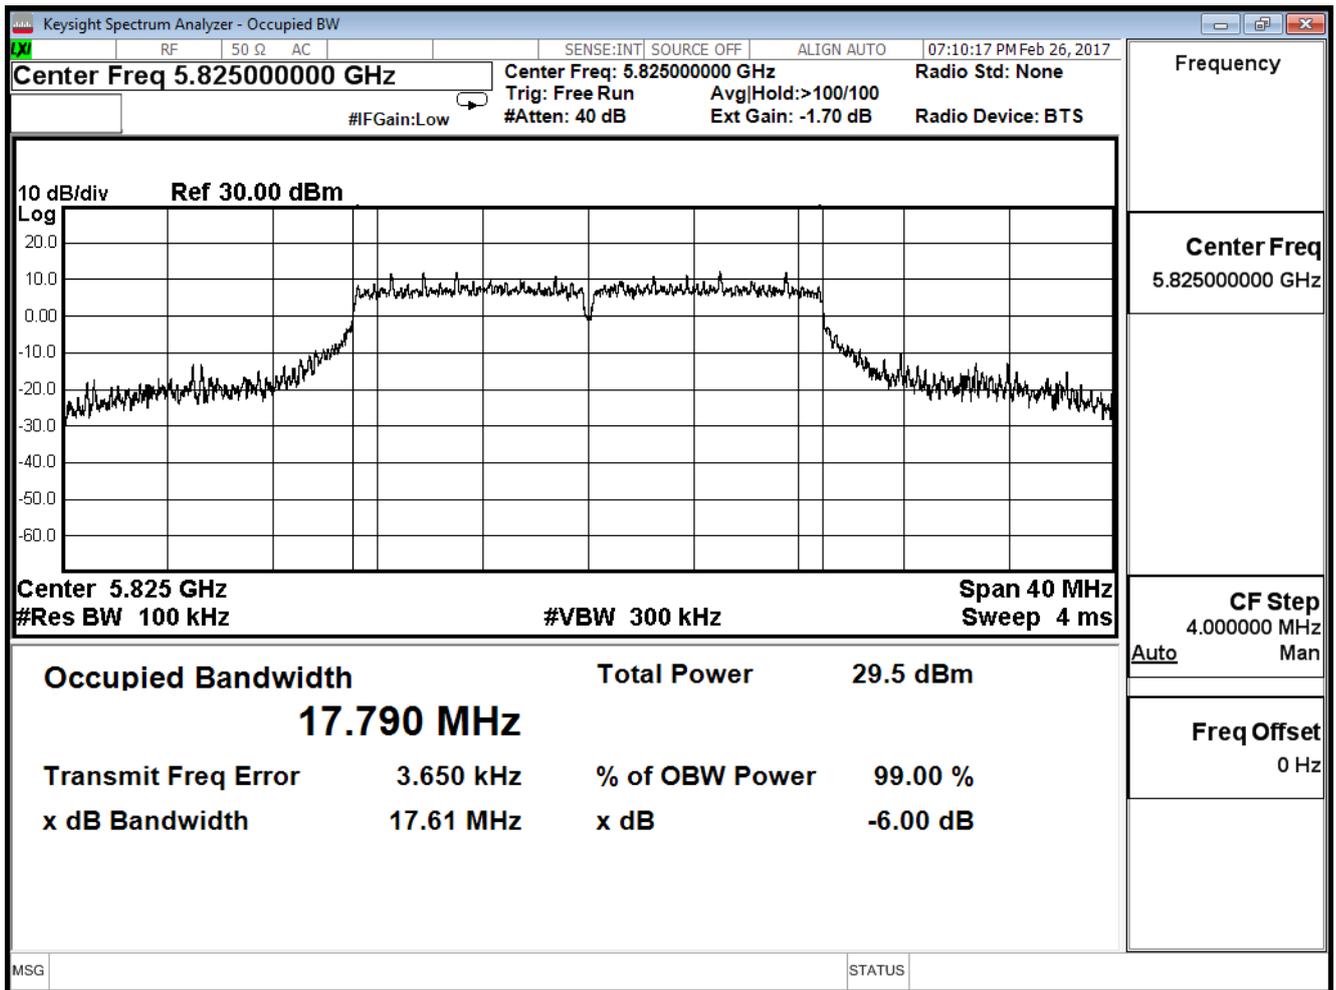


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11n\_40M(ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 151         | 5755            | 36.340              | ≥0.5        | Pass   |
| 159         | 5795            | 36.340              | ≥0.5        | Pass   |

**Channel 151 (5755MHz)**

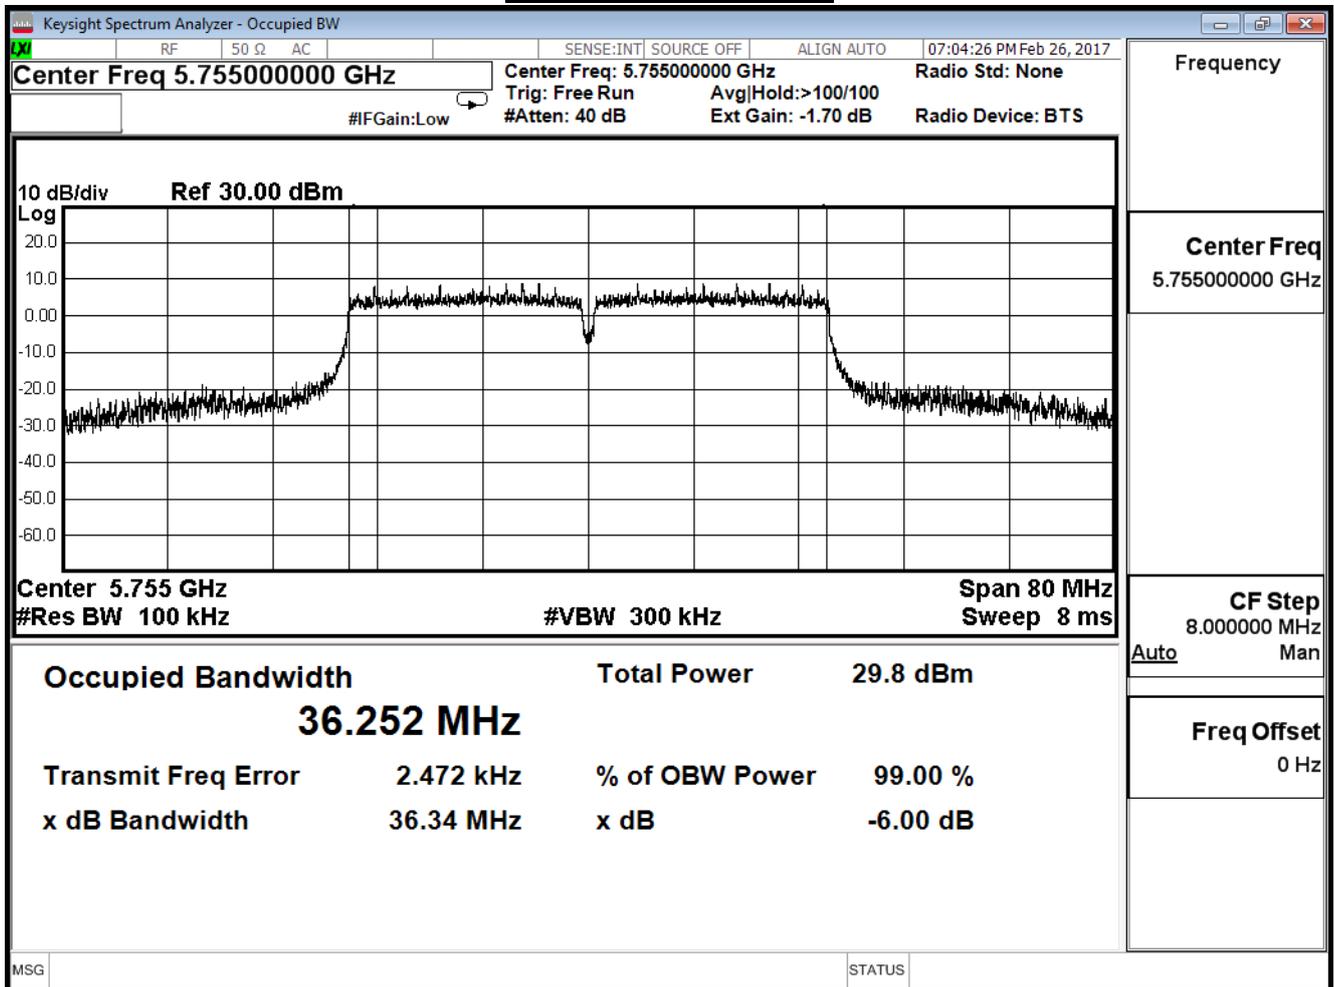


**Channel 159 (5795MHz)**

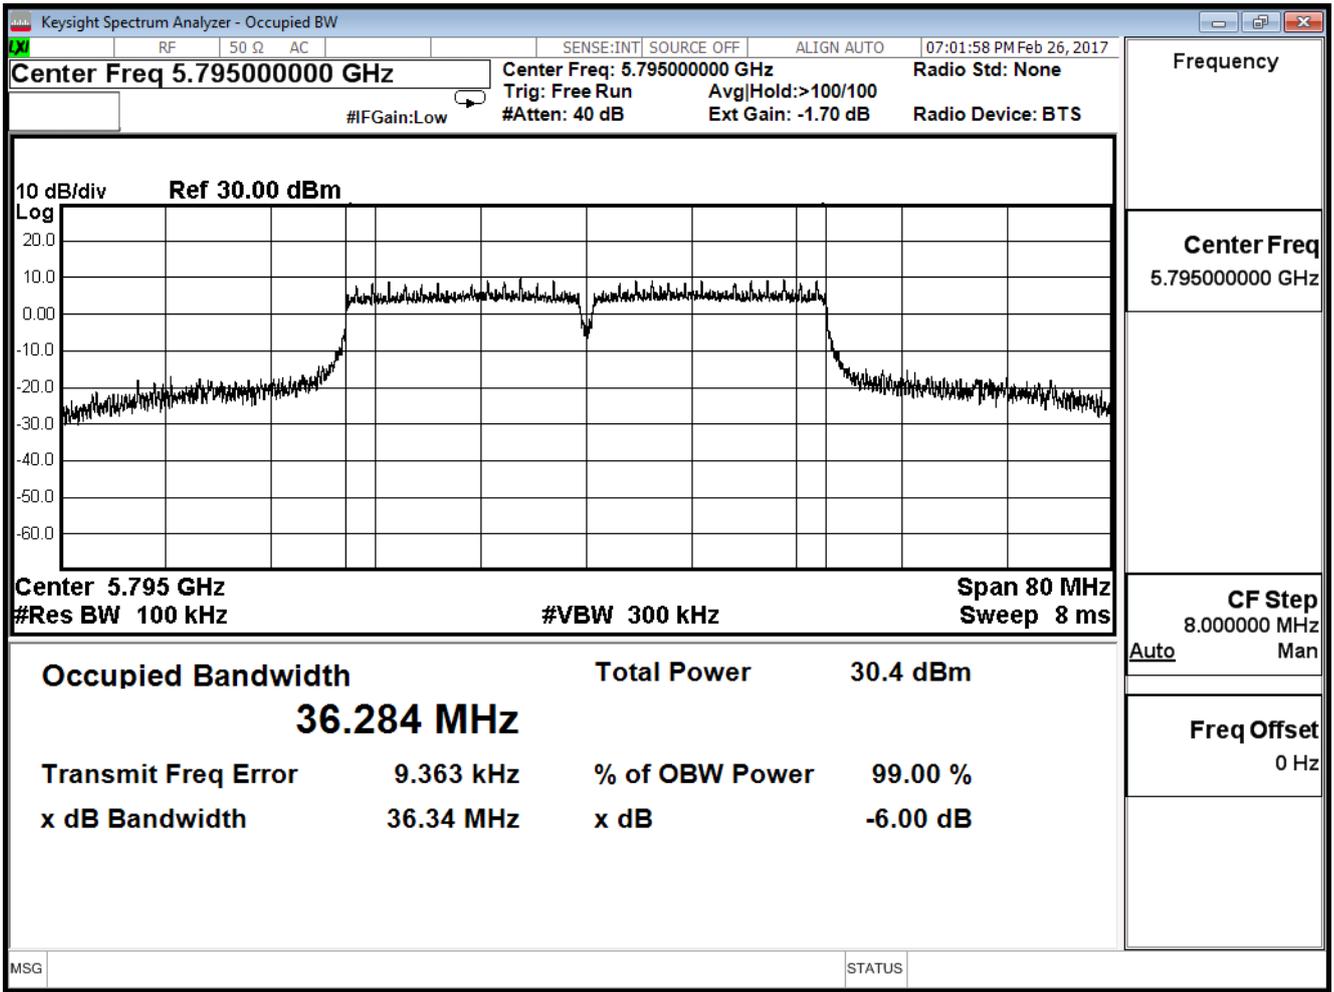


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| 802.11n_40M(ANT 1) |                 |                     |             |        |
|--------------------|-----------------|---------------------|-------------|--------|
| Channel No.        | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 151                | 5755            | 36.330              | ≥0.5        | Pass   |
| 159                | 5795            | 36.350              | ≥0.5        | Pass   |

**Channel 151 (5755MHz)**

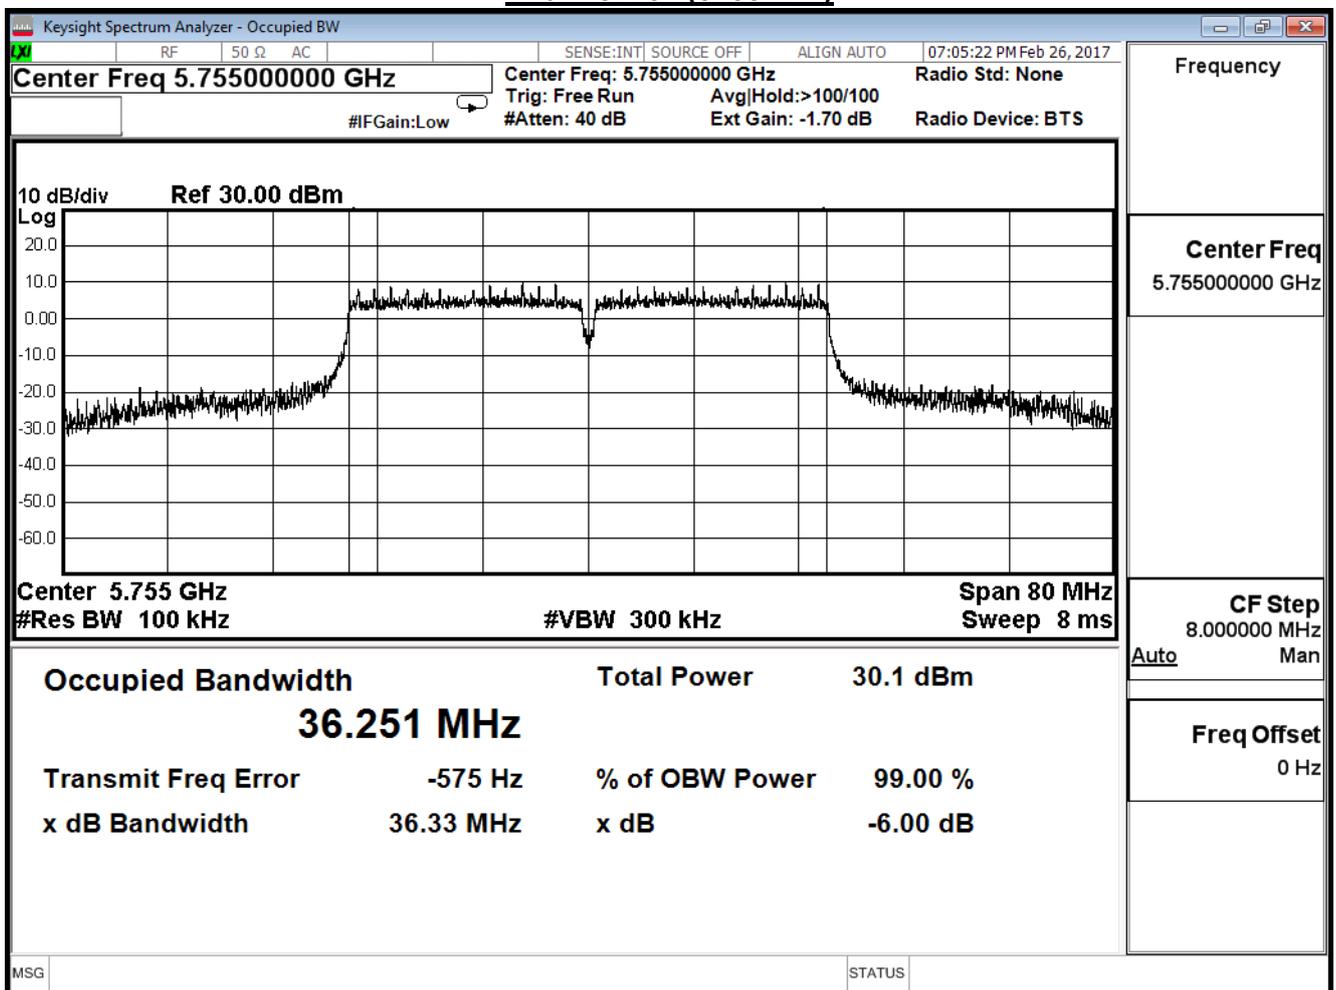

**Channel 159 (5795MHz)**

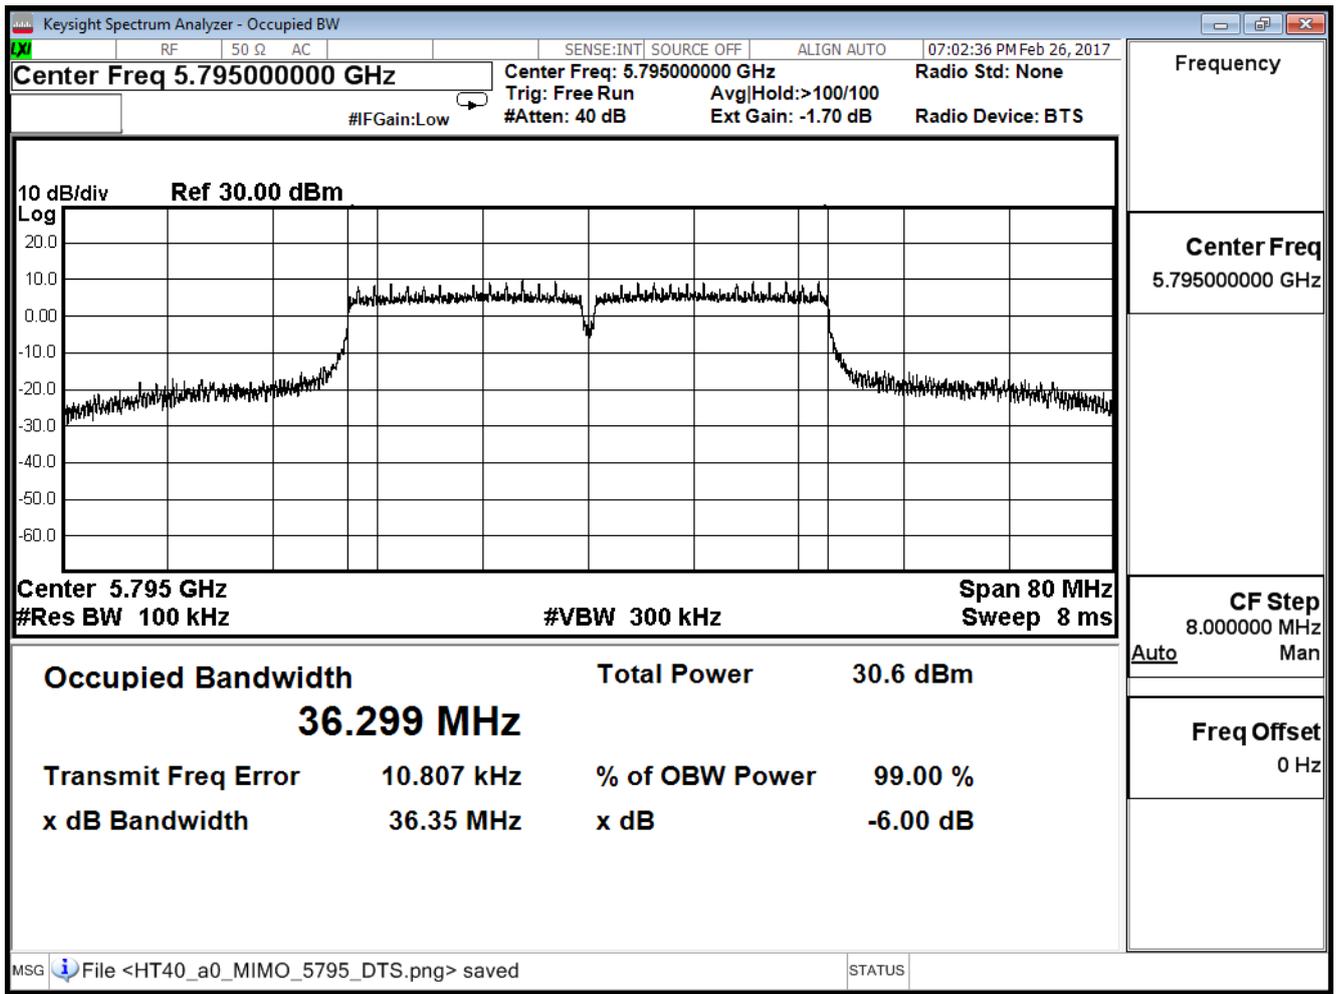


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11n\_40M(ANT 2)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 151         | 5755            | 36.350              | ≥0.5        | Pass   |
| 159         | 5795            | 36.330              | ≥0.5        | Pass   |

**Channel 151 (5755MHz)**

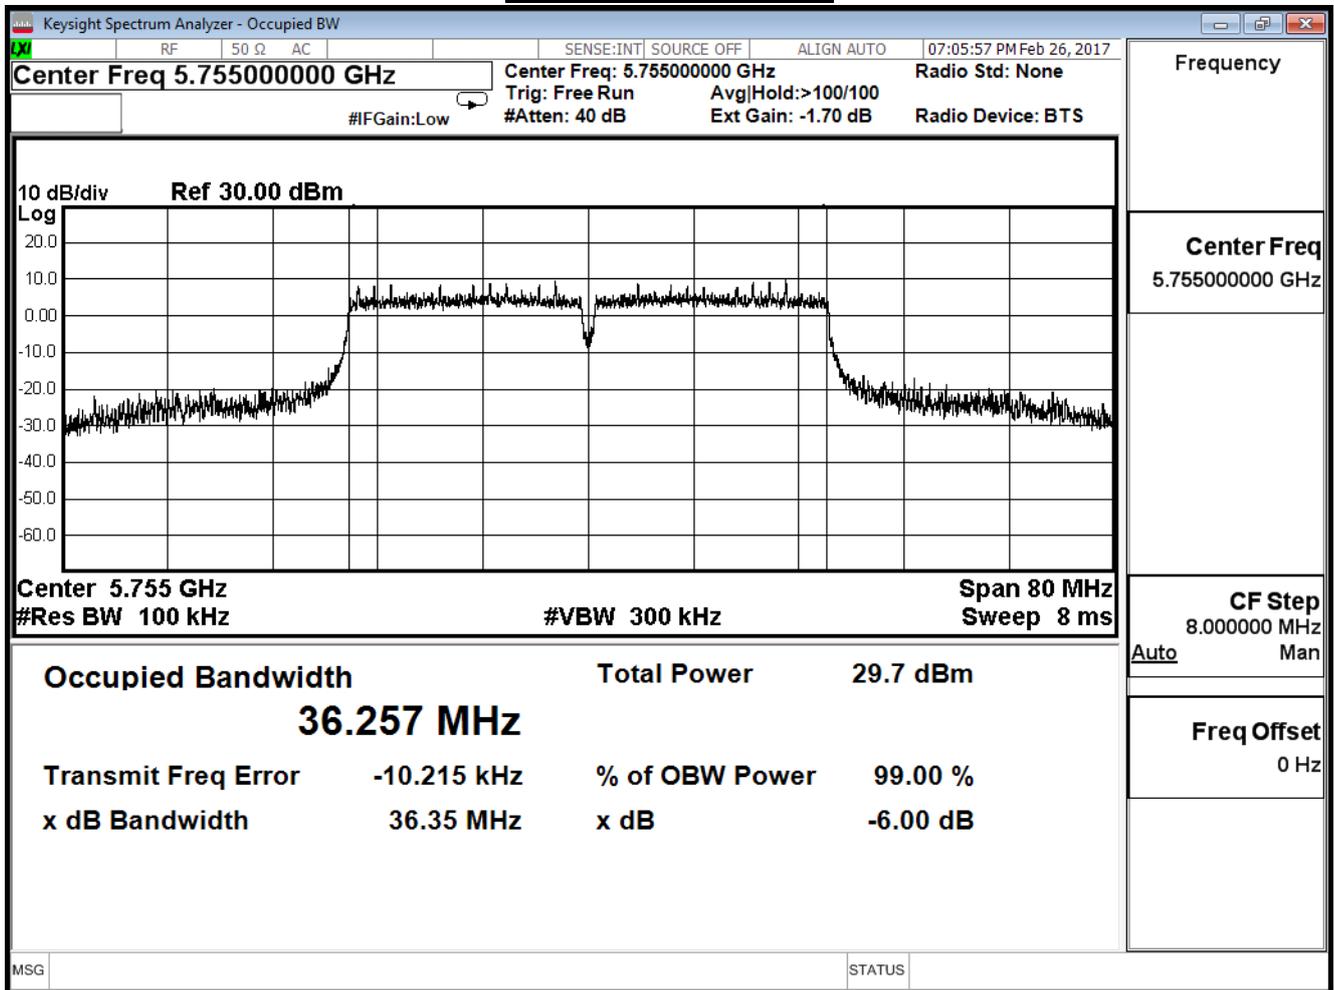

**Channel 159 (5795MHz)**

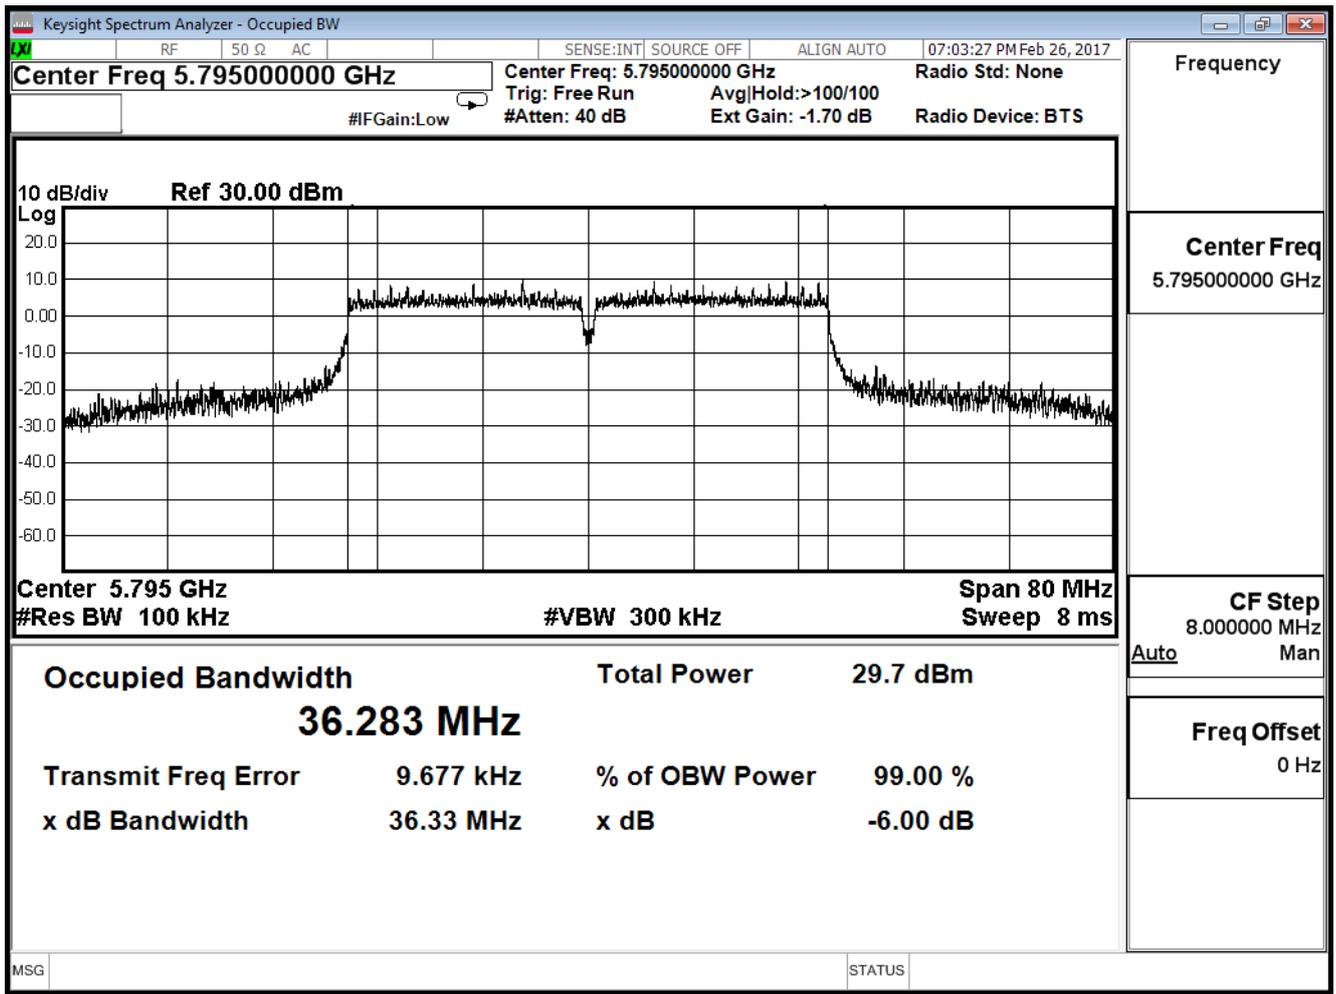


|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |


802.11n\_40M(ANT 3)

| Channel No. | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 151         | 5755            | 36.360              | ≥0.5        | Pass   |
| 159         | 5795            | 36.340              | ≥0.5        | Pass   |

**Channel 151 (5755MHz)**

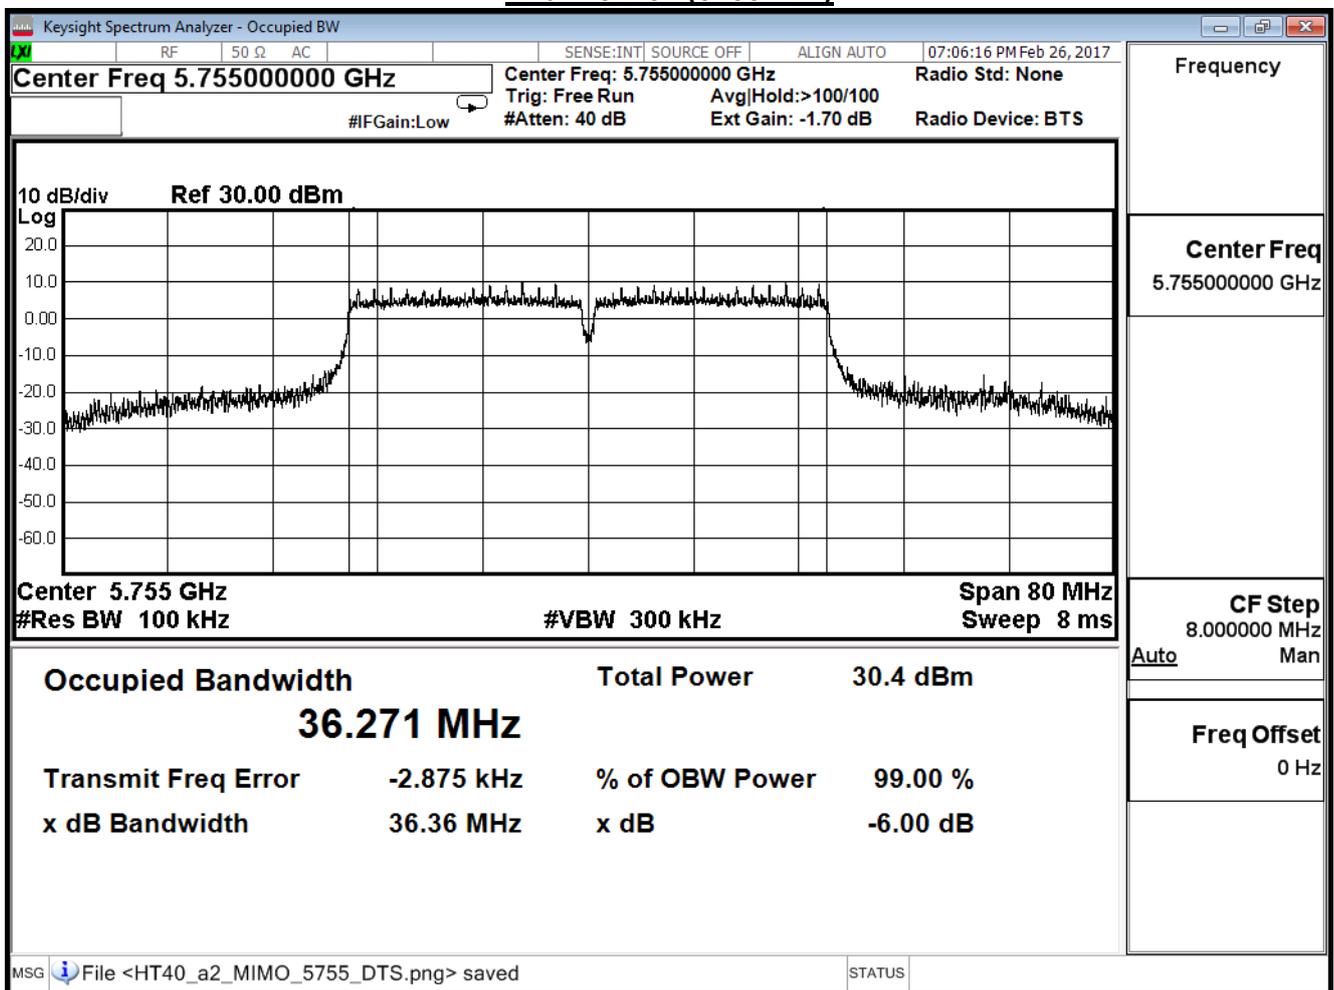


**Channel 159 (5795MHz)**

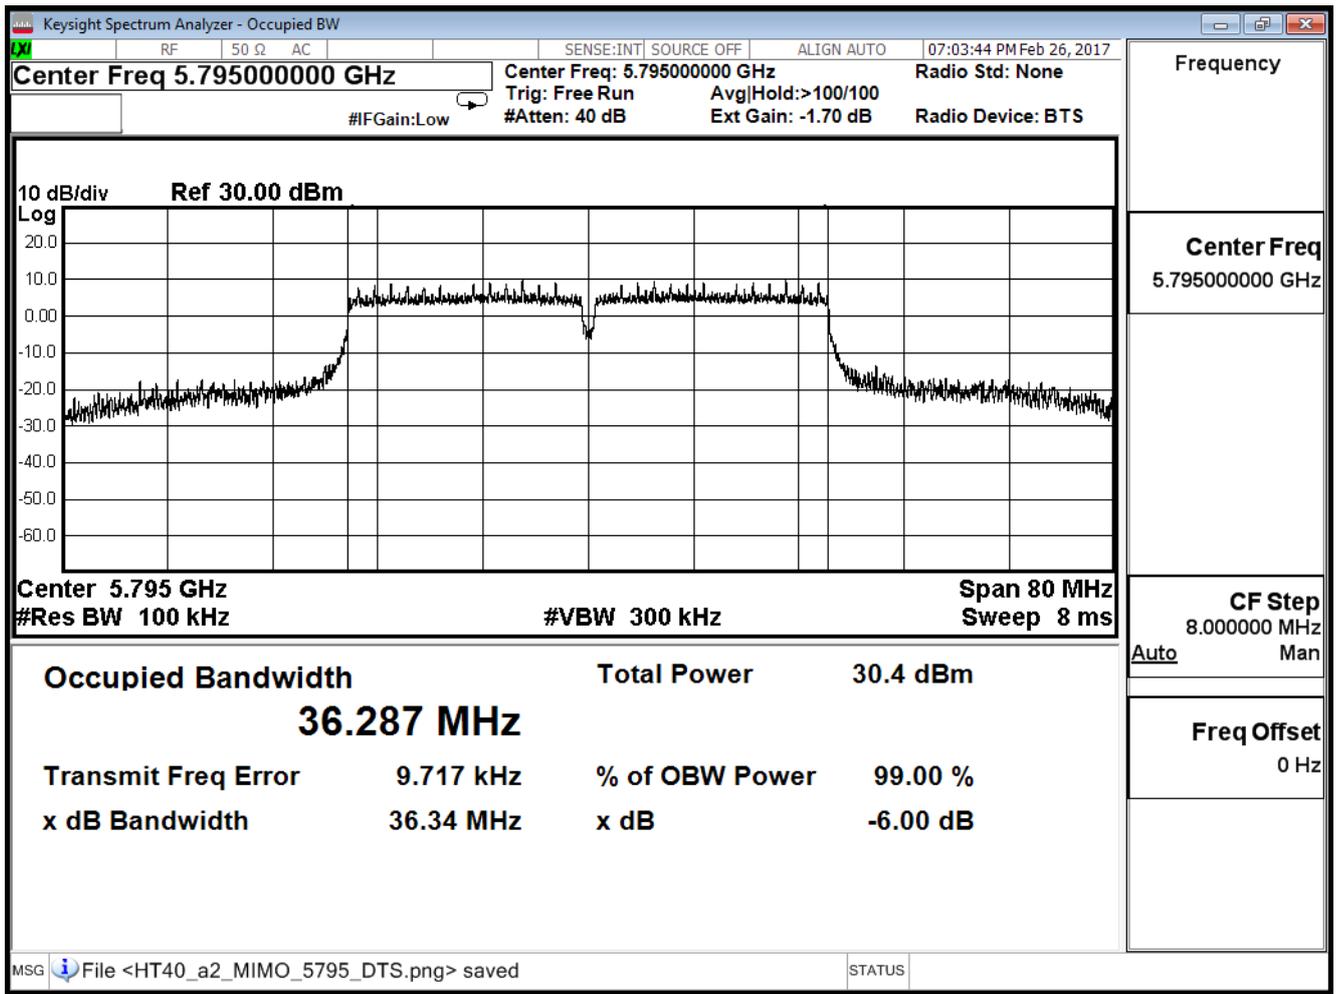

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| 802.11ac_80M(ANT 0) |                 |                     |             |        |
|---------------------|-----------------|---------------------|-------------|--------|
| Channel No.         | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 155                 | 5775            | 76.320              | ≥0.5        | Pass   |


**Channel 155 (5775MHz)**

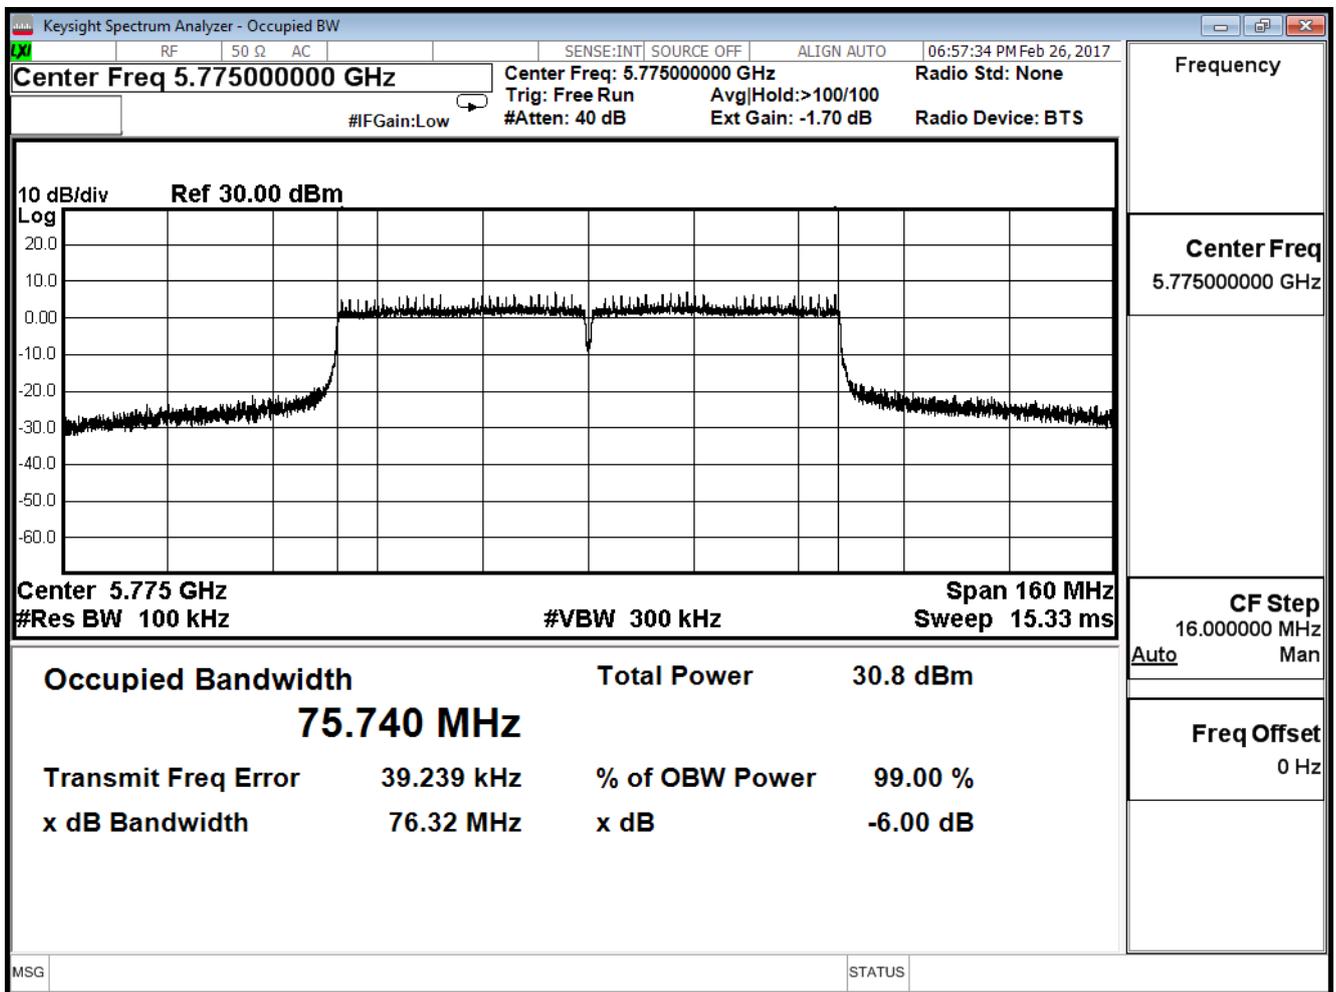

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| 802.11ac_80M(ANT 1) |                 |                     |             |        |
|---------------------|-----------------|---------------------|-------------|--------|
| Channel No.         | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 155                 | 5775            | 76.290              | ≥0.5        | Pass   |


**Channel 155 (5775MHz)**

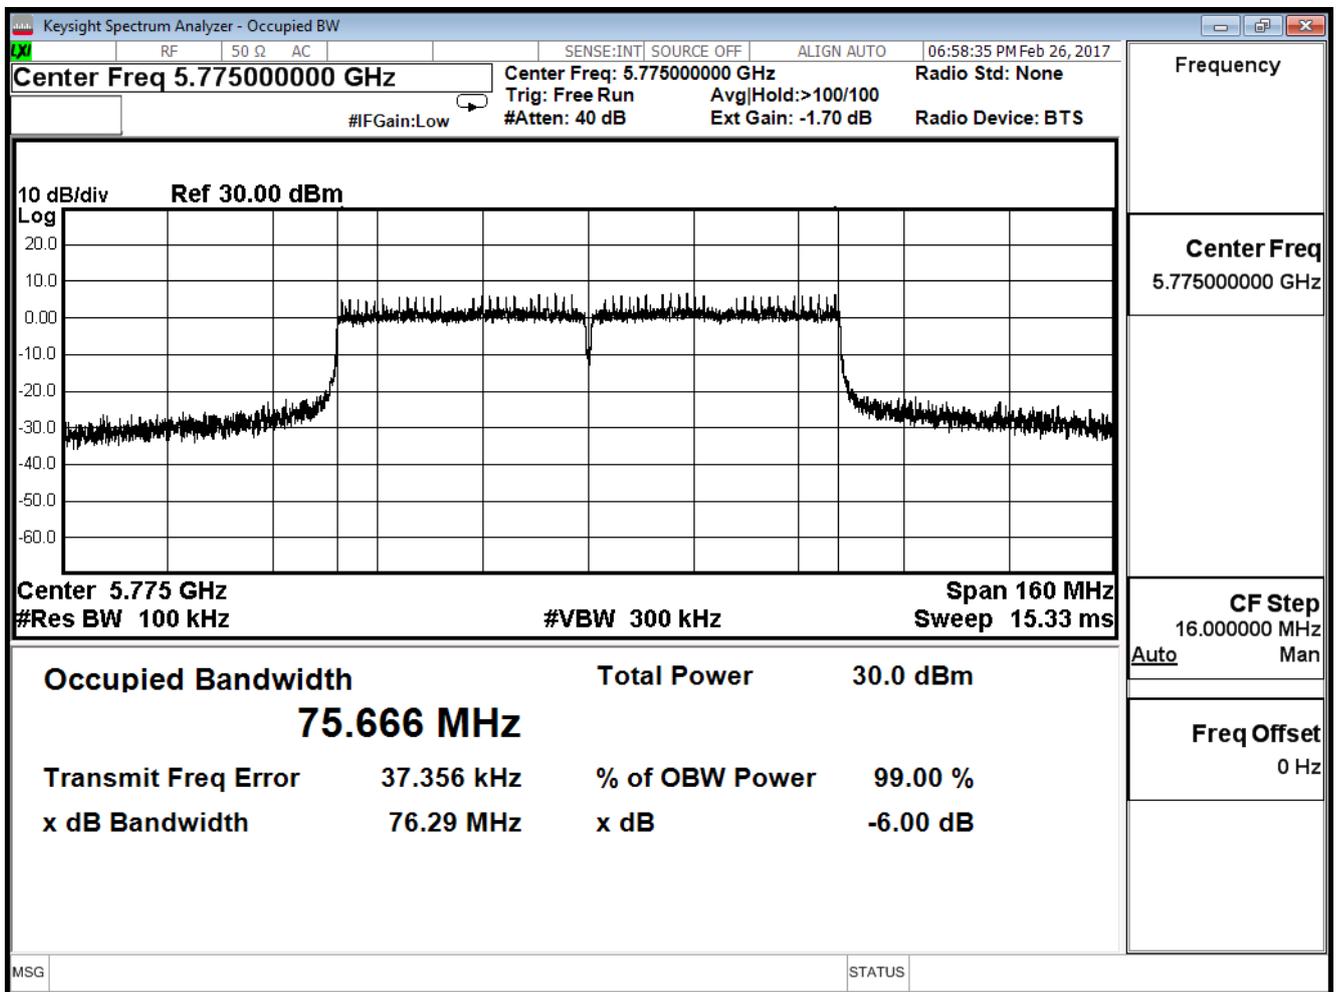

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | DTS Bandwidth   |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26  | Test Site | SR10-H |

| 802.11ac_80M(ANT 2) |                 |                     |             |        |
|---------------------|-----------------|---------------------|-------------|--------|
| Channel No.         | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 155                 | 5775            | 75.940              | ≥0.5        | Pass   |


**Channel 155 (5775MHz)**

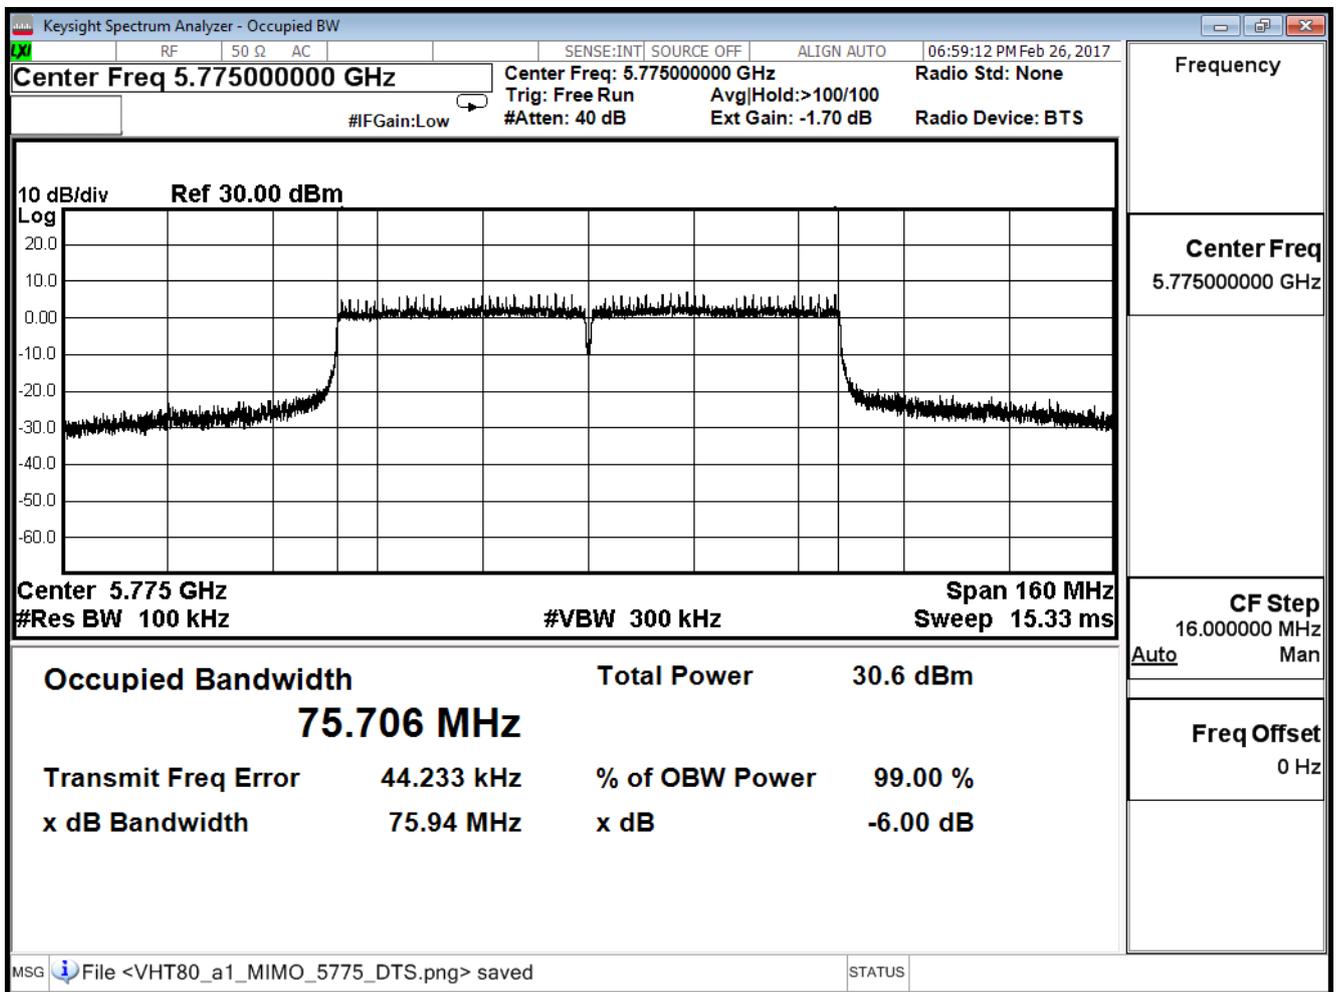

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                   |           |        |
| Test Item    | DTS Bandwidth  |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF_ MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/02/26   | Test Site | SR10-H |

| 802.11ac_80M(ANT 3) |                 |                     |             |        |
|---------------------|-----------------|---------------------|-------------|--------|
| Channel No.         | Frequency (MHz) | Measure Level (MHz) | Limit (MHz) | Result |
| 155                 | 5775            | 76.310              | ≥0.5        | Pass   |

**Channel 155 (5775MHz)**

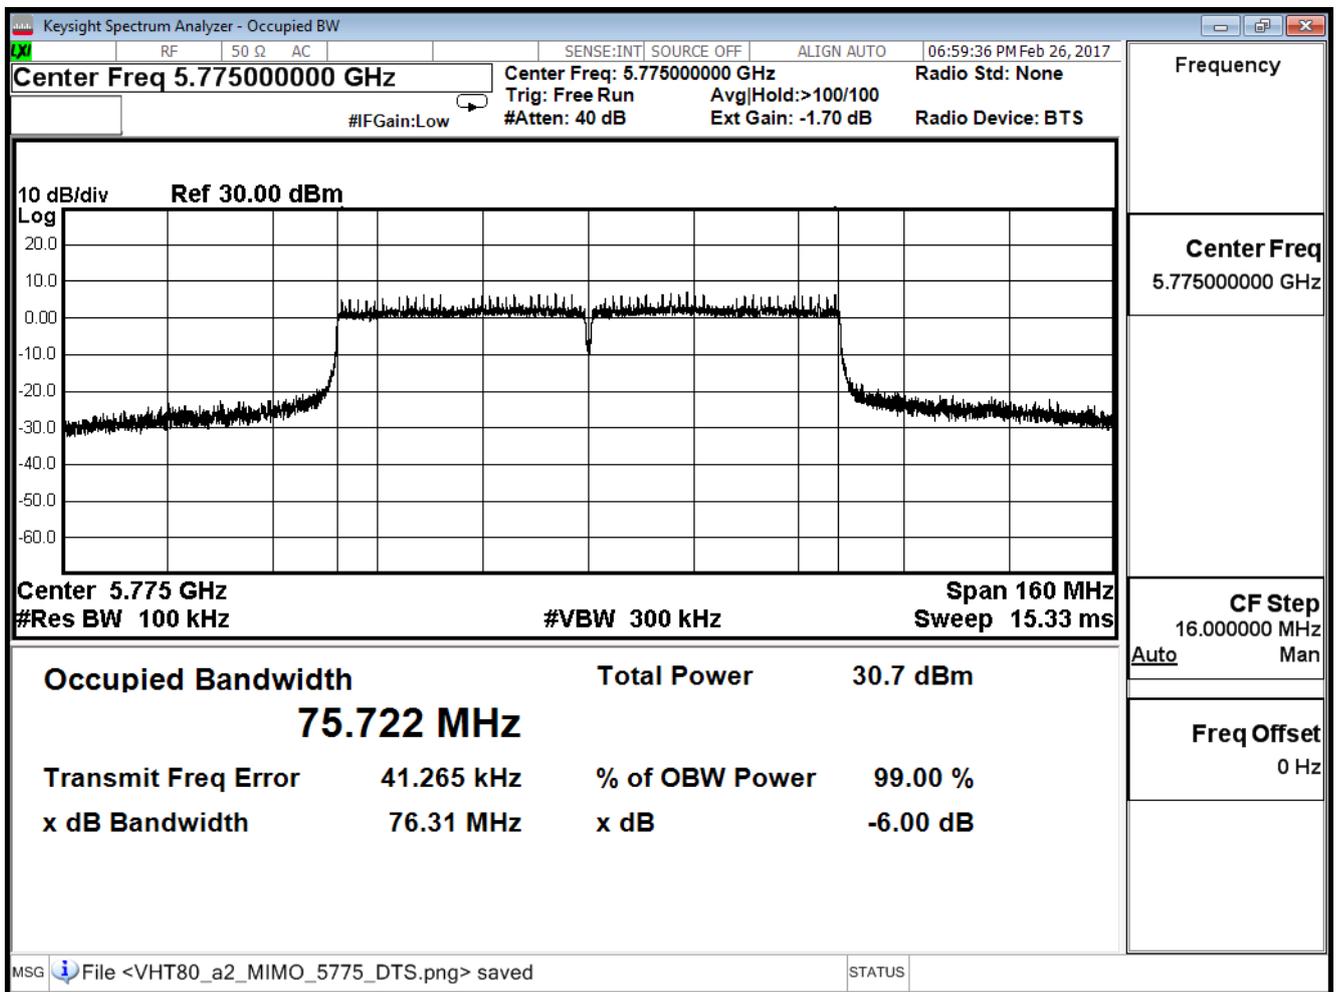

#### 4. Peak Transmit Output

##### 4.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Peak Transmit Output / SR10-H

| Instrument        | Manufacturer | Model No. | Serial No  | Next Cal. Date |
|-------------------|--------------|-----------|------------|----------------|
| Spectrum Analyzer | Agilent      | N9010A    | US47140172 | 2017/08/08     |

Note: All equipments that need to calibrate are with calibration period of 1 year.

##### 4.2. Test Setup

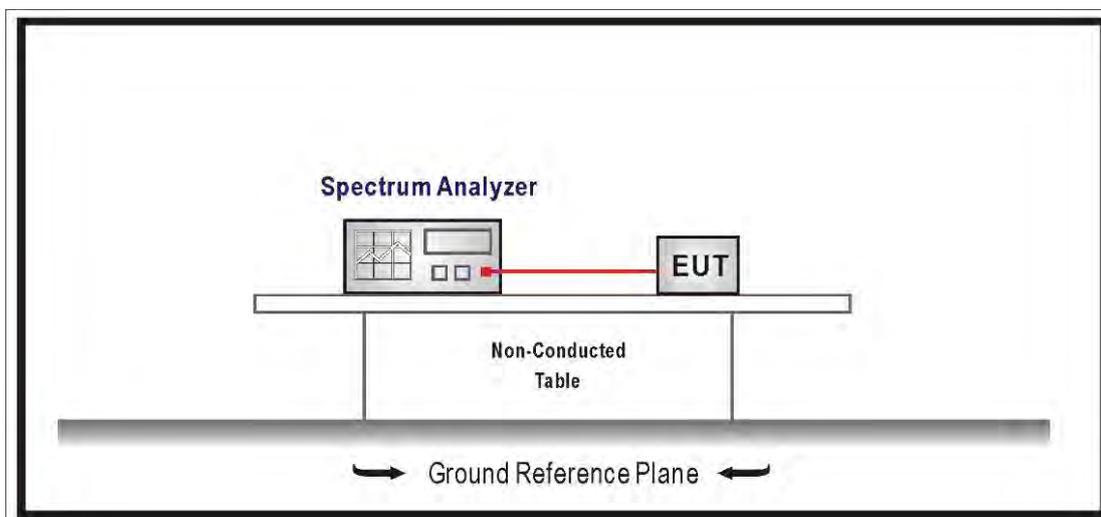

### 4.3. Limits

1. For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725-5.850 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

### 4.4. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of 789033 D02 V01R02 for compliance to FCC 47CFR Subpart E requirements. The Method SA-1 of the Maximum conducted output power was used.

Set RBW=1MHz, VBW=3MHz with RMS detector and trace average 100 traces in power averaging mode. Set span to encompass the entire emission bandwidth (EBW) of the signal. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

### 4.5. Uncertainty

The measurement uncertainty is defined as  $\pm 1.27$  dB

#### 4.6. Test Result

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | Peak Transmit Output                                |           |        |
| Test Mode    | Mode 1: Tx_ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


##### 802.11a (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.710             | ≤30                  |
| 44          | 5220            | 21.540             | ≤30                  |
| 48          | 5240            | 21.810             | ≤30                  |


The worst emission of data rate is 6 Mbps.

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |                |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No              | Frequency (MHz) | Data Rate |        |        |        |        |        |        | Required Limit |
|                         |                 | 6         | 12     | 18     | 24     | 36     | 48     | 54     |                |
| 36                      | 5180            | 19.710    | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44                      | 5220            | 21.540    | 21.500 | 21.480 | 21.400 | 21.320 | 21.280 | 21.200 |                |
| 48                      | 5240            | 21.810    | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

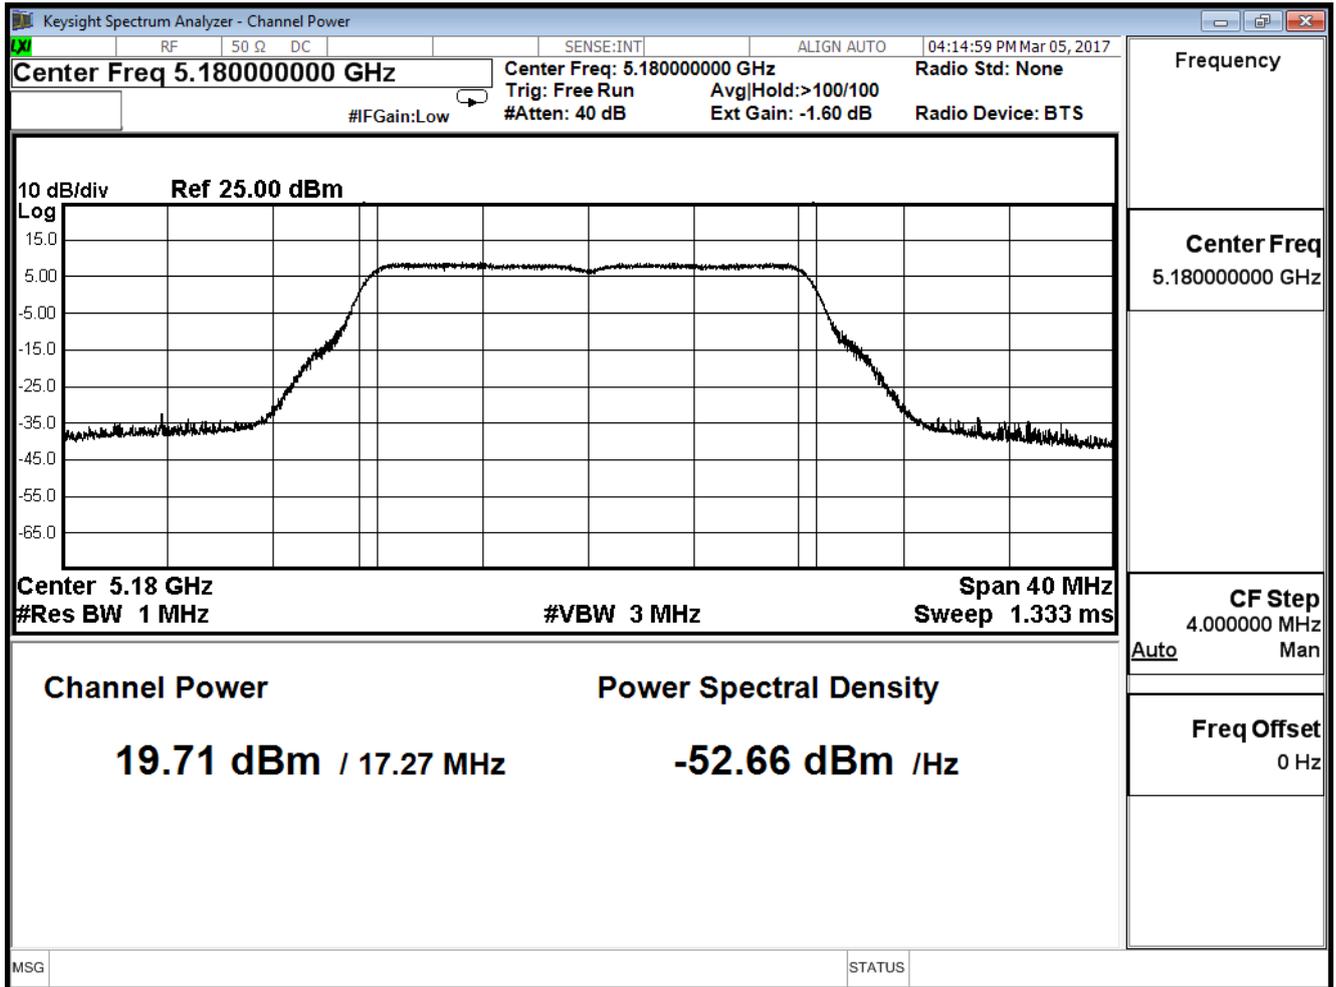

Peak transmit Power - Channel 44

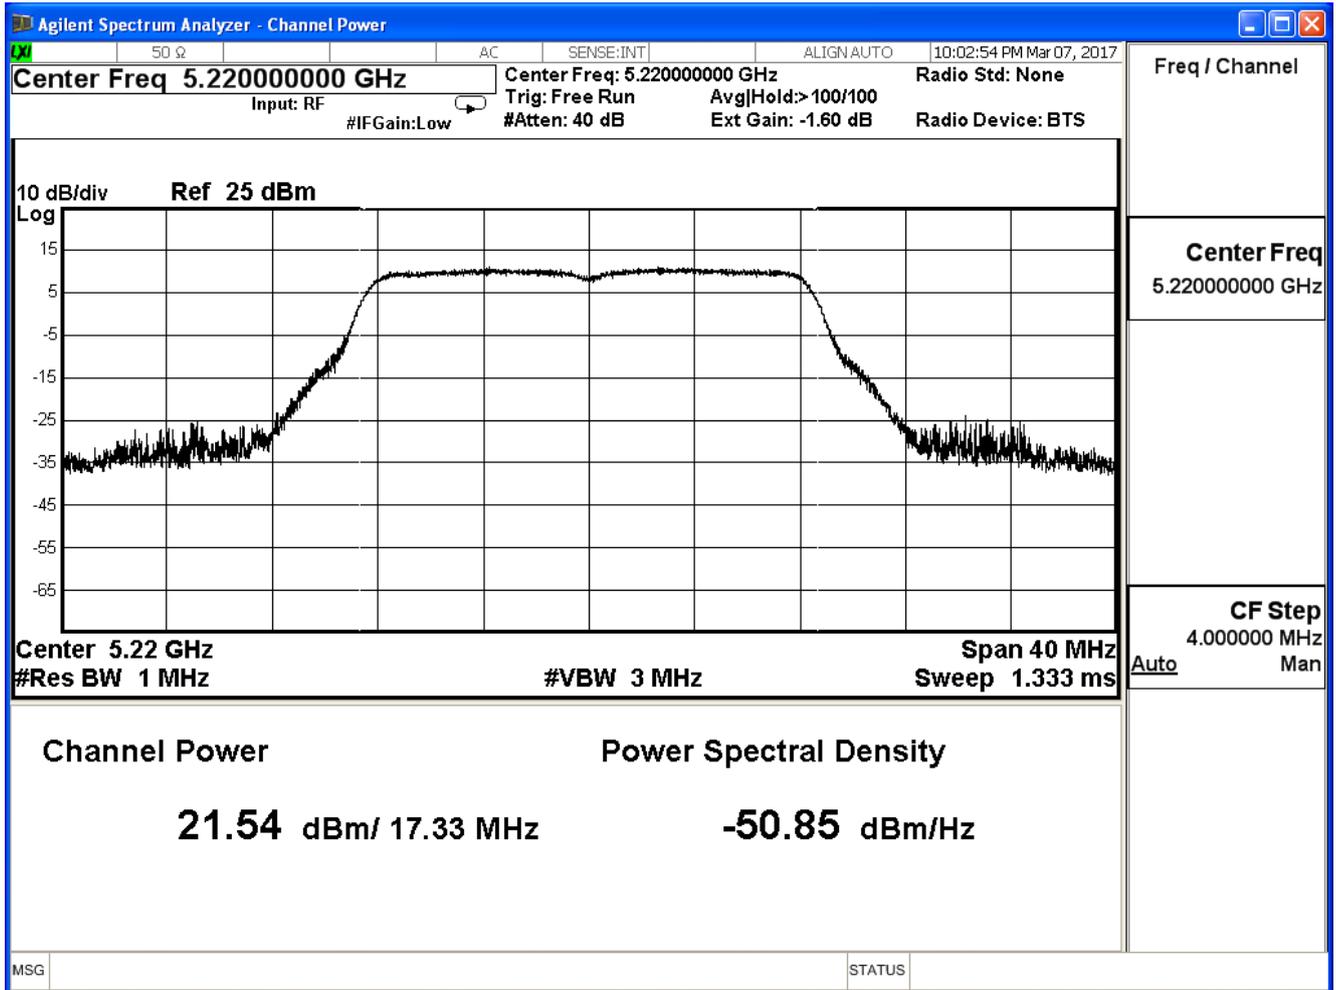

### Peak transmit Power - Channel 48

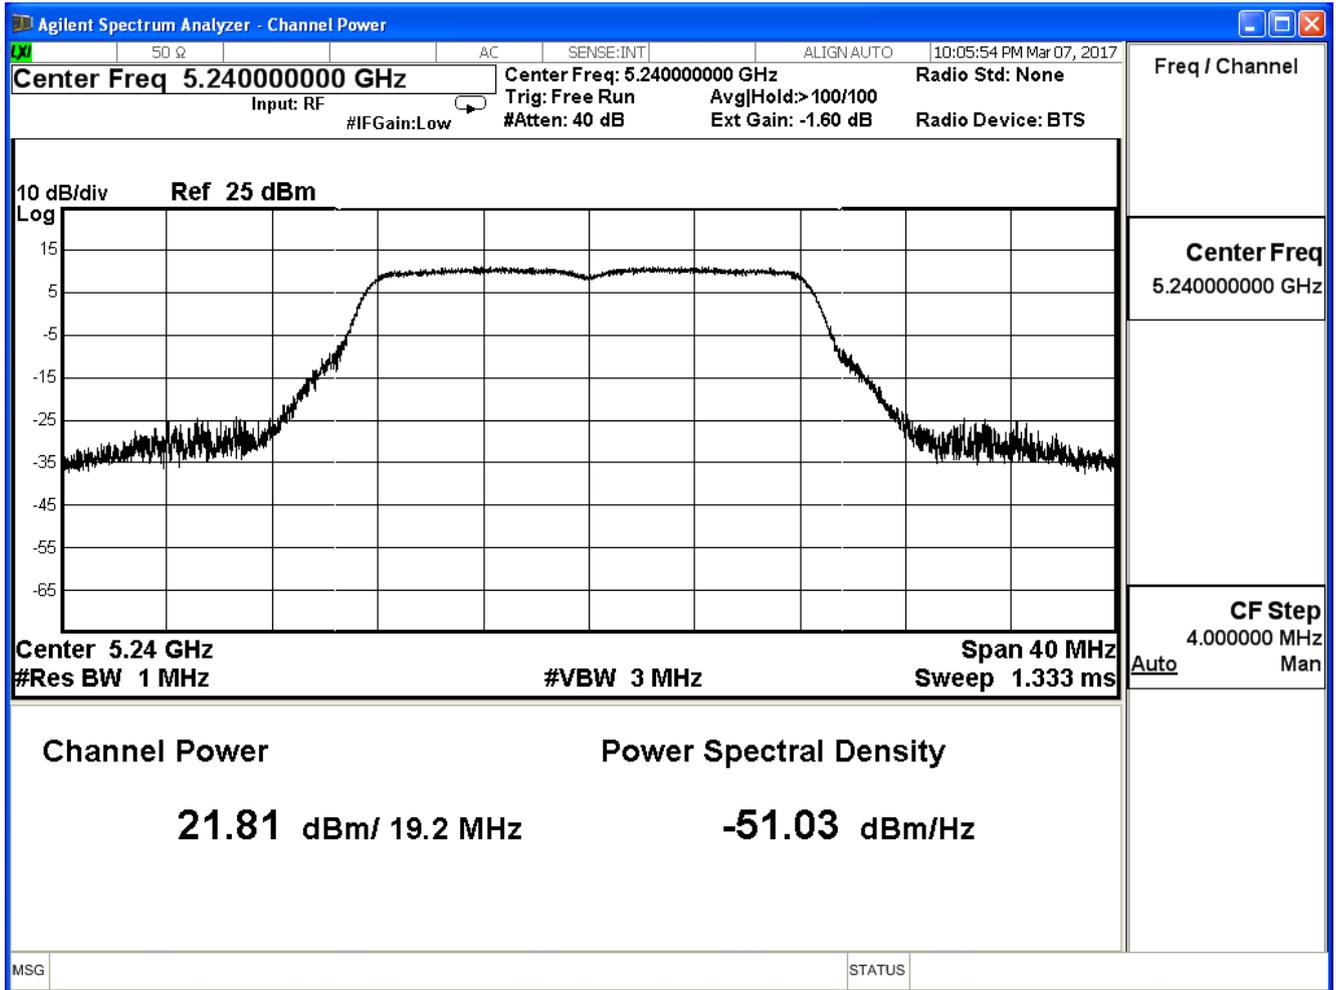

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | Peak Transmit Output                                |           |        |
| Test Mode    | Mode 1: Tx_ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## 802.11a (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.600             | ≤30                  |
| 44          | 5220            | 21.580             | ≤30                  |
| 48          | 5240            | 21.830             | ≤30                  |


The worst emission of data rate is 6 Mbps.

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |                |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No              | Frequency (MHz) | Data Rate |        |        |        |        |        |        | Required Limit |
|                         |                 | 6         | 12     | 18     | 24     | 36     | 48     | 54     |                |
| 36                      | 5180            | 19.600    | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44                      | 5220            | 21.580    | 21.500 | 21.380 | 21.300 | 21.210 | 21.180 | 21.100 |                |
| 48                      | 5240            | 21.830    | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

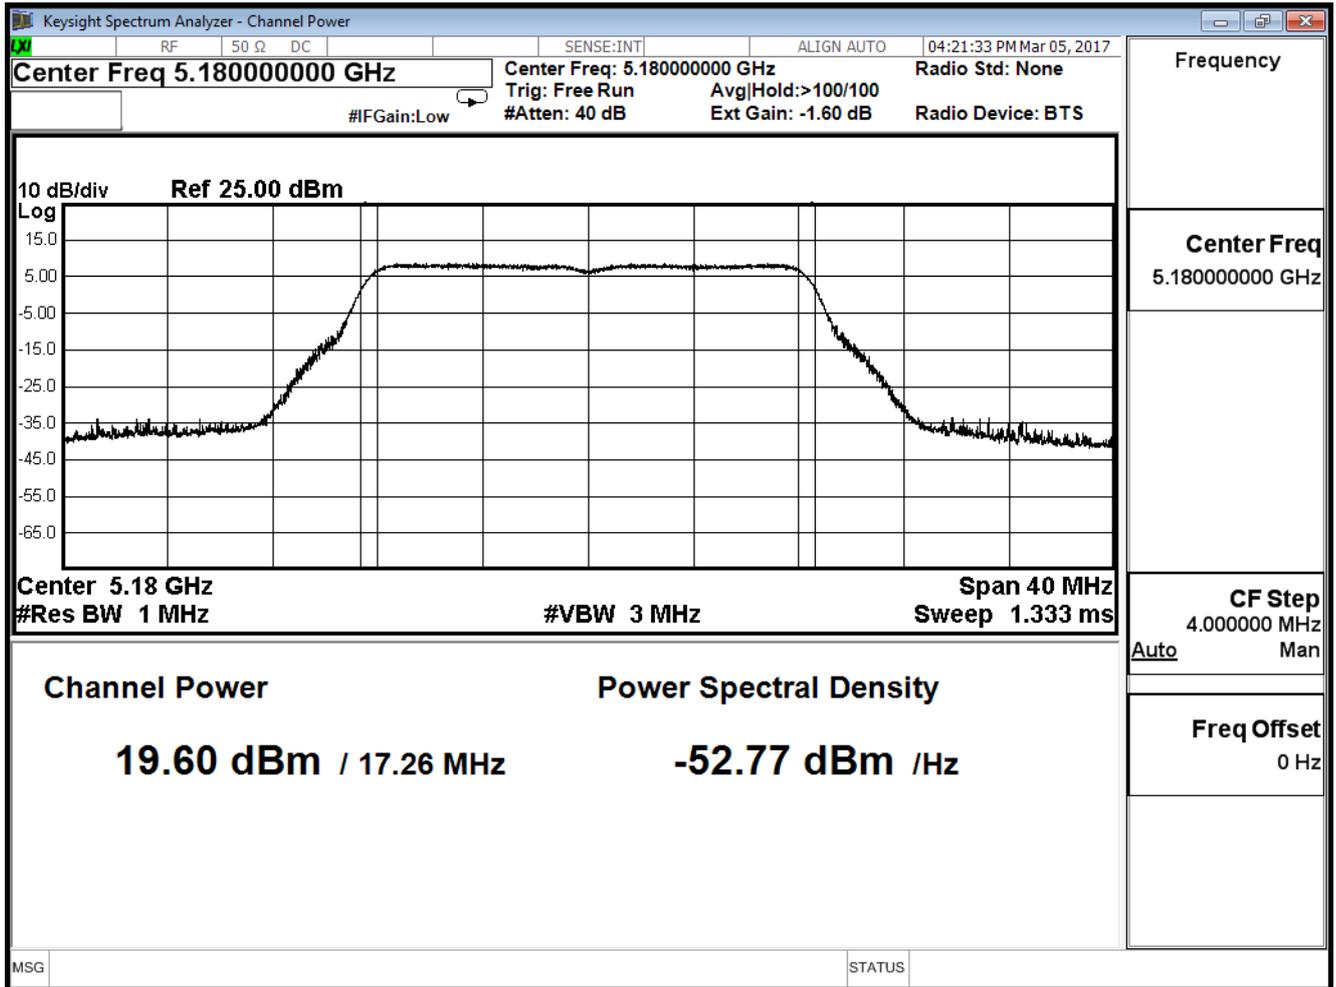

Peak transmit Power - Channel 44

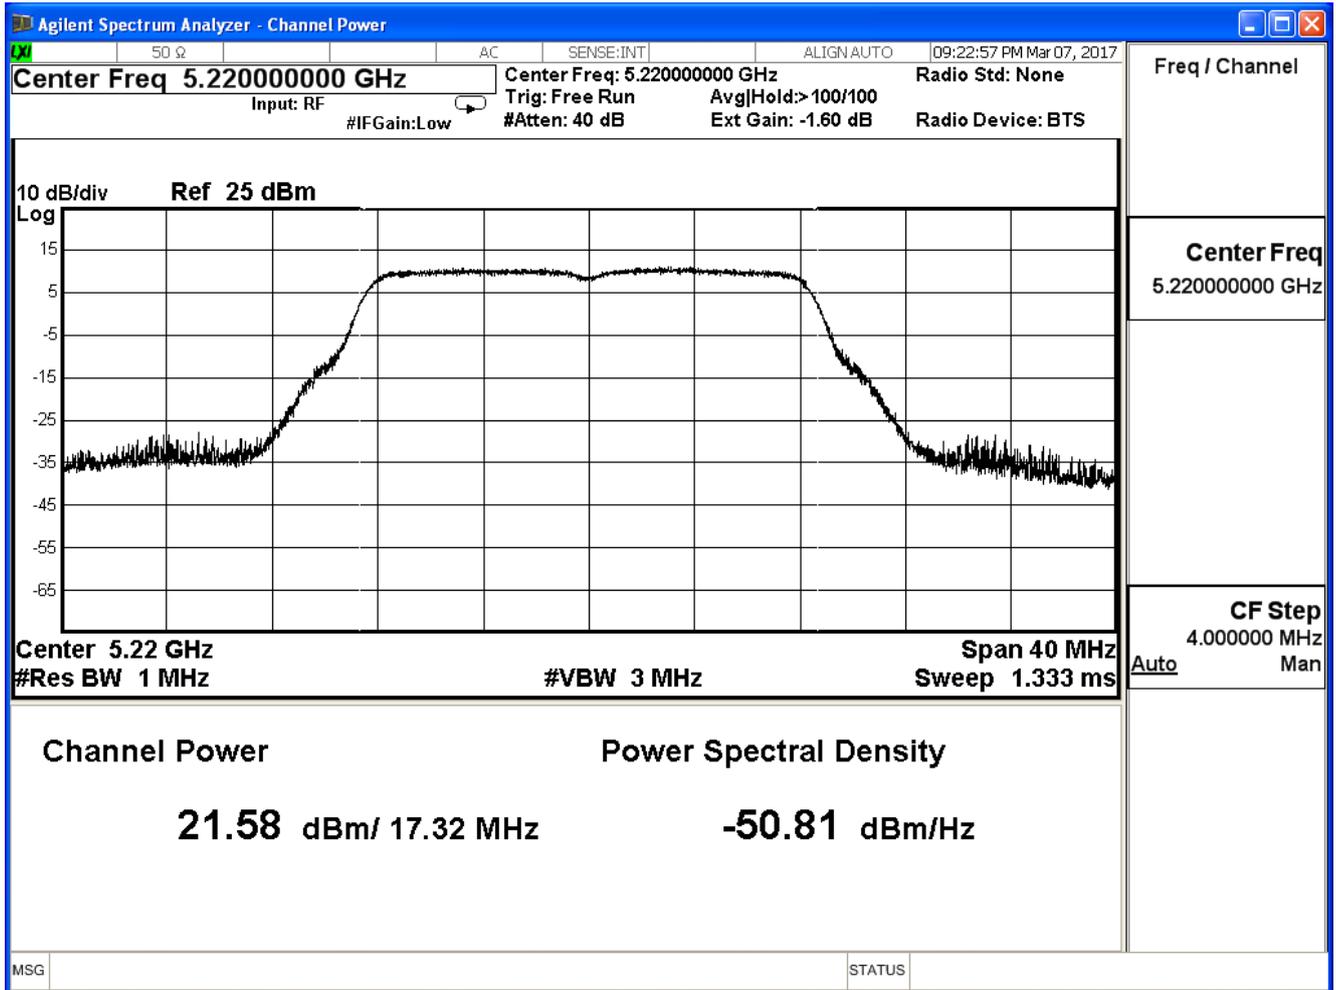

Peak transmit Power - Channel 48

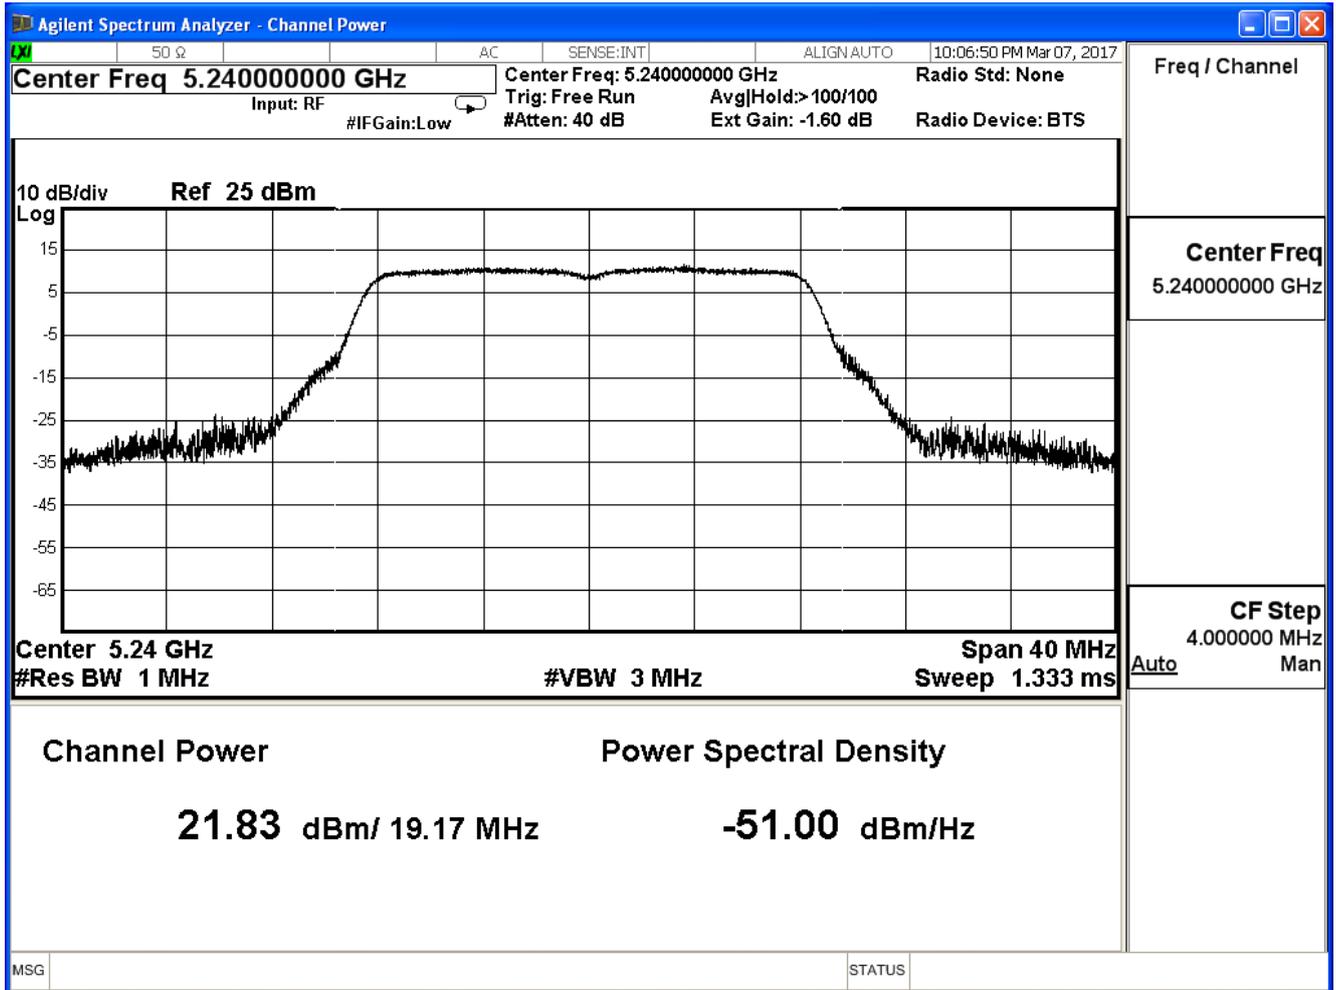

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | Peak Transmit Output                                |           |        |
| Test Mode    | Mode 1: Tx_ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## 802.11a (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.610             | ≤30                  |
| 44          | 5220            | 21.520             | ≤30                  |
| 48          | 5240            | 21.800             | ≤30                  |


The worst emission of data rate is 6 Mbps.

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |                |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No              | Frequency (MHz) | Data Rate |        |        |        |        |        |        | Required Limit |
|                         |                 | 6         | 12     | 18     | 24     | 36     | 48     | 54     |                |
| 36                      | 5180            | 19.610    | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44                      | 5220            | 21.520    | 21.440 | 21.320 | 21.280 | 21.200 | 21.170 | 21.110 |                |
| 48                      | 5240            | 21.800    | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

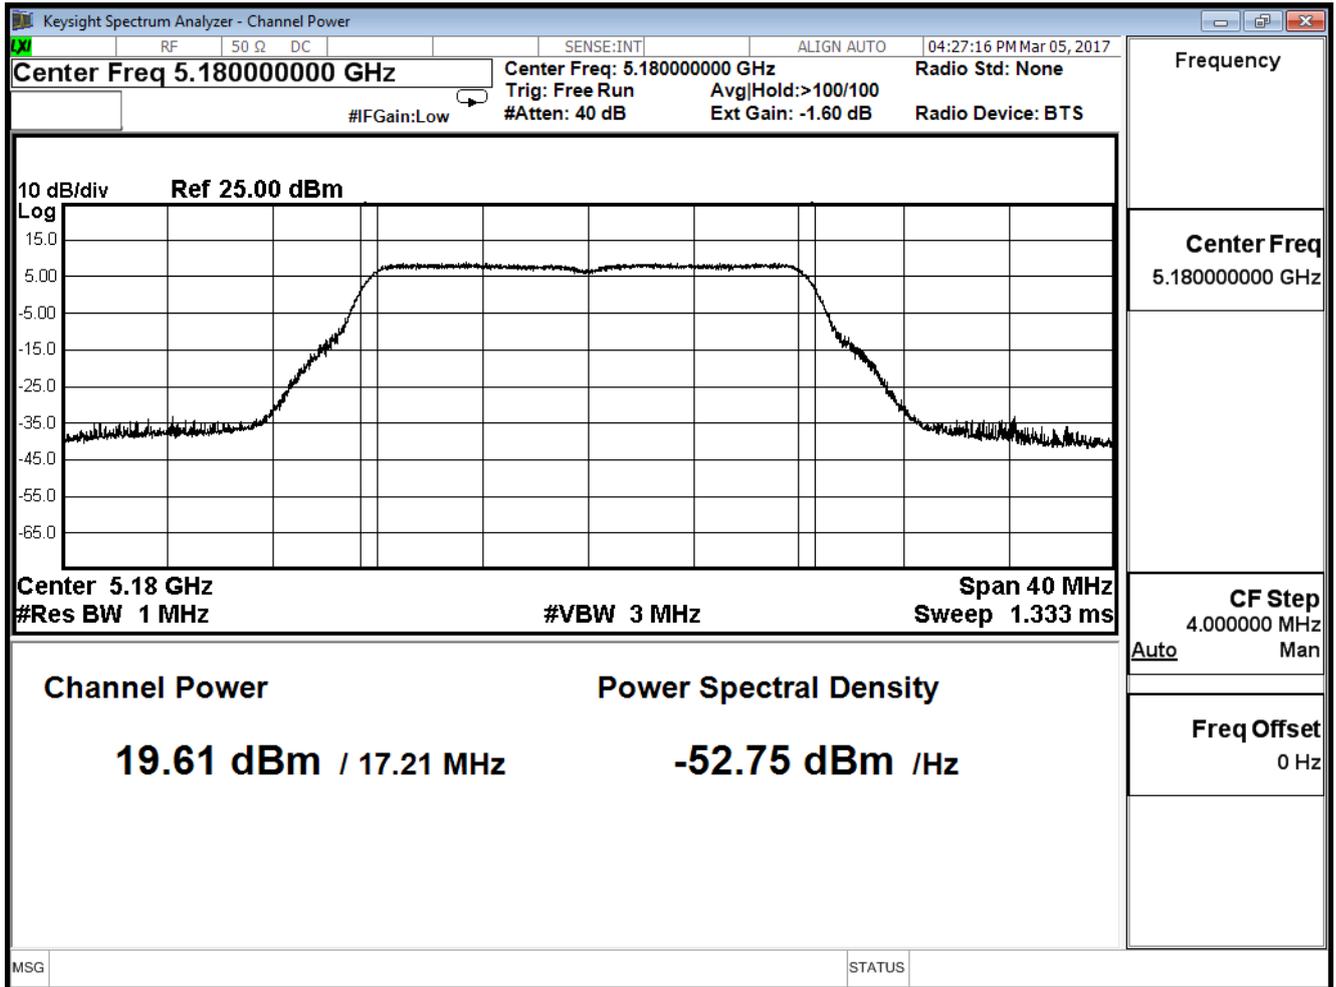

Peak transmit Power - Channel 44

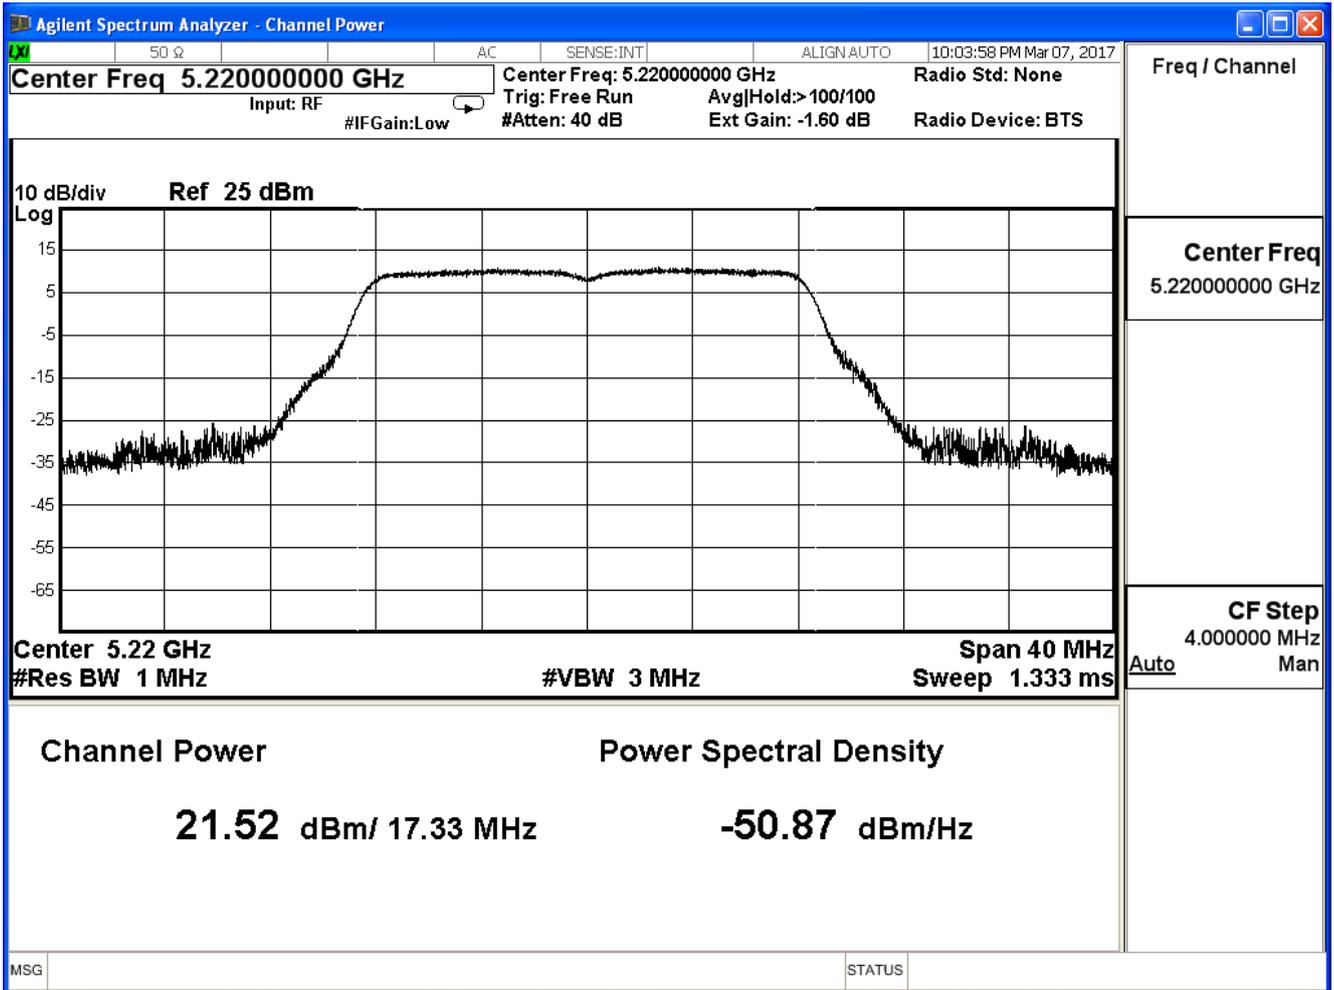

Peak transmit Power - Channel 48

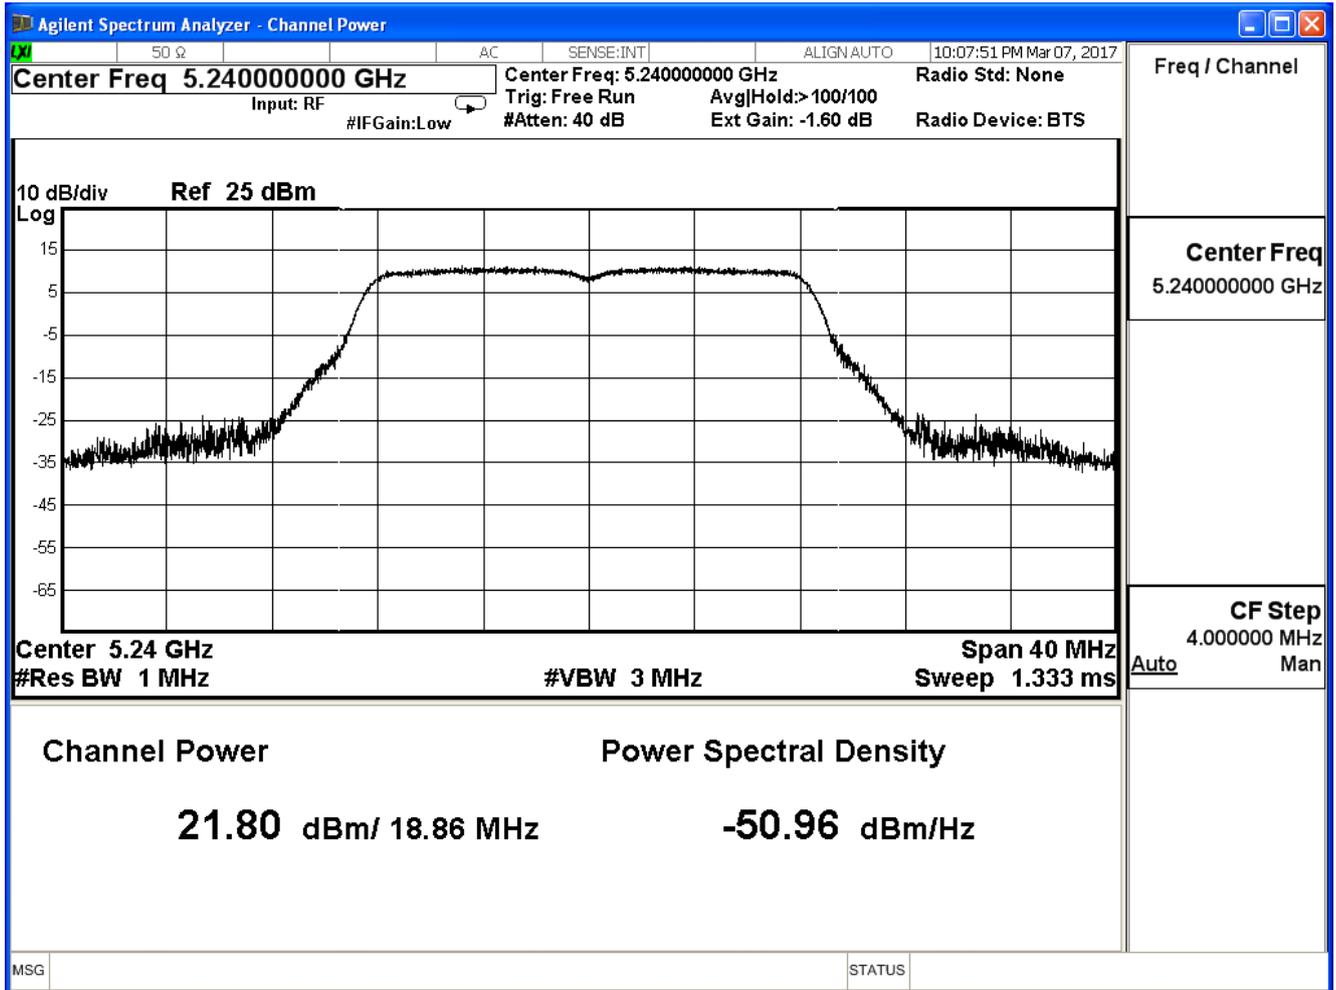

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | Peak Transmit Output                                |           |        |
| Test Mode    | Mode 1: Tx_ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


802.11a (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.630             | ≤30                  |
| 44          | 5220            | 21.570             | ≤30                  |
| 48          | 5240            | 21.850             | ≤30                  |


The worst emission of data rate is 6 Mbps.

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |                |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No              | Frequency (MHz) | Data Rate |        |        |        |        |        |        | Required Limit |
|                         |                 | 6         | 12     | 18     | 24     | 36     | 48     | 54     |                |
| 36                      | 5180            | 19.630    | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44                      | 5220            | 21.570    | 21.500 | 21.420 | 21.320 | 21.270 | 21.680 | 21.600 |                |
| 48                      | 5240            | 21.850    | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

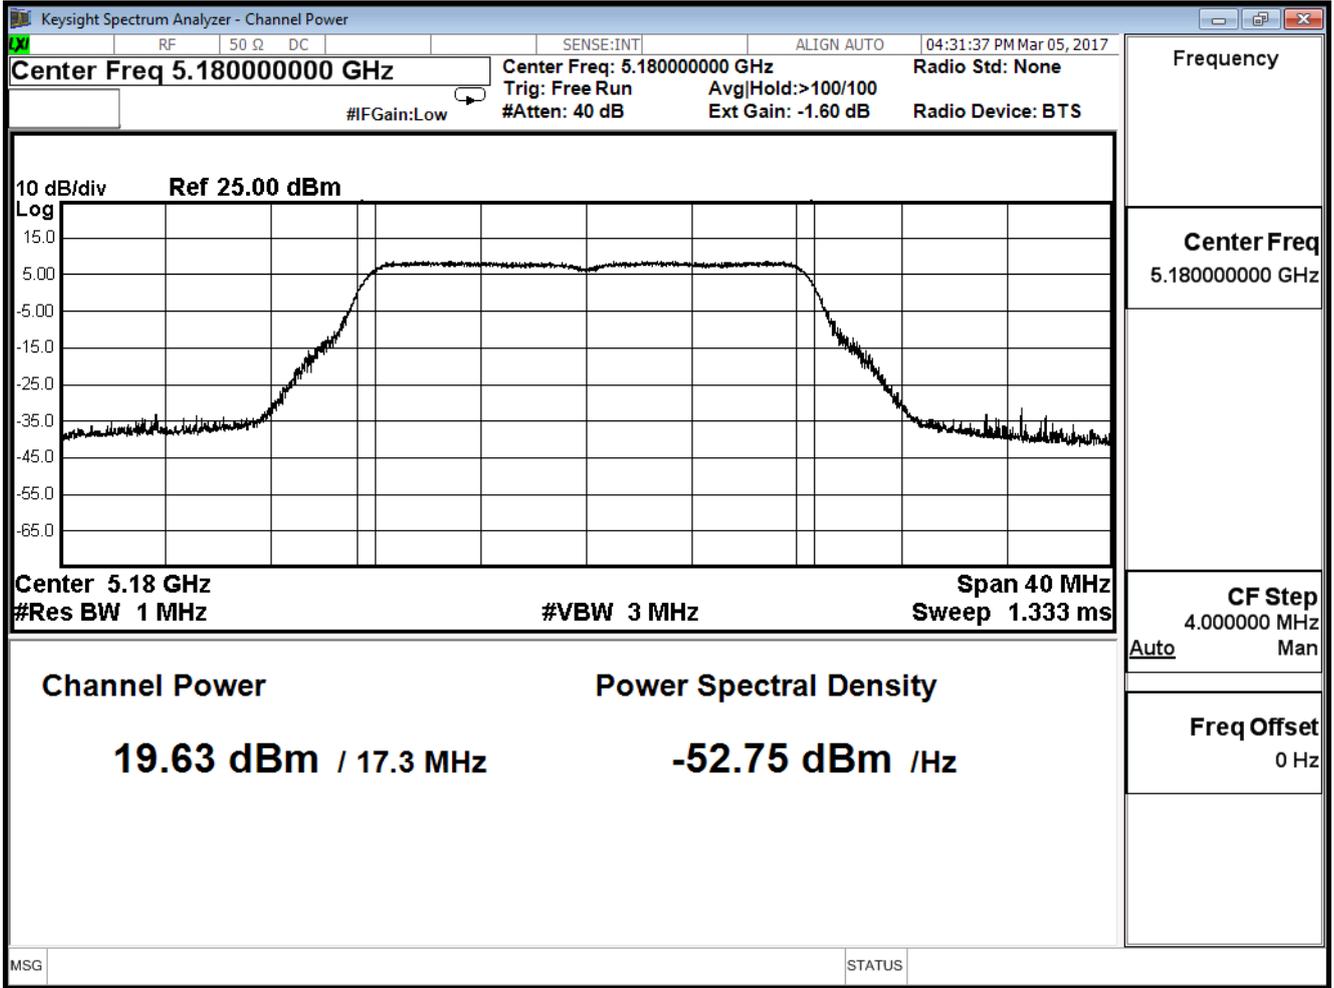

Peak transmit Power - Channel 44

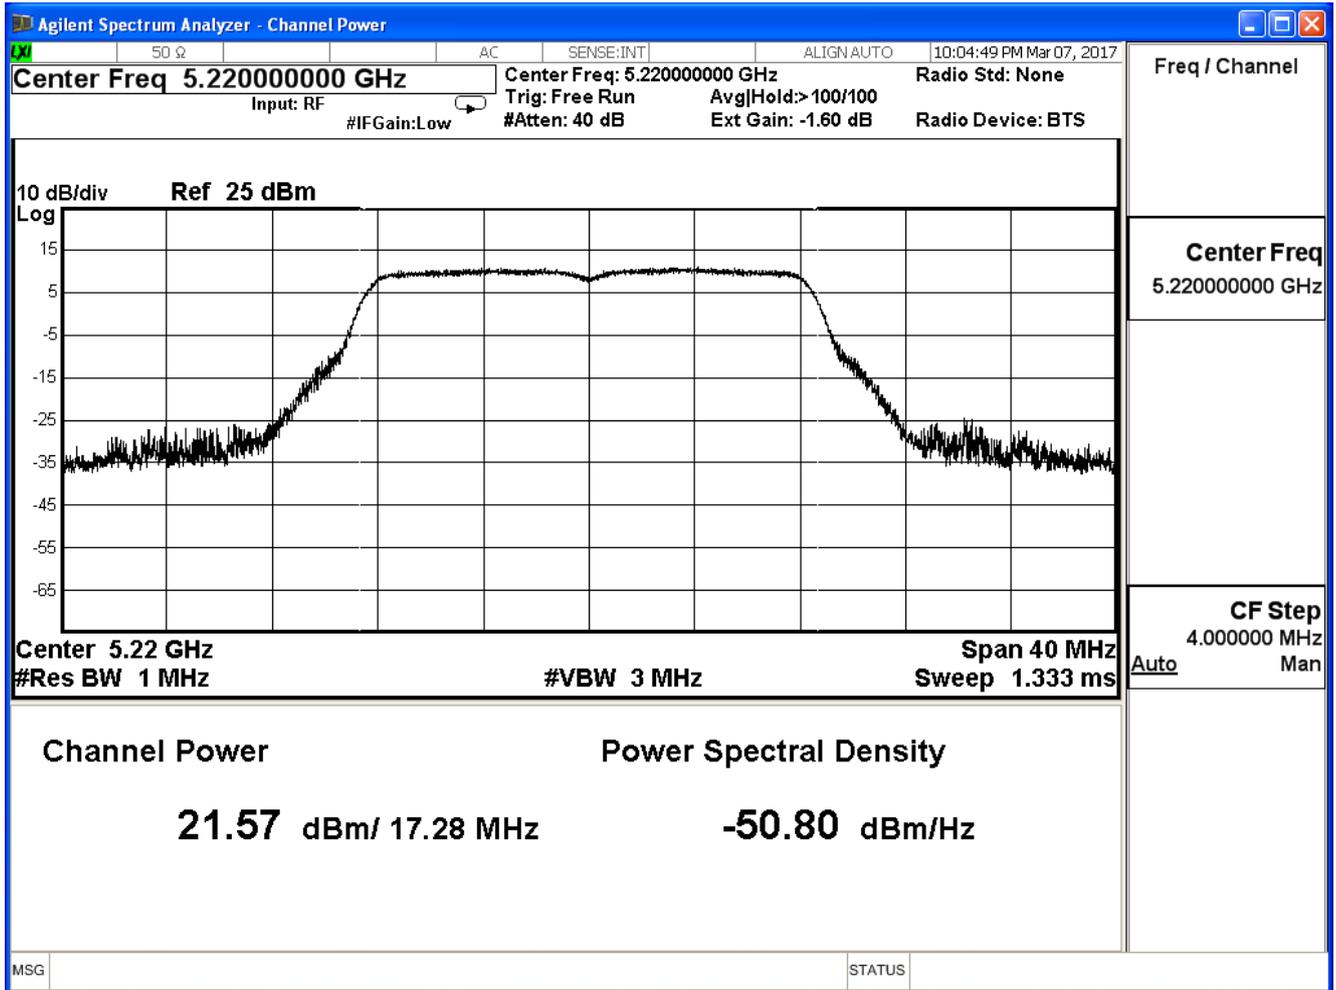

Peak transmit Power - Channel 48

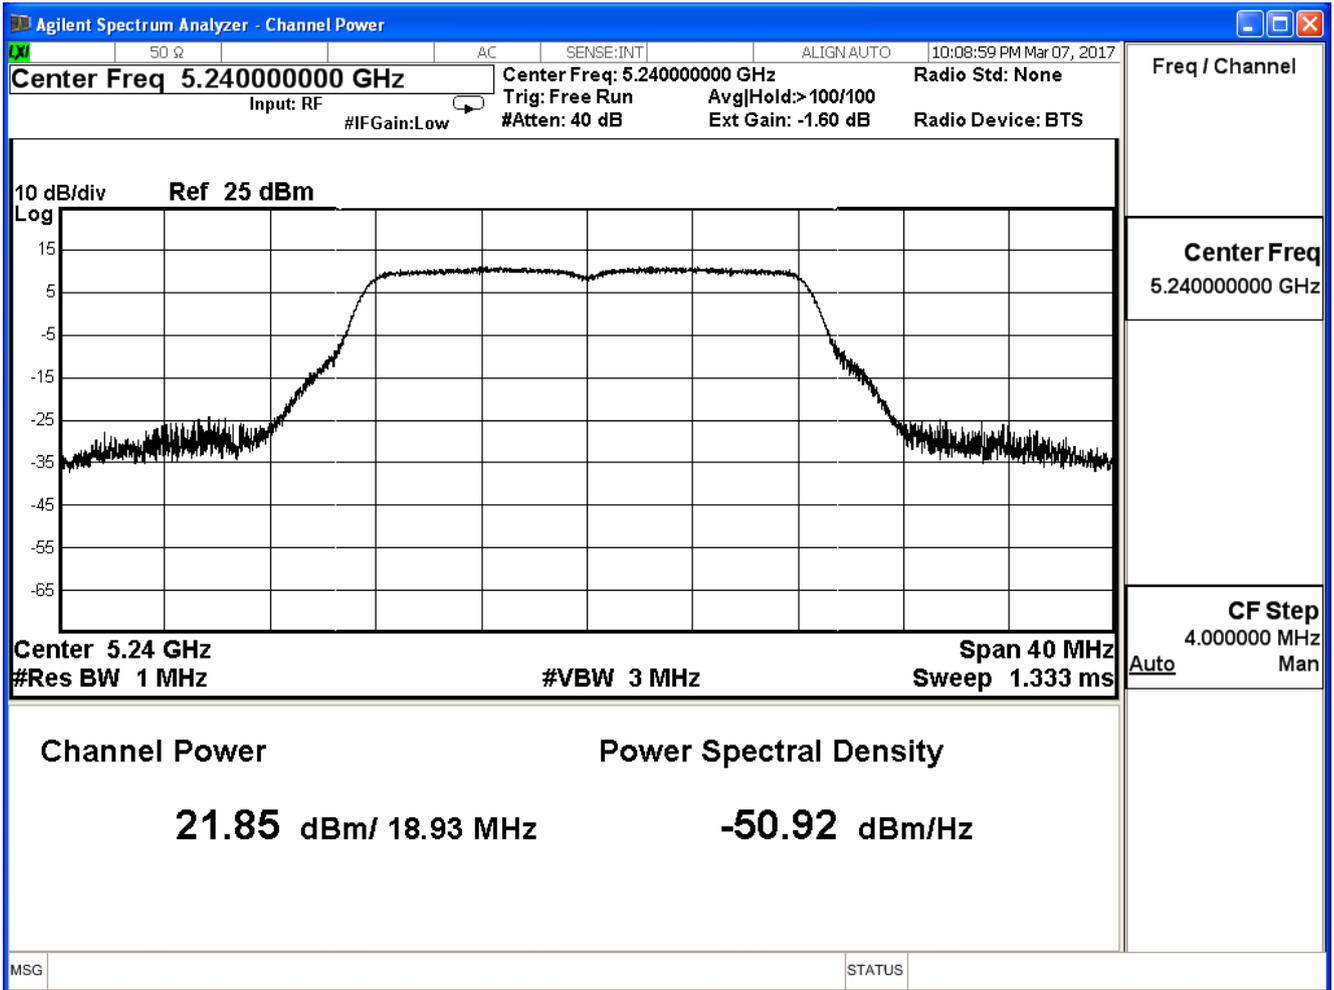

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router            |           |        |
| Test Item    | Peak Transmit Output                                |           |        |
| Test Mode    | Mode 1: Tx ADP: AD890326010-2LF_CDD Mode (802.11 a) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |

## 802.11a (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 25.658             | ≤30                  |
| 44          | 5220            | 27.573             | ≤30                  |
| 48          | 5240            | 27.843             | ≤30                  |

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## IEEE 802.11n(20MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.270             | ≤30                  |
| 44          | 5220            | 21.730             | ≤30                  |
| 48          | 5240            | 22.020             | ≤30                  |


The worst emission of data rate is MCS24.

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 36         | 5180            | 19.270    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44         | 5220            | 21.730    | 21.680 | 21.600 | 21.550 | 21.500 | 21.420 | 21.330 | 21.280 |                |
| 48         | 5240            | 22.020    | --     | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

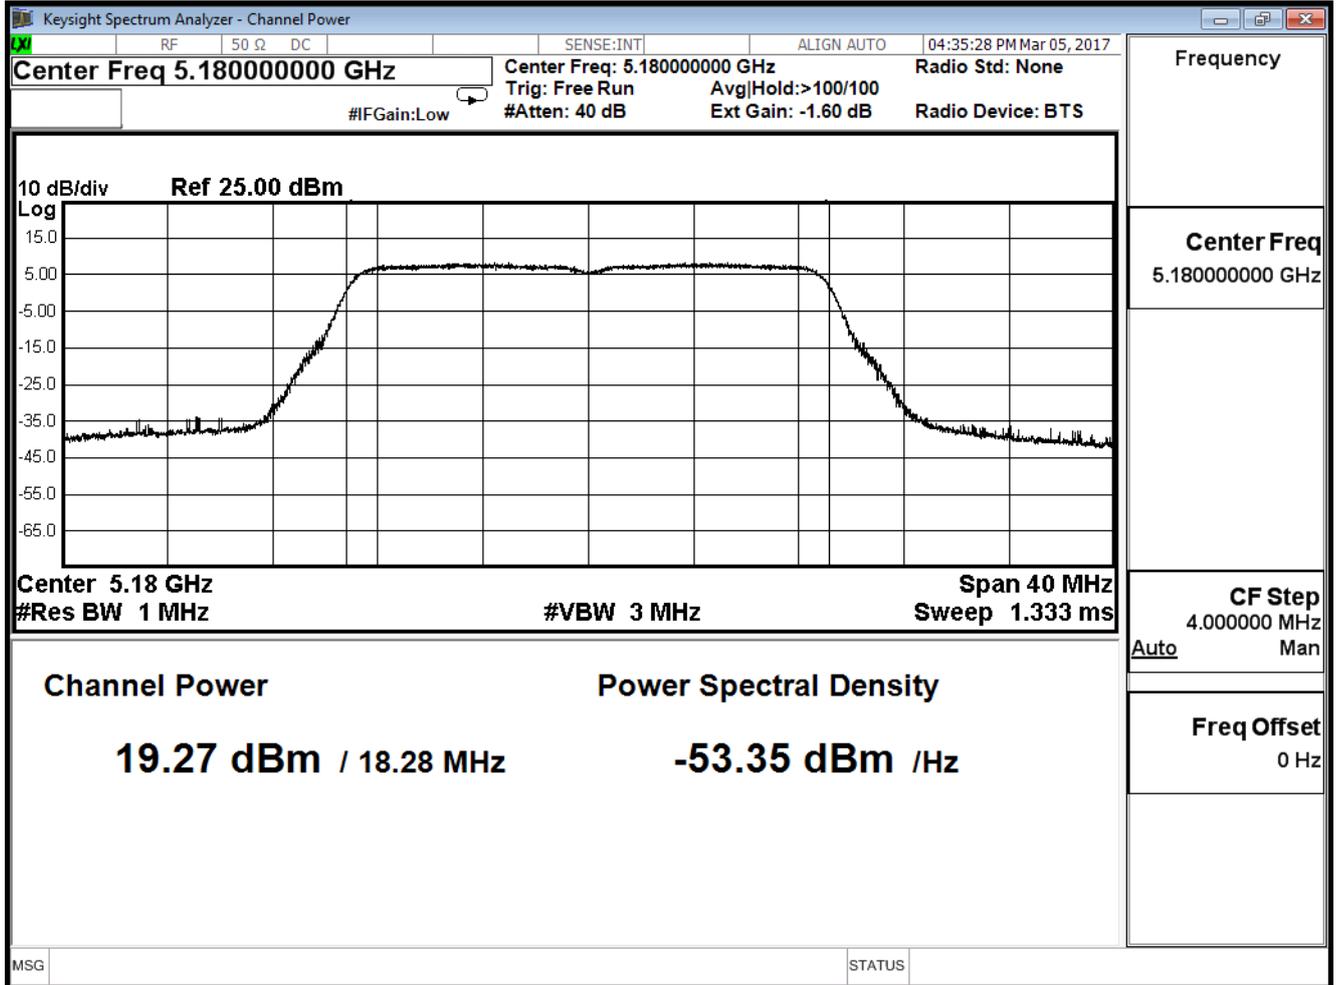

Peak transmit Power - Channel 44

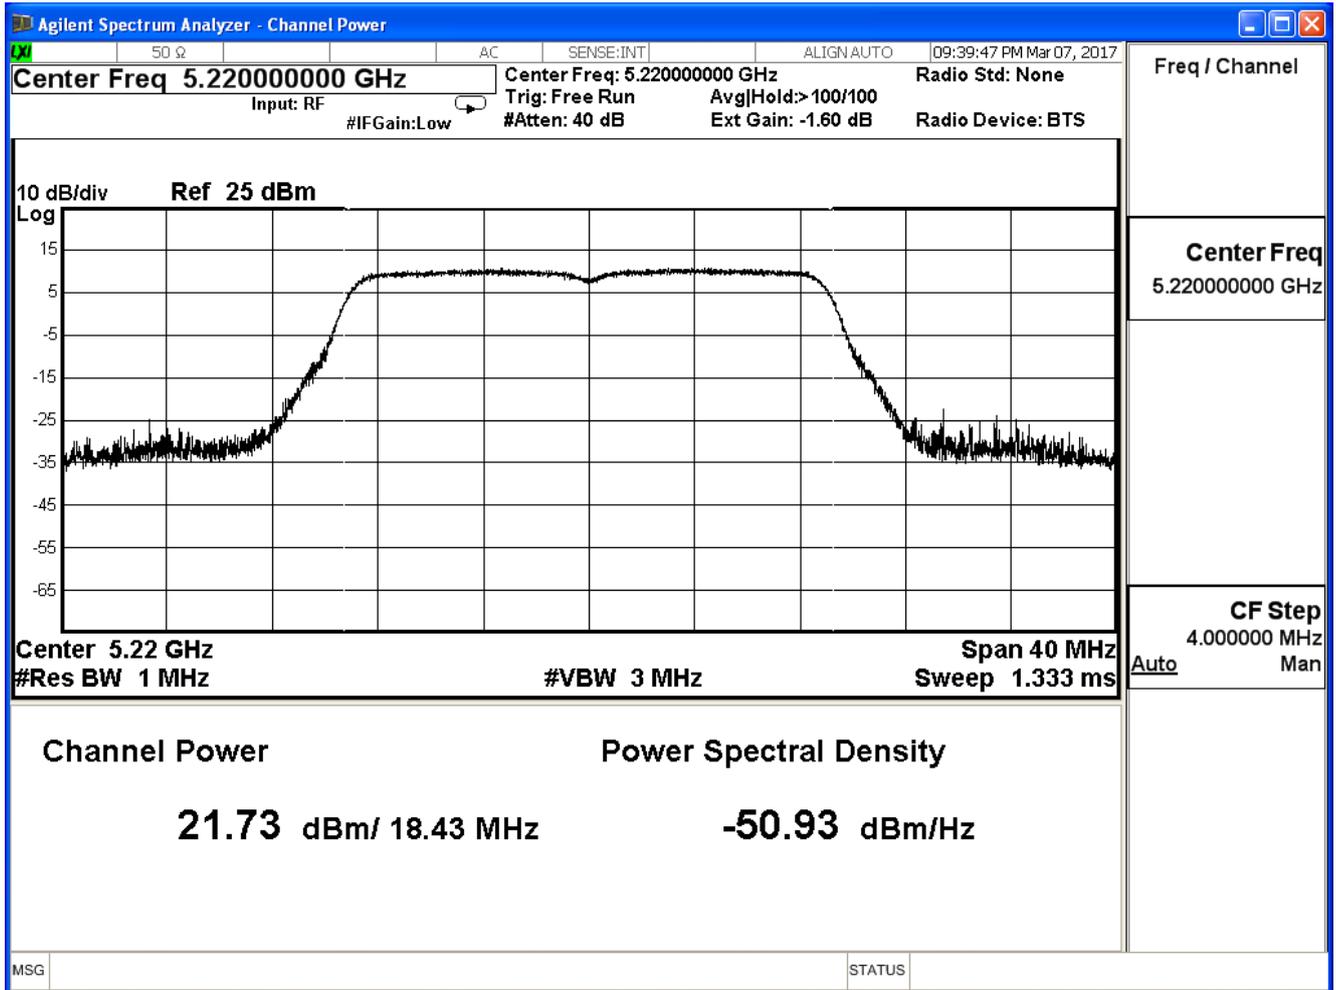

### Peak transmit Power - Channel 48

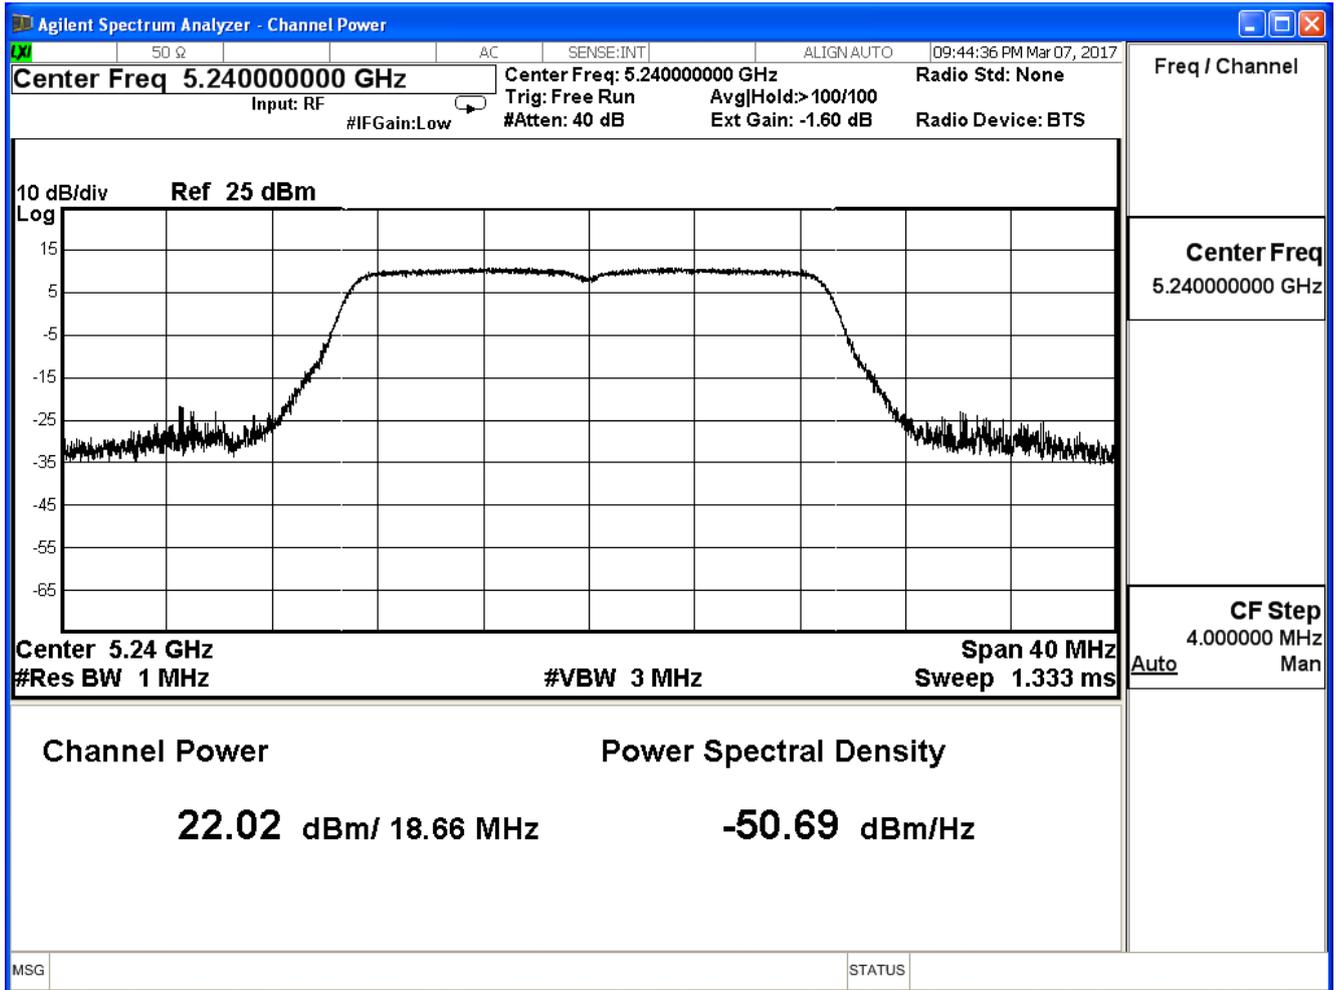

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## IEEE 802.11n(20MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.230             | ≤30                  |
| 44          | 5220            | 21.680             | ≤30                  |
| 48          | 5240            | 22.050             | ≤30                  |


The worst emission of data rate is MCS24.

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 36         | 5180            | 19.230    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44         | 5220            | 21.680    | 21.600 | 21.520 | 21.440 | 21.370 | 21.300 | 21.220 | 21.160 |                |
| 48         | 5240            | 22.050    | --     | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

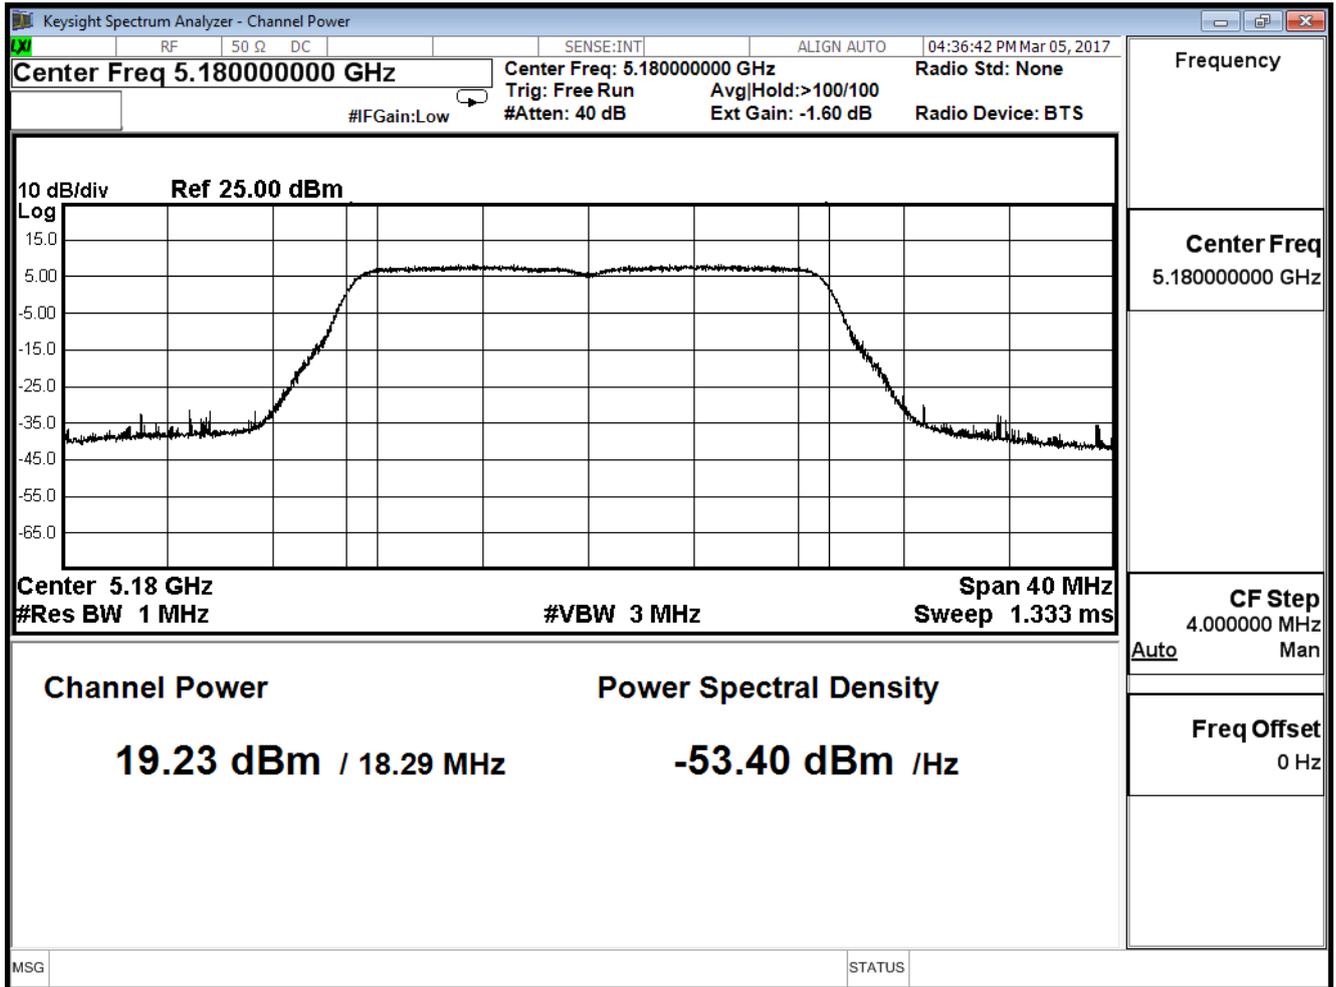

Peak transmit Power - Channel 44

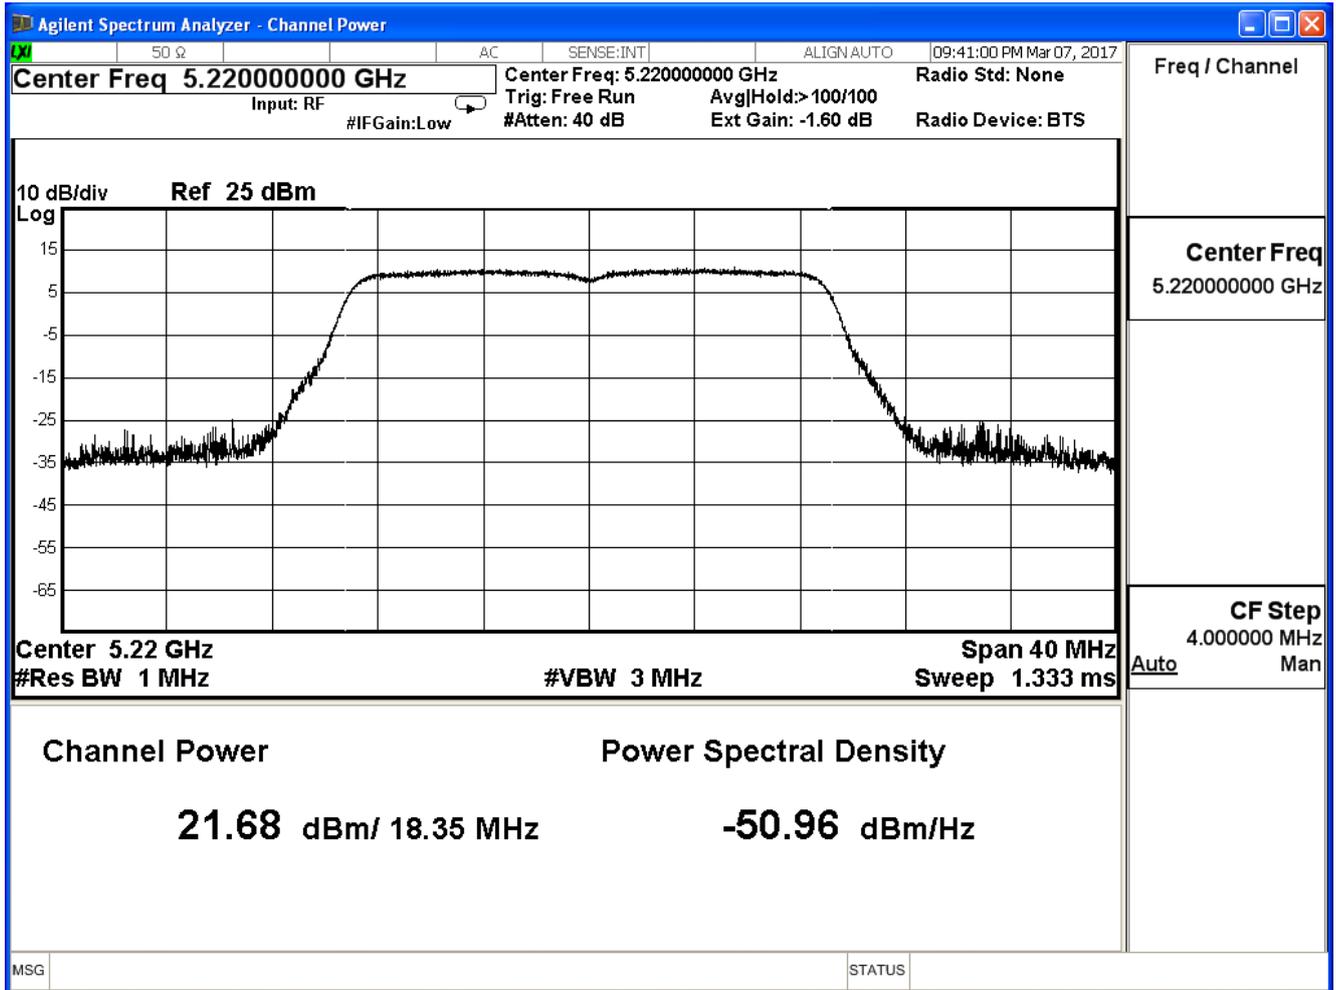

### Peak transmit Power - Channel 48

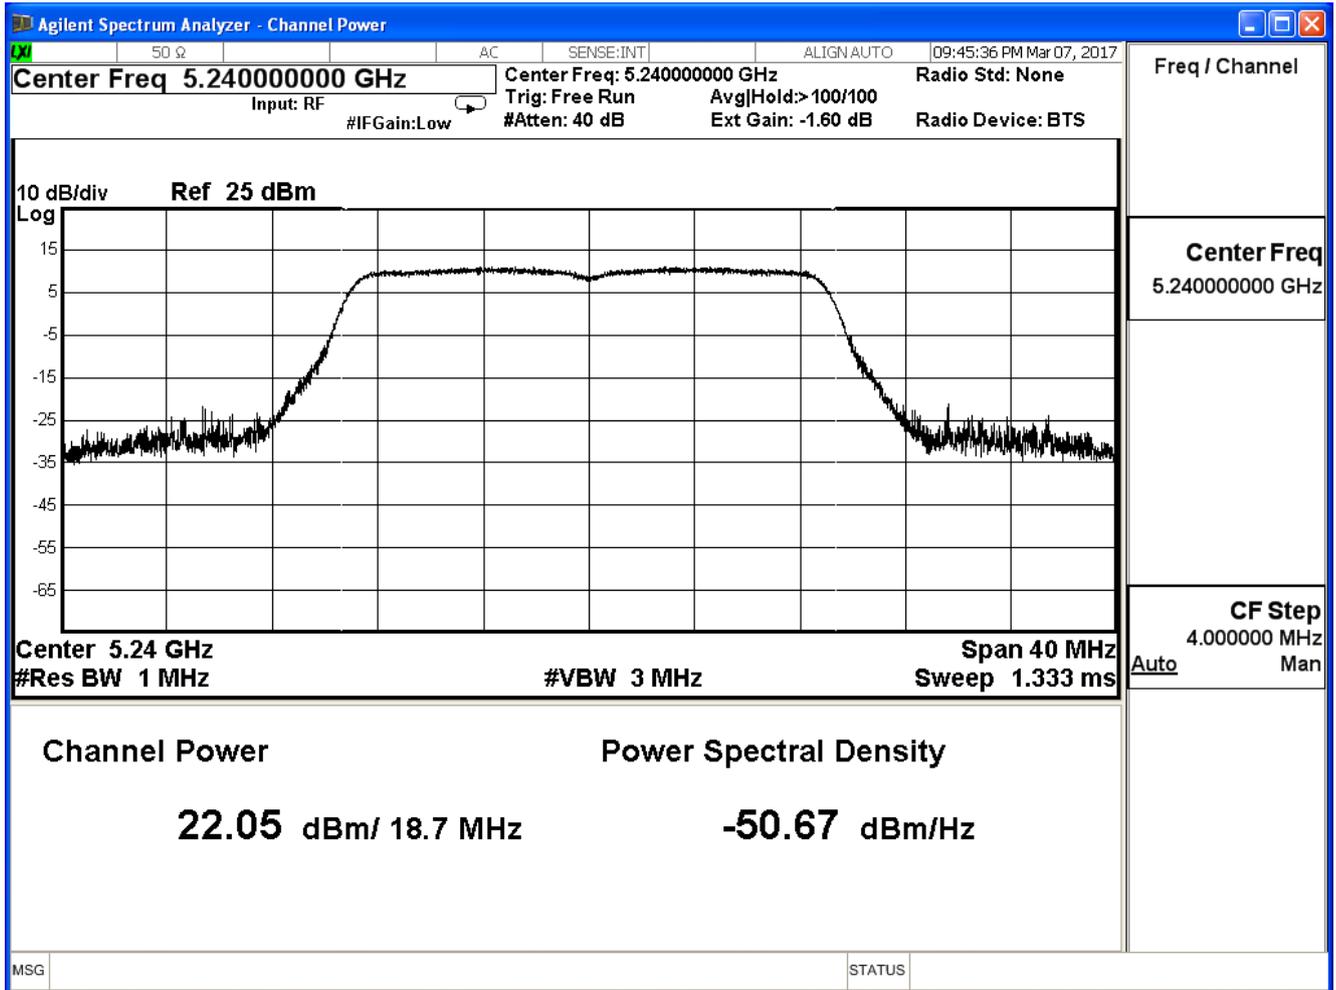

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## IEEE 802.11n(20MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.240             | ≤30                  |
| 44          | 5220            | 21.720             | ≤30                  |
| 48          | 5240            | 22.040             | ≤30                  |


The worst emission of data rate is MCS24.

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 36         | 5180            | 19.240    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44         | 5220            | 21.720    | 21.660 | 21.600 | 21.550 | 21.480 | 21.420 | 21.330 | 21.240 |                |
| 48         | 5240            | 22.040    | --     | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

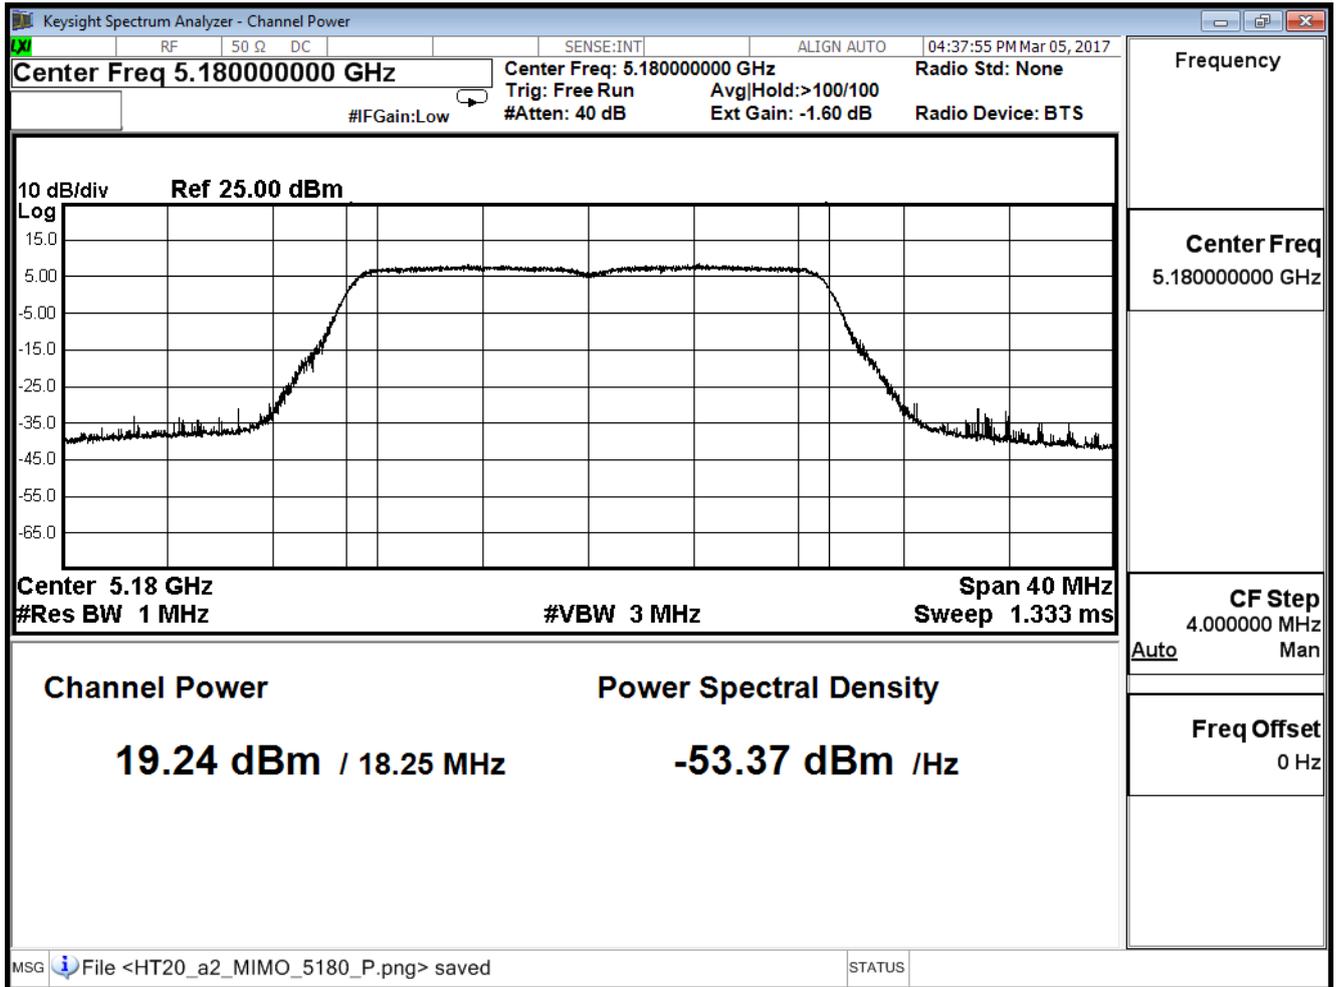

Peak transmit Power - Channel 44

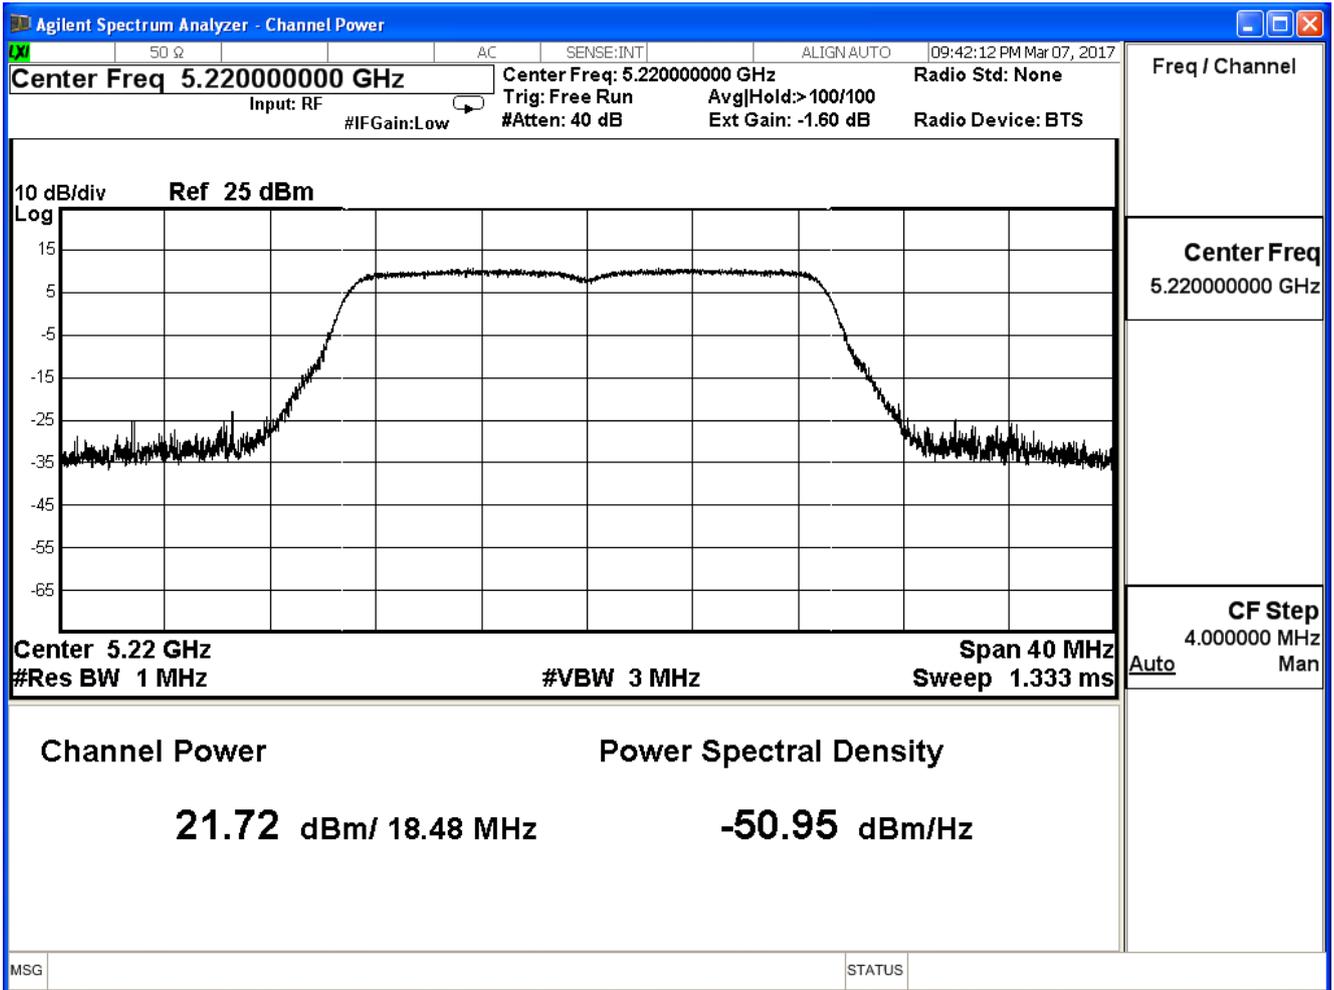

Peak transmit Power - Channel 48

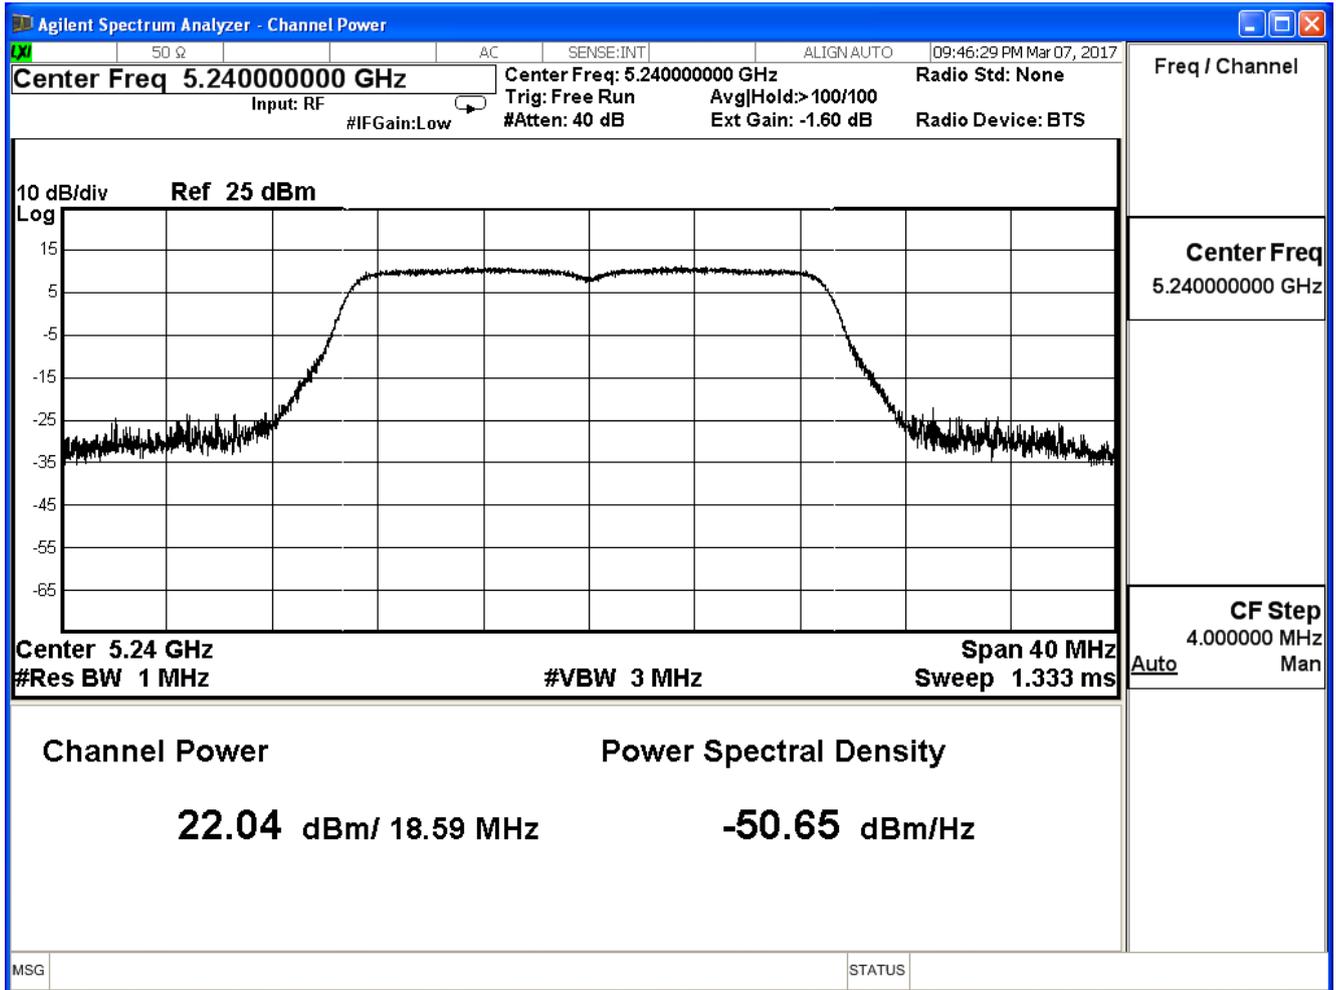

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |


## IEEE 802.11n(20MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 19.220             | ≤30                  |
| 44          | 5220            | 21.750             | ≤30                  |
| 48          | 5240            | 22.010             | ≤30                  |


The worst emission of data rate is MCS24.

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 36         | 5180            | 19.220    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 44         | 5220            | 21.750    | 21.700 | 21.660 | 21.610 | 21.540 | 21.440 | 21.320 | 21.260 |                |
| 48         | 5240            | 22.010    | --     | --     | --     | --     | --     | --     | --     |                |


Peak transmit Power - Channel 36

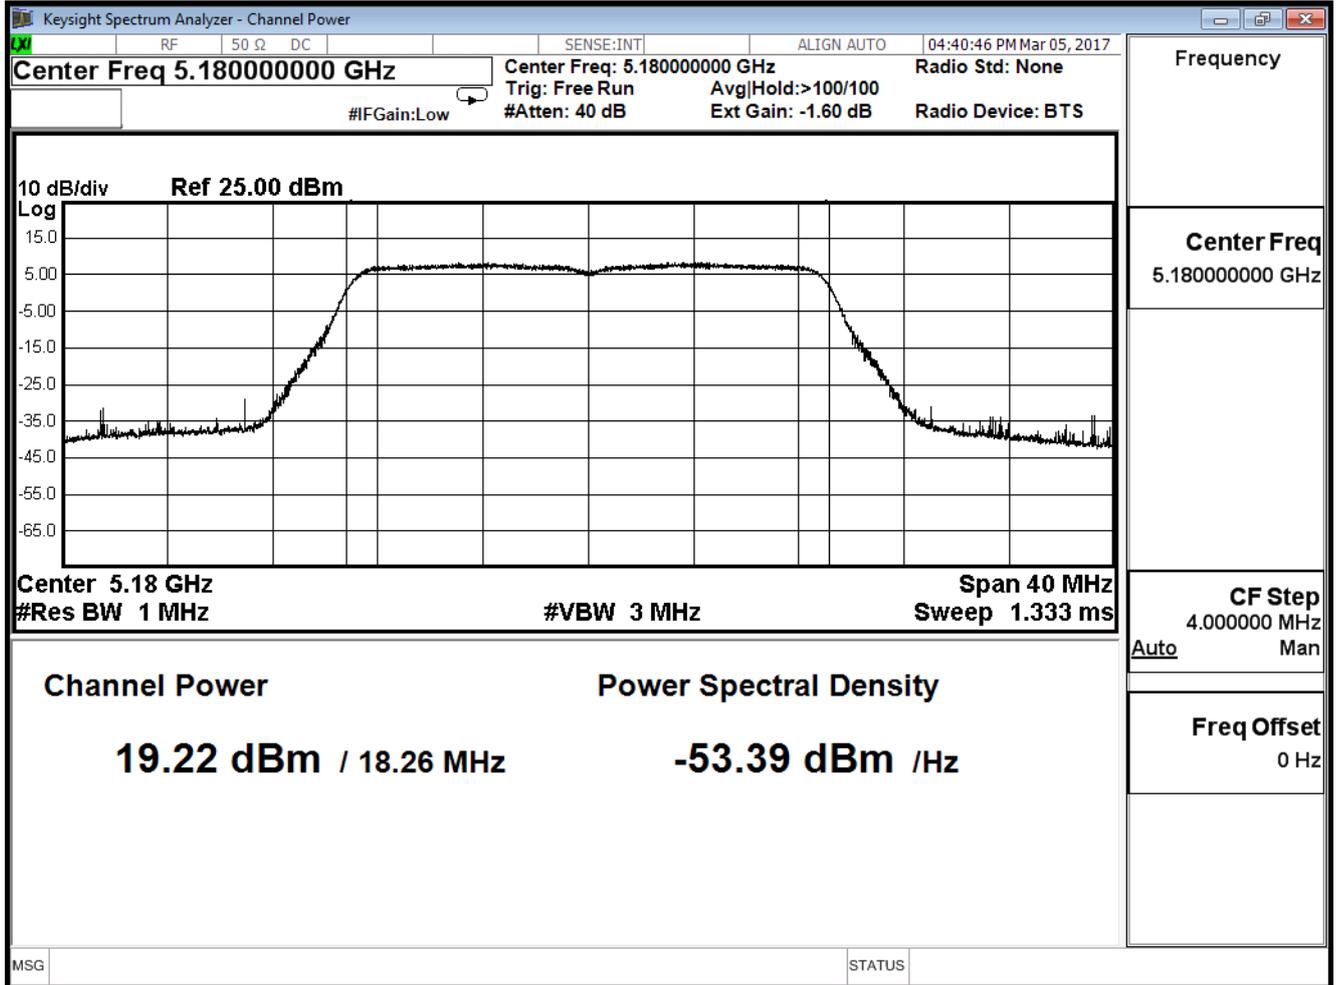

### Peak transmit Power - Channel 44

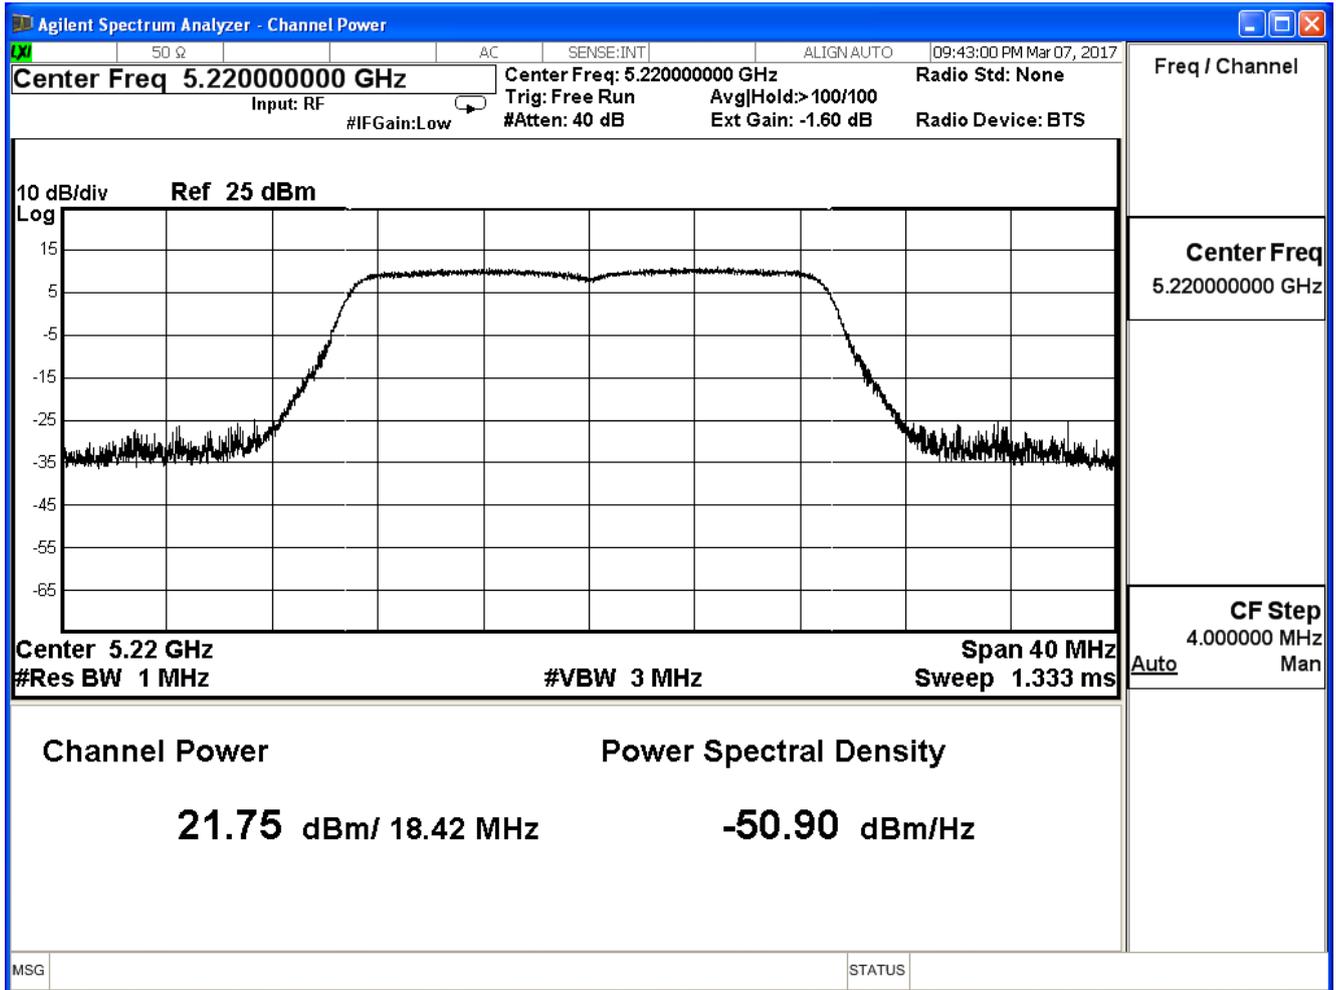

Peak transmit Power - Channel 48

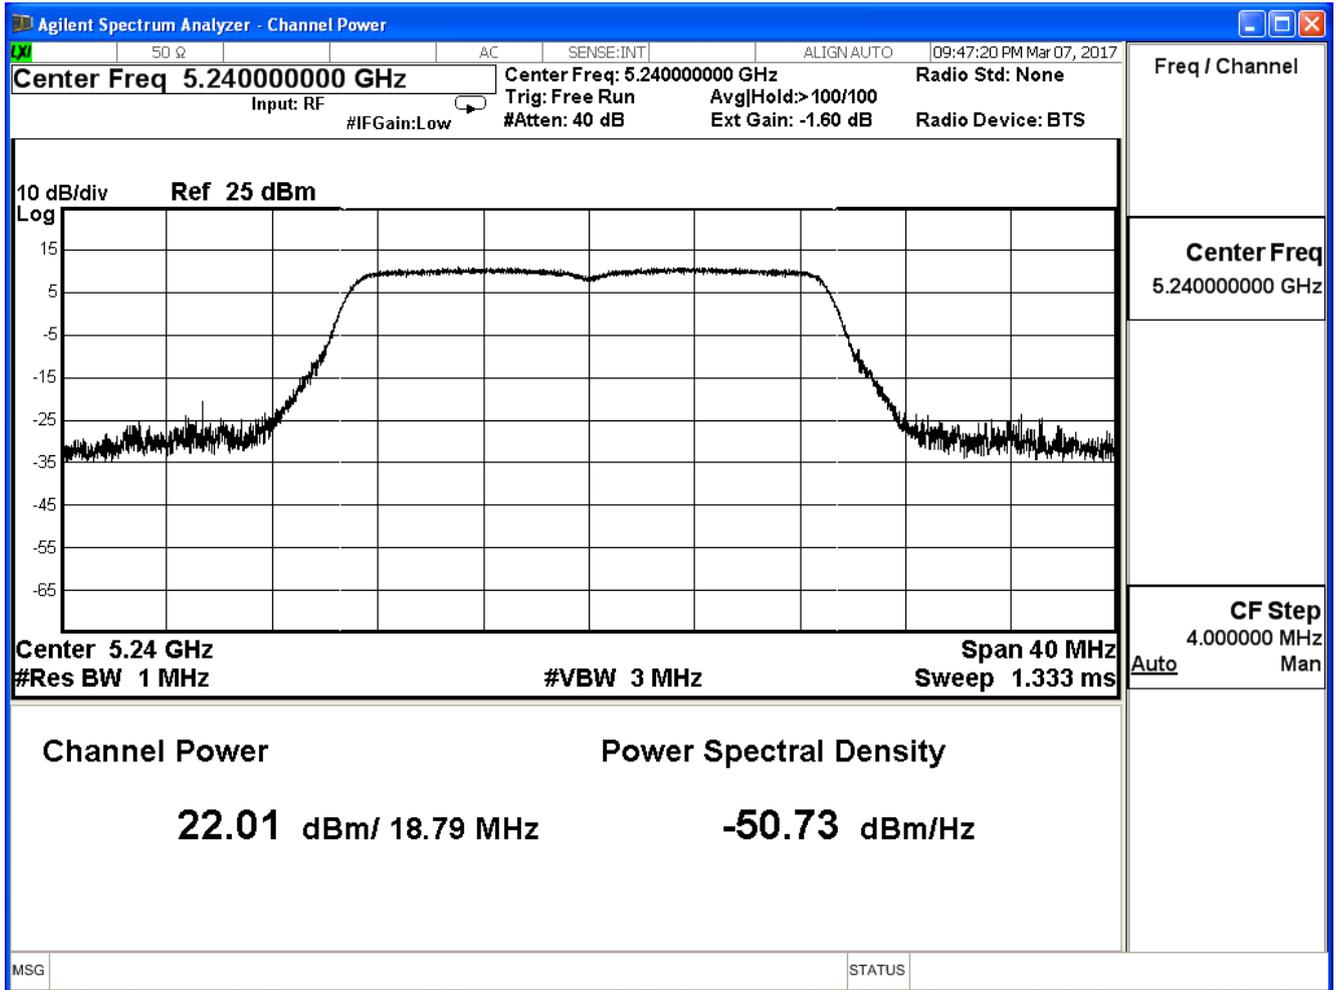

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02  | Test Site | SR10-H |

## IEEE 802.11n(20MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 25.261             | ≤30                  |
| 44          | 5220            | 27.741             | ≤30                  |
| 48          | 5240            | 28.051             | ≤30                  |

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


## IEEE 802.11n(40MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 16.560             | ≤30                  |
| 46          | 5230            | 22.160             | ≤30                  |


The worst emission of data rate is MCS 24

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 38         | 5190            | 16.560    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 46         | 5230            | 22.160    | 22.020 | 21.900 | 21.810 | 21.620 | 21.530 | 21.410 | 21.220 |                |

Peak transmit Power - Channel 38

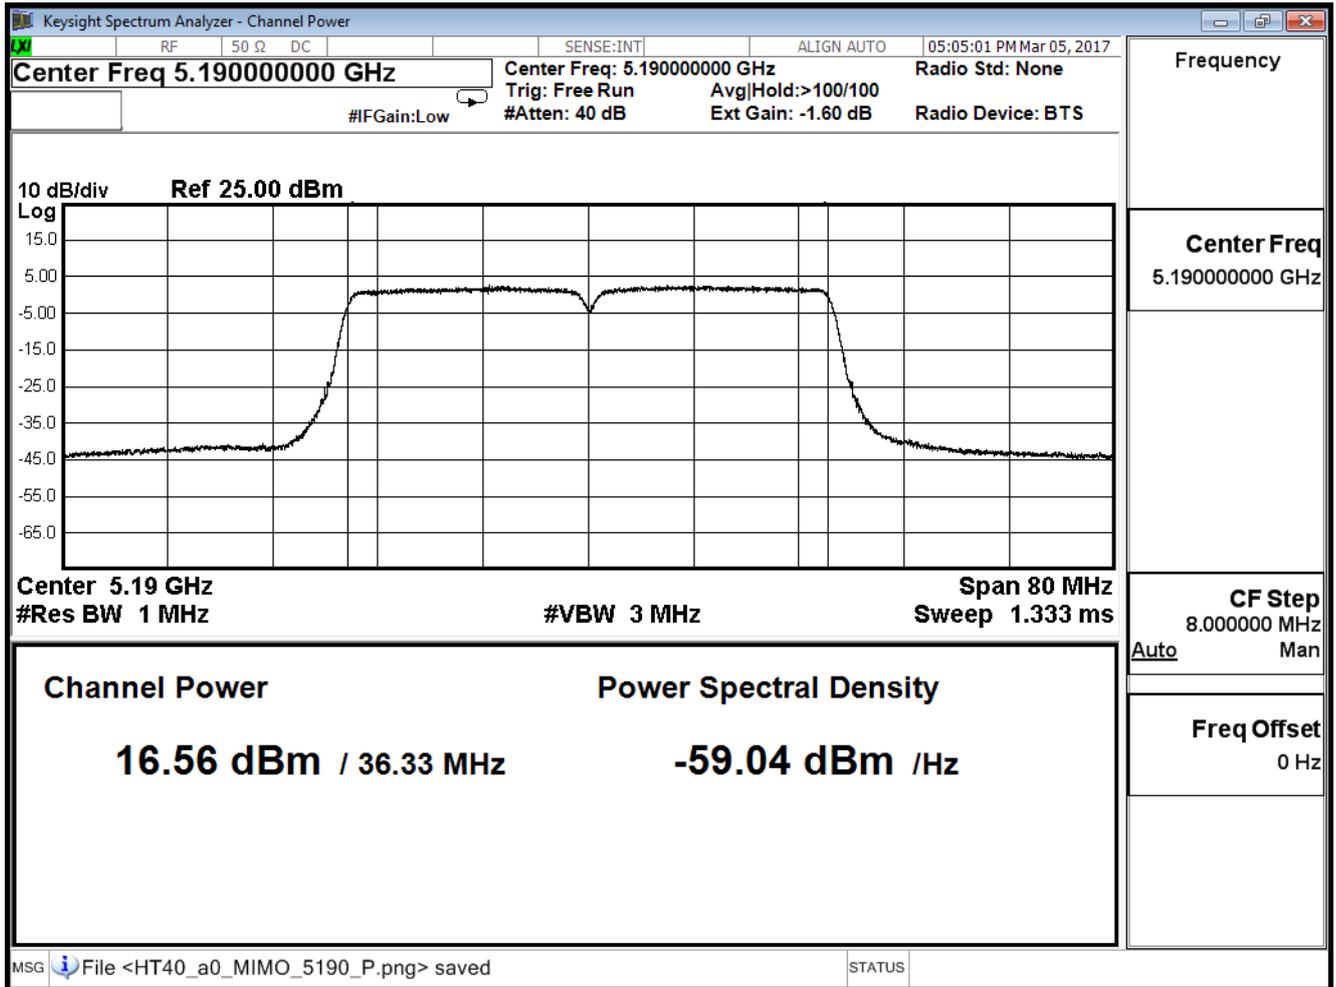

Peak transmit Power - Channel 46

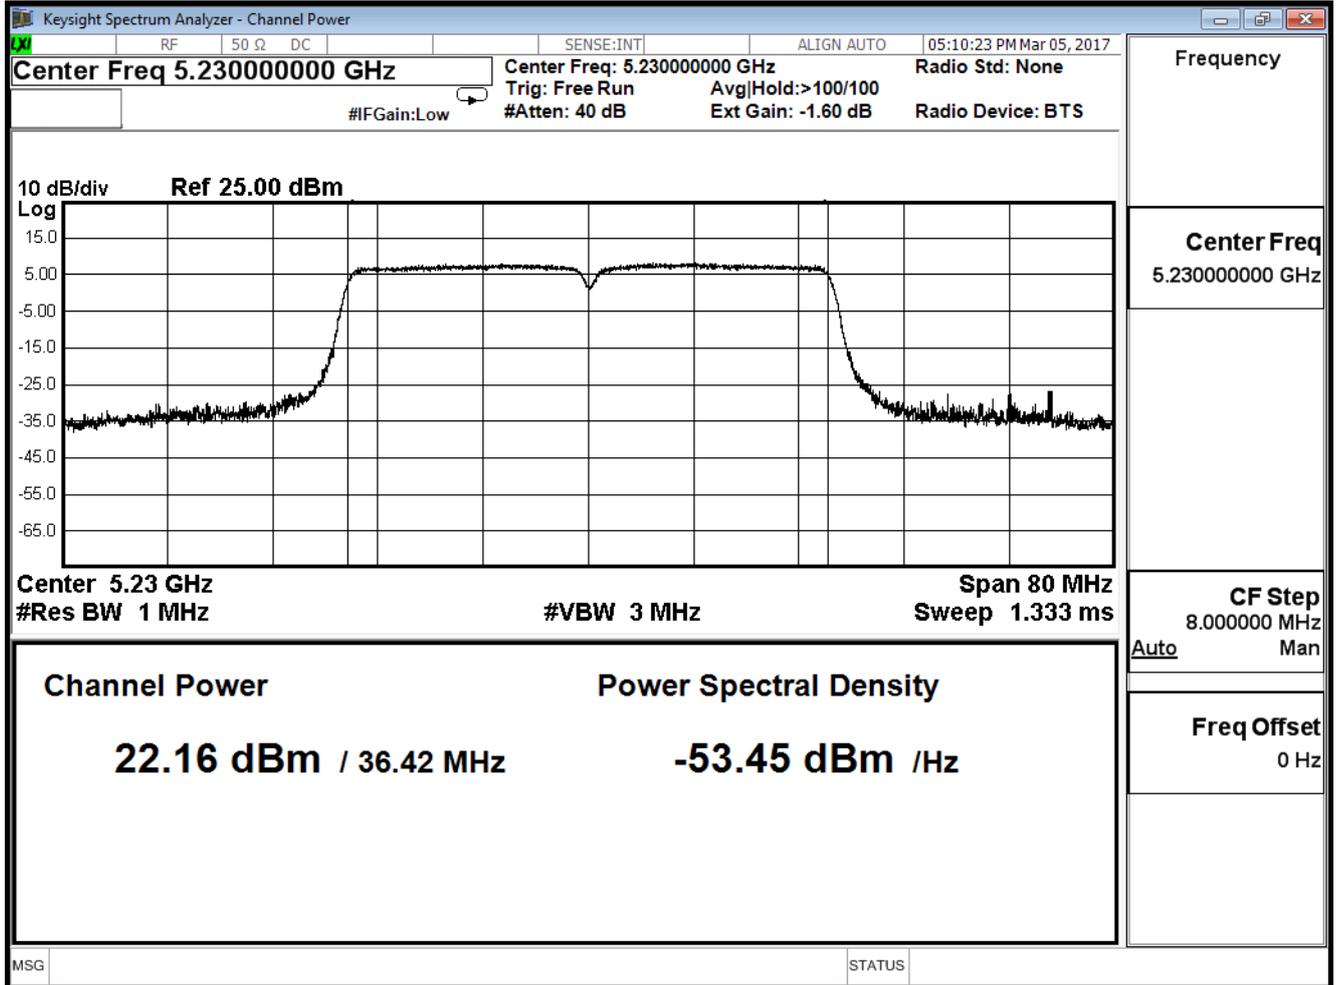

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                   |           |        |
| Test Item    | Peak Transmit Output                                       |           |        |
| Test Mode    | Mode 2: Tx_AD P: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05   | Test Site | SR10-H |


## IEEE 802.11n(40MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 16.580             | ≤30                  |
| 46          | 5230            | 22.210             | ≤30                  |


The worst emission of data rate is MCS 24

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 38         | 5190            | 16.580    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 46         | 5230            | 22.210    | 21.120 | 21.020 | 21.920 | 20.810 | 20.660 | 20.430 | 20.120 |                |

Peak transmit Power - Channel 38

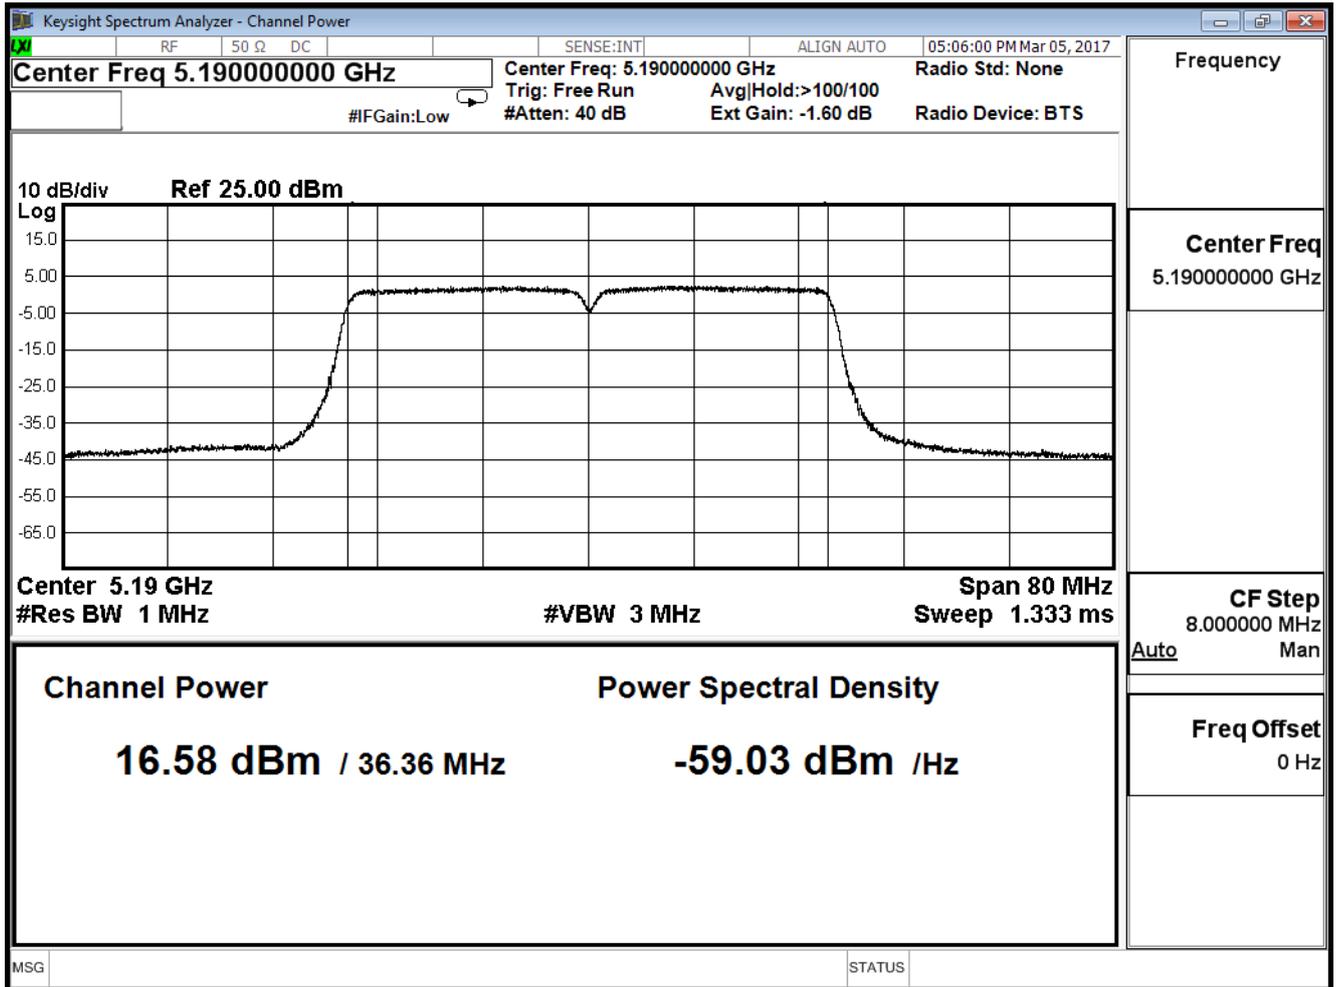

Peak transmit Power - Channel 46

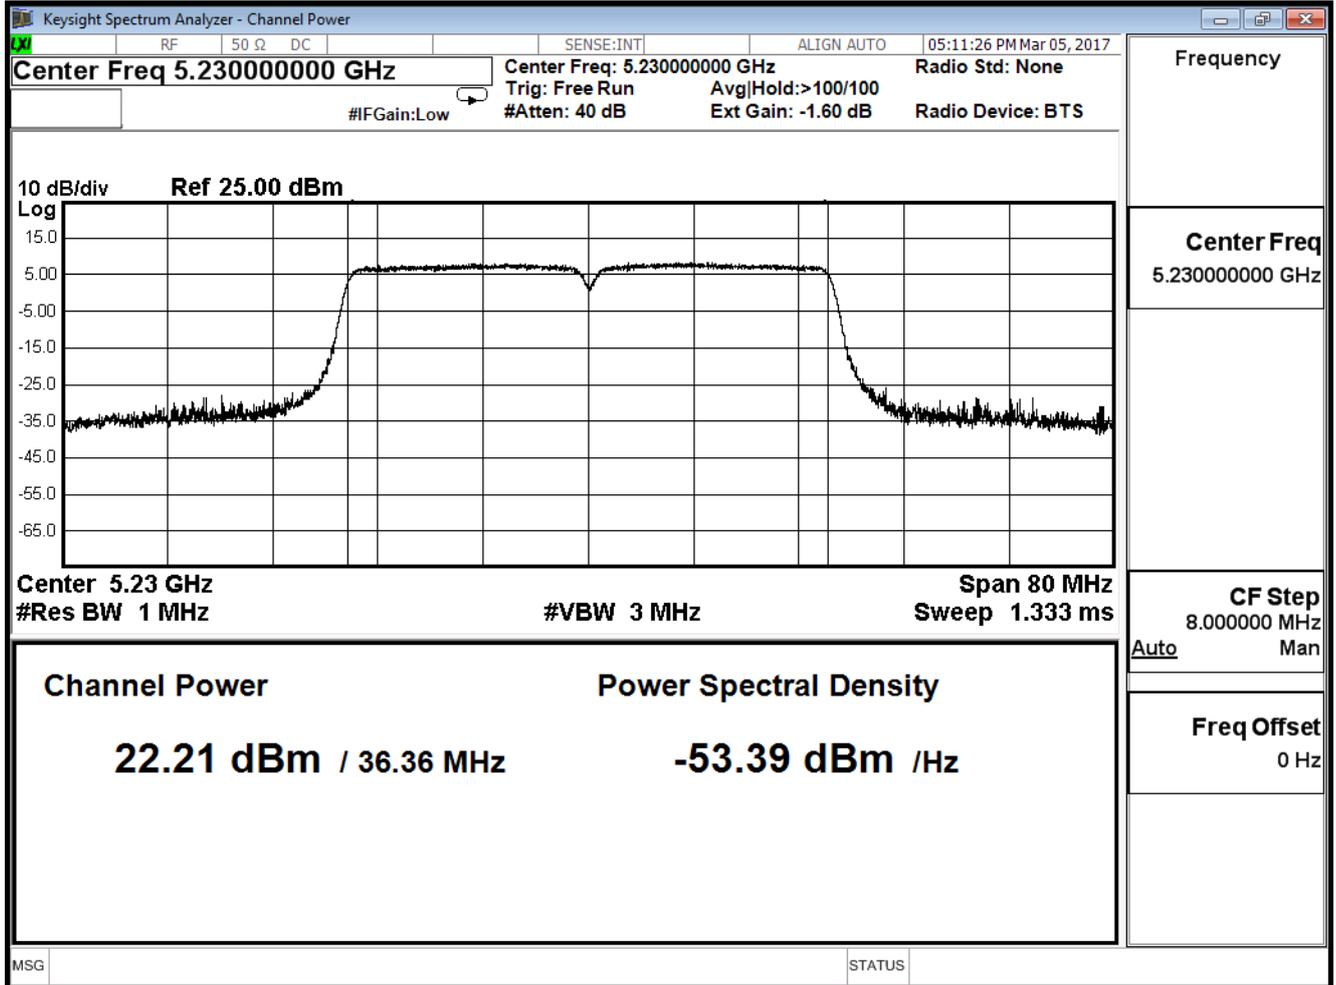

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


## IEEE 802.11n(40MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 16.600             | ≤30                  |
| 46          | 5230            | 22.140             | ≤30                  |


The worst emission of data rate is MCS 24

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 38         | 5190            | 16.600    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 46         | 5230            | 22.140    | 22.010 | 21.910 | 21.800 | 21.660 | 21.430 | 21.210 | 21.030 |                |

Peak transmit Power - Channel 38

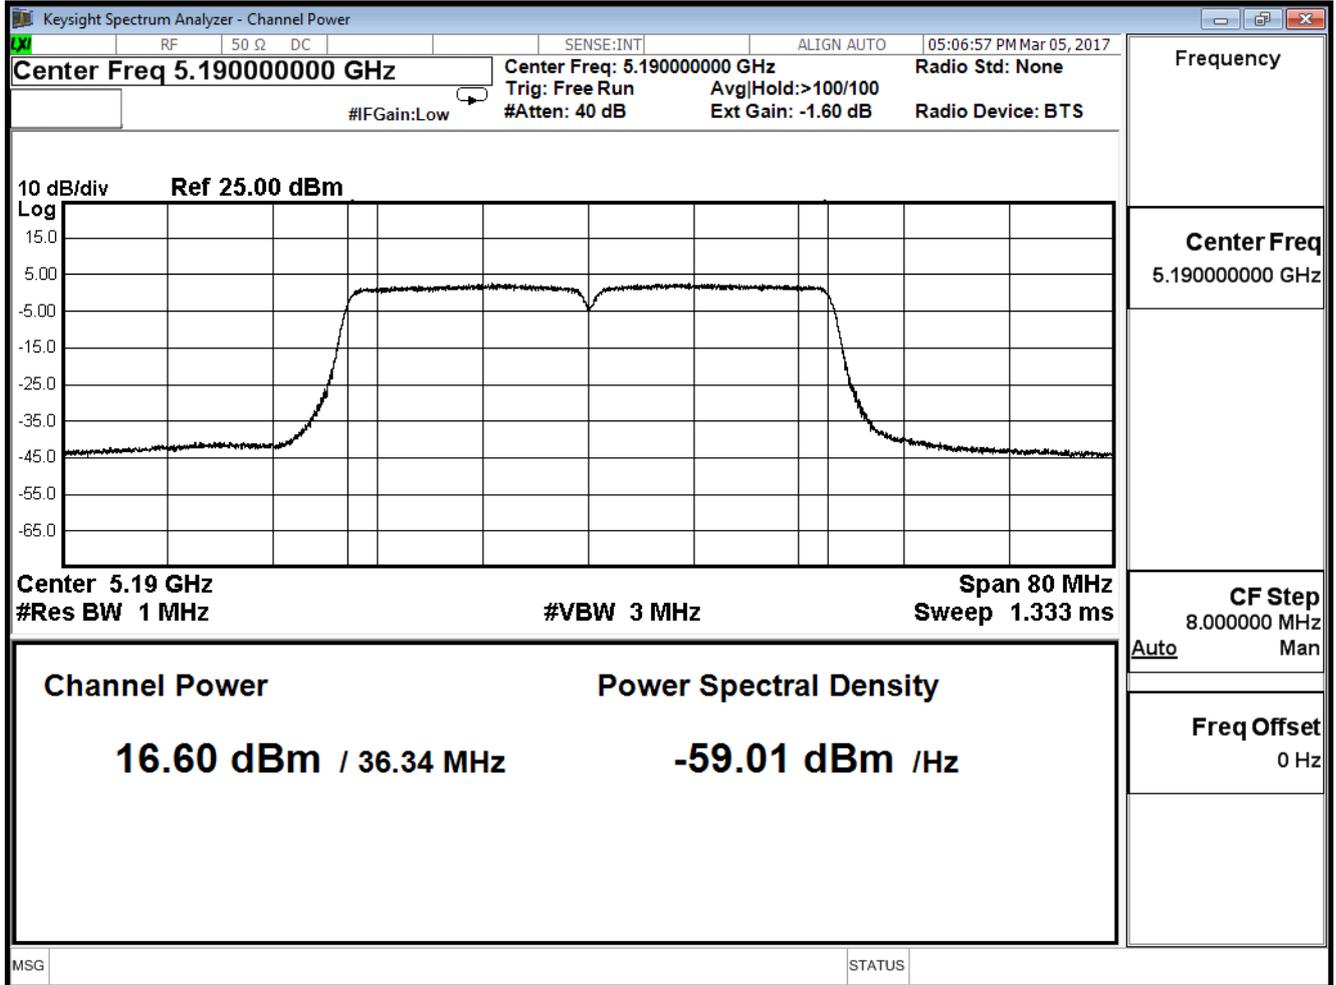

Peak transmit Power - Channel 46

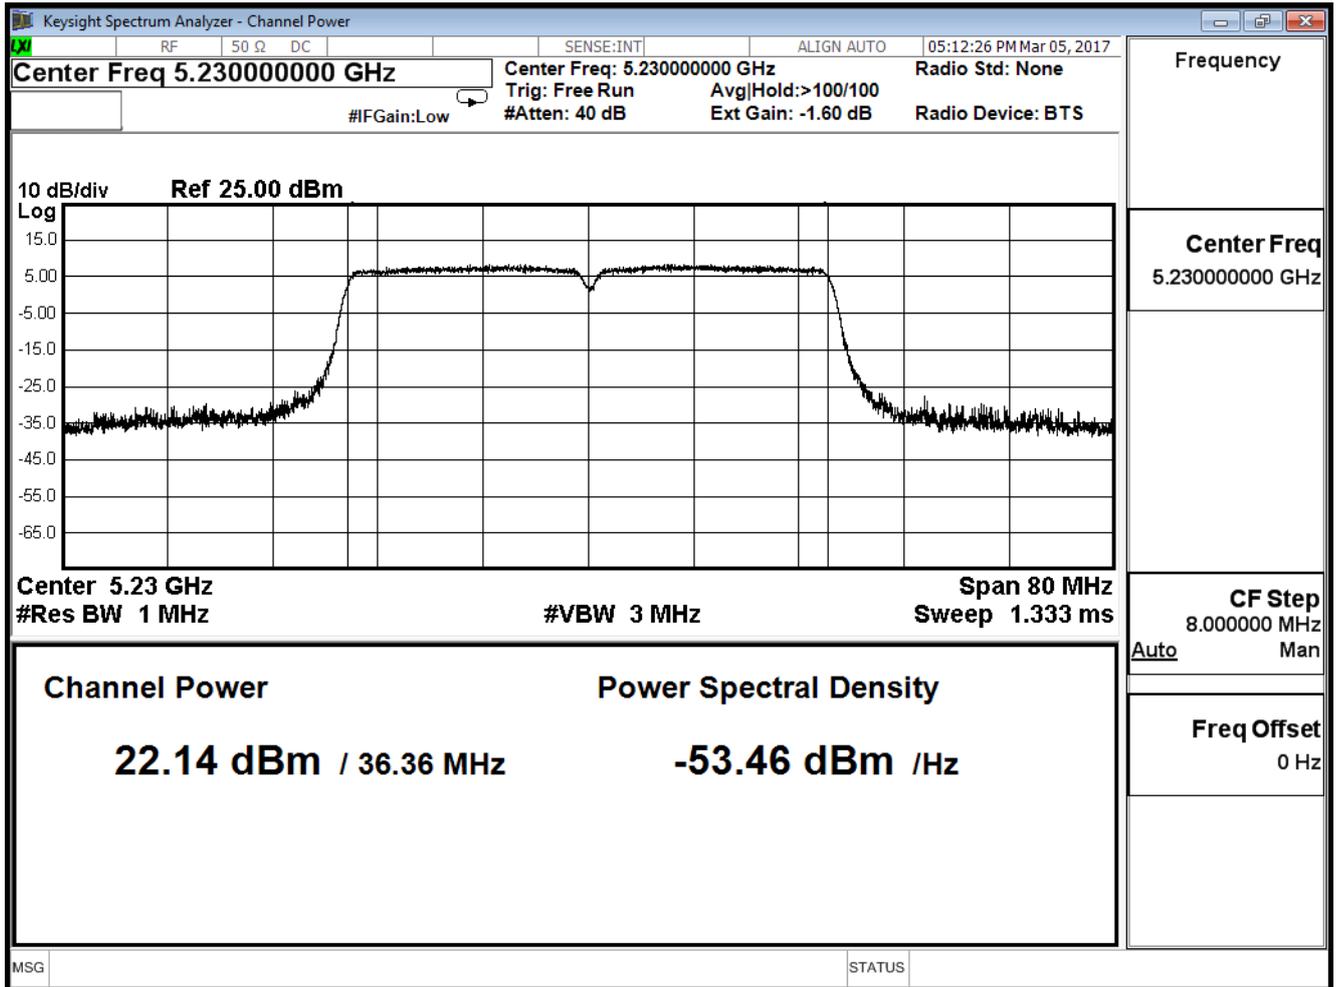

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


## IEEE 802.11n(40MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 16.580             | ≤30                  |
| 46          | 5230            | 22.130             | ≤30                  |


The worst emission of data rate is MCS 24

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 24        | 25     | 26     | 27     | 28     | 29     | 30     | 31     |                |
| 38         | 5190            | 16.580    | --     | --     | --     | --     | --     | --     | --     | ≤30dBm         |
| 46         | 5230            | 22.130    | 22.010 | 21.900 | 21.710 | 21.530 | 21.320 | 21.210 | 21.080 |                |

Peak transmit Power - Channel 38

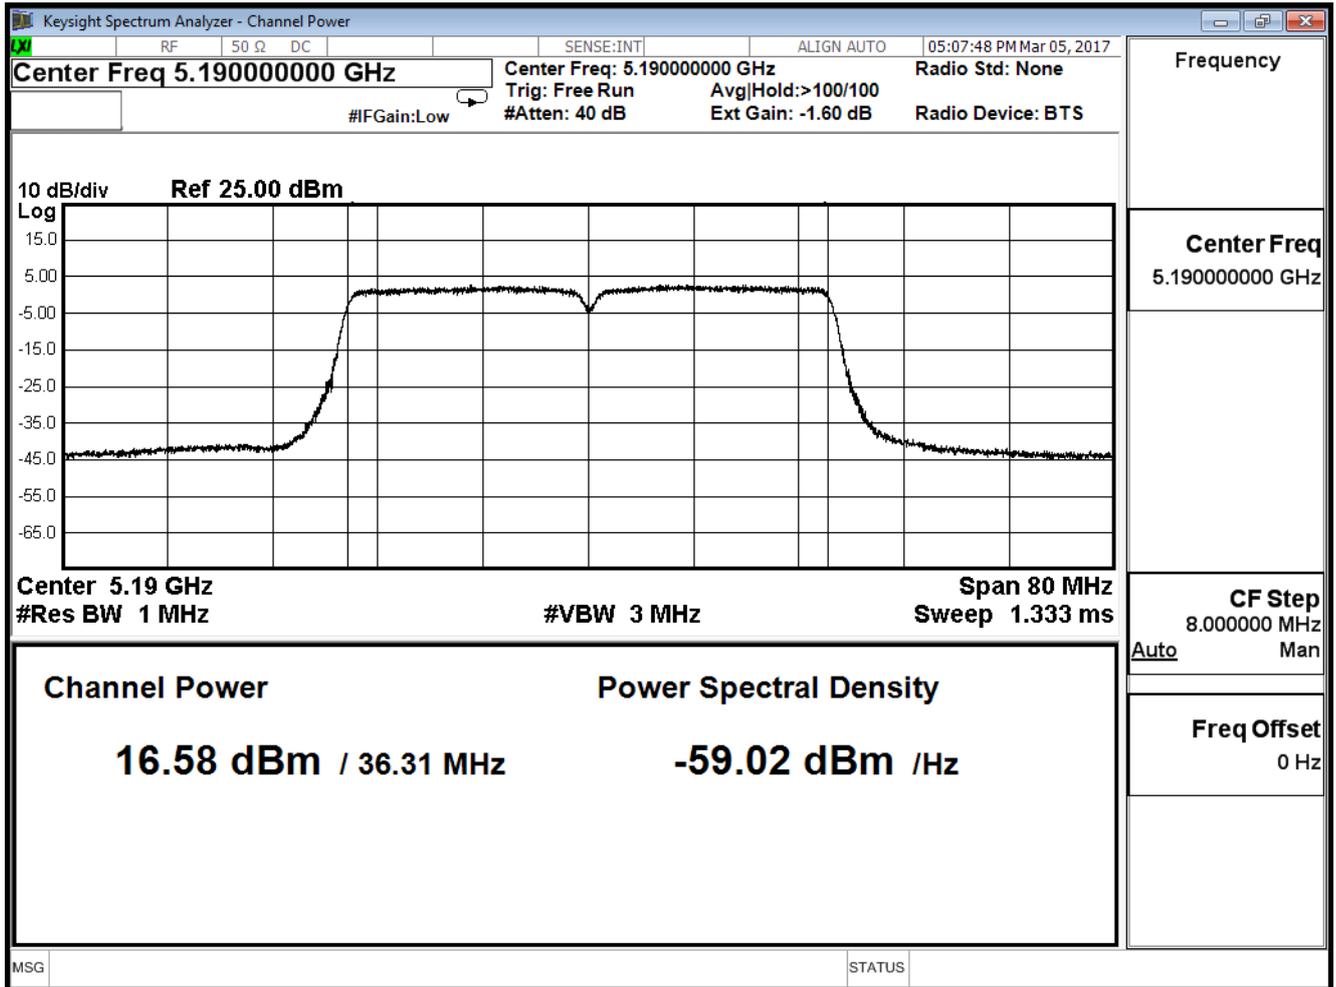

Peak transmit Power - Channel 46

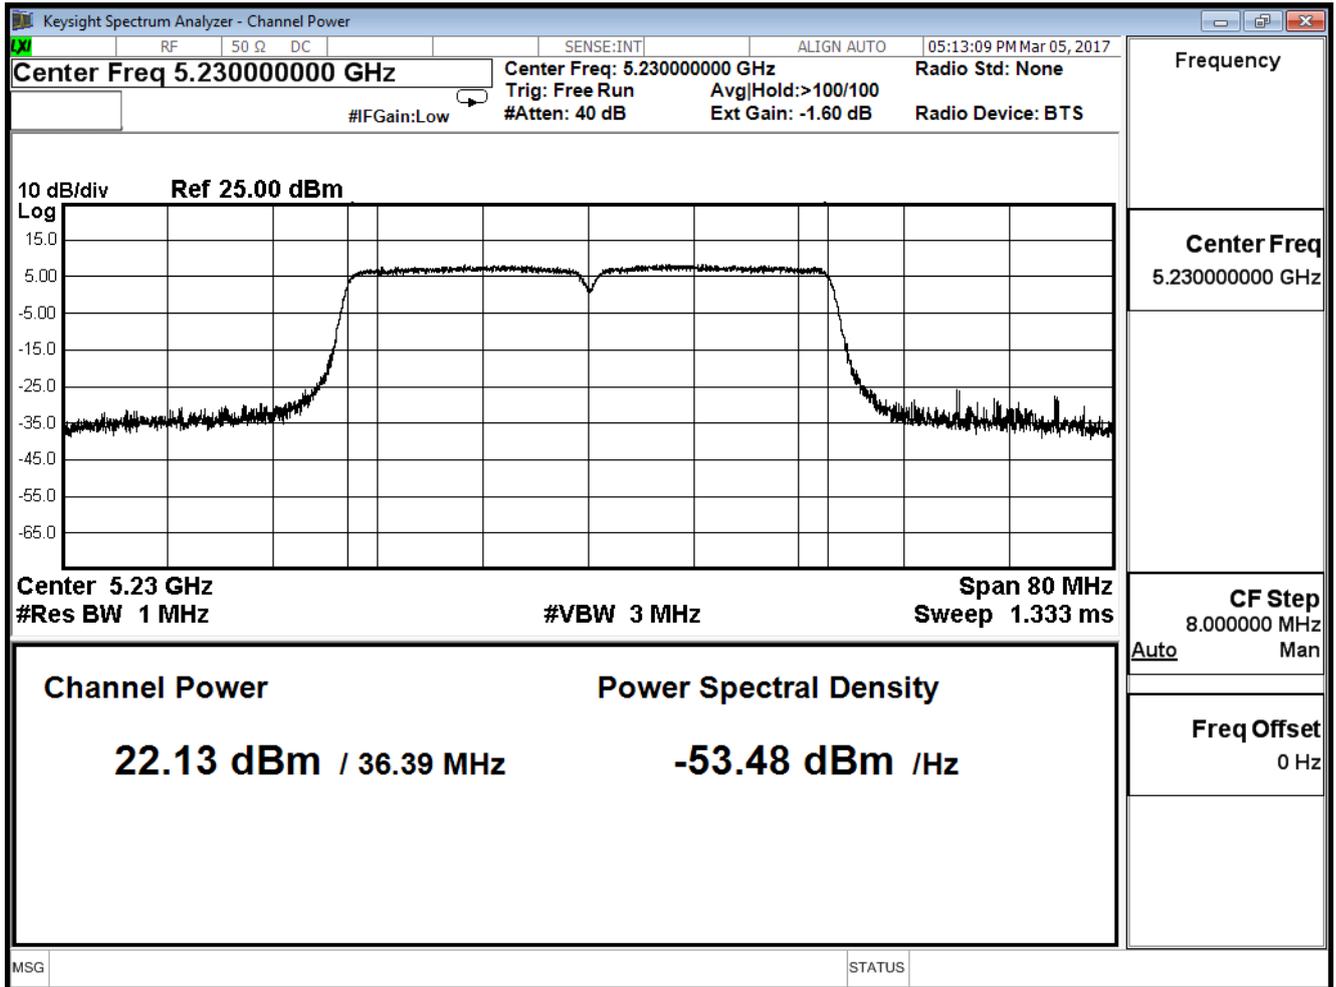

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx ADP: AD890326010-2LF MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |

## IEEE 802.11n(40MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 22.601             | ≤30                  |
| 46          | 5230            | 28.181             | ≤30                  |

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 17.590             | ≤30                  |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |       |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|-------|--------|--------|--------|--------|----------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5     | 6      | 7      | 8      | 9      |                |
| 42         | 5210            | 17.590    | 17.320 | 17.180 | 17.020 | 16.890 | 16.70 | 16.500 | 16.330 | 16.080 | 15.920 | ≤30dBm         |

Peak transmit Power - Channel 42

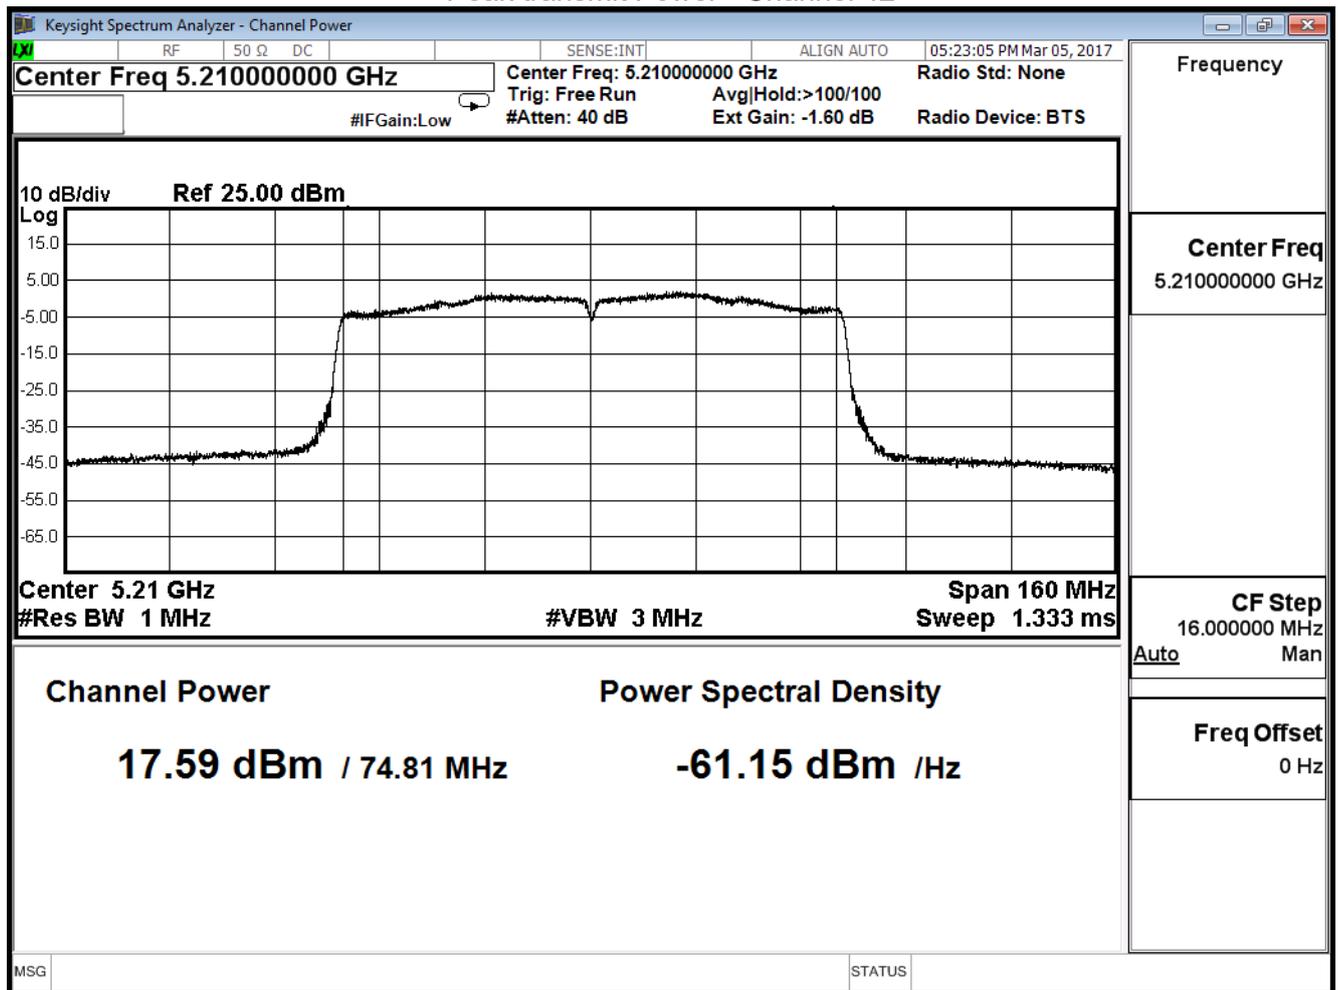

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 17.630             | ≤30                  |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                |
| 42         | 5210            | 17.630    | 17.430 | 17.180 | 17.020 | 16.930 | 16.720 | 16.580 | 16.320 | 16.110 | 15.920 | ≤30dBm         |

Peak transmit Power - Channel 42

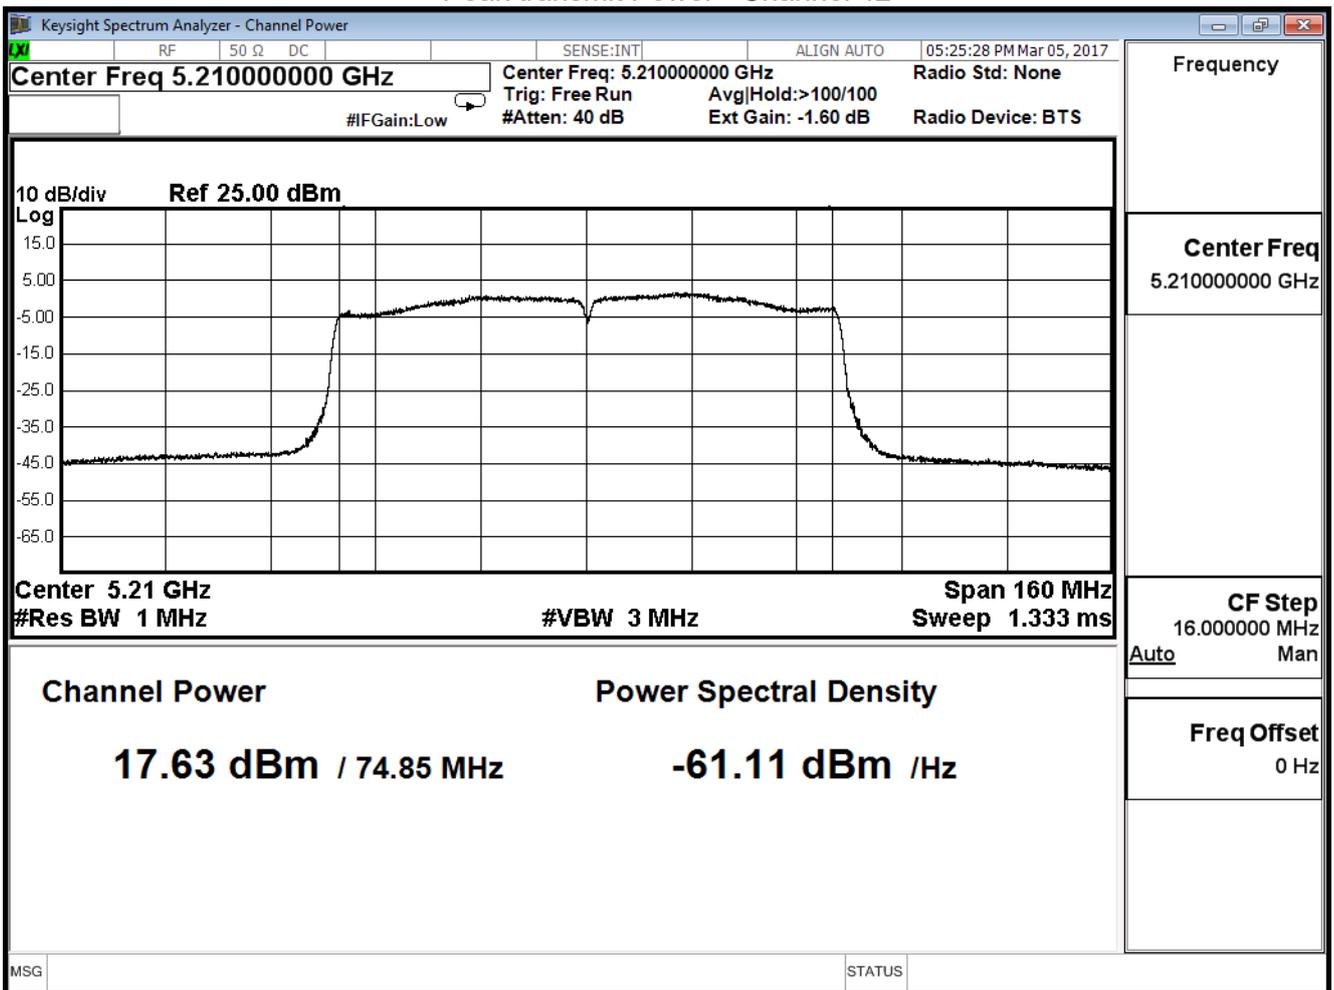

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 17.630             | ≤30                  |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                |
| 42         | 5210            | 17.630    | 17.510 | 17.330 | 17.100 | 16.920 | 16.820 | 16.530 | 16.230 | 16.080 | 15.820 | ≤30dBm         |

Peak transmit Power - Channel 42

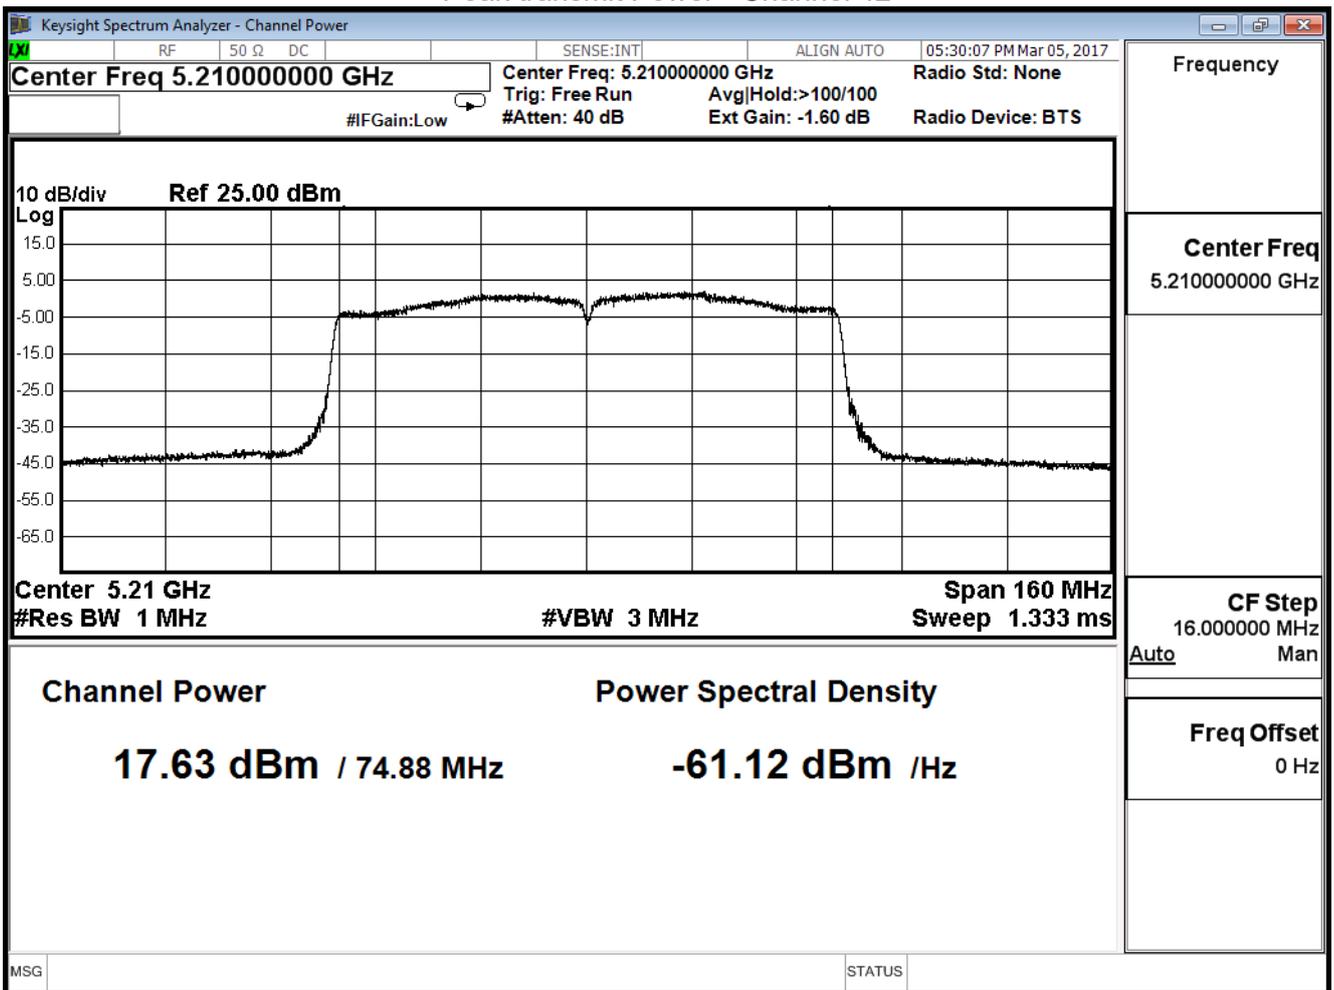

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 17.590             | ≤30                  |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                |
| 42         | 5210            | 17.590    | 17.220 | 17.030 | 16.890 | 16.660 | 16.320 | 16.180 | 15.990 | 15.780 | 15.580 | ≤30dBm         |

Peak transmit Power - Channel 42

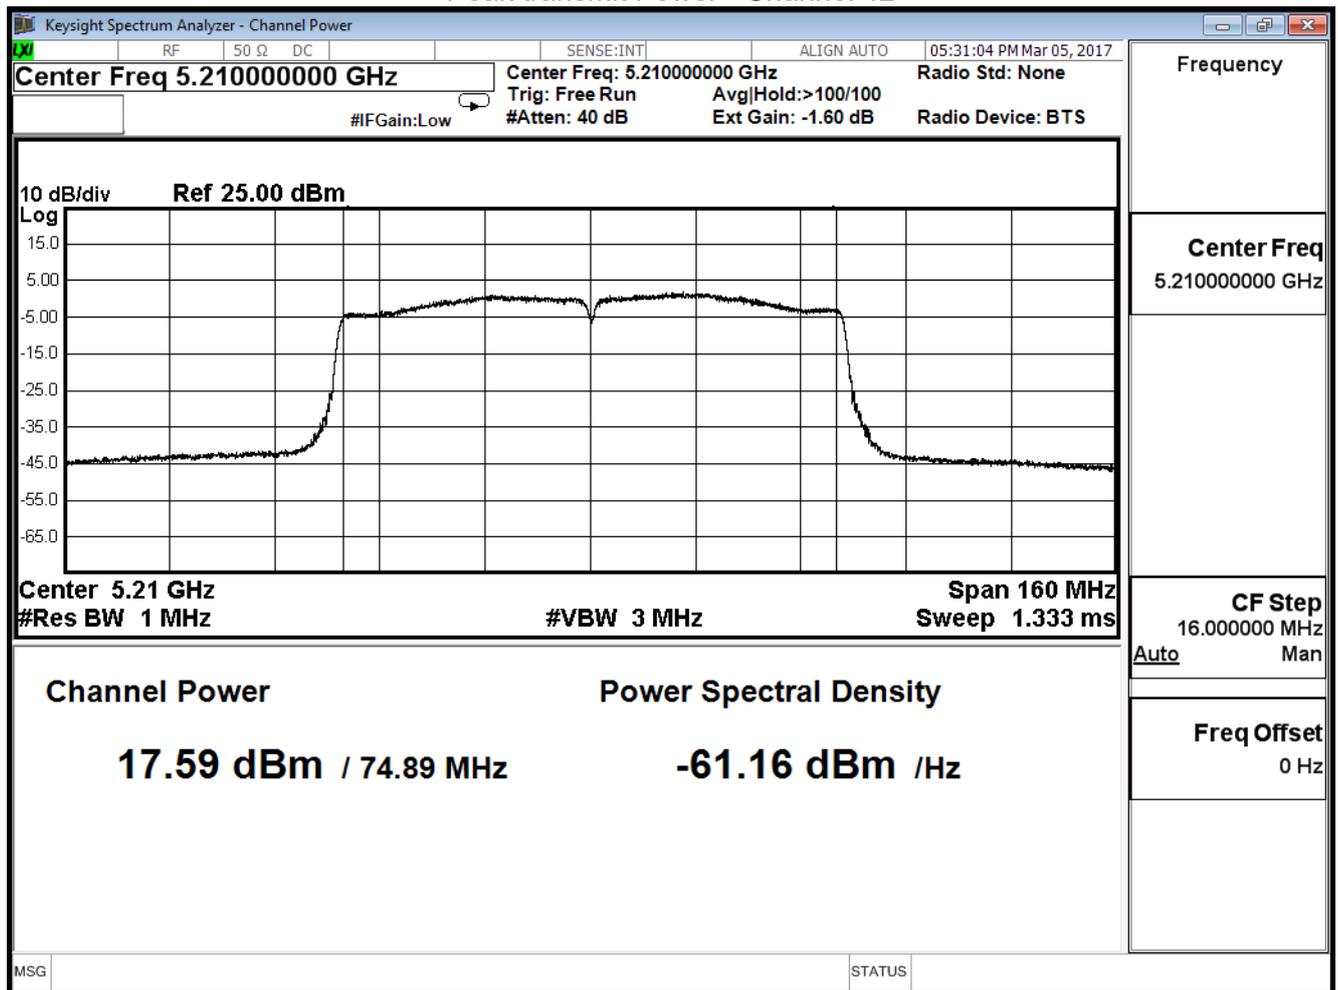

|              |   |           |        |
|--------------|---|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                  |           |        |
| Test Item    | Peak Transmit Output                                      |           |        |
| Test Mode    | Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/05  | Test Site | SR10-H |

## IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 23.631             | ≤30                  |

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                           |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 18.550             | ≤29.66               |
| 44          | 5220            | 21.730             | ≤29.66               |
| 48          | 5240            | 22.020             | ≤29.66               |


The worst emission of data rate is MCS 0

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |        |                      |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No              | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|                         |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 36                      | 5180            | 18.550    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 44                      | 5220            | 21.730    | 21.620 | 21.550 | 21.500 | 21.420 | 21.330 | 21.240 | 21.130 |                      |
| 48                      | 5240            | 22.020    | --     | --     | --     | --     | --     | --     | --     |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

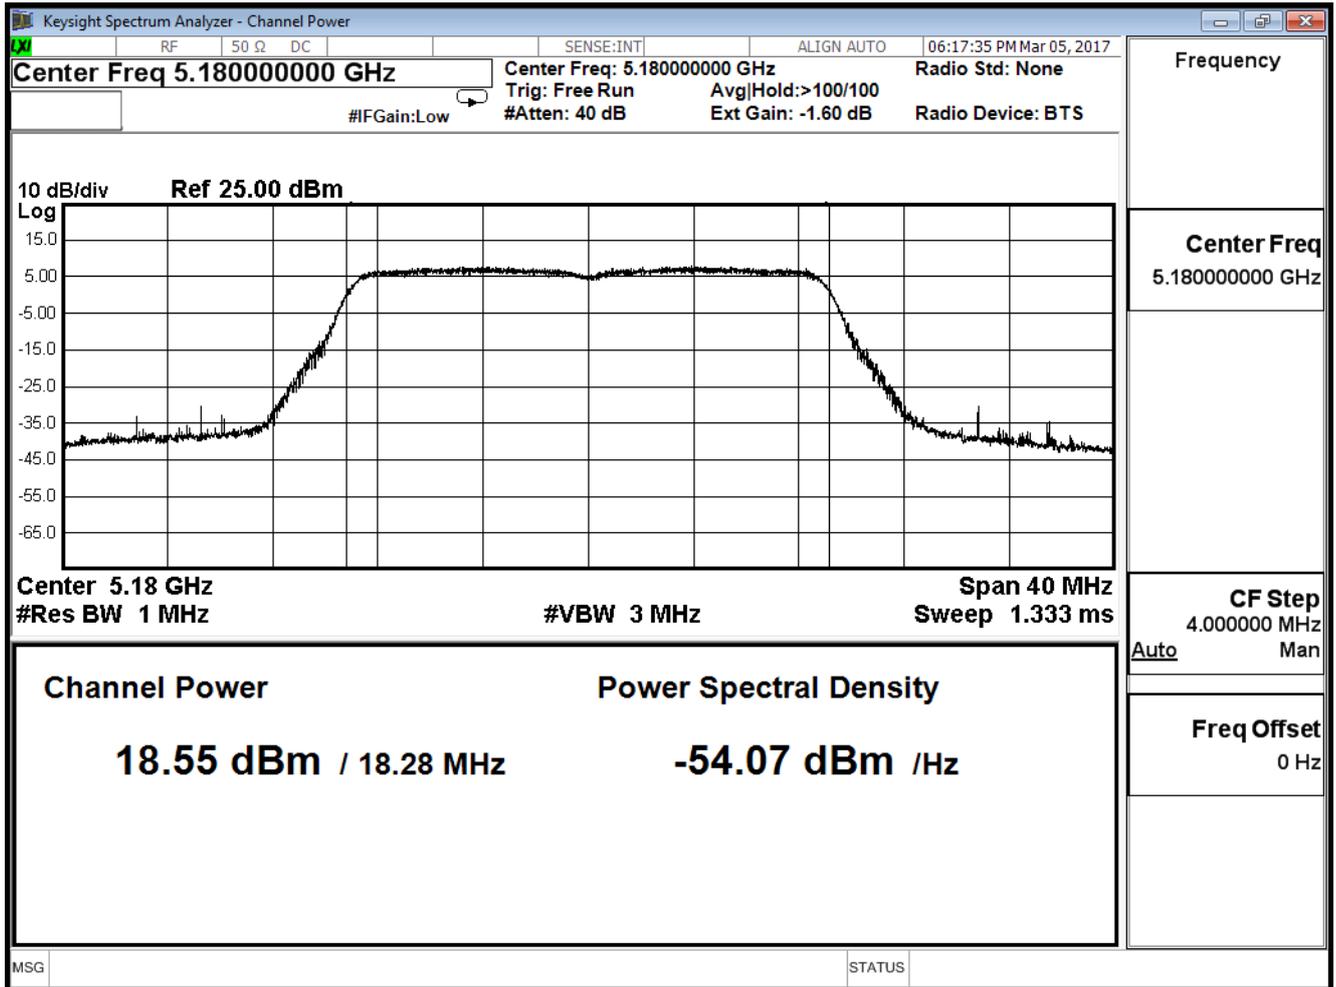

Peak transmit Power - Channel 44

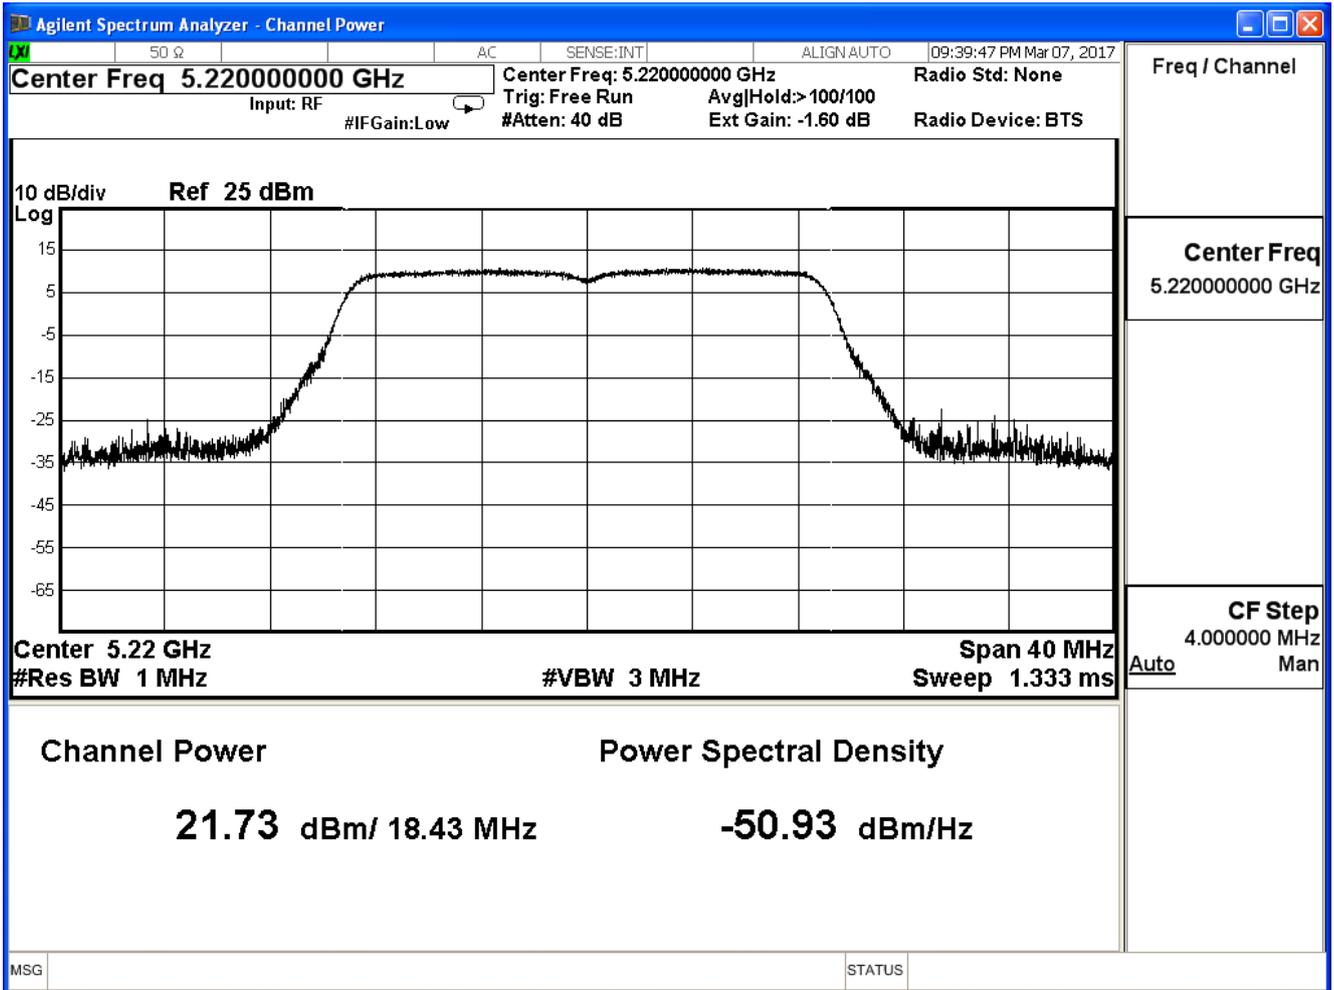

Peak transmit Power - Channel 48

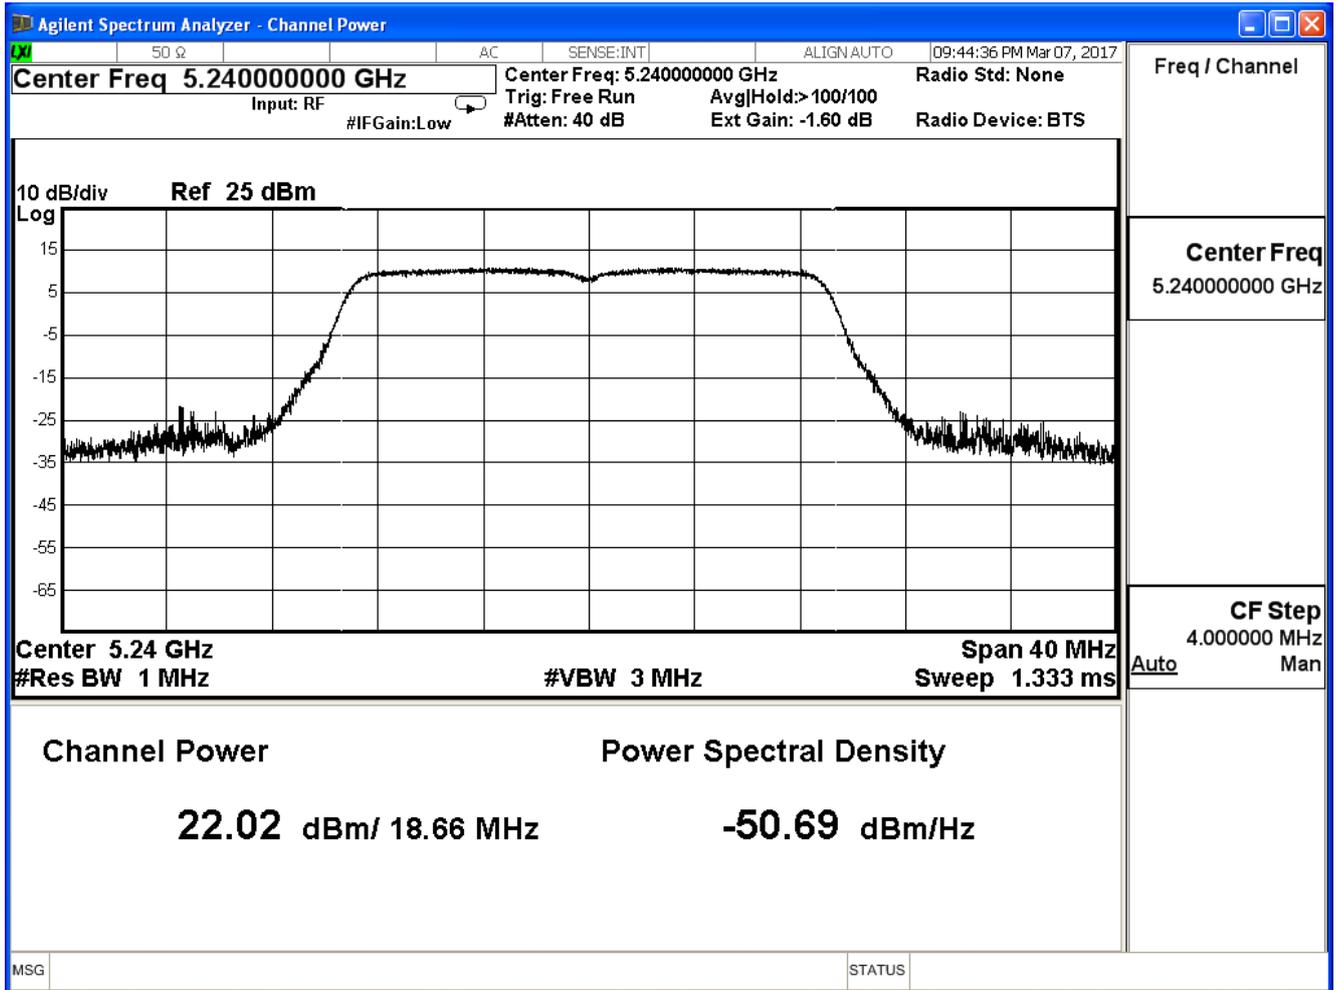

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 18.520             | ≤29.66               |
| 44          | 5220            | 21.680             | ≤29.66               |
| 48          | 5240            | 22.050             | ≤29.66               |


The worst emission of data rate is MCS 0

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |        |                      |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No              | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|                         |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 36                      | 5180            | 18.520    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 44                      | 5220            | 21.680    | 21.600 | 21.510 | 21.390 | 21.300 | 21.220 | 21.110 | 21.030 |                      |
| 48                      | 5240            | 22.050    | --     | --     | --     | --     | --     | --     | --     |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

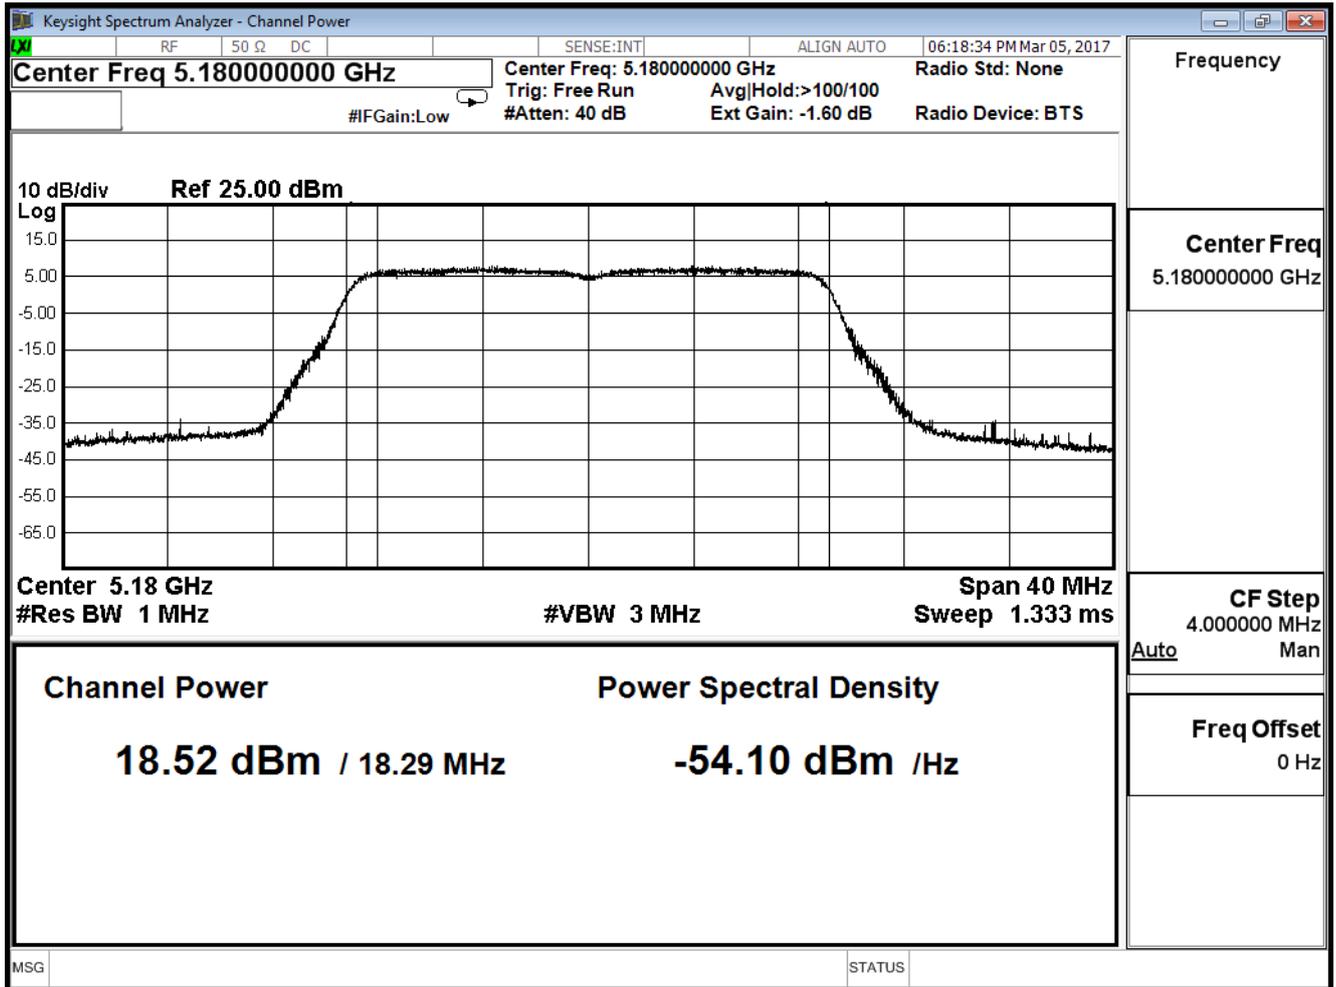

Peak transmit Power - Channel 44

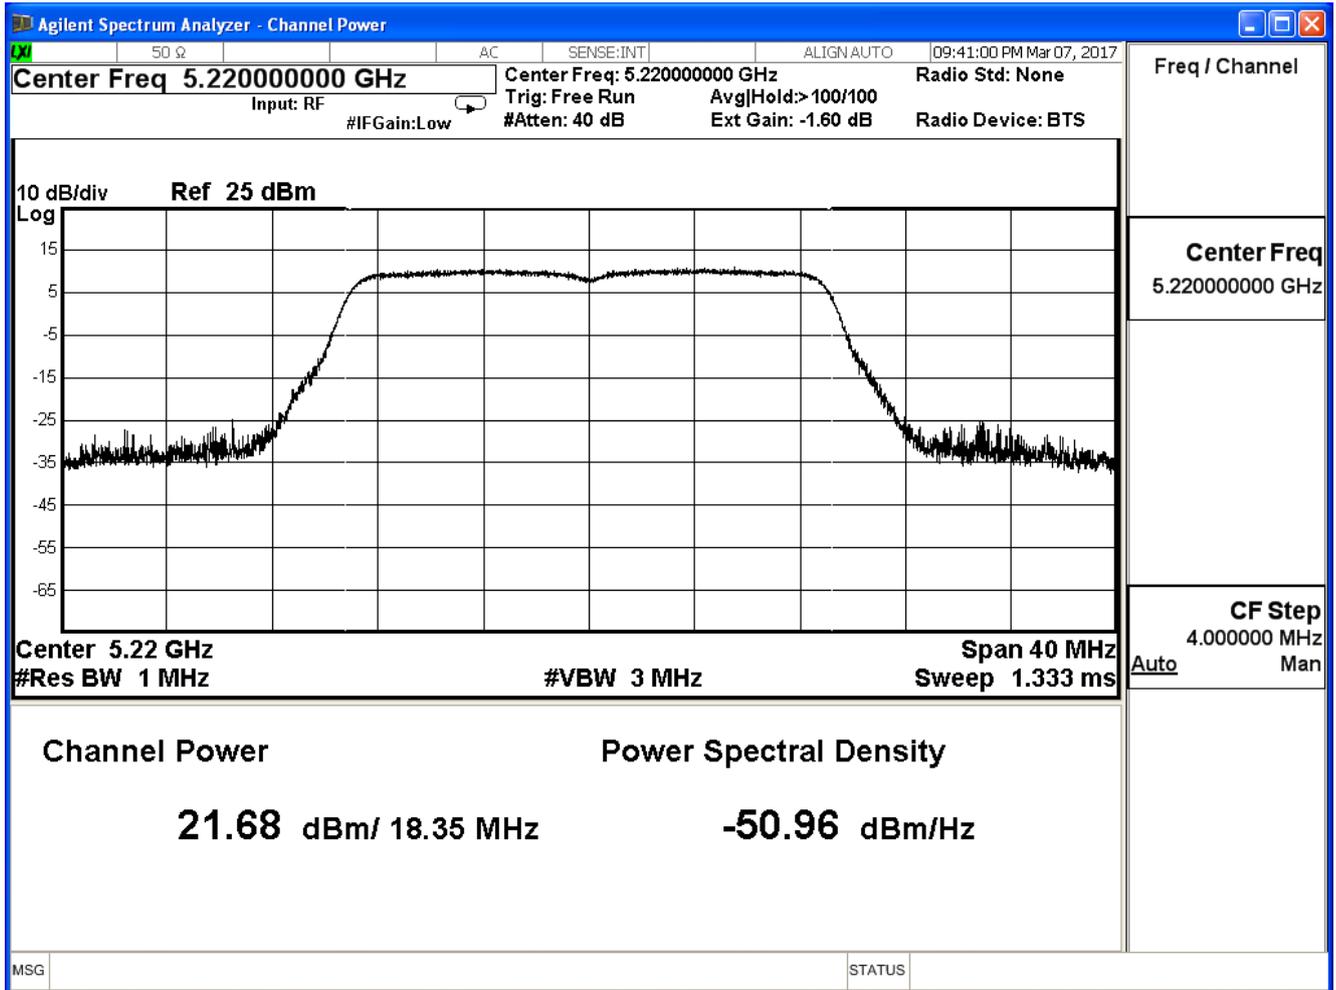

Peak transmit Power - Channel 48

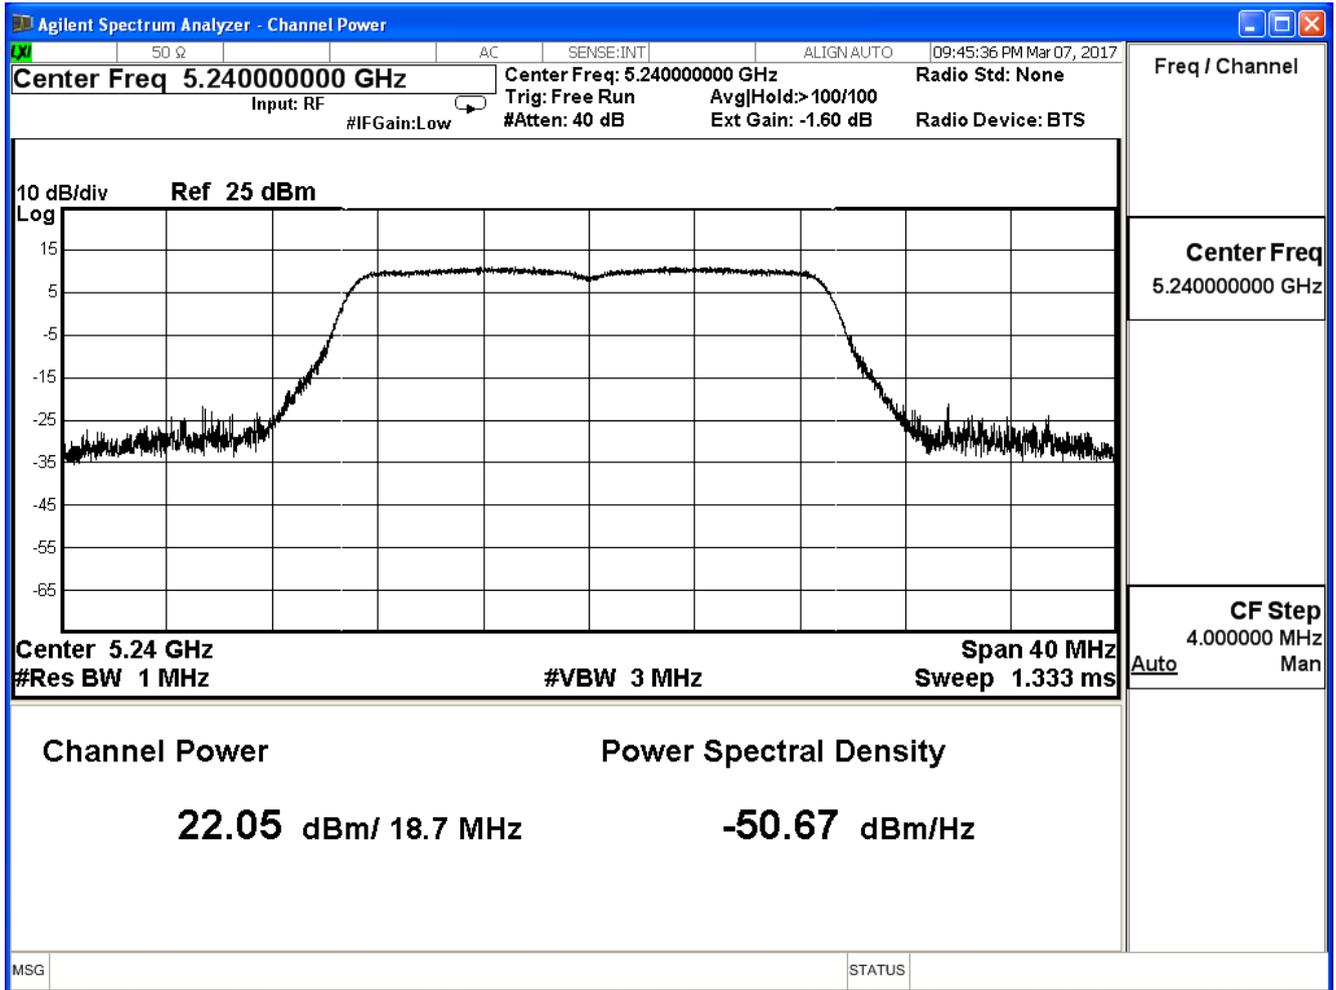

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 18.570             | ≤29.66               |
| 44          | 5220            | 21.720             | ≤29.66               |
| 48          | 5240            | 22.040             | ≤29.66               |


The worst emission of data rate is MCS 0

| Peak Power Output (dBm) |                 |           |        |        |        |        |       |        |        |                      |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|-------|--------|--------|----------------------|
| Channel No              | Frequency (MHz) | MCS Index |        |        |        |        |       |        |        | Required Limit (dBm) |
|                         |                 | 0         | 1      | 2      | 3      | 4      | 5     | 6      | 7      |                      |
| 36                      | 5180            | 18.570    | --     | --     | --     | --     | --    | --     | --     | ≤29.66               |
| 44                      | 5220            | 21.720    | 21.600 | 21.550 | 21.420 | 21.330 | 21.20 | 21.040 | 20.920 |                      |
| 48                      | 5240            | 22.040    | --     | --     | --     | --     | --    | --     | --     |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

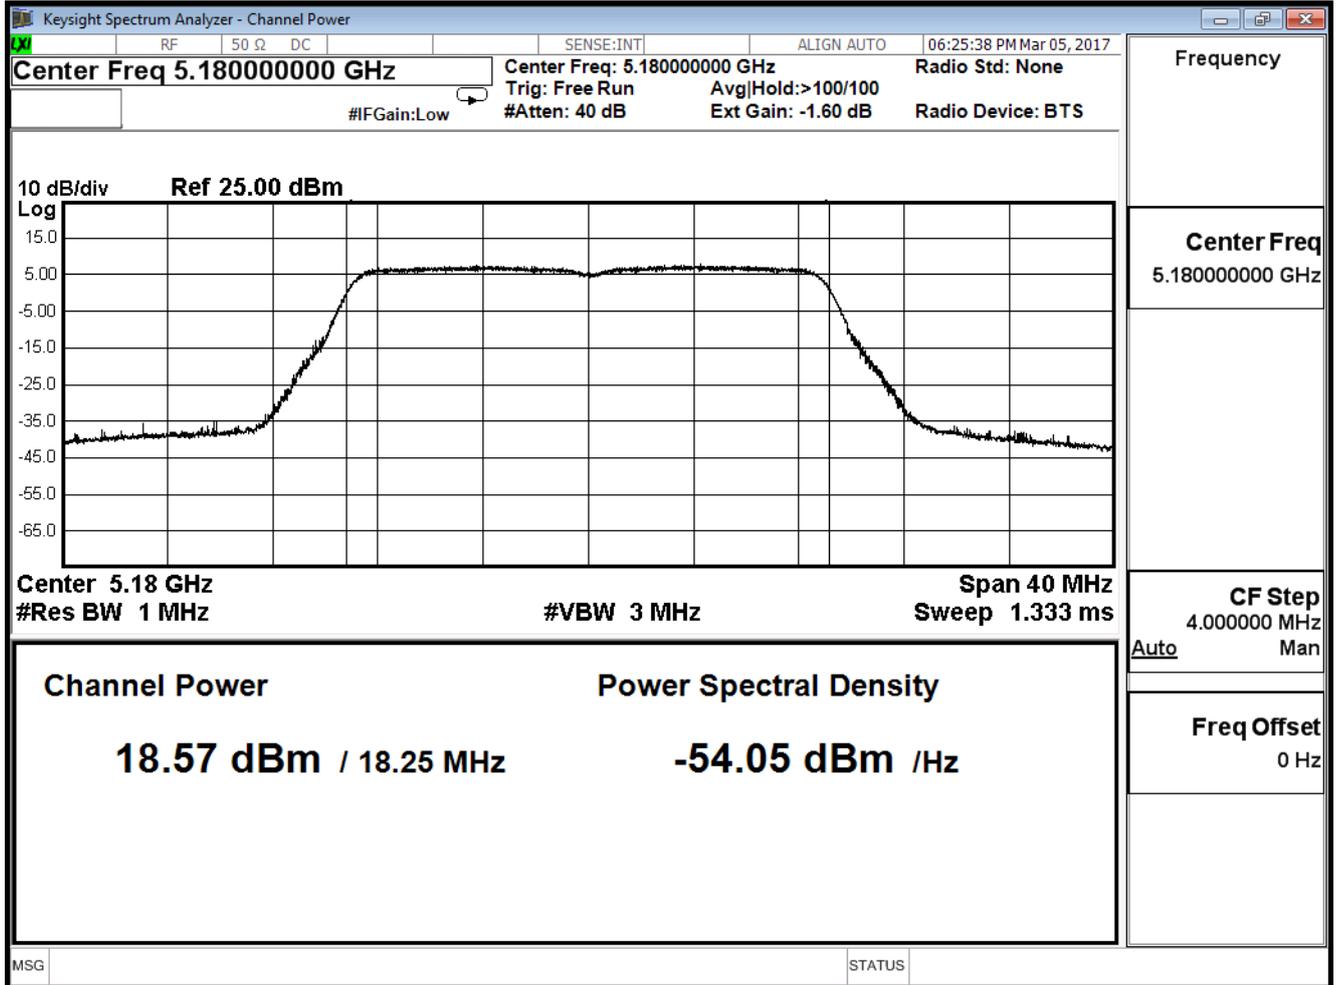

Peak transmit Power - Channel 44

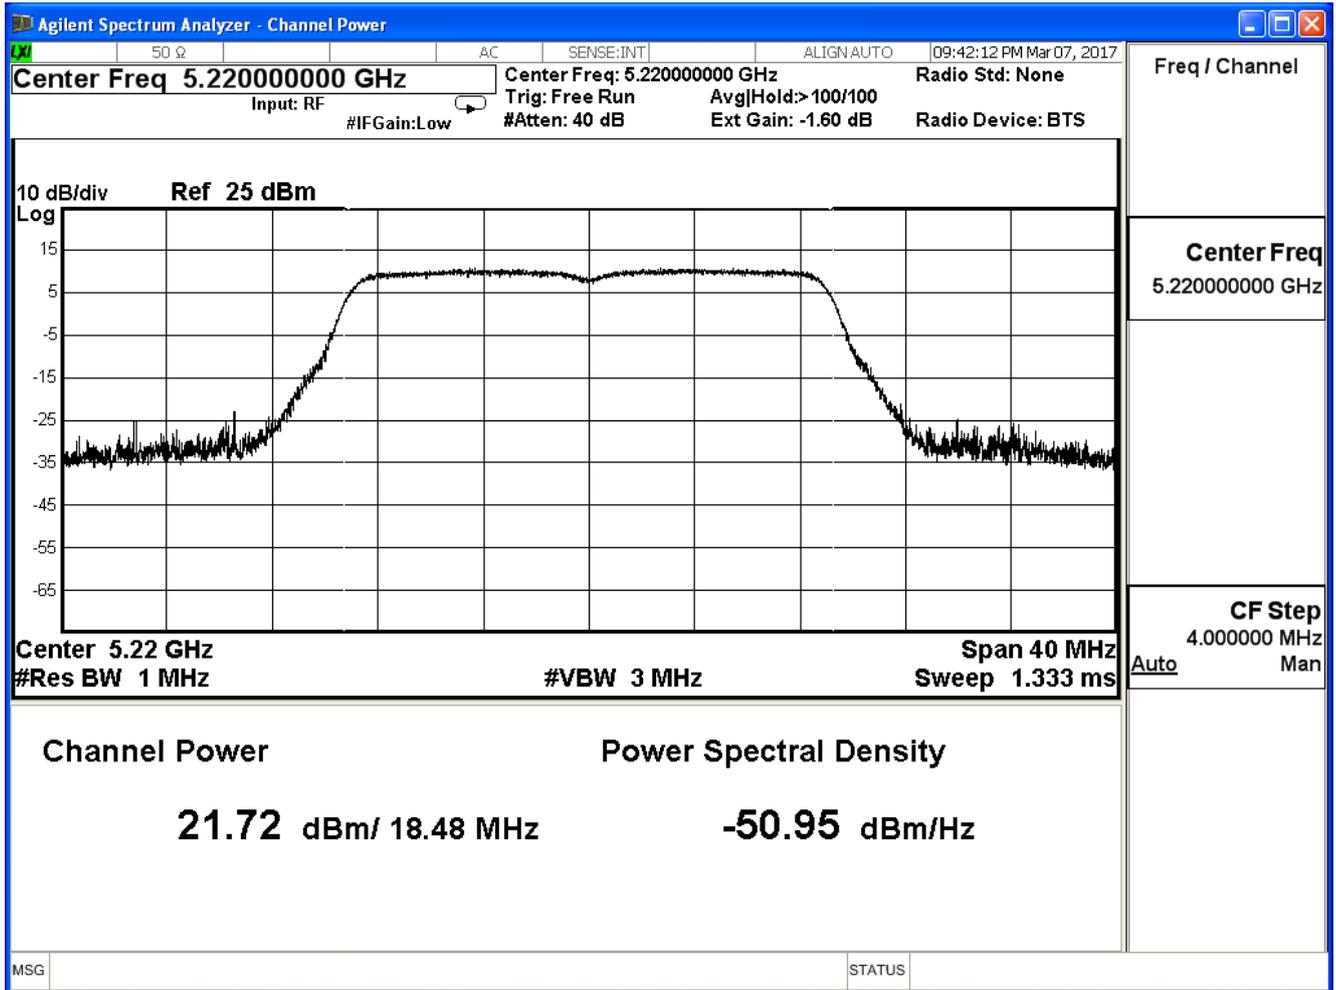

Peak transmit Power - Channel 48

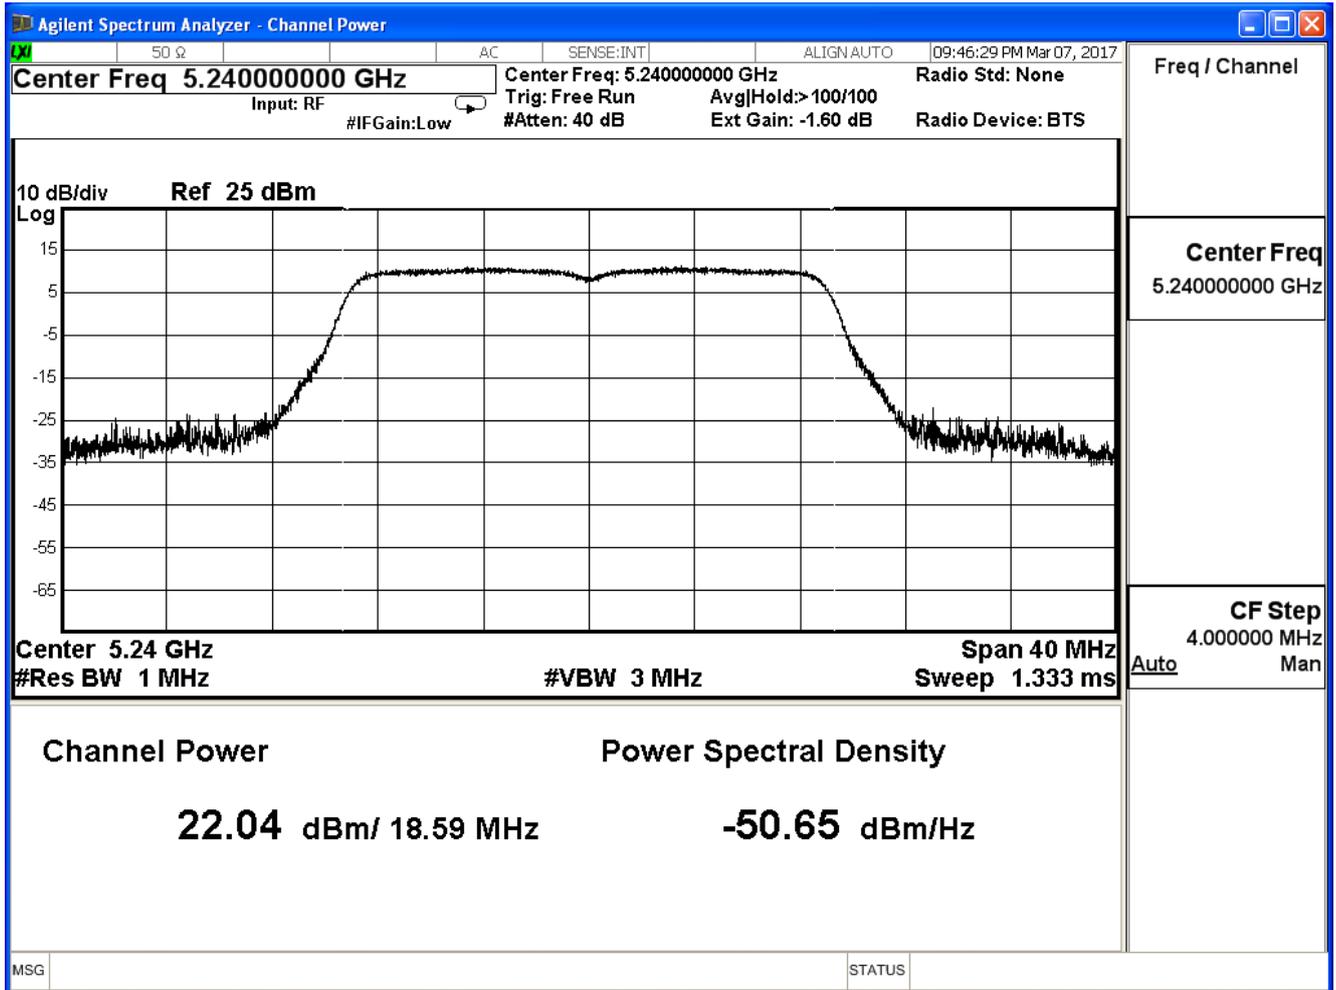

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 18.580             | ≤29.66               |
| 44          | 5220            | 21.750             | ≤29.66               |
| 48          | 5240            | 22.010             | ≤29.66               |


The worst emission of data rate is MCS 0

| Peak Power Output (dBm) |                 |           |        |        |        |        |        |        |        |                      |
|-------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No              | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|                         |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 36                      | 5180            | 18.580    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 44                      | 5220            | 21.750    | 21.620 | 21.580 | 21.500 | 21.440 | 21.320 | 21.190 | 21.010 |                      |
| 48                      | 5240            | 22.010    | --     | --     | --     | --     | --     | --     | --     |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

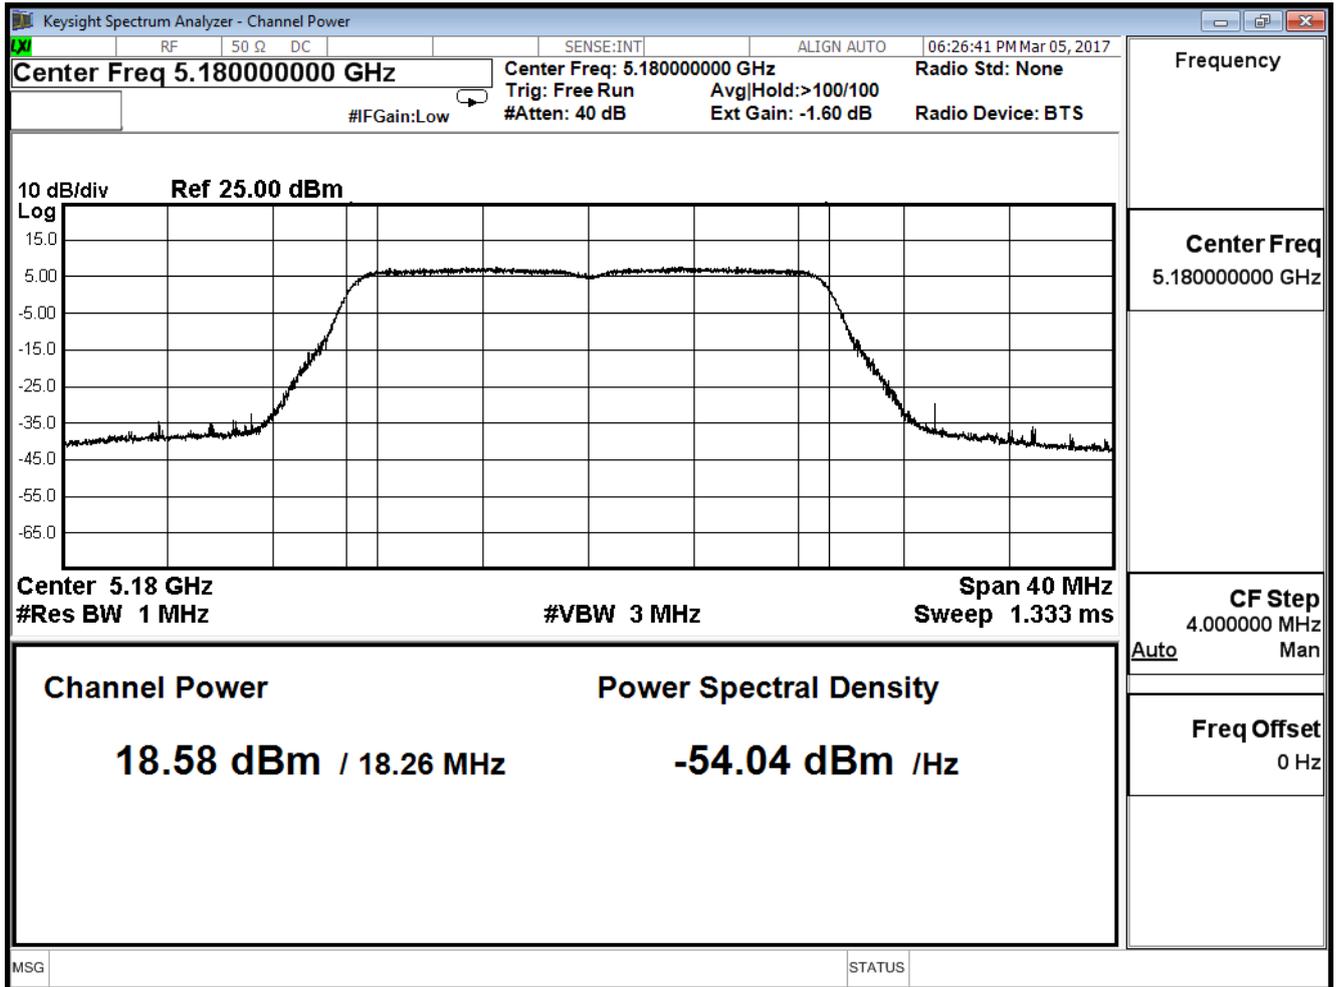

Peak transmit Power - Channel 44

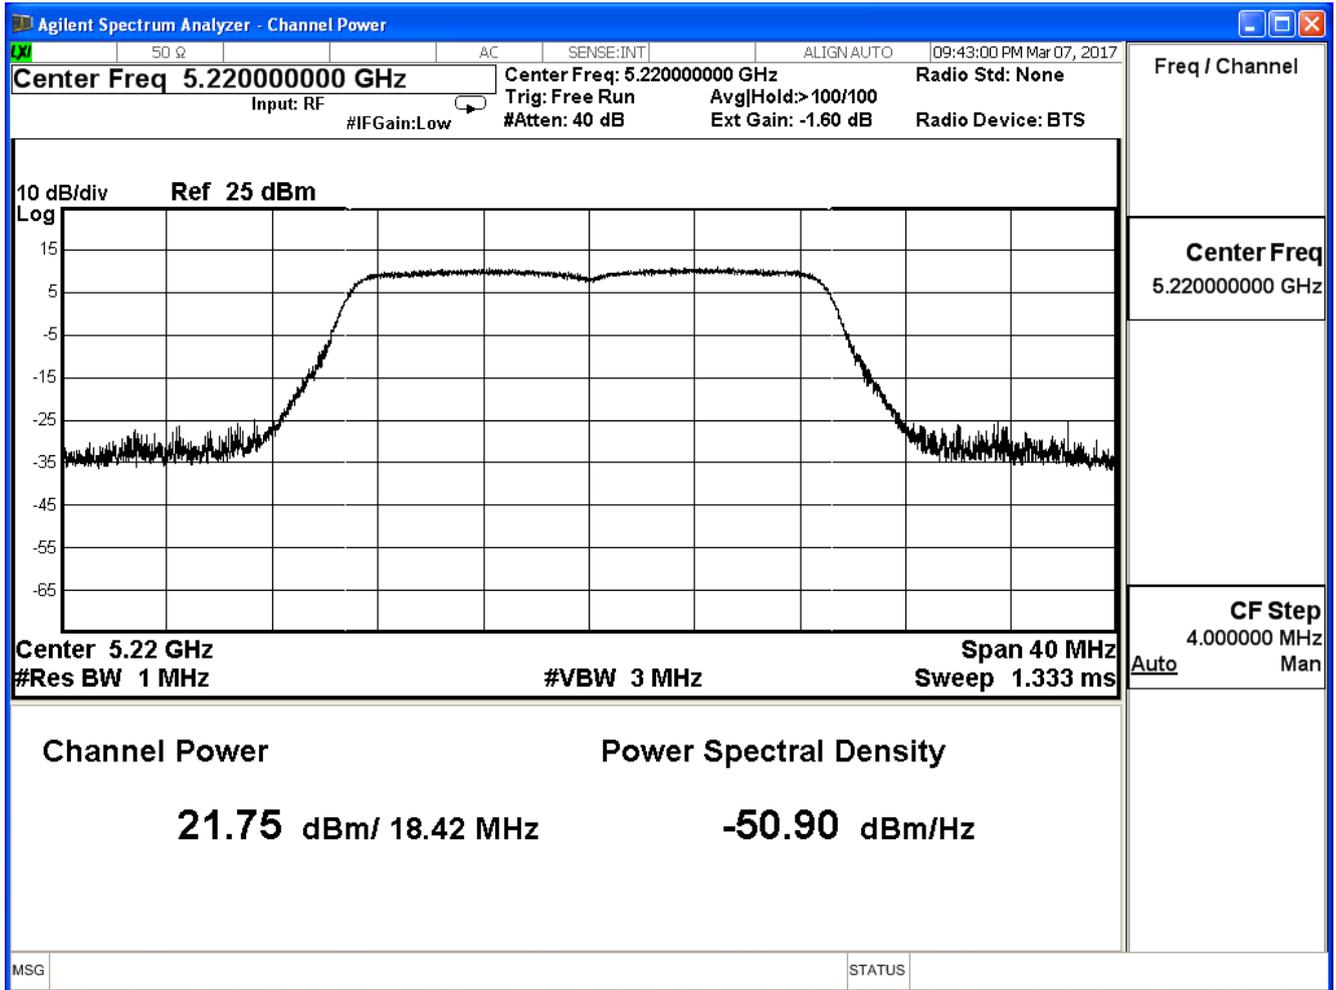

Peak transmit Power - Channel 48

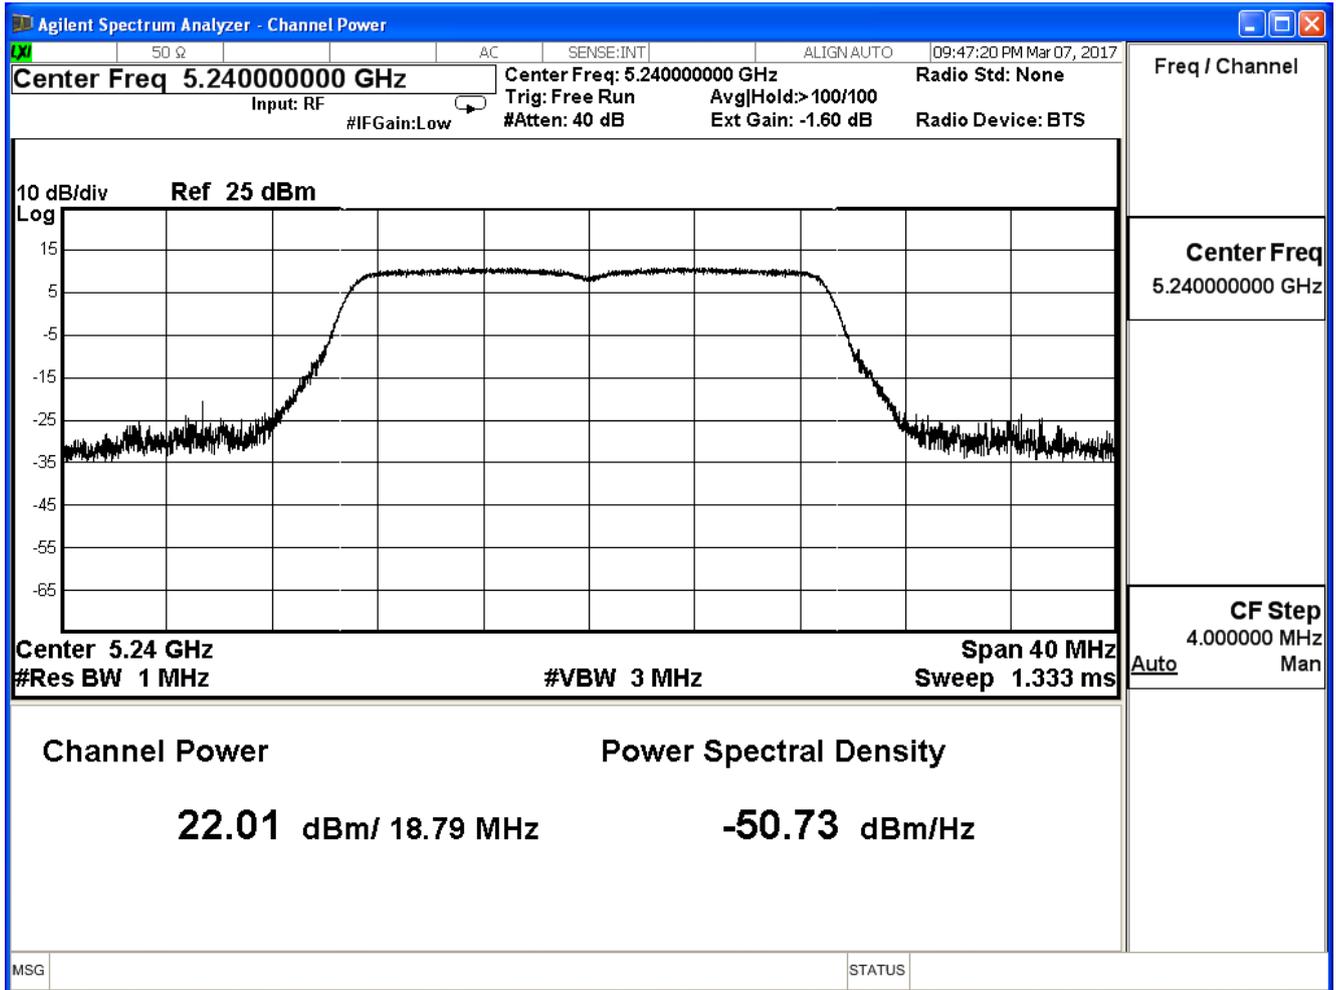

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                           |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36          | 5180            | 24.576             | ≤29.66               |
| 44          | 5220            | 27.741             | ≤29.66               |
| 48          | 5240            | 28.051             | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(40MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 14.880             | ≤29.66               |
| 46          | 5230            | 20.730             | ≤29.66               |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 38         | 5190            | 14.880    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 46         | 5230            | 20.730    | 20.620 | 20.550 | 20.320 | 20.180 | 21.010 | 20.910 | 20.790 |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

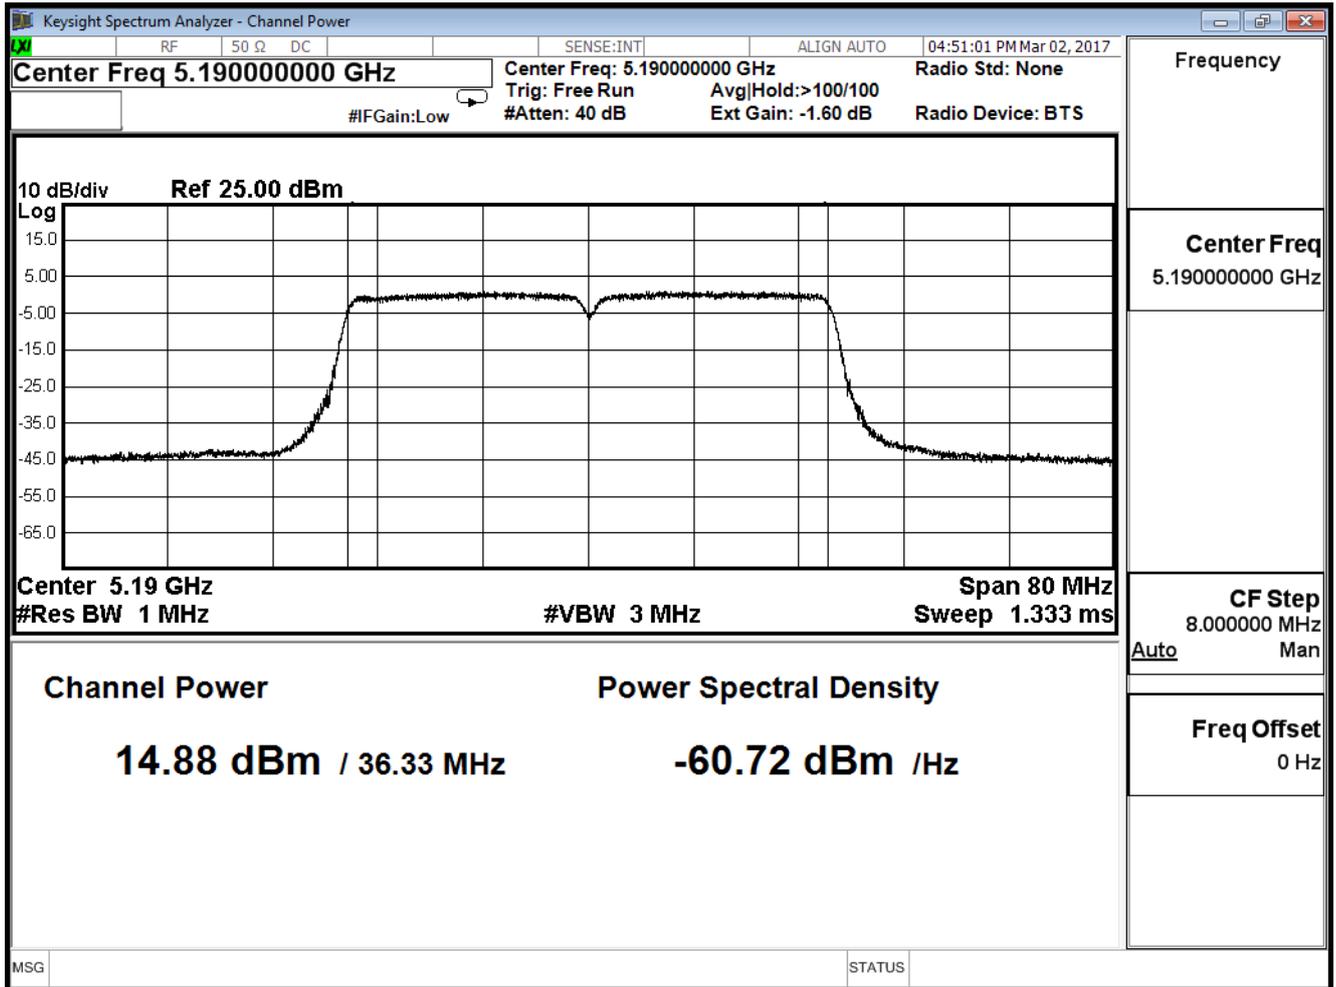

Peak transmit Power - Channel 46

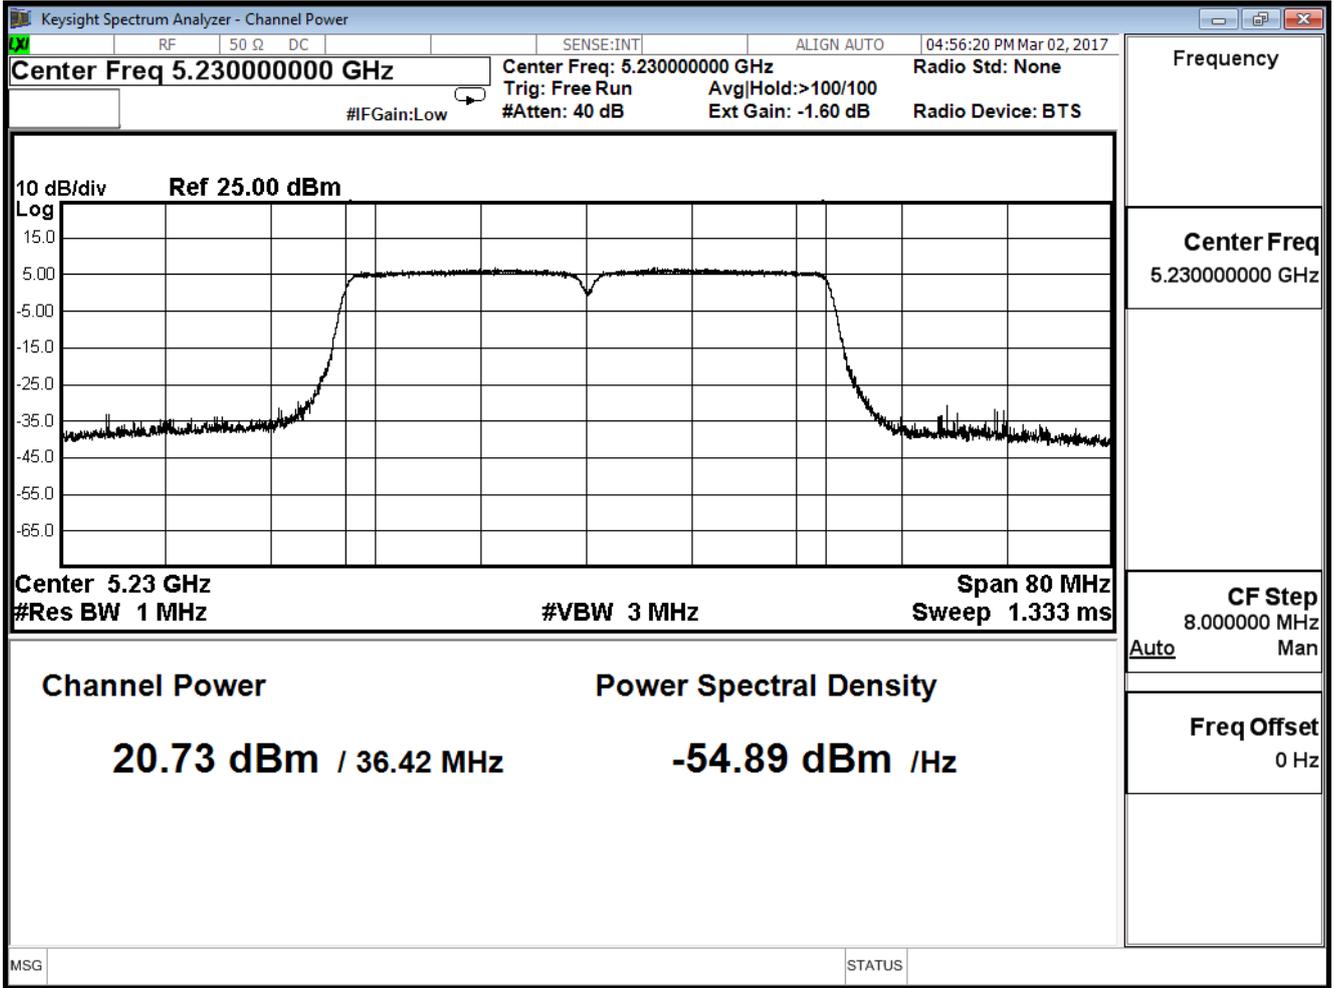

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(40MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 14.970             | ≤29.66               |
| 46          | 5230            | 20.690             | ≤29.66               |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 38         | 5190            | 14.970    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 46         | 5230            | 20.690    | 20.550 | 20.420 | 20.220 | 20.110 | 20.010 | 19.890 | 19.770 |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

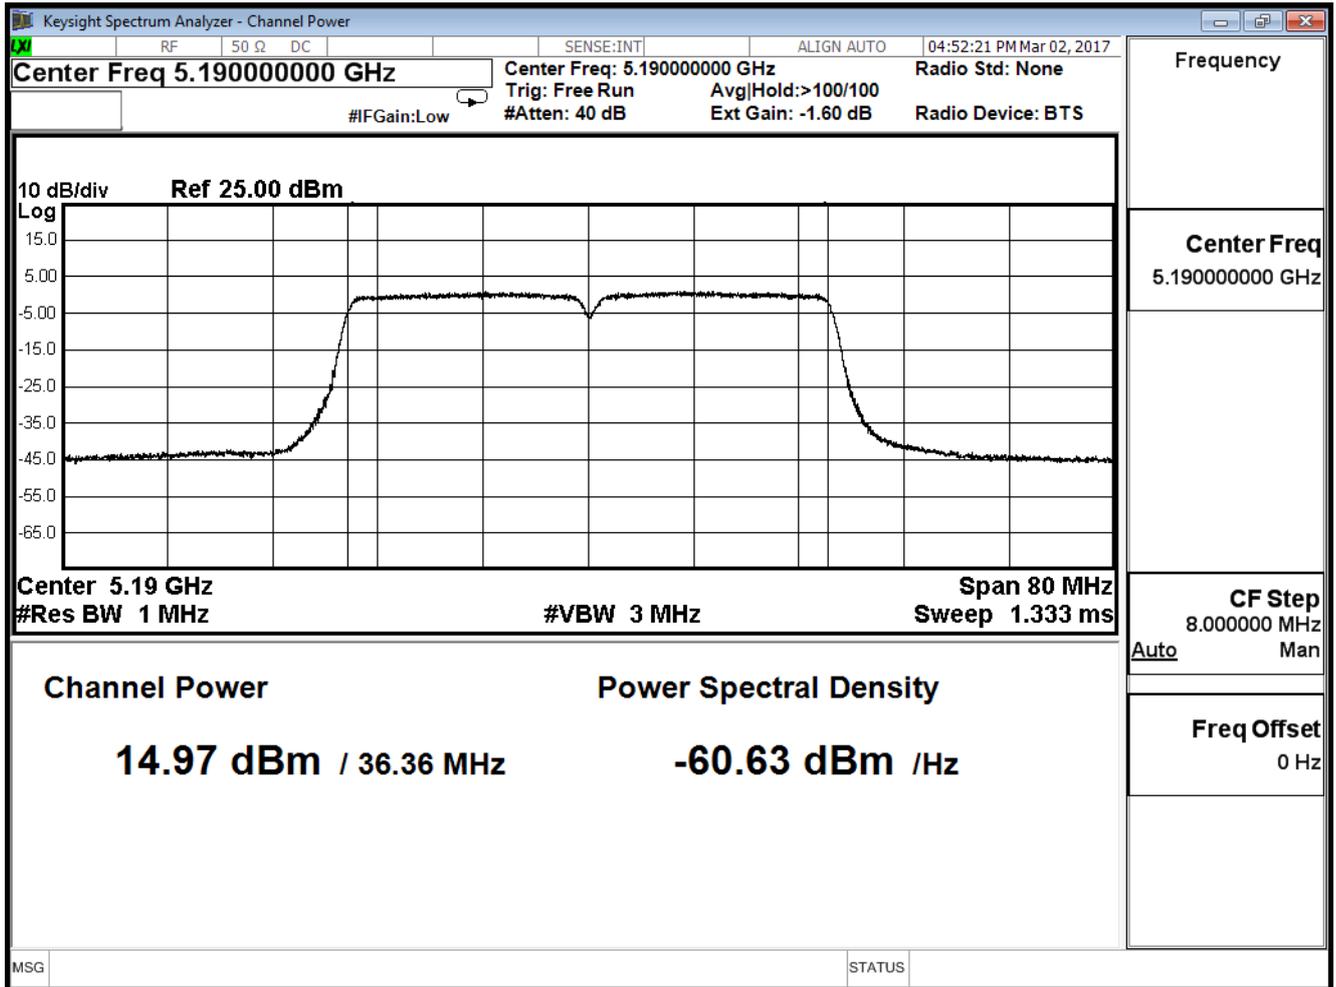

Peak transmit Power - Channel 46

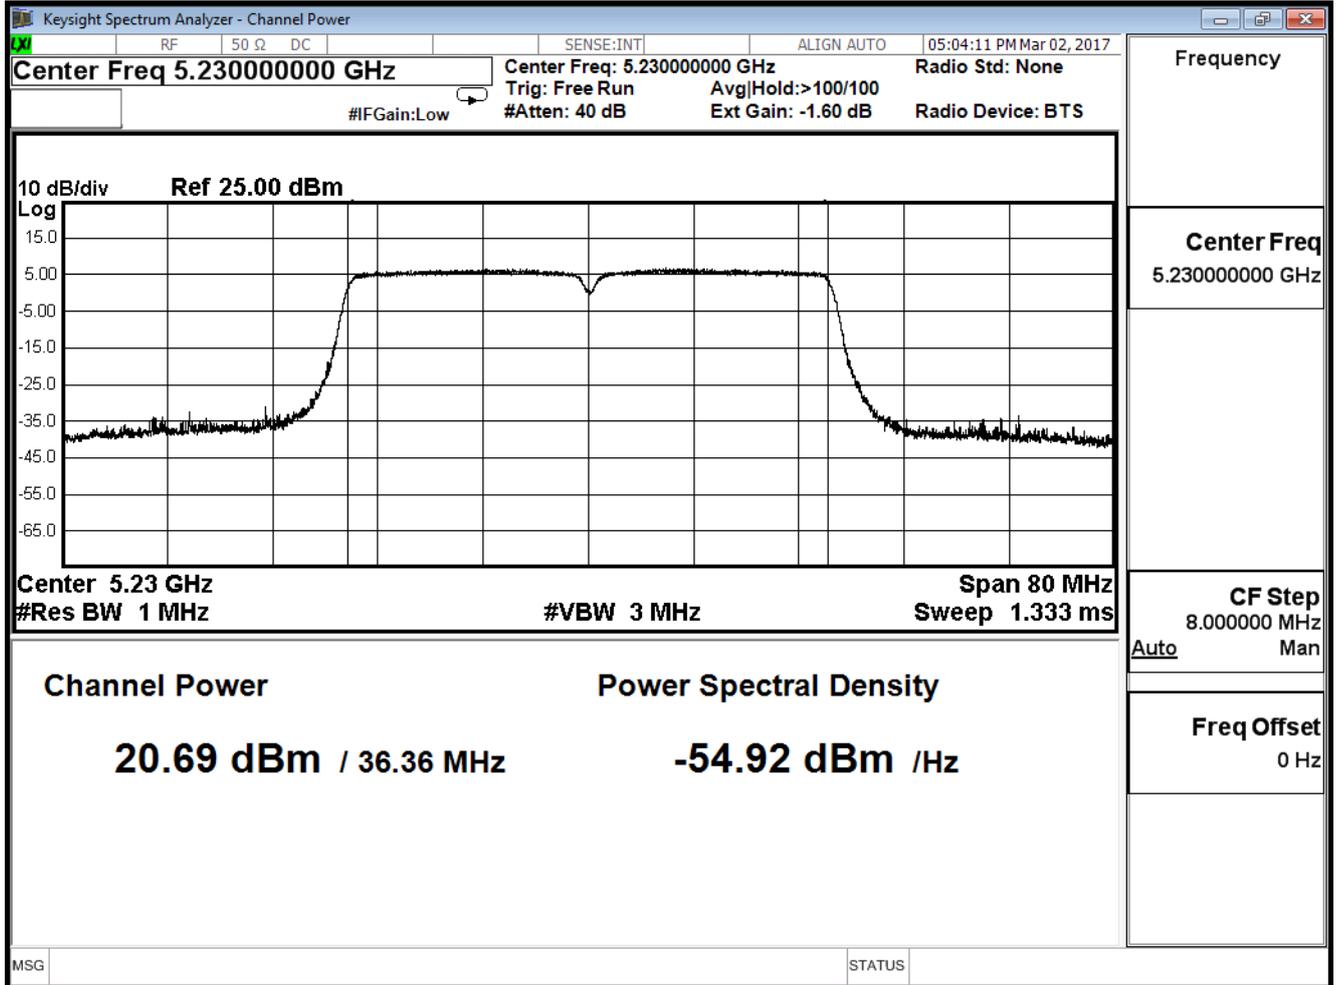

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

## IEEE 802.11n(40MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 14.920             | ≤29.66               |
| 46          | 5230            | 20.670             | ≤29.66               |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 38         | 5190            | 14.920    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 46         | 5230            | 20.670    | 20.550 | 20.440 | 20.130 | 20.020 | 19.890 | 19.720 | 19.660 |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

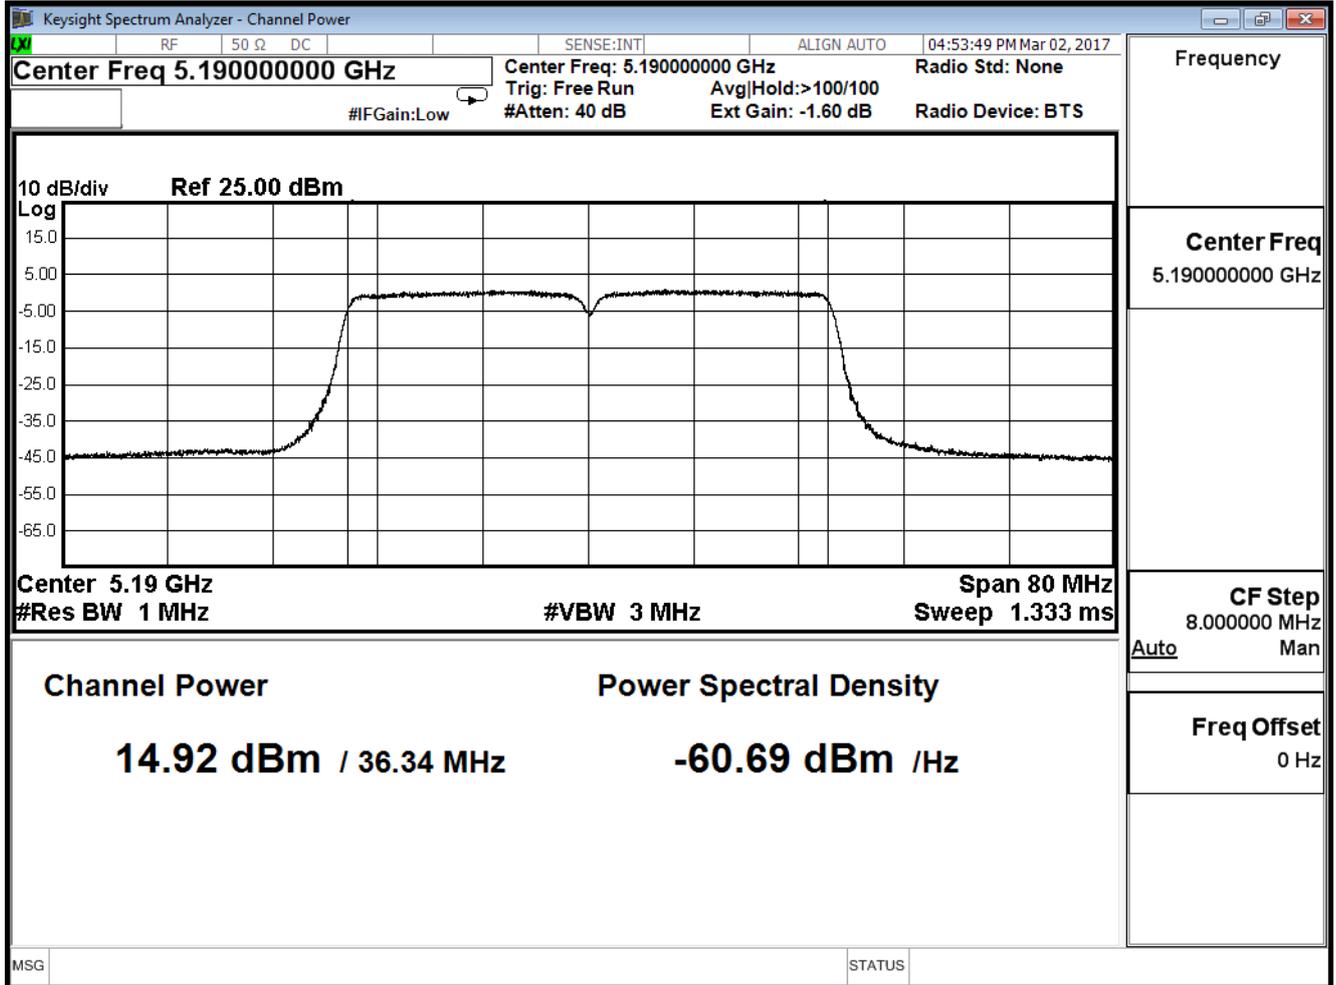

Peak transmit Power - Channel 46

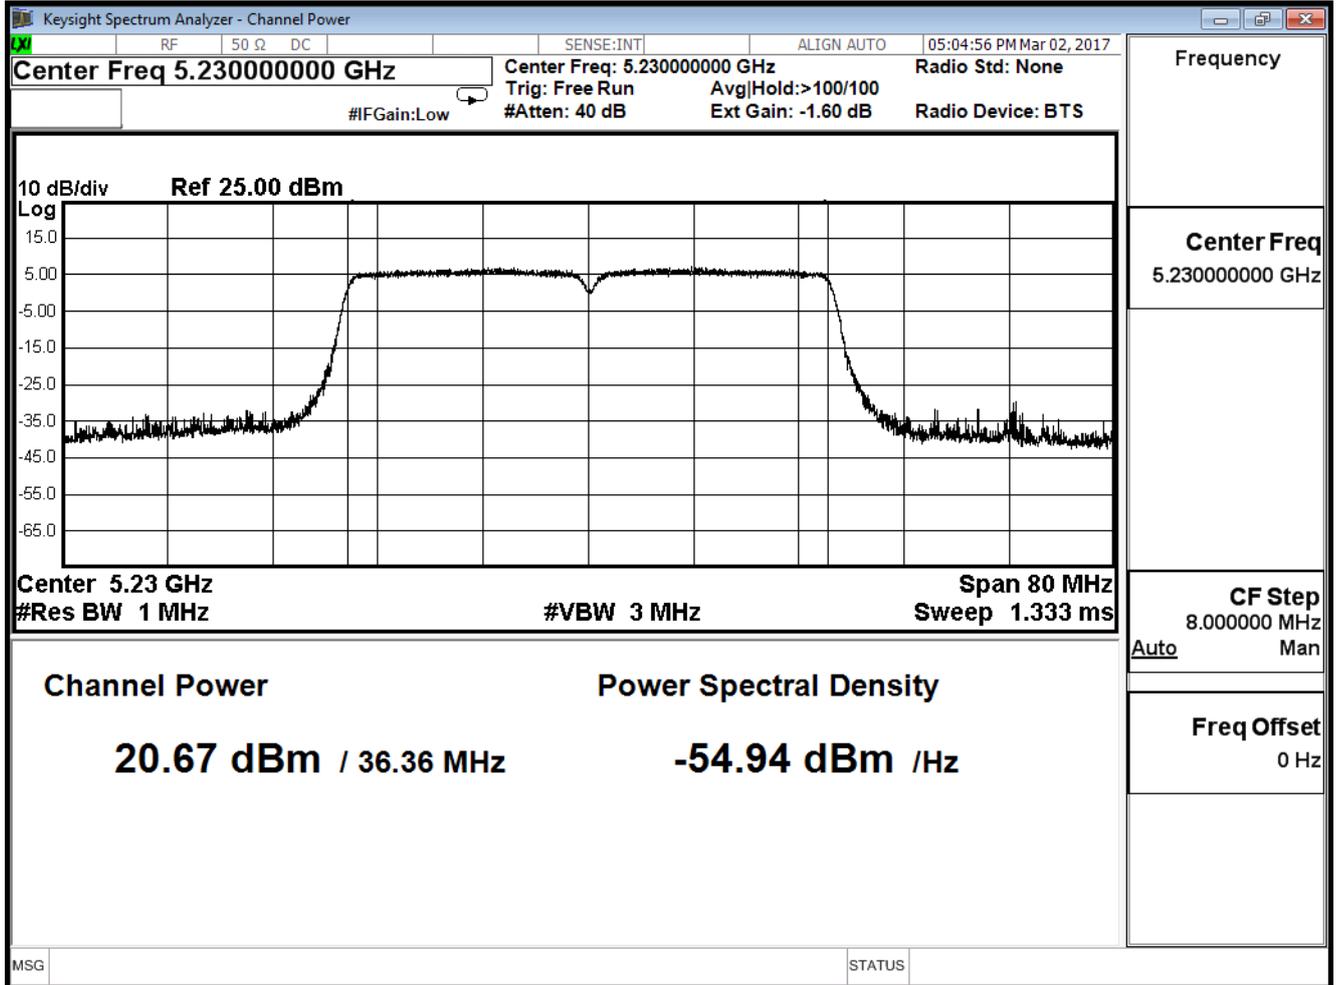

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11n(40MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 14.900             | ≤29.66               |
| 46          | 5230            | 20.660             | ≤29.66               |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      |                      |
| 38         | 5190            | 14.900    | --     | --     | --     | --     | --     | --     | --     | ≤29.66               |
| 46         | 5230            | 20.660    | 20.600 | 20.440 | 20.320 | 20.110 | 20.020 | 19.900 | 19.770 |                      |


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

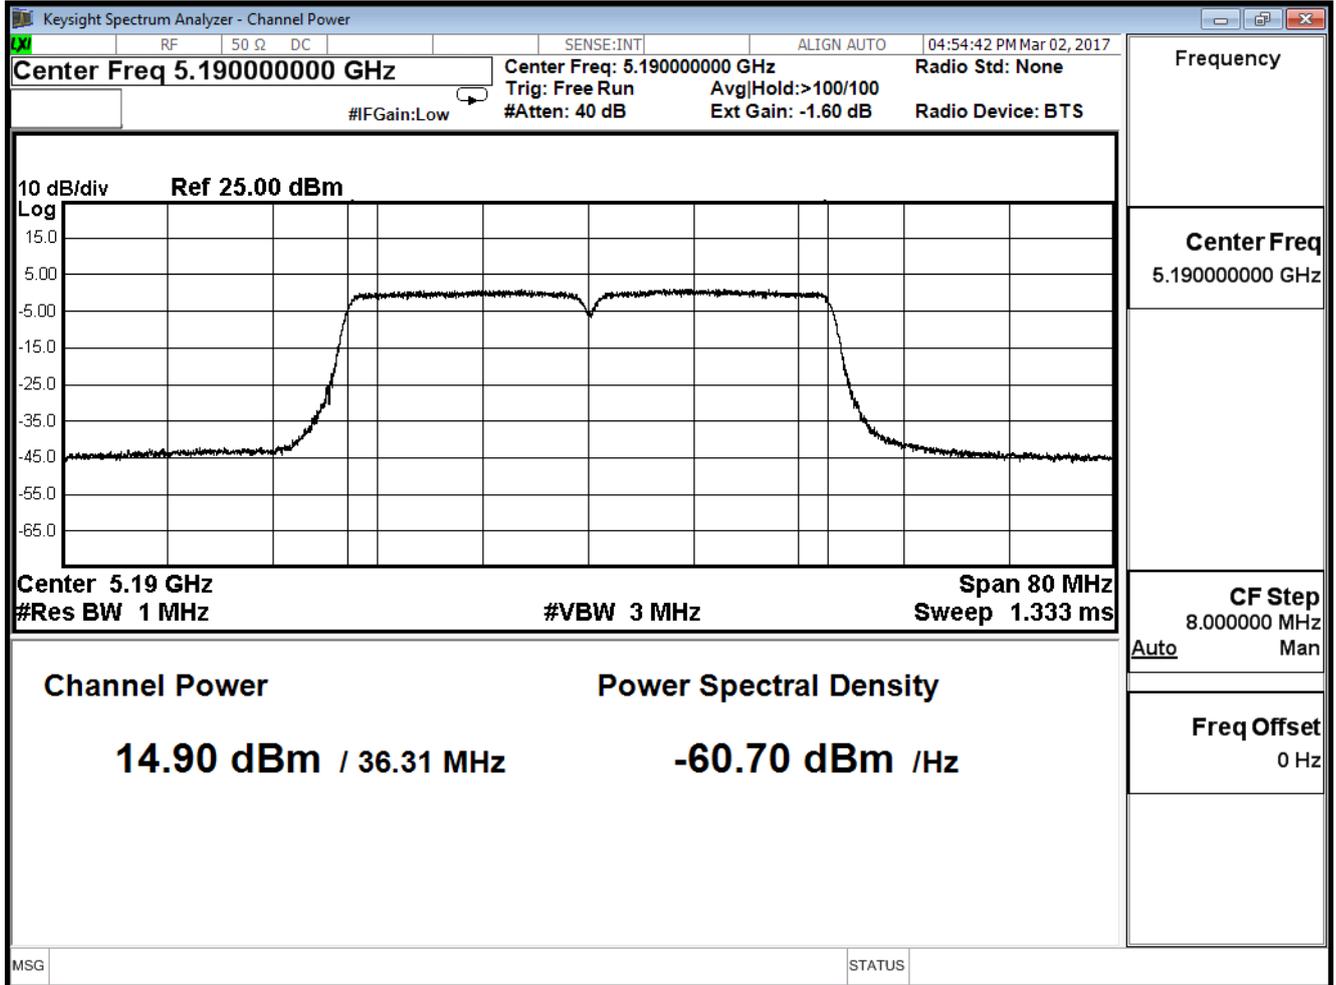

Peak transmit Power - Channel 46

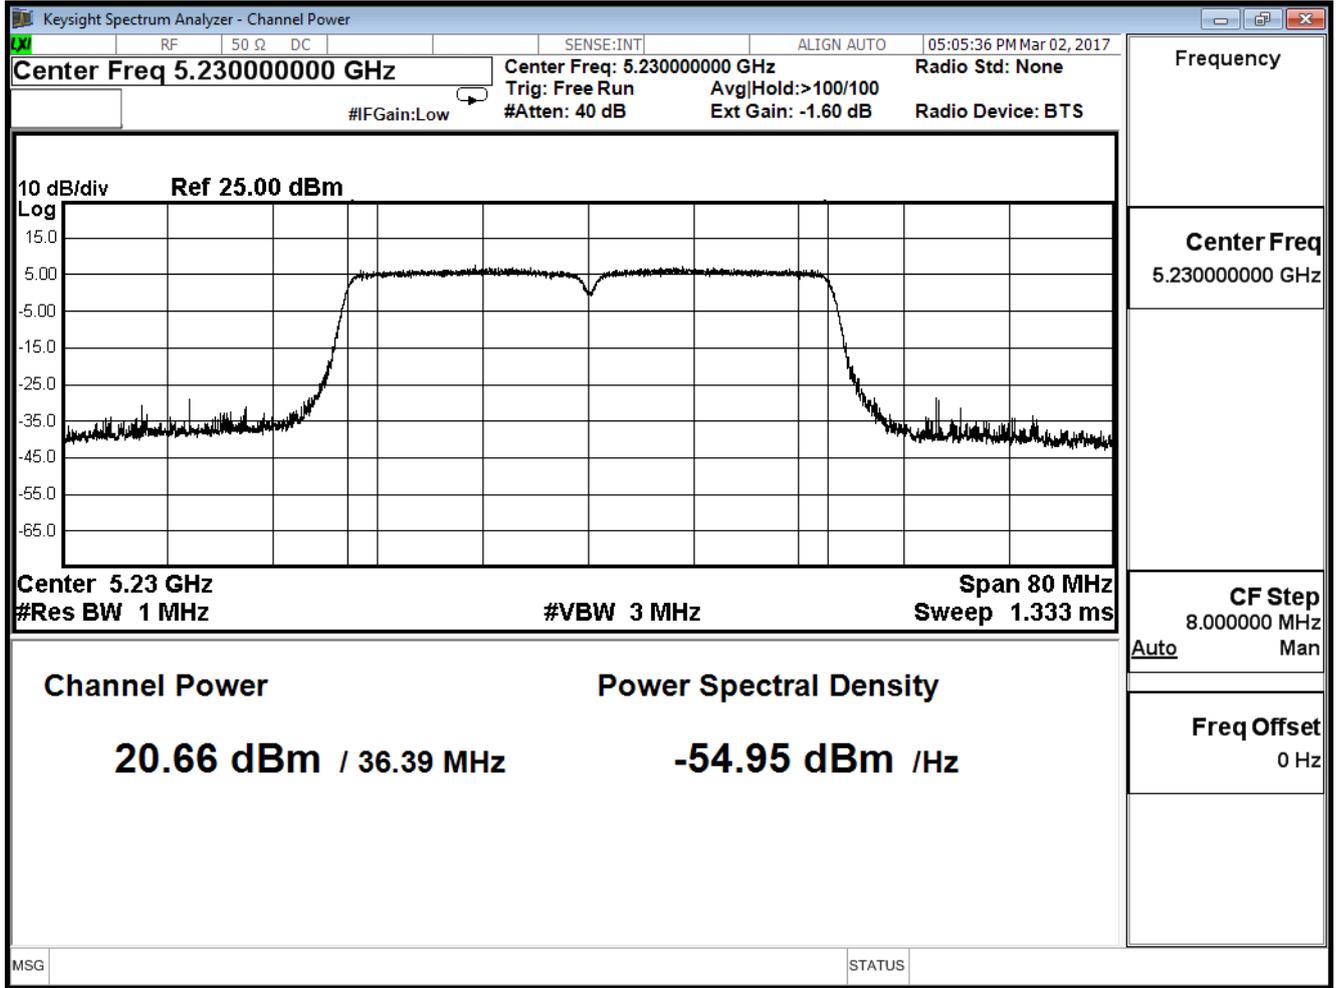

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx ADP: AD890326010-2LF Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

## IEEE 802.11n(40MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38          | 5190            | 20.938             | ≤29.66               |
| 46          | 5230            | 26.708             | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11ac(80MHz) (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 15.070             | ≤29.66               |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                      |
| 42         | 5210            | 15.070    | 14.920 | 14.720 | 14.550 | 14.320 | 14.110 | 14.000 | 13.880 | 13.710 | 13.550 | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

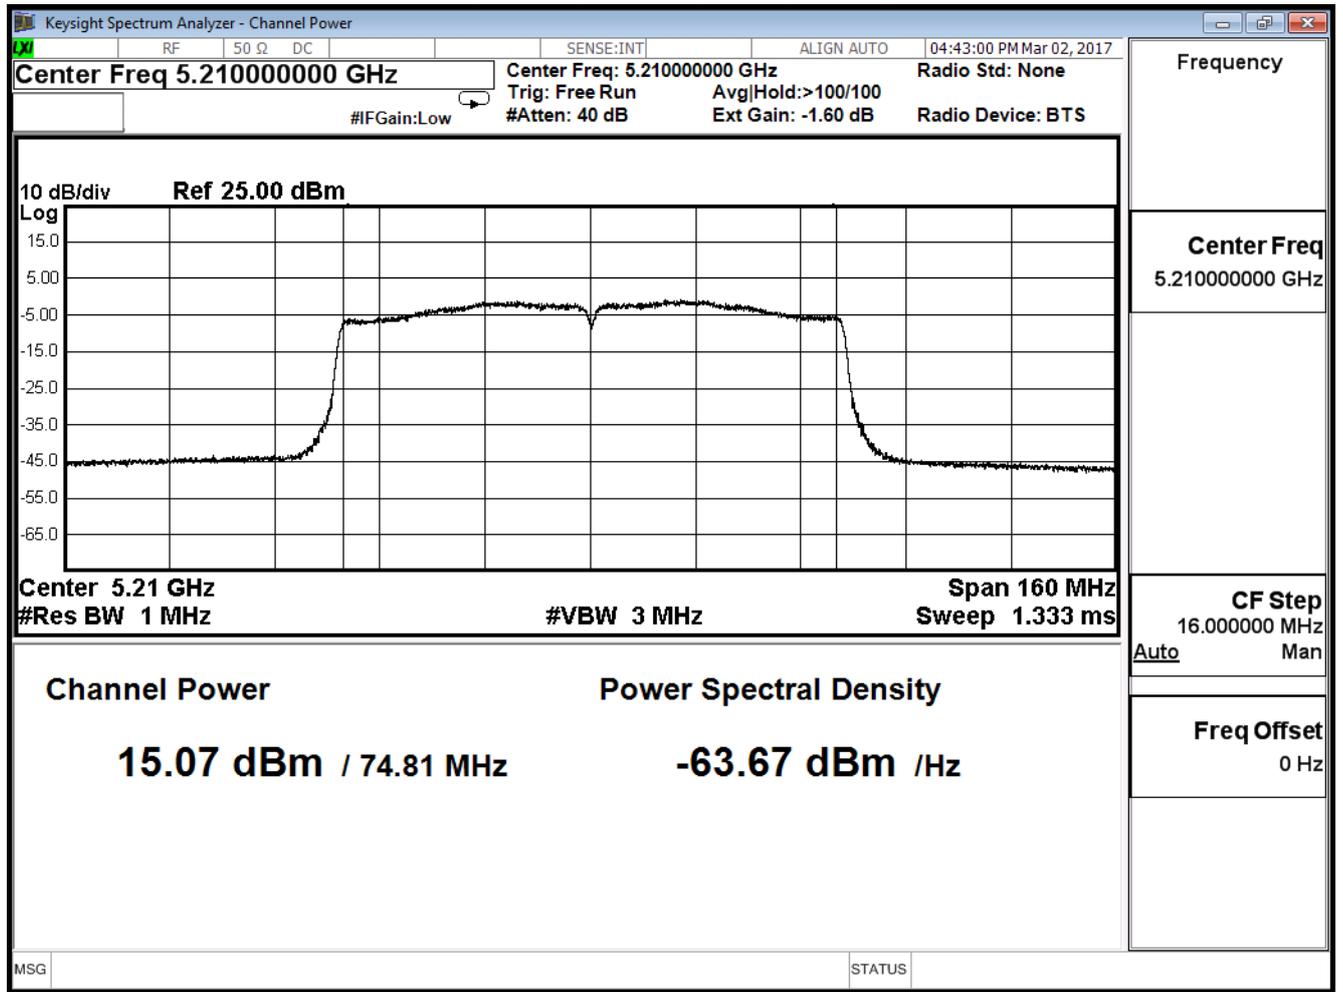

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11ac(80MHz) (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 15.110             | ≤29.66               |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                      |
| 42         | 5210            | 15.110    | 15.020 | 14.890 | 14.680 | 14.320 | 14.110 | 14.020 | 13.900 | 13.680 | 13.550 | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

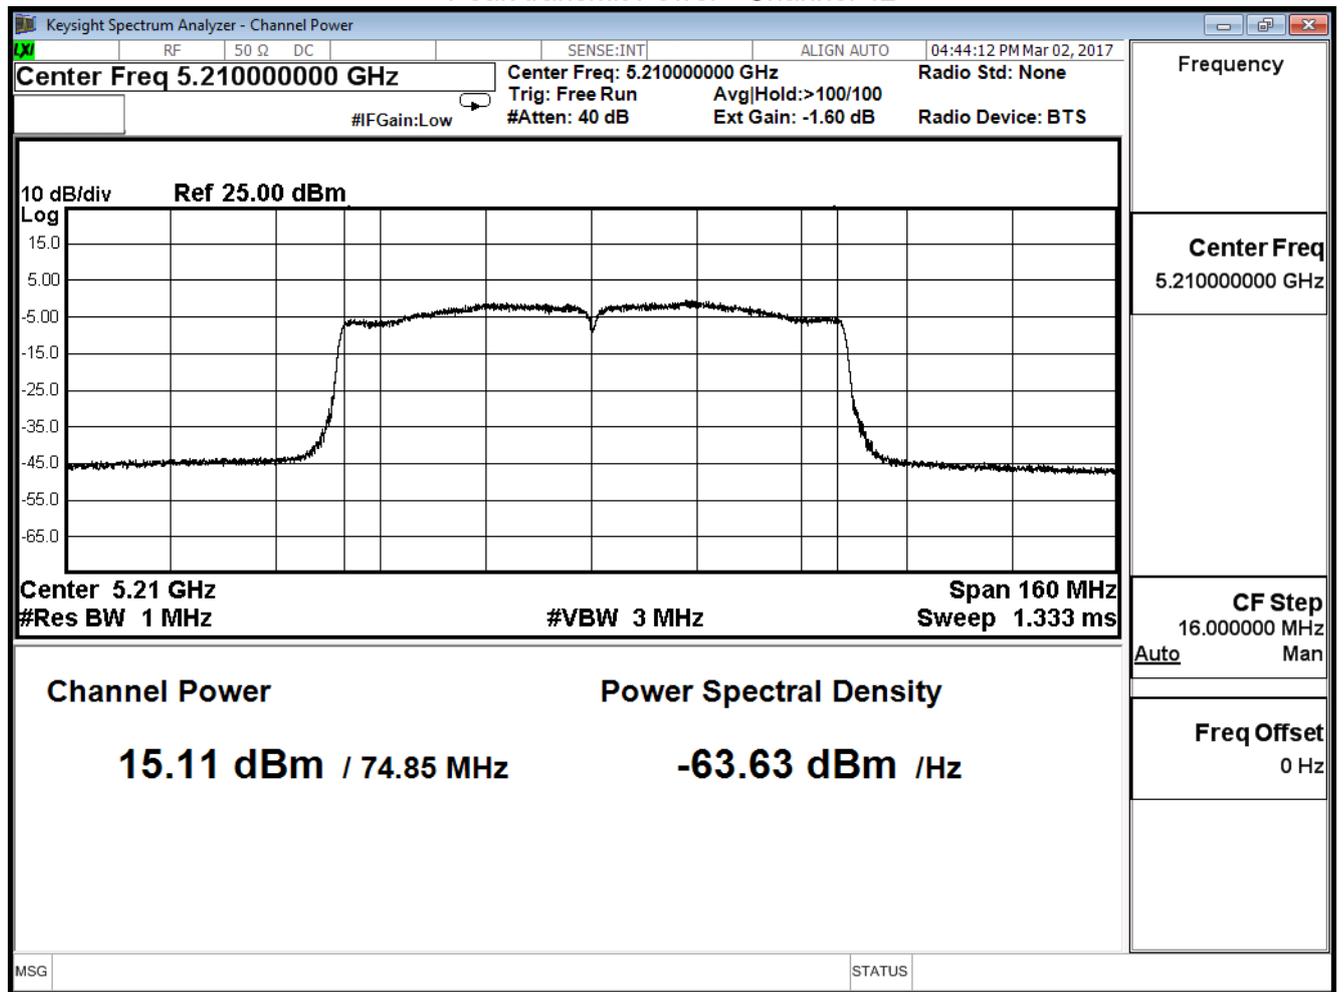

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11ac(80MHz) (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 15.150             | ≤29.66               |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                      |
| 42         | 5210            | 15.150    | 15.010 | 14.890 | 14.700 | 14.510 | 14.330 | 14.080 | 13.920 | 13.770 | 13.550 | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

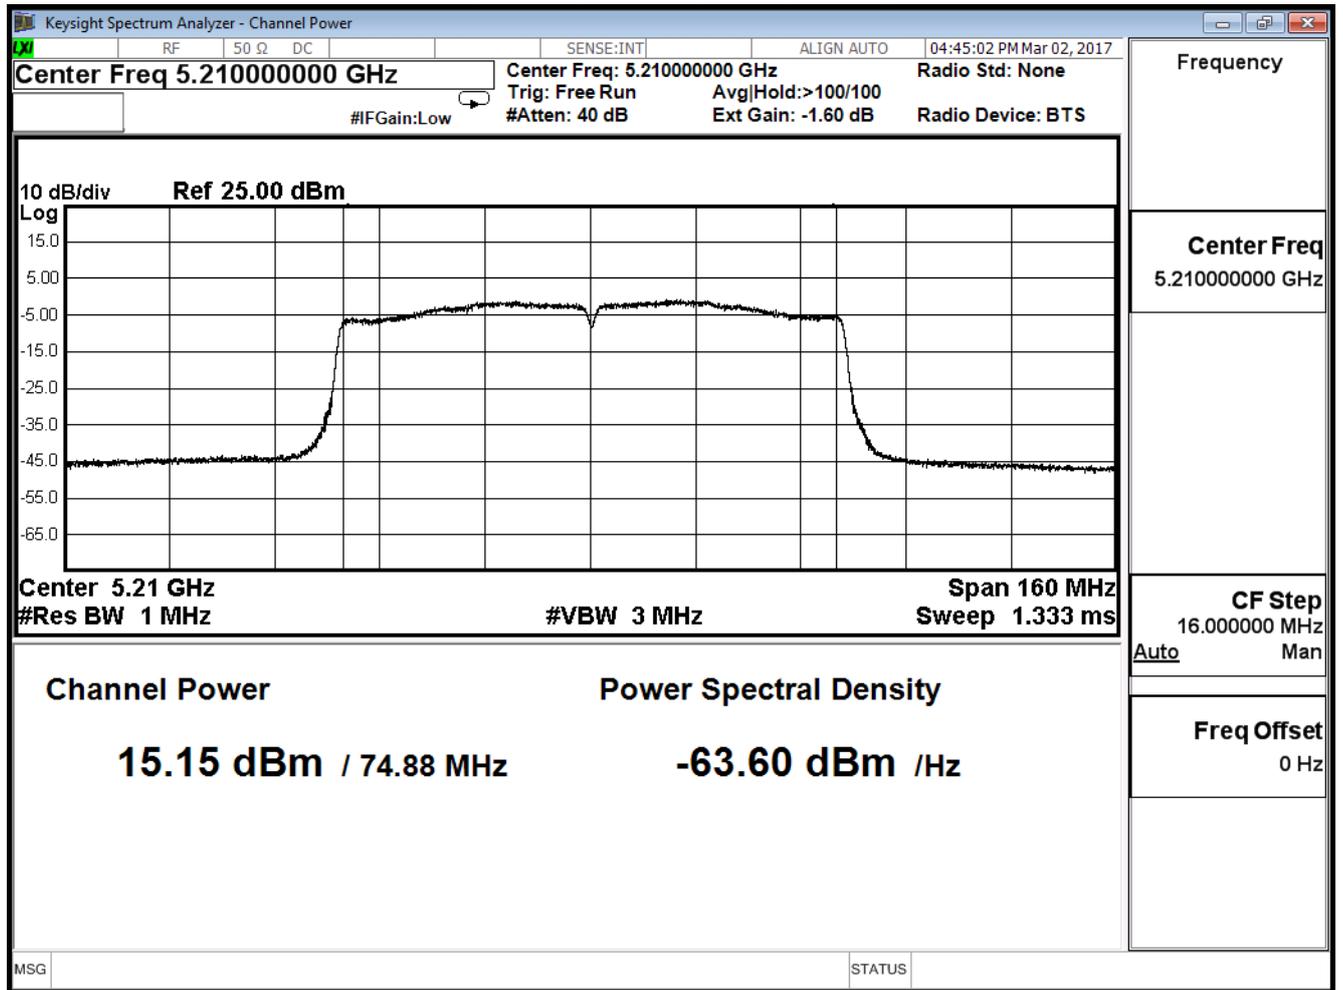

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11ac(80MHz) (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 15.190             | ≤29.66               |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index |        |        |        |        |        |        |        |        |        | Required Limit (dBm) |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
|            |                 | 0         | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      |                      |
| 42         | 5210            | 15.190    | 15.000 | 14.900 | 14.770 | 14.580 | 14.320 | 14.180 | 14.000 | 13.920 | 13.760 | ≤29.66               |

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

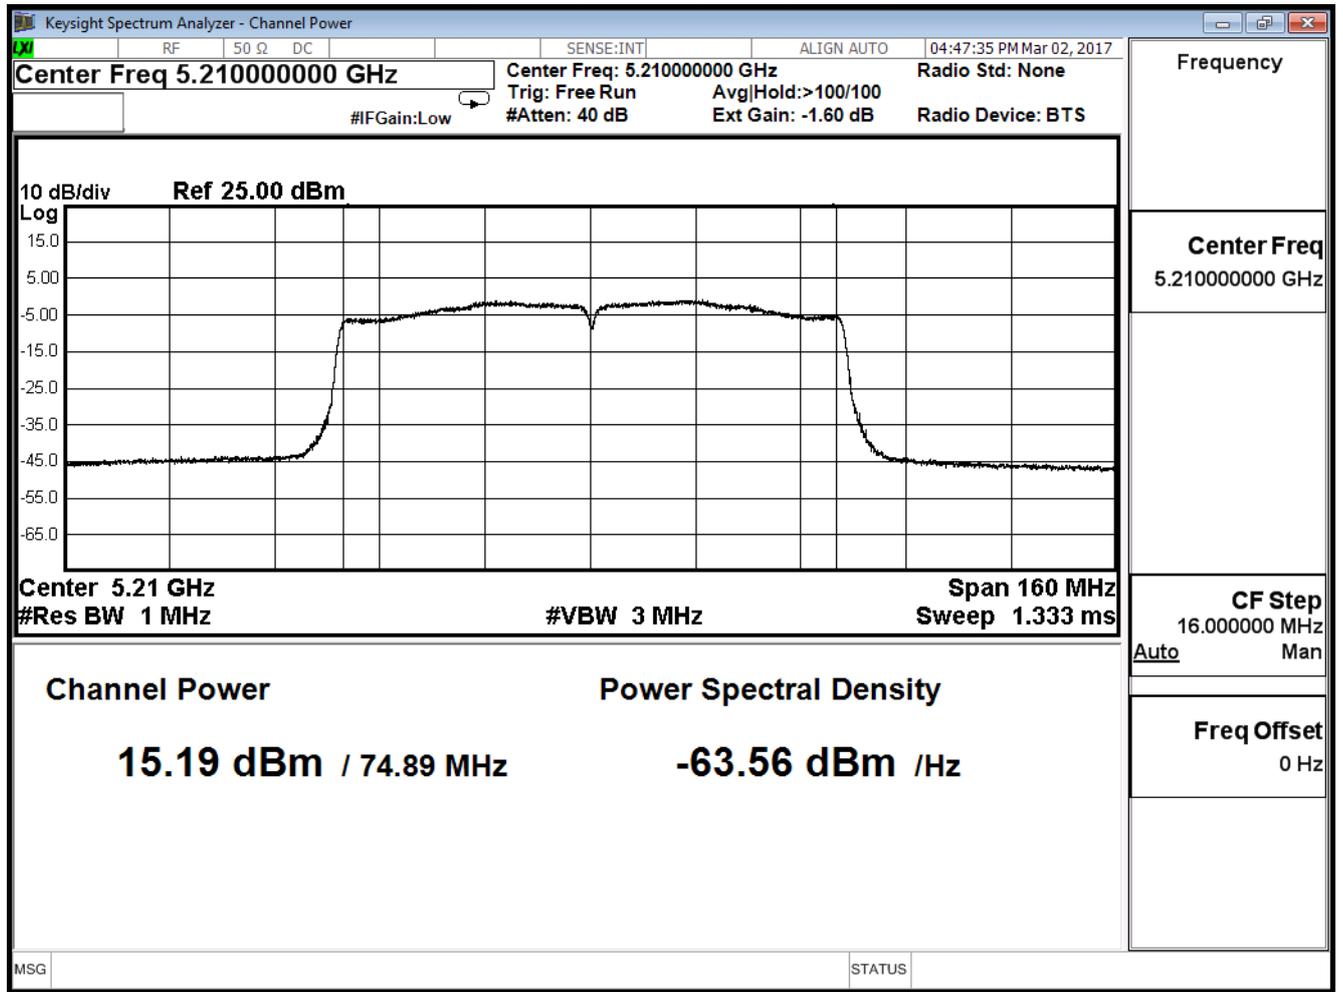

|              |  |           |        |
|--------------|--|-----------|--------|
| Product      | Wireless-AC2900 Dual Band Gigabit Router                         |           |        |
| Test Item    | Peak Transmit Output   |           |        |
| Test Mode    | Mode 3: Tx_ADP: AD890326010-2LF_Beamforming Mode (802.11 n20/40) |           |        |
| Date of Test | 2017/03/02   | Test Site | SR10-H |

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42          | 5210            | 21.151             | ≤29.66               |

$$\text{Directional gain} = 10 \log(\text{ANT N}) + \text{Gain} = 4.77 + 1.57 = 6.34$$

$$\text{Limit} = 30 \text{dBm} - (6.34 \text{dBi} - 6 \text{dBi}) = 29.66 \text{dBm}$$